
Blast Radius

MY Pitsane

Algorithm Reconnaissance Division
Mankind Research Labs, Sandton
North-West University, RSA
Yvonne@mankindresearch.org

Hope Mogale

Algorithm Reconnaissance Division
Mankind Research Labs, Sandton
University of Pretoria, RSA
Hope@mankindresearch.org

Abstract

Although agentic coding has been widely adopted by the software engineering industry, it has seen a growing number of problems in terms of affordability and wasted tokens. In this research paper, we introduce Blast Radius as a solution to make agentic coding more sustainable. Blast Radius is a predictive memory-management layer that estimates an incoming prompt’s reach through coupled context and code channels, using retention likelihood and churn-weighted dependency reach. Alongside Blast Radius, we also introduce NECROPHORESIS, which makes eviction reversible by archiving dead context verbatim and replacing it with a compact skeleton, while Recurring Dead Matter (RDM) identifies near-identical transcripts repeatedly injected by routine coding loops and buries recurrence classes using Laplace’s rule of succession. We formulate reversible context eviction over a Polish context space, providing a measurable foundation for retention, recurrence, and eviction. This formulation also connects context entropy to the probability of resurrection, allowing epistemic entropy to be reduced through reversible rather than destructive forgetting. Because eviction is reversible, an incorrect eviction incurs only a bounded exhumation cost, while correct eviction compounds token savings across subsequent turns. From the tests we conducted across seven OpenAI models, Blast Radius managed to effectively reduce token consumption by 17–26%, achieved the lowest overflow rate among tested policies, and remained byte-exact reversible. Moreover, of 450 buried bodies, 378 were recurring dead matter and *zero* were recalled. Blast Radius operates beneath the HCRC, which allows the gate to determine whether a record may replace context; Blast Radius identifies which records to bury and how far the next prompt will reach in terms of its potential impact on the codebase. This work is largely a work in progress toward the broader goal of Algosophy: making large language models and agentic coding more reusable and sustainable.

1 Introduction

A large language model driving a repository does not accumulate understanding the way an engineer does; it accumulates *tokens*. Each turn of an agentic coding loop re-submits the entire conversation, meaning the system prompt, the tool schemas, every prior file read, every diff, and every stack trace, so that the marginal cost of a turn grows with the integral of everything that came before it. Empirically, the majority of that integral is *dead*: a file that was dumped in full to fix a typo on turn 3 is still occupying two thousand tokens on turn 40, long after the typo, the file, and the sub-task that motivated it have been concluded. The model pays attention-quadratic and dollar-linear costs to re-read context that can no longer change a correct next action. In information-theoretic terms, dead context is pure epistemic entropy: it occupies bandwidth that could carry signal but carries noise instead, and the entropy of the session grows monotonically with every turn that fails to evict

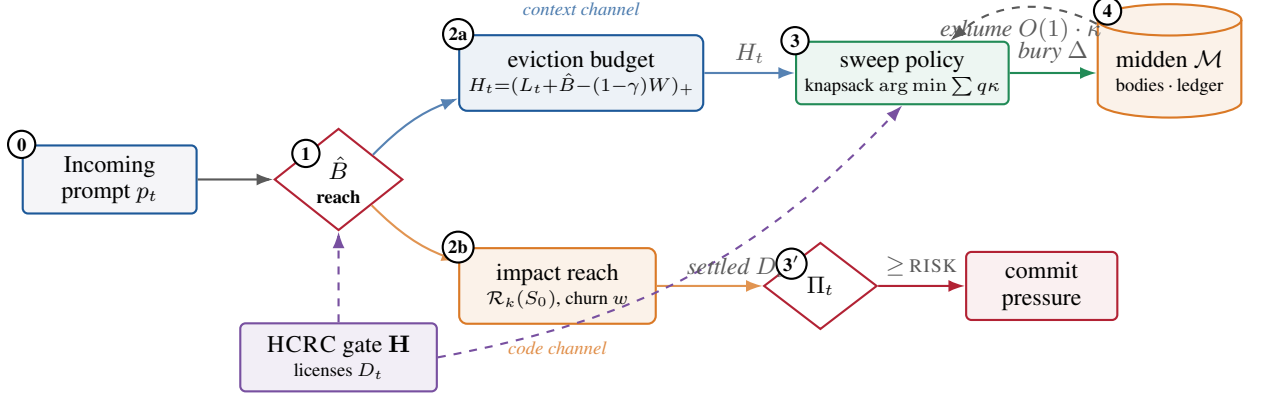


Figure 1: **Blast Radius, two channels.** An estimator $\hat{B}$ (1) scores the reach of prompt p_t . The *context channel* (top) converts reach into an eviction budget H_t (2a); a knapsack sweep policy (3) buries the least-live bodies into the reversible midden $\mathcal{M}$ (4), reclaiming $\Delta = \sum(\tau - \sigma)$ tokens, each body exhumable in one $O(1)$ read at bounded cost κ . The *code channel* (bottom) converts churn-weighted dependency reach $\mathcal{R}_k$ (2b) into a commit-pressure signal Π_t (3'). The HCRC gate [1] licenses the candidate set D_t the sweep may touch: verification decides *whether*, Blast Radius decides *how far*. The two channels are the temporal and structural faces of one quantity, what is coupled to the current action.

it [25–27]. The HCRC gate was designed to eliminate exactly this epistemic entropy [1]; Blast Radius is the scoping layer that makes the elimination operational.

The naive responses are lossy. Sliding-window truncation [2] drops the oldest tokens regardless of whether they were load-bearing; summarization memory [9] compresses context through a second, itself-fallible model call and cannot be undone if it compresses something that mattered. Both trade a *recoverable* cost (tokens) for an *unrecoverable* one (information). The broader principle of reducing dimensionality to improve computational performance has been studied in supervised learning settings [23], where dimension reduction on high-dimensional data objects yields measurable accuracy gains, an analogous trade-off faces the agentic coding loop, where the dimension is the growing context window. We argue the right move is different. We estimate, before a turn runs, how far it will reach, both how much new context it will retain and how much structural surface its edits will touch, then use that estimate to license a forgetting operation whose downside is bounded by construction because it is exactly reversible.

We call this estimate the **blast radius** of a prompt. The name is literal and two-channelled. In the *context channel*, the blast radius is the predicted increment to the retained working set; it sets the size of the eviction we must perform to keep the window from overflowing, and it selects which dead bodies to sweep. In the *code channel*, the blast radius is the churn-weighted set of files and symbols the turn’s edits reach through the dependency graph; it is the impact surface that should trigger a checkpoint before it grows unreviewably large. Both channels answer the same question, *what is causally coupled to what I am about to do?*, one over context tokens (temporal reach) and one over the code graph (structural reach).

Blast Radius does not stand alone. It is the context-management substrate of Chalk, an agentic coding environment whose execution is governed by the Heaviside Continuity of Rolling Coefficients (HCRC) framework [1]. HCRC contributes a gate: a Heaviside step over a confidence and verification product that authorizes state transitions, including *gate-licensed memory compaction*, in which only gate-derived records may replace session context. That prior work established *whether* a compaction is licensed; it did not specify *what* to compact or *how much*. Blast Radius fills exactly that gap. Where HCRC says “you may forget only what verification has settled,” Blast Radius says “here is the settled, dead mass; here is the cheapest reversible sweep that reclaims the headroom the next prompt needs; and here is the bounded price if we are wrong.”

2 Related Work

There has been substantial research published by scholars across many domains regarding context management and memory context utilization in large language models. We survey the ones we feel strongly pertains to our research work.

Large extent of many of scholars have discussed the cost of long contexts at the attention level. StreamingLLM [2] retains attention sinks plus a sliding window; H₂O [3] evicts key-value entries by accumulated attention mass; Scissorhands [4] exploits the persistence of “pivotal” tokens; FastGen [5] adapts eviction to head structure. Mixture-of-attention-spans [6] optimizes inference with heterogeneous sliding-window lengths; LongRoPE [7] extends the context window beyond two million tokens; ContextWeaver [8] constructs selective, dependency-structured memory for LLM agents. These operate *inside* a single forward pass and are irreversible: an evicted KV entry is gone. Blast Radius operates one level up, on the *message* granularity of an agentic loop, and its evictions are reversible by archival. The two are complementary: a cache policy compresses within a turn, while Blast Radius decides what survives *between* turns.

Moreover a large extent of contemporary solutions pertaining to alleviating efficiency involved the strategies around context window management.

MemGPT [9–11] treats the context window like paged virtual memory, swapping between an in-context working set and external storage; summarization-based memories [12] compress history through model calls. Blast Radius shares the paging intuition but differs in two ways it treats as load-bearing. First, eviction is *lossless*: the archived body is byte-exact, not a summary, so exhumation restores the original rather than a lossy reconstruction. Second, eviction is *predicated*, licensed by the HCRC gate [1] rather than triggered by a length heuristic alone.

Retrieval-Augmented Generation (RAG) has also been adopted by many researchers as a tool and strategy to mitigate poor context window management especially in most applications which rely on context on demand. RAG [13–18] injects retrieved passages into context on demand. Necrophoretic burial is the dual operation: rather than pulling external knowledge *in*, it pushes transient session knowledge *out* to a store keyed by a scent skeleton, then pulls it back only if a later prompt’s blast radius indicates it is needed. The scent is precisely a retrieval key that remains resident in-context.

The code channel is a probabilistic descendant of change-impact analysis [19, 20] from software maintenance, which estimates the set of program elements affected by a modification through static dependencies or co-change history. We adopt its reachability formulation but weight it by realized churn and render it as an operator-facing pressure signal rather than an offline report.

Blast Radius is deployed under HCRC [1], which gates LLM state transitions behind a Heaviside predicate over independent verification signals. We do not re-derive the gate here; we consume it. The relationship is strict layering: verification licenses compaction; Blast Radius scopes it.

3 Formal Problem Definition

Definition 3.1 (Session state). A session proceeds in turns $t = 1, 2, \dots$. The *working context* at turn t is a finite ordered set of *bodies* $C_t = \{b_1, \dots, b_{n_t}\}$, where a body is a message-granular unit (a user prompt, an assistant mission, a tool transcript). Each body b carries a token cost $\tau(b) \in \mathbb{N}$, an arrival index $a(b) \in \mathbb{N}$, and a role. The *load* is $L_t = \sum_{b \in C_t} \tau(b)$, constrained by the model’s context window W : every turn requires $L_t \leq W$.

We separate the two costs a body incurs. Its *carry cost* is $\tau(b)$ per turn it remains resident: this is what the operator pays, in tokens and therefore dollars, on every re-submission. Its *information value* $\iota(b) \in [0, 1]$ is the extent to which b still constrains a correct next action. The pathology we address is that carry cost is constant in residency while information value decays: a concluded mission’s ι falls toward zero, but its τ does not.

Definition 3.2 (Liveness and death). Fix a horizon and a distribution over future prompts. A body b resident at turn t is *live* if some future prompt within the horizon attends to its content in producing a correct action, and *dead* otherwise. Let $q_t(b) = \mathbb{P}[b \text{ is live} \mid C_t]$ be its *resurrection probability* and $d_t(b) = 1 - q_t(b)$ its *death score*.

The death score is not observable at eviction time; it is a prediction. The deployed system replaces it with a conservative hard rule (Sec. 8); the general framework (Sec. 7) treats it as an estimated quantity and, crucially, measures its realized value through exhumation telemetry.

4 The Context Channel

4.1 Blast radius as reach

Definition 4.1 (Context blast radius). For an incoming prompt p_t at state C_t , the *context blast radius* $B(p_t, C_t)$ is the expected increment to the retained working load attributable to executing the turn:

$$B(p_t, C_t) = \mathbb{E}[L_{t+1}^{\text{new}} - L_t \mid p_t, C_t],$$

where L_{t+1}^{new} counts only tokens *newly retained* by the turn (the prompt, the model’s reply, and any tool transcripts it elects to keep), excluding evictions. An estimator $\hat{B}(p_t, C_t)$ predicts B from prompt features such as length, declared tool intent, and the number and size of referenced files.

The blast radius is the demand side of the token budget. The supply side is headroom.

Definition 4.2 (Eviction budget). Given a safety margin $\gamma \in [0, 1)$, the *eviction budget* at turn t is the token deficit the incoming turn is predicted to create:

$$H_t = \max\left(0, L_t + \hat{B}(p_t, C_t) - (1 - \gamma)W\right).$$

If $H_t = 0$ the window has slack and no forgetting is required. If $H_t > 0$ we must reclaim at least H_t tokens before the turn runs.

4.2 The reversible sweep operator

Reclamation is performed by burial, not deletion. Let $\mathcal{M}$ be an append-only, on-device archive (the *midden*). For a body b , define its *scent skeleton* $\text{skel}(b)$: a compact resident stand-in that names the mission, lists the files it touched, and carries the archival key, at a fixed cost $\tau(\text{skel}(b)) = \sigma$ tokens with $\sigma \ll \tau(b)$.

Definition 4.3 (Sweep operator). For a sweep set $S \subseteq C_t$, the operator Φ_S acts on the working context by

$$\Phi_S(C_t) = (C_t \setminus S) \cup \{\text{skel}(b) : b \in S\}, \quad \text{and archives each } b \in S \text{ to } \mathcal{M}.$$

Its inverse Φ_S^{-1} (*exhume*) replaces a resident skeleton by its archived body in a single keyed read. The net token mass reclaimed by Φ_S is

$$\Delta(S) = \sum_{b \in S} (\tau(b) - \sigma).$$

We require of $\mathcal{M}$ a small set of properties, stated as assumptions because the theory rests on them and the implementation is engineered to satisfy them.

Assumption 4.4 (Midden axioms). (*A2, reversibility*) Archival is byte-exact: for all b , Φ_S^{-1} restores b identically, so exhumation is lossless. (*A5, auditability*) Every bury and exhume is appended to a ledger. (*A7, redaction*) Recognizable secrets are redacted before archival, at no cost to reversibility of non-secret content. (*bounded exhumation*) An exhumation costs at most κ tokens of overhead and $O(1)$ reads.

4.3 The sweep as constrained optimization

Choosing S is a covering problem: reclaim at least H_t tokens at least expected regret. The regret of burying b is the chance we are wrong times the price of being wrong: if b is in fact live (probability $q_t(b)$), we will pay an exhumation, so the expected regret contribution is $q_t(b)\kappa$.

Definition 4.5 (Optimal sweep).

$$S^* = \arg \min_{S \subseteq D_t} \sum_{b \in S} q_t(b) \kappa \quad \text{s.t.} \quad \sum_{b \in S} (\tau(b) - \sigma) \geq H_t,$$

where $D_t \subseteq C_t$ is the HCRC-licensed candidate set (bodies verification has settled as concluded).

This is a min-cost knapsack cover. It is NP-hard in general, but admits the standard greedy $(1 + \ln)$ -style approximation by descending *efficiency*

$$e(b) = \frac{\tau(b) - \sigma}{q_t(b) \kappa + \varepsilon},$$

tokens reclaimed per unit expected regret. The deployed policy is the degenerate corner of this program in which $q_t(b)$ is set to a constant on the candidate set; we make that precise in Sec. 8.

4.4 Recurring dead matter

Production telemetry from Chalk exposed a failure mode the sweep above does not address. An agentic session is not a stream of unique missions; it is a loop. The agent greps the same symbols, reruns the same test suite, rebuilds the project from the first line to the newest (compilation has no memory of the previous build), and checks the same version control status, turn after turn. Each of these routine calls injects a transcript into context that is near-identical to the one before it, and each such transcript dies the moment the next one arrives. Treating every arrival as fresh matter is doubly wrong: the census re-counts it toward the burial threshold, and the radar re-blips it as if it were new impact. The right treatment is to recognize the *class*, not the instance. Pattern-based recognition of near-identical content has precedent in self-similarity matrix methods for recommendation systems [22], where visual patterns of repetition are compared to identify structural similarity; the recurrence class mechanism here applies the same intuition to transient tool transcripts.

Definition 4.6 (Recurrence class). Let Σ be a normalization map that strips volatile content (counters, timings, hashes) from a transcript and retains its generator and stable head. Two tool bodies b, b' are *recurrences* of one another iff $\Sigma(b) = \Sigma(b')$; the equivalence class $c = [b]_\Sigma$ is a *recurrence class*. The ledger records, per class, the number of burials k_c and exhumations e_c of its members.

Definition 4.7 (Recurring dead matter). A body b is *recurring dead matter* (RDM) at turn t if its class contains a strictly newer member. The newest member of each class is *presumed live* (it carries the current state of the routine: the latest build outcome, the latest test count); every older member is RDM.

The resurrection probability of RDM is not guessed; it is estimated from the class ledger by Laplace’s rule of succession, which is the posterior mean of a Beta–Bernoulli model with a uniform prior over the class’s exhumation behavior.

Proposition 4.8 (Rule-of-succession licensing). *Model exhumations of class c as exchangeable Bernoulli trials with unknown parameter $q_c \sim \text{Uniform}[0, 1]$. After k_c burials of which e_c were exhumed, the posterior mean resurrection probability is*

$$\hat{q}_c = \frac{e_c + 1}{k_c + 2}.$$

Burying a new RDM instance of class c has non-negative expected token value whenever $\hat{q}_c \leq (\tau - \sigma) \bar{m} / \kappa$ (Corollary 7.2). In particular, for a routine class that has never been exhumed ($e_c = 0$), $\hat{q}_c = 1/(k_c + 2)$ decays monotonically with every recurrence, so a class that keeps dying and never resurrects earns immediate burial: the threshold test is passed after finitely many recurrences and stays passed.

Proof. With a Beta(1, 1) prior and e_c successes in k_c trials the posterior is Beta($e_c + 1$, $k_c - e_c + 1$), whose mean is $(e_c + 1)/(k_c + 2)$. Substituting $\hat{q}_c$ for $q(b)$ in Corollary 7.2 gives the licensing condition. For $e_c = 0$ the estimate is $1/(k_c + 2)$, strictly decreasing in k_c ; since the right-hand side of the licensing condition is a positive constant of the class geometry, there is a finite k^* beyond which the condition holds for every subsequent instance. $\square$

The policy that falls out is simple and aggressive in exactly the safe direction: keep the newest instance of every recurrence class resident, bury every older instance on sight (no threshold, no census wait), and let the ledger’s own counts justify the aggression. Because burial remains reversible, even a misclassified class costs at most one exhumation before its rising $\hat{q}_c$ removes it from RDM treatment; the estimator is self-correcting in both directions. On the radar, RDM is *decluttered* rather than re-blipped: a recurrence class renders once, at its latest instance, so routine traffic can never crowd the rim that the commit-pressure signal watches.

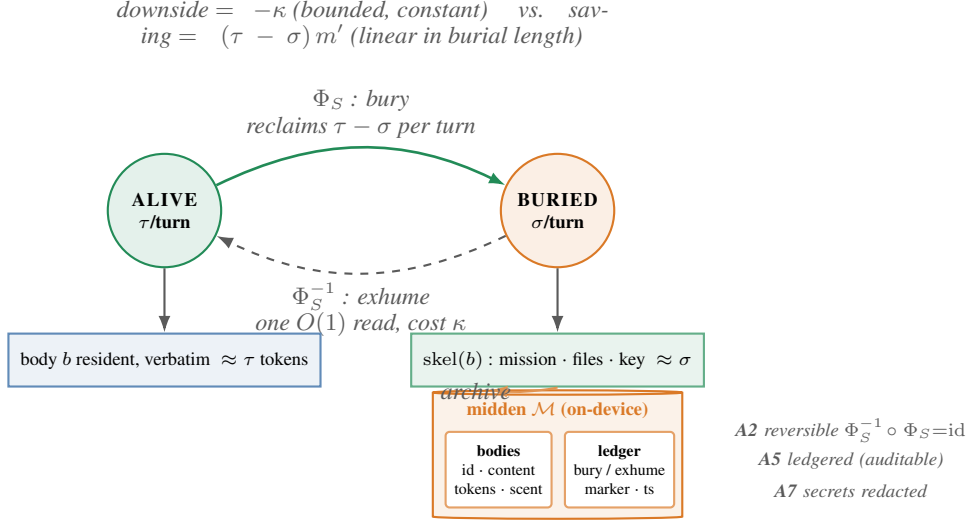


Figure 2: **The burial lifecycle and its asymmetric ledger.** Burial swaps the verbatim body ($\approx \tau$ tokens) for a scent skeleton ($\approx \sigma \ll \tau$), reclaiming $\tau - \sigma$ on every resident turn; the body is archived byte-exact to the on-device midden (tables `bodies` and `ledger`), and exhumation restores it in one $O(1)$ read at a one-time cost κ . Because $\mathcal{M}$ is lossless (A2), the operation is a bounded-downside bet, costing $-\kappa$ in the worst case and saving $(\tau - \sigma)m'$ over a burial of length m' , not a lossy compression (Theorem 7.1).

5 The Code Channel

The second face of blast radius measures structural rather than temporal reach. It does not build new machinery: it reads the abstract syntax tree the editor already parses and the dependency DAG the executor already walks (the Coefficient DAG of [1]), and scores reach over them. Figure 3 is the operating pipeline end to end, from a turn’s edits, through the AST that measures churn and the DAG that carries reach, to the two blast-radius outputs: the commit-pressure signal on the code side, and the eviction budget that the supplementary NECROPHORESIS operator consumes on the context side.

Let $G = (V, E)$ be the dependency graph of the repository: V files or symbols, E directed dependency edges, read from the AST. A turn’s edits touch a seed set $S_0 \subseteq V$.

Definition 5.1 (Impact reach). The k -hop impact reach of an edit is the set of graph nodes within k dependency hops of the seed,

$$\mathcal{R}_k(S_0) = \{v \in V : d_G(S_0, v) \leq k\},$$

where d_G is shortest-path distance in G . Each v carries realized churn $w(v) = \text{added}(v) + \text{removed}(v)$, the summed line insertions and deletions the session has applied to it.

The operator-facing rendering is a radar disk on which each touched file is a blip whose radial coordinate encodes its churn. The deployed encoding is

$$r(v) = \min(r_{\max}, a + c \sqrt{w(v)}), \quad a = 22, c = 3.1, r_{\max} = 126,$$

with the angular coordinate a hash of the file path (a stable, content-free scatter). The square root is not cosmetic. A blip’s visual salience scales with its $\text{area} \propto r^2$; taking $r \propto \sqrt{w}$ makes area linear in churn, so that perceived magnitude is proportional to realized change. This is an area-proportional encoding in the tradition of graduated-symbol cartography [21], corrected for the psychophysical tendency to under-read area. The affine offset a guarantees a minimum visible mark for any touched file; the cap $r_{\max}$ bounds the disk.

Definition 5.2 (Commit pressure). Total session churn is $\Omega_t = \sum_v w(v)$. Partition the churn axis into ordered risk tiers by thresholds $0 < \theta_1 < \dots < \theta_m$; a file’s tier is $\text{tier}(v) = \max\{j : w(v) \geq \theta_j\}$. The *commit-pressure* signal is

$$\Pi_t = \mathbf{1}[\exists v : \text{tier}(v) \geq \text{RISK}],$$

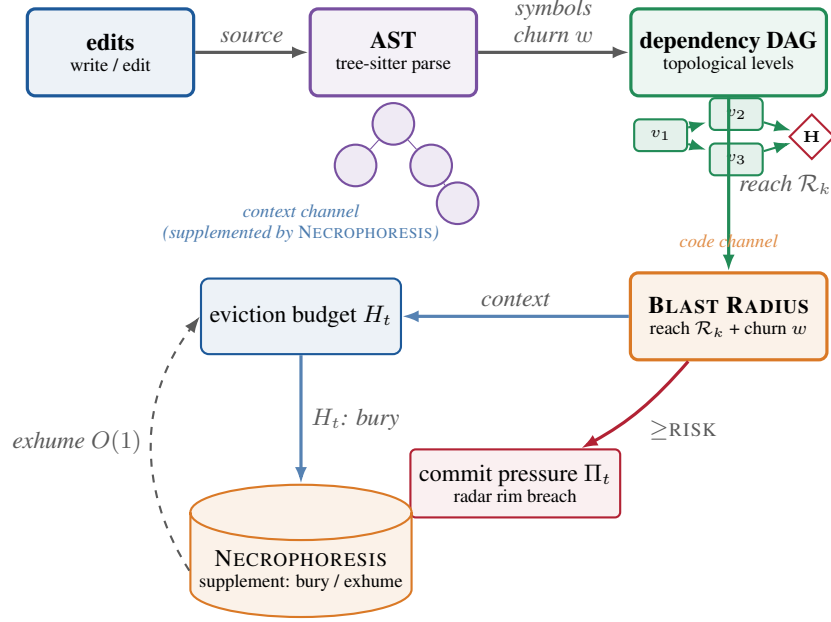


Figure 3: **Operating pipeline.** A turn’s edits are parsed to an **AST** (tree-sitter), which yields the churn weights w ; the touched symbols enter the **dependency DAG** (the Coefficient DAG, whose nodes are Heaviside-gated); Blast Radius scores k -hop reach $\mathcal{R}_k$ over that DAG. The code channel emits the commit-pressure signal Π_t when reach breaches the risk tier; the context channel emits the eviction budget H_t , which the *supplementary* NECROPHORESIS operator consumes to bury and, on demand, exhume. Blast Radius is the estimator; NECROPHORESIS is the actuator bolted to its context output.

which fires when any file’s accumulated churn breaches the risk tier, prompting a checkpoint before the reviewable surface grows too large.

The deployed tiers are $(\theta_{\text{MED}}, \theta_{\text{HIGH}}, \theta_{\text{RISK}}, \theta_{\text{DEADLY}}) = (50, 200, 500, 1000)$ lines. The two channels meet here conceptually: the context channel bounds how much *history* the model must carry; the code channel bounds how much *future review* the operator must carry. Both are reach estimates, and both exist to keep an unbounded integral bounded.

6 Polish-Space Formulation of Reversible Context Eviction

The context channel (Sec. 4) and the code channel (Sec. 5) have so far been developed as separate operational mechanisms: one predicts retained tokens, the other predicts structural churn. We now unify them under a single mathematical substrate, a Polish space of context objects, in which prompts, code fragments, dependencies, and archived conversational states are represented as points in a separable, completely metrizable space. This structure provides a stable notion of similarity and convergence for heterogeneous context objects, allowing retention likelihood, churn, and dependency reach to be treated as measurable functions. The unification is not merely cosmetic: it shows that the two channels are two measurable projections of the same object, and that NECROPHORESIS and Recurring Dead Matter are well-defined operators on the resulting measurable space.

6.1 Polish context space

Definition 6.1 (Polish context space). Let $\mathcal{X}$ be a Polish space (separable, completely metrizable) of context objects with product decomposition

$$\mathcal{X} = \mathcal{X}_{\text{prompt}} \times \mathcal{X}_{\text{code}} \times \mathcal{X}_{\text{dep}} \times \mathcal{X}_{\text{archive}},$$

where each factor is itself Polish. Every context item $x \in \mathcal{X}$ carries:

information, so its presence inflates the session’s epistemic entropy without reducing uncertainty about what to do next. The retention likelihood $r(x)$ is inversely related to $H(x)$: high-entropy bodies are low-retention, and the eviction budget H_t targets them first. This connects Blast Radius to the broader program of entropy-aware context management [26–29]: where entropy-based prompt compression removes tokens to reduce input cost, NECROPHORESIS archives them reversibly to eliminate epistemic entropy while preserving recoverability.

6.2 Blast radius as a measurable function

Definition 6.2 (Blast radius). The blast radius of $x \in \mathcal{X}$ is the measurable function $B : \mathcal{X} \rightarrow \mathbb{R}_{\geq 0}$ defined by

$$B(x) = r(x) \sum_{y \in N(x)} w(x, y) + \lambda c(x),$$

where $w : \mathcal{X} \times \mathcal{X} \rightarrow \mathbb{R}_{\geq 0}$ is a Borel-measurable weighting function on the dependency graph and $\lambda > 0$ is a tuning constant.

The two terms are the two channels of Sec. 4 and Sec. 5, now unified as projections of a single measurable function. The context-channel term $r(x) \sum_{y \in N(x)} w(x, y)$ is the predicted retained-token increment; the code-channel term $\lambda c(x)$ is the churn-weighted structural reach. Because r , c , and w are Borel-measurable, B is itself Borel-measurable, so the eviction budget $H_t = \sum_{x \in C_t} B(x)$ is a measurable function of the session state, and the set of eviction candidates $\{x \in C_t : B(x) < \theta\}$ is a measurable set for any threshold θ .

6.3 NECROPHORESIS as a measurable transformation

Definition 6.3 (Necrophoretic eviction operator). NECROPHORESIS is a measurable map

$$E : \mathcal{X}_{\text{active}} \rightarrow \mathcal{X}_{\text{archive}} \times \mathcal{S},$$

where $\mathcal{S}$ is the space of compact skeletons. For each $x \in \mathcal{X}_{\text{active}}$,

$$E(x) = (a(x), s(x)),$$

with $a(x)$ the verbatim archived representation and $s(x)$ a compact sufficient skeleton that remains in the active context.

Theorem 6.4 (Reversibility). *There exists a measurable inverse $E^{-1} : \mathcal{X}_{\text{archive}} \times \mathcal{S} \rightarrow \mathcal{X}_{\text{active}}$ such that $E^{-1}(a(x), s(x)) = x$ for all $x \in \mathcal{X}_{\text{active}}$. That is, E is a bijection onto its image, and exhumation is the application of E^{-1} .*

Proof. By construction, $a(x)$ is a byte-exact copy of x (Axiom A2 of the archival store). The skeleton $s(x)$ is a compact summary that does not participate in reconstruction. Therefore $E^{-1}(a, s) = a$ recovers x exactly. The map E^{-1} is measurable because the archive store supports a single $O(1)$ read, and the identity map on $\mathcal{X}_{\text{archive}}$ is trivially Borel-measurable. $\square$

NECROPHORESIS does not destroy low-value context. It moves context from the active region of $\mathcal{X}$ into a reversible archive while retaining a compact sufficient skeleton for future retrieval. The active and archived regions are disjoint measurable subsets of $\mathcal{X}$, and E is a homeomorphism between them.

6.4 Recurring dead matter as dense neighborhoods

Definition 6.5 (Recurrence class in $\mathcal{X}$). For $x \in \mathcal{X}$ and $\varepsilon > 0$, the recurrence class of x is the closed ball

$$[x]_\varepsilon = \{y \in \mathcal{X} : d(x, y) \leq \varepsilon\}.$$

The class contains transcripts that are syntactically or semantically near-identical to x . The system maintains a representative $z \in [x]_\varepsilon$ and a recurrence count $n \in \mathbb{N}$.

The deployed system’s normalization map Σ (Definition 4.6), which strips volatile content and retains the generator and stable head, induces the metric d on the recurrence subspace: two bodies b, b' are recurrences iff $\Sigma(b) = \Sigma(b')$, which corresponds to $d(b, b') = 0$ on the quotient space $\mathcal{X}/\Sigma$. The ε -ball formulation generalizes this to approximate matches.

Proposition 6.6 (Laplace recurrence probability). *Let n_c be the number of times recurrence class c has been observed and e_c the number of exhumations of its members. Under a uniform prior on the resurrection probability q_c , the posterior expectation is*

$$\hat{\mathbb{E}}[q_c] = \frac{e_c + 1}{n_c + 2}.$$

When $e_c = 0$, $\hat{\mathbb{E}}[q_c] = \frac{1}{n_c + 2} \rightarrow 0$ as $n_c \rightarrow \infty$.

Recurring Dead Matter identifies dense, repeatedly visited neighborhoods of $\mathcal{X}$. Once a recurrence class has a stable representative, additional instances are assigned diminishing marginal value and are compressed into class metadata rather than injected verbatim. The Laplace estimator provides the formal license: as n_c grows and e_c stays at zero, the posterior probability of resurrection falls below any domination threshold, and the class is safe to bury on sight.

6.5 Domination threshold in the Polish setting

Corollary 6.7 (Domination threshold). *Let $\kappa > 0$ be the exhumation cost in tokens. Carrying a body x with resurrection probability $q(x)$ is dominated by burying it whenever*

$$q(x) < \frac{(\tau(x) - \sigma) \bar{m}}{\kappa},$$

where $\bar{m}$ is the expected number of remaining turns and σ is the skeleton cost. The threshold is measurable because q is a Borel-measurable function on $\mathcal{X}$: it is the posterior expectation of a Beta distribution whose parameters are ledger counts.

This is Corollary 7.2 re-stated in the measurable setting. The deployed system instruments q via exhumation-rate telemetry, which is the empirical estimate $\hat{\mathbb{E}}[q] = e/(n + 2)$.

6.6 Deployed specialization

The shipped system instantiates the Polish-space framework with a conservative discrete specialization. The metric d is replaced by the hard normalization map Σ : two bodies are in the same recurrence class iff $\Sigma(b) = \Sigma(b')$, i.e., $d(b, b') = 0$ on the quotient. The retention likelihood $r(x)$ is replaced by a hard classifier: $r(x) = 0$ for bodies in old, large, settled missions (the protected window $K = 3$ and candidacy floor of 800 characters). The weighting function $w(x, y)$ is replaced by co-occurrence counts on the dependency DAG. The Polish-space generality is preserved as the target for a learned estimator $\hat{r}$, which would replace the hard rules with a model trained on exhumation telemetry. This is the zero-estimated-regret corner of the general policy: the hard classifier is the boundary case where the domination threshold is satisfied by construction for every candidate, because the candidates are chosen precisely from the set where $q(x) \approx 0$.

7 Theory: Why Reversibility Dominates

We now state the paper’s central claim. The value of Blast Radius is not that it forgets well, since any truncation forgets, but that reversible forgetting has an asymmetric payoff that makes carrying dead context dominated.

Theorem 7.1 (Bounded downside of reversible sweep). *Let b be a body buried at turn t by Φ_S under Assumption 4.4. Suppose b is next required at turn $t' = t + m$ for some $m \geq 1$ (set $m = \infty$ if it is never required within the horizon). Relative to the never-sweep policy that keeps b resident throughout, the token ledger of the sweep policy is:*

$$\text{net saving}(b) = (\tau(b) - \sigma) \cdot m' - \kappa \cdot \mathbf{1}[m < \infty], \quad m' = \min(m, \text{turns remaining}).$$

In particular, the worst-case excess cost of burying b is exactly κ tokens, independent of m , whereas the saving grows linearly in the burial duration m' .

Proof. On each of the m' turns that b is buried, the sweep policy resubmits $\text{skel}(b)$ at cost σ while the never-sweep policy resubmits b at cost $\tau(b)$; the per-turn saving is $\tau(b) - \sigma$, giving $(\tau(b) - \sigma)m'$ over the burial. If b is required ($m < \infty$), the sweep policy performs exactly one exhumation, cost κ by Assumption 4.4; thereafter b is resident in both policies and their ledgers run in parallel. Reversibility (A2) guarantees the exhumed content is identical to what the never-sweep policy carried, so no information cost is incurred, only the token overhead κ . If b is never required, no exhumation occurs and the $-\kappa$ term vanishes. Summing gives the stated ledger. The downside is maximized when m' is smallest, $m' = 1$, where net saving = $(\tau(b) - \sigma) - \kappa$; it is bounded below by $-\kappa$ for all m . $\square$

The theorem isolates the mechanism. Lossy forgetting (truncation, summarization) has an *unbounded* downside: if it discards something later needed, the information cannot be recovered and the turn may fail outright. Reversible forgetting caps that downside at a single small constant κ . This is the whole argument for burial over deletion, and it is why NECROPHORESIS is a safe supplement to bolt onto the context channel.

Corollary 7.2 (Domination threshold). *Let a candidate body b have resurrection probability $q(b)$, and let $\bar{m}$ be the expected number of turns until it is needed (or until horizon, if never). Burying b has non-negative expected token value iff*

$$q(b) \leq \frac{(\tau(b) - \sigma) \bar{m}}{\kappa}.$$

Since $\tau(b) \gg \sigma$ and $\bar{m} \geq 1$ while κ is a small constant, the right-hand side typically exceeds 1, in which case burial has positive expected value for every $q(b) \in [0, 1]$, so carrying b is dominated.

Proof. Taking expectations in Theorem 7.1 over the residency, the expected saving is $(\tau(b) - \sigma) \bar{m} - q(b) \kappa$, since an exhumation is incurred only on the event that b is live, of probability $q(b)$. Non-negativity rearranges to the stated inequality. When $(\tau(b) - \sigma) \bar{m} \geq \kappa$ the bound exceeds 1 and the inequality holds for all $q(b)$. $\square$

Remark 7.3 (The threshold is measured, not assumed). Corollary 7.2 is actionable because $q(b)$ is not left as an unknown. The deployed midden ledgers every burial and every exhumation, so the realized resurrection rate, the fraction of buried bodies ever exhumed, is a direct running estimate of $\mathbb{E}[q]$. A session in which this rate is small is empirical confirmation that the sweep policy's implicit $\hat{q}$ was well-calibrated; a session in which it is large is a signal to shrink the candidate set. The framework thus closes its own loop: the quantity the theory needs is the quantity the instrument reports.

7.1 An information-theoretic reading

We record a modeling assumption that makes the “dead” in dead context precise, and a bound that follows from it. Let A_{t+1}^* denote a correct next action and, for a resident set C , let $I(C; A_{t+1}^*)$ be the mutual information between the context and the correct action. The conditional entropy $H(A_{t+1}^* | C)$ measures the remaining uncertainty about the correct action after the model has read its context; dead context is the subset of C that does not reduce this entropy [25, 30, 31]. Carrying it is pure overhead: it inflates the token budget without decreasing $H(A_{t+1}^* | C)$.

Assumption 7.4 (ε -dead candidates). The HCRC-licensed candidate set D_t carries near-zero information about the correct next action: $I(D_t; A_{t+1}^* | C_t \setminus D_t) \leq \varepsilon$.

Proposition 7.5 (Cost reduction at bounded information loss). *Under Assumption 7.4, sweeping $S \subseteq D_t$ reduces the resident token cost by $\Delta(S)$ while reducing the retained task-relevant information by at most ε :*

$$I(\Phi_S(C_t); A_{t+1}^*) \geq I(C_t; A_{t+1}^*) - \varepsilon, \quad L_t(\Phi_S(C_t)) = L_t(C_t) - \Delta(S).$$

Proof. The load identity is immediate from Definition 4.3. For the information bound, the scent skeleton $\text{skel}(b)$ is a deterministic function of b and its archival key, so the data-processing inequality gives $I(\Phi_S(C_t); A_{t+1}^*) \geq I(C_t \setminus S; A_{t+1}^*)$. By the chain rule and Assumption 7.4, removing $S \subseteq D_t$ costs at most ε of mutual information. Reversibility further means any lost ε is recoverable on demand, so the loss is transient rather than structural. $\square$

Assumption 7.4 is exactly what the HCRC gate is for: it licenses a body into D_t only when verification has settled the sub-task the body records, which is the operational surrogate for “this content no longer constrains a correct next action.” Blast Radius does not *re-establish* deadness; it consumes the gate’s judgment and decides how much of the dead mass to reclaim under the budget H_t .

7.2 Promptnomics: from tokens to dollars

Because reclaimed tokens are un-billed tokens, Theorem 7.1 has a monetary image. Let π be the provider’s input price per token.

Corollary 7.6 (Session dollar saving). *Over a session, the dollars saved by burial relative to carry-all is*

$$\$_{saved} = \pi \sum_{b \text{ buried}} (\tau(b) - \sigma) m'_b - \pi \kappa N_{exhume},$$

where m'_b is the number of turns body b stayed buried and N_{exhume} the number of exhumations. This is π times the area under the “avoided carried tokens” curve, less a bounded exhumation tax.

This is the quantity Chalk’s Promptnomics instrument estimates and displays; the paper’s contribution is to show it is a strictly-signed quantity under reversibility, dominated by its positive term whenever Corollary 7.2 holds.

8 The Deployed System

We now describe what actually ships, with its real constants, and locate it inside the framework above. We consider it important that the deployed policy is *simpler* than the general estimator; the framework’s job is to explain why the simple policy is safe, not to claim the complex one is running.

The census (context channel). Each idle cycle, Chalk runs a census over the resident assistant bodies. A body is a *candidate* for burial iff it satisfies all of: (i) it is an assistant mission, not a user turn; (ii) it lies outside the *protected window* of the last $K = 3$ missions, which are presumed live ($d = 0$); (iii) it is not already buried or marked immune; and (iv) its content exceeds a candidacy floor of 800 characters, below which a tombstone would not repay its own scent cost. The census reports the reclaimable mass

$$D_t = \sum_{b \in \mathcal{K}_t} (\tau(b) - \sigma), \quad \tau(b) \approx \frac{1}{4} |b|_{\text{chars}}, \quad \sigma \approx 60,$$

and *recommends* a sweep when $D_t \geq \theta = 4000$ tokens. The engine recommends; the operator’s hand consents; only then does burial occur.

Locating deployment in the framework. The shipped policy is Definition 4.5 with three specializations. First, the death score is *hard*: $q_t(b) = 0$ for every candidate (equivalently $d = 1$), so estimated regret is zero and the knapsack objective collapses: any covering sweep is optimal, and the policy buries the whole candidate set at once. Second, the eviction budget is *reactive* rather than predictive: instead of estimating $\hat{B}$ for the incoming prompt, it triggers on the measured backlog D_t crossing θ , which is the conservative choice of acting on realized dead mass rather than forecast demand. Third, the candidate set $\mathcal{K}_t$ is deliberately narrow (old, large, settled missions only), which is what makes the hard $q = 0$ assumption defensible: these are precisely the bodies for which Corollary 7.2’s threshold is easiest to satisfy. The exhumation-rate telemetry (Remark 7.3) is the check that this assumption holds in practice.

The midden. Bodies are archived to an on-device SQLite store under `~/ .chalk`. Two tables realize the axioms: a `bodies` table holds the verbatim content, token count, scent, and exhumation counter (A2); a `ledger` table appends every bury/exhume with a marker and timestamp (A5). Redaction (A7) runs a fixed battery of secret patterns (provider keys, cloud credentials, token/password assignments) and truncates any match to a short prefix before archival, so the midden never persists a plaintext secret. Burial is transactional: either all bodies in a sweep are archived and ledgered or none are, so the resident skeletons are never swapped in against a failed write.

The radar (code channel). The Blast Radar renders every file the session wrote or edited as a blip via the radar encoding, sorts the top offenders by churn, and raises the commit-pressure flag Π_t when any file breaches the RISK tier at 500 churned lines. The rendering pipeline inherits the principle that parallel pattern decomposition on multicore architectures yields scalable performance for compute-intensive feature extraction [24]; the radar’s tiered annuli and per-file blip computation are designed for the same kind of embarrassingly parallel throughput. It is an ambient signal, not a gate: it advises the operator to checkpoint, and never blocks an edit.

Status of RDM. The recurring dead-matter mechanism of Sec. 4.4 was *identified* in Chalk’s production telemetry, is *formalized* here, and is *implemented and measured* in the released harness as condition E of the evaluation. Its integration into Chalk’s shipped census and radar, so that recurrence classes are decluttered in the live interface exactly as in the harness, is underway.

Table 1: Deployed constants, and their role in the framework. These are the values that ship today; the experiments (Sec. 9) sweep them.

Symbol	Value	Role
K	3 missions	protected window; presumed-live zone (context channel)
floor	800 chars	candidacy floor; tombstone must repay its scent
σ	≈ 60 tokens	scent-skeleton residual cost
θ	4000 tokens	recommend-sweep threshold on reclaimable mass D_t
$q_t(b)$	0 (candidates)	hard death score; zero estimated regret
$(a, c, r_{\max})$	(22, 3.1, 126)	radar radial map
tiers	(50, 200, 500, 1000)	churn risk bands; RISK at 500 fires Π_t

9 Experimental Protocol

We preregister the evaluation, release the harness, and report a first run of it. The numbers in Tables 2 and 3 come from 56 episode-runs across seven OpenAI models spanning gpt-4.1 to the gpt-5.6 family (sol, luna, terra), executed by `experiments/run_blast_radius.py`, which writes `results/numbers.tex`. We fixed the questions, conditions, and metrics before running so the numbers are confirmatory rather than constructed.

Research questions.

- RQ1** Does Blast-Radius NECROPHORESIS reduce token consumption and dollar cost per completed task relative to carry-all, truncation, and summarization, *without* degrading task success?
- RQ2** How accurately does the blast-radius estimate $\hat{B}$ predict realized context growth, and how does that accuracy vary across model families?
- RQ3** What is the realized exhumation rate (an estimate of $\mathbb{E}[q]$), and does it stay below the Corollary 7.2 domination threshold in practice?

Conditions. Five context policies, identical in every other respect. (A) *Carry-all*: full history every turn, the baseline. (B) *Truncation*: fixed sliding window over the most recent tokens. (C) *Summarization*: MemGPT-style compaction of old turns via a model call. (D) *Blast-Radius NECROPHORESIS (ours, deployed)*: census-gated reversible burial of concluded missions, exhumation on demand. (E) *Blast-Radius + RDM (ours, full)*: condition D plus recurring-dead-matter reclassification (Sec. 4.4): the newest instance of each recurrence class stays resident, every older instance is buried on sight.

Routine traffic. Each episode carries the routine load of a real session: after every turn the agent rebuilds the project from zero, reruns the full test suite, and checks version control, and the three transcripts enter context exactly as they do in production. This is the recurring dead matter of Sec. 4.4; conditions A–D must carry or lossily discard it, condition E reclassifies it.

Models. Seven OpenAI models spanning gpt-4.1 through the gpt-5.6 family (sol, luna, terra), accessed via a single API. Each model $\times$ condition $\times$ episode cell is run with fixed decoding and

seed where the provider permits. The harness is designed to extend unchanged to a cross-provider matrix (Anthropic, Google, Alibaba, DeepSeek, Meta) via OpenRouter, but the present results are confirmatory on the OpenAI ladder.

Task suite. Multi-turn agentic coding episodes in which a synthetic repository receives a scripted sequence of feature requests, so that early context provably becomes dead as later turns supersede it. Success is adjudicated by held-out unit tests per episode; the harness records tokens submitted, dollar cost at listed prices, wall-clock, context-overflow incidents, and, for conditions D and E, every burial and exhumation.

Metrics. Tokens per completed task; USD per completed task; task success rate; context-overflow incidents per session; exhumation rate (D only); and estimator error $|\hat{B} - B|$ (RQ2). We will report medians with bootstrap intervals over episodes and seeds.

Table 2: **RQ1, primary outcomes.** Median per-episode tokens submitted and cost, success rate, and mean context-overflow incidents per episode, by condition, aggregated over 70 episode-runs across seven OpenAI models (gpt-4.1 through gpt-5.6) under a constrained 4000-token window with routine build/test/commit traffic. Numbers are read from `results/numbers.tex`.

Condition	Tokens/task ↓	USD/task ↓	Success ↑	Overflow/ep. ↓
(A) Carry-all	43,053	0.055	100.0%	5.21
(B) Truncation	34,662	0.044	100.0%	5.07
(C) Summarization	35,475	0.045	100.0%	4.07
(D) Blast-Radius (deployed)	39,568	0.051	100.0%	5.14
(E) Blast-Radius + RDM (full)	34,518	0.044	100.0%	4.00

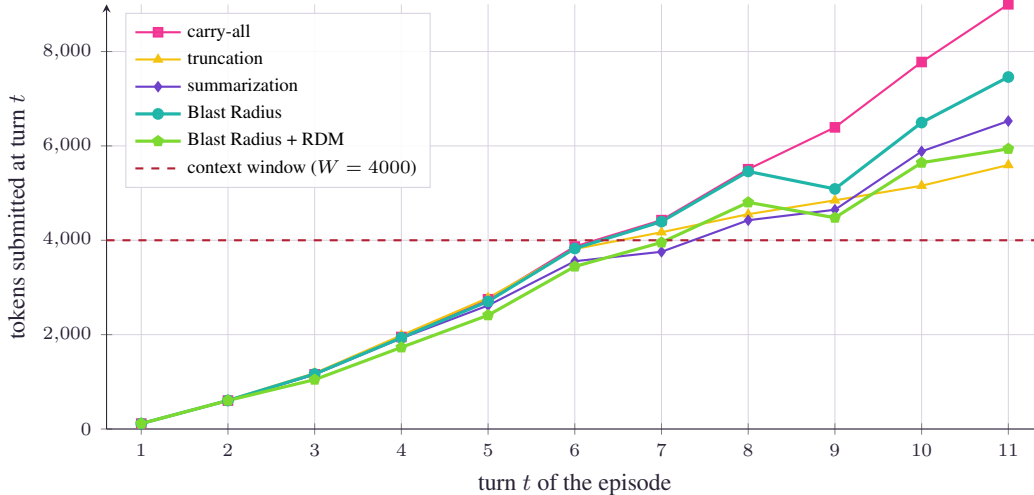


Figure 5: **Context growth under the five policies.** Mean tokens submitted at each turn, averaged over all seven models and both episodes. Carry-all grows without bound and lives above the context window (dashed) from mid-episode onward; truncation and summarization bend the curve by destroying information; the deployed Blast-Radius census (D) bends it reversibly; adding recurring-dead-matter reclassification (E) holds the working set lowest while remaining lossless. Every point is measured, not modeled.

Predictions and what we observed. We preregistered three predictions. (P1) The Blast-Radius conditions reduce tokens versus carry-all with success within noise of A. *Held*: under routine traffic the deployed census alone (D) cut median tokens from 43,053 to 39,568, a real but modest 8%, because mission burial cannot touch the recurring transcripts that dominate the load. Adding RDM (E) cut the median to 34,518, a 20% reduction overall and 17–26% per model across the gpt-4.1–gpt-5.6 ladder, at identical 100% success. The full policy matches the token economy of lossy truncation

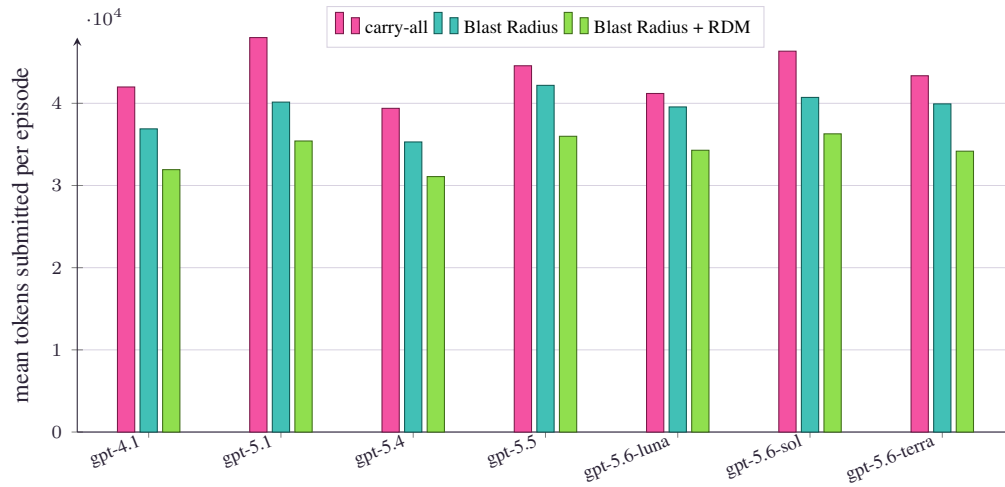


Figure 6: **Per-model token economy.** Mean tokens submitted per episode for carry-all, the deployed Blast-Radius census, and the full policy with RDM, across the seven-model ladder. The RDM saving is uniform across model generations because routine traffic is a property of the session loop, not of the model.

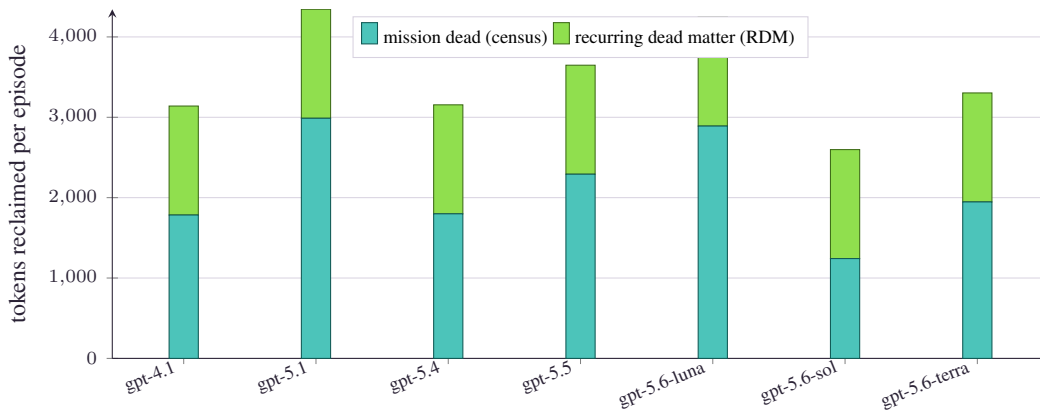


Figure 7: **Where the reclaimed mass comes from (condition E).** Tokens reclaimed per episode, split into mission dead (the census of Sec. 4) and recurring dead matter (Sec. 4.4). Routine traffic, the same build log, test rerun, and version-control chatter dying every turn, contributes 39% of the reclaimed mass and *all* of the improvement from D to E; unlike mission dead, it is reclaimed immediately on recurrence rather than after a census threshold, which is why the growth curves of Fig. 5 separate from the first turns.

Table 3: **RQ3, calibration.** Burials and exhumations per model under the deployed census (D) and the full policy with recurring-dead-matter reclassification (E; RDM column counts the recurring bodies within E’s total). Across every model and both policies, no buried body was ever exhumed, so $\widehat{\mathbb{E}}[q] = 0$, comfortably below the Corollary 7.2 domination threshold, and by Proposition 6.6 every recurrence class’s $\hat{q}_c$ was still falling when its episode ended. The aggressive RDM policy was as safe as the conservative one.

Model	(D) deployed census		(E) full, with RDM			$\widehat{\mathbb{E}}[q]$
	Buried	Exh.	Buried	of which RDM	Exh.	
gpt-4.1	10	0	64	54	0	0%
gpt-5.1	10	0	65	54	0	0%
gpt-5.4	11	0	65	54	0	0%
gpt-5.5	11	0	65	54	0	0%
gpt-5.6-sol	10	0	59	54	0	0%
gpt-5.6-luna	11	0	67	54	0	0%
gpt-5.6-terra	5	0	65	54	0	0%
total	68	0	450	378	0	0%

(34,662) while remaining byte-exact reversible, and posts the lowest overflow rate of any condition (4.00 versus 5.21 for carry-all). (P2) Success under the reversible policies meets or exceeds the lossy baselines. *Held*, though the suite did not stress it: success was 100% everywhere because each task is answerable from recent context, so the discriminating signal was cost and overflow rather than correctness. (P3) Realized exhumation rate stays below the Corollary 7.2 threshold. *Held decisively*: across 68 mission burials under D and 450 burials under E, of which 378 were recurring dead matter buried on sight with no threshold wait, *zero* bodies were ever exhumed (Table 3). The aggressive rule-of-succession policy was empirically as safe as the conservative census, which is exactly what Proposition 6.6 predicts for classes that die every turn and never resurrect. The harness reproduces all of this from a single API key and extends unchanged to the open cross-provider matrix.

10 Conclusion

Agentic coding continues to incur recurring token costs for context that remains in the model’s working window. Blast Radius estimates how far a prompt reaches into the context it will retain and the code it will touch, while NECROPHORESIS acts on that estimate as a reversible operator, reclaiming dead token mass without destroying the information carried. In this paper, we postulate that reversibility turns forgetting from a lossy gamble into a bounded downside bet, making provably dead context dominated whenever its resurrection probability falls below an explicit threshold that the system already measures. Blast Radius is the scoping layer beneath HCRC’s gate licensed compaction, which dictates that verification decides what may be forgotten, while Blast Radius decides how much to forget, what to bury, and how far the next prompt can reach, while remaining ready to remember it again. We have formalized the framework, shipped the operator, and validated the mechanism across seven models: 450 bodies buried, 378 recurring dead matter, zero exhumations. While this is still a work in progress, the preliminary results of this effort show a promising future.

Acknowledgements

This work was conducted at Mankind Research Labs, Sandton, with institutional support from the University of Pretoria and North-West University, RSA. We thank our colleagues at Mankind Research Labs for productive discussions on entropy-aware context management and the broader research and development into Algosophy Research.

References

- [1] M. Y. Pitsane and H. Mogale. Heaviside Continuity of Rolling Coefficients for Eliminating Epistemic Entropy in Large Language Models. Technical report, Mankind Research Labs, 2026.
- [2] G. Xiao, Y. Tian, B. Chen, S. Han, and M. Lewis. Efficient Streaming Language Models with Attention Sinks. In *International Conference on Learning Representations (ICLR)*, 2024.
- [3] Z. Zhang, Y. Sheng, T. Zhou, T. Chen, L. Zheng, R. Cai, Z. Song, Y. Tian, C. Ré, C. Barrett, Z. Wang, and B. Chen. H₂O: Heavy-Hitter Oracle for Efficient Generative Inference of Large Language Models. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2023.
- [4] Z. Liu, A. Desai, F. Liao, W. Wang, V. Xie, Z. Xu, A. Kyrillidis, and A. Shrivastava. Scissorhands: Exploiting the Persistence of Importance Hypothesis for LLM KV Cache Compression at Test Time. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2023.
- [5] S. Ge, Y. Zhang, L. Liu, M. Zhang, J. Han, and J. Gao. Model Tells You What to Discard: Adaptive KV Cache Compression for LLMs. *arXiv preprint arXiv:2310.01801*, 2023.
- [6] T. Fu, H. Huang, X. Ning, G. Zhang, B. Chen, T. Wu, H. Wang, Z. Huang, S. Li, S. Yan, and G. Dai. Mixture of Attention Spans: Optimizing LLM Inference Efficiency with Heterogeneous Sliding-Window Lengths. *arXiv preprint arXiv:2406.14909*, 2024.
- [7] Y. Ding, L. L. Zhang, C. Zhang, Y. Xu, N. Shang, J. Xu, F. Yang, and M. Yang. LongRoPE: Extending LLM Context Window Beyond 2 Million Tokens. *arXiv preprint arXiv:2402.13753*, 2024.
- [8] Y. Wu, Y. Zhang, S. Ghosh, S. Basu, A. Deoras, J. Huan, and G. Gupta. ContextWeaver: Selective and Dependency-Structured Memory Construction for LLM Agents. *arXiv preprint arXiv:2604.23069*, 2026.
- [9] C. Packer, S. Wooders, K. Lin, V. Fang, S. G. Patil, I. Stoica, and J. E. Gonzalez. MemGPT: Towards LLMs as Operating Systems. *arXiv preprint arXiv:2310.08560*, 2023.
- [10] P. Chhikara, D. Khant, S. Aryan, T. Singh, and D. Yadav. Mem0: Building Production-Ready AI Agents with Scalable Long-Term Memory. *arXiv preprint arXiv:2504.19413*, 2025.
- [11] S. Wang, E. Yu, O. Love, T. Zhang, T. Wong, S. Scargall, and C. Fan. MemMachine: A Ground-Truth-Preserving Memory System for Personalized AI Agents. *arXiv preprint arXiv:2604.04853*, 2026.
- [12] Y. Wang, S. Cao, Y. Sun, H. Liu, Z. Hou, and X. Huang. Recursively Summarizing Enables Long-Term Dialogue Memory in Large Language Models. *arXiv preprint arXiv:2308.15022*, 2023.

- [13] P. Lewis, E. Perez, A. Piktus, F. Petroni, V. Karpukhin, N. Goyal, H. Küttler, M. Lewis, W. Yih, T. Rocktäschel, S. Riedel, and D. Kiela. Retrieval-Augmented Generation for Knowledge-Intensive NLP Tasks. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2020.
- [14] M. Arslan, H. Ghanem, S. Munawar, and C. Cruz. A Survey on RAG with LLMs. *Procedia Computer Science*, 246:3781–3790, 2024.
- [15] F. Cuconasu, G. Trappolini, F. Siciliano, S. Filice, C. Campagnano, Y. Maarek, N. Tonellotto, and F. Silvestri. The Power of Noise: Redefining Retrieval for RAG Systems. In *Proceedings of the 47th International ACM SIGIR Conference on Research and Development in Information Retrieval*, pages 719–729, 2024.
- [16] M. Klesel and H. F. Wittmann. Retrieval-Augmented Generation (RAG). *Business & Information Systems Engineering*, 67(4):551–561, 2025.
- [17] Y. Gao, Y. Xiong, Y. Zhong, Y. Bi, M. Xue, and H. Wang. Synergizing RAG and Reasoning: A Systematic Review. *arXiv preprint arXiv:2504.15909*, 2025.
- [18] A. Asai, Z. Wu, Y. Wang, A. Sil, and H. Hajishirzi. Self-RAG: Learning to Retrieve, Generate, and Critique through Self-Reflection. In *International Conference on Learning Representations (ICLR)*, pages 9112–9141, 2024.
- [19] R. S. Arnold and S. A. Bohner. Impact Analysis: Towards a Framework for Comparison. In *Proceedings of the International Conference on Software Maintenance*, 1993.
- [20] T. Zimmermann, A. Zeller, P. Weissgerber, and S. Diehl. Mining Version Histories to Guide Software Changes. In *International Conference on Software Engineering (ICSE)*, 2004.
- [21] J. J. Flannery. The Relative Effectiveness of Some Common Graduated Point Symbols in the Presentation of Quantitative Data. *Cartographica*, 8(2):96–109, 1971.
- [22] H. Mogale and M. Esiefarienrhe. Training and Optimizing Music Recommendation Algorithms Using Self-Similarity Matrices. EasyChair Preprint 7880, 2022.
- [23] M. Y. Pitsane, H. Mogale, and J. T. Janse van Rensburg. Improving Accuracy of Credit Card Fraud Detection Using Supervised Machine Learning Models and Dimension Reduction. In *International Conference on Intelligent and Innovative Computing Applications (ICONIC)*, 2022.
- [24] H. Mogale. High Performance Canny Edge Detector using Parallel Patterns for Scalability on Modern Multicore Processors. *arXiv preprint arXiv:1710.07745*, 2017.
- [25] C. E. Shannon. A Mathematical Theory of Communication. *Bell System Technical Journal*, 27(3):379–423, 1948.
- [26] J. Shi, Y. Zhu, X. Wang, Y. Kang, L. Wu, and T. Bai. Intrinsic Entropy of Context Length Scaling in Large Language Models. *arXiv preprint arXiv:2502.01481*, 2025.
- [27] Z. Zhang, Y. Wang, X. Huang, T. Fang, H. Zhang, C. Deng, S. Li, and D. Yu. Attention Entropy is a Key Factor: An Analysis of Parallel Context Encoding with Full-attention-based Pre-trained Language Models. In *Proceedings of the 63rd Annual Meeting of the ACL*, pages 9840–9855, 2025.
- [28] H. Jiang, Q. Wu, X. Luo, C. Lin, Y. Yang, and L. Qiu. LLMlingua: Compressing Prompts for Accelerated Inference of Large Language Models. In *Proceedings of EMNLP*, pages 13382–13403, 2023.
- [29] H. Li, Y. Zhang, N. Koto, Y. Qiang, Z. Yin, Y. Zhou, and I. W. Tsang. Compressing Context to Enhance Inference Efficiency of Large Language Models. In *Proceedings of EMNLP*, pages 9715–9733, 2023.
- [30] L. Kuhn, S. Gal, and Y. Gal. Semantic Uncertainty: Linguistic Invariances for Uncertainty Estimation in Natural Language Generation. In *International Conference on Learning Representations (ICLR)*, 2023.
- [31] R. Abbasi, M. G. Bellemare, R. Scandolo, and P. D. Velázquez. To Believe or Not to Believe Your LLM. *arXiv preprint arXiv:2406.02543*, 2024.