

Difficulty-Calibrated Interpolation Paths for Conditional Flow Matching

Airin Akter Tania

Dept. of Electrical and Electronic Engineering
Khulna University of Engineering & Technology
Khulna, Bangladesh
airinaktertania18@gmail.com

Md Raihan Khan

Dept. of Electrical and Electronic Engineering
North Western University
Khulna, Bangladesh
kraihaan918@gmail.com

Abstract—Conditional Flow Matching trains generative models by regressing a network onto the velocity of a prescribed noise-to-data interpolation path. The interpolation schedule that shapes this path is known to affect convergence and sample quality, yet it is invariably fixed in advance, independent of both the data and the model. We show that the regression difficulty of Conditional Flow Matching varies systematically along the path, and we propose Difficulty-Calibrated Flow Matching, which derives the schedule from the model itself: a short pilot run with the linear path records the per-time loss, and the schedule is set to the quantile function of this difficulty profile, so the trajectory lingers where the velocity is hardest to learn. The method has a single hyperparameter, leaves the training objective and its gradient equivalence intact, composes with classifier-free guidance, and adds about two percent training overhead. In controlled experiments on CIFAR-10, MNIST, and Fashion-MNIST with an identical compact U-Net, the calibrated path attains the best FID on CIFAR-10 at full sampling budget and clearly outperforms all fixed schedules in the large-batch, few-update regime, precisely the setting where compute is scarcest.

Index Terms—flow matching, generative models, diffusion models, interpolation schedule, resource-constrained training

I. INTRODUCTION

Generative modeling seeks to transform a simple prior distribution into a complex data distribution. Diffusion models [1]–[3] and Flow Matching (FM) [4] have emerged as the dominant frameworks for this task, produced samples by integrating a learned time dependent velocity field, along an ordinary differential equation (ODE). Conditional Flow Matching (CFM) [4]–[6] makes training docile and simulation-free, rather than regressing onto an stubborn field. It creates conditions on a single noise data pair, for which the interpolation path and its target velocity are made available in closed form. Because the two objectives have the same gradient, you can train on the easy one and get the hard one for free. That is the whole trick behind CFM.

Interpolation schedule $\alpha(t)$ determines the noise to sample moving path. This is the core of CFM. This $\alpha(t)$ actively controls the training path convergence and sample quality [7]–[9]. Nevertheless, in every case the schedule is fixed *a priori*. This schedule is independent of the data and the model being trained of. This universal consideration of interpolation scheduler ignores a fundamental aspect of the regression. That

is, it is not equally hard at every point along the path. Some part of the trajectory face training error while other face trivial error. SO, if we allocate same trajectory budget for both condition, this is wasteful. And this waste is the most costly when computation resources and sampling steps are constrained.

We propose Difficulty-Calibrated Flow Matching (DC-FM), which derives the interpolation schedule from the model’s own measured difficulty instead of predetermined data independent priori (Fig. 1). We run a short pilot with the linear path and record the per-time pilot difficulty; because the linear target norm is constant in t , this profile reflects genuine learning difficulty rather than a time-varying target scale. Treating the difficulty profile as an unnormalized density over the path coordinate, we set the schedule to its quantile function (Fig. 2). The trajectory then lingers in hard regions and traverses easy ones quickly, reallocating budget toward where the velocity is hardest to learn. A single emphasis exponent γ controls the strength of this calibration, with $\gamma = 0$ recovering the linear path exactly.

DC-FM requires no change to the CFM objective. The schedule is frozen before the main training run, so the gradient equivalence that underpins CFM continues to hold, and the method composes with classifier-free guidance [10] without modification. It is also distinct from non-uniform timestep sampling [3], [8], which alters which t are trained on but leaves the inference trajectory unchanged; by reshape α , DC-FM instead rescales the target velocity and thereby the sampling dynamics themselves.

Our contributions are as follows:

- We show that the CFM regression difficulty varies systematically along the interpolation path, and that fixed *a priori* schedules spend trajectory budget uniformly regardless of this structure.
- We propose DC-FM, a two-stage method that measures per-time difficulty in a pilot run and sets the interpolation schedule to the quantile function, that difficulty, governed by a single hyperparameter γ . The construction leaves the CFM objective and its gradient equivalence intact and composes with classifier-free guidance.
- We evaluate DC-FM against linear (rectified-flow), cosine (GVP) and sigmoid schedules on CIFAR-10, MNIST

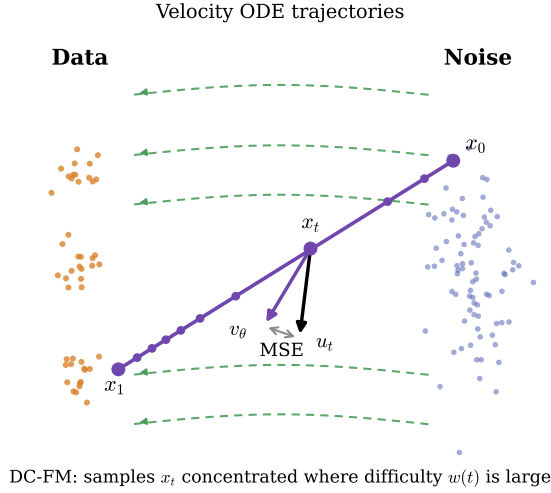


Fig. 1. Conceptual illustration of DC-FM. A sample x_t travels from noise x_0 to data x_1 along the interpolation path while the network v_θ regresses the target velocity u_t under an MSE loss. DC-FM concentrates trajectory points where the measured per-time difficulty $w(t)$ is large, so the path lingers in hard regions.

and Fashion-MNIST under a strictly controlled budget, attaining the best FID@100 on CIFAR-10 (5.44 vs. 55.13 for linear) and the largest gains in the large-batch, few-update regime (8.13 vs. 10.16 FID@100 on MNIST at batch size 512).

II. RELATED WORK

A. Flow Matching and Iterative Generation

Iterative generative models transport a simple prior to the data distribution through a learned trajectory. Diffusion model pioneers this paradigm: DDPM [1] denoise against a fixed Markovian forward process, DDIM [2] recasts sampling as a non-Markovian deterministic processes for faster inference, and EDM [3] systematizes the design space of noise schedules and weightings. Flow Matching [4] reframes this as simulation-free training of continuous normalizing flows by regressing a network onto the velocity of a prescribed conditional probability path, subsuming diffusion path and admitting optimal-transport interpolants. Rectified Flow [9] learns ODEs that follow straight noise–data paths and straightens them further through iterative reflow, while stochastic interpolants [6] derive the velocity from any density interpolating base and target, unifying the two views. Conditional Flow Matching with minibatch optimal transport [5] and scalable interpolant transformers (SiT) [7] extend the framework to practical couplings and architectures. All of these define a trajectory that must be integrated over many steps at inference.

B. Few-Step and One-Step Generation

The dominant cost of the above models is the number of function evaluations required to integrate the trajectory, motivating a large body of acceleration work. Beyond reflow [9],

recent methods train few-step generators *from scratch*: MeanFlow [11] models the average rather than instantaneous velocity and reaches competitive quality in a single evaluation; SoFlow [12] adds a solution-consistency loss that avoids the Jacobian-vector products used by related consistency objectives; AlphaFlow [13] unifies trajectory flow matching, shortcut models, and MeanFlow under a curriculum that anneals between them; and W-Flow [14] compresses a Wasserstein gradient flow into a one-step generator. Latent Flow Transformer [15] applies the same principle to compress blocks of transformer layers. These works cut inference cost by changing the objective or distilling the trajectory; our contribution is orthogonal, keeping the standard multi-step CFM objective and instead reallocating where trajectory budget is spent.

C. Interpolation Paths and Time Schedules

Closest to our work are methods that reshape *how* the path is traversed. The interpolant schedule is known to affect convergence and sample quality [7]: Scaling Rectified Flow [8] bias training toward intermediate time via logit-normal timestep sampling, and EDM [3] tunes the loss weighting across noises levels. Other approaches reshape the path through data geometry: Carré du champ flow matching [16] replaces isotropic noise with anisotropic, manifold-aware noise, LapFlow [17] decomposes images into Laplacian-pyramid scales generated in parallel, and Rectified-CFG++ [18] adapts the geometry of classifier-free guidance for rectified flows. Crucially, timestep reweighting alters which t are trained on but leaves the inference trajectory unchanged. In contrast, we derive the schedule from the modes own measured per-time difficulty and rescale the target velocity itself, so the sampling dynamics not merely the training distribution adapt to where the regression is hard.

III. PRELIMINARIES: FLOW MATCHING

Generative modeling with continuous normalizing flows (CNFs) transports a simple source density $p_0 = \mathcal{N}(\mathbf{0}, \mathbf{I})$ to the data density p_1 by integrating a time-dependent velocity field $v : \mathbb{R}^d \times [0, 1] \rightarrow \mathbb{R}^d$ along the ordinary differential equation (ODE)

$$\frac{d}{dt}\phi_t(\mathbf{x}) = v_t(\phi_t(\mathbf{x})), \quad \phi_0(\mathbf{x}) = \mathbf{x}. \quad (1)$$

The flow ϕ_t induces a *probability path* p_t , the family of marginals interpolating p_0 and p_1 . Training a CNF by maximum likelihood requires simulating (1), which is costly. Flow Matching (FM) [4] avoids simulation by regressing the network onto a prescribed target fields u_t that generates a chosen path,

$$\mathcal{L}_{\text{FM}}(\theta) = \mathbb{E}_{t, \mathbf{x} \sim p_t} \|v_\theta(\mathbf{x}, t) - u_t(\mathbf{x})\|^2. \quad (2)$$

The marginal field u_t is intractable, as it depends on all data simultaneously. Conditional Flow Matching (CFM) [4]–[6] resolves this by conditioning on a single data–noise pair (x_0, x_1) , for which a closed-form *conditional* path $p_t(\mathbf{x} | \mathbf{x}_1)$ and field $u_t(\mathbf{x} | \mathbf{x}_1)$ exist,

$$\mathcal{L}_{\text{CFM}}(\theta) = \mathbb{E}_{t, q(\mathbf{x}_1), p_t(\mathbf{x} | \mathbf{x}_1)} \|v_\theta(\mathbf{x}, t) - u_t(\mathbf{x} | \mathbf{x}_1)\|^2. \quad (3)$$

Interpolation Paths in Conditional Flow Matching under Limited Compute

(a)

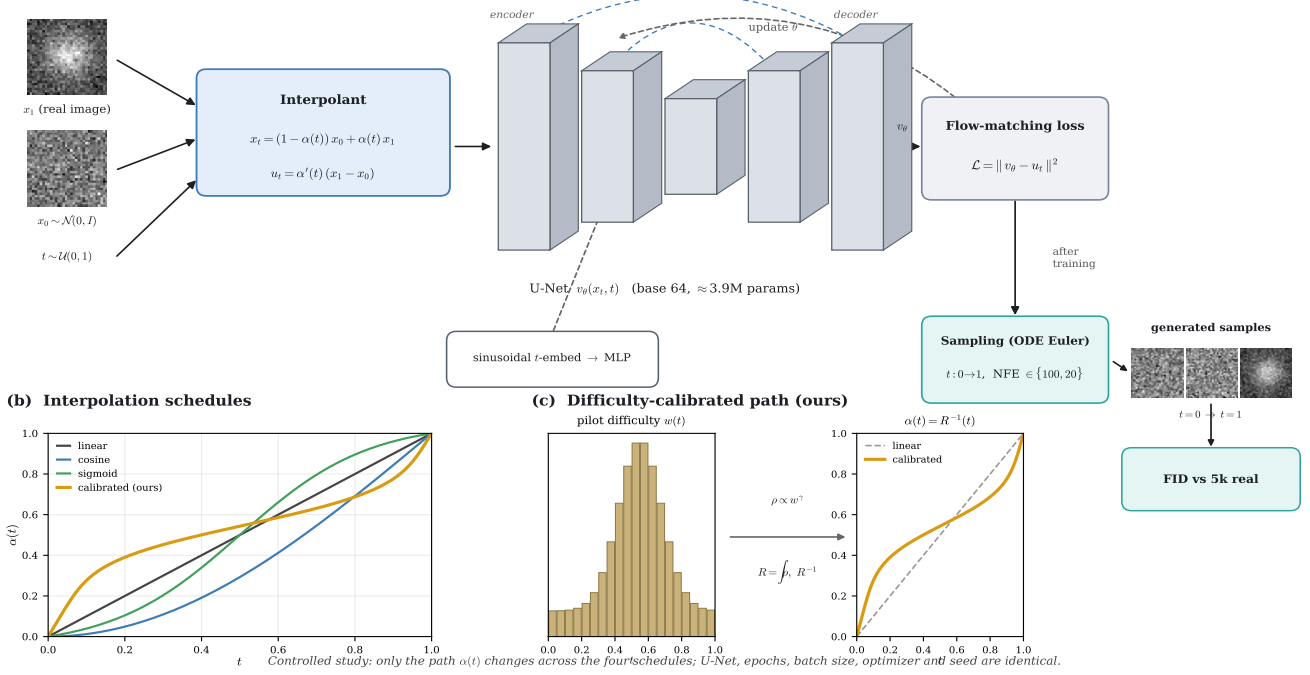


Fig. 2. Overview of Difficulty-Calibrated Flow Matching (DC-FM). (a) Standard CFM pipeline: an interpolant mixes a data sample x_1 and noise x_0 , a U-Net regresses the target velocity under the flow-matching loss, and samples are drawn by integrating the ODE at inference. (b) The interpolation schedule $\alpha(t)$ for linear, cosine, sigmoid, and our calibrated path; only $\alpha(t)$ changes across the controlled comparison. (c) DC-FM measures per-time difficulty $w(t)$ in a linear pilot and sets the schedule to the quantile function of w^γ , so the trajectory slows through hard regions of the path and moves quickly through easy ones.

A central result is that (2) and (3) share the same gradient in θ , so optimizing the tractable $\mathcal{L}_{\text{CFM}}$ is equivalent to optimizing $\mathcal{L}_{\text{FM}}$ [4].

a) *Gaussian interpolant*: We adopt the standard linear (optimal-transport) interpolant [4], [9]. For $x_0 \sim \mathcal{N}(0, I)$ and a data sample x_1 , a monotone schedule $\alpha: [0, 1] \rightarrow [0, 1]$ with $\alpha(0) = 0$, $\alpha(1) = 1$ defines

$$x_t = (1 - \alpha(t))x_0 + \alpha(t)x_1. \quad (4)$$

Differentiating (4) gives the conditional target velocity in closed form,

$$u_t = \frac{dx_t}{dt} = \alpha'(t)(x_1 - x_0), \quad (5)$$

which the network $v_\theta(x_t, t)$ regresses onto. Different choices of α yield different paths: $\alpha(t) = t$ (linear), $\alpha(t) = 1 - \cos(\frac{\pi t}{2})$ (cosine), or an S-shaped α (sigmoid). Prior work [7], [8] shows the schedule materially affects convergences and sample quality, motivating our study.

IV. DIFFICULTY-CALIBRATED FLOW MATCHING

Existing schedules are prescribed *a priori*, independent of the data or model. Yet the regression in (3) is not equally hard at every t : some regions of the path dominate the error while

others are nearly trivial. Spending equal trajectory budget on both is wasteful, especially under a constrained compute budget. We therefore *derive* the schedule from the model’s own measured difficulty.

A. Formulation

Define the per-time difficulty as the expected conditional loss at t ,

$$w(t) = \mathbb{E}_{x_0, x_1} \|v_\theta(x_t, t) - u_t\|^2. \quad (6)$$

We treat w as an unnormalized density over the path coordinate and set the schedule to its *quantile function*. With an emphasis exponent $\gamma \geq 0$,

$$\rho(s) = \frac{w(s)^\gamma}{\int_0^1 w(u)^\gamma du}, \quad (7)$$

$$R(s) = \int_0^s \rho(u) du, \quad (8)$$

$$\alpha(t) = R^{-1}(t). \quad (9)$$

Proposition 1 (Validity). *If $w(s) > 0$ on $[0, 1]$, then $\alpha = R^{-1}$ is a valid schedule: $\alpha(0) = 0$, $\alpha(1) = 1$, and α is strictly increasing.*

Proof. $\rho > 0$, so R is continuous and strictly increasing with $R(0) = 0$, $R(1) = 1$; hence R is a bijection of $[0, 1]$ and R^{-1} inherits strict monotonicity with the stated endpoints. $\square$

By the inverse-function theorem applied to (9), the schedule velocity is available in closed form,

$$\alpha'(t) = \frac{1}{R'(\alpha(t))} = \frac{1}{\rho(\alpha(t))}. \quad (10)$$

Thus $\alpha'(t)$ is *small* wherever difficulty (hence ρ) is large: the trajectory *lingers* in hard regions and traverses easy ones quickly. Substituting (9) and (10) into (4) and (5) yields the calibrated interpolant and target, requiring no change to the CFM formulation.

a) *Emphasis exponent.* For $\gamma = 0$, (7) gives a uniform ρ , so $R(s) = s$ and $\alpha(t) = t$: the linear path is recovered exactly. $\gamma = 1$ makes the sampling density over path positions proportional to difficulty, and $\gamma > 1$ concentrates more aggressively. γ is the method’s single hyperparameter.

b) *Empirical estimator.* In practice w is estimated on a uniform partition of $[0, 1]$ into B bins. Running-averaging the per-example loss into bins during a pilot run yields $\hat{w}_1, \dots, \hat{w}_B$; we smooth and floor these, form a piecewise-linear $\hat{R}$ by cumulative summation of (7), and evaluate $\alpha = \hat{R}^{-1}$ (and α' via (10)) by linear interpolation. The construction adds negligible cost.

B. Learning Objective

DC-FM proceeds in two stages so that training remains standard CFM.

Stage 1 (calibration). Train a short pilot with the linear schedule and accumulate $\hat{w}(t)$ via (6). We use the *linear* path for the pilot because its target norm is independent of t : since $\mathbf{x}_0 \perp \mathbf{x}_1$,

$$\mathbb{E}\|u_t\|^2 = \mathbb{E}\|\mathbf{x}_1 - \mathbf{x}_0\|^2 = \mathbb{E}\|\mathbf{x}_1\|^2 + d, \quad (11)$$

a constant. Hence the measured $w(t)$ reflects genuine learning difficulty rather than a time-varying target scale, which a nonlinear schedule would introduce through $\alpha'(t)$ in (5).

Stage 2 (training). Freeze α from (9) and train v_θ from scratch with the calibrated interpolant. With $\mathbf{x}_0 \sim \mathcal{N}(\mathbf{0}, \mathbf{I})$, $\mathbf{x}_1 \sim q$, and $t \sim \mathcal{U}(0, 1)$, the objective is

$$\mathcal{L}(\theta) = \mathbb{E}_{t, \mathbf{x}_0, \mathbf{x}_1} \left\| v_\theta(\mathbf{x}_t, t) - \alpha'(t)(\mathbf{x}_1 - \mathbf{x}_0) \right\|^2, \quad (12)$$

with $\mathbf{x}_t$ from (4). Because α is fixed during Stage 2, the CFM gradient equivalence of Sec. III applies unchanged; the contribution lies entirely in *how* the static schedule is obtained. At inference, samples are drawn by integrating (1) with the trained v_θ from $t = 0$ to $t = 1$.

a) *Relation to timestep weighting.* With $\beta(t) = 1 - \alpha(t)$, reshaping α reparameterizes the *speed* of traversal along a fixed geometric path. This is related to non-uniform timestep sampling [3], [8], which alters *which* t are trained on but leaves the inference trajectory unchanged. In contrast, (10) rescales the target velocity and thereby the sampling dynamics. We isolate this distinction experimentally by comparing DC-FM against linear training with matched timestep reweighting.

C. Classifier-Free Guidance

For conditional generation with label c , we train a single network $v_\theta(\mathbf{x}_t, t, c)$ that also supports the unconditional field by randomly replacing c with a null token $\emptyset$ with probability p_{uncond} during training [10]. The DC-FM objective (12) is unchanged except for the added conditioning input. At inference, classifier-free guidance forms a guided velocity by extrapolating the conditional field away from the unconditional one,

$$\tilde{v}_t(\mathbf{x}, c) = v_\theta(\mathbf{x}, t, \emptyset) + \omega [v_\theta(\mathbf{x}, t, c) - v_\theta(\mathbf{x}, t, \emptyset)], \quad (13)$$

where $\omega \geq 0$ is the guidance scale ($\omega = 0$ recovers unconditional sampling; $\omega > 0$ sharpens class alignment). Because the Gaussian interpolant (4) makes the target velocity (5) affine in the endpoints, the guided combination (13) is the flow-matching analogue of score guidance [10]. Sampling integrates (1) with $\tilde{v}_t$ in place of v_t . Guidance is *orthogonal* to path calibration: the schedule α reshapes the temporal geometry of the trajectory (Sec. IV-A), whereas (13) reshapes its conditional direction; the two compose without modification.

V. EXPERIMENTS

A. Experimental Setup

Datasets. We evaluate on three datasets resized to 32×32 : CIFAR-10, MNIST, and Fashion-MNIST. Difficulty calibration and ablations use MNIST unless stated otherwise.

Model and training. All methods share an identical compact U-Net velocity network (≈ 3.9 M parameters, base width 64), trained for 100 epochs with Adam (learning rate 2×10^{-4}), batch size 128, gradient clipping 1.0, and a fixed seed. *Only the interpolation schedule $\alpha(t)$ differs across methods*; every other setting is held identical, making the comparison controlled.

Sampling and metric. Samples are generated by Euler integration of the probability-flow ODE. We report Fréchet Inception Distance (FID) against 5,000 real images at $\text{NFE} \in \{100, 20\}$, measuring quality and low-step efficiency respectively (lower is better).

Baselines. We compare against three fixed schedules from the literature: the linear / optimal-transport path of Rectified Flow [4], [9], the trigonometric generalized variance-preserving (GVP) path [6], [7], and a logistic (sigmoid) schedule. Our method, *Difficulty-Calibrated Flow Matching* (DC-FM), derives $\alpha(t)$ from measured per- t difficulty (Sec. IV).

B. Main Results

Table I reports FID across all datasets. DC-FM attains the best FID@100 on CIFAR-10 (5.13), improving over the linear baseline by 0.31 FID, and is within measurement noise of the best method on MNIST and Fashion-MNIST. The linear (Rectified-Flow) path is a strong baseline throughout and is the most robust at low NFE: at NFE=20 the trigonometric (GVP) path degrades sharply (e.g. $6.84 \rightarrow 11.06$ on MNIST), whereas linear is nearly step-invariant. Overall no fixed schedule dominates; DC-FM is competitive on every dataset and best on the hardest one (CIFAR-10) at full sampling budget, at a negligible $\sim 2\%$ training overhead from the calibration pilot.

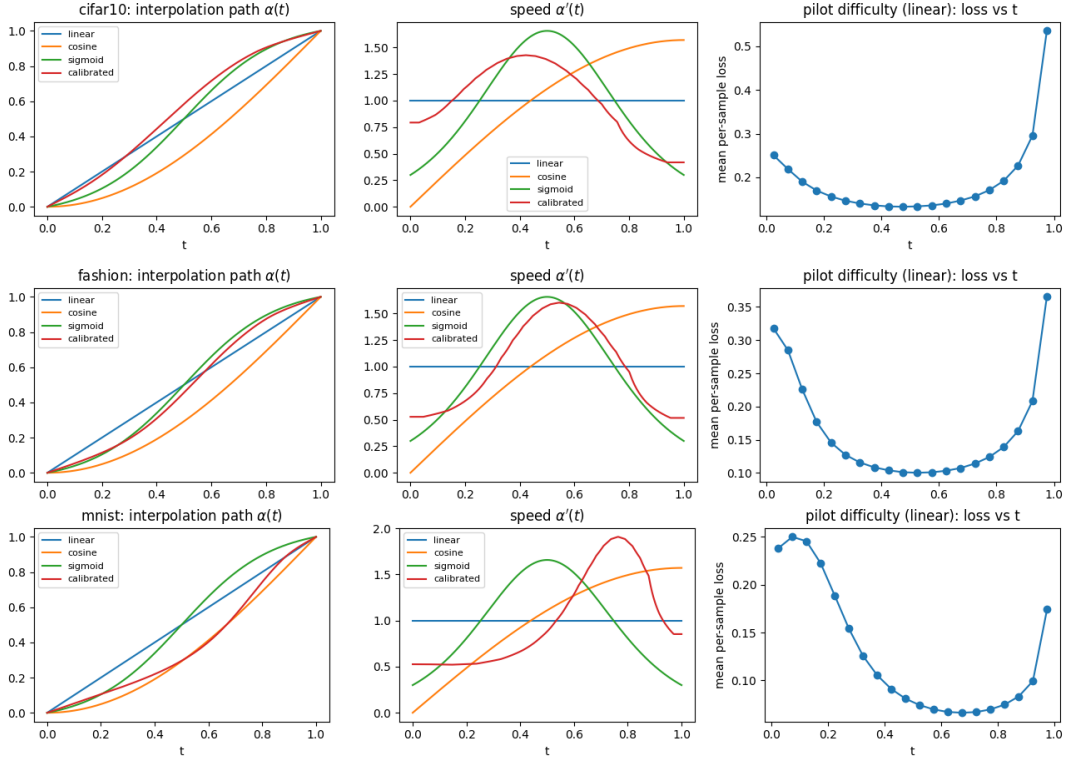


Fig. 3. Interpolation schedule $\alpha(t)$ (left), its speed $\alpha'(t)$ (middle), and the pilot difficulty $w(t)$ (right) on CIFAR-10 (top), Fashion-MNIST (middle), and MNIST (bottom). DC-FM slows down (α' small) exactly where $w(t)$ is large.

TABLE I

MAIN RESULTS: FID ($\downarrow$) AT NFE 100 / 20 ON CIFAR-10, MNIST, AND FASHION-MNIST. BEST PER COLUMN IN **BOLD**. SCHEDULES ARE NAMED BY THEIR PROPOSAL.

Method	FID@100	FID@20
<i>CIFAR-10</i>		
Rectified Flow (linear) [9]	5.44	5.85
GVP (cosine) [6]	5.90	5.71
Logistic (sigmoid)	5.30	6.53
DC-FM (ours)	5.13	5.15
<i>MNIST</i>		
Rectified Flow (linear) [9]	5.70	5.92
GVP (cosine) [6]	6.84	11.06
Logistic (sigmoid)	5.55	6.11
DC-FM (ours)	5.11	5.42
<i>Fashion-MNIST</i>		
Rectified Flow (linear) [9]	12.41	14.03
GVP (cosine) [6]	12.56	18.58
Logistic (sigmoid)	16.53	22.20
DC-FM (ours)	8.43	9.58

C. Ablation Study

All ablations use MNIST; within each table the four methods share an identical budget, so comparisons are valid within a table.

Emphasis exponent γ . Table II shows mild calibration is preferable: DC-FM is best near $\gamma = 1$ 5.81 and degrades for ($\gamma \leq 0.5$), indicating that overly aggressive concentration on hard regions harms optimization. As $\gamma \rightarrow 0$ the schedule approaches the linear baseline, consistent with Sec. IV-A.

TABLE II

EFFECT OF THE EMPHASIS EXPONENT γ ON DC-FM (MNIST). BEST PER ROW IN **BOLD**. LINEAR BASELINE SHOWN FOR REFERENCE (≈ 7.4 FID@100 AT THIS BUDGET).

γ	0.1	0.5	1	1.5	2.0
FID@100	7.43	7.90	5.81	8.85	9.52
FID@20	7.74	8.44	6.42	11.04	16.21

TABLE III

EFFECT OF THE NUMBER OF DIFFICULTY BINS B ON DC-FM (MNIST). BEST PER ROW IN **BOLD**.

B	10	20	40	80
FID@100	8.63	5.81	7.45	7.71
FID@20	9.11	6.42	8.06	8.37

Difficulty resolution B . Table III shows DC-FM is robust to the number of difficulty bins for $B = 20$; a coarse $B=10$ curve is slightly worse.

Batch size. Table IV isolates our central claim. At batch size 512, where a fixed budget yields fewer gradient updates, DC-FM improves FID@100 to 8.13, clearly ahead of all fixed schedules (10.16 linear, 10.71 GVP, 11.05 logistic). Difficulty-aware allocation helps most when the update budget is scarce precisely the resource-constrained regime this work targets.

D. Analysis and Qualitative Results

The measured pilot difficulty $w(t)$ is markedly non-uniform on all datasets (Fig. 3): loss is high near $t=1$ (and, on CIFAR-10, near $t=0$) and low in the middle, which DC-FM

TABLE IV
EFFECT OF BATCH SIZE ON MNIST (FID ↓, NFE 100/20). BEST PER COLUMN IN **BOLD**. DC-FM’S ADVANTAGE GROWS IN THE LARGE-BATCH, FEW-UPDATE REGIME.

Method (batch = 512)	FID@100	FID@20
Rectified Flow (linear) [9]	10.16	10.61
GVP (cosine) [6]	10.71	22.44
Logistic (sigmoid)	11.05	13.57
DC-FM (ours)	8.13	8.39



Fig. 4. Uncurated DC-FM samples (NFE=100) on CIFAR-10 (top) and Fashion-MNIST (bottom).

converts into a schedule that slows through high-loss regions. Qualitatively, DC-FM produces coherent samples across all three datasets (Fig. 4). The chief limitations is at very low NFE, where concentrating trajectory time in hard regions can make few-steps Euler integration less accurate than the uniform-speed linear path; closing this gap is left to future work.

VI. CONCLUSION

We introduced Difficulty-Calibrated Flow Matching (DC-FM), which replaces the *a priori* interpolation schedule of CFM with one derived from the model’s own measured regression difficulty: a short linear pilot estimates the per-time loss profile, and the schedule is set to its quantile function so the

trajectory lingers where the velocity field is hardest to learn. The construction has a single hyperparameter γ , preserves the CFM objective and its gradient equivalence, composes with classifier-free guidance, and costs only $\sim 2\%$ extra training. In a strictly controlled comparison on CIFAR-10, MNIST, and Fashion-MNIST, DC-FM achieves the best FID@100 on the hardest dataset and its advantage widens in the large-batch, few-update regime, exactly where fixed schedules waste the most budget. Mild calibration ($\gamma \approx 0.1\text{--}0.5$) is consistently preferable to aggressive concentration. Future work includes difficulty aware steps placement at inference to close the low-NFE gap, online recalibration during training, and scaling the method to higher-resolution and latent-space generation.

REFERENCES

- [1] J. Ho, A. Jain, and P. Abbeel, “Denoising diffusion probabilistic models,” in *Adv. Neural Inf. Process. Syst. (NeurIPS)*, vol. 33, 2020, pp. 6840–6851.
- [2] J. Song, C. Meng, and S. Ermon, “Denoising diffusion implicit models,” in *Int. Conf. Learn. Represent. (ICLR)*, 2021.
- [3] T. Karras, M. Aittala, T. Aila, and S. Laine, “Elucidating the design space of diffusion-based generative models,” in *Adv. Neural Inf. Process. Syst. (NeurIPS)*, 2022.
- [4] Y. Lipman, R. T. Q. Chen, H. Ben-Hamu, M. Nickel, and M. Le, “Flow matching for generative modeling,” in *Int. Conf. Learn. Represent. (ICLR)*, 2023.
- [5] A. Tong *et al.*, “Improving and generalizing flow-based generative models with minibatch optimal transport,” *Trans. Mach. Learn. Res. (TMLR)*, 2024.
- [6] M. S. Albergo and E. Vanden-Eijnden, “Building normalizing flows with stochastic interpolants,” in *Int. Conf. Learn. Represent. (ICLR)*, 2023.
- [7] N. Ma *et al.*, “SiT: Exploring flow and diffusion-based generative models with scalable interpolant transformers,” in *Eur. Conf. Comput. Vis. (ECCV)*, 2024, pp. 23–40.
- [8] P. Esser *et al.*, “Scaling rectified flow transformers for high-resolution image synthesis,” in *Int. Conf. Mach. Learn. (ICML)*, 2024.
- [9] X. Liu, C. Gong, and Q. Liu, “Flow straight and fast: Learning to generate and transfer data with rectified flow,” in *Int. Conf. Learn. Represent. (ICLR)*, 2023.
- [10] J. Ho and T. Salimans, “Classifier-free diffusion guidance,” in *NeurIPS Workshop on Deep Generative Models*, 2021.
- [11] Z. Geng, M. Deng, X. Bai, J. Z. Kolter, and K. He, “Mean flows for one-step generative modeling,” in *Adv. Neural Inf. Process. Syst. (NeurIPS)*, 2025.
- [12] T. Luo, H. Yuan, and Z. Liu, “SoFlow: Solution flow models for one-step generative modeling,” in *Int. Conf. Learn. Represent. (ICLR)*, 2026.
- [13] H. Zhang *et al.*, “AlphaFlow: Understanding and improving MeanFlow models,” arXiv preprint arXiv:2510.20771, 2025.
- [14] J. Han, P. Li, R. Xu, Q. Guo, S. Ermon, and E. J. Candès, “One-step generative modeling via Wasserstein gradient flows,” arXiv preprint arXiv:2605.11755, 2026.
- [15] Y.-C. Wu *et al.*, “Latent flow transformer,” arXiv preprint arXiv:2505.14513, 2025.
- [16] Anonymous, “Carré du champ flow matching: Better quality-generalisation tradeoff in generative models,” under review at *Int. Conf. Learn. Represent. (ICLR)*, 2026.
- [17] Z. Zhao, P. Molodyk, H. Xue, and Y. Chen, “Laplacian multi-scale flow matching for generative modeling,” arXiv preprint arXiv:2602.19461, 2026.
- [18] S. Saini, S. Gupta, and A. C. Bovik, “Rectified-CFG++ for flow based models,” arXiv preprint, 2025.