

ContactIPM: A Structure-Exploiting Interior-Point Solver for Contact-Implicit Trajectory Optimization

Yucheng Chen

Abstract—Contact-implicit trajectory optimization avoids prescribing contact sequences, but yields mathematical programs with complementarity constraints (MPCCs) whose degeneracy challenges conventional primal–dual solvers. Existing contact-specific methods improve robustness to this degeneracy but do not leverage a stagewise optimal-control factorization and primal–dual consistency, while structure-exploiting optimal-control solvers are not designed for complementarity constraints. We show that these capabilities can be combined in a single primal–dual method. ContactIPM identifies complementary inequality pairs, embeds them through a barrier-coupled elastic interior relaxation, eliminates slack and dual variables stagewise, and solves the reduced Newton system using a Riccati recursion. A fixed multi-phase MPCC recovery schedule provides four continuation and restart attempts from naive initializations, while termination is gated by the unrelaxed physical complementarity residual.

We compare ContactIPM with two contact-specific MPCC solvers, CRISP and IMPACT, using matched benchmark conditions and common post-solve acceptance criteria. On four fixed CRISP benchmark cases, ContactIPM is $2.17\text{--}8.87\times$ faster over 20 paired timing repetitions per case and achieves higher success on the Push Box and Push-T robustness suites. Against IMPACT, ContactIPM is $2.96\times$ faster on Push T and $4.91\times$ faster on Cart Transport, but $4.46\times$ slower on Push Box. In 50 closed-loop Push Box rollouts spanning model mismatch, measurement noise, initial-pose errors, and state resets, ContactIPM succeeds in all 50 cases with a median solve time of 2.08 ms. Additionally, an OCP-structured acados baseline imposing exact complementarity frequently fails to generate useful contact, supporting the need for MPCC-specific treatment in addition to temporal-structure exploitation. Together, these results demonstrate that MPCC robustness, primal–dual consistency, and optimal-control structure can coexist in one solver.

An anonymized implementation and reproduction scripts are available online.¹

I. INTRODUCTION

Robots that push, slide, grasp, or locomote must reason about both continuous motion and discrete changes in contact. Contact-implicit trajectory optimization (CITO) avoids fixing a contact schedule by optimizing states, inputs, contact forces, and contact modes simultaneously [1], [2], [3]. This flexibility comes at a numerical cost: unilateral contact and friction are expressed through complementarity, yielding an MPCC that violates the classical constraint qualifications used by smooth nonlinear programming.

Recent contact-implicit solvers obtain robustness by departing from a fully coupled primal–dual Newton step.

CRISP optimizes only the primal trajectory through a sequence of convex subproblems with trust-region globalization [5]; subproblem multipliers are not maintained as part of a single primal–dual iterate for the original MPCC. IMPACT uses a safeguarded augmented-Lagrangian outer loop and an inner block-coordinate descent (BCD) scheme that alternates trajectory updates with closed-form complementarity updates [6]. IMPACT therefore maintains augmented-Lagrangian multipliers, but its primal and complementarity blocks are not updated by solving one fully coupled perturbed KKT system. These choices are effective responses to MPCC degeneracy, but they separate complementarity handling from the primal–dual structure exploited by conventional interior-point methods.

We argue that this separation is not an unavoidable cost of contact complementarity. In a multiple-shooting transcription, each complementarity pair is local to one stage. Its relaxation, slack variables, multipliers, and derivative contributions are therefore also stage local. Eliminating these local slack and dual variables modifies only the corresponding stage gradient and Hessian; the dynamics remain the only coupling between adjacent stages. Consequently, complementarity constraints do not destroy the block-banded OCP structure required by a Riccati recursion.

ContactIPM builds on this observation by introducing a stage-local elastic interior relaxation for every marked complementarity pair. The construction has two important consequences. First, for every positive barrier parameter, the lifted constraint Jacobian contains an identity block with respect to the elastic slacks. The relaxed complementarity rows therefore satisfy LICQ within our multiple-shooting formulation, and their multipliers are uniquely defined at a stationary point, which provides a regular primal–dual system. Second, the complementarity relaxation is coupled directly to the interior-point barrier. Tightening is controlled by the same barrier parameter that defines the central path, rather than by an independently tuned penalty weight that must be repeatedly increased.

These observations define the capability gap targeted by ContactIPM. Contact-specific methods such as CRISP and IMPACT obtain MPCC robustness without retaining a single coupled primal–dual OCP Newton system, whereas OCP-structured solvers such as acados [13] can fail to generate useful contact when exact complementarity is imposed without special treatment (Section V-C). ContactIPM combines both capabilities: a barrier-coupled elastic path for robust contact-mode transitions and a stagewise primal–dual Riccati solve. When no complementarity pairs are marked, the im-

¹<https://anonymous.4open.science/r/ContactIPM-0C58>

plementation leaves the MPCC-specific machinery inactive and reduces to a constrained-OC interior-point solver.

The contributions are:

- a unified stagewise formulation for nonlinear dynamics, costs, inequalities, bounds, and marked complementarity pairs, in which the latter are converted into barrier-coupled elastic product rows;
- an MPCC-aware primal–dual Newton method that preserves the perturbed KKT coupling while using local slack and dual elimination followed by a Riccati recursion, together with trajectory-scale preconditioning and multi-phase MPCC recovery. The elastic lifting and stagewise elimination are summarized in Fig. 1(b); and
- a reproducible experimental evaluation comprising CRISP and IMPACT comparisons, an OCP-structured acados baseline with exact complementarity, and 50 disturbed closed-loop Push Box rollouts. The representative Push-T trajectories in Fig. 1(a) show that ContactIPM and IMPACT converge to different local solutions; and the timing ratios summarized in Fig. 1(c) show performance across both baselines.

II. BACKGROUND AND PROBLEM FORMULATION

A. Contact-Implicit Optimal Control

We consider a multiple-shooting problem over horizon N ,

$$\min_{\mathbf{x}, \mathbf{u}} \sum_{k=0}^{N-1} \ell_k(x_k, u_k) + \ell_N(x_N), \quad (1a)$$

$$\text{s.t. } x_0 = \bar{x}_0, \quad x_{k+1} = f_k(x_k, u_k), \quad (1b)$$

$$g_k(x_k, u_k) \leq 0, \quad (1c)$$

$$0 \leq a_{k,p}(x_k, u_k) \perp b_{k,p}(x_k, u_k) \geq 0, \quad (1d)$$

where p indexes complementarity pairs. Depending on the contact model, $a_{k,p}$ and $b_{k,p}$ may represent normal force and separation, frictional force and slip, or mutually exclusive contact modes. Their complementarity is equivalent to nonnegativity together with $a_{k,p}b_{k,p} = 0$.

At a feasible MPCC point, the gradients of the active nonnegativity and product constraints are structurally dependent. Standard constraint qualifications therefore fail at feasible MPCC points, making direct application of generic nonlinear-programming methods unreliable [8], [9]. This degeneracy is particularly problematic for primal–dual methods because the associated multipliers may be nonunique and the KKT system may become singular or ill-conditioned. Relaxation methods restore a nonempty interior by replacing exact complementarity with a parameterized inequality, but aggressive tightening can again cause ill-conditioning.

B. The Structure–Robustness Gap

Classical MPCC interior methods provide convergence results for suitably relaxed formulations [8], [9]. Building on these established MPCC relaxation theory, ContactIPM embeds this machinery in a multistage optimal-control solver, retains a direct physical-complementarity stopping test, and

provides generic recovery when the relaxed central path becomes difficult.

CRISP and IMPACT approach the MPCC side of the gap differently. CRISP avoids maintaining a coupled primal–dual iterate and solves a sequence of convex primal subproblems. IMPACT maintains safeguarded augmented-Lagrangian multipliers and performs closed-form updates for complementarity pairs, while solving its trajectory subproblems with a sparse factorization. These are substantive uses of problem structure, but neither reduces the coupled trajectory Newton system with a Riccati recursion.

On the OCP side, Riccati and block-factorization techniques are established tools for exploiting horizon structure [10]. Hippo recently demonstrated a high-performance primal–dual interior-point and projection-based solver for constrained trajectory optimization [7]. FilterDDP [14] similarly extends structure-exploiting DDP with a primal–dual interior-point treatment of generic inequalities and evaluates the method on contact-implicit tasks, where contact is supplied through task-specific equality and slack-variable encodings. Although both methods have numerical cores related to ContactIPM’s, neither provides MPCC-specific pair recognition, barrier-coupled elastic product rows, an unrelaxed physical-complementarity acceptance gate, or an MPCC recovery policy. ContactIPM is positioned at this intersection: it operates as an IPM-based constrained-OC solver when no pairs are marked and activates its MPCC-specific machinery only where complementarity is present.

III. CONTACTIPM

A. MPCC and Elastic Interior Relaxation

The model supplies ordinary one-sided rows $g_j(x, u) \leq 0$ and marks pairs (g_a, g_b) whose negations represent complementary nonnegative quantities:

$$a = -g_a \geq 0, \quad b = -g_b \geq 0, \quad ab = 0. \quad (2)$$

For each marked pair, ContactIPM introduces positive side slacks s_a, s_b and a positive product slack s_c :

$$g_a + s_a = 0, \quad s_a > 0, \quad (3a)$$

$$g_b + s_b = 0, \quad s_b > 0, \quad (3b)$$

$$g_a g_b - \theta(\mu) + s_c = 0, \quad s_c > 0, \quad (3c)$$

$$\theta(\mu) = \gamma_{\text{mpcc}} \mu, \quad (3d)$$

where $\mu > 0$ is the barrier parameter. The barrier objective includes

$$-\mu (\log s_a + \log s_b + \log s_c), \quad (4)$$

so the primal–dual equations contain $s_i \lambda_i = \mu$ for both side rows and the generated product row. The formulation is therefore an elastic interior relaxation rather than a penalty-only treatment.

The relaxed equation alone is not used to certify a contact solution. At every candidate termination point, ContactIPM also evaluates

$$r_{\text{phys}} = \max_{k,p} |a_{k,p} b_{k,p}|, \quad (5)$$

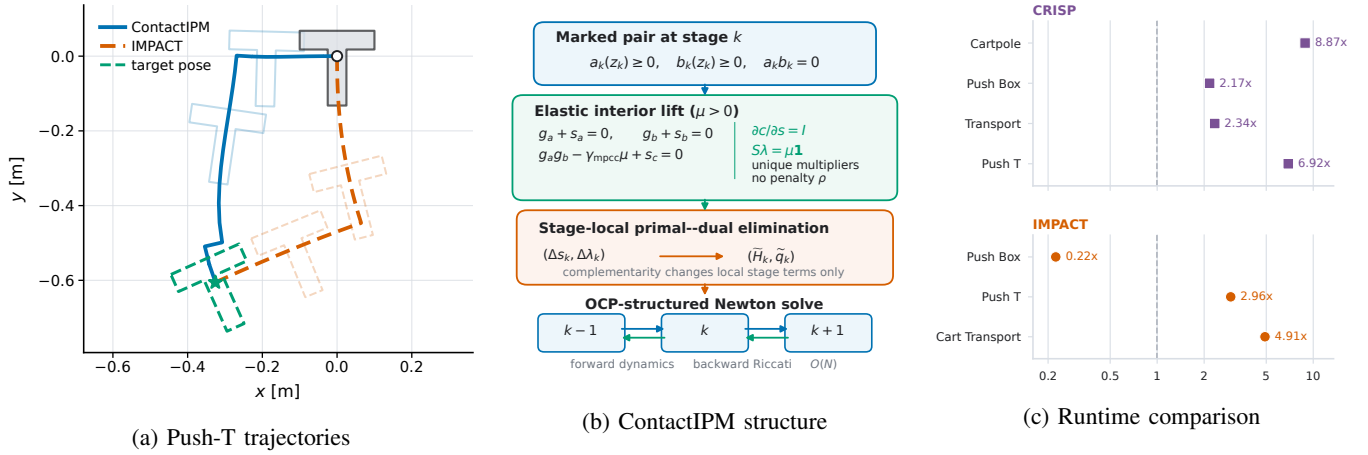


Fig. 1. Overview of the proposed solver and representative experimental results. (a) On a matched Push-T experiment, ContactIPM and IMPACT reach the same target from the same initialization but follow different trajectories, illustrating convergence to different local solutions. (b) ContactIPM introduces elastic variables for the stagewise complementarity constraints. The resulting regular constraint representation admits consistent primal-dual iterates and well-defined multipliers, while local elimination preserves the optimal-control structure required by the Riccati recursion. (c) Median runtime ratios between each competitor and ContactIPM. The dashed vertical line denotes equal runtime; values greater than one indicate that ContactIPM is faster.

and requires $r_{\text{phys}} \leq \epsilon_{\text{mpcc}}$. This separates the mechanism used to maintain an interior during optimization from the physical condition used to accept the final trajectory.

a) Regularity of the elastic lift. For a fixed $\mu > 0$, and decision variables z , collect the three residuals associated with a marked pair as

$$c_{\text{el}}(z, s) = \begin{bmatrix} g_a(z) + s_a \\ g_b(z) + s_b \\ g_a(z)g_b(z) - \theta(\mu) + s_c \end{bmatrix} = 0. \quad (6)$$

Their Jacobian with respect to the local slack variables is

$$\frac{\partial c_{\text{el}}}{\partial(s_a, s_b, s_c)} = I_3. \quad (7)$$

Thus, the lifted complementarity rows are linearly independent at every interior point, irrespective of the gradients of g_a and g_b . Ordinary inequalities have the same property after slack lifting. Moreover, each multiple-shooting dynamics defect contains an identity block with respect to x_{k+1} . Consequently, the equality Jacobian of the relaxed problem has full row rank for the problem class considered here.

This establishes LICQ for every relaxed subproblem solved by ContactIPM. Therefore, if a stationary point exists, its equality multipliers are unique. The positive slacks also determine the inequality multipliers uniquely through

$$S\lambda = \mu\mathbf{1}, \quad \lambda = \mu S^{-1}\mathbf{1}. \quad (8)$$

Because ContactIPM maintains $\mu > 0$ and strictly positive slacks throughout the interior-point iterations, this regularity holds for every Newton system encountered by the solver.

b) No independent complementarity penalty weight. Penalty and augmented-Lagrangian approaches typically introduce weights that must be increased until complementarity violation is sufficiently expensive. In ContactIPM, the generated product row is instead enforced as a primal equality, while its positive elastic slack is handled by the logarithmic

barrier. The target

$$\theta(\mu) = \gamma_{\text{mpcc}}\mu \quad (9)$$

ties complementarity tightening to the same μ used by the primal-dual central path. ContactIPM therefore requires no independently escalated complementarity penalty coefficient. The parameter γ_{mpcc} and the barrier-update policy remain numerical settings, so the method is not parameter free, but it avoids balancing a separate penalty magnitude against the original OCP objective.

B. Primal-Dual Newton System

ContactIPM maintains primal-dual consistency by computing every direction from the linearization of one perturbed KKT system:

$$\nabla_{\mathbf{x}, \mathbf{u}} \mathcal{L} = 0, \quad (10a)$$

$$x_{k+1} - f_k(x_k, u_k) = 0, \quad (10b)$$

$$g_k(x_k, u_k) + s_k = 0, \quad (10c)$$

$$S_k \lambda_k - \mu \mathbf{1} = 0. \quad (10d)$$

Here, primal-dual consistency means that the primal trajectory, dynamics multipliers, inequality multipliers, and slacks are updated as components of the same Newton system. In particular, the multipliers are neither omitted, as in CRISP's primal-only formulation, nor updated through a separate block-coordinate step, as in IMPACT. ContactIPM therefore retains the coupled perturbed-KKT structure required by a primal-dual interior-point method.

Crucially, this coupling does not require a monolithic trajectory factorization. Complementarity pairs and their elastic variables are local to individual stages. Let C_k denote the Jacobian of the original stage inequalities and the product-relaxation rows introduced for the marked complementarity pairs. Eliminating Δs_k and $\Delta \lambda_k$ from the same linearized

KKT equations produces

$$\tilde{H}_k = H_k + C_k^\top \text{diag}(\lambda_k/s_k) C_k, \quad (11)$$

$$\tilde{q}_k = q_k + C_k^\top w_k, \quad (12)$$

where w_k collects the local primal-feasibility and centering residuals. Both corrections remain confined to stage k . The reduced system retains the block-banded equality-constrained OCP structure induced by the dynamics. It is solved by a backward Riccati recursion followed by forward substitution, after which the eliminated slack and multiplier directions are recovered from the same KKT equations. For fixed state and input dimensions, the recursion has linear complexity in the horizon length N . This factorization is used whether or not marked complementarity constraint pairs are present; complementarity changes the local stage terms but not the temporal elimination pattern. Exact Lagrangian curvature is used when its stage factorizations are sufficiently positive definite; otherwise, the solver falls back to Gauss–Newton curvature.

C. Scaling and Globalization

Contact-rich problems mix positions, angles, forces, impulses, and product rows with substantially different numerical scales. ContactIPM applies a horizon-consistent diagonal coordinate scaling derived from stage derivative magnitudes. Dynamics, cost, constraints, and Riccati quantities are transformed consistently, and the accepted Newton step is mapped back to physical coordinates.

Globalization uses a filter line search that balances objective reduction and constraint violation [11]. A fraction-to-boundary rule maintains positive slacks and multipliers. A nonlinear dynamics rollout is also evaluated as a candidate step so that a direction that is useful for the contact variables is not rejected solely because of a multiple-shooting defect. The barrier parameter is reduced only after the current subproblem has reached the required primal, dual, and complementarity accuracy.

D. Multi-Phase MPCC Recovery

The relaxed MPCC may contain several stationary branches associated with different contact modes. During barrier reduction, a solve can enter an unfavorable basin, lose conditioning, or encounter unreliable second-order curvature. ContactIPM therefore combines continuation, which preserves the current basin, with restart, which searches for a different one.

Let

$$\mu_t = \min(\mu_0, \mu_{\text{conv}}), \quad (13)$$

$$\mu_m = \sqrt{\mu_0 \mu_t}, \quad (14)$$

$$\mu_r = \max(\mu_{\text{recovery}}, \mu_{\text{conv}}). \quad (15)$$

The solver first uses the user-specified barrier and curvature configuration. If unsuccessful, it retains the latest primal trajectory and solves successively from μ_m and μ_t . These phases gradually tighten $\theta(\mu) = \gamma_{\text{mpcc}}\mu$ while attempting to remain in the contact-mode basin found by the primary solve.

If continuation fails, the original primal guess is restored and the problem is restarted at μ_r with Gauss–Newton curvature. This provides greater interior margin, avoids potentially indefinite Lagrangian curvature, and allows contact-mode selection from a different basin. One final Gauss–Newton solve at μ_t tightens the restored trajectory.

The solve sequence terminates after the first successful phase and attempts at most five finite solves. Success always requires the complete termination conditions, including the unrelaxed physical residual $r_{\text{phys}} \leq \epsilon_{\text{mpcc}}$. The recovery sequence is fixed and problem-independent; objectives, constraints, and task tolerances are unchanged.

IV. EXPERIMENTAL METHODOLOGY

A. Benchmarks, Baselines, and Fairness

The comparisons use benchmark formulations from the released CRISP [5] and IMPACT [6] source code. The CRISP set contains Cartpole with Soft Walls, Push Box, Transport, and Push T; the IMPACT set contains Push Box, Push T, and Cart Transport. For each comparison, ContactIPM matches the baseline’s physical parameters, horizon and discretization, objective, constraints, initial state, target, and initial guess. Both baselines are compiled and executed locally.

The robustness experiments use distinct problem instances, with each instance solved once per method. The CRISP evaluation contains 15 Cartpole, 25 Push Box, and 15 Transport initial-state/target combinations, together with all 50 Push-T cases from its released benchmark. Each IMPACT suite contains its released source example and 49 predeclared local initial-state/target variations.

The timing experiments instead repeat one fixed instance per benchmark. CRISP timing uses the released source examples and Push-T case index 8, the ninth of the 50 released cases. IMPACT timing uses its released source example for each benchmark. All measurements were collected on an Intel(R) Core(TM) Ultra 7 155H using release-mode executables and one software thread. After one warm-up, each solver is run 20 times. In each repetition, ContactIPM and the baseline run consecutively on logical processor 0, with their order randomized. Only pairs for which both trajectories pass the common post-solve evaluation are included. The closed-loop study uses 50 distinct disturbance rollouts comprising 1,104 MPC solves.

To separate OCP structure from complementarity treatment, we also transcribe all seven CRISP- and IMPACT-parameter configurations in acados [13]. These transcriptions use the same problem parameters, initialization, and task definitions as the corresponding released benchmarks. Acados uses full SQP with partial condensing and HPIPM, but imposes exact complementarity directly through $a \geq 0$, $b \geq 0$, and $ab \leq 0$, without an elastic relaxation.

B. Post-Solve Evaluation

A solver return code alone is not counted as success. Each returned trajectory is processed by the same post-solve evaluator. A run is accepted only if the solver reports

TABLE I

RUNTIME COMPARISON CONTACTIPM VS CRISP ON 20 PAIRED RUNS

Problem	ContactIPM [s]	CRISP [s]	Speedup [95% CI]
Cartpole	0.0272	0.2402	8.868 [8.417, 9.241]
Push Box	0.2614	0.5931	2.168 [2.128, 2.341]
Transport	0.1967	0.4988	2.337 [2.247, 2.595]
Push T	0.7885	5.5285	6.920 [6.669, 7.381]

TABLE II

ROBUSTNESS ON BENCHMARK SUITES FROM CRISP.

Suite	ContactIPM	CRISP
Cartpole	15/15	15/15
Push Box	24/25	19/25
Transport	8/15	8/15
Push T	50/50	27/50

convergence, all trajectory values are finite, and the trajectory satisfies both the physical-feasibility and task-completion gates. Physical feasibility requires a maximum dynamics or algebraic-equality defect below 10^{-5} , a maximum one-sided constraint violation below 10^{-8} , and a maximum physical complementarity product below 10^{-5} . The complementarity check evaluates

$$\max_{k,p} |a_{k,p} b_{k,p}|$$

using the original nonnegative contact quantities, rather than a solver’s relaxed product row or elastic slack. Task completion is evaluated using the benchmark-specific terminal tolerances inherited from the corresponding released formulation.

Objectives and solution-quality metrics are likewise recomputed from the returned trajectories using the original benchmark costs. Solver convergence, physical feasibility, and task completion are therefore distinct diagnostics; a run contributes to the reported success count only when all three conditions hold.

V. RESULTS

A. Matched CRISP Comparison

Table I reports fixed-instance timing. All 80 timing repetitions pass the common post-solve evaluation. ContactIPM is faster on every problem, with paired median speedups from $2.168\times$ on Push Box to $8.868\times$ on Cartpole. The lower bound of every confidence interval is greater than one.

Both methods produce physically valid trajectories on the timed instances. Cartpole solutions are nearly identical. On Transport, ContactIPM attains objective 2.965 versus 2.983 for CRISP. On Push T, it obtains lower tracking and effort components at the source weight. Push Box exposes a different local tradeoff: ContactIPM uses more force but reaches smaller terminal translation and rotation errors.

Table II reports robustness or generalization to genuinely different initial or target conditions. ContactIPM matches CRISP on Cartpole and Transport and succeeds on five additional Push Box cases. On these three initial/target suites, it passes 47/55 cases versus 42/55 for CRISP.

On Push T, CRISP reaches the terminal task gate in 43/50 cases, but only 27 also satisfy the common physical-complementarity criterion. Reporting both values distinguishes failure to complete the task from a trajectory that appears successful in task space but violates the contact model.

Table III compares solution quality and feasibility on the jointly successful cases from the multi-instance robustness suites in Table II. Cartpole and Transport yield nearly identical objective and terminal-task quality. On Push Box, ContactIPM uses more contact effort and consequently has a larger objective, but reaches smaller terminal translation and angular errors. On the 27 jointly successful Push-T instances, ContactIPM obtains a lower objective and approximately tenfold smaller translation error, whereas CRISP uses slightly less effort and achieves a smaller angular error. CRISP drives complementarity closer to zero, while ContactIPM terminates near its prescribed 10^{-6} physical-complementarity tolerance.

B. Matched IMPACT Comparison

Table IV reports fixed-instance timing. For each benchmark, both solvers execute the same released source case 20 times. ContactIPM is $2.96\times$ faster on Push T and $4.91\times$ faster on Cart Transport, whereas IMPACT is $4.46\times$ faster on Push Box.

Table V reports robustness on three 50-case suites constructed from IMPACT’s released benchmark formulations. Each suite contains the released source case and 49 pre-declared initial-state/target variations, with every instance solved once by each method. ContactIPM passes all 150 cases, whereas IMPACT passes 49/50 Push Box, 48/50 Push-T, and 50/50 Cart Transport cases, for 147/150 overall. The three differing outcomes give ContactIPM a small observed robustness advantage on these suites, with 150/150 accepted runs compared with 147/150 for IMPACT.

Table VI reports median solution quality and feasibility over both solvers jointly successful cases from the multi-instance robustness suites. On Push Box, ContactIPM attains a slightly lower objective, whereas IMPACT uses less force and reaches slightly smaller terminal translation and angular errors. On Push T, IMPACT obtains a lower objective, force effort, peak force, and terminal translation error, while ContactIPM reaches a slightly smaller terminal angular error.

On Cart Transport, ContactIPM obtains a lower objective, uses less force, and reaches smaller terminal position and velocity errors. Across all three suites, ContactIPM produces smaller median dynamics defects and physical-complementarity residuals.

C. OCP Structure without Elastic Complementarity

To investigate whether exploiting OCP structure alone is sufficient for contact-implicit optimization, we transcribe all shared benchmarks in acados [13]. Acados exploits the multistage structure through full SQP, partial condensing, and HPIPM, but does not use an elastic complementarity treatment. Instead, it directly imposes $a \geq 0$, $b \geq 0$, and $ab \leq 0$. Because both factors are nonnegative, this enforces

TABLE III
MEDIAN SOLUTION QUALITY AND FEASIBILITY ON JOINTLY SUCCESSFUL CRISP-SUITE INSTANCES.

Metric	Cartpole		Push Box		Transport		Push T	
	ContactIPM	CRISP	ContactIPM	CRISP	ContactIPM	CRISP	ContactIPM	CRISP
Recomputed objective	2.7202	2.7202	18.6406	8.1969	0.7921	0.7937	6.7964	7.2313
Force Effort	2.6213	2.6212	18.5117	7.8774	0.7225	0.7231	2.9779	2.9558
Peak force	10.113	10.115	14.553	9.516	8.276	8.356	11.617	9.608
Terminal e_p^N	2.38×10^{-3}	2.38×10^{-3}	3.34×10^{-2}	4.43×10^{-2}	4.96×10^{-6}	5.06×10^{-6}	2.93×10^{-3}	2.89×10^{-2}
Terminal $e_{\theta/v}^N$	2.98×10^{-2}	2.98×10^{-2}	1.35×10^{-2}	2.13×10^{-2}	6.96×10^{-2}	7.13×10^{-2}	1.06×10^{-4}	8.55×10^{-6}
Max. equality defect	4.44×10^{-16}	6.55×10^{-8}	3.19×10^{-16}	1.40×10^{-7}	1.70×10^{-7}	3.47×10^{-15}	2.22×10^{-16}	1.84×10^{-7}
Max. complementarity residual	9.94×10^{-7}	1.25×10^{-14}	6.76×10^{-7}	6.14×10^{-13}	9.41×10^{-7}	6.01×10^{-14}	1.00×10^{-6}	9.26×10^{-15}

For Cartpole, Push Box and Push T, e_p^N and $e_{\theta/v}^N$ denote terminal translation and angular errors; for Transport, they denote terminal position and velocity errors. Objectives use the original benchmark costs. Lower is better.

TABLE IV
RUNTIME COMPARISON CONTACTIPM VS IMPACT ON 20 PAIRED RUNS

Benchmark	ContactIPM [s]	IMPACT [s]	Speedup [95% CI]
Push Box	0.2666	0.0599	0.224 [0.217, 0.242]
Push T	0.2226	0.6645	2.960 [2.654, 3.201]
Cart Transport	0.0366	0.1799	4.908 [4.717, 5.255]

TABLE V
ROBUSTNESS ON BENCHMARK SUITES FROM IMPACT.

Benchmark	ContactIPM	IMPACT
Push Box	50/50	49/50
Push T	50/50	48/50
Cart Transport	50/50	50/50
Total	150/150	147/150

exact complementarity rather than a relaxation. All seven formulations build and execute successfully.

A run is accepted only if: (i) the solver reports successful convergence, (ii) an independent post-solve evaluation verifies the dynamics, side constraints, algebraic equalities, and physical complementarity, and (iii) the trajectory reaches the terminal task goal. These conditions are also reported separately for acados to distinguish solver failure, physical infeasibility, and failure to complete the task.

Table VII exposes the contact-initiation failure most clearly. Acados passes the physical feasibility check in all 75 Push Box cases and reports successful convergence in 62, but none reaches the terminal goal. Inspection shows that it frequently terminates at a physically feasible zero-contact trajectory in which the box does not move. Thus, neither solver status nor physical feasibility alone establishes a successful contact plan.

The same trend appears on the other contact-rich benchmarks. To show that the difficulty is not specific to Push Box, we next consider the remaining contact-rich manipulation suites: CRISP Transport, CRISP Push T, IMPACT Push T, and IMPACT Cart Transport. Across these 165 cases, acados produces only one accepted trajectory, whereas ContactIPM succeeds in 158. OCP structure therefore addresses the temporal linear algebra but does not remove the degeneracy of exact complementarity. In particular, the exact feasible set has no interior region in which both complementary quantities are positive, and the product derivative vanishes at a biactive point. A local SQP method can consequently

remain in a zero-contact basin or stall while changing contact modes.

ContactIPM combines the missing MPCC treatment with OCP-structured linear algebra. Its elastic lift provides an interior path for initiating and changing contact, while stagewise elimination preserves the Riccati structure. The relaxation is tightened during optimization, and final acceptance still requires the original physical complementarity residual. Because acados and ContactIPM also differ in globalization and Newton-system construction, this comparison is not a one-factor ablation. Nevertheless, the results show that exploiting OCP structure alone does not provide robust MPCC performance from the tested initializations.

D. Closed-Loop Validation

We evaluate ContactIPM in closed-loop control using the Push Box quasi-static model. At each 0.1 s control update, the controller observes the box pose, solves a 19-stage target-tracking OCP, and applies the first control. The first solve uses zero free-state and control guesses, while subsequent solves use shifted warm starts. The simulated plant is integrated using ten RK4 substeps per control period. A rollout is successful when both the translational and angular target errors remain below 0.1 m and 0.1 rad, respectively, for ten consecutive control steps.

We consider 50 rollouts distributed across the following conditions: nominal motion, initial-pose perturbations, mass and friction mismatch, isolated pose-state resets, and a combined-disturbance scenario. The combined disturbance includes an initial pose error, independently perturbed mass and friction, measurement noise at every feedback update, and one scheduled pose-state reset. Representative nominal and combined-disturbance closed-loop trajectories are shown in Fig. 2(a).

Table VIII reports the distribution of closed-loop completion time and final pose accuracy. A rollout is successful only after both the position and angular errors remain below 0.1 m and 0.1 rad, respectively, for ten consecutive control steps. The step columns count the 0.1 s feedback updates required to complete this goal hold. The median describes a typical rollout in each scenario, while the maximum reports the worst observed rollout. A fractional median, such as 20.5 steps, results from averaging the two central values of an even-sized group; no individual rollout uses a fractional

TABLE VI
MEDIAN SOLUTION QUALITY AND FEASIBILITY ON JOINTLY SUCCESSFUL IMPACT-SUITE INSTANCES.

Metric	Push Box		Push T		Cart Transport	
	ContactIPM	IMPACT	ContactIPM	IMPACT	ContactIPM	IMPACT
Recomputed objective	0.0116	0.0120	0.0453	0.0384	1.69×10^{-4}	2.72×10^{-4}
Force effort	5.3512	3.7937	1.4714	0.8690	154.8426	254.0451
Peak force	0.4443	0.4359	0.4093	0.2447	4.3689	7.0336
Terminal e_p^N	3.63×10^{-5}	2.83×10^{-5}	2.15×10^{-4}	5.34×10^{-5}	5.45×10^{-8}	1.78×10^{-5}
Terminal $e_{\theta/v}^N$	2.08×10^{-5}	1.62×10^{-5}	7.66×10^{-5}	8.81×10^{-5}	8.04×10^{-9}	9.92×10^{-9}
Max. equality defect	2.78×10^{-17}	1.27×10^{-8}	5.55×10^{-17}	3.91×10^{-8}	2.22×10^{-16}	1.85×10^{-8}
Max. complementarity residual	9.98×10^{-7}	3.15×10^{-6}	1.00×10^{-6}	1.10×10^{-6}	9.98×10^{-7}	2.93×10^{-6}

For Push Box and Push T, e_p^N and $e_{\theta/v}^N$ denote terminal translation and angular errors; for Cart Transport, they denote terminal position and velocity errors. Objectives use the original benchmark costs. Lower is better.

TABLE VII
PUSH BOX ROBUSTNESS: CONTACTIPM VS ACADOS

Parameter set	ContactIPM		Acados		
	Post-Solve Eval Accepted	Post-Solve Eval Accepted	Solver Success Exit	Physical Feasible	Goal reached
CRISP	24/25	0/25	19/25	25/25	0/25
IMPACT	50/50	0/50	43/50	50/50	0/50

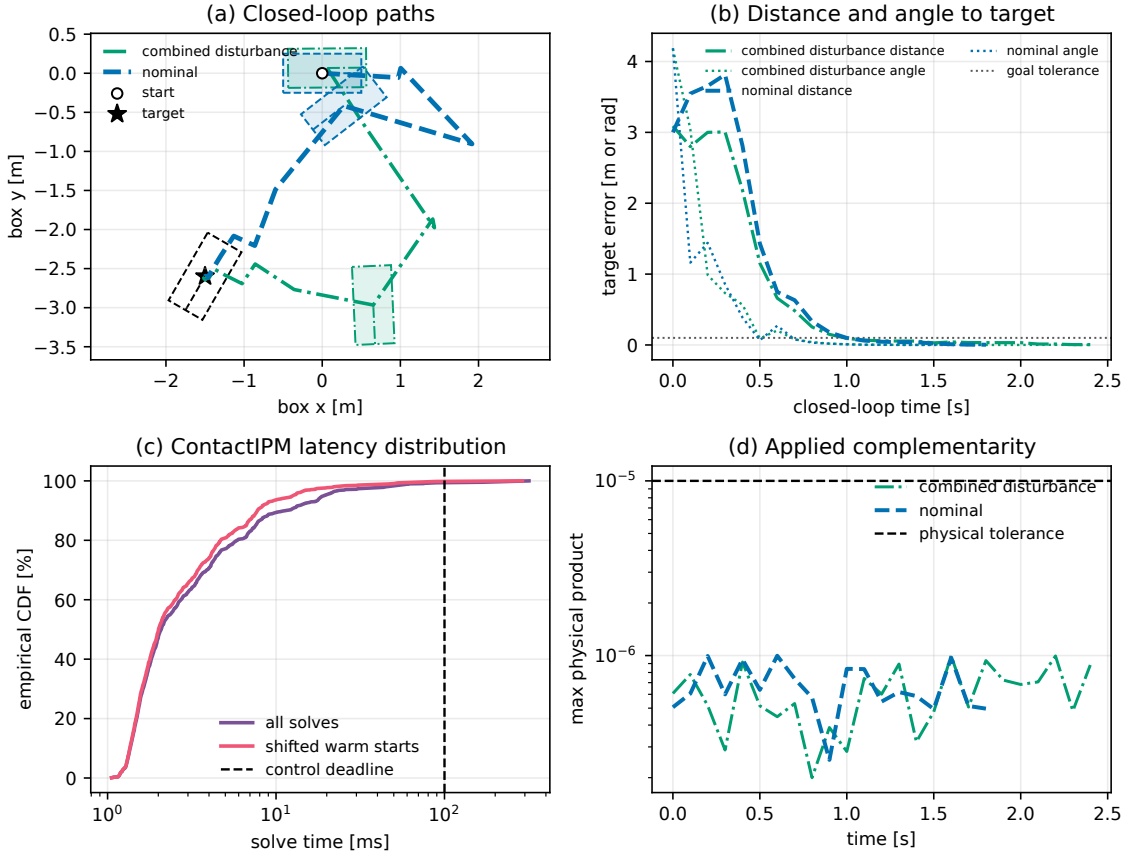


Fig. 2. Closed-loop Push Box validation. (a) Representative nominal and combined-disturbance trajectories. Shaded footprints show the initial and geometric-halfway box poses, while the unfilled dashed footprint denotes the target. Each center-to-front segment indicates the signed box orientation. (b) Translational and angular target errors versus elapsed closed-loop time. Samples are separated by the 0.1 s control period; the horizontal dotted line is the common 0.1 m or 0.1 rad goal tolerance. Curves terminate after both tolerances have been maintained for ten consecutive steps. (c) Empirical distribution of solve times over all 1,104 MPC solves; the vertical line denotes the 100 ms control deadline. (d) Original physical complementarity products evaluated independently of the elastic product slack and its logarithmic barrier.

control step. All 50 rollouts succeed. Nominal motion completes in 19 steps, corresponding to approximately 1.9 s. The combined disturbance increases the median completion time to 25 steps and the maximum to 27 steps, but its worst final

position and angular errors are only 11.9 mm and 2.15 mrad. Thus, the tested disturbances increase completion time and final-error variability without causing task or solver failure.

As shown in Fig. 2(b), the pose errors generally decrease

TABLE VIII
CLOSED-LOOP PUSH BOX ROBUSTNESS.

Scenario	Success	Control steps		Final position [mm]		Final angle [mrad]	
		Median	Maximum	Median	Maximum	Median	Maximum
Nominal	5/5	19	19	0.153	0.153	0.161	0.161
Initial-pose perturbation	15/15	19	21	1.57	10.2	0.0868	0.876
Mass/friction mismatch	10/10	20.5	24	0.523	2.79	0.0973	0.969
Isolated pose reset	10/10	26	31	0.361	7.32	0.0800	0.801
Combined disturbance	10/10	25	27	1.36	11.9	0.621	2.15

because the measured state is repeatedly incorporated into the target-tracking MPC problem. The trajectories have different durations because each controller run terminates only after satisfying the ten-step goal hold.

Across all 1,104 solves, the median, 90th-percentile, and 99th-percentile solve times are 2.08 ms, 11.5 ms, and 60.8 ms, respectively. The solve time CDF is shown in Fig. 2(c). Seven solves exceed the 100 ms control period. Among the 1,054 shifted-warm-start solves, the median time is 2.01 ms and only two solves (0.19%) miss the 100 ms deadline. The controller meets the 100 ms deadline on 1097/1104 solves (99.37%) overall and on 1052/1054 shifted-warm-start solves (99.81%).

The post-solve evaluation gives maximum planned dynamics and side-constraint violations of 8.62×10^{-7} and 7.30×10^{-9} , respectively. The time evolution of physical complementarity is shown in Fig. 2(d). The largest planned and applied physical complementarity products are 1.01×10^{-6} and 1.00×10^{-6} . Thus, closed-loop feedback does not compromise the primal feasibility or physical complementarity of the computed plans.

Finally, because the quasi-static benchmark contains pose but no momentum state, the scheduled reset is implemented as a direct change in position and yaw rather than as an inertial impulse. This experiment therefore evaluates closed-loop recovery and complementarity handling under model mismatch and state disturbances.

VI. CONCLUSION

ContactIPM demonstrates that primal-dual interior point methods need not be abandoned for contact-implicit trajectory problems. By combining explicit complementarity recognition, elastic interior relaxation, stagewise primal-dual elimination, Riccati recursion, scaling, and multi-phase recovery, the solver targets the gap between MPCC-specific robustness and structure-exploiting optimal-control optimization. It is faster than CRISP on all four timed instances and improves aggregate success on the multi-instance suites. Against locally executed IMPACT, it passes all 150 cases and is faster on Push T and Cart Transport, while IMPACT is substantially faster on Push Box. Across these heterogeneous benchmarks, ContactIPM establishes that MPCC reliability, primal-dual consistency, and OCP-structured computation can be realized together in a single practical solver.

REFERENCES

[1] M. Posa, C. Cantu, and R. Tedrake, "A direct method for trajectory optimization of rigid bodies through contact," *International Journal of Robotics Research*, vol. 33, no. 1, pp. 69–81, 2014.

[2] Z. Manchester and S. Kuindersma, "Variational contact-implicit trajectory optimization," in *Proc. International Symposium on Robotics Research*, 2017, pp. 985–1000.

[3] J. -P. Sleiman, J. Carius, R. Grandia, M. Wermelinger and M. Hutter, "Contact-Implicit Trajectory Optimization for Dynamic Object Manipulation," *International Conference on Intelligent Robots and Systems (IROS)*, Macau, China, 2019, pp. 6814–6821, doi: 10.1109/IROS40897.2019.8968194.

[4] T. A. Howell, S. Le Cleac'h, K. Tracy, and Z. Manchester, "CALIPSO: A differentiable solver for trajectory optimization with conic and complementarity constraints," *The International Symposium of Robotics Research*, pp. 504–521. Cham: Springer Nature Switzerland, 2022.

[5] Y. Li, H. Han, S. Kang, J. Ma, and H. Yang, "On the surprising robustness of sequential convex optimization for contact-implicit motion planning," *Proc. Robotics: Science and Systems*, 2025.

[6] J. Li, D. Gong, and G. Chalkatzaki, "IMPACT: An implicit active-set augmented Lagrangian for fast contact-implicit trajectory optimization," in *Proc. Robotics: Science and Systems*, 2026.

[7] H. Zhao, L. Righetti, and M. Khadiv, "Hippo: High-performance interior-point and projection-based solver for generic constrained trajectory optimization," *IEEE Robotics and Automation Letters*, 11(6), 6752–6759. <https://doi.org/10.1109/LRA.2026.3682524>.

[8] Raghunathan, Arvind U., and Lorenz T. Biegler, "An interior point method for mathematical programs with complementarity constraints (MPCCs)," *SIAM Journal on Optimization* 15.3 (2005): 720–750.

[9] S. Leyffer, G. López-Calva, and J. Nocedal, "Interior methods for mathematical programs with complementarity constraints," *SIAM Journal on Optimization*, vol. 17, no. 1, pp. 52–77, 2006.

[10] A. Domahidi, A. Zgraggen, M. N. Zeilinger, M. Morari, and C. N. Jones, "Efficient interior point methods for multistage problems arising in receding horizon control," in *Proc. IEEE Conference on Decision and Control*, 2012, pp. 668–674.

[11] A. Wächter and L. T. Biegler, "On the implementation of an interior-point filter line-search algorithm for large-scale nonlinear programming," *Mathematical Programming*, vol. 106, no. 1, pp. 25–57, 2006.

[12] S. Mehrotra, "On the implementation of a primal-dual interior point method," *SIAM Journal on Optimization*, vol. 2, no. 4, pp. 575–601, 1992.

[13] R. Verschuere, G. Frison, D. Kouzoupis, J. Frey, N. van Duijkeren, A. Zanelli, B. Novoselnik, T. Albin, R. Quirynen, and M. Diehl, "acados—a modular open-source framework for fast embedded optimal control," *Mathematical Programming Computation*, vol. 14, no. 1, pp. 147–183, 2022.

[14] Xu, Ming, Stephen Gould, and Iman Shames. "Line-Search Filter Differential Dynamic Programming for Optimal Control with Nonlinear Equality Constraints." arXiv preprint arXiv:2504.08278 (2025).