

NTR: Neural Token Reconstruction for Scene Token Bottleneck in End-to-End Driving

Jiahui Li^{1,2*}, Jiawei Sun^{1,2*}, Zixiang Ren¹, Ming Liu¹, Jiamin Shi¹,
Ruiteng Zhao¹, Zhiyang Liu¹, Liying Liu², Zuoguan Wang², Kaidi Yang¹
¹National University of Singapore ²Black Sesame Technologies

Abstract: Recent perception-free end-to-end (E2E) autonomous driving methods bypass explicit perception outputs by compressing dense image patch tokens into compact scene tokens for downstream trajectory generation and scoring. While these scene tokens form a compact visual bottleneck for the planner, they receive supervision solely from the planning objective, providing limited constraints on the encoded visual information. To address this limitation, we introduce Neural Token Reconstruction (NTR), a representation learning framework to directly constrain the compact scene-token bottleneck in perception-free driving. NTR introduces a self-distillation masked latent reconstruction objective that reconstructs masked patch-level latent features using only compact scene tokens as reconstruction memory. This forces reconstruction gradients to pass exclusively through the scene-token bottleneck, encouraging scene tokens to preserve richer and less redundant visual representations for planning. We further introduce semantic priors derived from foundation-model annotations as a weak semantic interface biasing reconstruction targets toward driving-related structures without introducing explicit perception heads. All auxiliary reconstruction components are removed at inference time, leaving the deployed planner unchanged. NTR achieves state-of-the-art performance on three public autonomous driving benchmarks, including **8.0461 RFS on Waymo E2E and 94.1 PDMS / 90.9 EPDMS on NavSim1&2**. The learned scene tokens exhibit lower pairwise redundancy and higher effective rank, indicating that effective bottleneck supervision improves both compact visual representation learning and planning performance. We further validate NTR on a private large-scale driving dataset and integrate it into a real-vehicle planning stack, demonstrating its practical applicability beyond public benchmarks. Real-world deployment videos are provided in the supplementary materials.

Keywords: End-to-End Autonomous Driving, Masked Latent Reconstruction, Scene Representation Learning

1 Introduction

Perception-free end-to-end (E2E) autonomous driving methods [1, 2, 3, 4, 5] map image observations directly to future trajectories, without producing explicit perception outputs such as detection, segmentation, and occupancy [6, 7, 8, 9, 10, 11, 12]. In this setting, the learned visual representation alone determines what scene information reaches the planner. Previous SOTA perception-free methods [13, 14] adopt the token-compression idea from image tokenizers [15, 16], reducing dense Vision Transformer (ViT) patch features into a compact set of scene tokens. These scene tokens serve as the only visual interface between visual backbone and planner, forming a many-to-few compression bottleneck.

Previous SOTA methods [13, 14] supervise this bottleneck solely through trajectory-level planning objectives, which provide only weak constraints on the fine-grained visual information preserved

*Equal contribution.

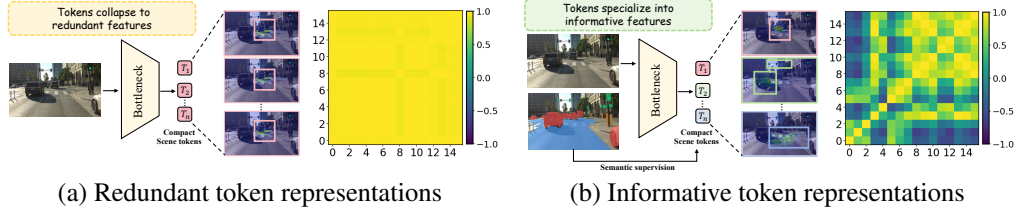


Figure 1: Diagnostic visualization of scene-token behavior. (a) The planning-only baseline shows overlapping attended regions and high token similarity. (b) NTR shows broader coverage over structured scene elements and lower token similarity.

during compression. As a result, scene tokens tend to learn redundant representations with highly overlapping spatial attention patterns, as illustrated in Fig. 1(a). This failure mode is closely related to a known issue in Vision Transformers, where compact aggregation tokens are processed identically to patch tokens despite their fundamentally different roles [17]. Without explicit supervision, such tokens often drift toward lazy aggregation and redundant encoding [18]. Existing efforts primarily focus on architectural choices such as the number or structure of scene tokens [13, 16, 15], but largely overlook the representation quality of the compact planning bottleneck itself. This raises a fundamental representation learning question in perception-free planning:

How can compact scene tokens preserve planning-relevant visual information without explicit perception supervision?

To answer this question, we propose Neural Token Reconstruction (NTR), a self-distillation framework that directly supervises the scene-token bottleneck through masked latent reconstruction. Instead of reconstructing images, NTR reconstructs patch-level latent representations using only compact scene tokens as memory, explicitly encouraging the bottleneck to preserve informative and complementary local visual evidence for planning. During training, an online ViT encoder [19, 20] processes masked images to generate scene tokens, while an EMA teacher [21, 22] operating on clean images provides stop-gradient latent targets. A lightweight reconstruction decoder is attached only during training, and reconstruction gradients reach the encoder exclusively through the compact scene-token bottleneck. To further improve reconstruction quality, we introduce semantic priors derived from foundation-model segmentation to focus supervision on structured and safety-critical driving regions, including agents, drivable areas and traffic-control elements. Importantly, the reconstruction branch, EMA teacher, and semantic priors are used only during training and introduce zero additional inference-time computation or architectural changes to the planner.

Extensive experiments on Waymo Open Dataset and NavSim V1&2 demonstrate that NTR consistently improves planning performance across multiple public autonomous driving benchmarks. Beyond benchmark gains, NTR also reduces scene-token redundancy and improves representation diversity, suggesting that direct bottleneck supervision leads to more informative compact planning representations. We further validate NTR on a large-scale private driving dataset and integrate it into a real-vehicle planning stack, demonstrating strong scalability and practical applicability in real-world autonomous driving systems. The key contribution can be summarized as:

- We identify the scene-token bottleneck as a core representation learning challenge in perception-free end-to-end autonomous driving, and propose Neural Token Reconstruction (NTR), a framework that directly supervises compact planning representations through masked latent reconstruction.
- We introduce semantic-guided reconstruction priors that focus supervision on structured and safety-critical driving regions without introducing explicit perception heads or inference-time overhead.
- Extensive experiments on Waymo and NavSim V1&2 dataset demonstrate that NTR significantly improves planning performance while reducing scene-token redundancy and improving representation diversity. Additional large-scale real-world experiments and vehicle deployment validate its scalability and practical applicability.

2 Related Work

End-to-End Autonomous Driving. End-to-end autonomous driving methods can generally be divided into perception-based and perception-free paradigms. Perception-based methods supervise the visual representation through auxiliary perception tasks such as detection, tracking, map segmentation, and occupancy prediction [6, 23, 10, 24, 25], which require dense annotations and task-specific sub-modules. Perception-free methods drop these auxiliary perception tasks and feed the features produced by an image backbone directly to the planner. Early work mapped sensor input to control commands through behavior cloning [1, 2]. Recent perception-free planners compress dense patch features into a compact representation before planning through register-style token compression [13, 14] inspired by compact tokenizers [15, 16]. However, the compression is supervised only by the planning loss, which provides a weak signal for what visual evidence the compact representation should retain. Our work builds on register-style perception-free planners and studies the compact scene-token interface explicitly as a representation bottleneck for planning.

Masked Representation Learning in Driving. Masked prediction and self-distillation are standard paradigms for self-supervised visual representation learning, in both pixel [26, 27] and latent space [19, 21, 22, 28, 29]. In autonomous driving, related objectives have been used to predict future scene latents within world models [30, 31] or to pretrain ViT backbones for planning relevance through JEPA-style self-supervision [3]. Both directions operate on the visual backbone or its dense feature map and require a separate pretraining stage before the planning objective is introduced. NTR applies masked latent reconstruction at the compact scene-token bottleneck instead. The reconstruction decoder cross-attends only to scene tokens, so the auxiliary signal constrains what information is retained after compression and is optimized jointly with the planning losses in a single end-to-end stage.

Foundation Models for Driving and Robotic Perception. Foundation models are increasingly used as a source of perception information or as a substitute for explicit perception modules in driving and robotics. Recent works use pretrained geometric or perception foundation models to provide spatial representations [32, 33], explicit perception outputs [34], or reconstruction targets for downstream policy learning [35]. Our work uses foundation-model segmentation differently. Instead of supplying explicit perception outputs to the planner, we use SAM3-generated masks [36] only as weak semantic priors for reconstruction target allocation. These priors bias reconstruction toward structured driving regions such as agents, drivable areas, and traffic-control elements, while avoiding reconstruction budget on uninformative background regions. All semantic priors are removed during inference and do not introduce additional perception modules or deployment overhead.

3 Methodology

Figure 2 gives an overview of NTR. Our framework keeps the planner architecture unchanged and adds supervision only at training time.

3.1 Compact Scene Token Bottleneck

We adopt a DrivoR-style planner [13] as the base architecture, and use it to study how compact scene tokens retain visual information for planning. We describe the method for a single planning frame and omit the frame index throughout this section. At current timestep, the input consists of V synchronized camera images $\mathcal{I} = \{I^v\}_{v=1}^V$ and the current ego state $e = [v, a, \psi, c]$, where v , a , ψ , and c denote ego velocity, acceleration, heading, and high-level navigation command. Each view image is tokenized into a patch grid of size $H_p \times W_p$, producing patch tokens $\mathbf{P}^v \in \mathbb{R}^{H_p W_p \times D}$ for view v , where D denotes the token feature dimension. The base architecture introduces N_s learnable scene tokens $\mathbf{S}^v \in \mathbb{R}^{N_s \times D}$, where $N_s \ll H_p W_p$. These scene tokens interact with patch tokens from the same view inside the ViT backbone f_θ , where LoRA [37] adapters are used for efficient fine-tuning:

$$\tilde{\mathbf{S}}^v, \tilde{\mathbf{P}}^v = f_\theta(\mathbf{S}^v, \mathbf{P}^v), \quad v = 1, \dots, V. \quad (1)$$

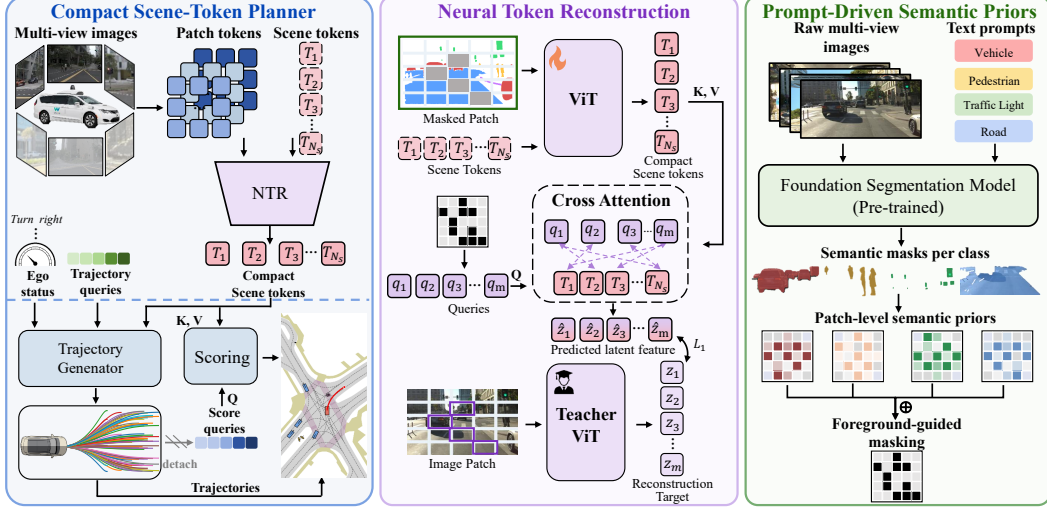


Figure 2: Overview of Neural Token Reconstruction (NTR). **(a) Compact Scene-Token Planner:** The compact scene token planner compresses patch tokens into queryable scene tokens for trajectory generation and scoring. **(b) Neural Token Reconstruction:** NTR supervises this bottleneck by reconstructing masked teacher features using only the scene tokens as memory. **(c) Prompt-Driven Semantic Priors:** Semantic priors from foundation annotations allocate reconstruction targets toward structured driving elements.

where only $\tilde{\mathbf{S}}^v$ is exposed to the downstream planner, while patch features are discarded.

We write the per-view compression from dense patch tokens to scene tokens as

$$\mathbf{P}^v \in \mathbb{R}^{H_p W_p \times D} \longrightarrow \tilde{\mathbf{S}}^v \in \mathbb{R}^{N_s \times D}, \quad N_s \ll H_p W_p. \quad (2)$$

This mapping forms the scene token bottleneck between image features and planning. After compression, the downstream planner no longer accesses the $H_p W_p$ dense patch tokens from each view and relies on the corresponding N_s scene tokens.

Finally, we concatenate scene tokens from all views as $\tilde{\mathbf{S}} = \text{Concat}_{v=1}^V(\tilde{\mathbf{S}}^v)$. The resulting $\tilde{\mathbf{S}}$ is the only visual key-value memory exposed to the downstream planner. They therefore determine what image evidence remains available for trajectory generation and scoring. We abstract the downstream trajectory generation and scoring module as

$$\{(\hat{\tau}_k, \hat{s}_k)\}_{k=1}^{N_q} = \mathcal{D}_\phi(\tilde{\mathbf{S}}, e), \quad (3)$$

where $\hat{\tau}_k$ and $\hat{s}_k$ denote the k -th candidate trajectory and predicted score. In our implementation, $\mathcal{D}_\phi$ follows the DrivoR-style trajectory proposal and trajectory-conditioned scoring design. Candidate trajectories are generated from the scene token memory and ego state, and each candidate is scored using the same scene memory. NTR supervises the construction of $\tilde{\mathbf{S}}$ and leaves $\mathcal{D}_\phi$ unchanged. Additional architectural details are provided in the appendix.

3.2 Neural Token Reconstruction

The scene token bottleneck defined in Section 3.1 receives no explicit supervision in the base planner. It is optimized only indirectly through trajectory regression and candidate scoring. NTR adds a direct and dense training signal to this bottleneck by reconstructing masked teacher features from the scene tokens used by the planner. The reconstruction branch is used only during training and does not modify the trajectory generation or scoring modules at inference time.

NTR follows a self-distillation design with an online branch and an EMA teacher branch. During training, the online encoder receives masked patch tokens together with the learnable scene tokens:

$$\tilde{\mathbf{S}}^{v,m}, \tilde{\mathbf{P}}^{v,m} = f_\theta(\mathbf{S}^v, \mathbf{P}^{v,m}). \quad (4)$$

We keep $\tilde{\mathbf{S}}^{v,m}$ as the scene token memory for both downstream planning and reconstruction. The dense online patch outputs $\tilde{\mathbf{P}}^{v,m}$ are not used as reconstruction memory.

The teacher branch processes clean patch tokens and provides latent targets. The teacher encoder f_ξ is an EMA copy of the online encoder and is evaluated without gradient updates:

$$\tilde{\mathbf{S}}^{v,*}, \bar{\mathbf{Z}}^v = f_\xi(\mathbf{S}^v, \mathbf{P}^v), \quad \mathbf{Z}^{v,*} = \text{sg}(\bar{\mathbf{Z}}^v). \quad (5)$$

Here, $\text{sg}(\cdot)$ denotes stop-gradient, and only the teacher patch outputs $\mathbf{Z}^{v,*}$ are used as reconstruction targets. The teacher parameters are updated by EMA, $\xi \leftarrow \mu\xi + (1-\mu)\theta$, where μ is the momentum coefficient.

Let $\rho_{\text{rec}} \in (0, 1)$ denote the reconstruction ratio. For each view v , we sample a reconstruction location set $\Omega_{\text{rec}}^v \subset \{1, \dots, H_p W_p\}$ with $|\Omega_{\text{rec}}^v| = \lfloor \rho_{\text{rec}} H_p W_p \rfloor$. The patch tokens at these locations are masked in the online branch and used as prediction targets. The set Ω_{rec}^v is sampled either uniformly or according to the semantic priors described in Section 3.3. The selected locations initialize reconstruction queries from patch positional encodings, $\mathbf{Q}_{\Omega_{\text{rec}}^v}^{\text{pos}} = \mathbf{1}_{|\Omega_{\text{rec}}^v|} \mathbf{q}_{\text{rec}}^\top + \mathbf{E}_{\text{pos}}[\Omega_{\text{rec}}^v]$, where $\mathbf{q}_{\text{rec}} \in \mathbb{R}^D$ is a shared learnable reconstruction query and $\mathbf{E}_{\text{pos}} \in \mathbb{R}^{H_p W_p \times D}$ is the patch positional encoding.

A lightweight Transformer decoder g_ω predicts teacher features at the selected locations. The decoder takes positional reconstruction queries as input and cross-attends only to the masked-view scene tokens:

$$\hat{\mathbf{Z}}_{\Omega_{\text{rec}}^v}^v = g_\omega(\mathbf{Q}_{\Omega_{\text{rec}}^v}^{\text{pos}}, \tilde{\mathbf{S}}^{v,m}). \quad (6)$$

Since g_ω cannot access dense online patch outputs, the reconstruction loss reaches the online encoder through the scene tokens. This makes masked latent reconstruction a dense training signal on the bottleneck, complementing the trajectory and score supervision from the planning objective. Since g_ω has no access to dense online patch outputs, the reconstruction gradient reaches the online encoder through the scene tokens:

$$\frac{\partial \mathcal{L}_{\text{rec}}}{\partial \theta} = \sum_v \frac{\partial \mathcal{L}_{\text{rec}}}{\partial \tilde{\mathbf{S}}^{v,m}} \frac{\partial \tilde{\mathbf{S}}^{v,m}}{\partial \theta}. \quad (7)$$

This makes masked latent reconstruction a dense training signal on the bottleneck, complementing the sparse trajectory and score signals from the planning objective. The detailed decoder architecture is provided in the appendix.

3.3 Reconstruction Allocation with Semantic Priors

Uniform reconstruction provides a general dense signal to the scene-token bottleneck, but it does not distinguish structured scene evidence from low-level appearance patterns. In driving scenes, large image regions may correspond to sky, background texture, or distant clutter, while agents, drivable areas and traffic cues occupy only a subset of patches. We therefore use semantic priors as a soft allocation signal that biases reconstruction target selection toward these structured driving elements.

Given a prompt set $\mathcal{P} = \{p_k\}_{k=1}^K$ covering driving-related categories, a foundation segmentation model produces image-level masks for each camera view. We denote the generated masks as $\mathbf{U} \in \{0, 1\}^{V \times K \times H \times W}$ and pool them to the planner patch grid as $\mathbf{G} = \text{Pool}(\mathbf{U}) \in \mathbb{R}^{V \times K \times H_p \times W_p}$. After normalization along the semantic dimension, $\mathbf{G}(v, k, i, j)$ gives the prior score of category k at patch location (i, j) in view v . We convert the semantic priors into a reconstruction score map:

$$\mathbf{A}(v, i, j) = \sum_{k=1}^K \alpha_k \mathbf{G}(v, k, i, j) + \tau \varepsilon_{vij}, \quad \varepsilon_{vij} \sim \mathcal{N}(0, 1), \quad (8)$$

where α_k is the category weight and τ controls stochastic exploration. The selected reconstruction locations are then obtained by taking the top-scoring patches over the full patch grid under the same reconstruction ratio ρ_{rec} used in Section 3.2:

$$\Omega_{\text{rec}}^v = \text{Top-}m(\mathbf{A}(v, :, :)), \quad m = \lfloor \rho_{\text{rec}} H_p W_p \rfloor. \quad (9)$$

Here $\Omega_{\text{rec}}^v \subset \{1, \dots, H_p W_p\}$ denotes the selected patch index set after flattening the patch grid. The selected locations Ω_{rec}^v are used both to mask the online input patches and to define the support of the reconstruction loss. For the random masking baseline, we replace $\mathbf{A}$ with random patch scores while keeping the same reconstruction ratio. The semantic priors are used only during training to allocate reconstruction targets, and are removed together with the reconstruction branch at inference time. Detailed prompt-based semantic prior generation pipeline is illustrated in the appendix.

3.4 Training Objectives

The overall objective combines the original planning loss with the NTR reconstruction loss:

$$\mathcal{L} = \mathcal{L}_{\text{plan}} + \lambda_{\text{rec}} \mathcal{L}_{\text{rec}}, \quad (10)$$

where λ_{rec} controls the strength of the reconstruction objective. $\mathcal{L}_{\text{plan}}$ follows the base planner and includes trajectory supervision and score supervision for trajectory selection. Detailed planning losses for different benchmarks are provided in Appendix ??.

We collect the reconstruction locations from all camera views as

$$\Omega_{\text{rec}} = \{(v, i) \mid i \in \Omega_{\text{rec}}^v, v = 1, \dots, V\}. \quad (11)$$

The reconstruction loss is computed in the teacher latent feature space:

$$\mathcal{L}_{\text{rec}} = \frac{1}{|\Omega_{\text{rec}}|D} \sum_{(v,i) \in \Omega_{\text{rec}}} \|\hat{\mathbf{z}}_i^v - \mathbf{z}_i^{v,*}\|_1. \quad (12)$$

Here, i indexes a patch location in view v , D denotes the hidden dimension, $\hat{\mathbf{z}}_i^v$ is the reconstructed latent feature, and $\mathbf{z}_i^{v,*}$ is the corresponding stop-gradient teacher target. Semantic priors only determine the support of Ω_{rec}^v .

4 Experiments

4.1 Experimental Setup

Datasets and Evaluation Metrics. We evaluate NTR on the Waymo E2E dataset [38] and NavSim V1&2 [39, 40]. Waymo is evaluated with Rater Feedback Score (RFS), which is based on human ratings, while NavSim uses closed-loop proxy scores based on driving rules, including PDMS and its extension EPDMS. On Waymo, we train on 2,037 segments, corresponding to approximately 76k samples, and evaluate on 479 validation segments and 1,505 test segments. On NavSim, we use the full navtrain split with approximately 103k samples.

Implementation Details. We use DrivoR [13] as the baseline planner, with a pretrained DINOv2 ViT-S backbone [19] adapted by LoRA [37]. Unless otherwise specified, we use four camera views and 16 scene tokens per camera. The reconstruction ratio is set to $\rho_{\text{rec}} = 0.3$, the EMA momentum is set to $\mu = 0.999$, and the temperature is set to $\tau = 0.4$. The reconstruction loss weight λ_{rec} is set to 1.0 on Waymo and 0.5 on NavSim. We use the AdamW optimizer [41] and train on a cluster of 8 NVIDIA A800 GPUs with a total batch size of 128. The learning rate is initialized to 2×10^{-4} and scheduled with cosine annealing after a warmup over the first 10% of training steps. Full benchmark protocols, optimization hyperparameters, and implementation details are provided in the appendix.

4.2 Experiment Results

Benchmark Results. Table 1 reports the results on the Vision-based End-to-End Driving track of the Waymo Open Dataset Challenge. This table compares our final NTR submission with existing leaderboard methods. NTR achieves the best overall RFS among the listed methods, reaching 7.9982 with a single model and 8.0461 with ensembling. It also obtains the best ADE@5s and ADE@3s, showing that the improvement is reflected in both the human-rating-based score and trajectory accuracy. Table 2 and Table 3 further evaluate NTR on navtest with PDMS and EPDMS. Using only the

Table 1: Performance on the leaderboard of the Vision-based End-to-End Driving track of the Waymo Open Dataset Challenge. Bold indicates best.

Method	Reference	RFS $\uparrow$	ADE 5s $\downarrow$	ADE 3s $\downarrow$	RFS (Cons.) $\uparrow$	RFS (Inter.) $\uparrow$	RFS (Ped.) $\uparrow$	RFS (Cyc.) $\uparrow$
RAP (Ensemble)	ICLR'26[5]	8.0430	2.6457	1.1741	8.6939	8.1798	8.0336	7.7604
Poutine	arXiv'25[42]	7.9860	2.7419	1.2055	8.3595	8.1356	7.9529	7.8325
IRL-VLA	arXiv'25[43]	7.8900	2.8235	1.2184	8.4401	7.9781	7.9236	7.7757
FROST-Drive	arXiv'26[44]	7.8560	3.5653	2.5373	8.2510	7.9658	7.9293	7.7192
HMVLM	arXiv'25[45]	7.7367	3.0715	1.3269	8.6663	7.9043	7.8578	7.3925
dVLM-AD	arXiv'25[46]	7.6331	3.0221	1.2849	8.1177	7.9692	7.6775	7.5778
AutoVLA	NeurIPS'25[47]	7.5566	2.9580	1.3507	7.9556	7.7112	7.5920	7.3208
Waymo Baseline	arXiv'25[48]	7.5281	3.0182	1.3200	8.2729	7.6226	7.6651	7.5172
DrivePI	arXiv'25[49]	7.5160	2.9066	1.2526	8.2487	7.8302	7.9286	7.7029
OpenEMMA w/ Qwen	arXiv'25[50]	6.3162	4.1078	1.8663	6.3312	6.7374	6.6844	5.9696
NTR (Single)	Ours	7.9982	2.7550	1.1900	8.9490	8.1064	7.9781	7.8125
NTR (Ensemble)	Ours	8.0461	2.6379	1.1729	8.8159	8.1237	8.0764	7.9158

Table 2: Performance on navtest split evaluated with Navsim v1 metrics. Bold indicates best.

Method	Reference	NC $\uparrow$	DAC $\uparrow$	TTC $\uparrow$	Comf. $\uparrow$	EP $\uparrow$	PDMS $\uparrow$
Human Driver(Ground Truth)	NeurIPS'24[39]	100	100	100	99.9	87.5	94.8
PDM-Closed	PMLR'23[51]	94.6	99.8	89.9	86.9	99.9	89.1
AutoVLA	NeurIPS'25[47]	98.4	95.6	98.0	99.9	81.9	89.1
DriveVLA-W0	ICLR'26[30]	98.7	99.1	95.3	99.3	83.3	90.2
RAP	ICLR'26[5]	99.1	98.9	96.7	100.0	90.3	93.8
TransFuser	TPAMI'22[52]	97.7	92.8	92.8	100.0	79.2	84.0
DiffusionDrive	CVPR'25[53]	98.2	96.2	94.7	100.0	82.2	88.1
GoalFlow	CVPR'25[54]	98.4	98.3	94.6	100.0	85.0	90.3
DrivingGPT	ICCV'25[31]	98.9	90.7	94.9	95.6	79.7	82.4
UniAD	CVPR'23[6]	97.8	91.9	92.9	100.0	78.8	83.4
VAD-v2	ICLR'26[8]	98.1	94.8	94.3	100.0	80.6	86.2
ReCogDrive	ICLR'26[55]	97.9	97.3	94.9	100.0	87.3	90.8
DrivoR	CVPR'26[13]	98.9	98.3	96.2	100.0	89.1	93.7
NTR	Ours	99.1	98.8	96.9	100.0	90.8	94.1

Table 3: Performance on navtest split with NavSim v2 extended metrics. Bold indicates best.

Method	Reference	NC $\uparrow$	DAC $\uparrow$	DDC $\uparrow$	TL $\uparrow$	EP $\uparrow$	TTC $\uparrow$	LK $\uparrow$	HC $\uparrow$	EC $\uparrow$	EPDMS $\uparrow$
Ego-MLP	CVPR'24[56]	93.1	77.9	92.7	99.6	86.0	91.5	89.4	98.3	85.4	64.0
TransFuser	TPAMI'22[52]	96.9	89.9	97.8	99.7	87.1	95.4	92.7	98.3	87.2	76.7
ARTEMIS	RAL'26[57]	98.3	95.1	98.6	99.8	81.5	97.4	96.5	98.3	98.3	83.1
Hydra-MDP++	arXiv'25[58]	98.4	98.0	99.4	99.8	87.5	97.7	95.3	98.3	77.4	85.1
DriveSuprim	AAAI'25[59]	97.8	97.9	99.5	99.9	90.6	97.1	96.6	98.3	77.9	86.0
DiffusionDriveV2	arXiv'25[60]	97.7	96.6	99.2	99.8	88.9	97.2	96.0	97.8	91.0	87.5
SparseDriveV2	ICLR'26[11]	98.1	98.1	99.6	99.8	91.1	97.3	96.9	98.2	78.4	90.1
NTR	Ours	99.4	99.0	99.7	99.7	88.3	98.9	95.5	98.0	76.9	90.9

standard navtrain split without extra simulated data, NTR achieves 94.1 PDMS and 90.9 EPDMS, providing complementary evidence under a closed-loop planning metric.

Qualitative Results. Fig. 3 provides qualitative planning examples on Waymo E2E. We compare the final selected trajectories of the planning-only baseline and NTR under different driving scenarios. In these examples, NTR produces trajectories that are more consistent with the visible road structure and nearby traffic context. These results provide qualitative evidence for the planning improvement observed in Table 1.

Ablation. Table 4 isolates the contributions of latent reconstruction, EMA teacher targets, and semantic prior target selection. Adding masked latent reconstruction with random targets already improves the baseline, indicating that reconstruction provides useful dense supervision for the scene-token bottleneck beyond trajectory and score losses. Using an EMA teacher further improves RFS from 7.754 to 7.817, suggesting that adaptive but stop-gradient latent targets are more effective than a frozen target encoder. Semantic prior target selection brings additional gains when combined with both frozen and EMA targets, showing that the location of reconstruction targets also matters. The full NTR model combines EMA teacher targets with semantic prior allocation and achieves the best performance, improving RFS from 7.652 to 7.974 and reducing ADE@5s from 2.565 to 2.146.



Figure 3: Qualitative examples on different driving scenarios.

Table 4: Core ablation of NTR on the validation split of Waymo E2E Dataset.

Method	Latent Recon.	Target Encoder	Recon. Target Selection	RFS $\uparrow$	ADE@5s $\downarrow$	ADE@3s $\downarrow$
Baseline	None	None	None	7.652	2.565	1.170
Frozen target + Random	✓	Frozen	Random	7.754	2.255	1.024
Frozen target + Semantic Prior	✓	Frozen	Semantic Prior	7.781	2.279	1.019
EMA target + Random	✓	EMA	Random	7.817	2.153	0.967
NTR	✓	EMA	Semantic Prior	7.974	2.146	0.949

Token Diagnostics. We use two token-wise diagnostics to analyze the compact scene token memory: pairwise cosine similarity and effective rank. Pairwise cosine similarity measures redundancy among scene token embeddings, while effective rank measures the effective dimensionality of the token feature matrix. As shown in Table 5, NTR improves RFS across all token budgets. At the same token budget, NTR consistently reduces token similarity and increases effective rank compared with the planning-only baseline. These results suggest that NTR makes the compact scene token memory less redundant and better utilized.

Additional Analyses. Additional qualitative results, failure case analysis, real-world deployment details, data scaling experiments and efficiency analysis are provided in the appendix.

Table 5: Scene-token budget diagnostics.

Method	#Tokens	RFS $\uparrow$	Eff. Rank $\uparrow$	Sim. $\downarrow$
Base.	1	7.567	—	—
	4	7.663	1.144	0.951
	8	7.671	1.307	0.918
	16	7.652	2.080	0.953
	32	7.768	2.133	0.850
NTR	1	7.579	—	—
	4	7.741	1.281	0.292
	8	7.856	2.568	0.563
	16	7.974	3.380	0.407
	32	8.053	2.352	0.461

5 Conclusion and Limitations

We presented Neural Token Reconstruction (NTR), a training framework that improves perception-free end-to-end planning from a representation learning perspective. NTR directly supervises the scene-token bottleneck through masked latent reconstruction, encouraging compact scene tokens to retain richer and less redundant visual information before trajectory generation and scoring. Experiments on Waymo E2E and NavSim show that this training-time supervision improves planning performance while keeping the inference-time planner unchanged. **Limitations:** NTR focuses on supervising the many-to-few compression from dense patch tokens to compact scene tokens, rather than improving the visual backbone itself. Backbone-level masked modeling methods such as MAE [26, 27], iBOT [29], or JEPA [21, 22] are therefore complementary to NTR, as they improve dense patch features before compression but do not directly constrain what information survives in the scene-token memory. A broader comparison with alternative backbone pretraining objectives and token-level regularizers is left for future work. NTR also relies on foundation-model annotations for semantic-prior allocation, whose quality may vary across domains and rare scenarios. Finally, NTR introduces additional preprocessing and training cost, although the deployed planner remains unchanged.

References

- [1] M. Bojarski, D. D. Testa, D. Dworakowski, B. Firner, B. Flepp, P. Goyal, L. D. Jackel, M. Monfort, U. Muller, J. Zhang, X. Zhang, J. Zhao, and K. Zieba. End to end learning for self-driving cars, 2016. URL <https://arxiv.org/abs/1604.07316>.
- [2] F. Codevilla, E. Santana, A. Lopez, and A. Gaidon. Exploring the limitations of behavior cloning for autonomous driving. In *2019 IEEE/CVF International Conference on Computer Vision (ICCV)*, pages 9328–9337, 2019. doi:10.1109/ICCV.2019.00942.
- [3] L. Wang, Z. Yang, C. Bai, G. Zhang, X. Liu, X. Zheng, X.-X. Long, C.-T. Lu, and C. Lu. Drive-jepa: Video jepa meets multimodal trajectory distillation for end-to-end driving, 2026. URL <https://arxiv.org/abs/2601.22032>.
- [4] K. Guo, H. Liu, X. Wu, J. Pan, and C. Lv. ipad: Iterative proposal-centric end-to-end autonomous driving, 2025. URL <https://arxiv.org/abs/2505.15111>.
- [5] L. Feng, Y. Gao, E. Zablocki, Q. Li, W. Li, S. Liu, M. Cord, and A. Alahi. RAP: 3d rasterization augmented end-to-end planning. In *The Fourteenth International Conference on Learning Representations*, 2026. URL <https://openreview.net/forum?id=a9b0geqbdB>.
- [6] Y. Hu, J. Yang, L. Chen, K. Li, C. Sima, X. Zhu, S. Chai, S. Du, T. Lin, W. Wang, L. Lu, X. Jia, Q. Liu, J. Dai, Y. Qiao, and H. Li. Planning-oriented autonomous driving. In *2023 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 17853–17862, 2023. doi:10.1109/CVPR52729.2023.01712.
- [7] B. Jiang, S. Chen, Q. Xu, B. Liao, J. Chen, H. Zhou, Q. Zhang, W. Liu, C. Huang, and X. Wang. Vad: Vectorized scene representation for efficient autonomous driving. In *2023 IEEE/CVF International Conference on Computer Vision (ICCV)*, pages 8306–8316, Los Alamitos, CA, USA, Oct 2023. IEEE Computer Society. doi:10.1109/ICCV51070.2023.00766. URL <https://doi.ieeecomputersociety.org/10.1109/ICCV51070.2023.00766>.
- [8] B. Jiang, S. Chen, H. Gao, B. Liao, Q. Zhang, W. Liu, and X. Wang. VADv2: End-to-end vectorized autonomous driving via probabilistic planning. In *The Fourteenth International Conference on Learning Representations*, 2026. URL <https://openreview.net/forum?id=0a4dA6eUHN>.
- [9] Y. Li, Y. Wang, Y. Liu, J. He, L. Fan, and Z. Zhang. End-to-end driving with online trajectory evaluation via bev world model. In *Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV)*, pages 27137–27146, October 2025.
- [10] W. Sun, X. Lin, Y. Shi, C. Zhang, H. Wu, and S. Zheng. Sparsedrive: End-to-end autonomous driving via sparse scene representation. In *2025 IEEE International Conference on Robotics and Automation (ICRA)*, pages 8795–8801, 2025. doi:10.1109/ICRA55743.2025.11128800.
- [11] W. Sun, X. Lin, K. Chen, Z. Pei, X. Li, Y. Shi, and S. Zheng. SparseDriveV2: Scoring is all you need for end-to-end autonomous driving. *arXiv preprint arXiv:2603.29163*, 2026.
- [12] Y. Li, D. Yuan, H. Zhang, Y. Yang, and X. Luo. End to end autonomous driving via occupancy and motion flow. In *2024 IEEE International Conference on Real-time Computing and Robotics (RCAR)*, pages 360–365, 2024. doi:10.1109/RCAR61438.2024.10670964.
- [13] E. Kirby, A. Boulch, Y. Xu, Y. Yin, G. Puy, E. Zablocki, A. Bursuc, S. Gidaris, R. Marlet, F. Bartoccioni, A.-Q. Cao, N. Samet, T.-H. VU, and M. Cord. Driving on registers. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 32058–32069, June 2026.
- [14] S. Ang, Y. Yang, C. Chen, and Y. Wang. CLOVER: Closed-loop value estimation and ranking for end-to-end autonomous driving planning. *arXiv preprint arXiv:2605.15120*, 2026.

- [15] Q. Yu, M. Weber, X. Deng, X. Shen, D. Cremers, and L.-C. Chen. An image is worth 32 tokens for reconstruction and generation. In *The Thirty-eighth Annual Conference on Neural Information Processing Systems*, 2024. URL <https://openreview.net/forum?id=t0XoQPRzPL>.
- [16] R. Bachmann, J. Allardice, D. Mizrahi, E. Fini, O. F. Kar, E. Amirloo, A. El-Nouby, A. Zamir, and A. Dehghan. Flextok: Resampling images into 1d token sequences of flexible length. In *Forty-second International Conference on Machine Learning*, 2025. URL <https://openreview.net/forum?id=Dgd0kUUBzf>.
- [17] A. Marouani, O. Siméoni, H. Jegou, P. Bojanowski, and H. V. Vo. Revisiting [CLS] and patch token interaction in vision transformers. In *The Fourteenth International Conference on Learning Representations*, 2026. URL <https://openreview.net/forum?id=xs9xwFphLy>.
- [18] C. Shi, Y. Yu, and S. Yang. Vision transformers need more than registers. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 26328–26337, June 2026.
- [19] M. Oquab, T. Darcet, T. Moutakanni, H. V. Vo, M. Szafraniec, V. Khalidov, P. Fernandez, D. HAZIZA, F. Massa, A. El-Nouby, M. Assran, N. Ballas, W. Galuba, R. Howes, P.-Y. Huang, S.-W. Li, I. Misra, M. Rabbat, V. Sharma, G. Synnaeve, H. Xu, H. Jegou, J. Mairal, P. Labatut, A. Joulin, and P. Bojanowski. DINOv2: Learning robust visual features without supervision. *Transactions on Machine Learning Research*, 2024. ISSN 2835-8856. URL <https://openreview.net/forum?id=a68SUt6zFt>. Featured Certification.
- [20] O. Siméoni, H. V. Vo, M. Seitzer, F. Baldassarre, M. Oquab, C. Jose, V. Khalidov, M. Szafraniec, S. E. Yi, M. Ramamonjisoa, F. Massa, D. HAZIZA, L. Wehrstedt, J. Wang, T. Darcet, T. Moutakanni, L. Sentana, C. Roberts, A. Vedaldi, J. Tolán, J. Brandt, C. Couprie, J. Mairal, H. Jegou, P. Labatut, and P. Bojanowski. DINOv3. *Transactions on Machine Learning Research*, 2026. ISSN 2835-8856. URL <https://openreview.net/forum?id=2NlGyqNjns>. Featured Certification.
- [21] M. Assran, Q. Duval, I. Misra, P. Bojanowski, P. Vincent, M. Rabbat, Y. LeCun, and N. Ballas. Self-supervised learning from images with a joint-embedding predictive architecture. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 15619–15629, June 2023.
- [22] M. Assran, A. Bardes, D. Fan, Q. Garrido, R. Howes, M. Komeili, M. J. Muckley, A. Rizvi, C. Roberts, K. Sinha, A. Zholus, S. Arnaud, A. Gejji, A. Martin, F. R. Hogan, D. Dugas, P. Bojanowski, V. Khalidov, P. Labatut, F. Massa, M. Szafraniec, K. Krishnakumar, Y. Li, X. Ma, S. Chandar, F. Meier, Y. LeCun, M. Rabbat, and N. Ballas. V-jepa 2: Self-supervised video models enable understanding, prediction and planning. *CoRR*, abs/2506.09985, June 2025. URL <https://doi.org/10.48550/arXiv.2506.09985>.
- [23] M. K. Wozniak, L. Liu, Y. Cai, and P. Jensfelt. Prix: Learning to plan from raw pixels for end-to-end autonomous driving. *IEEE Robotics and Automation Letters*, 11:6400–6407, 2025.
- [24] K. Chitta, A. Prakash, B. Jaeger, Z. Yu, K. Renz, and A. Geiger. Transfuser: Imitation with transformer-based sensor fusion for autonomous driving. *IEEE transactions on pattern analysis and machine intelligence*, 45(11):12878–12895, 2022.
- [25] Z. Li, W. Wang, H. Li, E. Xie, C. Sima, T. Lu, Y. Qiao, and J. Dai. Bevformer: Learning bird’s-eye-view representation from multi-camera images via spatiotemporal transformers. In S. Avidan, G. Brostow, M. Cissé, G. M. Farinella, and T. Hassner, editors, *Computer Vision – ECCV 2022*, pages 1–18, Cham, 2022. Springer Nature Switzerland. ISBN 978-3-031-20077-9.
- [26] K. He, X. Chen, S. Xie, Y. Li, P. Dollár, and R. Girshick. Masked autoencoders are scalable vision learners. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 16000–16009, June 2022.

- [27] Z. Tong, Y. Song, J. Wang, and L. Wang. VideoMAE: Masked autoencoders are data-efficient learners for self-supervised video pre-training. In A. H. Oh, A. Agarwal, D. Belgrave, and K. Cho, editors, *Advances in Neural Information Processing Systems*, 2022. URL <https://openreview.net/forum?id=AhccnBXsne>.
- [28] A. Baevski, W.-N. Hsu, Q. Xu, A. Babu, J. Gu, and M. Auli. data2vec: A general framework for self-supervised learning in speech, vision and language. In K. Chaudhuri, S. Jegelka, L. Song, C. Szepesvari, G. Niu, and S. Sabato, editors, *Proceedings of the 39th International Conference on Machine Learning*, volume 162 of *Proceedings of Machine Learning Research*, pages 1298–1312. PMLR, 17–23 Jul 2022. URL <https://proceedings.mlr.press/v162/baevski22a.html>.
- [29] J. Zhou, C. Wei, H. Wang, W. Shen, C. Xie, A. Yuille, and T. Kong. Image BERT pre-training with online tokenizer. In *International Conference on Learning Representations*, 2022. URL <https://openreview.net/forum?id=ydopy-e6Dg>.
- [30] Y. Li, S. Shang, W. Liu, B. Zhan, H. Wang, Y. Wang, Y. Chen, X. Wang, AnYasong, C. Tang, L. Hou, L. Fan, and Z. Zhang. DriveVLA-w0: World models amplify data scaling law in autonomous driving. In *The Fourteenth International Conference on Learning Representations*, 2026. URL <https://openreview.net/forum?id=plrGn3RdzN>.
- [31] Y. Chen, Y. Wang, and Z. Zhang. Drivinggpt: Unifying driving world modeling and planning with multi-modal autoregressive transformers. In *Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV)*, pages 26890–26900, October 2025.
- [32] J. Wang, G. Li, Z. Huang, C. Dang, H. Ye, Y. Han, and L. Chen. Vggdrive: Empowering vision-language models with cross-view geometric grounding for autonomous driving. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 10954–10964, June 2026.
- [33] Z. Zhang, H. Li, Y. Dai, Z. Zhu, L. Zhou, C. Liu, D. Wang, F. E. H. Tay, S. Chen, Z. Liu, Y. Liu, X. Li, and P. Zhou. From spatial to actions: Grounding vision-language-action model in spatial foundation priors. In *The Fourteenth International Conference on Learning Representations*, 2026. URL <https://openreview.net/forum?id=fzmittHfq3>.
- [34] S. Zeng, X. Chang, M. Xie, X. Liu, Y. Bai, Z. Pan, M. Xu, and X. Wei. Futuresightdrive: Thinking visually with spatio-temporal cot for autonomous driving. In *The Thirty-ninth Annual Conference on Neural Information Processing Systems*, 2026. URL <https://openreview.net/forum?id=fCirUh6FRb>.
- [35] W. Song, Z. Zhou, H. Zhao, J. Chen, P. Ding, H. Yan, Y. Huang, F. Tang, D. Wang, and H. Li. Reconvla: Reconstructive vision-language-action model as effective robot perceiver. *CoRR*, abs/2508.10333, August 2025. URL <https://doi.org/10.48550/arXiv.2508.10333>.
- [36] N. Carion, L. Gustafson, Y.-T. Hu, S. Debnath, R. Hu, D. S. Coll-Vinent, C. Ryali, K. V. Alwala, H. Khedr, A. Huang, J. Lei, T. Ma, B. Guo, A. Kalla, M. Marks, J. Greer, M. Wang, P. Sun, R. Rädle, T. Afouras, E. Mavroudi, K. Xu, T.-H. Wu, Y. Zhou, L. Momeni, R. HAZRA, S. Ding, S. Vaze, F. Porcher, F. Li, S. Li, A. Kamath, H. K. Cheng, P. Dollar, N. Ravi, K. Saenko, P. Zhang, and C. Feichtenhofer. SAM 3: Segment anything with concepts. In *The Fourteenth International Conference on Learning Representations*, 2026. URL <https://openreview.net/forum?id=r35clVtGzw>.
- [37] E. J. Hu, yelong shen, P. Wallis, Z. Allen-Zhu, Y. Li, S. Wang, L. Wang, and W. Chen. LoRA: Low-rank adaptation of large language models. In *International Conference on Learning Representations*, 2022. URL <https://openreview.net/forum?id=nZeVKeeFYf9>.

- [38] R. Xu, H. Lin, W. Jeon, H. Feng, Y. Zou, L. Sun, J. Gorman, E. Tolstaya, S. Tang, B. White, B. Sapp, M. Tan, J.-J. Hwang, and D. Anguelov. Wod-e2e: Waymo open dataset for end-to-end driving in challenging long-tail scenarios, 2025. URL <https://arxiv.org/abs/2510.26125>.
- [39] D. Dauner, M. Hallgarten, T. Li, X. Weng, Z. Huang, Z. Yang, H. Li, I. Gilitschenski, B. Ivanovic, M. Pavone, A. Geiger, and K. Chitta. NAVSIM: Data-driven non-reactive autonomous vehicle simulation and benchmarking. In *The Thirty-eight Conference on Neural Information Processing Systems Datasets and Benchmarks Track*, 2024. URL <https://openreview.net/forum?id=FXTeJvHE0k>.
- [40] W. Cao, M. Hallgarten, T. Li, D. Dauner, X. Gu, C. Wang, Y. Miron, M. Aiello, H. Li, I. Gilitschenski, B. Ivanovic, M. Pavone, A. Geiger, and K. Chitta. Pseudo-simulation for autonomous driving. In *9th Annual Conference on Robot Learning*, 2025. URL <https://openreview.net/forum?id=9uKL9FJBiz>.
- [41] I. Loshchilov and F. Hutter. Decoupled weight decay regularization. In *International Conference on Learning Representations*, 2019. URL <https://openreview.net/forum?id=Bkg6RiCqY7>.
- [42] L. Rowe, R. de Schaetzen, R. Girgis, C. Pal, and L. Paull. Poutine: Vision-language-trajectory pre-training and reinforcement learning post-training enable robust end-to-end autonomous driving, 2025. URL <https://arxiv.org/abs/2506.11234>.
- [43] A. Jiang, Y. Gao, Y. Wang, Z. Sun, S. Wang, Y. Heng, H. Sun, S. Tang, L. Zhu, J. Chai, J. Wang, Z. Gu, H. Jiang, and L. Sun. Irl-vla: Training an vision-language-action policy via reward world model, 2025. URL <https://arxiv.org/abs/2508.06571>.
- [44] Z. Dong, Y. Zhu, Y. Wu, and Y. Sun. Frost-drive: Scalable and efficient end-to-end driving with a frozen vision encoder, 2026. URL <https://arxiv.org/abs/2601.03460>.
- [45] D. Wang, Y. Song, Z. He, K. Chen, X. Pan, L. Deng, and W. Gu. Hmvlm: Multistage reasoning-enhanced vision-language model for long-tailed driving scenarios, 2025. URL <https://arxiv.org/abs/2506.05883>.
- [46] Y. Ma, Y. Cao, W. Ding, S. Zhang, Y. Wang, B. Ivanovic, M. Jiang, M. Pavone, and C. Xiao. dvlm-ad: Enhance diffusion vision-language-model for driving via controllable reasoning, 2025. URL <https://arxiv.org/abs/2512.04459>.
- [47] Z. Zhou, T. Cai, S. Zhao, Y. Zhang, Z. Huang, B. Zhou, and J. Ma. Autovla: A vision-language-action model for end-to-end autonomous driving with adaptive reasoning and reinforcement fine-tuning. *Advances in Neural Information Processing Systems*, 38:27920–27956, 2026.
- [48] R. Xu, H. Lin, W. Jeon, H. Feng, Y. Zou, L. Sun, J. Gorman, E. Tolstaya, S. Tang, B. White, B. Sapp, M. Tan, J.-J. Hwang, and D. Anguelov. Wod-e2e: Waymo open dataset for end-to-end driving in challenging long-tail scenarios, 2025. URL <https://arxiv.org/abs/2510.26125>.
- [49] Z. Liu, R. Huang, R. Yang, S. Yan, Z. Wang, L. Hou, D. Lin, X. Bai, and H. Zhao. Drivepi: Spatial-aware 4d mllm for unified autonomous driving understanding, perception, prediction and planning, 2025. URL <https://arxiv.org/abs/2512.12799>.
- [50] S. Xing, C. Qian, Y. Wang, H. Hua, K. Tian, Y. Zhou, and Z. Tu. Openemma: Open-source multimodal model for end-to-end autonomous driving, 2025. URL <https://arxiv.org/abs/2412.15208>.
- [51] D. Dauner, M. Hallgarten, A. Geiger, and K. Chitta. Parting with misconceptions about learning-based vehicle motion planning. In *Conference on Robot Learning*, pages 1268–1281. PMLR, 2023.

- [52] K. Chitta, A. Prakash, B. Jaeger, Z. Yu, K. Renz, and A. Geiger. Transfuser: Imitation with transformer-based sensor fusion for autonomous driving. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 45(11):12878–12895, 2023. doi:[10.1109/TPAMI.2022.3200245](https://doi.org/10.1109/TPAMI.2022.3200245).
- [53] B. Liao, S. Chen, H. Yin, B. Jiang, C. Wang, S. Yan, X. Zhang, X. Li, Y. Zhang, Q. Zhang, and X. Wang. Diffusiondrive: Truncated diffusion model for end-to-end autonomous driving. In *Proceedings of the Computer Vision and Pattern Recognition Conference (CVPR)*, pages 12037–12047, June 2025.
- [54] Z. Xing, X. Zhang, Y. Hu, B. Jiang, T. He, Q. Zhang, X. Long, and W. Yin. Goalflow: Goal-driven flow matching for multimodal trajectories generation in end-to-end autonomous driving. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 1602–1611, June 2025.
- [55] Y. Li, K. Xiong, X. Guo, F. Li, S. Yan, G. Xu, L. Zhou, L. Chen, H. Sun, B. Wang, G. Chen, H. Ye, W. Liu, and X. Wang. ReCogDrive: A reinforced cognitive framework for end-to-end autonomous driving. In *International Conference on Learning Representations (ICLR)*, 2026.
- [56] Z. Li, Z. Yu, S. Lan, J. Li, J. Kautz, T. Lu, and J. M. Alvarez. Is ego status all you need for open-loop end-to-end autonomous driving? In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 14864–14873, June 2024.
- [57] R. Feng, N. Xi, D. Chu, R. Wang, Z. Deng, A. Wang, L. Lu, J. Wang, and Y. Huang. Artemis: Autoregressive end-to-end trajectory planning with mixture of experts for autonomous driving. *IEEE Robotics and Automation Letters*, 11(1):226–233, 2026. doi:[10.1109/LRA.2025.3632616](https://doi.org/10.1109/LRA.2025.3632616).
- [58] K. Li, Z. Li, S. Lan, Y. Xie, Z. Zhang, J. Liu, Z. Wu, Z. Yu, and J. M. Alvarez. Hydra-mdp++: Advancing end-to-end driving via expert-guided hydra-distillation, 2025. URL <https://arxiv.org/abs/2503.12820>.
- [59] W. Yao, Z. Li, S. Lan, Z. Wang, X. Sun, J. M. Alvarez, and Z. Wu. Drivesuprim: Towards precise trajectory selection for end-to-end planning. *Proceedings of the AAAI Conference on Artificial Intelligence*, 40:11910–11918, 03 2026. doi:[10.1609/aaai.v40i14.38178](https://doi.org/10.1609/aaai.v40i14.38178).
- [60] J. Zou, S. Chen, B. Liao, Z. Zheng, Y. Song, L. Zhang, Q. Zhang, W. Liu, and X. Wang. Diffusiondrivev2: Reinforcement learning-constrained truncated diffusion modeling in end-to-end autonomous driving, 2025. URL <https://arxiv.org/abs/2512.07745>.