

Generalized Intention Modeling in Multi-Agent Reinforcement Learning

Mateusz Odrowaz-Sypniewski Jasmine Bayrooti Ajay Shankar Amanda Prorok
 Department of Computer Science and Technology, University of Cambridge, UK
 {msao2, jgb52, as3233, asp45}@cst.cam.ac.uk

Abstract

Modeling an opponent’s intent is critical for effective decision-making in non-cooperative, competitive, and general-sum multi-agent reinforcement learning. Existing opponent modeling methods encode intent using an embedding derived from episode information chosen a priori, such as the opponent’s next action or a future environment state, and use this to guide the ego-agent’s behavior. These approaches assume that the chosen information is universally representative of intent; however, we show empirically that this is not the case as intentions are often task- and environment-dependent. To address this, we introduce a task-adaptive opponent modeling framework that learns a performance-driven mixture of multiple intent representations. We further introduce a new intention representation that maximizes mutual information with the ego-agent’s future returns, thereby capturing opponent information that is most directly relevant to performance. Our approach consistently matches or exceeds the performance of state-of-the-art baselines across diverse tasks and yields insights into when and why different opponent modeling strategies succeed.

1 Introduction

Optimal decision-making in multi-agent reinforcement learning (MARL) can be complicated by the absence of communication, partial observability, and the unknown intentions of other agents [Albrecht and Stone, 2018]. Understanding these intentions can significantly improve the task performance of an ego-agent operating in the shared environment [He et al., 2016]. For instance, the ability to forecast a predator’s future trajectory can aid a prey attempting to evade it; similarly, predicting future game states in chess can inform the winning strategy. Inspired by “theory of mind” [Premack and Woodruff, 1978], the concept that humans reason about the mental states of others to predict their future behavior, a widely adopted approach is to explicitly model the other agents [Albrecht and Stone, 2018]. Recent work in this space focuses on learning compact latent representations of opponents’ intentions within a deep RL framework [Papoudakis et al., 2021a, Yu et al., 2024, Fu et al., 2022, Zintgraf et al., 2021].

These representations are often trained to encode an aspect of the multi-agent episode, most commonly the opponents’ next actions [Grover et al., 2018, Zintgraf et al., 2021, Tacchetti et al., 2019] or a future state [Yu et al., 2024]. We refer to these aspects as *episode components*: distinct elements of a MARL episode comprising agent observations, actions, and rewards. Existing methods all implicitly assume a particular episode component (or some combination) to be the most informative and learn its representation *irrespective of the environment and task*. Doing so assumes that one fixed prior is invariably preferable to another, ignoring the broader question: how does the optimal representation of ‘intent’ depend on the task itself?

Central to our work, we posit that the optimal episode component to model is the one that best informs the ego-agent’s strategy and maximizes its performance, and is therefore dependent on

the environment, just as the strategy itself. Consider, as two motivating examples, the games of rock-paper-scissors and chess. In rock-paper-scissors, predicting the opponent’s next action is crucial, while modeling future environment states provides little additional benefit due to statelessness. On the other hand, in chess, while anticipating an opponent’s immediate move is certainly useful, strong play fundamentally requires reasoning about longer-term consequences and future board configurations. Modeling intent using the same episode component for both would likely be suboptimal; intuitively, the appropriate component should depend on the environment characteristics.

To tackle this issue, we propose an opponent modeling framework that optimizes the information-performance tradeoff by explicitly selecting the intention representation that maximizes ego-agent returns. We first propose an adaptive architecture that explicitly models environment-dependent weightings over several definitions of intent. Inspired by mixture-of-experts architectures [Shazeer et al., 2017, Jiang et al., 2024], we train separate modules that produce embeddings predictive of actions, observations, future states, and rewards, align them in a shared latent space, and combine them on-the-fly using a learned mixing module. This design allows the ego-agent to redefine its notion of intent based on the environment: the weighted combinations do not require explicit interpretations and can thus represent more expressive and malleable definitions without human biases.

Second, we introduce a method that explicitly models the ego-agent’s future rewards as a distinct episode component. We encode embeddings predictive of these rewards using a contrastive InfoNCE objective [van den Oord et al., 2019] to maximize the mutual information between the embeddings and the observed future rewards. This allows us to force the representation to discard noisy state details and retain only features that are directly relevant to the ego-agent’s value function.

We empirically demonstrate that our adaptive mixer architecture yields more robust and stable performance than approaches relying on any single episode component in isolation. Additionally, we establish that in some environments, modeling opponent intentions via future ego-agent rewards produces more informative representations than modeling future states or actions. These results hold on several multi-agent benchmarks commonly used in opponent modeling, including Level-Based Foraging [Christianos et al., 2020, Papoudakis et al., 2021b], a partially observable version of Predator-Prey [Lowe et al., 2017], Kuhn Poker [Kuhn, 1950], and a customized Google Research Football [Kurach et al., 2020] scenario with 6 opponents, demonstrating consistent improvements over state-of-the-art baselines. In summary, our main contributions are as follows:

1. We propose an adaptive opponent modeling architecture that combines multiple episode components via a mixing mechanism, allowing the model to prioritize the most informative components for a given environment.
2. We introduce reward-predictive intention embeddings for opponent modeling, enabling agents to capture the future impact of other agents on their own returns.
3. We demonstrate that the adaptive approach yields stronger and more stable performance than modeling any single episode component in isolation (as is standard in prior opponent modeling works), and provide post-hoc analyses showing how its preferences vary across diverse environments.
4. We provide new data-driven insights into the performance of different opponent modeling methods, how they generalize to previously unseen opponents, and how their effectiveness depends on the opponent policies themselves.

2 Related Work

Opponent Modeling in Deep RL. Early deep MARL opponent modeling relied on restrictive auxiliary assumptions. DRON [He et al., 2016] employs a mixture-of-experts to approximate Q-value functions representing different opponent strategies. However, it relies on explicit, hand-crafted features to model the opponents (limiting its scalability to complex environments) and is specific to the DQN algorithm [Mnih et al., 2013]. Self Other-Modeling (SOM) [Raileanu et al., 2018] and subsequent works [Wang et al., 2020, Huang et al., 2024] presume the agents always follow a specific goal from a fixed, predefined set of tasks, known as a goal library. This assumption reduces opponent modeling to simply inferring the opponent’s active task; however, such information is unavailable in many general environments. In contrast, our approach generalizes to arbitrary MARL environments without relying on such assumptions and remains agnostic to the underlying learning algorithm.

Learning Opponent Representations. A popular approach in opponent modeling is to model low-dimensional representations of opponent policies and use them to condition the policy of the ego-agent. Most works focus on training embeddings to be predictive of the opponents’ next actions [Grover et al., 2018, Tacchetti et al., 2019]. Rabinowitz et al. [2018] propose ToM-net, an algorithm that models two embeddings per agent: one representing the long-term character and the other capturing the current state of mind. MeLIBA [Zintgraf et al., 2021] implements this idea using a hierarchical VAE [Kingma and Welling, 2014, Zhao et al., 2017]. OMIS [Jing et al., 2024] uses a pre-trained transformer to predict opponent actions; instead of simply conditioning the policy on these predictions, it maintains a model of the environment and performs decision-time search, rolling out the episode in imagination.

All of the above methods share two key limitations: (i) they assume full access to the opponents’ trajectories during execution, and (ii) they assume that opponent actions are universally predictive of the opponents’ true intentions, regardless of the environment dynamics. LIAM [Papoudakis et al., 2021a] addresses (i) via a recurrent architecture that models opponent actions and observations under partial observability and only requires access to them during training. OMG [Yu et al., 2024] models embeddings predictive of future states, arguing that predicting only the immediate next action is short-sighted. Both of these approaches address limitation (ii) only partially; they recognize that modeling embeddings based only on opponent actions may be suboptimal, but they merely shift the problem by defining their own fixed intention representations.

We address both limitations by requiring opponent trajectories only during training, relying solely on local observations at execution, and dynamically adapting our intention representation to focus on the episode components most informative for the task at hand.

Single-Episode vs. Cross-Episode Modeling. The works discussed above assume that the ego-agent encounters a randomly sampled set of opponent policies in each episode. In contrast, cross-episode modeling assumes repeated interactions with a single, evolving opponent set.

Approaches in this latter category include opponent shaping methods [Foerster et al., 2018, Willi et al., 2022, Lu et al., 2022], where policy updates account for their impact on other agents’ learning. Other works explicitly model the opponent’s evolution: GSCU [Fu et al., 2022] maintains a belief over the opponent’s policy embedding conditioned on past episodes, while LILI [Xie et al., 2021] employs a static, episode-level embedding representing the opponent’s strategy in the next episode.

Our work belongs to the former, more general category: we aim for robustness against a wide population of opponents rather than exploiting the learning process of any single opponent over time.

Reward Prediction in Opponent Modeling. While prior work in opponent modeling has incorporated future reward prediction [Xie et al., 2021, Tacchetti et al., 2019, Jing et al., 2024], these approaches have not fully leveraged it for policy learning. For instance, Tacchetti et al. [2019] employ return prediction only for offline analysis, whereas OMIS [Jing et al., 2024] does not utilize its predictions to train the actor. Xie et al. [2021] predict rewards, but their opponent embeddings are modeled at the episode level, not the individual timestep level, and held constant throughout each episode. We propose conditioning the ego-agent on embeddings specifically predictive of the sum of future rewards across a horizon, and to train those embeddings we adopt a contrastive approach. While contrastive learning has been widely used in MARL [Liu et al., 2023, Lo et al., 2024, Papoudakis et al., 2021a], we uniquely utilize this objective to predict the ego-agent’s future rewards as a proxy for the opponent’s impact on the ego-agent.

3 Preliminaries

We consider N -agent Partially Observable Stochastic Games [Shapley, 1953], defined as tuples $\langle \mathcal{S}, \mathcal{A}, P, \{R^i\}_{i=1}^N, \gamma, \mathcal{O}, \{\Omega^i\}_{i=1}^N \rangle$. Here, $\mathcal{S}$ is the set of environment states, and $\mathcal{A} = \mathcal{A}^1 \times \mathcal{A}^2 \times \dots \times \mathcal{A}^N$ is the joint action space of all agents, with $\mathcal{A}^i$ denoting the action space of agent i . The environment state transition function $P(s' | s, a^1, \dots, a^N)$ specifies the probability distribution over the next state given the current state and agent actions. $R^i : \mathcal{S} \times \mathcal{A} \rightarrow \mathbb{R}$ is the reward function for agent i , and $\gamma \in [0, 1)$ is the discount factor. Agents do not have direct access to environment states; instead, $\mathcal{O} = \mathcal{O}^1 \times \dots \times \mathcal{O}^N$ represents the joint observation space. $\Omega^i(o^i | s', a^1, \dots, a^N)$ describes the probability distribution over observations available to agent i in the next timestep, given the next state and agent actions.

In line with previous work in opponent modeling, we assume control of a single agent, referred to as the *ego-agent*, and refer to all other agents as *opponents*. For ease of notation, we denote the ego-agent’s action, observation, and reward with the superscript 1 (e.g., a^1, o^1, r^1) and the joint action, observation, and reward of the opponents with the superscript -1 (e.g., a^{-1}, o^{-1}, r^{-1}). The policy of the ego-agent is denoted by $\pi^1(a^1 | o^1)$, and the joint policy of the opponents by $\pi^{-1}(a^{-1} | o^{-1}) = \prod_{j \neq 1} \pi^j(a^j | o^j)$. Following established practice [Grover et al., 2018, Tacchetti et al., 2019, Papoudakis et al., 2021a, Zintgraf et al., 2021, Yu et al., 2024], we assume the existence of fixed sets Π^{train} and Π^{test} (not necessarily disjoint) containing stationary opponent policies. During training and testing, the ego-agent competes against policies sampled from Π^{train} and Π^{test} , respectively. As such, the objective is to find the policy of the ego-agent π^1 that maximizes the expected cumulative discounted reward:

$$\underset{\pi^1}{\operatorname{argmax}} \mathbb{E}_{\substack{\pi^{-1} \sim \mathcal{U}(\Pi^{\text{train}}) \\ s_{t+1} \sim P(\cdot | s_t, a_t^1, a_t^{-1}) \\ a_t^1 \sim \pi^1(\cdot | o_t^1) \\ a_t^{-1} \sim \pi^{-1}(\cdot | o_t^{-1})}} \left[\sum_{t=0}^{\infty} \gamma^t R^1(s_t, a_t^1, a_t^{-1}) \right] \quad (1)$$

Additionally, our theoretical analysis uses $\mathcal{H}(\cdot)$ to denote Shannon entropy. For random variables X and Y , the mutual information is defined as $I(X; Y) = \mathcal{H}(X) - \mathcal{H}(X | Y)$, and similarly $I(X; Y | Z) = \mathcal{H}(X | Z) - \mathcal{H}(X | Y, Z)$. To learn representations informative of future variables, we adopt the standard InfoNCE contrastive objective [van den Oord et al., 2019]. Given a latent embedding c_t and a target variable x_{t+k} , the InfoNCE loss is defined as

$$\mathcal{L}_{\text{InfoNCE}} = -\mathbb{E} \left[\log \frac{\exp(f(x_{t+k}, c_t))}{\sum_{x_j \in \mathcal{X}} \exp(f(x_j, c_t))} \right], \quad (2)$$

where $f(\cdot, \cdot)$ is a similarity function and $\mathcal{X}$ contains one positive sample and multiple negative samples. Minimizing this objective was proven to maximize the lower bound on the mutual information between c_t and x_{t+k} [van den Oord et al., 2019].

4 Method

We propose Mixer of Intention eXperts (MIX), an adaptive opponent modeling architecture capable of adjusting which episode information regarding future opponent behavior is captured, depending on the task at hand. We begin by outlining the general MIX framework in Section 4.1, and describe the design choices and training objectives of its submodules in Section 4.2.

4.1 MIX Architecture

In line with previous work [Zintgraf et al., 2021, Papoudakis et al., 2021a], MIX models the latent space $\mathcal{Z}$ representative of opponent behavior. At each episode timestep t , it produces an embedding $z_t^{\text{MIX}} \in \mathcal{Z}$ which then conditions the policy of the ego-agent $\pi^1(\cdot | o_t^1, z_t^{\text{MIX}})$.

To derive z_t^{MIX} , we first employ a set of K specialized encoders $\{f^k\}_{k=1}^K$, each taking the ego-agent’s observation o_t^1 and previous action a_{t-1}^1 as input to output an embedding z_t^k predictive of a distinct episode component. We detail the exact implementation and training objectives of these encoders in Section 4.2. To curate the information in the embeddings and prioritize those that best capture the opponent’s intentions in the current environment, we propose aggregating and weighting them using a Mixture-Of-Experts (MoE) [Jacobs et al., 1991] module.

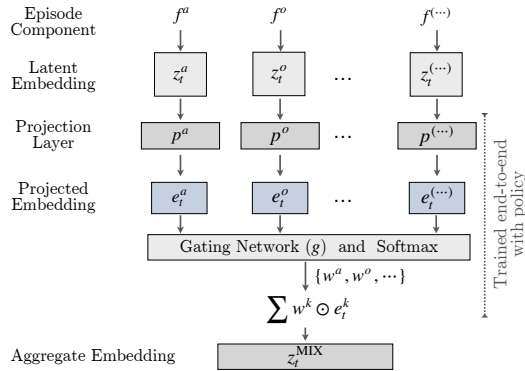


Figure 1: Overview of the MIX architecture. Encoders $\{f^k\}_{k=1}^K$ produce latent representations that are combined via a gating network into an adaptive opponent representation z_t^{MIX} .

While existing opponent modeling approaches typically rely on a fixed, limited subset of episode information, our use of multiple encoders allows the architecture to capture a variety of episode components informative of the opponent’s future behavior. However, correctly utilizing these multiple embeddings presents a challenge. A naïve aggregation strategy, such as simply concatenating the vectors as $[z_t^1, \dots, z_t^K]$, introduces redundant information and features that are not beneficial for policy learning. Moreover, concatenation does not scale well with the number of encoders, significantly increasing the actor input size.

The MoE module addresses these issues by dynamically weighting the input representations. It employs projection layers $\{p^k\}_{k=1}^K$ and a gating network g to map the embeddings from their respective spaces to an aligned, shared D -dimensional latent space. This produces “expert” outputs e_t^k , each capturing a distinct feature of the opponent’s behavior.

For each encoder $k \in \{1, \dots, K\}$, the projected embedding is obtained via:

$$e_t^k = \text{LayerNorm}(p^k(z_t^k)), \quad e_t^k \in \mathbb{R}^D. \quad (3)$$

The gating layer g processes the concatenated expert projections to generate normalized, feature-wise importance weights $w^k \in \mathbb{R}^D$ for each expert k . We formulate the weighting and the final aggregation as:

$$[w^1, \dots, w^K] = \text{softmax}(g([e_t^1, \dots, e_t^K])) \quad (4)$$

$$z_t^{\text{MIX}} = \sum_{k=1}^K w^k \odot e_t^k, \quad (5)$$

where the softmax operation is applied across the expert dimension. Crucially, the MoE module is trained end-to-end with the policy. This enables the gating mechanism to act as an information bottleneck, prioritizing representations that minimize policy gradient variance while reducing irrelevant auxiliary signals. The MIX architecture is depicted in Figure 1.

4.2 Episode Component Encoders

Fundamental to the definition of z^{MIX} are the embeddings produced by the encoders, which we detail in this section. Recent work on opponent modeling highlights three episode components useful for representing intent: opponent actions [Zintgraf et al., 2021], current opponent observations [Papoudakis et al., 2021a], and future environment states [Yu et al., 2024]. While these components have proven effective in specific environments, we argue that they are not universally sufficient across diverse tasks. Moreover, they overlook the ego-agent’s future rewards, maximizing of which is the primary MARL objective (1). We hypothesize that conditioning the policy on embeddings predictive of future rewards allows the agent to explicitly understand how opponent behavior impacts its own performance. Consequently, we introduce future rewards as a fourth episode component to model.

We model each of these four components using a dedicated encoder-decoder architecture. The recurrent encoders (f^a, f^o, f^s, f^r) take the ego-agent’s local observation o_t^1 and previous action a_{t-1}^1 as input and produce latent embeddings $(z_t^a, z_t^o, z_t^s, z_t^r)$ that capture information about opponent actions, opponent observations, future states, and future rewards, respectively. For each encoder, we implement a corresponding decoder (h^a, h^o, h^s, h^r) and train each pair jointly using a dedicated objective. The ground truth targets for these decoders rely on privileged global information or future trajectory data extracted from training rollouts. The decoders are discarded at test-time, a design that aligns with the Centralized Training Decentralized Execution (CTDE) paradigm [Oliehoek and Amato, 2016].

Action, Observation, and Future State Prediction. We train the encoder-decoder pairs (f^k, h^k) for actions, observations, and future states via MSE loss. For $k \in \{a, o, s\}$:

$$\mathcal{L}_k = \mathbb{E} [\|h^k(f^k(o_t^1, a_{t-1}^1)) - y^k\|^2] \quad (6)$$

where the target y^k is the opponent’s current action a_t^{-1} , the opponent’s current observation o_t^{-1} , and the future joint state $s_{t+n} \approx [o_{t+n}^1, o_{t+n}^{-1}]$ (where n is a hyperparameter), respectively.

Future Rewards Prediction. In addition to the episode components modeled by prior work, we also train an encoder to model embeddings predictive of future rewards. Since the relationship between

local observations o_t^1 and future rewards is inherently more complex than predicting immediate opponent features (e.g., opponent observations o_t^{-1}), we use the following contrastive InfoNCE objective to maximize the mutual information between future returns over a horizon H and the embedding $f^r(o_t^1, a_{t-1}^1)$:

$$\mathcal{L}_{\text{InfoNCE}} = -\mathbb{E} \left[\log \frac{\exp(h^r(f^r(o_t^1, a_{t-1}^1)) \cdot p^r(R_t^H)/T)}{\sum_{j \in \mathcal{B}} \exp(h^r(f^r(o_t^1, a_{t-1}^1)) \cdot p^r(R_j^H)/T)} \right] \quad (7)$$

where $R_t^H = \sum_{k=1}^H r_{t+k}^1$ represents the cumulative future return, $\mathcal{B}$ denotes the training batch, T is a temperature hyperparameter, and p^r is a layer that projects the scalar return into the latent dimension.

5 Theoretical Analysis

In this section, we provide formal justification for learning reward-predictive intention embeddings by maximizing mutual information with future returns. Specifically, we show that maximizing mutual information with future rewards minimizes an upper bound on value uncertainty.

Proposition 1. *Let $G_t = \sum_{k=0}^{\infty} \gamma^k r_{t+k+1}^1$ denote the infinite-horizon discounted return and z_t^r be an embedding encoding intent with respect to future rewards. Also define the sequence of future rewards up to horizon H as $r_{t+1:t+H}^1 = (r_{t+1}^1, \dots, r_{t+H}^1)$. Then,*

$$\mathcal{H}(G_t \mid o_t^1, z_t^r) \leq \mathcal{H}(r_{t+1:t+H}^1) - I(z_t^r; r_{t+1:t+H}^1) + C,$$

where C is independent of z_t^r and represents the residual tail uncertainty.

Proof. We decompose the return into a truncated component and a tail: $G_t = G_t^H + \gamma^H G_{t+H}$. By the sub-additivity of conditional entropy,

$$\mathcal{H}(G_t \mid o_t^1, z_t^r) \leq \mathcal{H}(G_t^H \mid o_t^1, z_t^r) + \mathcal{H}(\gamma^H G_{t+H} \mid o_t^1, z_t^r).$$

Let C denote the second term. For the first term, we observe that the truncated return G_t^H is a deterministic function of the reward sequence $r_{t+1:t+H}^1$. Since the entropy of a function of a random variable is upper-bounded by the entropy of the variable itself,

$$\mathcal{H}(G_t^H \mid o_t^1, z_t^r) \leq \mathcal{H}(r_{t+1:t+H}^1 \mid o_t^1, z_t^r).$$

Furthermore, since conditioning reduces entropy, we have $\mathcal{H}(r_{t+1:t+H}^1 \mid o_t^1, z_t^r) \leq \mathcal{H}(r_{t+1:t+H}^1 \mid z_t^r)$. Expanding this using the definition of mutual information yields:

$$\mathcal{H}(r_{t+1:t+H}^1 \mid z_t^r) = \mathcal{H}(r_{t+1:t+H}^1) - I(z_t^r; r_{t+1:t+H}^1).$$

Combining these inequalities completes the proof. $\square$

As a consequence of Proposition 1, maximizing mutual information between z_t^r and $r_{t+1:t+H}^1$ reduces an upper bound on value uncertainty. Since the truncated return R_t^H optimized in our practical objective (Section 4.2) is a deterministic function of the future reward sequence $r_{t+1:t+H}^1$, and $V^{\pi^1}(o_t^1, z_t^r) = \mathbb{E}[G_t \mid o_t^1, z_t^r]$, encouraging z_t^r to be informative about R_t^H directly supports stable value estimation.

6 Evaluations

We compare MIX against three state-of-the-art opponent modeling methods and a baseline with no explicit modeling in the following multi-agent environments (details in Appendix A):

- **KUHN POKER** [Kuhn, 1950]: Simplified, partially observable two-player poker. Each episode lasts for 100 steps (33–50 hands).
- **PARTIALLY OBSERVABLE PREDATOR-PREY (POPP)**: Modified version of Lowe et al. [2017], featuring partial observability for the ego-agent and a more complex reward structure [Böhmer et al., 2020]. This modified version is commonly used in opponent modeling [Fu et al., 2022, Papoudakis et al., 2021a].

- **LEVEL-BASED FORAGING (LBF)** [Christianos et al., 2020, Papoudakis et al., 2021b]: Mixed-motive, fully observable environment involving two agents collecting food in a grid-world. Agents must collaborate to collect food of a higher level than their own.
- **GOOGLE RESEARCH FOOTBALL (GRF)** [Kurach et al., 2020]: A modified “Run to score with keeper” scenario where the ego-agent faces six opponents: the keeper, two defenders between the agent and the goal, and three trailing defenders. Fully observable.

Baselines. We use the following methods that each model opponent intent in a different way:

- **LIAM** [Papoudakis et al., 2021a]: Uses an encoder-decoder architecture to model the next opponent action and current observation (a_t^{-1}, o_t^{-1}).
- **MELIBA** [Zintgraf et al., 2021]: Models two embeddings per opponent using a hierarchical VAE architecture, predictive of the opponents’ actions a_t^{-1} .
- **OMG** [Yu et al., 2024]: Represents opponent intent as a future state of the environment s_{t+k} modeled using a Conditional VAE.
- **NO OPPONENT MODELING (NOM)**: No explicit opponent modeling, equivalent to PPO.

We adapt MeLIBA and OMG to the partial observability of Kuhn Poker and POPP by restricting their inputs to local observations (details in Appendix E).

Evaluation Protocol. For all algorithms, we use PPO [Schulman et al., 2017] as the backbone for policy learning. Except for GRF, we evaluate performance in two settings: *seen*, where algorithms are evaluated against the set of opponents encountered during training ($\Pi^{\text{train}} = \Pi^{\text{test}}$); and *unseen*, testing generalization to novel opponents ($\Pi^{\text{train}} \cap \Pi^{\text{test}} = \emptyset$). Reported results are averaged over multiple random seeds, with shaded areas denoting one standard deviation.

In Kuhn Poker, opponents follow coded heuristics. For POPP and LBF, we pretrain opponents using MAPPO [Yu et al., 2022] to produce the train and test sets. Similar to Jing et al. [2024], we introduce an auxiliary diversity objective that discourages homogeneity in policies within these sets, and thus produces more challenging opponents. We evaluate three opponent settings: no explicit diversity, low, and high diversity (details in Appendix B). Finally, in GRF, we evaluate exclusively in the *seen* setting against the built-in AI at default difficulty.

6.1 Performance Against Baselines

Kuhn Poker: Figure 2 shows evaluations against seen (left) and unseen (right) opponents, averaged over 10 random seeds. In both settings, MIX and LIAM outperform the rest of the baselines. Given that the environment features very short-term dynamics (with a single hand lasting 2–3 timesteps), LIAM’s strong performance is expected, as it prioritizes immediate episode components such as next opponent actions and current observations. MIX is able to effectively adapt to focus on these short-term qualities.

POPP and LBF: Figure 3(left) shows algorithm performance against opponents seen during training. We see that MIX broadly outperforms all baselines, most significantly in POPP, and is matched only by OMG in the no- and low-diversity settings of LBF. Conversely, OMG achieves relatively poor performance in POPP, failing to match even the NOM baseline in the no-diversity setting; we attribute this to its reliance on future global state reconstruction, which degrades under partial observability. While LIAM performed well in Kuhn Poker, it seems to struggle in environments with a more complex reward structure. We note that increased opponent diversity generally makes the performance gap between algorithms more pronounced, highlighting the importance of accurate opponent modeling in settings with heterogeneous agent strategies.

The results with unseen opponents, shown in Figure 3(right), exhibit a similar pattern, albeit with higher noise. As expected, we observe a general decrease in performance across all algorithms due to the distribution shift between training and evaluation policies. Once again, MIX performs noticeably better than the baselines, outperformed only by OMG in no-diversity LBF. Notably, it is the only

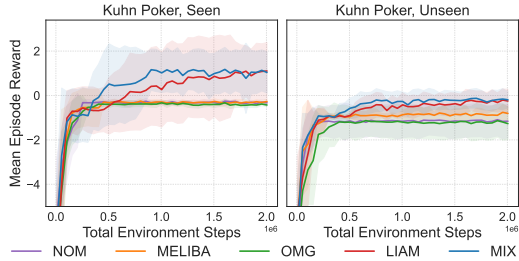


Figure 2: Kuhn Poker performance against *seen* (left) and *unseen* (right) opponents, averaged over 10 seeds.

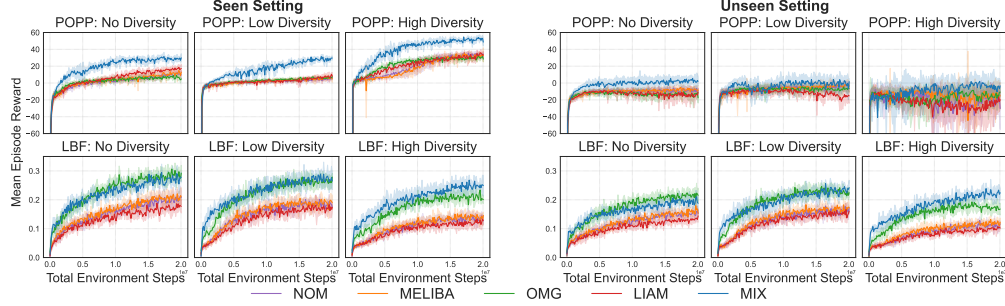


Figure 3: Comparisons against baseline methods in six environment configurations for *seen* (left) and *unseen* (right) opponent settings. MIX broadly matches or outperforms all baselines, and the improvement becomes most prominent for highly diverse opponent sets. Results averaged over 10 seeds for unseen POPP, and 5 for all others.


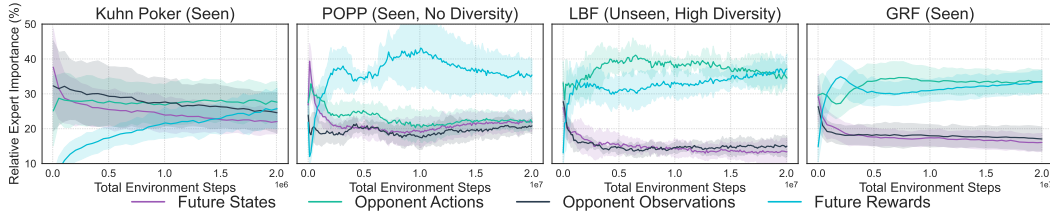


Figure 4: Relative expert importance, calculated as the magnitude of Gradient×Input attribution expressed as a percentage of the total. Expert influence dynamically adapts over the course of training and varies across environments. Results averaged over multiple random seeds (KP: 10, POPP/LBF: 5, GRF: 20).

algorithm whose performance does not catastrophically degrade in the POPP environment setting with high opponent diversity.

Scaling to GRF: In Figure 5, we evaluate MIX on GRF, an environment with more complex dynamics and six opponents, as well as substantially larger observation and action spaces (115 and 19 dimensions, respectively). We see that MIX noticeably outperforms all baselines, substantially improving episode rewards and sample efficiency. This evidences effective scaling performance and goes beyond simple environments typically tested in prior research.

Curiously, we also observe that in spite of full observability of this environment, OMG is not as competitive as it was in LBF (also fully observable). This suggests that the algorithm’s approach does not scale as effectively to environments with more complex, higher-dimensional dynamics.

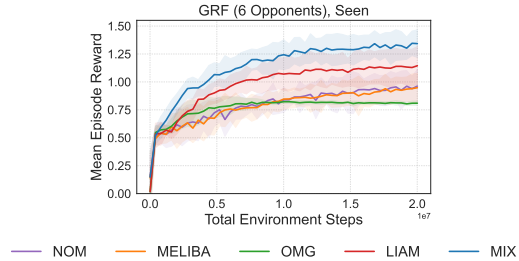

6.2 Evaluation of MIX Embeddings

To analyze the relative importance of each encoder in MIX to the final embedding, we apply the first-order Gradient×Input attribution method [Shrikumar et al., 2017]. Figure 4 shows

that all experts actively contribute, generally accounting for between 10% and 50% of the total magnitude. While attribution patterns are similar for some settings (e.g., LBF and GRF), they differ drastically for others (e.g., LBF vs. Kuhn Poker). In three of the four environments, our Future Rewards expert consistently ranks among the top two most important. In Kuhn Poker, since the objective is to infer the opponent’s hidden card, importance shifts toward the Opponent Observations and Future States experts. This variability in contributions highlights how MIX adapts to the needs

Figure 5: GRF performance against 6 built-in AI opponents. Results averaged over 20 random seeds.

of different tasks. Appendix C further shows that policies conditioned using MIX consistently match or outperform those conditioned on any of its individual experts. Collectively, these analyses validate our central hypothesis: that relying on any single episode component across different environments is suboptimal, necessitating an adaptive approach.

6.3 Ablations

We present additional ablation studies to establish two key architectural choices we employ in MIX. First, in Section 4.2, we proposed the InfoNCE objective over a simpler MSE loss to predict future rewards, hypothesizing that a contrastive objective is superior in capturing the intent encoded within rewards. To validate this choice, we train a baseline future rewards encoder-decoder using an MSE loss (all other settings unchanged). Figure 6(left) compares the performance of the backbone PPO policy when conditioned on embeddings from that encoder-decoder versus embeddings from our InfoNCE-trained Future Rewards encoder-decoder in a representative POPP environment. We observe that the MSE objective achieves poorer performance overall, and additionally exhibits greater instability, affirming our choice of a more informative objective.

Second, we wish to establish that MIX outperforms other baselines not merely due to the availability of multiple encoder embeddings, but rather through its dynamic information aggregation mechanism. To do so, we train two alternative versions of the architecture: MIX-CONCAT, which removes the gating mechanism entirely and instead naïvely concatenates all available embeddings, and MIX-TOP1, which replaces our feature-wise gating with a Top-K mechanism [Shazeer et al., 2017] with $K = 1$, defined as:

$$[w^1, \dots, w^K] = \text{softmax}(\text{TopK}([e_t^1, \dots, e_t^K] \cdot W_g)), \quad (8)$$

where W_g are gating weights. For $K = 1$, the TopK operator masks all logits other than the largest one with $-\infty$. This constraint forces the network to adaptively select a single embedding at each timestep rather than learning a soft mixture. Figure 6(right) shows the performance of these two against MIX on a sample LBF environment, where we observe a clear advantage of MIX’s soft MoE method.

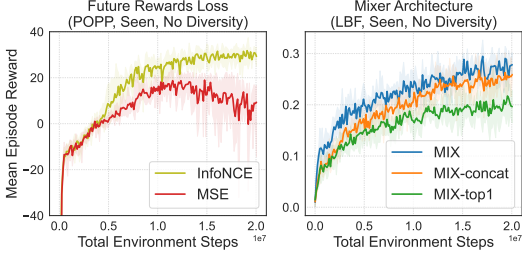


Figure 6: Ablation of Future Rewards modeling objective (POPP, left) and MIX architecture (LBF, right) in the seen setting with no explicit opponent diversity. Results averaged over 5 random seeds.

7 Conclusion and Limitations

Conclusion. In this work, we empirically demonstrate that the performance of baselines relying on a fixed representation of opponent intent depends heavily on the environment, highlighting that such an approach is suboptimal as the effectiveness of specific intention representations is highly task-dependent. We show that performance can instead be significantly improved by dynamically adapting the modeled episode information to the environment at hand. To this end, we introduce MIX, a framework capable of this dynamic adaptation based on the current setting. As a key component, we also introduce an encoder trained to model the ego-agent’s future rewards via mutual information maximization. We validate our architecture across several diverse multi-agent environments, demonstrating superior results and generalization to novel opponents not encountered during training.

Limitations and Future Work. One limitation of our work is our assumption that the ego-agent faces a randomly sampled set of opponent policies per interaction. While this was a conscious decision to prioritize robustness against a wide population of opponents, in future work we aim to apply our adaptive representations to cross-episode settings where opponents actively evolve between interactions. Furthermore, our framework assumes a single ego-agent maintaining an opponent model over all other agents jointly. Extending this to team-based settings, where multiple cooperative agents each maintain and potentially share adaptive representations of the opposing team, introduces new challenges around representation alignment that will be explored in future work.

Acknowledgements

This work is supported by European Research Council (ERC) Project 949940 (gAIA) and ARL DCIST CRA W911NF-17-2-0181. J. Bayrooti is supported by a DeepMind scholarship and the Cambridge Department of Computer Science and Technology. We gratefully acknowledge their support.

References

- Stefano V. Albrecht and Peter Stone. Autonomous agents modelling other agents: A comprehensive survey and open problems. *Artificial Intelligence*, 258:66–95, 2018.
- Matteo Bettini, Ryan Kortvelesy, Jan Blumenkamp, and Amanda Prorok. VMAS: A vectorized multi-agent simulator for collective robot learning. *The 16th International Symposium on Distributed Autonomous Robotic Systems*, 2022.
- Wendelin Böhmer, Vitaly Kurin, and Shimon Whiteson. Deep coordination graphs. In *Proceedings of the 37th International Conference on Machine Learning*, 2020.
- Albert Bou, Matteo Bettini, Sebastian Dittert, Vikash Kumar, Shagun Sodhani, Xiaomeng Yang, Gianni De Fabritiis, and Vincent Moens. TorchRL: A data-driven decision-making library for pytorch, 2023.
- Filippos Christianos, Lukas Schäfer, and Stefano V Albrecht. Shared experience actor-critic for multi-agent reinforcement learning. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2020.
- Jakob Foerster, Richard Y. Chen, Maruan Al-Shedivat, Shimon Whiteson, Pieter Abbeel, and Igor Mordatch. Learning with opponent-learning awareness. In *Proceedings of the 17th International Conference on Autonomous Agents and MultiAgent Systems*, page 122–130, 2018.
- Haobo Fu, Ye Tian, Hongxiang Yu, Weiming Liu, Shuang Wu, Jiechao Xiong, Ying Wen, Kai Li, Junliang Xing, Qiang Fu, and Wei Yang. Greedy when Sure and Conservative when Uncertain about the Opponents. In *Proceedings of the 39th International Conference on Machine Learning*, pages 6829–6848, 2022.
- Aditya Grover, Maruan Al-Shedivat, Jayesh Gupta, Yuri Burda, and Harrison Edwards. Learning policy representations in multiagent systems. In *Proceedings of the 35th International Conference on Machine Learning*, volume 80, pages 1802–1811, 2018.
- He He, Jordan Boyd-Graber, Kevin Kwok, and Hal Daumé, III. Opponent modeling in deep reinforcement learning. In *Proceedings of The 33rd International Conference on Machine Learning*, volume 48, pages 1804–1813, 2016.
- Sepp Hochreiter and Jürgen Schmidhuber. Long short-term memory. *Neural Comput.*, 9(8): 1735–1780, 1997.
- Yizhe Huang, Anji Liu, Fanqi Kong, Yaodong Yang, Song-Chun Zhu, and Xue Feng. Efficient adaptation in mixed-motive environments via hierarchical opponent modeling and planning. In *Proceedings of the 41st International Conference on Machine Learning*, 2024.
- Robert A. Jacobs, Michael I. Jordan, Steven J. Nowlan, and Geoffrey E. Hinton. Adaptive mixtures of local experts. *Neural Computation*, 3(1):79–87, 1991.
- Albert Q. Jiang, Alexandre Sablayrolles, Antoine Roux, Arthur Mensch, Blanche Savary, Chris Bamford, Devendra Singh Chaplot, Diego de las Casas, Emma Bou Hanna, Florian Bressand, Gianna Lengyel, Guillaume Bour, Guillaume Lample, Léo Renard Lavaud, Lucile Saulnier, Marie-Anne Lachaux, Pierre Stock, Sandeep Subramanian, Sophia Yang, Szymon Antoniak, Teven Le Scao, Théophile Gervet, Thibaut Lavril, Thomas Wang, Timothée Lacroix, and William El Sayed. Mixtral of experts, 2024.
- Yuheng Jing, Bingyun Liu, Kai Li, Yifan Zang, Haobo Fu, Qiang Fu, Junliang Xing, and Jian Cheng. Opponent modeling with in-context search. In *Proceedings of the 38th International Conference on Neural Information Processing Systems*, 2024.

- Yuheng Jing, Kai Li, Bingyun Liu, Haobo Fu, Qiang Fu, Junliang Xing, and Jian Cheng. An open-ended learning framework for opponent modeling. In *Proceedings of the Thirty-Ninth AAAI Conference on Artificial Intelligence and Thirty-Seventh Conference on Innovative Applications of Artificial Intelligence and Fifteenth Symposium on Educational Advances in Artificial Intelligence*, 2025.
- Diederik P. Kingma and Max Welling. Auto-encoding variational bayes. In *Proceedings of the 2nd International Conference on Learning Representations (ICLR)*, 2014.
- H. W. Kuhn. A simplified two-person poker. In *Contributions to the Theory of Games, Volume I*, Annals of Mathematics Studies, pages 97–103. Princeton University Press, 1950.
- Karol Kurach, Anton Raichuk, Piotr Stańczyk, Michał Zajac, Olivier Bachem, Lasse Espeholt, Carlos Riquelme, Damien Vincent, Marcin Michalski, Olivier Bousquet, and Sylvain Gelly. Google research football: A novel reinforcement learning environment, 2020.
- Marc Lanctot, Edward Lockhart, Jean-Baptiste Lespiau, Vinicius Zambaldi, Satyaki Upadhyay, Julien Pérolat, Sriram Srinivasan, Finbarr Timbers, Karl Tuyls, Shayegan Omidshafiei, Daniel Hennes, Dustin Morrill, Paul Muller, Timo Ewalds, Ryan Faulkner, János Kramár, Bart De Vylder, Brennan Saeta, James Bradbury, David Ding, Sebastian Borgeaud, Matthew Lai, Julian Schrittwieser, Thomas Anthony, Edward Hughes, Ivo Danihelka, and Jonah Ryan-Davis. OpenSpiel: A framework for reinforcement learning in games. *CoRR*, abs/1908.09453, 2019.
- Shunyu Liu, Yihe Zhou, Jie Song, Tongya Zheng, Kaixuan Chen, Tongtian Zhu, Zunlei Feng, and Mingli Song. Contrastive identity-aware learning for multi-agent value decomposition. In *Proceedings of the Thirty-Seventh AAAI Conference on Artificial Intelligence and Thirty-Fifth Conference on Innovative Applications of Artificial Intelligence and Thirteenth Symposium on Educational Advances in Artificial Intelligence*, 2023.
- Yat Long Lo, Biswa Sengupta, Jakob Nicolaus Foerster, and Michael Noukhovitch. Learning multi-agent communication with contrastive learning. In *The Twelfth International Conference on Learning Representations*, 2024.
- Ryan Lowe, Yi Wu, Aviv Tamar, Jean Harb, Pieter Abbeel, and Igor Mordatch. Multi-agent actor-critic for mixed cooperative-competitive environments. In *Proceedings of the 31st International Conference on Neural Information Processing Systems*, page 6382–6393, 2017.
- Christopher Lu, Timon Willi, Christian A Schroeder De Witt, and Jakob Foerster. Model-free opponent shaping. In *Proceedings of the 39th International Conference on Machine Learning*, volume 162, pages 14398–14411, 2022.
- Volodymyr Mnih, Koray Kavukcuoglu, David Silver, Alex Graves, Ioannis Antonoglou, Daan Wierstra, and Martin Riedmiller. Playing atari with deep reinforcement learning, 2013.
- Frans A. Oliehoek and Christopher Amato. *A Concise Introduction to Decentralized POMDPs*. Springer Publishing Company, Incorporated, 1st edition, 2016.
- Georgios Papoudakis, Filippos Christianos, and Stefano Albrecht. Agent Modelling under Partial Observability for Deep Reinforcement Learning. In *Advances in Neural Information Processing Systems*, volume 34, pages 19210–19222, 2021a.
- Georgios Papoudakis, Filippos Christianos, Lukas Schäfer, and Stefano V. Albrecht. Benchmarking multi-agent deep reinforcement learning algorithms in cooperative tasks. In *Proceedings of the Neural Information Processing Systems Track on Datasets and Benchmarks (NeurIPS)*, 2021b.
- David Premack and Guy Woodruff. Does the chimpanzee have a theory of mind? *Behavioral and Brain Sciences*, 1(4):515–526, 1978.
- Neil Rabinowitz, Frank Perbet, Francis Song, Chiyuan Zhang, S. M. Ali Eslami, and Matthew Botvinick. Machine Theory of Mind. In *Proceedings of the 35th International Conference on Machine Learning*, volume 80, pages 4218–4227, 2018.

- Roberta Raileanu, Emily Denton, Arthur Szlam, and Rob Fergus. Modeling Others using Oneself in Multi-Agent Reinforcement Learning. In *Proceedings of the 35th International Conference on Machine Learning*, volume 80, pages 4257–4266, 2018.
- John Schulman, Filip Wolski, Prafulla Dhariwal, Alec Radford, and Oleg Klimov. Proximal policy optimization algorithms, 2017.
- L. S. Shapley. Stochastic games. *Proceedings of the National Academy of Sciences*, 39(10):1095–1100, 1953.
- Noam Shazeer, Azalia Mirhoseini, Krzysztof Maziarz, Andy Davis, Quoc Le, Geoffrey Hinton, and Jeff Dean. Outrageously large neural networks: The sparsely-gated mixture-of-experts layer. In *International Conference on Learning Representations*, 2017.
- Avanti Shrikumar, Peyton Greenside, Anna Shcherbina, and Anshul Kundaje. Not just a black box: Learning important features through propagating activation differences, 2017.
- Finnegan Southey, Bret Hoehn, and Robert C. Holte. Effective short-term opponent exploitation in simplified poker. *Mach. Learn.*, 74(2):159–189, 2009.
- Andrea Tacchetti, H. Francis Song, Pedro A. M. Mediano, Vinicius Zambaldi, János Kramár, Neil C. Rabinowitz, Thore Graepel, Matthew Botvinick, and Peter W. Battaglia. Relational forward models for multi-agent learning. In *International Conference on Learning Representations*, 2019.
- Aaron van den Oord, Yazhe Li, and Oriol Vinyals. Representation learning with contrastive predictive coding, 2019.
- Rose E. Wang, Sarah A. Wu, James A. Evans, Joshua B. Tenenbaum, David C. Parkes, and Max Kleiman-Weiner. Too many cooks: Coordinating multi-agent collaboration through inverse planning. In *Proceedings of the 19th International Conference on Autonomous Agents and MultiAgent Systems*, page 2032–2034, 2020.
- Timon Willi, Alistair Hp Letcher, Johannes Treutlein, and Jakob Foerster. COLA: Consistent Learning with Opponent-Learning Awareness. In *Proceedings of the 39th International Conference on Machine Learning*, pages 23804–23831, 2022.
- Annie Xie, Dylan Losey, Ryan Tolsma, Chelsea Finn, and Dorsa Sadigh. Learning latent representations to influence multi-agent interaction. In *Proceedings of the 2020 Conference on Robot Learning*, volume 155, pages 575–588, 2021.
- Chao Yu, Akash Velu, Eugene Vinitsky, Jiaxuan Gao, Yu Wang, Alexandre Bayen, and Yi Wu. The surprising effectiveness of ppo in cooperative multi-agent games. In *Proceedings of the 36th International Conference on Neural Information Processing Systems*, 2022.
- Xiaopeng Yu, Jiechuan Jiang, and Zongqing Lu. Opponent modeling based on subgoal inference. In *Proceedings of the 38th International Conference on Neural Information Processing Systems*, 2024.
- Rui Zhao, Jinming Song, Yufeng Yuan, Haifeng Hu, Yang Gao, Yi Wu, Zhongqian Sun, and Wei Yang. Maximum entropy population-based training for zero-shot human-ai coordination. In *Proceedings of the Thirty-Seventh AAAI Conference on Artificial Intelligence and Thirty-Fifth Conference on Innovative Applications of Artificial Intelligence and Thirteenth Symposium on Educational Advances in Artificial Intelligence*, 2023.
- Shengjia Zhao, Jiaming Song, and Stefano Ermon. Learning hierarchical features from deep generative models. In *Proceedings of the 34th International Conference on Machine Learning - Volume 70*, page 4091–4099, 2017.
- Luisa Zintgraf, Sam Devlin, Kamil Ciosek, Shimon Whiteson, and Katja Hofmann. Deep interactive bayesian reinforcement learning via meta-learning. In *Proceedings of the 20th International Conference on Autonomous Agents and MultiAgent Systems*, page 1712–1714, 2021.

A Environment Implementation Details

All environments use discrete action spaces. For Kuhn Poker, we train for 2 million steps, evaluating every 50 thousand steps over 10,000 episodes. For POPP, LBF, and GRF, we train for 20 million environment steps, evaluating over 200 episodes every 120 thousand steps (POPP and LBF) or 400 thousand steps (GRF).

A.1 Kuhn Poker

We adapt the open-source Kuhn Poker implementation of OpenSpiel¹ [Lanctot et al., 2019].

Kuhn Poker features two players, $P1$ and $P2$. Each hand begins with the players receiving a private card from a set of three possible cards. The players take turns sequentially to either check/fold or bet/call in a single betting round, which results in five possible action sequences per hand:

- Check, Check
- Check, Bet, Fold
- Check, Bet, Call
- Bet, Fold
- Bet, Call

At the end of a hand, the winner receives a reward of +2 if both players have chosen to bet (or call), and +1 otherwise. If a player folds, the non-folding player wins; otherwise, the player with the higher card wins. The other player receives the corresponding negative reward. In our setting, the ego-agent is always player $P1$, and the opponent $P2$.

The observation space in the original implementation consists of the player index (one-hot), the private card (one-hot), and the hand history (with each turn one-hot encoded).

To allow for learning opponent strategies over time, we modify the original implementation to play multiple hands in one episode, with a single episode lasting 100 steps (between 33 and 50 hands). We also modify the observation space such that when a new hand begins, the agents can observe their opponent’s card from the previous hand.

A.2 Partially Observable Predator-Prey

We adopt the specific environment configuration provided by the open-source LIAM implementation² [Papoudakis et al., 2021a].

The environment comprises one prey agent, three predator agents, and two randomly placed large obstacles. The prey operates under partial observability; it can only observe the relative positions of predators and obstacles if they are within a specific range (0.5). The predators maintain full observability of the prey’s relative position and velocity, as well as the positions of other predators.

The prey’s reward structure is defined as follows:

- Positive reward (+1): If the prey collides with *exactly one* predator in a timestep.
- Negative reward (-1): If the prey collides with *multiple* predators in a timestep.

The prey is also penalized for going out of bounds. Similarly, the predators receive a positive reward only if *multiple* predators collide with the prey simultaneously; otherwise, they receive a negative reward. Episodes last for 100 steps. A rendering of the environment is depicted in Figure 7a.


A.3 Level-Based Foraging

We use the open-source Level-Based Foraging environment implementation³ [Christianos et al., 2020, Papoudakis et al., 2021b].


¹https://github.com/google-deepmind/open_spiel, Apache-2.0 License

²<https://github.com/uo-agents/LIAM>, MIT License

³<https://github.com/semitable/lb-foraging>, MIT License

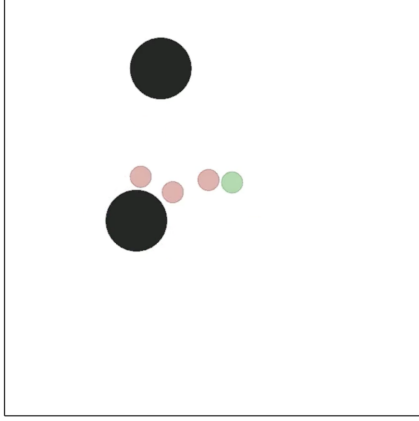

(a) Rendering of the Partially Observable Predator-Prey environment. The prey agent (green) aims to collide with exactly one predator (red), but must learn to avoid being captured by multiple predators at once. The black circles represent obstacles.

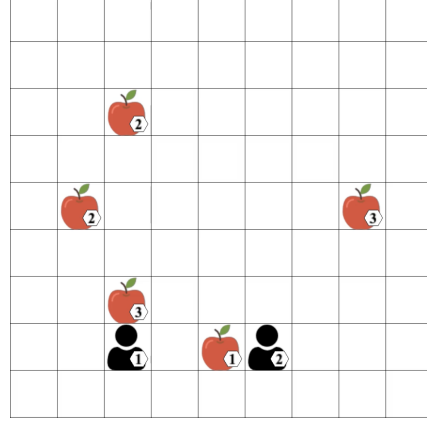

(b) Rendering of the Level-Based Foraging environment. Two agents compete to collect food items (apples) but must collaborate to collect food with a level higher than their own.

Figure 7: Renderings of the POPP and LBF environments.

The environment features two players in a 9×9 grid, competing to collect 5 randomly placed food items, with full observability. Both agents and food items are assigned a random level; agents can collect food of a lower level individually but must collaborate to collect food of a higher level than their own. Episodes last for a maximum of 50 timesteps, terminating early if all food is collected. The reward for successfully collecting a food item is calculated as $\frac{\text{food level}}{\text{sum of all food levels}}$, split equally among the agents participating in the collection.

A rendering of the environment is presented in Figure 7b.

A.4 Google Research Football

We use the open-source GRF implementation⁴ [Kurach et al., 2020].

We evaluate on a slightly modified version of the “Run to Score with Keeper” scenario. In the original, the ego-agent starts with the ball and aims to score against a keeper while being chased by five defenders from behind. To increase complexity for the ego-agent, we move two of those defenders to start between the ego-agent and the goal; this is the only structural modification. We utilize both checkpoint and scoring rewards: the ego-agent receives a ± 1 reward for scoring or being scored against, and an additional 0.1 reward each time the ball is first possessed in one of 10 designated sections on the opponent’s side of the field. This yields a maximum total reward of 2.0 per episode. The episode lasts for 200 steps, terminating early if a goal is scored or if the ego-agent loses possession of the ball. A rendering of the original “Run to Score with Keeper” scenario and our modified version is depicted in Figure 8.

B Opponent Policies

In our implementation of Kuhn Poker, the opponent always plays as the second player ($P2$). Viable $P2$ strategies can be parameterized by two variables, η and ξ , which govern the probability of betting at two specific decision points (facing a pass with a Jack, and facing a bet with a Queen) [Southey et al., 2009]. The optimal strategy lies at $\eta = 1/3$ and $\xi = 1/3$, and for all other values, there exists a single winning strategy for player 1 ($P1$). Figure 9 depicts the partitioning of the $P2$ strategy space into regions where strategies share the same winning $P1$ counter-strategy. In blue, we mark the six (η, ξ) configurations we selected for the training heuristic set, Π^{train} . For the unseen opponent

⁴<https://github.com/google-research/football>, Apache-2.0 License



Figure 8: (Left) Rendering of the unmodified “Run to Score with Keeper” scenario. (Right) Rendering of the modified scenario used for evaluation. For added complexity, two of the defenders now start between the ego-agent and the goal. In both scenarios, the ego-agent begins with possession of the ball, with the objective of scoring against the keeper while avoiding defenders.

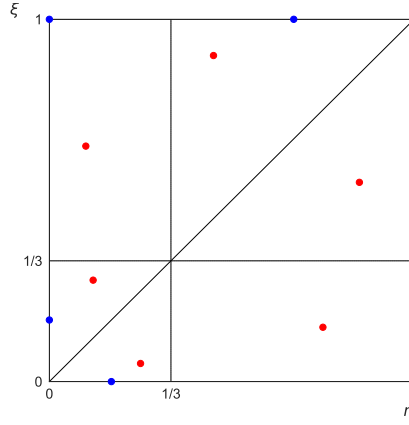


Figure 9: Visualization of the $P2$ strategy space in Kuhn Poker, with the x, y axes corresponding to η, ξ parameter values. We mark the Π^{train} heuristics as blue points, and the randomly sampled heuristics for the unseen setting as red points.

setting, we randomly sampled six more heuristics, one for each $P2$ strategy region; we mark those in red.

Opponent strategies in the POPP and LBF environments are pre-trained using the MAPPO algorithm [Yu et al., 2022] with no parameter sharing. Prior work has established that the diversity of the opponent policies encountered has a high impact on opponent modeling performance [Fu et al., 2022, Jing et al., 2024, 2025]. Therefore, as detailed in Section 6, we generate multiple sets of training and testing opponents per environment, each with a different level of diversity. Inspired by OMIS [Jing et al., 2024], we adapt the Maximum Entropy Population-Based Training algorithm [Zhao et al., 2023]. We modify the original implementation⁵ to train opponents sequentially rather than in a round-robin fashion. This process maximizes an auxiliary objective: the divergence between the action distribution of the agent currently being trained and the population mean of the previously trained agents. We control the strength of this objective via a hyperparameter multiplier α . Specifically, for the low and high diversity settings, we use $\alpha = 0.0005$ and 0.001 in LBF, and $\alpha = 0.005$ and 0.01 in POPP, respectively.

Finally, opponents in GRF are controlled by the standard built-in AI with the default, medium difficulty ($\theta = 0.6$).

⁵https://github.com/ruizhaogit/maximum_entropy_population_based_training, MIT License

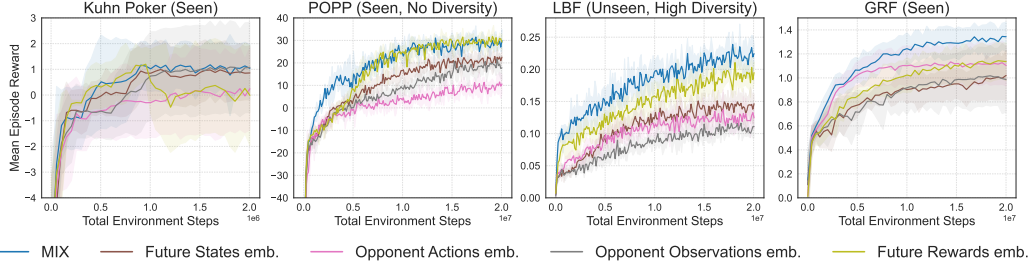


Figure 10: Comparing MIX against baselines that model individual expert embeddings in four environments. Results averaged over multiple random seeds (KP: 10, POPP/LBF: 5, GRF: 20).

C Comparison of Individual Expert Embeddings

Ideally, MIX should perform at least as well as a policy conditioned on any of its components. To validate this, we compare MIX against four new baselines where the backbone PPO policy is directly conditioned on a single raw embedding $z^k \in \{z^a, z^o, z^s, z^r\}$ without using the gating network.

Figure 10 presents this evaluation for representative configurations across the four environments. We observe that the effectiveness of individual baselines is highly environment-dependent. For example, Future Rewards dominates in POPP and LBF but struggles in Kuhn Poker, where Opponent Observations and Future States excel. Meanwhile, Opponent Actions generally performs poorly but proves highly competitive in GRF. Notably, MIX always at least matches the best individual expert in a given environment, and even significantly outperforms it in LBF and GRF. This further demonstrates that MIX effectively synthesizes information from multiple experts, achieving representational capabilities that no single expert can attain on its own.

D Computational Complexity Analysis

To further contextualize the performance of MIX, we provide a detailed computational complexity and runtime analysis. Metrics were evaluated on the POPP task using an Intel Xeon Platinum 8452Y CPU, with each run restricted to 4 CPU cores.

Table 1: Computational complexity and runtime analysis. Forward FLOPs and inference time measure the cost of a single environment step, while total training time measures the wall-clock time required to complete training.

Model	Forward FLOPs	Inference time	Total training time
NOM (No Intention)	49.3 M	1.83 ms	3.18 h
LIAM	53.4 M	2.73 ms	3.43 h
OMG	57.9 M	2.94 ms	8.49 h*
MeLIBA	51.8 M	3.36 ms	25.58 h [†]
MIX (Ours)	61.0 M	5.18 ms	4.32 h

*Includes the required pretraining phase. [†]Reflects the quadratic-complexity update pass discussed below.

As shown in Table 1, MIX introduces a modest increase in forward computation to enable its significant gains in representation capacity. Each of MIX’s four expert encoders is approximately the same size as the single encoder used in the opponent modeling baselines; consequently, MIX utilizes roughly $4\times$ more parameters for the opponent modeling component. While this naturally yields a higher overall parameter count and inference latency (5.18 ms), this overhead is negligible in absolute terms. An inference time of 5.18 ms supports an execution rate of nearly 200 FPS, falling well within standard real-time MARL latency budgets. Furthermore, the total footprint of MIX is 61.0 M FLOPs, a marginal increase over the baselines, as the bulk of the computational weight remains within the shared PPO backbone.

Furthermore, recent state-of-the-art baselines introduce severe training-time bottlenecks. Specifically, OMG requires a separate, costly pretraining phase, while MeLIBA relies on a quadratic-complexity update pass. By avoiding these structural bottlenecks, MIX fully trains in just 4.32 hours. This represents a massive improvement in training efficiency, saving over 4 hours compared to OMG and 21 hours compared to MeLIBA.

E Implementation Details

Table 2: Hyperparameters used for the POPP, LBF, GRF and Kuhn Poker environments.

Category	Hyperparameter	POPP	LBF	GRF	Kuhn Poker
<i>Environment & Training Loop</i>					
	Max Episode Steps	100	50	200	100
	# Opponents	3	1	6	1
	Total Iterations	3340	3340	2500	400
	Steps per Iteration	6000	6000	8000	5000
	Eval Frequency (iters)	20	20	50	10
	Eval Episodes	200	200	200	10,000
<i>PPO Algorithm</i>					
	Actor & Critic Layers	3	3	3	3
	Layer Hidden Dim	256	256	256	256
	Learning Rate	3×10^{-4}	3×10^{-4}	3×10^{-4}	1×10^{-4}
	Entropy Coeff	0.05	0.001	0.003	0.01
	Gamma (γ)	0.99	0.99	0.993	0.99
	Lambda (λ)	0.95	0.95	0.95	0.95
	Clip Epsilon (ϵ)	0.2	0.2	0.2	0.2
	Max Grad Norm	0.5	0.5	0.64	0.5
	Epochs	5	5	5	5
	Minibatch Size	10	10	5	10
<i>MIX</i>					
	Learning Rate	3×10^{-4}	3×10^{-4}	3×10^{-4}	5×10^{-4}
	Embedding Dim	20	20	32	8
	Layer Hidden Dim	128	128	128	128
	Minibatch Size	20	20	10	10
	Epochs	5	5	5	5
	Future Rewards Horizon	5	2	10	2
	Future Rewards T	0.2	0.2	0.2	0.2
	Future Rewards Decoder Dim	5	5	5	5
	Future States Horizon	2	1	1	1

We use the TorchRL [Bou et al., 2023] and VMAS [Bettini et al., 2022] frameworks to implement our experiments. We implement all algorithms with PPO [Schulman et al., 2017] as the backbone, initialized identically. For LIAM [Papoudakis et al., 2021a], we adopt the open-source implementation⁶, and for OMG [Yu et al., 2024], we follow the supplementary material provided by the authors⁷. As in their original work, we pretrain the VAE of OMG. In the partially observable environments Kuhn Poker and POPP, we ensure that the inputs to MeLIBA’s hierarchical VAE and OMG’s CVAE use only the ego-agent’s own local observation (since the pretrained VAE in OMG is only used during training, it models global information $s_t \approx [o_t^1, o_t^{-1}]$ even under partial observability). The intention embedding size and encoder hidden layer size are consistent across all opponent modeling methods, and we train all algorithms for the same number of steps.

To generate embeddings, MIX encoders pass observation sequences through an LSTM layer [Hochreiter and Schmidhuber, 1997] followed by a linear layer with a ReLU activation. A final linear layer

⁶<https://github.com/uoae-agents/LIAM>, MIT License

⁷<https://openreview.net/forum?id=Lt6w00oZ8k>, CC BY 4.0 License

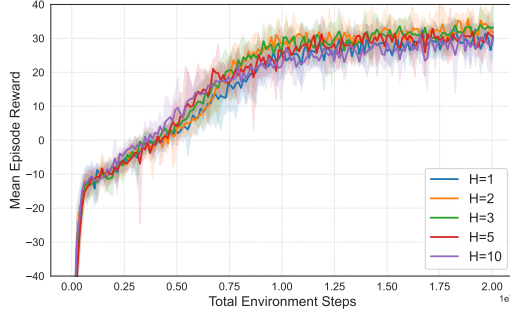


Figure 11: Performance comparison of the ego-agent policy conditioned on the Future Rewards embedding across different horizon lengths in the POPP environment (seen setting, no opponent diversity). Results averaged over 5 random seeds.

projects these activations to the output dimension. The corresponding decoder maps these embeddings back to the target space using a three-layer MLP with ReLU activations. The encoder and decoder are trained jointly using the Adam optimizer. Table 2 presents the hyperparameters used.

We lightly tune the future rewards model hyperparameters, such as the horizon, for each environment. We note that to further increase adaptivity, one could employ multiple future rewards encoders within the MIX architecture, each with a distinct horizon. Figure 11 presents the ablation results for different horizon lengths, showing that MIX is generally robust to this hyperparameter.

F Compute Resources

The development and evaluation of our method required approximately 6,500 CPU hours in total, broken down as follows:

- Exploration & Tuning: Preliminary experimentation and hyperparameter optimization required an estimated 500 CPU hours using Intel Xeon Platinum 8452Y processors.
- Final Evaluation: Executing the final reported experiments across all environments and random seeds consumed approximately 6,000 CPU hours on the same Intel Xeon Platinum 8452Y hardware, with standard individual runs restricted to 4 cores.