



GaussianDream++: Efficient 3D Gaussian World Modeling for Robotic Manipulation

Yuqing Jiang^{2,3,1,*}, Zijian Zhang^{2,3,1,*}, Weitao Zhou⁴, Jiawei Wang⁵, Junjie He⁶, Lei Yang⁷, Haifang Qing¹, Si Liu⁸, Ding Zhao⁹, Ping Luo¹⁰, Haibao Yu^{10,1,‡}

¹TuoJing Intelligence, ²University of Chinese Academy of Sciences, ³Institute of Automation, Chinese Academy of Sciences, ⁴Tsinghua University, ⁵University of Science and Technology of China, ⁶The Hong Kong University of Science and Technology (Guangzhou), ⁷Nanyang Technological University, ⁸Beihang University, ⁹Carnegie Mellon University, ¹⁰The University of Hong Kong

*equal contribution, ‡corresponding author

Vision-Language-Action (VLA) policies have advanced language-conditioned robotic manipulation, yet action-imitation objectives provide only weak supervision for metric 3D structure and short-horizon physical evolution. Geometry-enhanced policies mainly improve current-scene grounding, whereas predictive policies often model future dynamics in RGB or latent spaces and may incur substantial deployment cost. GaussianDream demonstrates that training-time current Gaussian reconstruction and future Gaussian prediction provide effective 3D supervision, but its dense VGGT/TGE-based prefix jointly carries state, dynamics, and action-conditioning information. We present **GaussianDream++**, a compact, policy-native extension that inserts **World State Tokens** and **World Prediction Tokens** directly into the VLA backbone. A training-only **World Representation Head** decodes these tokens into a Current World and coupled Future Prediction over shared Gaussian primitives, while static-dynamic factorization preserves persistent structure and focuses residual motion on interaction-relevant regions. At inference, the head, renderer, auxiliary objectives, and VGGT/TGE pathway are removed, leaving only 20 world tokens without online Gaussian decoding or rollout. GaussianDream++ achieves **98.6%** on LIBERO and **87.8%** on LIBERO-Plus, with clear gains under Camera and Layout shifts. Real-robot experiments further improve average success from 29.2% to 52.5% over reproduced $\pi_{0.5}$ while maintaining efficient closed-loop control.

Code: <https://github.com/TuoJingAI/GaussianDream>

Project Website: <https://tuojingai.github.io/GaussianDream-Series-project-page/>

1 Introduction

General-purpose robotic manipulation requires an embodied agent to interpret language goals and convert visual observations into precise physical actions. Recent Vision-Language-Action (VLA) policies have made substantial progress toward this goal by transferring semantic priors from large-scale vision-language pretraining to robot control (Brohan et al., 2023; Kim et al., 2024; Black et al., 2024; Physical Intelligence et al., 2025). Combined with large-scale robot demonstrations, these priors improve instruction following, object-level generalization, and continuous action generation. Nevertheless, successful manipulation also depends on metric 3D structure, object-relative geometry, and short-horizon physical evolution, all of which are only indirectly constrained by action labels.

Despite their strong semantic capabilities, current VLA paradigms still face three challenges in learning such physical structure. First, scene geometry, visibility, and contact-relevant spatial relationships are commonly encoded implicitly in 2D visual features, making policies sensitive to subtle errors in grasping and placement. Second, robot trajectories contain dense evidence of object layout, depth, appearance, and motion, whereas behavior cloning primarily supervises the target action and leaves much of this evidence unused. Third, current-state understanding and future evolution are often learned through either separate auxiliary objectives or a single entangled representation, even though short-horizon manipulation is dominated by persistent scene structure and comparatively sparse interaction-induced changes.

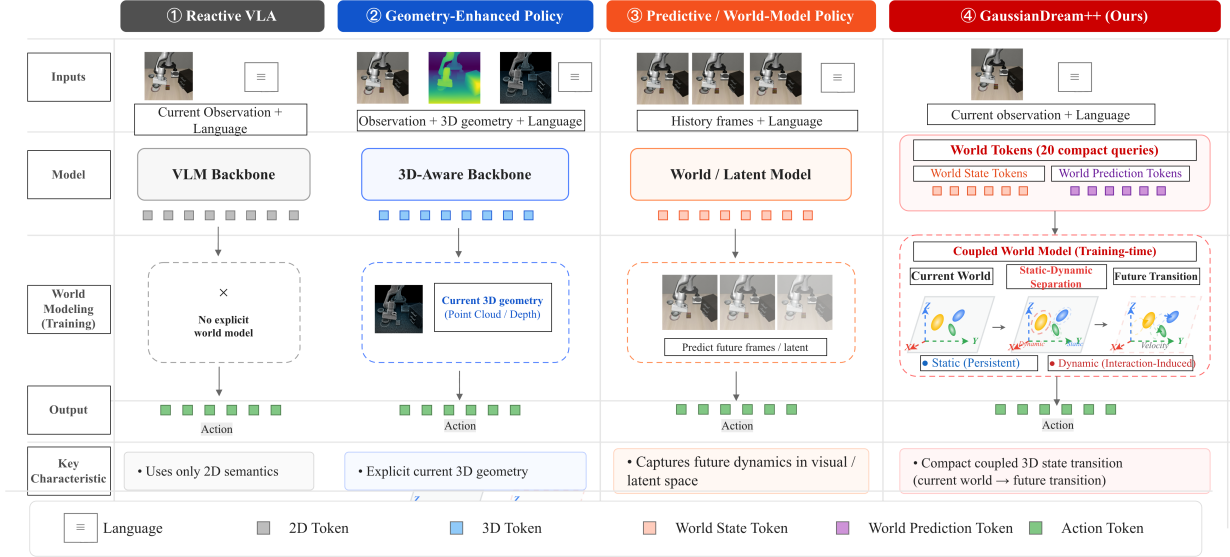


Figure 1 Comparison of robotic policy paradigms. Reactive VLAs map observations and language instructions directly to actions but rely mainly on implicit visual representations. Geometry-enhanced policies improve current-scene spatial grounding, whereas predictive and world-model policies introduce temporal supervision through future modeling. GaussianDream++ combines current-world reconstruction and future prediction within a compact, policy-native Gaussian representation, providing structured 3D supervision during training without requiring runtime world decoding or future rollout.

Recent approaches address parts of these challenges. Geometry-enhanced VLAs introduce depth, point clouds, calibrated camera cues, stereo observations, or pretrained 3D representations to strengthen spatial grounding (Zhen et al., 2024; Sun et al., 2025; Li et al., 2025a; Peng et al., 2026; Chen et al., 2026; Song et al., 2026). These methods improve current scene anchoring, but usually provide limited supervision for how the physical state evolves after interaction. Predictive policies and World-Action Models instead learn from future observations, trajectories, video generation, or latent dynamics (Cen et al., 2025; Bi et al., 2025; Kim et al., 2026; Ye et al., 2026b; Yuan et al., 2026). Although future modeling provides richer temporal supervision, visually plausible predictions in RGB or latent space do not necessarily encode metrically consistent physical transitions. Moreover, retaining large geometry encoders, generative models, or explicit future rollout can increase the cost of closed-loop control.

Predictive geometry provides a promising bridge between explicit spatial grounding and temporal modeling. GeoPredict introduces future kinematics and predictive 3D Gaussian geometry as training-time supervision (Qian et al., 2025). GaussianDream further shows that a learned Gaussian prefix can be decoded into current and future Gaussian states, turning ordinary robot trajectories into dense RGB, depth, and pseudo-3D scene-flow supervision (Zhang et al., 2026). Its asymmetric design removes the Gaussian decoding heads during deployment and retains only the learned prefix for action conditioning. This establishes an important principle: explicit 3D world modeling can improve a feed-forward VLA policy without operating as an online simulator.

GaussianDream nevertheless leaves room for a more compact and structured world representation. Its prefix is constructed from temporal observations through VGGT features, a Temporal Gaussian Evolution module, and a dense 32×32 query grid. Although the resulting representation effectively supports reconstruction, prediction, and action generation, online prefix construction still requires the dedicated temporal geometry pathway. Furthermore, the same 1024-token prefix jointly carries current geometry, future evolution, and action-conditioning information. GaussianDream already predicts future center displacements relative to a reconstructed Current Gaussian template; the remaining question is therefore not whether residual Gaussian prediction is useful, but whether current state and future change can be organized into a substantially smaller, role-structured representation that is native to the VLA policy. Explicitly separating persistent structure from interaction-induced motion may further reduce redundant temporal modeling and suppress spurious

changes in static regions.

To this end, we introduce **GaussianDream++**, a compact, policy-native upgrade of GaussianDream. GaussianDream++ replaces the dense external Gaussian prefix with two complementary token groups embedded directly in the PaliGemma backbone. **World State Tokens** represent the current physical scene, while **World Prediction Tokens** represent short-horizon evolution. These tokens are jointly processed with the original visual-language context and remain directly visible to the Action Expert through the native attention pathway. Consequently, the representation shaped by Gaussian world supervision is also the representation used for action generation, without an additional projection or action-conditioning module.

During training, a lightweight **World Representation Head** decodes the World State Tokens into a renderable Current World and combines them with the World Prediction Tokens to model horizon-dependent Future Prediction over the same Gaussian primitives. GaussianDream++ retains the primitive-aligned residual formulation of GaussianDream, but reorganizes it through explicit state/prediction roles and static-dynamic factorization. Persistent primitives inherit the Current World structure, while residual motion is concentrated on the robot, manipulated objects, and interaction regions. This coupled formulation preserves current-to-future correspondence and uses prediction capacity primarily for physically meaningful changes.

GaussianDream++ follows an asymmetric training-and-deployment strategy. Gaussian reconstruction, differentiable rendering, metric depth, visibility, and motion objectives provide dense physical supervision during learning. At deployment, the World Representation Head, Gaussian renderer, and all auxiliary supervision branches are removed, while the World State Tokens and World Prediction Tokens remain in the VLA backbone. The deployed policy therefore uses only 20 additional world tokens and requires neither the runtime VGGT/TGE pathway used by GaussianDream, nor online Gaussian decoding, rendering, or future rollout.

Experiments demonstrate that this compact formulation improves both manipulation performance and distribution-shift robustness. Under the matched GaussianDream-family protocol, GaussianDream++ achieves **98.6%** success on LIBERO and **87.8%** on LIBERO-Plus, outperforming GaussianDream by 0.8 percentage points overall. The gains are particularly evident under Camera and Layout shifts, where GaussianDream++ improves GaussianDream by 2.8 and 1.6 points, respectively. Real-robot experiments further improve average success from 29.2% to 52.5% over the reproduced $\pi_{0.5}$ baseline across precision-demanding and long-horizon manipulation tasks.

Our contributions are summarized as follows:

- **Compact policy-native Gaussian world modeling.** We introduce GaussianDream++, which replaces GaussianDream’s dense VGGT/TGE-based prefix with 20 World State and World Prediction Tokens embedded directly in the VLA backbone, allowing the Action Expert to use world-supervised representations through its native attention pathway.
- **Role-structured current and future representation.** World State Tokens reconstruct the Current World, while World Prediction Tokens represent short-horizon evolution over shared Gaussian primitives. Static-dynamic factorization preserves persistent scene structure and focuses residual prediction on interaction-induced changes.
- **Efficient asymmetric supervision and robust control.** Gaussian decoding and rendering are confined to training and removed at deployment, together with the dedicated runtime geometry pathway. Extensive simulation and real-robot evaluations demonstrate improved accuracy, robustness, and deployment efficiency over GaussianDream and the reproduced $\pi_{0.5}$ policy.

2 Related Work

2.1 Vision-Language-Action Policies and Geometric Grounding

Vision-Language-Action (VLA) policies adapt pretrained vision-language representations to robotic action generation, enabling language-conditioned manipulation across diverse tasks and environments. Representative systems including RT-2, OpenVLA, Octo, π_0 , and $\pi_{0.5}$ demonstrate the effectiveness of combining large-scale vision-language pretraining with robot demonstrations (Brohan et al., 2023; Kim et al., 2024; Octo Model

Team et al., 2024; Black et al., 2024; Physical Intelligence et al., 2025). Recent diffusion- and flow-matching-based formulations further improve continuous action generation and closed-loop control. Nevertheless, these policies are predominantly optimized through action imitation, leaving metric scene geometry only indirectly constrained by image features and action labels.

A growing body of work incorporates depth, stereo observations, point clouds, spatial encodings, 4D features, or pretrained 3D representations into VLA policies (Zhen et al., 2024; Sun et al., 2025; Li et al., 2025b; Deng et al., 2025; Zhou et al., 2025; Abouzeid et al., 2025). Spatial Forcing aligns intermediate policy features with representations from a pretrained spatial model (Li et al., 2025a), while G3VLA introduces calibrated geometric inductive biases without changing the original action formulation (Peng et al., 2026). PointACT studies how geometric features should interact with action representations (Chen et al., 2026), and VGA explores vision-geometry backbones for native spatial grounding (Song et al., 2026). These methods establish the importance of explicit 3D structure for precise manipulation, but primarily constrain the representation of the current scene.

2.2 Predictive Policies and World Models

Predictive policies and World-Action Models introduce future observations, trajectories, video representations, or latent dynamics as additional supervision beyond one-step behavior cloning (Cen et al., 2025; Bi et al., 2025; Kim et al., 2026; Ye et al., 2026b; Li et al., 2026). By exposing the policy to scene evolution, these methods provide useful temporal priors for action learning and planning. However, future states are commonly modeled in RGB or video-latent spaces, where visual coherence does not necessarily imply metrically consistent physical change, particularly under contact, occlusion, and precise object placement.

Maintaining a large generative model or explicit future rollout during deployment can also increase inference cost. Fast-WAM shows that predictive co-training can improve action learning without test-time future imagination (Yuan et al., 2026), motivating asymmetric designs that use rich predictive objectives during training while keeping deployment lightweight. SwiftVLA incorporates spatio-temporal geometry and future-trajectory supervision (Ni et al., 2025); LaMP uses 3D scene flow as a latent motion prior (Wang et al., 2026); and GeoPredict combines future kinematics with predictive 3D Gaussian geometry (Qian et al., 2025). These approaches demonstrate the value of structured future supervision, while leaving open how current geometry and future evolution should be represented compactly inside an efficient VLA policy.

2.3 Gaussian World Modeling for Robot Learning

3D Gaussian Splatting represents a scene with explicit primitives carrying position, scale, rotation, opacity, and appearance, while supporting efficient differentiable rendering (Kerbl et al., 2023). This primitive-based formulation provides a natural interface for associating geometry, visibility, appearance, and motion with corresponding physical scene elements. Gaussian representations have subsequently been applied to robotic reconstruction and manipulation. ManiGaussian introduces dynamic Gaussian representations for multi-task robot control, while GWM studies scalable Gaussian world models for robotic manipulation (Lu et al., 2024, 2025).

The closest predecessor to our work is GaussianDream (Zhang et al., 2026). It constructs a GaussianDream prefix from temporal geometric features and uses training-only reconstruction and prediction heads to produce current and future Gaussian states. RGB, depth, and pseudo-3D scene-flow objectives convert robot trajectories into dense spatio-temporal supervision, while the auxiliary Gaussian heads are removed at deployment. Its future branch already predicts horizon-conditioned center displacements over the reconstructed current Gaussian template.

GaussianDream++ retains this training-time supervision principle but revisits the construction and organization of the policy representation. Rather than relying on a dedicated dense temporal-geometry prefix, it embeds a compact, role-structured world representation directly in the VLA backbone. The technical realization of this policy-native representation and its current/future supervision is described in Sec. 3.

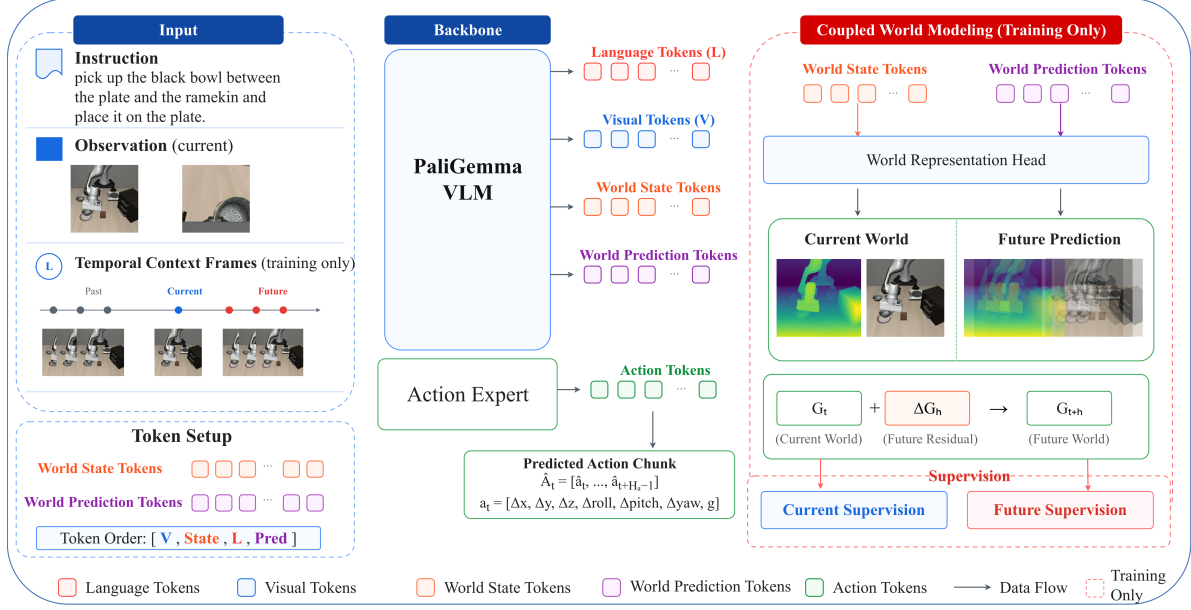


Figure 2 Overview of GaussianDream++. World State Tokens and World Prediction Tokens are inserted directly into the PaliGemma prefix and contextualized with visual and language tokens. The resulting representation directly conditions the Action Expert. During training, a lightweight World Representation Head decodes the same token representations into the Current World and coupled Future Prediction for dense Gaussian supervision. Future observations are used only to construct supervision targets and never enter the policy forward pass. At deployment, the World Representation Head, Gaussian renderer, and all auxiliary supervision branches are removed, while the world tokens remain in the policy.

3 Method

3.1 Overview

GaussianDream++ retains the training-time Gaussian supervision principle of GaussianDream (Zhang et al., 2026), but moves the supervised world representation from a dedicated temporal geometry pathway into the native VLA backbone. As shown in Fig. 2, the current multi-view observation and language instruction are processed by PaliGemma together with two groups of learnable tokens: **World State Tokens**, which represent the current physical scene, and **World Prediction Tokens**, which represent its short-horizon evolution. Their contextualized hidden states form part of the same multimodal prefix accessed by the flow-matching Action Expert.

The same token representations are decoded during training by a lightweight **World Representation Head**. The state representation is constrained through Current World reconstruction, whereas the prediction representation is constrained through Future Prediction over the same Gaussian primitives. This auxiliary decoding path converts robot trajectories into dense supervision for geometry, appearance, visibility, and motion. It does not provide additional policy inputs: future observations are used exclusively as supervision targets, and neither rendered images nor explicit Gaussian primitives are consumed by the Action Expert.

The training and deployment paths are asymmetric. After training, the World Representation Head, Gaussian renderer, target-construction modules, and auxiliary objectives are discarded. World State Tokens and World Prediction Tokens remain in the PaliGemma prefix and continue to condition action generation through the native VLA pathway. GaussianDream++ therefore retains structured current-and-future world supervision without online Gaussian decoding, rendering, future rollout, or the dedicated runtime VGGT/TGE prefix-construction path used by GaussianDream.

3.2 Policy-Native World Representation

Let o_t denote the current multi-view observation, ℓ the language instruction, and r_t the robot state. The policy predicts an action chunk $A_t = [a_t, \dots, a_{t+H_a-1}]$. GaussianDream++ augments the multimodal prefix with two learnable token sets,

$$Z^S \in \mathbb{R}^{N_s \times d}, \quad Z^P \in \mathbb{R}^{N_p \times d}, \quad (1)$$

where Z^S and Z^P denote World State Tokens and World Prediction Tokens, respectively. In the main configuration, we use $N_s = 16$ state tokens and $N_p = 4$ prediction tokens. The state tokens retain a 4×4 coarse spatial organization and receive calibrated spatial and ray embeddings, while the prediction tokens are associated with short-horizon prediction slots. These tokens are compact latent summaries rather than one-to-one Gaussian primitives.

PaliGemma jointly contextualizes the world tokens with the original visual and language tokens:

$$(H_t^{VL}, H_t^S, H_t^P) = F_\theta(o_t, \ell; Z^S, Z^P), \quad (2)$$

where H_t^{VL} denotes the contextualized visual-language representation, and H_t^S and H_t^P are the final hidden states of the World State Tokens and World Prediction Tokens.

The Action Expert directly conditions on the complete world-token-augmented prefix:

$$A_t = \pi_\phi(r_t; H_t^{VL}, H_t^S, H_t^P). \quad (3)$$

No additional world-to-action projector is introduced. Consequently, the representations constrained by Gaussian reconstruction and prediction are also directly available to action generation.

During training, the World Representation Head reads the same hidden states to produce explicit Gaussian supervision:

$$\left(G_t, \{\hat{G}_{t+h}\}_{h \in \mathcal{H}}\right) = W_\psi(H_t^S, H_t^P), \quad (4)$$

where G_t is the reconstructed Current World and $\hat{G}_{t+h}$ denotes the predicted Gaussian state at horizon h . The explicit worlds supervise the policy representation but are never fed back into the Action Expert. This separates the compact representation carried by the deployed policy from the dense Gaussian outputs used only for training.

Compared with the unified 1024-query GaussianDream prefix, GaussianDream++ uses only 20 role-specific tokens formed directly inside PaliGemma. The result is a substantially smaller world representation with explicit current-state and future-prediction roles, while the details of Current World reconstruction and coupled Future Prediction are introduced in the following subsections.

3.3 Current World Reconstruction

The World State Tokens are constrained to encode a spatially grounded representation of the current environment. Their contextualized hidden states H_t^S retain a coarse spatial organization and are expanded by the World Representation Head into a dense Gaussian feature field,

$$F_t^G = D_{\text{state}}(\text{Grid}(H_t^S)), \quad (5)$$

where D_{state} denotes the state-decoding branch of the World Representation Head. The compact World State Tokens therefore serve as latent summaries rather than being placed in one-to-one correspondence with Gaussian primitives.

Geometry–appearance decomposition. We decode geometry and appearance through separate prediction branches. The geometry branch predicts metric depth and non-appearance Gaussian attributes, while the appearance branch operates on stop-gradient geometry features with optional current-image feature fusion:

$$\begin{aligned} \bar{D}_t, \Theta_t^{\text{geo}}, F_t^{\text{geo}} &= H_{\text{geo}}(F_t^G), \\ \Theta_t^{\text{app}} &= H_{\text{app}}(\text{sg}[F_t^{\text{geo}}], f_t^{\text{img}}). \end{aligned} \quad (6)$$

Here, Θ_t^{geo} contains scale, rotation, and opacity, whereas Θ_t^{app} contains the spherical-harmonic appearance coefficients. Detaching the geometry features before appearance prediction prevents photometric shortcuts from altering the metric scene structure.

Gaussian centers are obtained by unprojecting the predicted metric depth using the calibrated camera parameters,

$$\{\mu_i^t\}_{i=1}^{N_G} = \mathcal{U}(\bar{D}_t; K_t, T_t), \quad (7)$$

where $\mathcal{U}$ denotes multi-view metric unprojection, and K_t and T_t are the camera intrinsics and extrinsics. The resulting Current World is

$$G_t = \{(\mu_i^t, s_i^t, q_i^t, \alpha_i^t, c_i^t)\}_{i=1}^{N_G}. \quad (8)$$

The Current World is rendered through differentiable Gaussian splatting,

$$(\hat{I}_t, \hat{D}_t, \hat{A}_t) = \mathcal{R}(G_t; K_t, T_t), \quad (9)$$

where $\hat{I}_t$, $\hat{D}_t$, and $\hat{A}_t$ denote rendered RGB, metric depth, and accumulated Gaussian coverage, respectively. We supervise the Current World with

$$\mathcal{L}_{\text{cur}} = \lambda_{\text{rgb}} \mathcal{L}_{\text{rgb}} + \lambda_{\text{depth}} \mathcal{L}_{\text{depth}} + \lambda_{\alpha} \mathcal{L}_{\alpha} + \lambda_{\text{reg}} \mathcal{L}_{\text{reg}}. \quad (10)$$

The RGB term combines photometric and structural similarity objectives, whereas depth and alpha losses are evaluated only over valid supervision regions. Missing depth is excluded rather than interpreted as transparent background. Current World reconstruction is not intended as a photorealistic reconstruction task; it provides explicit constraints on metric geometry, visibility, and object layout for the representations used by the Action Expert.

3.4 Coupled Future Prediction

Current World reconstruction anchors the policy representation to the scene at time t , but manipulation additionally requires short-horizon anticipation. Following the primitive-aligned formulation established by GaussianDream, GaussianDream++ preserves the reconstructed Current World as a shared template and predicts only horizon-dependent geometric changes. Its distinction lies in decoding these changes from the role-specific World Prediction Tokens rather than from a single dense prefix.

For a prediction horizon $h \in \mathcal{H}$, the corresponding World Prediction representation $H_{t,h}^P$ is combined with the Current World features and a learnable horizon embedding e_h :

$$\Delta\mu_i^h = H_{\Delta}(F_{t,i}^G, H_{t,h}^P, e_h). \quad (11)$$

When static-dynamic gating is enabled, the transition head additionally predicts a motion coefficient $m_i^h \in [0, 1]$; otherwise $m_i^h = 1$. The future center is composed as

$$\mu_i^{t+h} = \mu_i^t + m_i^h \Delta\mu_i^h. \quad (12)$$

Scale, rotation, opacity, and appearance are inherited from the Current World, yielding

$$G_{t+h} = \{(\mu_i^{t+h}, s_i^t, q_i^t, \alpha_i^t, c_i^t)\}_{i=1}^{N_G}. \quad (13)$$

This shared-primitive construction preserves current-to-future correspondence and allocates predictive capacity to geometric change rather than repeatedly regenerating persistent scene attributes. Static-consistency supervision further penalizes residual motion in regions identified as persistent by valid motion targets, reducing spurious drift in the background and stationary objects.

Each Future World is rendered using the camera parameters associated with its prediction horizon,

$$(\hat{I}_{t+h}, \hat{D}_{t+h}, \hat{A}_{t+h}) = \mathcal{R}(G_{t+h}; K_{t+h}, T_{t+h}). \quad (14)$$

Using horizon-specific calibration prevents changes in viewpoint from being absorbed into the predicted physical motion. Future supervision combines rendering, metric depth, three-dimensional motion, and static-consistency terms:

$$\mathcal{L}_{\text{fut}} = \sum_{h \in \mathcal{H}} w_h (\lambda_{\text{rgb}} \mathcal{L}_{\text{rgb}}^h + \lambda_{\text{depth}} \mathcal{L}_{\text{depth}}^h + \lambda_{\text{flow}} \mathcal{L}_{\text{flow}}^h + \lambda_{\text{stat}} \mathcal{L}_{\text{stat}}^h). \quad (15)$$

All terms are computed only for valid horizons and valid geometric correspondences. Future observations supply the targets in Eq. 15 but never enter the policy forward pass. Moreover, because World Prediction Tokens are conditioned on observations and task context rather than candidate actions, the model learns anticipated short-horizon evolution rather than counterfactual action-conditioned simulation.

3.5 World-Action Learning and Efficient Deployment

GaussianDream++ jointly optimizes action generation and Gaussian world supervision so that the policy-native World Tokens remain both physically structured and useful for control. Let $\mathcal{L}_{\text{act}}$ denote the original flow-matching action objective of the $\pi_{0.5}$ policy. The complete objective is

$$\mathcal{L} = \mathcal{L}_{\text{act}} + \lambda_{\text{cur}} \mathcal{L}_{\text{cur}} + \lambda_{\text{fut}} \mathcal{L}_{\text{fut}}. \quad (16)$$

The action loss aligns the world-token-augmented prefix with executable action chunks, while the Current World and Future Prediction losses prevent the same representation from collapsing into unconstrained action-only features. The world objectives remain active during policy fine-tuning, ensuring that physical structure is retained as the Action Expert adapts.

The training and deployment paths are deliberately asymmetric. During training, the World Representation Head, Gaussian renderer, future-target builders, and all auxiliary objectives transform robot trajectories into dense geometric and temporal supervision. At deployment, these components are removed. The policy retains the PaliGemma backbone, World State Tokens, World Prediction Tokens, the action adapters used during policy learning, and the original Action Expert. Consequently, inference requires neither the VGGT/TGE prefix-construction pathway of GaussianDream nor online Gaussian reconstruction, rendering, or future rollout; the only additional policy computation is the processing of the compact World Tokens through the native VLA backbone.

4 Experiments

We evaluate **GaussianDream++** from four perspectives: **(1)** manipulation performance on standard tasks; **(2)** zero-shot robustness under spatial, visual, linguistic, and embodiment shifts; **(3)** transfer to real-world manipulation; and **(4)** the contributions and computational costs of its principal design choices.

4.1 Experimental Setup

Benchmarks and metrics. We evaluate GaussianDream++ on LIBERO (Liu et al., 2023) and LIBERO-Plus (Fei et al., 2026). LIBERO contains four task suites—Spatial, Object, Goal, and Long—covering spatial reasoning, object-centric manipulation, goal-conditioned control, and long-horizon execution. We report the average task success rate across the four suites.

LIBERO-Plus evaluates zero-shot robustness under seven controlled distribution shifts: *Camera*, *Robot*, *Language*, *Lighting*, *Background*, *Noise*, and *Layout*. Following the official protocol, policies are trained on standard LIBERO and evaluated directly on LIBERO-Plus without robustness-specific adaptation. The LIBERO-Plus Overall score follows the official aggregation over all evaluation instances and is therefore not necessarily equal to the unweighted mean of the seven shift categories.

Baselines and evaluation protocols. We compare against representative VLA, geometry-enhanced, predictive, and world-model policies. For standard LIBERO, we include GeoPredict (Qian et al., 2025), QDepth-VLA (Li et al., 2025b), LingBot-VA (Li et al., 2026), GeoVLA (Sun et al., 2025), VLA-4D (Zhou

et al., 2025), and Spatial Forcing (Li et al., 2025a). For LIBERO-Plus, we report published zero-shot results from OpenVLA-OFT (Kim et al., 2025), RIPT-VLA (Tan et al., 2025), StarVLA- α (Ye et al., 2026a), Cosmos Policy (Kim et al., 2026), LaMP (Wang et al., 2026), $\pi_{0.5}$ (Physical Intelligence et al., 2025), and ACoT-VLA (Zhong et al., 2026). For ACoT-VLA, we use its zero-shot result rather than its separately reported supervised fine-tuning result to maintain protocol consistency.

Published results may differ in training data, checkpoint selection, and implementation details; they are included to contextualize overall performance rather than support strict pairwise claims. Our direct comparisons use the final block of Tab. 1, where reproduced $\pi_{0.5}$, GaussianDream, and GaussianDream++ are evaluated under the same GaussianDream-family protocol.

Implementation. GaussianDream++ adopts the PaliGemma/ $\pi_{0.5}$ backbone and its flow-matching Action Expert. The policy introduces 16 World State Tokens and 4 World Prediction Tokens directly into the PaliGemma prefix. During training, the action objective is jointly optimized with Current World and Future Prediction supervision produced by the World Representation Head. Future observations are used only to construct supervision targets and never enter the policy forward pass.

At deployment, the World Representation Head, Gaussian renderer, and all auxiliary supervision branches are removed. World State Tokens and World Prediction Tokens remain in the VLA prefix and condition the Action Expert through the native attention pathway. Unlike GaussianDream, GaussianDream++ does not require the dedicated runtime VGGT/TGE pathway for world-prefix construction.

4.2 Main Results on LIBERO and LIBERO-Plus

Overall performance. GaussianDream++ achieves 98.6% average success on LIBERO and 87.8% Overall on LIBERO-Plus. Standard LIBERO is highly saturated, yet GaussianDream++ remains competitive with the strongest published policies and improves the matched GaussianDream and reproduced $\pi_{0.5}$ baselines by 0.2 and 1.7 percentage points, respectively. On LIBERO-Plus, GaussianDream++ obtains the highest Overall score in Tab. 1. Because independently reported results may use different training and evaluation implementations, we base quantitative improvement claims on the matched GaussianDream-family block: GaussianDream++ improves Overall by 2.3 points over reproduced $\pi_{0.5}$ and by 0.8 points over GaussianDream.

Robustness under geometry-sensitive shifts. The clearest gains occur under Camera and Layout perturbations. Compared with reproduced $\pi_{0.5}$, GaussianDream++ improves Camera from 73.2% to 80.1% and Layout from 87.7% to 90.0%, corresponding to gains of 6.9 and 2.3 points. Relative to GaussianDream, the corresponding gains are 2.8 and 1.6 points. Camera shifts alter the projection of an otherwise similar physical scene, whereas Layout shifts change object-relative spatial relationships. The improvements are therefore consistent with the intended role of Current World supervision and policy-native world tokens: the policy is encouraged to retain scene geometry and object layout rather than depend solely on viewpoint-specific appearance.

GaussianDream++ also improves Noise from 89.9% to 94.2% over reproduced $\pi_{0.5}$, suggesting that dense Gaussian supervision provides a useful structural constraint when local image evidence is degraded. Performance under Robot shift, however, remains below reproduced $\pi_{0.5}$. This indicates that the present gains are strongest for viewpoint, layout, and visual perturbations, while embodiment-level generalization remains a separate challenge.

GaussianDream-family comparison. GaussianDream validates the effectiveness of current and future Gaussian supervision, while GaussianDream++ reorganizes the same supervision into role-separated World State Tokens and World Prediction Tokens embedded directly in the VLA backbone. The matched gains show that replacing the dense VGGT/TGE-based prefix with a compact policy-native representation does not sacrifice manipulation accuracy. Instead, GaussianDream++ improves the distribution-shift dimensions most closely associated with geometric consistency, while removing the dedicated runtime geometry pathway.

Table 1 Main results on LIBERO and LIBERO-Plus. We report task success rate (%). (a) Standard LIBERO results across the four task suites. (b) Zero-shot robustness on LIBERO-Plus. Published results are included for contextual comparison, whereas direct improvement claims are based on the matched GaussianDream-family blocks. LIBERO-Plus Overall follows the official task-level aggregation rather than the unweighted mean of the seven shifts. Best results within each evaluation block are shown in **bold**.

(a) Standard LIBERO					
Method	Spatial	Object	Goal	Long	Average
Published results					
π_0 (Black et al., 2024)	96.8	98.8	95.8	85.2	94.1
$\pi_{0.5}$ (Physical Intelligence et al., 2025)	97.8	98.8	97.6	92.4	96.7
GeoPredict (Qian et al., 2025)	98.0	98.2	95.7	94.0	96.5
QDepth-VLA (Li et al., 2025b)	97.6	96.6	95.2	90.0	94.9
LingBot-VA (Li et al., 2026)	98.5	99.6	97.2	98.5	98.5
GeoVLA (Sun et al., 2025)	98.4	99.0	96.6	96.6	97.7
VLA-4D (Zhou et al., 2025)	97.9	98.6	97.8	94.8	97.4
3D-CAVLA (?)	98.2	99.8	98.2	96.1	98.1
Spatial Forcing (PyTorch) (Li et al., 2025a)	98.6	98.4	98.2	95.4	97.6
Matched GaussianDream-family protocol					
$\pi_{0.5}$ reproduced	98.8	98.2	98.0	92.4	96.9
GaussianDream (Zhang et al., 2026)	99.0	99.6	99.0	96.0	98.4
GaussianDream++ (Ours)	99.2	99.6	99.0	96.6	98.6

(b) LIBERO-Plus Zero-Shot Robustness									
Method	Camera	Robot	Lang.	Light	BG	Noise	Layout	Overall	
Published zero-shot results									
OpenVLA-OFT (Kim et al., 2025)	56.4	31.9	79.5	88.7	93.3	75.8	74.2	69.6	
RIPT-VLA (Tan et al., 2025)	55.2	31.2	77.6	88.4	91.6	73.5	74.2	68.4	
StarVLA- α (Specialist) (Ye et al., 2026a)	48.7	63.4	86.8	95.8	94.6	75.0	80.2	77.8	
StarVLA- α (Generalist) (Ye et al., 2026a)	52.5	64.3	86.2	97.8	98.1	80.2	79.1	79.7	
Cosmos Policy (Kim et al., 2026)	75.8	63.3	81.7	96.5	88.9	92.7	82.2	82.2	
LaMP (Wang et al., 2026)	64.5	69.6	88.2	95.3	97.4	76.9	73.8	79.3	
$\pi_{0.5}$ (ACoT protocol) (Physical Intelligence et al., 2025)	75.8	79.4	83.3	95.5	95.0	89.6	87.0	85.7	
ACoT-VLA (Zhong et al., 2026)	72.6	82.6	87.5	97.7	96.5	87.8	88.1	86.6	
Matched GaussianDream-family protocol									
$\pi_{0.5}$ reproduced	73.2	77.9	84.3	96.3	95.5	89.9	87.7	85.5	
GaussianDream (Zhang et al., 2026)	77.3	72.1	86.9	98.9	98.5	93.6	88.4	87.0	
GaussianDream++ (Ours)	80.1	73.0	87.4	99.1	98.8	94.2	90.0	87.8	

4.3 Real-World Manipulation

We evaluate GaussianDream++ on a dual-arm physical robot platform to examine whether its policy-native world representation transfers beyond simulation. The evaluation complements the Camera and Layout shifts in LIBERO-Plus with two tasks that emphasize complementary aspects of physical manipulation. *Bowl-Proximity* requires moving one white bowl adjacent to another while keeping both bowls upright, and therefore stresses object-relative localization and precision placement. *Eggplant-to-Pink-Plate* requires grasping the eggplant and placing it inside the pink plate in the presence of a bitter melon and a blue plate, testing semantic disambiguation, distractor rejection, and long-horizon execution.

Each task is evaluated under three conditions. **Standard** uses the nominal object arrangement and global-camera pose; **Layout** changes the relative configuration of task-relevant objects and distractors while preserving the instruction; and **Camera** physically relocates the global camera while keeping the workspace and manipulation objective unchanged. The wrist-mounted camera remains fixed, isolating the effect of the global viewpoint change. For Bowl-Proximity, a rollout is successful when the commanded adjacency is established while both bowls remain upright. For Eggplant-to-Pink-Plate, success requires the eggplant to be released inside the target plate without human intervention. We evaluate each method for 20 trials per task and condition using the same task definitions and success criteria.

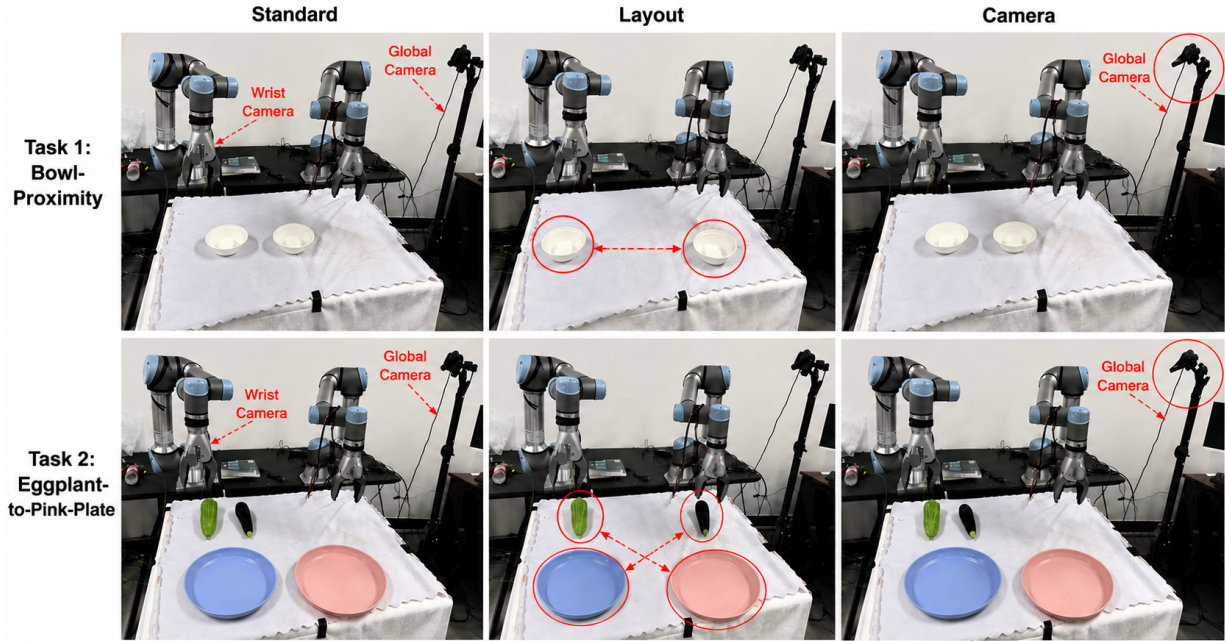


Figure 3 Real-world tasks and distribution shifts. Bowl-Proximity evaluates fine-grained object-relative placement, whereas Eggplant-to-Pink-Plate evaluates long-horizon manipulation with semantic distractors. Each task is tested under the nominal Standard setting, a Layout shift that changes object-relative configurations, and a Camera shift that relocates the global camera while retaining the same task goal.

GaussianDream++ improves the pooled success rate from 29.2% to 52.5%, corresponding to an absolute gain of 23.3 percentage points over the reproduced $\pi_{0.5}$ baseline. The improvement is consistent across the two tasks: Bowl-Proximity increases from 25.0% to 46.7%, while Eggplant-to-Pink-Plate increases from 33.3% to 58.3%. These results indicate that the learned representation benefits both precision-sensitive object-relative placement and longer manipulation sequences involving semantic distractors.

The gains remain substantial under both spatial distribution changes. Under Layout variation, GaussianDream++ doubles the pooled success rate from 25.0% to 50.0%, despite changes to the relative positions of targets and distractors. Under Camera variation, success increases from 22.5% to 42.5% when the global image projection changes while the underlying task remains fixed. Together with the LIBERO-Plus results, these physical evaluations are consistent with the intended role of Gaussian world supervision: World State Tokens provide a more stable representation of scene structure, while World Prediction Tokens encode interaction-relevant evolution that remains useful throughout closed-loop execution.

4.4 Qualitative Analysis

We qualitatively examine whether GaussianDream++ encodes meaningful current scene structure and short-horizon evolution. Figure 4 visualizes RGB and depth decoded from the policy-native world representations across three representative manipulation scenes. These outputs are produced only by the training-time World Representation Head and are not consumed by the Action Expert during deployment.

The Current Reconstructions preserve the dominant spatial organization of the observations, including the robot configuration, tabletop structure, and the approximate locations of task-relevant objects. Fine appearance details and object boundaries remain imperfect, which is expected because the auxiliary decoder is optimized to constrain the policy representation rather than to serve as a standalone reconstruction system. The recovered depth structures nevertheless show that the compact World State Tokens retain decodable geometric information despite being substantially smaller than the dense GaussianDream prefix.

Table 2 Real-world manipulation results. Each task-condition pair contains 20 trials. Entries report successful trials followed by success rate (%) in parentheses. The Overall column pools the three conditions for each task, while the final group pools both tasks.

Method	Standard	Layout	Camera	Overall
<i>Task 1: Bowl-Proximity</i>				
$\pi_{0.5}$ reproduced	7/20 (35.0)	4/20 (20.0)	4/20 (20.0)	15/60 (25.0)
GaussianDream++	11/20 (55.0)	10/20 (50.0)	7/20 (35.0)	28/60 (46.7)
<i>Task 2: Eggplant-to-Pink-Plate</i>				
$\pi_{0.5}$ reproduced	9/20 (45.0)	6/20 (30.0)	5/20 (25.0)	20/60 (33.3)
GaussianDream++	14/20 (70.0)	11/20 (55.0)	10/20 (50.0)	35/60 (58.3)
<i>All tasks</i>				
$\pi_{0.5}$ reproduced	16/40 (40.0)	10/40 (25.0)	9/40 (22.5)	35/120 (29.2)
GaussianDream++	25/40 (62.5)	21/40 (52.5)	17/40 (42.5)	63/120 (52.5)

Table 3 Inference-path and latency comparison. Latency is reported per action chunk. The first block is measured using our matched local deployment pipeline. The GaussianDream value marked by $\dagger$ is reported by its original supplementary evaluation and is included only as a reference because the measurement environment may differ. Runtime Head indicates whether explicit Gaussian decoding or rendering is executed during deployment.

Method	Runtime VGGT/TGE	World Tokens	Runtime Head	Latency
<i>Matched local deployment</i>				
$\pi_{0.5}$ reproduced	No	0	No	286 ms
GaussianDream++	No	20	No	330 ms
<i>Reported reference</i>				
GaussianDream (Zhang et al., 2026) †	Yes	1024	No	531 ms

Future Prediction is moderately less detailed than Current Reconstruction but maintains consistent scene-level geometry and object correspondence. This behavior is consistent with the coupled formulation: the Current World provides the persistent Gaussian template, while World Prediction Tokens encode residual short-horizon evolution instead of independently regenerating the complete scene. The resulting predictions retain coarse physical changes without requiring visually sharp future synthesis. These visualizations provide an interpretability diagnostic of the learned representation; their action relevance is evaluated quantitatively through the policy results and component ablations in Sec. 4.6.

4.5 Inference Efficiency

GaussianDream++ uses rich Gaussian reconstruction and prediction only during training. At deployment, the World Representation Head, Gaussian renderer, future-target construction, and all auxiliary losses are removed; only the World State Tokens and World Prediction Tokens remain in the native VLA prefix. We measure end-to-end latency for one action-chunk prediction with batch size one using the same local deployment pipeline for reproduced $\pi_{0.5}$ and GaussianDream++.

Under the matched local setting, GaussianDream++ increases action-chunk latency from 286 ms to 330 ms, corresponding to 44 ms of additional computation or approximately $1.15\times$ the latency of reproduced $\pi_{0.5}$. This modest overhead arises from contextualizing 20 additional World State and World Prediction Tokens inside PaliGemma; no Gaussian primitive construction, rendering, or future rollout is executed online.

The architectural difference from GaussianDream lies in prefix construction. GaussianDream removes its auxiliary Gaussian heads at deployment but still uses VGGT and TGE to construct a unified 1024-token prefix from temporal observations. GaussianDream++ instead forms its compact world representation directly inside the VLA backbone and removes the dedicated runtime geometry pathway. The reported GaussianDream latency provides a useful efficiency reference, but an exact speedup claim requires all three policies to be

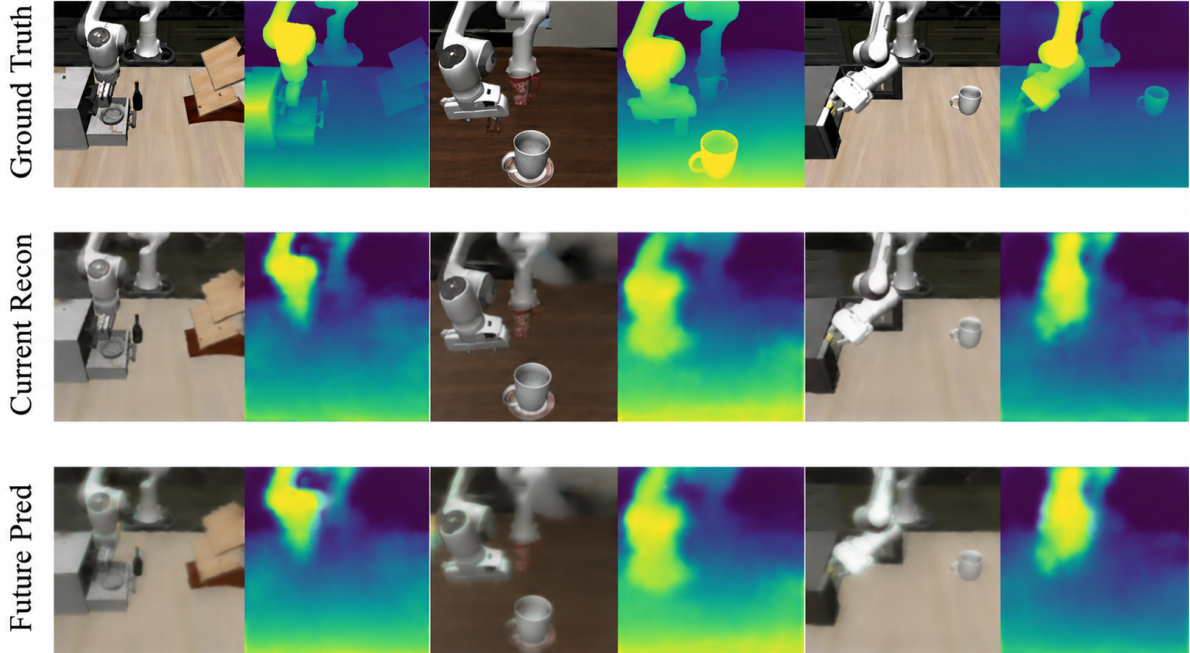


Figure 4 Qualitative analysis of GaussianDream++. We show Ground Truth, Current Reconstruction decoded from World State Tokens, and Future Prediction decoded jointly from World State Tokens and World Prediction Tokens. Current Reconstruction recovers the dominant robot configuration, workspace geometry, and object layout, whereas Future Prediction preserves the same coarse scene structure while representing short-horizon changes. The objective is not photorealistic future generation, but an action-relevant physical representation shaped by Gaussian world supervision.

remeasured under identical hardware, precision, visual inputs, action horizon, and warm-up settings.

4.6 Ablation Studies

We conduct controlled ablations to answer two questions: whether the gains of GaussianDream++ arise from additional token capacity or from structured Gaussian world supervision, and which representation and supervision components are responsible for the final performance. All variants use the same PaliGemma/ $\pi_{0.5}$ backbone, action objective, training budget, and evaluation protocol; only the component specified by each row is changed.

Representation design. Adding World State Tokens and World Prediction Tokens without Gaussian supervision improves LIBERO-Plus Overall from 85.5% to 86.3%, but remains 1.5 points below the full model. Thus, additional policy capacity alone does not explain the gain. Constraining World State Tokens with Current World reconstruction raises Overall to 86.9%, with clear improvements under Camera and Layout shifts. Introducing Future Prediction further improves Overall to 87.2%, showing that short-horizon temporal supervision contributes beyond current-scene grounding. Coupling Current World and Future Prediction over shared Gaussian primitives increases performance to 87.5%, while static consistency yields the final 87.8%. This progression supports the role-separated design: World State Tokens provide the physical reference, World Prediction Tokens encode short-horizon change, and static-dynamic factorization suppresses unnecessary motion in persistent regions.

World-supervision objectives. Metric depth provides the strongest individual geometric constraint. Removing it reduces Overall from 87.8% to 86.9%, with Camera and Layout decreasing from 80.1% and 90.0% to 76.5% and 87.7%, respectively. Removing metric 3D flow reduces Overall to 87.2% and particularly weakens

Table 4 Ablation studies of GaussianDream++. We report task success rate (%) on the four LIBERO suites and the seven LIBERO-Plus distribution shifts. Structural ablations isolate token capacity, Current World supervision, Future Prediction, coupled decoding, and static consistency. Supervision ablations remove one Gaussian-world objective from the full model. LIBERO-Plus Overall follows the official task-level aggregation.

Variant	LIBERO					LIBERO-Plus							
	Spatial	Object	Goal	Long	Avg.	Camera	Robot	Lang.	Light	BG	Noise	Layout	Overall
$\pi_{0.5}$ reproduced	98.8	98.2	98.0	92.4	96.9	73.2	77.9	84.3	96.3	95.5	89.9	87.7	85.5
<i>Structural ablations</i>													
World Tokens w/o Gaussian Supervision	98.8	99.0	97.2	95.0	97.5	75.0	73.5	85.0	97.5	96.5	90.1	88.0	86.3
Current World only	99.0	99.2	98.0	95.4	97.9	77.0	73.2	86.2	98.6	97.7	91.5	88.8	86.9
Current + Future, uncoupled	99.0	99.4	98.2	95.8	98.1	78.0	73.0	86.8	98.8	98.0	92.5	89.2	87.2
Coupled w/o Static Consistency	99.2	99.4	98.6	96.4	98.4	79.2	72.9	87.3	99.0	98.5	93.6	89.6	87.5
<i>Gaussian supervision ablations</i>													
Full w/o RGB Rendering	99.0	99.4	98.6	96.6	98.4	79.1	72.8	87.1	98.5	97.5	93.8	89.6	87.4
Full w/o Metric Depth	98.8	99.2	98.0	96.0	98.0	76.5	72.4	87.0	98.8	98.2	91.8	87.7	86.9
Full w/o Alpha Supervision	99.0	99.4	98.6	96.2	98.3	79.0	72.8	87.2	98.9	98.0	93.2	89.4	87.3
Full w/o Metric 3D Flow	99.0	99.2	98.2	96.0	98.1	78.4	72.7	87.1	98.9	98.3	92.5	89.0	87.2
Full GaussianDream++	99.2	99.6	99.0	96.6	98.6	80.1	73.0	87.4	99.1	98.8	94.2	90.0	87.8

Noise and Layout robustness, indicating that rendering alone does not sufficiently constrain interaction-induced motion. RGB rendering and alpha supervision are also complementary: removing RGB primarily degrades Lighting and Background performance, whereas removing alpha weakens visibility- and coverage-sensitive shifts. The full objective performs best because appearance, metric geometry, spatial coverage, and short-horizon motion constrain different aspects of the same policy-native world representation.

5 Conclusion

We presented **GaussianDream++**, a compact, policy-native successor to GaussianDream for physically grounded Vision-Language-Action control. GaussianDream++ replaces the dense VGGT/TGE-based GaussianDream prefix with 20 World State Tokens and World Prediction Tokens embedded directly in the PaliGemma backbone. During training, a lightweight World Representation Head decodes these representations into a Current World and coupled Future Prediction over shared Gaussian primitives. The role-separated design assigns current-state grounding and short-horizon evolution to distinct token groups, while static–dynamic factorization preserves persistent scene structure and concentrates residual motion on interaction-relevant regions.

At deployment, the World Representation Head, Gaussian renderer, and all auxiliary supervision branches are removed, and the Action Expert operates directly on the compact world-token-augmented prefix. GaussianDream++ therefore retains the dense geometric and temporal supervision introduced by GaussianDream without its dedicated runtime VGGT/TGE pathway, online Gaussian decoding, or future rollout. Under the matched GaussianDream-family protocol, GaussianDream++ achieves 98.6% on LIBERO and 87.8% on LIBERO-Plus, with its clearest gains under Camera and Layout shifts. It further improves pooled real-robot success from 29.2% to 52.5% over reproduced $\pi_{0.5}$, while incurring only modest latency over the base VLA policy. These results indicate that Gaussian world supervision can be internalized into a substantially more compact and structured policy representation, providing a practical route to robust 3D-aware manipulation without a heavy deployed world model.

References

- Ali Abouzeid, Malak Mansour, Zezhou Sun, and Dezhen Song. GeoAware-VLA: Implicit geometry aware vision-language-action model. *CoRR*, abs/2509.14117, 2025. URL <https://arxiv.org/abs/2509.14117>.
- Hongzhe Bi, Hengkai Tan, Shenghao Xie, Zeyuan Wang, Shuhe Huang, Haitian Liu, Ruowen Zhao, Yao Feng, Chendong Xiang, Yinze Rong, Hongyan Zhao, Hanyu Liu, Zhizhong Su, Lei Ma, Hang Su, and Jun Zhu. Motus: A unified latent action world model. *CoRR*, abs/2512.13030, 2025. URL <https://arxiv.org/abs/2512.13030>.
- Kevin Black, Noah Brown, Danny Driess, Adnan Esmail, Michael Equi, Chelsea Finn, Niccolo Fusai, Lachy Groom, Karol Hausman, Brian Ichter, Szymon Jakubczak, Tim Jones, Liyiming Ke, Sergey Levine, Adrian Li-Bell, Mohith Mothukuri, Suraj Nair, Karl Pertsch, Lucy Xiaoyang Shi, James Tanner, Quan Vuong, Anna Walling, Haohuan Wang, and Ury Zhilinsky. π_0 : A vision-language-action flow model for general robot control. *CoRR*, abs/2410.24164, 2024. URL <https://arxiv.org/abs/2410.24164>.
- Anthony Brohan, Noah Brown, Justice Carbajal, Yevgen Chebotar, et al. RT-2: Vision-language-action models transfer web knowledge to robotic control. *CoRR*, abs/2307.15818, 2023. URL <https://arxiv.org/abs/2307.15818>.
- Jun Cen, Chaohui Yu, Hangjie Yuan, Yuming Jiang, Siteng Huang, Jiayan Guo, Xin Li, Yibing Song, Hao Luo, Fan Wang, et al. Worldvla: Towards autoregressive action world model. *arXiv preprint arXiv:2506.21539*, 2025.
- Shizhe Chen, Paul Pacaud, and Cordelia Schmid. PointACT: Vision-language-action models with multi-scale point-action interaction. *arXiv preprint arXiv:2605.21414*, 2026.
- Shengliang Deng, Mi Yan, Yixin Zheng, Jiayi Su, Wenhao Zhang, Xiaoguang Zhao, Heming Cui, Zhizheng Zhang, and He Wang. StereoVLA: Enhancing vision-language-action models with stereo vision. *CoRR*, abs/2512.21970, 2025. URL <https://arxiv.org/abs/2512.21970>.
- Senyu Fei, Siyin Wang, Junhao Shi, Zihao Dai, Jikun Cai, Pengfang Qian, Li Ji, Xinzhe He, Shiduo Zhang, Zhaoye Fei, Jinlan Fu, Jingjing Gong, and Xipeng Qiu. LIBERO-Plus: A progressive robustness benchmark for visual-language-action models. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 38574–38583, 2026.
- Bernhard Kerbl, Georgios Kopanas, Thomas Leimkühler, George Drettakis, et al. 3d gaussian splatting for real-time radiance field rendering. *ACM Trans. Graph.*, 42(4):139–1, 2023.
- Moo Jin Kim, Karl Pertsch, Siddharth Karamcheti, Ted Xiao, Ashwin Balakrishna, Suraj Nair, Rafael Rafailov, Ethan Foster, Grace Lam, Pannag Sanketi, Quan Vuong, Thomas Kollar, Benjamin Burchfiel, Russ Tedrake, Dorsa Sadigh, Sergey Levine, Percy Liang, and Chelsea Finn. OpenVLA: An open-source vision-language-action model. *CoRR*, abs/2406.09246, 2024. URL <https://arxiv.org/abs/2406.09246>.
- Moo Jin Kim, Chelsea Finn, and Percy Liang. Fine-tuning vision-language-action models: Optimizing speed and success. *arXiv preprint arXiv:2502.19645*, 2025.
- Moo Jin Kim, Yihuai Gao, Tsung-Yi Lin, Yen-Chen Lin, Yunhao Ge, Grace Lam, Percy Liang, Shuran Song, Ming-Yu Liu, Chelsea Finn, and Jinwei Gu. Cosmos Policy: Fine-tuning video models for visuomotor control and planning. *arXiv preprint arXiv:2601.16163*, 2026.
- Fuhao Li, Wenxuan Song, Han Zhao, Jingbo Wang, Pengxiang Ding, Donglin Wang, Long Zeng, and Haoang Li. Spatial forcing: Implicit spatial representation alignment for vision-language-action model. *CoRR*, abs/2510.12276, 2025a. URL <https://arxiv.org/abs/2510.12276>.
- Lin Li, Qihang Zhang, Yiming Luo, Shuai Yang, Ruilin Wang, Fei Han, Mingrui Yu, Zelin Gao, Nan Xue, Xing Zhu, Yujun Shen, and Yinghao Xu. Causal world modeling for robot control. *CoRR*, abs/2601.21998, 2026. URL <https://arxiv.org/abs/2601.21998>.
- Yixuan Li, Yuhui Chen, Mingcai Zhou, Haoran Li, Zhengtao Zhang, and Dongbin Zhao. QDepth-VLA: Quantized depth prediction as auxiliary supervision for vision-language-action models. *CoRR*, abs/2510.14836, 2025b. URL <https://arxiv.org/abs/2510.14836>.
- Bo Liu, Yifeng Zhu, Chongkai Gao, Yihao Feng, Qiang Liu, Yuke Zhu, and Peter Stone. LIBERO: Benchmarking knowledge transfer for lifelong robot learning. In *Advances in Neural Information Processing Systems*, volume 36, 2023.
- Guanxing Lu, Shiyi Zhang, Ziwei Wang, Changliu Liu, Jiwen Lu, and Yansong Tang. Manigaussian: Dynamic gaussian splatting for multi-task robotic manipulation. In *European Conference on Computer Vision*, pp. 349–366. Springer, 2024.

- Guanxing Lu, Baoxiong Jia, Puhao Li, Yixin Chen, Ziwei Wang, Yansong Tang, and Siyuan Huang. GWM: Towards scalable gaussian world models for robotic manipulation. In *ICCV*, pp. 9263–9274, 2025. URL https://openaccess.thecvf.com/content/ICCV2025/html/Lu_GWM_Towards_Scalable_Gaussian_World_Models_for_Robotic_Manipulation_ICCV_2025_paper.html.
- Chaojun Ni, Cheng Chen, Xiaofeng Wang, Zheng Zhu, Wenzhao Zheng, Boyuan Wang, Tianrun Chen, Guosheng Zhao, Haoyun Li, Zhehao Dong, Qiang Zhang, Yun Ye, Yang Wang, Guan Huang, and Wenjun Mei. SwiftVLA: Unlocking spatiotemporal dynamics for lightweight vla models at minimal overhead. *CoRR*, abs/2512.00903, 2025. URL <https://arxiv.org/abs/2512.00903>.
- Octo Model Team, Dibya Ghosh, Homer Walke, Karl Pertsch, Kevin Black, Oier Mees, et al. Octo: An open-source generalist robot policy. *CoRR*, abs/2405.12213, 2024. URL <https://arxiv.org/abs/2405.12213>.
- Yue Peng, Yongzhe Zhao, Artur Habuda, Khuyen Pham, Yanheng Zhu, Tran Nguyen Le, Fares Abu-Dakka, and Li Guo. G3VLA: Geometric inductive bias for vision-language-action models. *arXiv preprint arXiv:2606.24472*, 2026.
- Physical Intelligence, Kevin Black, Noah Brown, James Darpanian, Karan Dhabalia, Danny Driess, Adnan Esmail, Michael Equi, Chelsea Finn, Niccolo Fusai, Manuel Y. Galliker, Dibya Ghosh, Lachy Groom, Karol Hausman, Brian Ichter, Szymon Jakubczak, Tim Jones, Liyiming Ke, Devin LeBlanc, Sergey Levine, Adrian Li-Bell, Mohith Mothukuri, Suraj Nair, Karl Pertsch, et al. $\pi_{0.5}$: A vision-language-action model with open-world generalization. *CoRR*, abs/2504.16054, 2025. URL <https://arxiv.org/abs/2504.16054>.
- Jingjing Qian, Boyao Han, Chen Shi, Lei Xiao, Long Yang, Shaoshuai Shi, and Li Jiang. GeoPredict: Leveraging predictive kinematics and 3d gaussian geometry for precise vla manipulation. *CoRR*, abs/2512.16811, 2025. URL <https://arxiv.org/abs/2512.16811>.
- Zijian Song, Qichang Li, Jiawei Zhou, Zhenlong Yuan, Tianshui Chen, Liang Lin, and Guangrun Wang. Robotic manipulation is vision-to-geometry mapping ($f(v) \rightarrow g$): Vision-geometry backbones over language and video models. *CoRR*, abs/2604.12908, 2026. URL <https://arxiv.org/abs/2604.12908>.
- Lin Sun, Bin Xie, Yingfei Liu, Hao Shi, Tiancai Wang, and Jiale Cao. GeoVLA: Empowering 3d representations in vision-language-action models. *CoRR*, abs/2508.09071, 2025. URL <https://arxiv.org/abs/2508.09071>.
- Shuhan Tan, Kairan Dou, Yue Zhao, and Philipp Krähenbühl. Interactive post-training for vision-language-action models. *arXiv preprint arXiv:2505.17016*, 2025.
- Xinkai Wang, Chenyi Wang, Yifu Xu, Mingzhe Ye, Fucheng Zhang, Jialin Tian, Xinyu Zhan, Lifeng Zhu, Cewu Lu, and Lixin Yang. LaMP: Learning vision-language-action policies with 3d scene flow as latent motion prior. *arXiv preprint arXiv:2603.25399*, 2026.
- Jinhui Ye, Ning Gao, Senqiao Yang, Jinliang Zheng, Zixuan Wang, Yuxin Chen, Pengguang Chen, Yilun Chen, Shu Liu, and Jiaya Jia. StarVLA- α : Reducing complexity in vision-language-action systems. *arXiv preprint arXiv:2604.11757*, 2026a.
- Seonghyeon Ye, Yunhao Ge, Kaiyuan Zheng, Shenyuan Gao, Sihyun Yu, George Kurian, Suneel Indupuru, You Liang Tan, Chuning Zhu, Jiannan Xiang, Ayaan Malik, Kyungmin Lee, William Liang, Nadun Ranawaka, Jiasheng Gu, Yinzen Xu, Guanzhi Wang, Fengyuan Hu, Avnish Narayan, Johan Bjorck, Jing Wang, Gwanghyun Kim, Dantong Niu, Ruijie Zheng, Yuqi Xie, Jimmy Wu, Qi Wang, Ryan Julian, Danfei Xu, Yilun Du, Yevgen Chebotar, Scott Reed, Yuke Zhu, Linxi Fan, and Joel Jang. World Action Models are Zero-shot Policies. *CoRR*, abs/2602.15922, 2026b. URL <https://arxiv.org/abs/2602.15922>.
- Tianyuan Yuan, Zibin Dong, Yicheng Liu, and Hang Zhao. Fast-wam: Do world action models need test-time future imagination? *arXiv preprint arXiv:2603.16666*, 2026.
- Zijian Zhang, Yuqing Jiang, Qian Cheng, Xiaofan Li, Si Liu, Ding Zhao, Ping Luo, Weitao Zhou, and Haibao Yu. GaussianDream: A feed-forward 3d gaussian world model for robotic manipulation. *arXiv preprint / manuscript*, 2026.
- Haoyu Zhen, Xiaowen Qiu, Peihao Chen, Jincheng Yang, Xin Yan, Yilun Du, Yining Hong, and Chuang Gan. 3d-vla: A 3d vision-language-action generative world model. *arXiv preprint arXiv:2403.09631*, 2024.
- Linqing Zhong, Yi Liu, Yifei Wei, Ziyu Xiong, Maoqing Yao, Si Liu, and Guanghui Ren. ACoT-VLA: Action chain-of-thought for vision-language-action models. *arXiv preprint arXiv:2601.11404*, 2026.

Hanyu Zhou, Chuanhao Ma, and Gim Hee Lee. VLA-4D: Embedding 4d awareness into vision-language-action models for spatiotemporally coherent robotic manipulation. *CoRR*, abs/2511.17199, 2025. URL <https://arxiv.org/abs/2511.17199>.