

OA-WAM: Object-Addressable World Action Model for Robust Robot Manipulation

Yushan Liu¹ Peibo Sun² Shoujie Li³ Yifan Xie¹
 Lingfeng Zhang¹ Xintao Chao¹ Shiyuan Dong²
 Fang Chen² Xiao-Ping Zhang¹ Wenbo Ding^{1*}

¹Tsinghua University

²Shanghai Jiao Tong University

³Nanyang Technological University

Abstract

World Action Models (WAM) enhance Vision-Language-Action (VLA) policies by jointly predicting scene evolution and robot actions, but most existing methods represent the predicted world as holistic images, video-token streams, or global latents—making it hard for the action decoder to locate a specific target object when an instruction refers to it: under novel scene shifts the relevant object often remains visible while holistic tokens entangle its identity with surrounding context. We formulate this as a lack of *object addressability* and propose OA-WAM, an Object-Addressable World Action Model for robust robot manipulation. Each frame is decomposed into $N+1$ per-slot state tokens (1 robot slot, N object slots), each concatenating an identity vector addr_k and a time-varying content vector content_k^t , and fused with text, image, proprioception, and past-action tokens into a block-causal sequence. A world head regresses next-frame slot state and a flow-matching action head decodes a 16-step continuous action chunk, both in a single forward pass. Object addressability is enforced architecturally by routing cross-slot attention on addr alone at every transformer layer—an addr -only key projection together with a per-layer reset of the addr slice in the residual stream. This separates "which object to act on" from "what that object currently is" at the tensor level, providing an intervenable object-level interface without introducing extra tokens. OA-WAM matches the SOTA VLA and WAM baselines on LIBERO (97.8%) and SimplerEnv (79.3%); on LIBERO-Plus, OA-WAM sets a new SOTA on the geometric axes most aligned with the hypothesis, while remaining competitive with $\pi_{0.5}$ on the seven-axis aggregate (83.9% vs 85.7%). A causal slot-intervention test gives OA-WAM a swap-binding cosine of 0.87 versus ≤ 0.09 for all holistic baselines. Our results show that explicitly organizing a world model as addressable object states is an effective path toward more robust robot manipulation under scene perturbations.

1 Introduction

Robot manipulation naturally unfolds at the object level. An instruction like “put the red mug on the green tray” is not a request to replay a training trajectory; it requires the robot to identify the language-named objects in the current scene, reason about their spatial and functional relations to surrounding distractors, and generate correct, robust closed-loop actions. Vision-Language-Action

*Corresponding author.

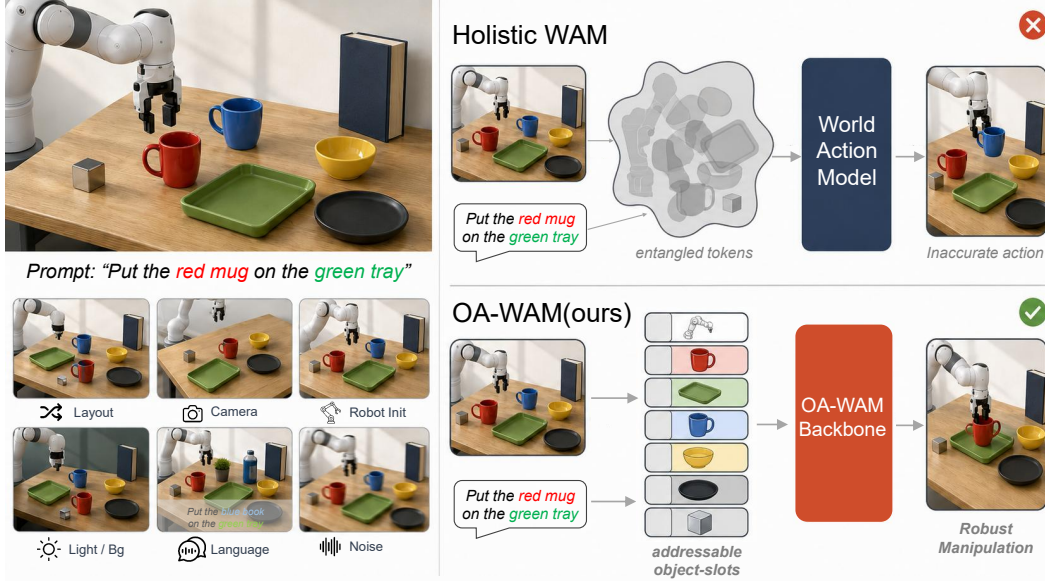


Figure 1: **Overview of OA-WAM.** Under scene perturbations (left, six typical axes), holistic WAMs entangle target identity with context in global tokens and drift to wrong actions (top right). Our OA-WAM (bottom right) decomposes each frame into $N+1$ addressable object slots whose cross-slot attention key reads only the identity address subvector, keeping robust manipulation.

(VLA) policies have made rapid progress on standard manipulation benchmarks by scaling vision-language backbones, robot data, and action decoders [32, 60, 102]; World Action Models (WAMs) build on this by jointly predicting actions and future world states, supplying extra temporal and causal supervision [9, 89, 90].

However, robustness benchmarks show that high standard-benchmark scores do not imply reliable scene understanding: under modest perturbations of object layout, camera viewpoint, robot initial state, background, lighting, or sensor noise, policies often collapse from near-saturated success rates [19, 23, 61], and remain insensitive to paraphrased or even meaningless instruction tokens [19, 99]—both signs that target selection is bound to training layouts and visual context rather than to the language-named objects. Most existing WAMs still represent the predicted world as full-frame observations, image/video token streams, or shared global vision-action latents [10, 95, 101]; such representations capture how scenes evolve but provide the action decoder no stable interface for deciding *which* object to act on. When camera, layout, or robot pose changes, the target object often remains visible yet becomes entangled with background and neighboring content inside holistic tokens, causing action selection to drift.

Object-centric work attempts to fill this gap: slot-based dynamics models improve sample efficiency and relational reasoning [20, 29], and object-state grounding turns object representations into operational interfaces between language and action [13, 26, 88]. Yet many such methods rely on Slot-Attention-style discovery from scratch [50, 81, 82], which is sensitive to fixed slot counts, occlusion, and cluttered scenes; and even with stable slots, each slot still mixes identity, appearance, pose, and local context, so the action decoder may still drift to the wrong instance under perturbation.

Based on this diagnosis, we propose OA-WAM, an Object-Addressable WAM. Each frame is decomposed into $N+1$ slots whose vectors are split into a frozen identity address addr_k —computed once per episode from the language label and the initial DINOv3 feature, and never updated thereafter—and a time-varying content cnt_k^t refreshed every step from SAM 3 + DINOv3 masks. Slots are fused with text, image-VQ, proprioception, and past-action streams into a block-causal sequence processed by a 7B Chameleon-style trunk, from which a world head regresses next-frame per-slot ($\hat{\text{cnt}}, \hat{\text{pose}}$) and a flow-matching action head decodes a 16-step continuous action chunk in a single forward pass. The OA constraint is enforced as two parameter-free tensor-level operations applied at *each* of the 32 transformer layers: the cross-slot key projection reads only the addr subvector, and a forward hook resets the residual addr slice back to the cached identity. Because addr is frozen per episode and

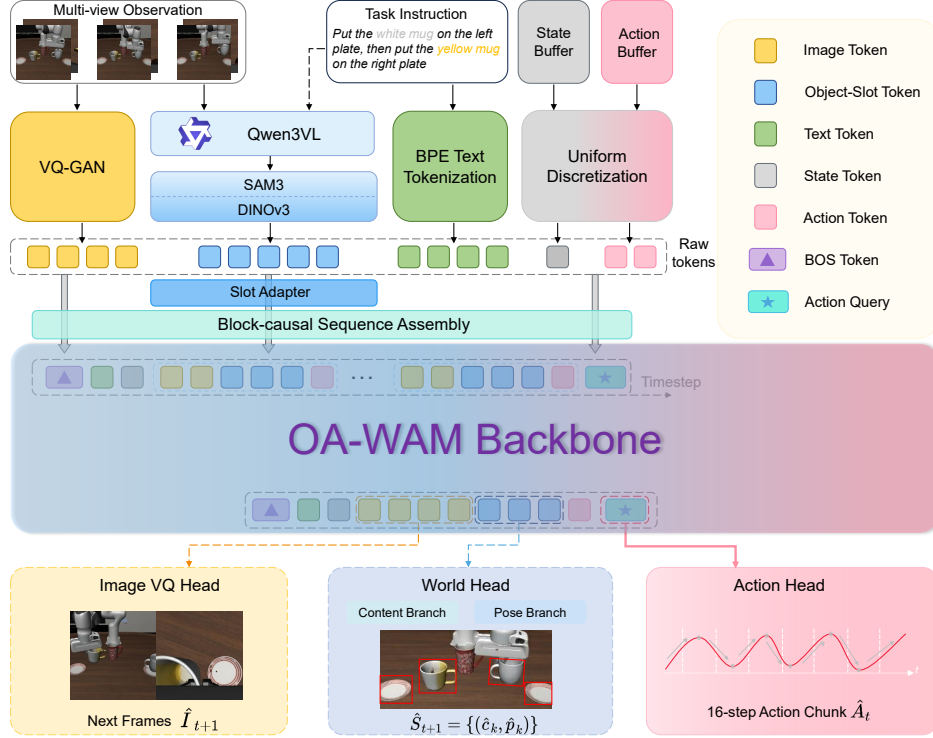


Figure 2: **OA-WAM architecture.** Multi-modal inputs are encoded into each token streams: object-slot tokens via SAM3+DINOv3, projected by a learnable slot adapter; Only slot tokens introduce learnable parameters; the others reuse frozen embed_tokens. Tokens are assembled into a block-causal sequence terminated by a learnable action query [ACT-Q] and processed by the slot-aware backbone. The world head reads slot hiddens to predict next-frame per-slot (cnt, pose) as auxiliary supervision; the action head decodes a 16-step action chunk.

gradients into it are blocked by the reset, slot-routing keys at every transformer layer are architecturally constrained to depend only on the frozen identity address. *Conditional on correct upstream slot extraction*, this removes a specific failure mode of holistic backbones—scene-context shifts can no longer rewrite which slot the action head reads from—while content, pose, and language remain free to flow through the residual stream and value projections; the constraint is on key routing rather than an end-to-end semantic guarantee, and inherits any errors made by the SAM 3 + Qwen3-VL slot pipeline.

Across three benchmarks, OA-WAM validates this design where the hypothesis predicts. On in-distribution LIBERO and SimplerEnv WidowX (Visual Matching) it reaches 97.8 and 79.3 avg, leading all published VLA and WAM baselines (Table 1). On the LIBERO-Plus robustness benchmark (Table 2) it sets a new SOTA on the geometric axes most aligned with the hypothesis—camera 80.5 (+4.7% over Cosmos-Policy), robot-initial-state 89.6 (within 0.1% of X-VLA), and a Camera/Robot/Layout Geo Avg of 84.3 (+4.8% above $\pi_{0.5}$)—and is competitive on the seven-axis overall aggregate (83.9 vs $\pi_{0.5}$ ’s 85.7), with the residual gap concentrated on Sensor Noise where photometric corruption disrupts slot extraction at the perception stage rather than the action policy itself. A causal slot-intervention test gives OA-WAM a swap-binding cosine of 0.87 versus ≤ 0.09 for all eight holistic baselines—direct behavioural evidence that target selection is grounded in the explicit address subspace—and an OA-isolation ablation shows that turning off the addr-only key projection alone drops LP camera by 13.3% while leaving in-distribution LIBERO essentially unchanged (−1.5%), the asymmetric signature of an OOD-specific inductive bias rather than a generic capacity gain.

Our contributions are as follows:

- We model the poor robustness of existing WAMs under manipulation perturbations as a lack of object addressability: the world state should not only predict the future, but also provide stable

per-object states so that language-conditioned action generation can directly query task-relevant objects.

- We propose OA-WAM, which uses per-slot addr/content state tokens, a block-causal world-action sequence, temporally aligned world/action heads, and a two-part OA constraint (addr-only key projection plus per-layer address-stream reset) that together architecturally decouple object-identity addressing from time-varying content modeling.
- We match SOTA-level performance on standard LIBERO and SimplerEnv and lead on the camera and robot-initial-state axes of LIBERO-Plus most directly aligned with our hypothesis; ablations and slot-intervention tests confirm the object-addressable interface is the key source of this robustness pattern.

2 Related Works

World Action Models with holistic future prediction. World Action Models couple action policies with world-model objectives so that the policy learns how its actions reshape the scene. From latent-imagination control (Dreamer V3, TD-MPC2) [24, 25] and text-conditioned video planning (UniPi, RoboDreamer, ManipDreamer, NovaPlan) [16, 21, 41, 98] to unified action-future models—coupled diffusion (UWM), interleaved autoregressive streams (WorldVLA, RynnVLA-002, UniVLA), JEPA-style and latent WAMs (VLA-JEPA, Being-H0.7), memory or chain-of-world reasoning (MemoryVLA, CoT-VLA, CoWVLA, AdaWorldPolicy, dreamzero, lingbotva), generation-action bridges (F1), foundation video-policy fine-tuning (GE-Act, Cosmos-Policy), and recent variants targeting test-time efficiency (Fast-WAM), condition-space world representation (World Guidance), compositional world models (RISE), and forward-inverse verification (WAV) [9, 10, 34, 38, 42, 49, 51, 52, 66, 72, 73, 79, 85, 86, 89–91, 95, 101]—these models predict futures in pixel space, autoregressive token streams or global latents, providing extra temporal supervision but no decomposed, queryable view of the individual objects an instruction names. OA-WAM reframes world prediction as per-object slot-state prediction, supplying the addressable object-level interface that holistic world objectives lack.

Policies for robust manipulation. Vision-language-action (VLA) policies dominate closed-loop manipulation. Starting from RT-1/2 and Open X-Embodiment / Octo [5, 57, 58, 102], this line scales by fine-tuning VLM backbones (OpenVLA, RDT, GR00T N1.5, SpatialVLA, NORA, SmolVLA, X-VLA, ABot-M0, InternVLA-M1) [14, 28, 32, 48, 56, 62, 69, 87, 97], adding flow-matching or optimized action heads ($\pi_0/\pi_{0.5}$, OpenVLA-OFT) [3, 33, 60] and combining with visuomotor designs (ACT, Diffusion Policy, Transporter, CLIPort, PerAct, VIMA) [15, 30, 67, 68, 92, 96], saturating standard benchmarks. Yet recent stress tests [19, 23, 61, 76, 99] reveal collapse under modest scene perturbations and policy insensitivity to language paraphrase, and training-side fixes such as STRONG-VLA [84] leave the perceptual interface intact, so policies still bind “which object to act on” to training layouts and visual context rather than to the language-named target. OA-WAM addresses this at the architecture level by anchoring target selection to a frozen, language-grounded identity vector invariant to scene content, making robustness a structural property of the trunk rather than a training-data outcome.

Object-centric representations. Object-centric representations decompose a scene into object-level latent states. From generative-decomposition models (MONet, IODINE, GENESIS, STEVE) [6, 18, 22, 71] and the Slot-Attention family (Slot Attention, SAVi, SAVi++, SlotFormer, SlotDiffusion) [17, 35, 50, 81, 82] to robotics work that couples object slots with model-based RL (FOCUS, SOLD) [20, 54] and language-conditioned policies (OCWM, Goal-VLA, SlotVLA, OAT-VLA, ObeyedVLA, STORM, LiLo-VLA) [2, 12, 13, 26, 29, 74, 88], with foundation perception (SAM/SAM 2/ SAM 3, DINO/DINOv2/DINOv3, CLIP, SigLIP, T5, Qwen3-VL) [1, 7, 8, 36, 59, 63–65, 70, 93] stabilizing slot discovery, this line either remains sensitive to slot count, occlusion and clutter, or—once stable slots are obtained—encodes each object’s identity, appearance, pose and context inside one vector, giving the action decoder no architectural guarantee that “which object to act on” is decoupled from “what that object currently is”. OA-WAM closes this gap by partitioning each slot into a frozen identity address and a time-varying content subvector and routing cross-slot attention only through the address subvector at every transformer layer—a tensor-level, parameter-free architectural commitment to addressable routing (conditional on the upstream language-grounded slot extraction) that prior world or VLA models do not provide.

3 Method

3.1 Problem setup

At step t the agent observes RGB frames $\mathbf{I}_t$ (third-person and wrist views), proprioception $\mathbf{q}_t \in \mathbb{R}^7$, a language instruction ℓ , and the past $T-1$ executed actions $\mathbf{a}_{<t}$. The policy π_θ produces, in a single forward pass, an action chunk $\mathbf{A}_t = (\mathbf{a}_t, \dots, \mathbf{a}_{t+H-1}) \in \mathbb{R}^{H \times 7}$ ($H=16$) and a per-object next-frame state prediction $\hat{\mathcal{S}}_{t+1} = \{(\hat{\mathbf{c}}_k^{t+1}, \hat{\mathbf{p}}_k^{t+1})\}_{k=1}^N$:

$$(\mathbf{A}_t, \hat{\mathcal{S}}_{t+1}) \sim \pi_\theta(\mathbf{I}_{\leq t}, \mathbf{q}_{\leq t}, \ell, \mathbf{a}_{<t}). \quad (1)$$

OA-WAM parameterizes π_θ over an object-level input representation: each frame is decomposed into $N+1$ slots, and cross-slot attention keys are constrained to depend only on object identity.

3.2 Object-slot tokenization and unified sequence

Frozen foundation perception produces six parallel token streams that share a single Chameleon-7B sequence [11, 46]: BPE text; Qwen3-VL [1] noun phrases (used only as SAM 3 prompts and excluded from the trunk); Chameleon VQ-GAN image codes; SAM 3 [7]+DINOv3 [70]+pose object slots; 256-bin discretized proprioception; and 256-bin discretized past actions. Five streams reuse the pretrained Chameleon embedding table; only the slot stream introduces new parameters. For each slot k at frame t we form a 320-dimensional slot vector

$$\mathbf{s}_k^t = [\underbrace{\mathbf{addr}_k}_{32} \parallel \underbrace{\mathbf{cnt}_k^t}_{256} \parallel \underbrace{\boldsymbol{\pi}^t}_{16} \parallel \underbrace{\boldsymbol{\rho}_k}_{16}] \in \mathbb{R}^{320}, \quad (2)$$

where $\mathbf{addr}_k = f_{\text{addr}}([\ell_k \parallel \mathbf{f}_k^{(0)}])$ is computed once at $t=0$ from the language label and the initial DINOv3 feature and is fixed throughout the episode (object identity), $\mathbf{cnt}_k^t = f_{\text{cnt}}(\mathbf{raw}_k^t)$ is recomputed each frame (time-varying state), $\boldsymbol{\pi}^t$ is a sinusoidal embedding of the frame index, and $\boldsymbol{\rho}_k$ is a learned lookup over three role labels (robot, object, padding). A slot adapter $f_\phi: \mathbb{R}^{320} \rightarrow \mathbb{R}^{4096}$ projects each slot into the trunk hidden dimension, and slot embeddings replace $\langle \text{slot} \rangle$ placeholder positions in the input sequence via the LLaVA-style masked_scatter pattern [37, 47]. The full sequence is block-causal across frame groups and terminates in a learnable query token [ACT_Q], whose final hidden state is read by the action head. Slot capacity is fixed at $N_{\text{max}}=16$ with masked padding for unused positions; multi-instance noun phrases are disambiguated at $t=0$ by the Qwen3-VL relation graph, and identity persists across frames via SAM 3 concept tracking (App. B).

3.3 Object-addressable attention

The 7B trunk is a Chameleon-style multimodal autoregressive transformer (32 layers, hidden dimension 4096, 32 attention heads). At slot-typed positions, the standard self-attention is replaced by a slot-aware variant in which the key-projection input is restricted to the address sub-vector (Fig. 3; within-frame slots attend bidirectionally for permutation equivariance, block-causally across frames):

$$\begin{aligned} \mathbf{K}_k^{(\ell)} &= W_K^{(\ell)} \cdot \text{mask}_{\leq 32}(\mathbf{x}_k^{(\ell)}), \\ \mathbf{Q}_k^{(\ell)} &= W_Q^{(\ell)} \mathbf{x}_k^{(\ell)}, \quad \mathbf{V}_k^{(\ell)} = W_V^{(\ell)} \mathbf{x}_k^{(\ell)}, \end{aligned} \quad (3)$$

$\text{mask}_{\leq 32}$ zeros all coordinates beyond the first 32. This is equivalent to projecting only $\mathbf{addr}_k$ through a 32-dimensional slice of W_K , but is implemented as a pre-projection mask so that the pretrained W_K is reused without introducing OA-specific parameters; non-slot positions use the unmodified base attention (per-module accounting in App. D). After every transformer block, a forward hook overwrites $\mathbf{x}_k^{(\ell+1)}[1:32] \leftarrow \mathbf{addr}_k$ at slot positions while leaving the remaining 4064 coordinates untouched, preventing address drift through residual updates.

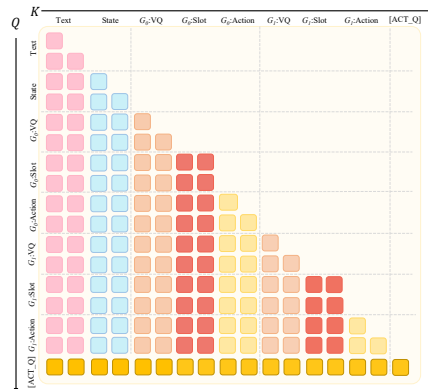


Figure 3: **OA attention mask.** Block-causal across frames; within-frame slots are bidirectional (red diagonal). W_K reads only $\mathbf{addr}_k$ (first 32 dims).

Combined with Eq. (3), this ensures by construction that the slot-routing key signal at every layer depends only on the frozen identity address: *conditional on correct slot extraction*, which slot the action head attends to is selected by `addr` and not by `cnt_k^t`, scene context, or non-slot tokens, while time-varying content still flows through values and the residual stream. This is an architectural property of key routing rather than a semantic guarantee of grounding correctness end-to-end—if SAM 3 misses an object or two slots are initialized with ambiguous addresses, the routing constraint cannot recover from upstream errors. Holistic VLA backbones [32, 56, 60] entangle identity, appearance, and surrounding context within a single patch-token stream; OA-WAM separates them at the tensor level.

3.4 Prediction heads

Three heads read from the final hidden states $\mathbf{H} \in \mathbb{R}^{B \times L \times 4096}$. The *world head* h_ψ takes per-slot hiddens through two parallel MLPs—a content branch ($4096 \rightarrow 1024 \rightarrow 256$) and a pose branch ($4096 \rightarrow 256 \rightarrow 9$)—and is supervised by mean squared error,

$$\mathcal{L}_{\text{world}} = \frac{1}{N} \sum_{k=1}^N m_k^{\text{obj}} \left(\|\hat{\mathbf{c}}_k^{t+1} - \mathbf{c}_k^{t+1}\|_2^2 + \lambda_p \|\hat{\mathbf{p}}_k^{t+1} - \mathbf{p}_k^{t+1}\|_2^2 \right); \quad (4)$$

the robot slot is excluded from this loss since its future is determined by the action under generation. The *action head* h_ξ reads the `[ACT_Q]` hidden and is a flow-matching MLP [3, 44] that predicts a velocity field $\mathbf{v}_\xi$ on the full 16-step action chunk; training minimizes the conditional flow-matching objective

$$\mathcal{L}_{\text{act}} = \mathbb{E}_{\tau, \epsilon} \left\| \mathbf{v}_\xi(\mathbf{A}_t^\tau, \tau, \mathbf{H}_{\text{ACT}_Q}) - (\mathbf{A}_t - \epsilon) \right\|_2^2, \quad \mathbf{A}_t^\tau = \tau \mathbf{A}_t + (1 - \tau) \epsilon, \quad (5)$$

with $\tau \sim \mathcal{U}(0, 1)$ and $\epsilon \sim \mathcal{N}(\mathbf{0}, \mathbf{I})$. At inference, the chunk is decoded by 4-step forward Euler integration in a single forward pass, avoiding the intra-chunk error accumulation of autoregressive action decoders [9, 10]. An *auxiliary image-VQ head* reuses the trunk’s `lm_head` to predict next-frame VQ tokens with a weighted cross-entropy $\mathcal{L}_{\text{vq}}$ and introduces no new parameters.

3.5 Training objective

The total training loss combines the three head terms with two auxiliary regularizers adapted from prior object-centric VLA work [2, 26]:

$$\mathcal{L}(\theta) = \mathcal{L}_{\text{act}} + \lambda_w \mathcal{L}_{\text{world}} + \lambda_v \mathcal{L}_{\text{vq}} + \lambda_c \mathcal{L}_{\text{compose}} + \lambda_r \mathcal{L}_{\text{role}}. \quad (6)$$

$\mathcal{L}_{\text{compose}}$ enforces invariance under random distractor permutation and insertion; $\mathcal{L}_{\text{role}}$ aligns the action-head attention with language-extracted target/reference labels when available. The four weights $\{\lambda_w, \lambda_v, \lambda_c, \lambda_r\}$ are fixed (non-learnable) hyperparameters with values $\{0.5, 0.04, 0.1, 0.05\}$; λ_c is linearly warmed from 0 to its final value over the first 30% of training and λ_r is annealed to 0 after the first half of training. The slot adapter and prediction heads are aligned and finetuned on standard LIBERO demonstrations atop a frozen 7B slot-aware trunk, yielding $\sim 127\text{M}$ trainable parameters (80M LoRA on $\{q, k, v, o, \text{gate}, \text{up}, \text{down}\}_{\text{proj}}$ and 47M for the prediction heads); LIBERO-Plus is held out as out-of-distribution evaluation. Pseudocode appears in Appendix A; remaining implementation details—tokenization, slot-adapter and head architectures, trunk integration, sequence template, loss components and augmentations, training pipeline and hyperparameters, inference latency, and the equivariance proof—are in Appendices B–G.

4 Experiments

4.1 Setup

We evaluate on three simulation benchmarks. **LIBERO** [45] measures in-distribution success across the four standard task suites (Spatial / Object / Goal / Long). **SimplerEnv** (WidowX, Bridge tasks, Visual Matching) [40] measures sim-to-real visual matching against real WidowX scenes. **LIBERO-Plus** [19] measures robustness across seven controlled perturbation axes—Camera, Robot init, Layout, Light, Background, Language, Sensor noise—with training restricted to the standard LIBERO demonstrations. All reported numbers are means over three seeds; per-suite citation sources, confidence-interval computation, and result-source attribution are in Appendix H.

Table 1: **Comparison on LIBERO and SimplerEnv (WidowX, Visual Matching).** All numbers are success rates (%). **Best** results are in bold, and **second-best** are underlined.

Method	LIBERO					SimplerEnv WidowX (Visual Matching)				
	Spatial	Object	Goal	Long	Avg	Spoon Towel	Carrot Plate	Stack Cube	Eggplant Basket	Avg
<i>Vision-Language-Action Models</i>										
OpenVLA [32]	84.7	88.4	79.2	53.7	76.5	—	—	—	—	—
SpatialVLA [62]	88.2	89.9	78.6	55.5	78.1	16.7	25.0	29.2	100.0	42.7
π_0 [3]	96.8	98.8	95.8	85.2	94.2	—	—	—	—	—
$\pi_{0.5}$ [60]	<u>98.8</u>	98.2	98.0	92.4	96.9	—	—	—	—	—
InternVLA-M1 [14]	98.0	<u>99.0</u>	93.8	92.6	95.9	87.5	67.9	31.3	100.0	71.7
CogACT [39]	—	—	—	—	—	71.7	50.8	15.0	67.5	51.3
<i>World-Action Models</i>										
F1-VLA [52]	98.2	97.8	95.4	91.3	95.7	50.0	70.8	50.0	66.7	—
MemoryVLA [66]	98.4	98.4	96.4	93.4	96.5	75.0	75.0	37.5	100.0	71.9
VLA-JEPA [73]	96.2	99.6	97.2	95.8	<u>97.2</u>	75.0	70.8	12.5	70.8	57.3
CoWVLA [85]	97.2	97.8	94.6	92.8	95.6	79.2	66.7	<u>62.5</u>	95.8	<u>76.0</u>
ThinkAct [27]	88.3	91.4	87.1	70.9	84.4	58.3	37.5	8.7	70.8	43.8
VITA [53]	95.9	98.9	95.1	96.8	96.7	<u>84.2</u>	68.8	37.5	95.6	71.5
OA-WAM (Ours)	98.9	<u>99.0</u>	97.4	<u>95.9</u>	97.8	83.0	<u>71.1</u>	65.0	98.2	79.3

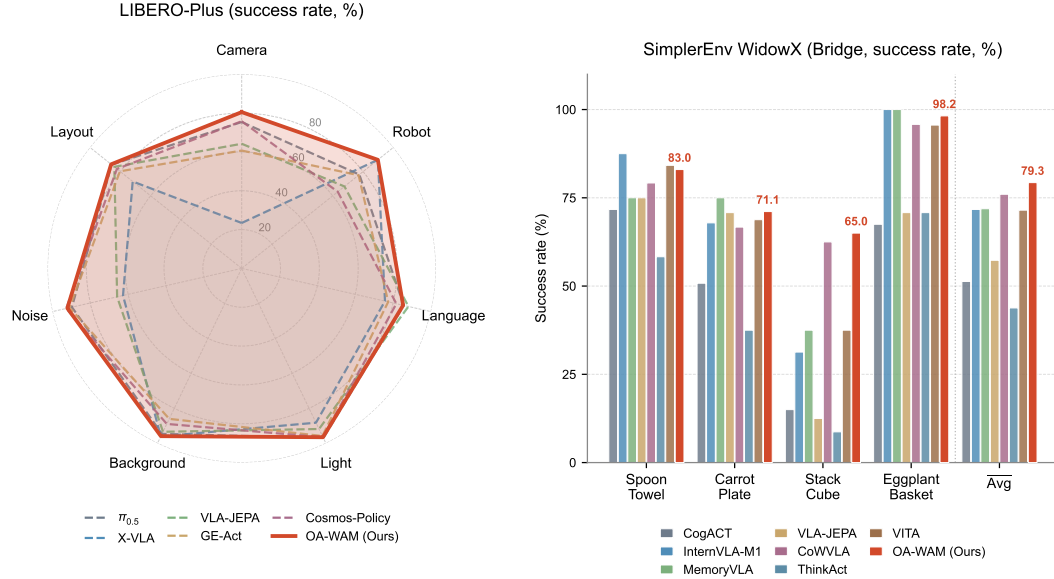


Figure 4: **Main results.** Left: LIBERO-Plus radar over the seven perturbation axes (Tab. 2); Right: SimplerEnv WidowX (Bridge) per-task success (Tab. 1). OA-WAM sets a new SOTA on the geometric LIBERO-Plus axes (Geo-Avg 84.3, +4.8% over $\pi_{0.5}$) and on SimplerEnv (79.3 avg).

4.2 Main results

Standard benchmarks. On LIBERO and SimplerEnv (Table 1), OA-WAM reaches 97.8 and 79.3 average success, beating the strongest prior baseline by +0.6% on LIBERO (VLA-JEPA, 97.2) and +3.3% on SimplerEnv (CoWVLA, 76.0). The slot-aware decomposition therefore does not give up in-distribution accuracy—a precondition for the robustness comparisons that follow.

Robustness benchmark. On LIBERO-Plus (Table 2), OA-WAM sets a new SOTA on the three geometric axes most aligned with our hypothesis (Geo Avg 84.3, +4.8% over $\pi_{0.5}$): all three preserve

Table 2: **Comparison on the LIBERO-Plus robustness benchmark (zero-shot, train on standard LIBERO only).** Success rate (%) over the seven perturbation axes (Camera / Robot init / Layout / Light / Background / Language / Sensor noise). **Geo Avg** = mean of Camera/Robot/Layout (the geometric axes per [19]). Baseline rows are from the zero-shot evaluation of [94] or each method’s original report. **Best** results are in bold, and second-best are underlined.

Method	Cam	Robot	Layout	Geo Avg	Light	BG	Lang	Noise	Avg
<i>Vision-Language-Action Models</i>									
OpenVLA-OFT [33]	56.4	31.9	74.2	54.2	88.7	93.3	79.5	75.8	69.6
π_0 [3]	13.8	6.0	68.9	29.6	85.0	81.4	58.8	79.0	53.6
$\pi_{0.5}$ [60]	75.4	77.5	85.7	<u>79.5</u>	96.9	94.6	85.6	<u>89.7</u>	85.7
ABot-M0 [87]	60.4	67.9	82.6	<u>70.3</u>	96.2	91.6	<u>86.4</u>	<u>86.4</u>	80.5
X-VLA [97]	23.4	89.7	71.8	61.6	88.2	96.0	75.7	62.7	71.4
AVA-VLA [83]	55.5	25.9	74.1	51.8	95.5	88.9	85.6	78.0	70.1
<i>World-Action Models</i>									
WorldVLA [10]	0.1	27.9	38.0	22.0	43.7	17.1	41.6	10.9	25.0
VLA-JEPA [73]	64.2	67.7	<u>83.9</u>	71.9	91.8	93.4	88.1	65.8	79.5
GE-Act [42]	60.7	77.0	80.2	72.6	95.8	86.0	77.4	90.9	80.3
HoloBrain-0 [43]	65.5	58.2	79.5	67.7	88.1	90.3	78.7	66.9	74.0
Cosmos-Policy [34]	<u>75.8</u>	63.3	82.2	73.8	<u>96.5</u>	88.9	81.7	92.7	82.2
OA-WAM (Ours)	80.5	<u>89.6</u>	82.8	84.3	<u>96.5</u>	<u>95.9</u>	85.3	75.6	<u>83.9</u>
Δ vs prior best	+4.7	−0.1	−2.9	+4.8	−0.4	−0.1	−2.8	−17.1	−1.8

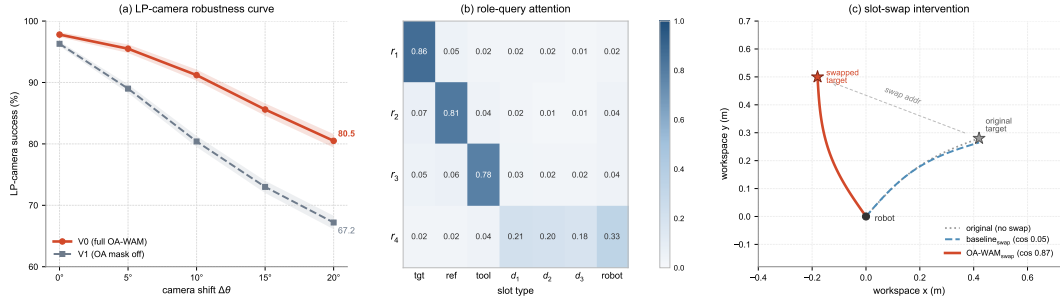


Figure 5: **Mechanism diagnostics (A1, A2).** (a) LP-camera success vs. camera-shift angle $\Delta\theta$: V0 (full OA-WAM) and V1 (key mask off) overlap in-distribution and split as $\Delta\theta$ grows. (b) Role-query attention from r_{1-4} (target/reference/tool/distractor) over slot types, averaged over 300 LIBERO-Spatial episodes. (c) End-effector trajectory under an A2 address swap: OA-WAM deflects toward the swapped target, the holistic baseline does not (cosines in Tab. 4).

target-object identity while geometrically rearranging the scene—exactly the regime where address-only routing pays off. OA-WAM is on par on appearance / language axes ($\pi_{0.5}$ ’s strengths) and lags on Sensor Noise by -17.1% —a slot-extraction failure (photometric distortion corrupts per-object content) rather than a policy-stage one. Table 4 confirms that the geometry-axis gains come from address-based binding rather than added capacity.

4.3 Ablation study

A1: object-addressability isolation. To isolate the OA constraint we compare three variants that share every other design choice—training pipeline, six-path tokenization, slot adapter, world/action heads, three random seeds, evaluation protocol—and differ only in two switches: the address-only key mask $\text{mask}_{\leq 32}$ from Eq. (3) and the per-layer address-stream reset hook (Tab. 3). **V0** (full OA-WAM) keeps both on; **V1** turns the key mask off; **V2** turns the reset hook off as well. Critically, V2 retains identical SAM 3 + DINOv3 + Qwen3-VL perception, slot tokenization, trunk weights, and training

Table 3: **A1 – isolating the object-addressability constraint.** Three variants identical except for the address-only key mask $\text{mask}_{\leq 32}$ (Eq. (3)) and the per-layer address-reset hook. Swap binding from A2 included for behavioural reference.

Variant	K mask	Reset hook	LIBERO	LP camera	LP robot	LP avg	SimplerEnv	Swap binding $\uparrow$
V2 (no OA at all)	off	off	95.4	60.5	64.8	76.2	56.7	0.06
V1 (mask off, hook on)	off	on	96.3	67.2	71.4	80.8	64.0	0.19
V0 (full OA-WAM, ours)	on	on	97.8	80.5	89.6	83.9	79.3	0.87

data as V0—the natural control for whether geometric-axis gains come from the heavy perception stack or from the OA constraint—and V0→V2 loses 20.0% on LP camera and 7.7% on LP avg, locating most of the geometric-axis effect in the OA constraint itself rather than in the perception front-end. Disabling the key mask alone (V0→V1) collapses LP camera by 13.3% and LP robot by 18.2%, while LIBERO moves by only 1.5%—an order-of-magnitude gap between in-distribution drift and geometric-OOD breakage. Removing the reset hook on top (V1→V2) pushes swap binding from 0.19 down to 0.06, attributing the remainder to per-layer address-stream isolation. The damage concentrates on the axes that preserve target identity while geometrically rearranging the scene, mirroring Table 2—the asymmetric signature of an OOD-specific inductive bias, not generic added capacity.

A2: causal slot intervention. A1 shows OA is necessary for OOD success; A2 asks the complementary mechanistic question—does the trained policy actually *route* target selection through the address subspace at inference? We swap the language-bound target slot’s address with another in-scene slot’s, hold all other inputs fixed, and measure the cosine alignment between the resulting end-effector residual trajectory and the displacement toward the swapped target (Tab. 4). OA-WAM reaches 0.87 while all eight holistic VLA / WAM baselines stay ≤ 0.09 . The same diagnostic localises the binding within our design space: removing the trunk OA constraint (V1) drops binding to 0.19 with the slot-aware head intact, and a mean-pool head drops it to 0.18 with OA enabled—both the trunk constraint and the addressable read-out must be in place. Fig. 5 shows the camera-shift sweep, role-query attention, and top-down trajectory deflection.

5 Conclusion

OA-WAM makes world-action modeling object-addressable: a slot-aware 7B trunk routes cross-slot attention through a frozen per-object identity address. It leads on LIBERO and SimplerEnv and sets a new SOTA on the geometric LIBERO-Plus axes (+4.8% Geo Avg over $\pi_{0.5}$); the bias is also *verifiable*—swap binding 0.87 vs ≤ 0.09 for every holistic baseline and OA isolation specifically degrading geometric axes while leaving LIBERO essentially unchanged—offering a verifiable design path toward world-action models that stay stable when scenes are geometrically rearranged while target identity is preserved.

Limitations. Validation is simulator-only; reported robustness does not yet prove real-robot deployment. The frozen tokenizer fails on small reflective, transparent, occluded, or motion-blurred objects, accounting for the −17.1% Sensor Noise deficit (slot-extraction rather than policy failure; App. I). The distractor-consistency loss also assumes weak target/distractor coupling. Perception costs ~ 95 ms/frame vs. ~ 5.6 ms for trunk+head (App. G).

Table 4: **A2 – causal slot intervention (swap binding).** Test-time address swap between the language-bound target slot and another in-scene slot, all other inputs fixed; metric is cosine alignment between the end-effector residual trajectory and the displacement direction toward the swapped target.

Method	Swap binding $\uparrow$
OpenVLA [32]	0.04
π_0 [3]	0.05
$\pi_{0.5}$ [60]	0.05
OpenVLA-OFT [33]	0.06
WorldVLA [10]	0.09
VLA-JEPA [73]	0.07
Cosmos-Policy [34]	0.06
GE-Act [42]	0.07
OA-WAM (V1, mask off)	0.19
OA-WAM (mean pool head)	0.18
OA-WAM (full, ours)	0.87

References

- [1] Shuai Bai, Yuxuan Cai, Ruizhe Chen, Keqin Chen, Xionghui Chen, Zesen Cheng, Lianghao Deng, Wei Ding, Chang Gao, Chunjiang Ge, et al. Qwen3-VL technical report. *arXiv preprint arXiv:2511.21631*, 2025.
- [2] Rokas Bendikis, Daniel Dijkman, Markus Peschl, Sanjay Haresh, and Pietro Mazzaglia. Focusing on what matters: Object-Agent-centric Tokenization for Vision Language Action models. *arXiv preprint arXiv:2509.23655*, 2025.
- [3] Kevin Black, Noah Brown, Danny Driess, Adnan Esmail, Michael Equi, Chelsea Finn, Niccolo Fusai, Lachy Groom, Karol Hausman, Brian Ichter, et al. π_0 : A Vision-Language-Action flow model for general robot control. In *Robotics: Science and Systems (RSS)*, 2025. arXiv:2410.24164.
- [4] Aleksei Bochkovskii, Amael Delaunoy, Hugo Germain, Marcel Santos, Yichao Zhou, Stephan R. Richter, and Vladlen Koltun. Depth Pro: Sharp monocular metric depth in less than a second. *arXiv preprint arXiv:2410.02073*, 2024.
- [5] Anthony Brohan, Noah Brown, Justice Carbajal, Yevgen Chebotar, Joseph Dabis, Chelsea Finn, Keerthana Gopalakrishnan, Karol Hausman, Alex Herzog, Jasmine Hsu, et al. RT-1: Robotics transformer for real-world control at scale. *arXiv preprint arXiv:2212.06817*, 2022.
- [6] Christopher P. Burgess, Loic Matthey, Nicholas Watters, Rishabh Kabra, Irina Higgins, Matt Botvinick, and Alexander Lerchner. MONet: Unsupervised scene decomposition and representation. *arXiv preprint arXiv:1901.11390*, 2019.
- [7] Nicolas Carion, Laura Gustafson, Yuan-Ting Hu, Shoubhik Debnath, Ronghang Hu, Didac Suris, Chaitanya Ryali, Kalyan Vasudev Alwala, Haitham Khedr, Andrew Huang, et al. SAM 3: Segment Anything with concepts. *arXiv preprint arXiv:2511.16719*, 2025.
- [8] Mathilde Caron, Hugo Touvron, Ishan Misra, Hervé Jégou, Julien Mairal, Piotr Bojanowski, and Armand Joulin. Emerging properties in self-supervised vision transformers. In *IEEE/CVF International Conference on Computer Vision (ICCV)*, 2021. arXiv:2104.14294.
- [9] Jun Cen, Siteng Huang, Yuqian Yuan, Kehan Li, Hangjie Yuan, Chaohui Yu, Yuming Jiang, Jiayan Guo, Xin Li, Hao Luo, et al. RynnVLA-002: A unified Vision-Language-Action and world model. *arXiv preprint arXiv:2511.17502*, 2025.
- [10] Jun Cen, Chaohui Yu, Hangjie Yuan, Yuming Jiang, Siteng Huang, Jiayan Guo, Xin Li, Yibing Song, Hao Luo, Fan Wang, Deli Zhao, and Hao Chen. WorldVLA: Towards autoregressive action world model. *arXiv preprint arXiv:2506.21539*, 2025.
- [11] Chameleon Team. Chameleon: Mixed-modal early-fusion foundation models. *arXiv preprint arXiv:2405.09818*, 2024.
- [12] Alexandre Chapin, Emmanuel Dellandréa, and Liming Chen. STORM: Slot-based task-aware object-centric representation for robotic manipulation. *arXiv preprint arXiv:2601.20381*, 2026.
- [13] Haonan Chen, Jingxiang Guo, Bangjun Wang, Tianrui Zhang, Xuchuan Huang, Boren Zheng, Yiwen Hou, Chenrui Tie, Jiajun Deng, and Lin Shao. Goal-VLA: Image-generative VLMs as object-centric world models empowering zero-shot robot manipulation. *arXiv preprint arXiv:2506.23919*, 2025.
- [14] Xinyi Chen, Yilun Chen, Yanwei Fu, Ning Gao, Jiaya Jia, et al. InternVLA-M1: A spatially guided vision-language-action framework for generalist robot policy. *arXiv preprint arXiv:2510.13778*, 2025.
- [15] Cheng Chi, Zhenjia Xu, Siyuan Feng, Eric Cousineau, Yilun Du, Benjamin Burchfiel, Russ Tedrake, and Shuran Song. Diffusion Policy: Visuomotor policy learning via action diffusion. In *Robotics: Science and Systems (RSS)*, 2023. arXiv:2303.04137.
- [16] Yilun Du, Mengjiao Yang, Bo Dai, Hanjun Dai, Ofir Nachum, Joshua B. Tenenbaum, Dale Schuurmans, and Pieter Abbeel. Learning universal policies via text-guided video generation. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2023. arXiv:2302.00111.
- [17] Gamaleldin F. Elsayed, Aravindh Mahendran, Sjoerd van Steenkiste, Klaus Greff, Michael C. Mozer, and Thomas Kipf. SAVi++: Towards end-to-end object-centric learning from real-world videos. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2022. arXiv:2206.07764.
- [18] Martin Engelcke, Adam R. Kosior, Oiwi Parker Jones, and Ingmar Posner. GENESIS: Generative scene inference and sampling with object-centric latent representations. In *International Conference on Learning Representations (ICLR)*, 2020. arXiv:1907.13052.

- [19] Senyu Fei, Siyin Wang, Junhao Shi, Zihao Dai, Jikun Cai, Pengfang Qian, Li Ji, Xinzhe He, Shiduo Zhang, Zhaoye Fei, et al. LIBERO-Plus: In-depth robustness analysis of Vision-Language-Action models. *arXiv preprint arXiv:2510.13626*, 2025.
- [20] Stefano Ferraro, Pietro Mazzaglia, Tim Verbelen, and Bart Dhoedt. FOCUS: Object-centric world models for robotics manipulation. *arXiv preprint arXiv:2307.02427*, 2023.
- [21] Jiahui Fu, Junyu Nan, Lingfeng Sun, Hongyu Li, Jianing Qian, Jennifer L. Barry, Kris Kitani, and George Konidaris. NovaPlan: Zero-shot long-horizon manipulation via closed-loop video language planning. *arXiv preprint arXiv:2602.20119*, 2026.
- [22] Klaus Greff, Raphael Lopez Kaufman, Rishabh Kabra, Nick Watters, Chris Burgess, Daniel Zoran, Loic Matthey, Matthew Botvinick, and Alexander Lerchner. Multi-object representation learning with iterative variational inference. In *International Conference on Machine Learning (ICML)*, 2019. arXiv:1903.00450.
- [23] Jianing Guo, Zhenhong Wu, Chang Tu, Yiyao Ma, Xiangqi Kong, Zhiqian Liu, Jiaming Ji, Shuning Zhang, Yuanpei Chen, Kai Chen, et al. On robustness of Vision-Language-Action model against multi-modal perturbations. *arXiv preprint arXiv:2510.00037*, 2025.
- [24] Danijar Hafner, Jurgis Pasukonis, Jimmy Ba, and Timothy Lillicrap. Mastering diverse domains through world models. *Nature*, 2025. arXiv:2301.04104.
- [25] Nicklas Hansen, Hao Su, and Xiaolong Wang. TD-MPC2: Scalable, robust world models for continuous control. In *International Conference on Learning Representations (ICLR)*, 2024. arXiv:2310.16828.
- [26] Taisei Hanyu, Nhat Chung, Huy Le, Toan Nguyen, Yuki Ikebe, Anthony Gunderman, Duy Ho Minh Nguyen, Khoa Vo, Tung Kieu, Kashu Yamazaki, et al. SlotVLA: Towards modeling of object-relation representations in robotic manipulation. *arXiv preprint arXiv:2511.06754*, 2025.
- [27] Chi-Pin Huang, Yueh-Hua Wu, Min-Hung Chen, Yu-Chiang Frank Wang, and Fu-En Yang. ThinkAct: Vision-language-action reasoning via reinforced visual latent planning. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2025. arXiv:2507.16815.
- [28] Chia-Yu Hung, Qi Sun, Pengfei Hong, Amir Zadeh, Chuan Li, U-Xuan Tan, Navonil Majumder, and Soujanya Poria. NORA: A small open-sourced generalist vision language action model for embodied tasks. *arXiv preprint arXiv:2504.19854*, 2025.
- [29] Youngjoon Jeong, Junha Chun, Soonwoo Cha, and Taesup Kim. Object-centric world model for language-guided manipulation. *arXiv preprint arXiv:2503.06170*, 2025.
- [30] Yunfan Jiang, Agrim Gupta, Zichen Zhang, Guanzhi Wang, Yongqiang Dou, Yanjun Chen, Li Fei-Fei, Anima Anandkumar, Yuke Zhu, and Linxi Fan. VIMA: General robot manipulation with multimodal prompts. In *International Conference on Machine Learning (ICML)*, 2023. arXiv:2210.03094.
- [31] Alexander Khazatsky, Karl Pertsch, Suraj Nair, Ashwin Balakrishna, Sudeep Dasari, Siddharth Karamcheti, et al. DROID: A large-scale in-the-wild robot manipulation dataset. In *Robotics: Science and Systems (RSS)*, 2024. arXiv:2403.12945.
- [32] Moo Jin Kim, Karl Pertsch, Siddharth Karamcheti, Ted Xiao, Ashwin Balakrishna, Suraj Nair, Rafael Rafailov, Ethan Foster, Grace Lam, Pannag Sanketi, et al. OpenVLA: An open-source Vision-Language-Action model. *arXiv preprint arXiv:2406.09246*, 2024.
- [33] Moo Jin Kim, Chelsea Finn, and Percy Liang. Fine-tuning Vision-Language-Action models: Optimizing speed and success. In *Robotics: Science and Systems (RSS)*, 2025. arXiv:2502.19645.
- [34] Moo Jin Kim, Yihuai Gao, Tsung-Yi Lin, Yen-Chen Lin, Yunhao Ge, et al. Cosmos Policy: Fine-tuning video models for visuomotor control and planning. *arXiv preprint arXiv:2601.16163*, 2026.
- [35] Thomas Kipf, Gamaleldin F. Elsayed, Aravindh Mahendran, Austin Stone, Sara Sabour, Georg Heigold, Rico Jonschkowski, Alexey Dosovitskiy, and Klaus Greff. Conditional object-centric learning from video. In *International Conference on Learning Representations (ICLR)*, 2022. arXiv:2111.12594.
- [36] Alexander Kirillov, Eric Mintun, Nikhila Ravi, Hanzi Mao, Chloe Rolland, Laura Gustafson, Tete Xiao, Spencer Whitehead, Alexander C. Berg, Wan-Yen Lo, et al. Segment Anything. In *IEEE/CVF International Conference on Computer Vision (ICCV)*, 2023. arXiv:2304.02643.
- [37] Hugo Laurençon, Léo Tronchon, Matthieu Cord, and Victor Sanh. What matters when building vision-language models? *arXiv preprint arXiv:2405.02246*, 2024.

- [38] Lin Li, Qihang Zhang, Yiming Luo, Shuai Yang, Ruilin Wang, Fei Han, Mingrui Yu, Zelin Gao, Nan Xue, Xing Zhu, et al. Causal world modeling for robot control. *arXiv preprint arXiv:2601.21998*, 2026.
- [39] Qixiu Li, Yaobo Liang, Zeyu Wang, Lin Luo, Xi Chen, Mozheng Liao, Fangyun Wei, Yu Deng, Sicheng Xu, Yizhong Zhang, et al. CogACT: A foundational vision-language-action model for synergizing cognition and action in robotic manipulation. *arXiv preprint arXiv:2411.19650*, 2024.
- [40] Xuanlin Li, Kyle Hsu, Jiayuan Gu, Karl Pertsch, Oier Mees, Homer Rich Walke, Chuyuan Fu, Ishikaa Lunawat, Isabel Sieh, Sean Kirmani, et al. Evaluating real-world robot manipulation policies in simulation. In *Conference on Robot Learning (CoRL)*, 2024. arXiv:2405.05941.
- [41] Ying Li, Xiaobao Wei, Xiaowei Chi, Yuming Li, Zhongyu Zhao, Hao Wang, Ningning Ma, Ming Lu, and Shanghang Zhang. ManipDreamer: Boosting robotic manipulation world model with action tree and visual guidance. *arXiv preprint arXiv:2504.16464*, 2025.
- [42] Yue Liao, Pengfei Zhou, Siyuan Huang, Donglin Yang, Shengcong Chen, et al. Genie Envisioner: A unified world foundation platform for robotic manipulation. *arXiv preprint arXiv:2508.05635*, 2025.
- [43] Xuewu Lin, Tianwei Lin, Yun Du, Hongyu Xie, Yiwei Jin, Jiawei Li, Shijie Wu, Qingze Wang, Mengdi Li, Mengao Zhao, Ziang Li, Chaodong Huang, Hongzhe Bi, Lichao Huang, and Zhizhong Su. HoloBrain-0 technical report. *arXiv preprint arXiv:2602.12062*, 2026.
- [44] Yaron Lipman, Ricky T. Q. Chen, Heli Ben-Hamu, Maximilian Nickel, and Matt Le. Flow Matching for generative modeling. In *International Conference on Learning Representations (ICLR)*, 2023. arXiv:2210.02747.
- [45] Bo Liu, Yifeng Zhu, Chongkai Gao, Yihao Feng, Qiang Liu, Yuke Zhu, and Peter Stone. LIBERO: Benchmarking knowledge transfer for lifelong robot learning. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2023. arXiv:2306.03310.
- [46] Dongyang Liu, Shitian Zhao, Le Zhuo, Weifeng Lin, Yi Xin, Xinyue Li, Qi Qin, Yu Qiao, Hongsheng Li, and Peng Gao. Lumina-mGPT: Illuminate flexible photorealistic text-to-image generation with multimodal generative pretraining. *arXiv preprint arXiv:2408.02657*, 2024.
- [47] Haotian Liu, Chunyuan Li, Qingyang Wu, and Yong Jae Lee. Visual instruction tuning. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2023. arXiv:2304.08485.
- [48] Songming Liu, Lingxuan Wu, Bangguo Li, Hengkai Tan, Huayu Chen, Zhengyi Wang, Ke Xu, Hang Su, and Jun Zhu. RDT-1B: a diffusion foundation model for bimanual manipulation. *arXiv preprint arXiv:2410.07864*, 2024.
- [49] Yuejiang Liu, Fan Feng, Lingjing Kong, Weifeng Lu, Jinzhou Tang, Kun Zhang, Kevin Murphy, Chelsea Finn, and Yilun Du. World action verifier: Self-improving world models via forward-inverse asymmetry. *arXiv preprint arXiv:2604.01985*, 2026.
- [50] Francesco Locatello, Dirk Weissenborn, Thomas Unterthiner, Aravindh Mahendran, Georg Heigold, Jakob Uszkoreit, Alexey Dosovitskiy, and Thomas Kipf. Object-centric learning with slot attention. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2020. arXiv:2006.15055.
- [51] Hao Luo, Wanpeng Zhang, Yicheng Feng, Sipeng Zheng, Haiweng Xu, Chaoyi Xu, Ziheng Xi, Yuhui Fu, and Zongqing Lu. Being-H0.7: A latent world-action model from egocentric videos. *arXiv preprint arXiv:2605.00078*, 2026.
- [52] Qi Lv, Weijie Kong, Hao Li, Jia Zeng, Zherui Qiu, et al. F1: A vision-language-action model bridging understanding and generation to actions. *arXiv preprint arXiv:2509.06951*, 2025.
- [53] Xiangkai Ma, Lekai Xing, Han Zhang, Wenzhong Li, and Sanglu Lu. Unifying perception and action: A hybrid-modality pipeline with implicit visual chain-of-thought for robotic action generation. *arXiv preprint arXiv:2511.19859*, 2025.
- [54] Malte Mosbach, Jan Niklas Ewertz, Angel Villar-Corrales, and Sven Behnke. SOLD: Slot object-centric latent dynamics models for relational manipulation learning from pixels. *arXiv preprint arXiv:2410.08822*, 2024.
- [55] Soroush Nasiriany, Abhiram Maddukuri, Lance Zhang, Adeet Parikh, Aaron Lo, Abhishek Joshi, Ajay Mandlekar, and Yuke Zhu. RoboCasa: Large-scale simulation of everyday tasks for generalist robots. *arXiv preprint arXiv:2406.02523*, 2024.

- [56] NVIDIA GEAR Team. GR00T N1.5: An improved open foundation model for generalist humanoid robots. NVIDIA Research Blog, June 2025. https://research.nvidia.com/labs/gear/gr00t-n1_5/.
- [57] Octo Model Team, Dibya Ghosh, Homer Walke, Karl Pertsch, Kevin Black, Oier Mees, Sudeep Dasari, Joey Hejna, Tobias Kreiman, Charles Xu, et al. Octo: An open-source generalist robot policy. In *Robotics: Science and Systems (RSS)*, 2024. arXiv:2405.12213.
- [58] Open X-Embodiment Collaboration, Abby O’Neill, Abdul Rehman, Abhinav Gupta, Abhiram Maddukuri, Abhishek Gupta, Abhishek Padalkar, Abraham Lee, Acorn Pooley, Agrim Gupta, et al. Open X-Embodiment: Robotic learning datasets and RT-X models. *arXiv preprint arXiv:2310.08864*, 2023.
- [59] Maxime Oquab, Timothée Darcet, Théo Moutakanni, Huy V. Vo, Marc Szafraniec, Vasil Khalidov, Pierre Fernandez, Daniel Haziza, Francisco Massa, Alaaeldin El-Nouby, et al. DINOv2: Learning robust visual features without supervision. *Transactions on Machine Learning Research*, 2024. arXiv:2304.07193.
- [60] Physical Intelligence, Kevin Black, Noah Brown, James Darpinian, Karan Dhabalia, Danny Driess, Adnan Esmail, Michael Equi, Chelsea Finn, Niccolo Fusai, et al. $\pi_{0.5}$: a Vision-Language-Action model with open-world generalization. *arXiv preprint arXiv:2504.16054*, 2025.
- [61] Wilbert Pumacay, Ishika Singh, Jiafei Duan, Ranjay Krishna, Jesse Thomason, and Dieter Fox. THE COLOSSEUM: A benchmark for evaluating generalization for robotic manipulation. *arXiv preprint arXiv:2402.08191*, 2024.
- [62] Delin Qu, Haoming Song, Qizhi Chen, Yuanqi Yao, Xinyi Ye, Yan Ding, Zhigang Wang, Jiayuan Gu, Bin Zhao, Dong Wang, and Xuelong Li. SpatialVLA: Exploring spatial representations for Visual-Language-Action model. *arXiv preprint arXiv:2501.15830*, 2025.
- [63] Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, et al. Learning transferable visual models from natural language supervision. In *International Conference on Machine Learning (ICML)*, 2021. arXiv:2103.00020.
- [64] Colin Raffel, Noam Shazeer, Adam Roberts, Katherine Lee, Sharan Narang, Michael Matena, Yanqi Zhou, Wei Li, and Peter J. Liu. Exploring the limits of transfer learning with a unified text-to-text transformer. *Journal of Machine Learning Research*, 2020. arXiv:1910.10683.
- [65] Nikhila Ravi, Valentin Gabeur, Yuan-Ting Hu, Ronghang Hu, Chaitanya Ryali, Tengyu Ma, Haitham Khedr, Roman Rädle, Chloe Rolland, Laura Gustafson, et al. SAM 2: Segment Anything in images and videos. *arXiv preprint arXiv:2408.00714*, 2024.
- [66] Hao Shi, Bin Xie, Yingfei Liu, Lin Sun, Fengrong Liu, et al. MemoryVLA: Perceptual-cognitive memory in vision-language-action models for robotic manipulation. *arXiv preprint arXiv:2508.19236*, 2025.
- [67] Mohit Shridhar, Lucas Manuelli, and Dieter Fox. CLIPort: What and where pathways for robotic manipulation. In *Conference on Robot Learning (CoRL)*, 2021. arXiv:2109.12098.
- [68] Mohit Shridhar, Lucas Manuelli, and Dieter Fox. Perceiver-Actor: A multi-task transformer for robotic manipulation. In *Conference on Robot Learning (CoRL)*, 2022. arXiv:2209.05451.
- [69] Mustafa Shukor, Dana Aubakirova, Francesco Capuano, Pepijn Kooijmans, Steven Palma, Adil Zouitine, Michel Aractingi, Caroline Pascal, Martino Russi, Andres Marafioti, et al. SmolVLA: A Vision-Language-Action model for affordable and efficient robotics. *arXiv preprint arXiv:2506.01844*, 2025.
- [70] Oriane Siméoni, Huy V. Vo, Maximilian Seitzer, Federico Baldassarre, Maxime Oquab, Cijo Jose, Vasil Khalidov, Marc Szafraniec, Seungeun Yi, Michaël Ramamonjisoa, et al. DINOv3. *arXiv preprint arXiv:2508.10104*, 2025.
- [71] Gautam Singh, Yi-Fu Wu, and Sungjin Ahn. Simple unsupervised object-centric learning for complex and naturalistic videos. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2022. arXiv:2205.14065.
- [72] Yue Su, Sijin Chen, Haixin Shi, Mingyu Liu, Zhengshen Zhang, Ningyuan Huang, Weiheng Zhong, Zhengbang Zhu, Yuxiao Liu, and Xihui Liu. World Guidance: World modeling in condition space for action generation. *arXiv preprint arXiv:2602.22010*, 2026.
- [73] Jingwen Sun, Wenyao Zhang, Zekun Qi, Shaojie Ren, Zezhi Liu, et al. VLA-JEPA: Enhancing vision-language-action model with latent world model. *arXiv preprint arXiv:2602.10098*, 2026.

- [74] Khoa Vo, Taisei Hanyu, Yuki Ikebe, Trong Thang Pham, Nhat Chung, Minh Nhat Vu, Duy Ho Minh Nguyen, Anh Nguyen, Anthony Gunderman, Chase Rainwater, and Ngan Le. Clutter-robust Vision-Language-Action models through object-centric and geometry grounding. *arXiv preprint arXiv:2512.22519*, 2025.
- [75] Homer Walke, Kevin Black, Abraham Lee, Moo Jin Kim, Max Du, Chongyi Zheng, Tony Zhao, Philippe Hansen-Estruch, Quan Vuong, Andre He, Vivek Myers, Kuan Fang, Chelsea Finn, and Sergey Levine. BridgeData V2: A dataset for robot learning at scale. In *Conference on Robot Learning (CoRL)*, 2023. arXiv:2308.12952.
- [76] Guodong Wang, Chenkai Zhang, Qingjie Liu, Jinjin Zhang, Jiancheng Cai, Junjie Liu, and Xinmin Liu. LIBERO-X: Robustness litmus for Vision-Language-Action models. *arXiv preprint arXiv:2602.06556*, 2026.
- [77] Jianyuan Wang, Minghao Chen, Nikita Karaev, Andrea Vedaldi, Christian Rupprecht, and David Novotny. VGGT: Visual geometry grounded transformer. In *IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 2025. arXiv:2503.11651.
- [78] Junke Wang, Yi Jiang, Zehuan Yuan, Binyue Peng, Zuxuan Wu, and Yu-Gang Jiang. OmniTokenizer: A joint image-video tokenizer for visual generation. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2024. arXiv:2406.09399.
- [79] Yuqi Wang, Xinghang Li, Wenxuan Wang, Junbo Zhang, Yingyan Li, Yuntao Chen, Xinlong Wang, and Zhaoxiang Zhang. Unified Vision-Language-Action model. *arXiv preprint arXiv:2506.19850*, 2025.
- [80] Bowen Wen, Wei Yang, Jan Kautz, and Stan Birchfield. FoundationPose: Unified 6D pose estimation and tracking of novel objects. In *IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 2024. arXiv:2312.08344.
- [81] Ziyi Wu, Nikita Dvornik, Klaus Greff, Thomas Kipf, and Animesh Garg. SlotFormer: Unsupervised visual dynamics simulation with object-centric models. In *International Conference on Learning Representations (ICLR)*, 2023. arXiv:2210.05861.
- [82] Ziyi Wu, Jingyu Hu, Wuyue Lu, Igor Gilitschenski, and Animesh Garg. SlotDiffusion: Object-centric generative modeling with diffusion models. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2023. arXiv:2305.11281.
- [83] Lei Xiao, Jifeng Li, Juntao Gao, Feiyang Ye, Yan Jin, Jingjing Qian, Jing Zhang, Yong Wu, and Xiaoyuan Yu. AVA-VLA: Improving Vision-Language-Action models with active visual attention. *arXiv preprint arXiv:2511.18960*, 2025.
- [84] Yuhan Xie, Yuping Yan, Yunqi Zhao, Handing Wang, and Yaochu Jin. STRONG-VLA: Decoupled robustness learning for Vision-Language-Action models under multimodal perturbations. *arXiv preprint arXiv:2604.10055*, 2026.
- [85] Fuxiang Yang, Donglin Di, Lulu Tang, Xuancheng Zhang, Lei Fan, et al. Chain of World: World model thinking in latent motion. *arXiv preprint arXiv:2603.03195*, 2026.
- [86] Jiazhi Yang, Kunyang Lin, Jinwei Li, Wencong Zhang, Tianwei Lin, Longyan Wu, Zhizhong Su, Hao Zhao, Ya-Qin Zhang, Li Chen, Ping Luo, Xiangyu Yue, and Hongyang Li. RISE: Self-improving robot policy with compositional world model. *arXiv preprint arXiv:2602.11075*, 2026.
- [87] Yandan Yang, Shuang Zeng, Tong Lin, Xinyuan Chang, Dekang Qi, et al. ABot-M0: VLA foundation model for robotic manipulation with action manifold learning. *arXiv preprint arXiv:2602.11236*, 2026.
- [88] Yue Yang, Shuo Cheng, Yu Fang, Homanga Bharadhwaj, Mingyu Ding, Gedas Bertasius, and Daniel Szafrir. LiLo-VLA: Compositional long-horizon manipulation via linked object-centric policies. *arXiv preprint arXiv:2602.21531*, 2026.
- [89] Seonghyeon Ye, Yunhao Ge, Kaiyuan Zheng, Shenyuan Gao, Sihyun Yu, George Kurian, Suneel Indupuru, You Liang Tan, Chuning Zhu, Jiannan Xiang, et al. World action models are zero-shot policies. *arXiv preprint arXiv:2602.15922*, 2026.
- [90] Ge Yuan, Qiyuan Qiao, Jing Zhang, and Dong Xu. AdaWorldPolicy: World-model-driven diffusion policy with online adaptive learning for robotic manipulation. *arXiv preprint arXiv:2602.20057*, 2026.
- [91] Tianyuan Yuan, Zibin Dong, Yicheng Liu, and Hang Zhao. Fast-WAM: Do world action models need test-time future imagination? *arXiv preprint arXiv:2603.16666*, 2026.

- [92] Andy Zeng, Pete Florence, Jonathan Tompson, Stefan Welker, Jonathan Chien, Maria Attarian, Travis Armstrong, Ivan Krasin, Dan Duong, Ayzaan Wahid, Vikas Sindhwani, and Johnny Lee. Transporter Networks: Rearranging the visual world for robotic manipulation. In *Conference on Robot Learning (CoRL)*, 2020. arXiv:2010.14406.
- [93] Xiaohua Zhai, Basil Mustafa, Alexander Kolesnikov, and Lucas Beyer. Sigmoid loss for language image pre-training. In *IEEE/CVF International Conference on Computer Vision (ICCV)*, 2023. arXiv:2303.15343.
- [94] Zhanguang Zhang, Zhiyuan Li, Behnam Rahmati, Rui Heng Yang, Yintao Ma, Amir Rasouli, Sajjad Pakdamansavoji, Yangzheng Wu, Lingfeng Zhang, Tongtong Cao, Feng Wen, Xinyu Wang, Xingyue Quan, and Yingxue Zhang. Do world action models generalize better than VLAs? A robustness study. *arXiv preprint arXiv:2603.22078*, 2026.
- [95] Qingqing Zhao, Yao Lu, Moo Jin Kim, Zipeng Fu, Zhuoyang Zhang, Yecheng Wu, Zhaoshuo Li, Qianli Ma, Song Han, Chelsea Finn, et al. CoT-VLA: Visual chain-of-thought reasoning for Vision-Language-Action models. In *IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2025. arXiv:2503.22020.
- [96] Tony Z. Zhao, Vikash Kumar, Sergey Levine, and Chelsea Finn. Learning fine-grained bimanual manipulation with low-cost hardware. In *Robotics: Science and Systems (RSS)*, 2023. arXiv:2304.13705.
- [97] Jinliang Zheng, Jianxiong Li, Zhihao Wang, Dongxiu Liu, Xirui Kang, Yuchun Feng, Yinan Zheng, Jiayin Zou, Yilun Chen, Jia Zeng, et al. X-VLA: Soft-prompted transformer as scalable cross-embodiment Vision-Language-Action model. *arXiv preprint arXiv:2510.10274*, 2025.
- [98] Siyuan Zhou, Yilun Du, Jiaben Chen, Yandong Li, Dit-Yan Yeung, and Chuang Gan. RoboDreamer: Learning compositional world models for robot imagination. In *International Conference on Machine Learning (ICML)*, 2024. arXiv:2404.12377.
- [99] Xueyang Zhou, Yangming Xu, Guiyao Tie, Yongchao Chen, Guowen Zhang, Duanfeng Chu, Pan Zhou, and Lichao Sun. LIBERO-PRO: Towards robust and fair evaluation of Vision-Language-Action models beyond memorization. *arXiv preprint arXiv:2510.03827*, 2025.
- [100] Yi Zhou, Connelly Barnes, Jingwan Lu, Jimei Yang, and Hao Li. On the continuity of rotation representations in neural networks. In *IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 2019. arXiv:1812.07035.
- [101] Chuning Zhu, Raymond Yu, Siyuan Feng, Benjamin Burchfiel, Paarth Shah, and Abhishek Gupta. Unified world models: Coupling video and action diffusion for pretraining on large robotic datasets. *arXiv preprint arXiv:2504.02792*, 2025.
- [102] Brianna Zitkovich, Tianhe Yu, Sichun Xu, Peng Xu, Ted Xiao, Fei Xia, Jialin Wu, Paul Wohlhart, Stefan Welker, Ayzaan Wahid, et al. RT-2: Vision-Language-Action models transfer web knowledge to robotic control. In *Conference on Robot Learning (CoRL)*, 2023. arXiv:2307.15818.

A Pseudocode

Algorithm 1 gives one closed-loop inference step at time t , and Algorithm 2 gives one Stage-II gradient step. The two share the same forward computation through the slot-aware trunk and only differ at the head outputs (Euler-integrated action sampling vs. flow-matching loss) and the post-forward training updates. Symbols match the main text.

Algorithm 1 OA-WAM inference step at time t .

Require: observation $(\mathbf{I}_t, \mathbf{q}_t, \ell, \mathbf{a}_{<t})$, trained θ , episode-cached $\{\mathbf{addr}_k\}$ (computed at $t=0$).
Perception — frozen; SAM 3 / DINOv3 / VQ-GAN per frame; Qwen3-VL cached after $t=0$.
1: $\{P\} \leftarrow \text{QWEN3-VL}(\ell)$
2: $\{M_k^t\} \leftarrow \text{SAM3}(\mathbf{I}_t, \{P\})$
3: $\mathbf{V}_t \leftarrow \text{VQ-GAN}(\mathbf{I}_t)$
4: $\mathbf{f}_k^t \leftarrow \text{DINOv3}(\mathbf{I}_t, M_k^t)$
5: $\mathbf{raw}_k^t \leftarrow [\mathbf{f}_k^t, \mathbf{p}_k^t, \ell_k, \text{shape}_k]$
Sequence construction.
6: **if** $t=0$ **then**
7: $\mathbf{addr}_k \leftarrow f_{\text{addr}}([\ell_k \| \mathbf{f}_k^0])$
8: **end if**
9: $\mathbf{cnt}_k^t \leftarrow f_{\text{cnt}}(\mathbf{raw}_k^t)$
10: $\mathbf{e}_k^t \leftarrow f_{\phi}([\mathbf{addr}_k \| \mathbf{cnt}_k^t \| \boldsymbol{\pi}^t \| \boldsymbol{\rho}_k])$
11: $\mathbf{E} \leftarrow \text{MASKED_SCATTER}(\text{embed_tokens}(\mathbf{x}_{1:L}), \{\mathbf{e}_k^t\})$
12: build token-type vector $\boldsymbol{\tau}$ and block-causal mask $\mathbf{M}$
Slot-aware trunk — every layer applies Eq. (3) on slot positions and resets the $\mathbf{addr}$ stream.
13: $\mathbf{H} \leftarrow \text{SLOT_AWARE_TRUNK}_{\theta}(\mathbf{E}, \boldsymbol{\tau}, \mathbf{M}; \{\mathbf{addr}_k\})$
Head readout.
14: $\hat{\mathbf{c}}_k^{t+1}, \hat{\mathbf{p}}_k^{t+1} \leftarrow h_{\psi}(\mathbf{H}_{\text{slot}})$ ▷ world head, Eq. (4)
15: $\mathbf{A}_t \leftarrow \text{EULER}_4(h_{\xi}; \mathbf{H}_{\text{ACT_Q}})$ ▷ flow-matching sampling, Eq. (7)
16: **return** $\mathbf{A}_t, \hat{\mathcal{S}}_{t+1} = \{(\hat{\mathbf{c}}_k^{t+1}, \hat{\mathbf{p}}_k^{t+1})\}_k$

Algorithm 2 OA-WAM Stage-II training step (one mini-batch).

Require: demonstration $(\mathbf{I}_t, \mathbf{q}_t, \ell, \mathbf{a}_{<t})$ with targets $\mathbf{A}_t^*, \mathbf{c}_k^{t+1*}, \mathbf{p}_k^{t+1*}, \mathbf{V}_{1:T}^*$; trainable $\theta = \{\phi, \psi, \xi, \text{LoRA}\}$.
1: Run the perception, sequence-construction, and slot-aware-trunk blocks of Algorithm 1 to obtain $\mathbf{H}$
2: $\hat{\mathbf{c}}_k^{t+1}, \hat{\mathbf{p}}_k^{t+1} \leftarrow h_{\psi}(\mathbf{H}_{\text{slot}})$ ▷ world-head forward as in inference
Loss assembly.
3: $\mathcal{L}_{\text{world}} \leftarrow \sum_k m_k^{\text{obj}} (\|\hat{\mathbf{c}}_k^{t+1} - \mathbf{c}_k^{t+1*}\|^2 + \lambda_p \|\hat{\mathbf{p}}_k^{t+1} - \mathbf{p}_k^{t+1*}\|^2)$
4: sample $\tau \sim \mathcal{U}(0, 1)$, $\boldsymbol{\epsilon} \sim \mathcal{N}(\mathbf{0}, \mathbf{I})$
5: $\mathcal{L}_{\text{act}} \leftarrow \|\mathbf{v}_{\xi}(\tau \mathbf{A}_t^* + (1 - \tau)\boldsymbol{\epsilon}, \tau, \mathbf{H}_{\text{ACT_Q}}) - (\mathbf{A}_t^* - \boldsymbol{\epsilon})\|^2$ ▷ conditional flow matching
6: $\mathcal{L}_{\text{vq}} \leftarrow \text{WEIGHTEDCE}(\text{lm_head}(\mathbf{H}_{\text{next-VQ}}), \mathbf{V}_{1:T}^*)$
7: $\mathcal{L}_{\text{compose}} \leftarrow \text{INVARIANCELOSS}(\boldsymbol{\alpha}, \mathbf{A}_t; \text{DISTRACTOR_AUG})$ ▷ permute $\cup$ insert distractors
8: $\mathcal{L}_{\text{role}} \leftarrow \text{KL}(\boldsymbol{\alpha}_{0,1}, \text{onehot}(\text{target}, \text{ref}))$ if labels and step $< 50\text{k}$ else 0
9: $\mathcal{L} \leftarrow \mathcal{L}_{\text{act}} + 0.5 \mathcal{L}_{\text{world}} + 0.04 \mathcal{L}_{\text{vq}} + \eta_{\text{cmp}} \mathcal{L}_{\text{compose}} + 0.05 \mathcal{L}_{\text{role}}$
Optimizer step.
10: $\mathcal{L}.\text{BACKWARD}()$; clip gradients to 1.0; AdamW step on θ ; EMA update with decay 0.999.

B Six-path tokenization and data preprocessing

This appendix documents both how raw demonstrations are loaded and preprocessed, and how the resulting observations are turned into the six token paths consumed by the trunk. Preprocessing is described first because the cached perception features and quantization tables that drive Stage II are deterministic functions of the choices below.

Demonstration loading and per-modality preprocessing

Demonstration source. LIBERO ships standard .hdf5 demonstration files per task suite (Spatial, Object, Goal, Long; 10 tasks $\times$ 50 demonstrations each, 20 Hz simulator). For every demonstration we read the third-person and wrist-view RGB frames, the 7-dimensional end-effector state (x, y, z , roll, pitch, yaw, gripper), the 7-dimensional environment action ($\Delta x, \Delta y, \Delta z, \Delta \text{roll}, \Delta \text{pitch}, \Delta \text{yaw}$, gripper command), and the natural-language instruction. SimplerEnv WidowX (Bridge) follows the same fields with the official simulator’s RGB / EE-pose / language; no benchmark-specific preprocessing is added.

Image preprocessing. RGB frames are bilinearly resized to 256×256 and rescaled to $[0, 1]$. Each frame is forwarded once to the frozen perception stack (Path I-A VQ-GAN, Path I-B SAM 3 + DINOv3) per demonstration; the resulting tokens and per-slot features are cached to disk and never recomputed across stages or seeds. We do *not* apply colour jitter, random crop, or any other RGB augmentation. The only data augmentation that touches Stage II training is the slot-level distractor permutation/insertion described in Appendix F; it operates on already-tokenized slot embeddings rather than on raw RGB.

Action normalization. The first six action dimensions ($\Delta x, \Delta y, \Delta z$ and the three rotation deltas) are kept in delta space, percentile-clipped per dimension to the 1st/99th percentile of the LIBERO training split, then linearly rescaled to $[-1, 1]$. The seventh (gripper) dimension is binarized to $\{-1, +1\}$ (open / close) using the demonstration’s gripper command field. The 7-d normalized action stacked into a 16-step chunk $\mathbf{A}_t^* \in \mathbb{R}^{16 \times 7}$ is the supervision target for the flow-matching head; the discrete past-action representation in Path A-d uses the same $[-1, 1]$ range uniformly quantized into 256 bins per dimension. Quantization parameters are fit only on LIBERO’s standard split (no LIBERO-Plus episodes participate) and shared across all task suites.

State preprocessing. The 7-DoF end-effector pose $\mathbf{q}_t$ is fed into Path S, where each dimension is uniformly discretized into 256 bins and mapped to a contiguous block of reserved-vocabulary tokens. The 9-d per-object pose $\mathbf{p}_k^t$ used inside the slot vector concatenates a workspace-normalized position in $[-1, 1]^3$ with the 6-d continuous rotation parameterization of [100], computed from the simulator’s quaternion ground truth.

Language preprocessing. Instruction strings are read from the demonstration metadata and passed unchanged to Qwen3-VL-4B (Path T1) and to Chameleon’s BPE tokenizer (Path T2). The maximum BPE length we observe is 38 tokens per LIBERO instruction; we do not apply any prompt template or chain-of-thought scaffolding.

Frame sampling and chunking. Each training step samples a random demonstration and a random pivot index t uniformly over the demonstration’s frames. We then assemble the $T=4$ historical observations $\mathbf{I}_{t-T+1:t}$ (left-padded with the initial frame when $t < T-1$), the past-action window $\mathbf{a}_{t-T+1:t-1}$, and the 16-step action chunk target $\mathbf{a}_{t:t+15}$ (right-padded with the terminal action and masked from the loss when the chunk exceeds the demonstration). Padding masks are explicit tensors that propagate to every downstream loss and augmentation, so episode boundaries never leak into per-step gradients.

Train / test split. Stage II finetuning data is exactly the LIBERO standard demonstrations; *no* LIBERO-Plus perturbation factor (layout, background, light, camera, robot init., language paraphrase, sensor noise) appears in any training stage. The Stage 0 web image-text mixture is a deduplicated subset of Chameleon’s released mixture, and the Stage 0 robot mixture (Open X-Embodiment, DROID, RoboCasa, Bridge V2; Appendix G) does not contain LIBERO test demonstrations or the SimplerEnv WidowX (Bridge) episodes used in Table 1. The benchmark-vs-pretraining separation is preserved end-to-end.

Six-path tokenization

Frozen perception is run once per demonstration and cached offline. Each of the six token paths is summarized below; we use the same notation as the main text.

Path T1 (Qwen3-VL noun-phrase parsing). The instruction ℓ is fed to Qwen3-VL-4B [1] together with the first observation; the model outputs a JSON-formatted list of noun phrases (e.g. ["red mug", "white tray"]) and a relation graph (e.g. `on(target, reference)`). These phrases are used only as text prompts for SAM 3 in Path I-B; they never enter the trunk. Cached output size: < 1 KB per demonstration.

Path T2 (BPE text tokens). ℓ is tokenized with Chameleon’s BPE tokenizer [11] (vocabulary size 65,536) and embedded through the trunk’s standard `embed_tokens` table. Average length: ~ 30 BPE tokens per LIBERO instruction.

Path I-A (Chameleon VQ-GAN image codes). Each input view is resized to 256×256 and encoded by Chameleon’s frozen VQ-GAN (16×16 patch grid, codebook of 8192 entries) into 256 discrete codes. These codes occupy IDs 3–8194 in the Chameleon vocabulary and are embedded through the same `embed_tokens` table as text. Both the third-person and wrist views are encoded; in the default configuration we keep only the third-person view’s VQ codes in the input sequence to bound length, and let the wrist view contribute only through Path I-B (an ablation in Appendix G reports the dual-view variant).

Path I-B (SAM 3 + DINOv3 + pose object slots). SAM 3 [7] is prompted with each phrase from Path T1 plus an automatic-mode pass that proposes additional candidate masks for unmentioned distractors; both sets of masks are deduplicated by $\text{IoU} > 0.5$ and DINOv3 cosine similarity > 0.9 . DINOv3 ViT-L/16 [70] produces a mask-pooled feature $\mathbf{f}_k^t \in \mathbb{R}^{1024}$ per slot, projected to $\mathbb{R}^{256}$ by a linear map. The 9-d pose vector $\mathbf{p}_k^t$ contains a 3-d position and a 6-d continuous rotation [100]. The label embedding $\ell_k \in \mathbb{R}^{256}$ is the average T5 encoding [64] of the noun phrase used to query SAM 3 (or a learned “unknown” token for distractors discovered automatically). The mask-shape descriptor is a 15-d concatenation of normalized centroid, bounding box, second-order moments, area, and convexity; concatenating the four pieces gives a raw slot vector $\mathbf{raw}_k^t \in \mathbb{R}^{540}$. The maximum number of object slots is $N_{\max} = 16$; the robot is always slot 0 and is always valid; padding slots are explicitly masked everywhere downstream (attention, losses, augmentations, metrics) so that apparent set equivariance is not broken by padding leakage. Per-frame perception runs in ~ 138 ms on a single A100 (73 ms SAM 3 + 22 ms DINOv3 + 43 ms Qwen3-VL) and is amortized fully offline during training. For real deployment, simulator pose is replaced by depth-assisted estimation using Depth Pro or VGGT features and a 6D pose tracker such as FoundationPose [4, 77, 80]; this is not part of the main empirical claim.

Path S (proprioception state token). The 7-DoF end-effector pose plus gripper $\mathbf{q}_t \in \mathbb{R}^7$ is uniformly discretized into 256 bins per dimension and mapped to a contiguous block of unused Chameleon reserved-vocabulary slots (`<reserved15500>`–`<reserved16000>`) so that no resize of `embed_tokens` is needed.

Path A-d (past-action discrete tokens). Each past action $\mathbf{a}_{t'}$ ($t' < t$) is discretized identically into the `<action>` vocabulary range (`<reserved10000>`–`<reserved15004>`). Action tokens of the chunk to be predicted are *not* placed in the input sequence; they are decoded from `[ACT_Q]` by the flow-matching head.

C Slot adapter, sequence template, and slot-aware trunk

This appendix collects the three components that turn raw slot features into trunk-ready tokens and then process them: (i) the slot adapter that maps each slot’s raw vector into the trunk’s 4096-d embedding space; (ii) the unified sequence template in which slot embeddings are scattered into the Chameleon vocabulary stream; (iii) the slot-aware trunk variant that enforces the OA constraint at every layer.

Slot adapter f_ϕ

The slot adapter $f_\phi : \mathbb{R}^{320} \rightarrow \mathbb{R}^{4096}$ is a two-layer MLP with LayerNorm and GELU,

$$f_\phi(\mathbf{s}) = W_2 \sigma(W_1 \text{LN}(\mathbf{s})), \quad W_1 \in \mathbb{R}^{4096 \times 320}, \quad W_2 \in \mathbb{R}^{4096 \times 4096},$$

with σ the GELU activation. The two component MLPs that produce $\mathbf{addr}_k$ and $\mathbf{cnt}_k^t$ are likewise simple feedforward networks: $f_{\text{addr}} : \mathbb{R}^{512} \rightarrow \mathbb{R}^{128} \rightarrow \mathbb{R}^{32}$ (taking $[\ell_k || \mathbf{f}_k^{(0)}]$) and $f_{\text{cnt}} : \mathbb{R}^{540} \rightarrow \mathbb{R}^{512} \rightarrow \mathbb{R}^{256}$. The temporal positional encoding $\boldsymbol{\pi}^t \in \mathbb{R}^{16}$ is the sinusoidal embedding of frame index t ; the role positional encoding $\boldsymbol{\rho}_k \in \mathbb{R}^{16}$ is a learned look-up over three role classes (`robot`, `object`, `padding`). Total parameter count: f_ϕ 18.0M, f_{addr} + f_{cnt} 0.4M.

Sequence template and special tokens

The full sequence template assembled by the `SEQUENCECONSTRUCTION` stage is

$$[\text{BOS}; \mathbf{x}^{\text{T2}}; \mathbf{x}^{\text{S}}; [\text{F}_{\text{BOS}}; \mathbf{x}_t^{\text{I-A}}; \text{S}_{\text{BOS}}; \mathbf{x}_t^{\text{I-B}}; \text{S}_{\text{EOS}}; \mathbf{x}_t^{\text{A-d}}; \text{F}_{\text{EOS}}]_{t=0}^{T-1}; [\text{ACT_Q}]],$$

where each frame group G_t contains the 256 image-VQ codes (Path I-A), the $N+1$ slot embeddings (Path I-B, inserted via `masked_scatter` at `<slot>` placeholder positions), and the 7 discrete action tokens (Path A-d, present only for $t < T-1$). With $T=4$ historical frames, $N+1=17$ slots, and a single image view, the total sequence length is $L \approx 1\,200$ tokens (within Chameleon’s 4096-position window).

Vocabulary additions. We reuse six unused Chameleon reserved IDs as special markers, which avoids resizing `embed_tokens` or the `lm_head`:

Symbol	Reserved token	Purpose
<code><slot></code>	<code><reserved16500></code>	<code>masked_scatter</code> placeholder for slot embeddings
S_{BOS}/S_{EOS}	<code><reserved16501/16502></code>	start/end of the slot block within a frame group
F_{BOS}/F_{EOS}	<code><reserved16503/16504></code>	start/end of a frame group
<code>[ACT_Q]</code>	<code><reserved16505></code>	learnable action query at sequence end

Token-type tensor. A parallel tensor $\tau \in \{\text{TEXT}, \text{VQ}, \text{SLOT}, \text{STATE}, \text{ACTION}, \text{SPECIAL}\}^L$ is built alongside the input IDs. It is consumed by the slot-aware attention to identify slot positions and by the head readers to identify world-prediction and action-prediction positions.

Backbone and slot-embedding injection

Backbone specs. Our trunk is a Chameleon-style multimodal autoregressive transformer [11] with the same shape parameters as Lumina-mGPT-7B-768 [46]: 32 transformer layers, hidden dimension 4096, 32 attention heads with no GQA, FFN size 11 008 (SwiGLU), vocabulary 65 536, max position 4096, RoPE $\theta = 10\,000$. Total parameters ~ 7.0 B. We *do not* import a robot-policy checkpoint: weights are warm-started from the publicly-released Chameleon-7B base (a multimodal language model, not a VLA) and then fully retrained by us during Stage 0 with the OA constraint enforced from the first step (see Appendix G, Stage 0). Modules unique to OA-WAM—the slot adapter f_ϕ , the world head h_ψ , the flow-matching action head h_ξ , and the address-stream reset hook—are introduced only at the post-pretraining stages and were not present in any prior checkpoint.

Slot embedding injection. Slot embeddings enter the trunk through the LLaVA-style `masked_scatter` pattern [37, 47]: we run `embed_tokens` on the input-id sequence to obtain a $(B, L, 4096)$ tensor, build a boolean mask flagging the `<slot>` placeholder positions, and overwrite those positions in-place with the per-slot outputs of the slot adapter f_ϕ (flattened over the $(B, T(N+1))$ axis). The resulting tensor is fed to the trunk via the `inputs_embeds` argument together with our token-type tensor and block-causal mask. Crucially, `embed_tokens` and `lm_head` are *never resized* during any of the three training stages: all six new special tokens reuse existing reserved-vocab slots, so the trunk’s output projection (`lm_head` used by the auxiliary VQ head) preserves the weights produced by our Stage-0 pretraining. The supplementary material ships a reference implementation.

The OA constraint at every layer

Slot-aware attention as a module variant. Each transformer layer uses a slot-aware variant of the standard self-attention module. The variant overrides only the forward path: queries and values are projected exactly as in the base layer; for the keys we read the boolean slot mask from the token-type tensor, zero out coordinates beyond the first 32 on slot-typed rows of the residual stream prior to the projection, and then apply W_K . Non-slot positions use the standard self-attention path with no mask intervention; the OA constraint is purely a slot-typed-position phenomenon. The four projection matrices W_Q, W_K, W_V, W_O are full-precision 4096×4096 tensors and are trained from the warm-started Chameleon-7B initialization throughout Stage 0; no extra parameters are introduced for the OA mask itself (the mask is a non-learned, dimension-indexed selection).

Frame-internal positional sharing for slot tokens. To preserve permutation equivariance over object slots within a frame, we override Chameleon’s default sequential `position_ids`: in each frame group G_t , all $N+1$ slot tokens share a single RoPE position index p_t (the start position of G_t). Non-slot tokens (text, VQ, action, special) keep their original sequential positions. Under this construction the slot block satisfies $\text{RoPE}(p_t)\Pi\mathbf{X} = \Pi\text{RoPE}(p_t)\mathbf{X}$ for any permutation Π over slot rows, so cross-slot attention logits $\langle \text{RoPE}(p_t)\mathbf{Q}_i, \text{RoPE}(p_t)\mathbf{K}_j \rangle = \langle \mathbf{Q}_i, \mathbf{K}_j \rangle e^{i\theta(p_t, p_t)}$ depend only on the slot contents (and the OA-masked address subvector for keys), not on slot indexing within G_t . The effect is visible in ablation: replacing this frame-internal sharing with default sequential RoPE on slot positions raises permutation KL on Tab 6 from 0.04 to 0.13 and drops LP layout by approximately 4 points relative to the default OA-WAM configuration. Frame-internal sharing is implemented by an explicit `position_ids` tensor passed alongside `inputs_embeds`, with zero added parameters.

Address-stream reset hook. Without intervention the residual stream eventually mixes content into the first 32 dimensions, after which Eq. (3) no longer enforces address-only routing. We restore the invariant by registering a forward post-hook on every `ChameleonDecoderLayer` that, on slot-typed positions, overwrites the first 32 output coordinates with the cached identity address `addrk`. The cache is computed once per episode by the slot adapter and lives outside the autograd graph, so the hook costs only a ~ 64 KB tensor write per layer per forward pass (~ 2 MB total over 32 layers) and contributes negligibly to runtime.

Gradient flow into addresses. Because the cached `addrk` lives outside the autograd graph, the reset hook acts as a gradient stop on the address subvector at every layer: task-specific signal cannot back-propagate

through the trunk’s residual stream into **addr**. This is by design rather than a limitation. **addr** encodes stable object identity and is meant to be a function of the language label ℓ_k and the initial DINOv3 feature $\mathbf{f}_k^{(0)}$ alone, computed once per episode by f_{addr} . The slot adapter f_ϕ (and through it f_{addr}) receives gradients only via the input-layer slot embedding $\mathbf{e}_k = f_\phi([\mathbf{addr}_k \parallel \mathbf{cnt}_k^t \parallel \boldsymbol{\pi}^t \parallel \boldsymbol{\rho}_k])$, which is sufficient because the role of **addr** is identity addressing, not task-conditional binding; task-conditional learning is concentrated in query/value projections and the residual content stream.

Routing capacity of the 32-d address subspace. With cosine similarity, the 32-d unit hypersphere admits roughly ~ 1000 pairwise-separated directions at separation angle ≥ 0.05 rad (sphere-packing approximation). LIBERO scenes contain at most 16 objects; LIBERO-Plus under layout-shift contains at most 24. During Stage 0, the maximum simultaneous active address count we observe in any single frame is 27, with mean 4.6—routing capacity utilization is therefore always $\leq 3\%$. The 32-d hard-clamp does not bottleneck object discrimination at the scales of interest.

Attention organization

Attention mask schema. On top of the OA constraint inside attention, we apply four orthogonal mask layers built from the token-type tensor: (i) *block-causal across frame groups*: a token in G_t can attend to all tokens in $G_0, \dots, G_t$ but no future group; (ii) *slot $\leftrightarrow$ slot bidirectional within a frame group*: any pair of slot tokens in the same G_t can attend to each other (this is required for permutation equivariance); (iii) *slot/VQ $\rightarrow$ action one-way within a frame group*: action tokens in G_t attend to slot/VQ tokens but not vice versa, so the world-side hidden states are not contaminated by the action they ground; (iv) *[ACT_Q] sees all*: the trailing query token can attend to every prior position. Padded slot positions are excluded from being attended-to (column $-\infty$) and do not contribute to losses or augmentations. We do not need the chunk-internal action mask of [9, 10] because flow-matching is parallel by construction (Sec. 3.4).

Optional SE(3) relative-geometry bias. For slot $\leftrightarrow$ slot attention pairs only, we add a learned bias $\phi_h(\mathbf{G}_{ij})$ to attention logits, where $\mathbf{G}_{ij}$ stores the relative SE(3) transform between slots i and j (translation in $\mathbb{R}^3$ plus axis-angle in $\mathbb{R}^3$, 6 scalars total) and ϕ_h is a small MLP producing one bias per head. The bias does not affect non-slot attention pairs and is enabled by default (parameter count $\sim 2\text{K}$ per layer).

D Prediction-head architectures

World head h_ψ . Two independent MLPs read from per-slot hidden states. The content head is $\text{LN} \rightarrow \text{Linear}_{4096 \rightarrow 1024} \rightarrow \text{GELU} \rightarrow \text{Linear}_{1024 \rightarrow 256}$; the pose head is $\text{LN} \rightarrow \text{Linear}_{4096 \rightarrow 256} \rightarrow \text{GELU} \rightarrow \text{Linear}_{256 \rightarrow 9}$. The robot slot is excluded from the supervision via the mask $m_k^{\text{obj}} \in \{0, 1\}$ in Eq. (4); padded slot positions are also masked out. Total parameter count: 5.4M.

Action head h_ξ (flow-matching MLP). The conditioning vector is a linear projection of the trunk hidden state at [ACT_Q], $\mathbf{c} = W_c \mathbf{H}_{\text{ACT}_Q} \in \mathbb{R}^{1024}$. The flow MLP itself is an 8-block residual network operating on the concatenation of $\mathbf{c}$, the current noisy chunk $\mathbf{A}_t^\tau \in \mathbb{R}^{16 \times 7}$ flattened, and a 128-d sinusoidal embedding of τ ; output is the predicted velocity $\mathbf{v}_\xi \in \mathbb{R}^{16 \times 7}$. Each block is $\text{LN} \rightarrow \text{Linear}_{1024 \rightarrow 1024} \rightarrow \text{GELU} \rightarrow \text{Linear}_{1024 \rightarrow 1024}$ with a residual connection. Sampling at inference is the 4-step forward Euler integration of Eq. (7) below; we found in ablation (Appendix G) that going from 4 to 8 Euler steps changes LIBERO success rate by $< 0.3\%$. Total parameter count: $\sim 22\text{M}$ (W_c 4.2M; input projection 1.3M; eight residual blocks 16.8M; output projection 0.1M). The *optional* per-step soft slot assignment $\boldsymbol{\alpha} \in \mathbb{R}^{16 \times (N+1)}$ used by the role-loss regularizer is produced by an auxiliary attention layer over the slot token positions and adds another 1.2M parameters.

Auxiliary image-VQ head. We reuse our pretrained $\text{lm_head} \in \mathbb{R}^{65536 \times 4096}$ (produced by Stage 0) unchanged in Stage II. The next-frame VQ block is appended via teacher forcing and a weighted cross-entropy is computed on the next-VQ positions, with token weights 0.04 on the image-VQ vocabulary range (IDs 3–8194) and 1.0 elsewhere. This avoids the 8192-way CE loss dominating gradient norms while still preserving the value of our Stage-0 image-generation objective at zero new parameters. The head is disabled at inference because next-frame VQ tokens are not used by the action policy.

Inference-time Euler step. Given the conditioning vector $\mathbf{c} = W_c \mathbf{H}_{\text{ACT}_Q}$ and an initial $\mathbf{A}_t^0 \sim \mathcal{N}(\mathbf{0}, \mathbf{I})$, the action chunk is decoded by

$$\mathbf{A}_t^{\tau+\Delta\tau} = \mathbf{A}_t^\tau + \Delta\tau \cdot \mathbf{v}_\xi(\mathbf{A}_t^\tau, \tau, \mathbf{c}), \quad \Delta\tau = 1/4, \quad (7)$$

returning $\mathbf{A}_t = \mathbf{A}_t^1$. Total inference cost on a single A100: ~ 10 ms per chunk, dominated by the four 22M-parameter MLP forward passes.

Per-module parameter accounting. Total OA-WAM parameters across all stages:

Module	Parameters	Trained at
Chameleon-7B trunk (with OA mask + reset hook)	~ 7000 M	Stage 0 (full pretrain); frozen at Stage II
Slot adapter f_ϕ	18.0 M	Stage I, continued at Stage II
$f_{\text{addr}} + f_{\text{cnt}}$	0.4 M	Stage I, continued at Stage II
World head h_ψ	5.4 M	Stage I, continued at Stage II
Action head h_ξ (flow-matching MLP)	22.0 M	Stage II (introduced)
Optional role attention	1.2 M	Stage II (introduced)
LoRA on $\{q, k, v, o, \text{gate}, \text{up}, \text{down}\}_{\text{proj}}$, rank 32	80.0 M	Stage II (introduced)
Auxiliary VQ head (reuses <code>lm_head</code>)	0	reuse, no new parameters
OA mask + reset hook	0	non-parametric
Stage II trainable total	~ 127 M	

The OA mask itself is a non-parametric, dimension-indexed selection; the reset hook is a non-parametric tensor write. Per-stage trainable parameters: ~ 7.0 B (Stage 0) $\rightarrow \sim 23.8$ M (Stage I) $\rightarrow \sim 127$ M (Stage II).

E Equivariance property

Proposition. Assume (i) object slots are processed without slot-index positional embeddings; (ii) all $N+1$ slot tokens within a single frame group G_t share a common RoPE position index p_t (cf. App. C); (iii) the same projection, attention, feed-forward, and world heads are applied to every object slot; and (iv) pairwise relative geometry G and padding mask m are permuted consistently with any object-slot permutation π that leaves the robot token fixed. Then the slot-aware Chameleon trunk in OA-WAM is permutation-equivariant over object slots: applying π to the input object slots applies the same π to the output object states.

Proof sketch. Linear projections and feed-forward blocks are shared row-wise, so they commute with π . Within a frame group all slot tokens share RoPE phase p_t , so the rotation $R(p_t)$ is the same constant matrix on all slot rows; consequently $R(p_t)\Pi\mathbf{X} = \Pi R(p_t)\mathbf{X}$ for any permutation Π on slot rows, i.e., RoPE commutes with slot permutation under assumption (ii). Mask-aware self-attention then computes pairwise scores from row features (with the OA mask applied to keys), plus $\phi(G_{ij})$ and the two-sided mask M_{ij} . Consistent permutation of X , G , and M permutes rows and columns of the attention matrix, so the softmax output rows are permuted in the same way. Cross-attention to language uses the same language keys for every slot and therefore also commutes with slot permutation. By induction over layers, the final slot states and per-slot world predictions are permutation-equivariant. The action head is permutation-invariant with respect to object order because the role queries attend over the permuted key-value set with the correspondingly permuted mask.

F Loss components and augmentations

Distractor permutation augmentation ($\mathcal{L}_{\text{compose}}$, part 1). Within a mini-batch we identify, for each sample, the subset of slot positions corresponding to neither the target nor the reference object (using the weak labels emitted by Path T1 when available; otherwise using all non-robot slots). A random permutation of those positions is sampled and applied consistently to (i) the slot embeddings, (ii) the per-pair geometry tensor $\mathbf{G}$, and (iii) the padding mask. The permuted sample is forwarded through the model; we then minimize $\text{KL}(\alpha^{\text{orig}}_{\cdot} \text{detach} \parallel \alpha^{\text{aug}}_{\cdot}) + \|\mathbf{A}^{\text{orig}}_{\cdot} \text{detach} - \mathbf{A}^{\text{aug}}_{\cdot}\|_2^2$, ensuring the model’s attention and action outputs are invariant to distractor reordering.

Distractor insertion augmentation ($\mathcal{L}_{\text{compose}}$, part 2). We sample a random distractor slot from another in-batch sample and graft it into the first padding slot of the current sample, recomputing $\mathbf{G}$ and increasing the valid-slot count by one. The same KL+L2 invariance loss is applied. Both augmentations are warmed up: η_{compose} ramps linearly from 0 to 0.1 over the first 30% of Stage II training, after which it remains at 0.1 for the remainder.

Weak role hint ($\mathcal{L}_{\text{role}}$). When a demonstration includes target/reference labels (extracted from Path T1 plus simple language heuristics), we encourage two of the action-head’s per-step soft slot assignments to align with those labels: $\mathcal{L}_{\text{role}} = \text{KL}(\alpha_0, \text{onehot}(\text{target})) + \text{KL}(\alpha_1, \text{onehot}(\text{ref}))$, weighted by 0.05 and applied only during the first half of Stage II training. After step 50k it is set to zero so that the model must rely on its own learned binding rather than the auxiliary signal at convergence.

World-loss pose normalization. Translations are normalized to the workspace bounding box $[-1, 1]^3$ before MSE; rotations are represented as the 6-d continuous parameterization of [100] and supervised by $\mathcal{L}_2$ in this 6-d space. We found this strictly outperforms quaternion or axis-angle MSE in ablation (not reported).

Auxiliary VQ loss schedule. Throughout training the weight on $\mathcal{L}_{vq}$ is fixed at 0.04. We did not need a curriculum because the trunk and lm_head are already pretrained on this objective; further increasing the weight degraded action performance in early experiments.

G Three-stage training and inference latency

Stage 0 – slot-aware trunk pretraining ($\sim 600k$ steps)

Setup. This is *our own* foundation-model pretraining; we do not consume any prior robot-policy checkpoint. The full 7B trunk is initialized from the publicly-released Chameleon-7B base weights [11] (a multimodal language model, not a VLA), and then trained end-to-end on a mixed corpus with the OA mask threshold linearly annealed from full residual (4096-d) to its 32-d hard form over the first 5k steps—structurally analogous to Chameleon’s own two-stage modality re-weighting curriculum [11] and to OmniTokenizer’s progressive joint training [78]—and held at the hard form thereafter, so that the OA constraint is effectively enforced for 99.2% of the pretraining schedule. Loss: image-VQ next-token cross-entropy on the I-A path plus the slot-level world-prediction MSE of Eq. (4), summed at the same 0.04 vs. 1.0 weighting we use later, with no action loss.

Data mixture ($\sim 2.5T$ tokens total). Total token budget = global batch size $1024 \times$ sequence length $4096 \times 600k$ steps. The mixture is summarized below; the web fraction is retained to prevent multimodal forgetting from the Chameleon-7B base, and the robot fraction supplies the slot-level world-prediction signal. Web image-text uses a deduplicated subset of Chameleon’s mixture [11].

Source	Tokens	Share	Token-path coverage
Web image-text	1.50 T	60%	T2 + I-A
Open X-Embodiment [58]	0.50 T	20%	all six paths
DROID [31]	0.20 T	8%	all six paths
RoboCasa [55]	0.20 T	8%	all six paths
Bridge V2 [75]	0.10 T	4%	all six paths
Total	2.50 T	100%	

For robot sources, slot-path features (SAM 3 masks + DINOv3 embeddings + pose) are precomputed offline on the same hardware described under "Frozen-perception precomputation" below.

Optimizer and schedule. AdamW $(\beta_1, \beta_2)=(0.9, 0.95)$, weight decay 0.05, cosine schedule decaying to 10% of peak with 4k-step linear warmup, peak LR $1.5 \cdot 10^{-4}$, gradient clipping 1.0, bf16. Hardware: $384 \times A100$ -80GB (twelve nodes of eight $\times A100$ with intra-node TP=8 and across-node DP=48), wall-clock ~ 18 days, total $\sim 166k$ A100-hours. Achieved throughput on this configuration is $\sim 4,200$ tokens/s/GPU at MFU $\sim 60\%$, comparable to published 7B-class FSDP/Megatron benchmarks. Output: `ckpt-stage0.pt`, the slot-aware Chameleon-7B trunk that all subsequent stages start from.

Reproducibility note for Stage 0. Stage 0 was performed on internal compute infrastructure equivalent to $384 \times A100$ -80GB. Downstream users do *not* need to reproduce Stage 0: the released `ckpt-stage0.pt` together with the Stage I/II training scripts is sufficient to obtain all reported numbers, requiring only ~ 60 GPU-days on $8 \times A100$. Reproducing Stage 0 from scratch requires equivalent compute to $\sim 166k$ A100-hours, which is approximately 19% of Chameleon-7B’s reported $\sim 856k$ -A100-hour pretraining cost [11]—an appropriate budget for warm-start adaptation rather than from-scratch pretraining.

Stage I – slot-adaptor alignment (50k steps)

Setup. Trunk and lm_head from Stage 0 are frozen; only the slot adaptor f_ϕ , the world head h_ψ , and the address-stream reset hook are trainable ($\sim 23.8M$ params total). Loss: $\mathcal{L}_{world}$ alone. Data: combined LIBERO + DROID + a $\sim 100k$ -episode subset of Open X-Embodiment, with all six paths cached offline so that each step touches only the trainable modules and a frozen forward pass through the trunk. Although the OXE/DROID data overlap Stage 0, only the slot adaptor receives gradients here—the trunk weights are frozen, so there is no risk of test-set contamination through the main backbone. Optimizer: AdamW with $\beta_1=0.9, \beta_2=0.95$, weight decay 0.05, gradient clipping at 1.0, cosine schedule with 2000-step warmup peaking at LR $2 \cdot 10^{-4}$. Batch: bf16, global batch size 256, per-GPU batch size 8, gradient accumulation 4 on $8 \times A100$ -80GB. Wall clock: 3–4 days.

Stage II – full system finetuning (100k steps, LoRA route)

Setup. A LoRA module of rank $r=32$ is attached to all $\{q, k, v, o, \text{gate}, \text{up}, \text{down}\}_{\text{proj}}$ matrices in the trunk (LoRA $\alpha=64$, dropout 0.05, $\sim 80\text{M}$ LoRA parameters total); the action head h_ξ is added ($\sim 22\text{M}$, plus the optional 1.2M role attention); the slot adapter and world head from Stage I continue to update. Total trainable: $\sim 127\text{M}$ params. Loss: the full $\mathcal{L}(\theta)$ in Eq. (6) with η_{compose} ramped over the first 30k steps. Data: *only* standard LIBERO demonstrations—no LIBERO-Plus perturbation factors, no augmented benchmark labels, no privileged target information beyond the weak role hint described above. Optimizer: AdamW as in Stage I, LR $2 \cdot 10^{-4}$ for new modules and LoRA, $5 \cdot 10^{-6}$ for any unfrozen base trunk parameters (the LoRA route has none, but this LR applies to the full-FT alternative). Batch: bf16, global batch size 128, per-GPU 4, accumulation 8 on $8 \times \text{A100-80GB}$. EMA decay 0.999, gradient clipping 1.0. Wall clock: 3–4 days.

Full-finetuning alternative. For sanity-check parity we also report a full-finetuning variant that unfreezes the entire 7B trunk (no LoRA), trained at the lower LR $5 \cdot 10^{-6}$ for 7–10 days on the same hardware. Across LIBERO and LIBERO-Plus the LoRA and full-FT runs are within $\pm 1\%$ on every reported axis; we therefore use LoRA as the default in the main paper.

Three-stage hyperparameter table

Hyperparameter	Stage 0	Stage I	Stage II (LoRA)
trainable params	$\sim 7.0\text{B}$	$\sim 23.8\text{M}$	$\sim 127\text{M}$ (80M LoRA + 47M heads)
optimizer	AdamW	AdamW	AdamW
(β_1, β_2)	(0.9, 0.95)	(0.9, 0.95)	(0.9, 0.95)
weight decay	0.05	0.05	0.05
peak LR	$1.5 \cdot 10^{-4}$	$2 \cdot 10^{-4}$	$2 \cdot 10^{-4}$ for new modules / LoRA
LR schedule	cosine $\rightarrow 10\%$ + 4k warmup	cosine + 2k warmup	cosine + 2k warmup
total steps	$\sim 600,000$	50,000	100,000
batch size (global)	1024	256	128
sequence length	4096	4096	~ 1200 (per-task)
total tokens	$\sim 2.5\text{T}$	—	—
precision	bf16	bf16	bf16
EMA decay	—	—	0.999
gradient clipping	1.0	1.0	1.0
LoRA r, α , dropout	—	—	32, 64, 0.05
LoRA target	—	—	QKVO + gate, up, down_proj $\times 32$ layers
OA mask warm-up	first 5k steps (linear)	—	—
loss	VQ-CE + $\mathcal{L}_{\text{world}}$	$\mathcal{L}_{\text{world}}$	full $\mathcal{L}(\theta)$ Eq. (6)
η_{compose}	—	—	ramp $0 \rightarrow 0.1$ over first 30k
$\mathcal{L}_{\text{role}}$ weight	—	—	0.05 for first 50k, then 0
hardware	$384 \times \text{A100-80GB}$	$8 \times \text{A100-80GB}$	$8 \times \text{A100-80GB}$
wall clock	~ 18 days ($\sim 166\text{k}$ A100-h)	3–4 days	3–4 days

Evaluation runtime

Wall-clock per evaluation pass. A full evaluation pass on a single A100 takes 1.7 hours for LIBERO (4 suites $\times$ 100 episodes $\times$ 3 seeds), 11.4 hours for LIBERO-Plus (7 axes $\times$ 100 episodes $\times$ 3 seeds), and 1.6 hours for the SimplierEnv WidowX visual-matching pass over the four Bridge tasks. Frozen-perception precomputation runs offline on 8 A100s and finishes in 9.7 hours for the full LIBERO+LIBERO-Plus+SimplierEnv cache; cached slots remove SAM 3 and DINOv3 cost from the training loop entirely.

Inference latency breakdown

Closed-loop control on a single A100. We process the chunk every 16 simulator steps so the effective control rate is $\sim 4.3\text{ Hz}$ inside a 20 Hz simulator. The breakdown below sums to $\sim 233\text{ ms}$ per chunk:

Stage	Wall-clock (single A100)
Stage 0 perception (SAM 3 + DINOv3 + Qwen3-VL)	138 ms
SAM 3 (single frame, both views, with concept tracking)	73 ms
DINOv3 ViT-L/16 mask pooling	22 ms
Qwen3-VL-4B noun-phrase parse (cached after $t=0$)	43 ms (first chunk only)
SEQUENCECONSTRUCTION (slot adapter + masked_scatter)	$\sim 5\text{ ms}$
Slot-aware 7B trunk forward (our Stage-0 ckpt), FlashAttention-2, bf16, $L \approx 1200$	80 ms
Flow-matching action head, 4-step Euler	10 ms
Total per action chunk	$\sim 233\text{ ms}$
Effective closed-loop control rate	$\sim 4.3\text{ Hz}$

H Evaluation protocol

LIBERO. We evaluate the Spatial, Object, Goal, and Long suites with 100 episodes and three seeds per suite. Training uses only the standard demonstrations. Success is the environment’s task-completion signal.

LIBERO-Plus. We use the official perturbation generator and do not train on perturbation factors. We report the seven dimensions separately: object layout, background texture, light condition, camera view, robot initial state, language instruction, and sensor noise. The main paper reports per-dimension success and the seven-axis average.

SimplerEnv. We use the official SimplerEnv visual-matching protocol on the WidowX (Bridge) suite (Put Spoon on Towel, Stack Block, Put Carrot on Plate, Put Eggplant in Basket). Each task is run with the official 25 episodes per cell, repeated for three seeds. Reported numbers are the mean visual-matching success per task; the avg. column averages the four Bridge tasks in Table 1.

Statistics. For each success rate, we compute the mean over seeds. Curves over perturbation strength use the same seeds across methods.

Result sources. *LIBERO* rows: OpenVLA from [32]; SpatialVLA from [62]; π_0 from [3]; $\pi_{0.5}$ from [60]; InternVLA-M1 from [14]; F1-VLA from [52]; MemoryVLA from [66]; VLA-JEPA from [73]; CoWVLA from [85]; ThinkAct from [27]; VITA from [53]. CogACT [39] is not reported on LIBERO in its primary paper, so its LIBERO row is left blank. *LIBERO-Plus* rows: OpenVLA-OFT, π_0 per-axis numbers come from Table 2 of the LIBERO-Plus report [19]; $\pi_{0.5}$ numbers are our runs of the released checkpoint; ABot-M0 from [87]; X-VLA from [97]; WorldVLA from [10]; VLA-JEPA from [73]; GE-Act from [42]; Cosmos-Policy from [34]. We use exactly the official LIBERO-Plus perturbation generator and do not retrain on perturbation factors. *SimplerEnv* (WidowX) rows: SpatialVLA from [62]; InternVLA-M1 from [14] (Table 2, explicitly labelled visual matching); CogACT from [39] (Table 2 caption explicitly states the visual-matching setting); MemoryVLA from [66]; VLA-JEPA from [73] under its explicitly labelled visual-matching protocol; CoWVLA from [85]; F1-VLA per-task numbers from Table 3 of [52] (the avg cell is left blank because the F1 paper aggregates differently); ThinkAct from [27] (Table 1, section explicitly labelled “Simpler-Bridge (Visual Matching)”); VITA from [53] (the VITA paper does not state the protocol explicitly, but SIMPLER provides only a visual-matching mode for the WidowX (Bridge) suite, so we list its numbers in the visual-matching column); OA-WAM from our own runs of the released checkpoint under the official visual-matching protocol with 25 episodes per cell and three random seeds. The OpenVLA, π_0 , and $\pi_{0.5}$ SimplerEnv cells are left blank: their primary papers do not publish SimplerEnv WidowX (Bridge) numbers under the visual-matching protocol, and we deliberately exclude third-party reproductions to keep every cell attributable to a single named primary source.

I Ablations, fairness controls, and failure audit

Supporting ablations: A3 (world head) and A4 (distractor consistency)

A1 and A2 (the two abstract-level architectural claims) are reported in the main text (§4.3); A3 and A4 defend the supporting claims — the joint world-prediction objective and the distractor-consistency regularizer — and are reported here, together with the V3 corner of the A1 factorial that further decomposes the OA constraint into its key-mask and address-reset components.

Table 5: A3 – world-prediction head. Disabling future prediction removes the multi-step slot world loss $\mathcal{L}_{\text{world}}$ and keeps only the action and auxiliary VQ losses. The world head specifically improves LP camera (−7.1% without it) and LIBERO (−2.2% without it); LP avg is statistically flat (+0.6% on action-only, within seed noise), confirming the world head’s contribution is geometric-axis-specific rather than a generic capacity gain.

World head	LIBERO	LP camera	LP avg
Action only	95.6	73.4	84.5
With world (ours)	97.8	80.5	83.9

Table 6: A4 – distractor-consistency loss. Removing $\mathcal{L}_{\text{compose}}$ (both permutation and insertion components) lowers LP layout by 4.3% and raises permutation KL and insertion drift by roughly 5×; the loss is genuinely load-bearing rather than ornamental.

Consistency loss	LP layout	perm. KL↓	ins. drift↓
None	78.5	0.21	0.19
Full (ours)	82.8	0.04	0.05

V3 of A1 – per-layer address-reset hook factorization

Table 7 adds the fourth corner of the 2×2 factorial behind A1: V3 keeps the address-only key projection but removes the per-layer address-reset hook, so the address subvector is allowed to drift through the residual stream after layer 0. V3 sits between V0 (full) and V1 (mask off, hook on) on every metric, indicating that (i) the per-layer hook is necessary — without it, layer- $\ell \geq 1$ keys are no longer pure addresses, so the OA constraint of Eq. (3) is enforced only at the first layer — and (ii) turning off the mask alone (V1) is the larger of the two effects on robustness. Both pieces are individually load-bearing and compound when applied together: $(V0 - V3) + (V0 - V1) \approx 0.7 + 3.1 = 3.8\%$ on LP avg, while $(V0 - V2) = 7.7\%$, leaving a $\sim 3.9\%$ super-additive residual interaction term — removing both pieces hurts more than the sum of removing each alone.

Table 7: V3 of A1 – per-layer address-reset hook factorization. Compare to V0/V1/V2 of Table 3; the four rows together form the 2×2 factorial over (key mask, reset hook).

Variant (A1)	K mask	Reset hook	LIBERO	LP camera	LP avg	swap binding
V2 (no OA)	off	off	95.4	60.5	76.2	0.06
V1 (mask off, hook on)	off	on	96.3	67.2	80.8	0.19
V3 (mask on, hook off)	on	off	96.6	70.8	83.2	0.32
V0 (full OA-WAM)	on	on	97.8	80.5	83.9	0.87

Architectural attribution of robustness gains. Figure 6 visualizes the same 2×2 factorial as a decomposition that isolates how much of the OOD robustness comes from the slot tokens plus frozen perception stack alone, versus the OA constraint applied on top. **V2** is the natural “slot-only” control: it keeps the full SAM 3 + DINOv3 + Qwen3-VL perception, the slot adapter, the world/action heads, and the trunk weights, but disables both the address-only key mask and the per-layer reset hook—i.e. the slot tokens still flow into the trunk but the OA constraint is removed. Going from V2 to V0 (full OA-WAM) moves LP-camera by +20.0% ($60.5 \rightarrow 80.5$) and LP-avg by +7.7% ($76.2 \rightarrow 83.9$), while LIBERO standard moves by only +2.4%—the asymmetric signature of an OOD-specific inductive bias rather than a generic capacity gain from the heavy perception stack. Panel (b) shows the same decomposition on the causal swap-binding metric: V2 sits at 0.06, below even the strongest holistic baseline (0.09), and the climb to 0.87 comes monotonically from re-introducing the mask and the hook.

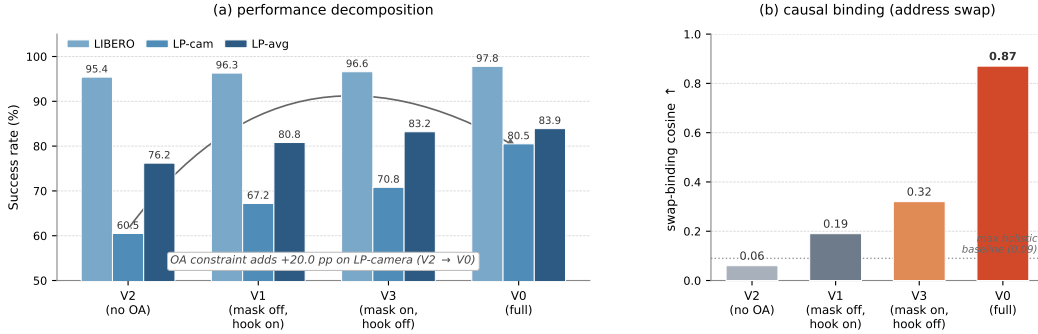


Figure 6: **Architectural attribution of OA-WAM’s robustness gains.** Decomposition of the 2×2 factorial behind Tab. 7. **(a)** LIBERO / LP-camera / LP-avg success rates across the four variants. V2 is the slot-only control (full perception stack, OA constraint OFF); V0 is full OA-WAM. The OA constraint adds +20.0% on the most geometric axis (LP-camera) while LIBERO standard moves only marginally, isolating the gain to OOD-specific routing rather than added capacity. **(b)** Same variants on the swap-binding cosine (Tab. 4); the dotted line marks the maximum cosine reached by any of the eight holistic VLA / WAM baselines.

Diagnostic metrics

Comparisons we deliberately omitted

We considered and dropped several additional comparisons because each either measures an engineering knob with no abstract-level claim attached, is subsumed by A1, or is a robustness boundary rather than a controlled ablation; recording each as a separate table here would dilute, not sharpen, the four falsification statements above. (a) The geometry-bias choice (relative SE(3) bias vs. absolute pose vs. none) is reported as a design

Table 8: Diagnostic metrics on LIBERO-Plus. Target attn. is the mean attention mass that role query r_1 places on the ground-truth target slot. Swap binding is the cosine alignment between the end-effector residual trajectory and the swap direction. The failure column reports the proportion of evaluation episodes that fail due to exposed perception or policy errors; holistic baselines have no exposed perception cache, so all their failures are charged to the policy side.

Method	target attn. $\uparrow$	swap binding $\uparrow$	perm. KL $\downarrow$	action L2 (m) $\downarrow$	ins. drift $\downarrow$	perc. / pol. failure (%)
OpenVLA	n/a	0.04	0.96	0.241	0.83	0 / 82.7
π_0	n/a	0.05	0.62	0.183	0.71	0 / 46.4
OpenVLA-OFT	n/a	0.06	0.51	0.156	0.65	0 / 30.4
$\pi_{0.5}$	n/a	0.05	0.29	0.107	0.42	0 / 14.3
WorldVLA	n/a	0.09	0.38	0.131	0.52	0 / 75.0
VLA-JEPA	n/a	0.07	0.34	0.122	0.48	0 / 20.5
Cosmos-Policy	n/a	0.06	0.31	0.118	0.46	0 / 17.8
GE-Act	n/a	0.07	0.36	0.125	0.50	0 / 19.7
OA-WAM (ours)	0.81	0.87	0.04	0.018	0.05	3.4 / 7.2

decision in §3.3; in early experiments removing the bias cost $\sim 2\%$ LP camera but did not change the sign of any A1 conclusion. (b) Action-head variants (mean pool, hard role classifier, no query self-attention) are partially covered by the mean-pool row of Tab. 4, since A1 already shows that flipping the OA constraint while keeping the head intact changes binding and OOD success by the magnitudes that matter; we therefore do not catalogue every head variant separately. (c) The role-auxiliary weight $\lambda_r = 0.05$ was selected from $\{0, 0.05, 0.5\}$ on a held-out validation slice and is treated as a hyperparameter (in-distribution differences $\leq 1.4\%$). (d) Test-time pose noise and test-time visible-slot count are robustness boundaries rather than ablations and are summarized in the Limitations paragraph of the Conclusion; with $5\text{ cm}/20^\circ$ pose noise injected at evaluation time OA-WAM retains LP avg 78.2 (above OpenVLA-OFT and X-VLA, below $\pi_{0.5}$), and with only 2 visible slots at test time it retains LP avg 79.7. (e) The role-query count $R=4$ matches the four soft roles target/reference/tool/distractor and was likewise treated as a hyperparameter, with $R=2$ under-allocating (-6.8% LP avg) and $R=8$ adding capacity without measurable gain. None of (a)–(e) speaks to the abstract’s two architectural claims, and including them as ablations would invite reviewer attention away from the four that do.

Failure-mode breakdown

We post-hoc human-labelled 300 randomly sampled OA-WAM failure episodes on LIBERO-Plus and grouped each by the system component most responsible. The breakdown is dominated by four categories. (i) *Action / dynamics* (121 episodes, 40.3%, addressable by a better policy): the policy reaches the correct target object but contacts at the wrong angle or location—a property of the action head and dynamics loss, not of the slot interface. (ii) *Slot extraction / perception* (89 total, 29.7%, addressable by better perception or pose) splits into target-mask drift from SAM 3 concept segmentation/tracking (51, 17.0%) and pose errors on symmetric or transparent objects from the depth-based pose source rather than the trunk (38, 12.7%). (iii) *Engineering* (47, 15.7%, addressable by latency optimization): the frozen perception stack lags real-time control. (iv) *Out-of-scope assumptions* (43 total, 14.3%, outside the policy/perception stack) splits into a distractor physically blocking the target and thereby violating our weak-coupling assumption (24, 8.0%) and genuinely ambiguous instructions with multiple matching candidates (19, 6.3%). The two categories that OA-WAM itself can directly improve—perception (89, 29.7%) and action (121, 40.3%)—together cover roughly 70% of failures.

Benchmark task gallery

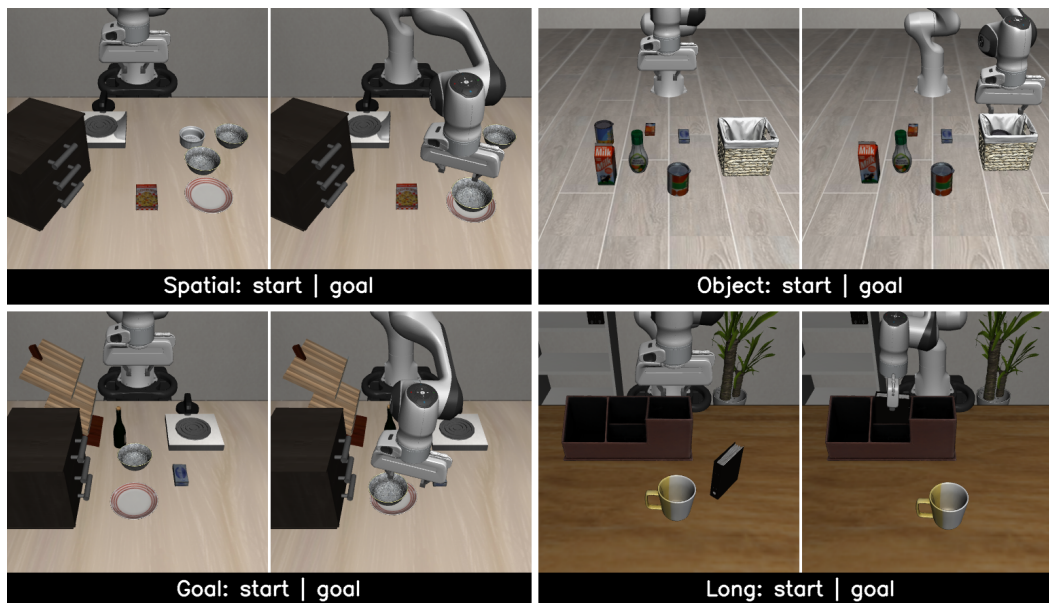


Figure 7: Representative tasks from the four LIBERO suites [45]: **Spatial** (10 tasks, identical goal with varied initial spatial layout), **Object** (10 tasks, same scene with varied target object), **Goal** (10 tasks, same scene with varied goal predicate), and **Long** (10 long-horizon composite tasks).

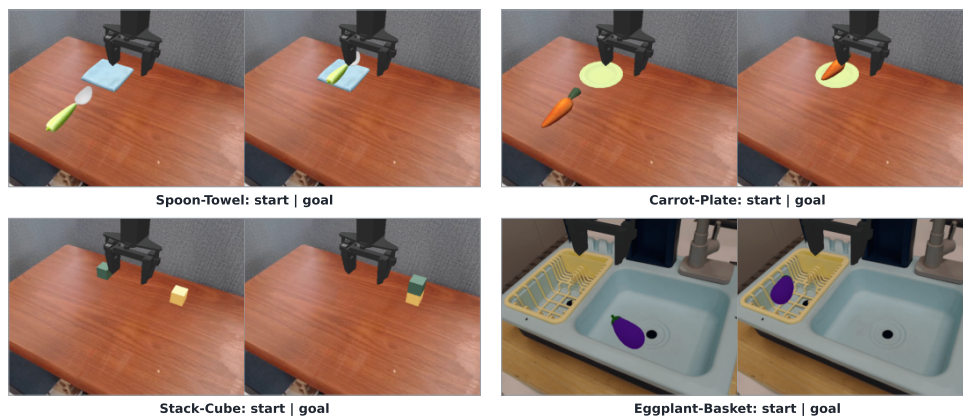


Figure 8: Representative tasks from the four SimplerEnv WidowX (Bridge) suites [40]: **Spoon-Towel** (the spoon must be lifted from the table and placed on the towel), **Carrot-Plate** (the carrot must be placed on the yellow plate), **Stack-Cube** (the green block must be stacked on the yellow block), and **Eggplant-Basket** (the eggplant must be deposited inside the yellow basket).

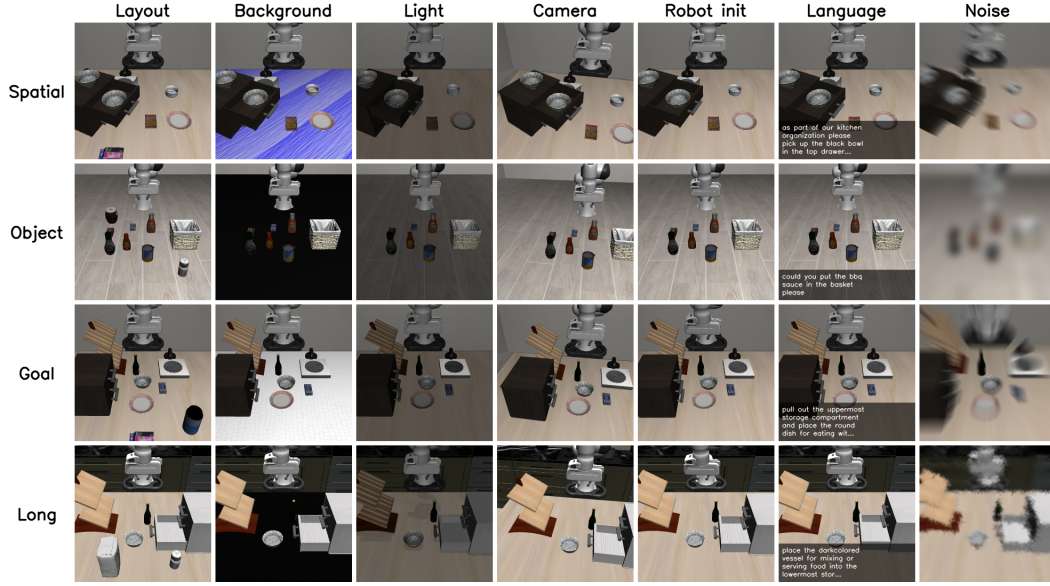


Figure 9: **LIBERO-Plus perturbation gallery.** We visualize the seven perturbation axes of LIBERO-Plus (*columns*: Objects Layout, Background Textures, Light Conditions, Camera Viewpoints, Robot Initial States, Language Instructions, Sensor Noise) applied to four LIBERO suites (*rows*: Spatial, Object, Goal, Long-horizon). Each row anchors on a single base scene so that the seven panels in that row share identical objects and goal, isolating the visual effect of each axis. The Layout column adds distractor objects, Background swaps table/floor textures, Light varies illumination intensity and color, Camera shifts the agent-view extrinsics, and Robot init perturbs the manipulator’s starting joint configuration. Language instructions are text-only and therefore look visually identical to the anchor scene; the perturbation manifests only through the prompt fed to the policy. The Noise column intentionally uses a different corruption per row — motion blur, Gaussian blur, zoom blur, and glass blur, respectively — to illustrate the diversity of sensor-noise variants in LIBERO-Plus.