

Morphologically Equivariant Flow Matching for Bimanual Mobile Manipulation

Max Siebenborn^{*1}, Daniel Ordoñez Apraez^{*2}, Sophie Lueth¹,
Giulio Turrisi², Massimiliano Pontil², Claudio Semini², Georgia Chalvatzaki^{1,3,4}

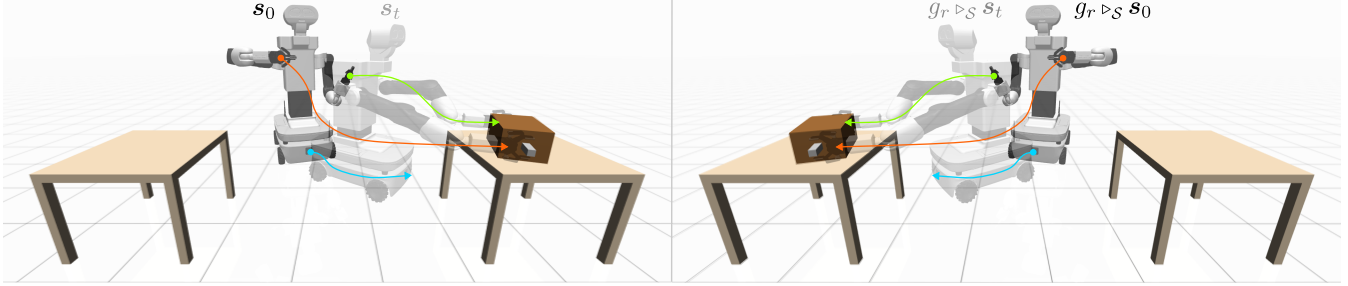


Fig. 1: Simulated bimanual *box lifting* task, illustrating reflection morphological symmetry of mobile manipulators. A successful trajectory $(s_t, a_t)_{t=0..T}$ (left) transfers zero-shot to the mirrored setting: starting from the reflected initial state $g_r \triangleright_S s_0$, executing the reflected action sequence $(g_r \triangleright_A a_t)_{t=0..T}$ produces the trajectory $(g_r \triangleright_S s_t, g_r \triangleright_A a_t)_{t=0..T}$ that solves the task in the mirrored setting (right). In this paper, we leverage this reflection symmetry prior for behavior cloning with flow matching, demonstrating improved sample efficiency, generalization, and optimality in bimanual mobile manipulation.

Abstract—**Mobile Manipulation** requires coordinated control of high-dimensional, bimanual robots. **Imitation Learning** methods have been broadly used to solve these robotic tasks, yet typically ignore the bilateral morphological symmetry inherent in such systems. We argue that morphological symmetry is an underexplored but crucial inductive bias for learning in bimanual **Mobile Manipulation**: knowing how to solve a task in one configuration directly determines how to solve its mirrored counterpart. In this paper, we formalize this symmetry prior and show that it constrains optimal bimanual policies to be ambidextrous and equivariant under reflections across the robot’s sagittal plane. We introduce a $\mathbb{C}_2$ -equivariant **Flow Matching** policy that enforces reflective symmetry either via a regularized training loss or an equivariant velocity network. Across planar and 6-DoF **Mobile Manipulation** tasks, symmetry-informed policies consistently improve sample efficiency and achieve zero-shot generalization to mirrored configurations absent from the training distribution. We further validate this zero-shot generalization capability on a real-world manipulation task with a TIAGo++ robot. Together, our findings establish morphological symmetry as an effective, generalizable, and scalable inductive bias for ambidextrous generative policy learning.

I. INTRODUCTION

Over the last decade, deep learning has driven remarkable progress in robotics and promises to solve long-standing challenges in service robotics, including household assistance, healthcare support, and collaborative assembly. Such

applications require robots to solve **Mobile Manipulation (MoMa)** tasks involving dextrous bimanual manipulation. Current approaches often rely on **Imitation Learning (IL)**, using datasets of expert human demonstrations to train stochastic policies via **Behavior Cloning (BC)** [1]–[4]. However, these methods typically require vast amounts of data and compute due to task complexity and low sample efficiency of generative **IL** paradigms. Given the cost and difficulty of collecting expert demonstrations, and the risks of malfunction, methods with improved sample efficiency, generalization, and optimality are critically needed.

This paper leverages a core physics-informed inductive bias in bimanual **MoMa** frequently ignored in **IL**: the robot’s bilateral morphological symmetry [5], rooted in the reflection symmetry of the left and right sides of the body morphologies of humans and most bimanual manipulators (see Fig. 1).

Intuitively, this symmetry prior implies that observations and actions at any time are related by known reflection transformations to those of the mirrored manipulation task (see Fig. 1). Hence, any optimal policy solving one task transfers directly to the reflected task, yielding an *ambidextrous* manipulation policy [6]. Figure 2 illustrates an analogous control symmetry in the planar Push-T environment [1]: any expert demonstration can be reflected across the vertical symmetry axis of the target-T to produce an expert rollout that solves the task from the reflected initial state.

In this paper, we formalize this symmetry prior for bimanual **MoMa**, reformulating **IL** as a symmetry-constrained optimization problem enforceable explicitly or via regularization within **Flow Matching (FM)**. Our contributions are:

¹ PEARL Lab, Dept. of Computer Science, TU Darmstadt, Germany,
² Istituto Italiano di Tecnologia, ³ Hessian.AI, ⁴ Robotics Institute Germany
^{*}Equal contribution.

This work is supported by ERC grant SIREN (101163933). Funded by the European Union. Views and opinions expressed are however those of the author(s) only and do not necessarily reflect those of the European Union or the European Research Council Executive Agency. Neither the European Union nor the granting authority can be held responsible for them.

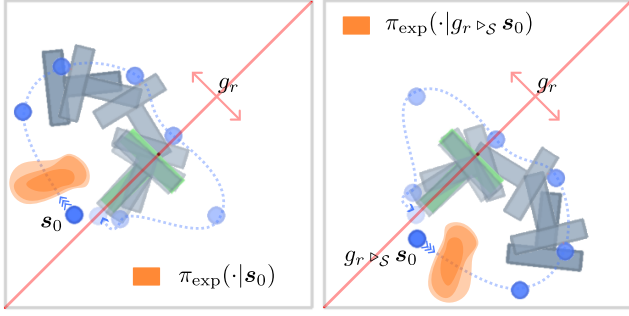


Fig. 2: Reflection symmetry of the Push-T environment [1], illustrating a rollout starting from state s_0 (left) and the corresponding reflected rollout starting from the reflected state $g_r \triangleright_S s_0$ (right). The expert policy distribution (orange) is reflection-invariant, motivating the use of this symmetry as an inductive bias for policy learning.

- (i) we formalize reflection symmetry-induced equivariance in FM for IL and show two strategies to enforce these constraints: explicitly via equivariant Neural Networks (NNs), or softly via regularization;
- (ii) we introduce a $\mathbb{G}$ -equivariant transformer for arbitrary finite groups, enabling ambidextrous bimanual control;
- (iii) we show that exploiting symmetry improves sample efficiency, generalization, and enables zero-shot transfer to mirrored tasks outside the training distribution.

II. PROBLEM FORMULATION

We model each bimanual manipulation task as a **Partially Observable Markov Decision Process (POMDP)** defined by $(\mathcal{S}, \mathcal{A}, \tau, r, \mathbb{P}_0, \mathcal{O}, \phi)$, where $s \in \mathcal{S}$ is the world state, $a \in \mathcal{A}$ the agent's action, $\tau : \mathcal{S} \times \mathcal{A} \times \mathcal{S} \rightarrow \mathbb{R}_+$ the transition kernel, $r : \mathcal{S} \times \mathcal{A} \rightarrow \mathbb{R}$ the reward function, $\mathbb{P}_0 : \mathcal{S} \rightarrow \mathbb{R}_+$ the initial state distribution, and $o \in \mathcal{O}$ an observation with $\phi : \mathcal{O} \times \mathcal{S} \rightarrow \mathbb{R}_+$ the observation model. We aim to learn a control policy π_θ from a dataset of N expert trajectories, $\mathbb{D}^{\text{exp}} = \{(\mathbf{o}_t^{(n)}, \mathbf{a}_t^{(n)})_{t=0}^{T_n}\}_{n=1}^N$, consisting of observation-action sequences generated by an expert policy π_{exp} . We thus frame policy learning as a **Behavior Cloning** problem to learn a parametric stochastic policy $\pi_\theta(\cdot|\mathbf{x})$ with parameters θ that approximates the expert policy $\pi_{\text{exp}}(\cdot|\mathbf{x})$, where $\mathbf{x}$ a history of H consecutive observations, $\mathbf{x}_t := [\mathbf{o}_{t-H+1}, \dots, \mathbf{o}_t] \in \mathcal{X} \subseteq \mathcal{O}^H$. Formally, this objective minimizes the Kullback-Leibler divergence between the expert and learned policy:

$$\theta^* = \arg \min_{\theta} \mathbb{E}_{\mathbf{x} \sim \mathbb{D}_H^{\text{exp}}} D_{\text{KL}}(\pi_{\text{exp}}(\cdot|\mathbf{x}) \parallel \pi_\theta(\cdot|\mathbf{x})). \quad (1)$$

Crucially, we observe that in bimanual manipulation the **POMDP** admits a unique reflection symmetry, denoted g_r , induced by the robot's bilateral morphological symmetry [5] (see Fig. 1). This symmetry acts *linearly* on the state, action, and observation spaces via group actions $(\triangleright_S) : \mathbb{C}_2 \times \mathcal{S} \rightarrow \mathcal{S}$, $(\triangleright_A) : \mathbb{C}_2 \times \mathcal{A} \rightarrow \mathcal{A}$, and $(\triangleright_O) : \mathbb{C}_2 \times \mathcal{O} \rightarrow \mathcal{O}$, such that for any tuple $(s, a, o) \in \mathcal{S} \times \mathcal{A} \times \mathcal{O}$ the reflected tuple is given by $(g_r \triangleright_S s, g_r \triangleright_A a, g_r \triangleright_O o) \in \mathcal{S} \times \mathcal{A} \times \mathcal{O}$. Here, $\mathbb{C}_2 := \{e, g_r \mid g_r^2 = e\}$ denotes the reflection symmetry group, consisting of the identity e and reflection transformation g_r .

Intuitively, the reflective symmetry of the **POMDP** implies that under reflected observations, the respective optimal control action should also be reflected. Formally, the symmetric **POMDP** imposes a $\mathbb{C}_2$ -invariance constraint on the learned stochastic policy [6]–[8]:

$$\theta^* = \arg \min_{\theta} \mathbb{E}_{\mathbf{x} \sim \mathbb{D}_H^{\text{exp}}} D_{\text{KL}}(\pi_{\text{exp}}(\cdot|\mathbf{x}) \parallel \pi_\theta(\cdot|\mathbf{x})), \quad (2a)$$

$$\text{s.t. } \pi_\theta(a|\mathbf{x}) = \pi_\theta(g_r \triangleright_A a | g_r \triangleright_X \mathbf{x}), \quad \forall a \in \mathcal{A}, \mathbf{x} \in \mathcal{X}. \quad (2b)$$

Here, $g_r \triangleright_X \mathbf{x} := [g_r \triangleright_O \mathbf{o}_t]_{t=1}^H$ denotes the symmetry transformation of an observation-history sample.

III. METHODOLOGY

We address the constrained **Behavior Cloning** objective in Eq. (2) through **Flow Matching** [9], where sampling from the policy is modeled as integrating a continuous-time ODE:

$$\mathbf{a} = \mathbf{a}^{(0)} + \int_0^1 \mathbf{v}_*(\mathbf{a}^{(k)}, \mathbf{x}, k) dk, \quad \text{with } \mathbf{a}^{(0)} \sim \bar{\pi}_0(\cdot|\mathbf{x}). \quad (3)$$

Here, $\mathbf{v}_*$ is the velocity field that governs the evolution of the probability path from initial Gaussian noise $\bar{\pi}_0 = \mathcal{N}(0, I_d)$ to the target expert action distribution $\bar{\pi}_1 = \pi_{\text{exp}}$.

Previous work [10], [11] demonstrates that $\bar{\pi}_1$ is $\mathbb{G}$ -invariant when both a $\mathbb{G}$ -invariant prior (e.g., Gaussian noise) and a $\mathbb{G}$ -equivariant velocity field are employed. Therefore, to address the symmetry-constrained **BC** objective in Eq. (2), we solve a **FM** problem with equivariance constraints:

$$\arg \min_{\theta} \mathbb{E}_{\substack{\mathbf{a}^{(k)} \sim \bar{\pi}_k(\cdot|\mathbf{x}) \\ \mathbf{x} \sim \mathbb{D}_H^{\text{exp}}, k \sim \mathcal{U}[0,1]}} \|\mathbf{v}_\theta(\mathbf{a}^{(k)}, \mathbf{x}, k) - \mathbf{v}_*(\mathbf{a}^{(k)}, \mathbf{x}, k)\|^2, \quad (4a)$$

$$\text{s.t. } g_r \triangleright_A \mathbf{v}_\theta(\mathbf{a}, \mathbf{x}, k) = \mathbf{v}_\theta(g_r \triangleright_A \mathbf{a}, g_r \triangleright_X \mathbf{x}, k), \quad \forall \mathbf{a} \in \mathcal{A}, \mathbf{x} \in \mathcal{X}, k \in [0, 1]. \quad (4b)$$

While the velocity field error in Eq. (4a) effectively minimizes the **BC** objective in Eq. (1) [12], enforcing equivariance of the velocity field $\mathbf{v}_\theta$ in Eq. (4b) ensures that the policy π_θ satisfies the invariance constraint in Eq. (2b) [11]. In this paper, we consider three ways to leverage the described symmetry prior for policy learning with **FM**:

- (i) **Data Augmentation** (*SymAug*, Eq. (5)) adds reflected observation-action pairs to the dataset [5], [13]:

$$\mathbb{D}_H^{\text{aug}} := \{(g_r \triangleright_X \mathbf{x}, g_r \triangleright_A \mathbf{a}) \mid (\mathbf{x}, \mathbf{a}) \in \mathbb{D}_H^{\text{exp}}, g_r \in \mathbb{C}_2\}. \quad (5)$$

- (ii) The **Equivariance Consistency Loss** (*EquivReg*, Eq. (6)) encourages reflection symmetry of the velocity field through a regularized training loss, as in [14]:

$$\arg \min_{\theta} \mathcal{L}_{\text{CFM}}(\theta) + \lambda \underbrace{\left\| \begin{matrix} g_r \triangleright_A \mathbf{v}_\theta(\mathbf{a}^{(k)}, \mathbf{x}, k) \\ -\mathbf{v}_\theta(g_r \triangleright_A \mathbf{a}^{(k)}, g_r \triangleright_X \mathbf{x}, k) \end{matrix} \right\|}_{=: \mathcal{R}(\theta)}^2. \quad (6)$$

- (iii) The **Explicit Equivariance Constraint** (*EquivNet*) parameterizes $\mathbf{v}_\theta$ with a $\mathbb{C}_2$ -equivariant **NN**, guaranteeing equivariance also for out-of-distribution inputs. We introduce a novel $\mathbb{G}$ -equivariant transformer in which all modules are equivariant to an arbitrary compact group $\mathbb{G}$; details will be released with the final paper.


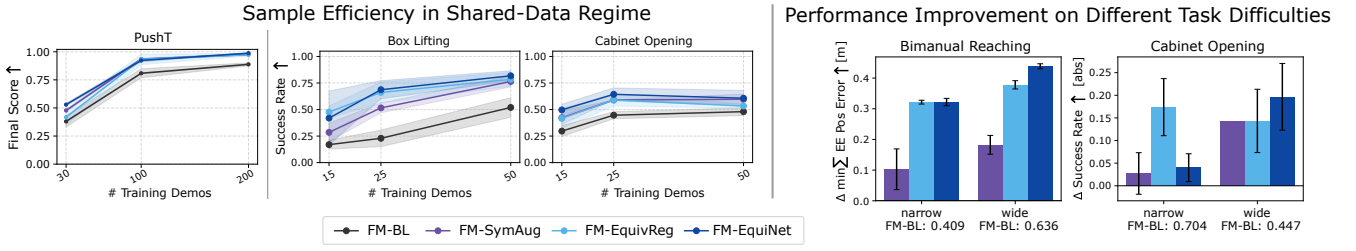


Fig. 3: Simulated mobile manipulation results in *shared-data* regime. *Left*: Sample efficiency across simulated tasks — symmetry-informed policies (*SymAug*, *EquivReg*, *EquivNet*) yield on average a 2 $\times$ gain over the symmetry-agnostic baseline (*BL*). *Right*: Performance improvements of symmetry-informed policies over baseline increase with task difficulty.

Method	Box Lifting			Cabinet Opening		
	Zero-shot	e / g_r	total $\uparrow$	Zero-shot	e / g_r	total $\uparrow$
FM-Baseline	0.59	0.00	0.29	0.89	0.00	0.44
FM-SymAug	0.63	0.67	0.65	0.90	0.88	0.89
FM-EquivReg	0.70	0.72	0.71	0.85	0.87	0.86
FM-EquivNet	0.67	0.66	0.67	0.87	0.83	0.85

TABLE I: *Zero-shot* evaluation in simulated mobile manipulation; policies are trained on the original configuration (e) and tested on both e and its reflection (g_r). We report mean success rates over 50 rollouts and three training seeds.



Mirrored (g_r) Original (e)

Fig. 4: Real-world Tiago++ results: symmetry-informed policies generalize *zero-shot* to mirrored can-in-bowl task (g_r).

IV. EXPERIMENTS

Our experiments evaluate the reflective symmetry prior for *IL* in terms of sample efficiency, generalization, and optimality. We compare all symmetry-aware methods from Sec. III against a symmetry-agnostic *FM* baseline (*BL*) policy. We consider three settings: (i) the *Push-T* benchmark (Fig. 2); (ii) simulated *MoMa* tasks with the bimanual Tiago++ mobile manipulator (Fig. 1); and (iii) a real-world Tiago++ task. We use state-based observations of end-effector and object poses, and end-effector pose control. For the Tiago++ tasks, all quantities are defined in the robot base frame, and pose targets are tracked by a whole-body controller [15], [16].

Symmetric Zero-Shot Generalization Table I demonstrates successful zero-shot transfer of all symmetry-aware methods to mirrored *MoMa* configurations absent from the training data, matching performance in the original setting.

Sample Efficiency In a *shared-data* regime, where demonstrations from both the original (e) and reflected (g_r) tasks are available during training, all symmetry-informed policies consistently outperform the baseline across all dataset size regimes (Fig. 3-left). For the challenging bimanual *box lifting* task we observe additional optimality gains of enforcing the policy invariance optimality constraint Eq. (2b) (*EquivReg*, *EquivNet*) over data augmentation (*SymAug*).

Spatial Generalization We evaluate two difficulty levels (*narrow* and *wide*) for the *bimanual reaching* and *cabinet opening* tasks, corresponding to narrower and broader distributions of target and cabinet poses. Figure 3-right shows that symmetry-informed policies yield larger performance gains at higher task difficulty, indicating that morphological symmetry priors scale well to more complex tasks.

Real-World Results Finally, we validate the morpholog-

ical symmetry prior on a real static-base unimanual Tiago++ task in *zero-shot* setting: the policy is trained on a pick-and-place task with the left arm, and evaluated both in this original (e) and the mirrored setting (g_r , right arm) (Fig. 4-left). Figure 4-right confirms repeatable zero-shot transfer under real-world conditions, validating the morphological symmetry prior beyond idealized simulation.

V. RELATED WORK

Previous work shows successful *IL* in *MoMa* [3], [17]–[21]. Symmetry priors in generative *IL* have been used to improve sample efficiency and generalization [22]–[30], mostly focusing on $\mathbb{SE}(3)$ -equivariance. Morphological symmetry priors have been studied for locomotion [31]–[35] and ambidextrous manipulation [6], [14]. The work most closely related to ours is the concurrent study of [14], which exploits morphological symmetry for *IL* in bimanual manipulation via regularization. In contrast, our work addresses *MoMa*, focusing on generative policy learning with *FM*, with symmetry-priors enforced via equivariant *NNs*, loss regularization, and data augmentation.

VI. CONCLUSIONS

We introduced a *FM* framework for *IL* that, by construction, respects the bilateral morphological symmetry of mobile manipulators. Our results show improved sample efficiency, generalization, and optimality, and indicate that these benefits scale with increasing task complexity. Further, our analysis highlights the advantages of imposing the symmetry prior as an optimality constraint (Eq. (4b); *EquivReg*, *EquivNet*) over data augmentation. In future work, we will integrate visual observations and scale our method to temporal and rotational symmetries in the environment.

REFERENCES

- [1] C. Chi, S. Feng, Y. Du, Z. Xu, E. Cousineau, B. Burchfiel, and S. Song, “Diffusion policy: Visuomotor policy learning via action diffusion,” in *Proceedings of Robotics: Science and Systems (RSS)*, 2023.
- [2] T. Z. Zhao, V. Kumar, S. Levine, and C. Finn, “Learning fine-grained bimanual manipulation with low-cost hardware,” *arXiv preprint arXiv:2304.13705*, 2023.
- [3] A. Brohan, N. Brown, J. Carbajal, Y. Chebotar, J. Dabis, C. Finn, K. Gopalakrishnan, K. Hausman, A. Herzog, J. Hsu *et al.*, “Rt-1: Robotics transformer for real-world control at scale,” *arXiv preprint arXiv:2212.06817*, 2022.
- [4] K. Black, N. Brown, D. Driess, A. Esmail, M. Equi, C. Finn, N. Fusai, L. Groom, K. Hausman, B. Ichter *et al.*, “ π_0 : A vision-language-action flow model for general robot control,” *arXiv preprint arXiv:2410.24164*, 2024.
- [5] D. Ordoñez-Apaez, G. Turrissi, V. Kostic, M. Martin, A. Agudo, F. Moreno-Noguer, M. Pontil, C. Semini, and C. Mastalli, “Morphological symmetries in robotics,” *The International Journal of Robotics Research*, vol. 44, no. 10-11, p. 02783649241282422, 2025. [Online]. Available: <https://doi.org/10.1177/02783649241282422>
- [6] Z. Li, Y. Jin, D. O. Apraez, C. Semini, P. Liu, and G. Chaltatzaki, “Morphologically symmetric reinforcement learning for ambidextrous bimanual manipulation,” *arXiv preprint arXiv:2505.05287*, 2025.
- [7] M. Zinkevich and T. R. Balch, “Symmetry in markov decision processes and its implications for single agent and multiagent learning,” in *Proceedings of the Eighteenth International Conference on Machine Learning*, ser. ICML ’01. San Francisco, CA, USA: Morgan Kaufmann Publishers Inc., 2001, p. 632.
- [8] J. Brehmer, J. Bose, P. De Haan, and T. S. Cohen, “Edgi: Equivariant diffusion for planning with embodied agents,” *Advances in Neural Information Processing Systems*, vol. 36, pp. 63 818–63 834, 2023.
- [9] Y. Lipman, R. T. Chen, H. Ben-Hamu, M. Nickel, and M. Le, “Flow matching for generative modeling,” *arXiv preprint arXiv:2210.02747*, 2022.
- [10] J. Köhler, L. Klein, and F. Noé, “Equivariant flows: exact likelihood generative learning for symmetric densities,” in *International conference on machine learning*. PMLR, 2020, pp. 5361–5370.
- [11] L. Klein, A. Krämer, and F. Noé, “Equivariant flow matching,” *Advances in Neural Information Processing Systems*, vol. 36, pp. 59 886–59 910, 2023.
- [12] M. Su, J. Y.-C. Hu, S. Pi, and H. Liu, “On flow matching kl divergence,” *arXiv preprint arXiv:2511.05480*, 2025.
- [13] I. Higgins, S. Racanière, and D. Rezende, “Symmetry-based representations for artificial and biological general intelligence,” *Frontiers in Computational Neuroscience*, vol. 16, p. 836498, 2022.
- [14] Z. Zhang, A. Mohan, S. Han, W. Shou, D. Wang, and Y. She, “Equibim: Learning symmetry-equivariant policy for bimanual manipulation,” *arXiv preprint arXiv:2603.08541*, 2026.
- [15] K. Zakka, “Mink: Python inverse kinematics based on MuJoCo,” May 2025. [Online]. Available: <https://github.com/kevinzakka/mink>
- [16] A. Del Prete, N. Mansard, O. E. Ramos, O. Stasse, and F. Nori, “Implementing torque control with high-ratio gear boxes and without joint-torque sensors,” in *Int. Journal of Humanoid Robotics*, 2016, p. 1550044. [Online]. Available: <https://hal.archives-ouvertes.fr/hal-01136936/document>
- [17] Z. Fu, T. Z. Zhao, and C. Finn, “Mobile aloha: Learning bimanual mobile manipulation with low-cost whole-body teleoperation,” in *Conference on Robot Learning (CoRL)*, 2024.
- [18] J. Yang, I. Huang, B. Vu, M. Bajracharya, R. Antonova, and J. Bohg, “Mobi- π : Mobilizing your robot learning policy,” *arXiv preprint arXiv:2505.23692*, 2025.
- [19] N. M. M. Shafiullah, A. Rai, H. Etukuru, Y. Liu, I. Misra, S. Chintala, and L. Pinto, “On bringing robots home,” *arXiv preprint arXiv:2311.16098*, 2023.
- [20] P. Sundaresan, R. Malhotra, P. Miao, J. Yang, J. Wu, H. Hu, R. Antonova, F. Engemann, D. Sadigh, and J. Bohg, “Homer: Learning in-the-wild mobile manipulation via hybrid imitation and whole-body control,” *arXiv preprint arXiv:2506.01185*, 2025.
- [21] A. Bahety, A. Balaji, B. Abbatematteo, and R. Martín-Martín, “Safemimic: Towards safe and autonomous human-to-robot imitation for mobile manipulation,” *arXiv preprint arXiv:2506.15847*, 2025.
- [22] D. Wang, S. Hart, D. Surovik, T. Kelestemur, H. Huang, H. Zhao, M. Yeatman, J. Wang, R. Walters, and R. Platt, “Equivariant diffusion policy,” in *8th Annual Conference on Robot Learning*, 2024. [Online]. Available: <https://openreview.net/forum?id=wD2kUvLT1g>
- [23] D. Wang, B. Hu, S. Song, R. Walters, and R. Platt, “A practical guide for incorporating symmetry in diffusion policy,” *arXiv preprint arXiv:2505.13431*, 2025.
- [24] C. Tie, Y. Chen, R. Wu, B. Dong, Z. Li, C. Gao, and H. Dong, “Et-seed: Efficient trajectory-level se(3) equivariant diffusion policy,” 2024. [Online]. Available: <https://arxiv.org/abs/2411.03990>
- [25] J. Yang, Z.-a. Cao, C. Deng, R. Antonova, S. Song, and J. Bohg, “Equibot: Sim(3)-equivariant diffusion policy for generalizable and data efficient learning,” in *8th Annual Conference on Robot Learning*, 2024.
- [26] J. Yang, C. Deng, J. Wu, R. Antonova, L. Guibas, and J. Bohg, “Equivact: Sim(3)-equivariant visuomotor policies beyond rigid object manipulation,” in *2024 IEEE International Conference on Robotics and Automation (ICRA)*. IEEE, 2024, pp. 9249–9255.
- [27] J. Jankowski, P. Klink, I. Posner, E. Gundogdu, K. Park, and C. Erdogan, “Guaranteed se(3)-equivariant control via hand-centric behavior cloning,” 2025. [Online]. Available: https://corl25-genpriors.github.io/Papers/15.Guaranteed_SE_3_Equivariant.pdf
- [28] M. Jia, D. Wang, G. Su, D. Klee, X. Zhu, R. Walters, and R. Platt, “Seil: Simulation-augmented equivariant imitation learning,” *arXiv preprint arXiv:2211.00194*, 2022.
- [29] N. Funk, J. Urañ, J. Carvalho, V. Prasad, G. Chaltatzaki, and J. Peters, “Actionflow: Equivariant, accurate, and efficient policies with spatially symmetric flow matching,” *arXiv preprint arXiv:2409.04576*, 2024.
- [30] J. Chang, R. Mei, W. Ke, and X. Xu, “Efficientflow: Efficient equivariant flow policy learning for embodied ai,” in *Proceedings of the AAAI Conference on Artificial Intelligence*, vol. 40, no. 24, 2026, pp. 19 496–19 504.
- [31] M. Mittal, N. Rudin, V. Klemm, A. Allshire, and M. Hutter, “Symmetry considerations for learning task symmetric robot policies,” *arXiv preprint arXiv:2403.04359*, 2024.
- [32] F. Abdolhosseini, H. Y. Ling, Z. Xie, X. B. Peng, and M. van de Panne, “On learning symmetric locomotion,” in *Motion, Interaction and Games*, ser. MIG ’19. New York, NY, USA: Association for Computing Machinery, 2019. [Online]. Available: <https://doi.org/10.1145/3359566.3360070>
- [33] Z. Su, X. Huang, D. Ordoñez-Apaez, Y. Li, Z. Li, Q. Liao, G. Turrissi, M. Pontil, C. Semini, Y. Wu *et al.*, “Leveraging symmetry in rl-based legged locomotion control,” in *2024 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*. IEEE, 2024, pp. 6899–6906.
- [34] S. Wei, X. Chen, F. Xie, G. E. Katz, Z. Gan, and L. Gan, “M-sppo: Morphological-symmetry-equivariant policy for legged robot locomotion,” *arXiv preprint arXiv:2512.00727*, 2025.
- [35] F. Xie, S. Wei, Y. Song, Y. Yue, and L. Gan, “Morphological-symmetry-equivariant heterogeneous graph neural network for robotic dynamics learning,” *arXiv preprint arXiv:2412.01297*, 2024.