

FLEX- π : A MULTI-STREAM WORLD-ACTION MODEL WITH COMPUTE FLEXIBILITY

Ge Yan^{* $\diamond$} , Jinghao Liu^{* $\diamond$} , Yuzhi Fan^{* $\diamond$} , Lei Cai ^{$\diamond$} , Minwen Liao ^{$\diamond$} ,
Jesse Zhang ^{$\dagger\diamond$} , Dieter Fox ^{$\dagger\diamond\dagger$}

$\diamond$ University of Washington $\dagger$ Allen Institute for AI

^{*}Equal contribution. ^{$\dagger$} Equal advising.

<https://flex-pi.github.io/>

ABSTRACT

World-action models (WAMs) predict the future to act better, but nearly all of them predict only RGB latents—trained purely for pixel reconstruction, with no explicit signal for the 3D geometry or object semantics manipulation needs. We find a surprising free lunch: the same frozen video-generation VAE that encodes RGB also encodes 3D pointmaps almost losslessly, with no pointmap-specific training at all. This lets us supervise FLEX- π , a 6B-parameter WAM, on 3D geometry and object-centric DINO semantics alongside RGB—at no cost in new sensors, new pre-training, or inference latency. Every visual signal is projected into this shared latent space and denoised jointly with actions inside a Mixture-of-Transformers backbone; per-stream dropout with *cross-modality forcing* then lets a single trained checkpoint run on any subset of these streams, from a fast action-only mode to full joint generation. The result is a policy that is exceptionally demonstration-efficient and generalizes well, beating the strongest baselines by up to $2\text{-}7\times$ on dexterous, precise, real-world bimanual manipulation tasks both in and out of distribution—all while running *faster* than $\pi_{0.5}$.

1 INTRODUCTION

Generalist robot policies that jointly predict future observations and actions—*world-action models* (WAMs)—have recently emerged as a strong alternative to vision-language-action models (VLAs). WAMs owe their demonstration efficiency and generalization to two factors: they learn robust representations via *joint prediction* of actions and future observations during training (Zhu et al., 2025; Ye et al., 2026b), and they inherit strong spatiotemporal priors from video-generation backbones pre-trained on large-scale video data (Kim et al., 2026b; Yuan et al., 2026b; NVIDIA et al., 2026). We build on both factors to train WAM policies that are substantially more demonstration-efficient and generalizable, while remaining fast enough to deploy.

Although predicting future visual observations is central to WAM training, current generalist WAMs almost exclusively predict future RGB image latents from video generation model encoders (Ye et al., 2026a;b; Yuan et al., 2026b). While effective, these latents, trained via pixel *reconstruction*, mainly capture appearance details and are not aligned with the 3D structure or object semantics needed for robot manipulation. Supervising geometry and object semantics *directly* would supply both, giving the WAM a stronger joint prediction training signal, but at a steep price: additional sensor modalities, training new priors, or sacrificing inference speed. This paper asks: how can we amplify the strengths of WAMs—joint prediction and strong visual priors—without these sacrifices?

To address these questions, we introduce FLEX- π , a 6B parameter WAM that is highly demonstration-efficient and generalizable through training to predict not only future RGB observations, but also future 3D pointmaps and object-level semantics. FLEX- π incurs none of the three costs above. Pointmaps and object semantics are both derived from the same RGB image—via Depth Anything 3 (Lin et al., 2026) and DINOv3 (Siméoni et al., 2026) respectively—so no sensor modality beyond RGB is required. Both encoders are off-the-shelf, so no new visual prior needs to be trained. And because any visual modality can be dropped at deployment while the model still benefits from the extra training supervision, no inference latency is added.

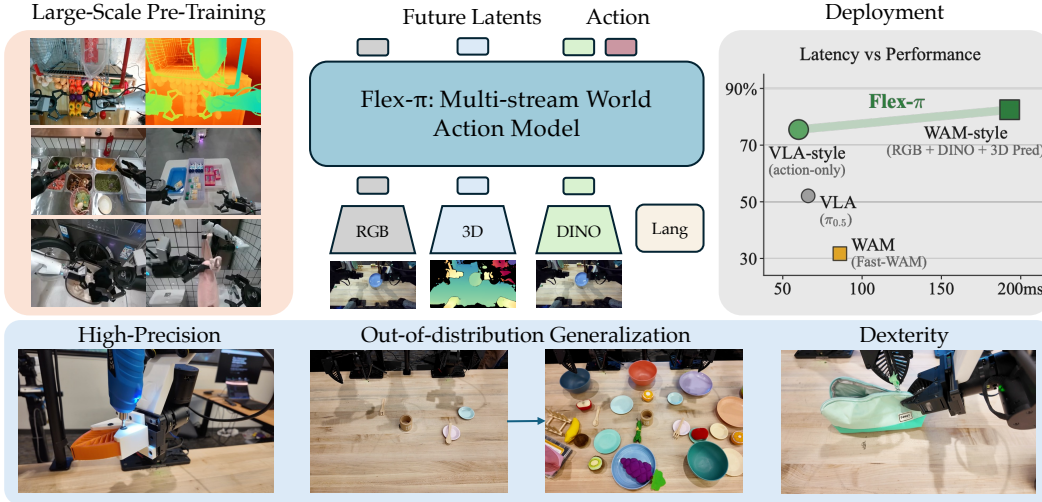


Figure 1: FLEX- π is a multi-stream world-action model which can take in RGB, 3D, and DINO visual features to jointly generate both latent future visual features and actions. After training, it supports flexible inference modes that let end users trade off latency and performance.

Specifically, FLEX- π uses a single, frozen VAE from a pre-trained video generation model (Wan et al., 2025) to encode both RGB images and 3D pointmaps into the same latent space—the VAE directly reconstructs pointmaps despite being trained only on RGB pixels—along with DINOv3 (Siméoni et al., 2026) to construct object-centric DINO features. FLEX- π embeds every visual modality into a single, shared latent space of token *streams*, one for each modality. It then routes each stream through a Mixture-of-Transformers (Liang et al., 2025) backbone. Because actions are generated jointly with each future visual stream, the policy inherits rich priors from internet-scale pre-training and learns a stronger internal representation for action generation. Finally, FLEX- π randomly drops out visual input streams during training and applies *cross-modality forcing*—generating each future stream whether or not it was observed as input—so that a single trained checkpoint has the flexibility to operate on any subset of available visual inputs and outputs at inference. This lets practitioners choose their own point on the speed–performance frontier at deployment time, rather than fixing it during training (Figure 1).

Our ablations demonstrate that both additional visual streams significantly improve performance, *even when not predicted at inference time*. Initialized from a video generation model (Wan et al., 2025) and pre-trained on AGIBOT World (AgiBot-World-Contributors et al., 2025), FLEX- π shows strong *demonstration efficiency*, *generalization*, and *deployment flexibility*: In RoboTwin, FLEX- π exceeds the strongest WAM baseline by $1.9\times$ with limited demonstrations and continues to outperform when given full data coverage. In LIBERO (Liu et al., 2023a), one FLEX- π checkpoint outperforms all existing VLA or WAM methods with up to 99.2% overall success rate while generalizing well to LIBERO-Plus (Fei et al., 2025). Finally, in dexterous, precise, real-world tasks on a bimanual YAM, FLEX- π outperforms baselines ($\pi_{0.5}$, ManiFlow, Fast-WAM) by $2\text{--}7\times$ in success rates both in and out of distribution. In fact, when only generating actions, FLEX- π achieves lower inference latency than $\pi_{0.5}$ while outperforming all real-world baselines; predicting all visual streams further boosts performance. Overall, FLEX- π shows that a WAM can gain semantic and geometric grounding essentially for free—no new sensors, no new pre-training, no slower inference—resulting in better policy performance while remaining fast enough to deploy.

2 RELATED WORK

Generalist Manipulation Policies. A prominent line of work builds generalist manipulation policies on top of pre-trained vision-language models, demonstrating that web-scale priors transfer to robot control with improved generalization over specialist policies (Brohan et al., 2023; Black et al., 2024; Niu et al., 2024; Intelligence et al., 2025; NVIDIA et al., 2025; Li et al., 2025a; Goyal et al.,

2025; Team et al., 2025; Chen et al., 2025b; Lee et al., 2025; Yan et al., 2025b; Fang et al., 2026; Zha et al., 2026; Chen et al., 2026; Kim et al., 2026a; Wu et al., 2026; Barreiros et al., 2026; Galaxea Team, 2026). During action fine-tuning, they predict actions without modeling future observations.

A second line of work predicts how visual inputs change, either by planning in image space or by regularizing the policy through a joint world–action objective. Early approaches cast control as text-conditioned video generation (Du et al., 2023) or pre-train video generators on web data before fine-tuning for manipulation (Wu et al., 2024; Cheang et al., 2024; Zhou et al., 2024b). More recent work scales this recipe (Jang et al., 2025; Huang et al., 2025b; Bi et al., 2025; Gao et al., 2026; Yin et al., 2026; Wang et al., 2026; Guo et al., 2026; Zhang et al., 2026). Specifically, joint world–action models such as UWM (Zhu et al., 2025) and DreamZero (Ye et al., 2026b) perform action and video generation simultaneously, thereby learning better representations than action generation alone. For compute efficiency, most world-model-based policies predict in a latent representation space (Zhou et al., 2024a; Maes et al., 2026; Hafner et al., 2020, 2023; Hansen et al., 2024, 2026; Zhu et al., 2025). Closest to ours, recent, generalist WAM policies are initialized from pre-trained video-generation models with latent RGB prediction objectives (Ye et al., 2026b;a; Li et al., 2026; Zhang et al., 2026; Yuan et al., 2026b). However, rather than predicting a single RGB latent stream, FLEX- π co-denoises latents for RGB, DINO features representing object semantics, and 3D pointmaps, extending WAM training supervision to additionally focus on geometry and semantics.

Multimodal Policy Learning. A growing body of work grounds manipulation using additional inputs, e.g., by providing explicit 3D inputs (Shridhar et al., 2022; Zhu et al., 2023; Shi et al., 2023; Goyal et al., 2024; Ze et al., 2024; Yan et al., 2025a; Li et al., 2025b; Zhen et al., 2024; Singh et al., 2025; Qu et al., 2025; Yan et al., 2025b) or learning 3D world models (Peri et al., 2024; Huang et al., 2025a; 2026; Duisterhof et al., 2026). In contrast, FLEX- π projects 3D features directly into a shared latent space with DINO and RGB features, using a pre-trained video world model’s VAE encoder to encode 3D pointmaps of the same shape as their RGB image counterparts. Furthermore, FLEX- π works even without 3D input at inference time.

Other works demonstrate that masking additional input modalities during training, e.g., through diffusion noising, enables policies to generalize better (Block et al., 2023; Hong et al., 2026) or vary their capabilities as needed at inference time (Huang et al., 2025c). We drop both visual inputs and outputs via attention masking, training FLEX- π to still predict visual modalities that are absent in the input (cross-modality forcing, Sec. 3.2), which we find to *improve policy performance* (Figure 12) by forcing the model to internalize each visual representation from the others.

3 FLEX- π : A COMPUTE FLEXIBLE, MULTI-STREAM WAM

We instantiate FLEX- π as a world-action model supervised on future 3D geometry and object semantics in addition to RGB, without incurring any of the three costs raised in Sec. 1: additional sensor inputs, separately trained visual priors, or added inference latency. A single frozen VAE from a pre-trained video generation model encodes both RGB images and 3D pointmaps, and a frozen DINOv3 encoder supplies object-level semantic tokens; each visual input modality forms a token *stream* fused by a Mixture-of-Transformers backbone initialized from the same video model (Sec. 3.1 and Figure 2). We mask out both inputs and outputs during training, yielding a *single checkpoint* that supports any combination of input and output streams at inference (Sec. 3.2). We detail the training objective, pre-training/fine-tuning protocol, and inference procedure in Sec. 3.3.

Problem Statement. Our goal is to train a policy to predict actions a_t given image observations o_t , proprioception s_t , and language instruction l . Additionally, we assume access to DINO features d_t from a DINO-v3 (Siméoni et al., 2026) encoder and 3D information in the form of pointmaps $p_t \in \mathbb{R}^{H,W,3}$ (coming from Depth Anything 3 (Lin et al., 2026) applied to o).¹ We train a flexible *world action model* (WAM) $\pi_\theta(a_t, o_{t+1}, p_{t+1}, d_{t+1} \mid o_t, p_t, d_t, s_t, l)$ which can also generate any subset of future visual input modalities and can minimally take in just a single visual input, e.g., $\pi_\theta(a_t \mid o_t, s_t, l)$. Note that a_t corresponds to an action chunk $a_{t:t+H}$ (same with output observations), but we drop chunk notation throughout most of the paper for readability.

Flow Matching for Video Generation Models. State-of-the-art video generation models (HaCohen et al., 2024; Kong et al., 2024; Wan et al., 2025; NVIDIA, 2025; NVIDIA et al., 2026) often

¹For readability, we refer to a single o_t , p_t , and d_t , but each observation can consist of multiple tokens.

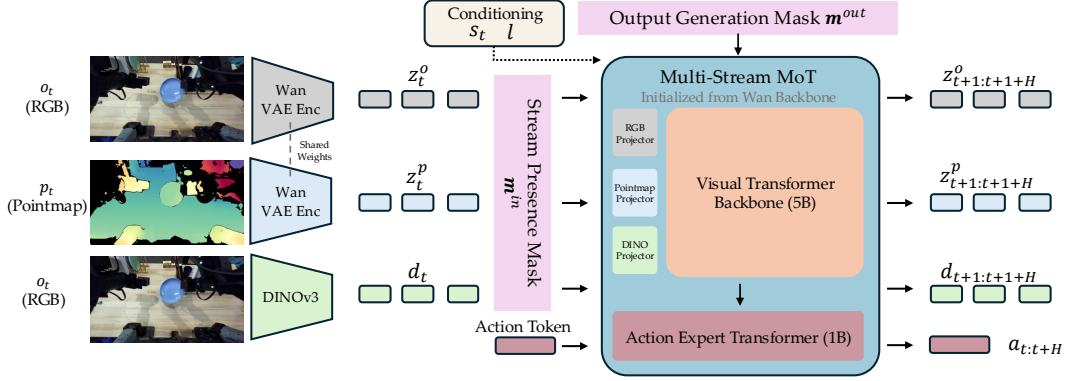


Figure 2: **FLEX- π architecture.** At time t , RGB o_t and 3D pointmaps p_t are encoded by a pre-trained Wan-2.2 VAE into latent token streams z_t^o, z_t^p ; DINOv3 produces semantic tokens d_t . A stream presence mask $\mathbf{m}^{\text{in}}$ selects which visual streams are attended to in a shared Visual Transformer Backbone. A smaller *Action Expert* cross-attends to visual streams to produce an action chunk $a_{t:t+H}$. Conditioning (s_t, l) is shared across streams, and an output mask $\mathbf{m}^{\text{out}}$ sets which future visual streams $\{z_t^o, z_t^p, d_t\}_{t+1}^{t+1+H}$ are mutually visible when jointly generated with the actions.

leverage an image encoder Enc and decoder Dec, e.g., a set of U-Nets (Ronneberger et al., 2015) trained as part of a variational auto-encoder (VAE) (Kingma & Welling, 2013), to encode images $o_{1:t}$ into a latent space $z_{1:t} = \text{Enc}(o_{1:t})$, predict future latent images z_{t+1} , and then decode them back into reconstructed images $o_{t+1} = \text{Dec}(z_{t+1})$. Latent prediction of the ground truth next latent is performed with a flow matching (Lipman et al., 2023; Liu et al., 2023b) diffusion transformer (Peebles & Xie, 2022) model $v_\theta(z_{t+1}^T | \tau, l, z_{\leq t})$ trained on the linear path $z_{t+1}^T = \tau z_{t+1} + (1 - \tau)\epsilon$ with $\epsilon \sim \mathcal{N}(0, I)$ and flow timestep $\tau \in [0, 1]$, regressing the flow path’s constant velocity $z_{t+1} - \epsilon$:

$$\mathcal{L}_{\text{FM}}(z_{t+1}) = \mathbb{E}_{z, \epsilon, \tau} \|v_\theta(\cdot | \tau, l, z_{1:t}) - (z_{t+1} - \epsilon)\|_2^2. \quad (1)$$

At inference, z_{t+1} is generated by integrating v_θ from $\tau=0$ to $\tau=1$ with K Euler steps and decoded via Dec. Crucially, (Enc, Dec) defines a latent space for *any* image-shaped tensor; we use it for both images o_t and pointmaps p_t . Note that sampling from π corresponds to integrating v_θ along the flow ODE over active output streams.

3.1 INPUT VISUAL STREAMS AND MODEL BACKBONE

FLEX- π operates over three complementary visual token streams, each contributing visual, spatial, or object-level semantic information. RGB images o_t and 3D pointmaps p_t add appearance context and explicit spatial geometry respectively, and are both encoded by the *same frozen* VAE from a pretrained video generation model so that both streams directly inherit spatiotemporal priors from large-scale video pretraining. DINO features d_t , computed by a frozen DINOv3 (Siméoni et al., 2026) encoder, help ground the other features with object semantics.

Visual Input Encoding. We use the frozen encoder and decoder from the VAE of the Wan-2.2-5B (Wan et al., 2025) video generation model. Surprisingly, we find that directly encoding and then decoding pointmaps with this frozen VAE—trained only on images—yields very accurate reconstructions, making its latent space immediately useful for encoding 3D information while preserving scene structure (Figure 3). For DINO we keep all patch tokens and losslessly *fold* each 2×2 neighborhood of patches into a single token ($768 \rightarrow 3072$ dim., cf. PixelUnshuffle (Shi et al., 2016)), cutting the tokens the model generates by $4 \times$ without discarding spatial detail (Sec. A.3).



Figure 3: **Wan-VAE pointmap reconstruction** closely matches the ground truth, despite only being trained on RGB images.

Global Conditioning. Text instructions l are processed by a frozen umT5 encoder (Chung et al., 2023) from Wan-2.2 and combined with s_t (encoding details in Sec. A.1) to serve as global con-

conditioning vectors for the latent prediction model v_θ (■ in Figure 2). FLEX- π ’s inputs are:

RGB latent tokens	$z_t^o = \text{Enc}(o_t)$	▷ Appearance; inherits video pretraining priors
Pointmap latent tokens	$z_t^p = \text{Enc}(p_t)$	▷ 3D geometry; shared video VAE latent space
DINO tokens	$d_t = \text{DINO}(o_t)$	▷ Object/semantic grounding (2)
Proprioception	s_t	▷ Robot joint states (global conditioning for v_θ)
Language	l	▷ Task specification (global conditioning for v_θ)

Model Backbone. Given the inputs in Eq. (2), we train a latent DiT model $v_\theta(a_{t+1}, z_{t+1}^o, z_{t+1}^p, d_{t+1} \mid s_t, l)$ which predicts both future actions and RGB, pointmap, and DINO latent tokens. Jointly predicting future images has been shown to improve action prediction (Zhu et al., 2025; Ye et al., 2026b; Dyna Robotics, 2026); we show the same holds for both pointmaps and DINO features in our experiments. In order to reduce training and inference time while fusing all input and output modalities, we employ a *mixture-of-transformers* (MoT) (Liang et al., 2025) model v_θ (■ in Figure 2) that processes all of the visual modality tokens z^o, z^p, d_t with the same transformer backbone (5B parameters, initialized directly from the pre-trained Wan-2.2-5B) and independent, per-modality feedforward projection networks, but contains separate key, query, value, feedforward, and normalization parameters for action generation ($\sim 1\text{B}$ parameters; we reduce the hidden dimension). Cross-stream attention is applied only in the middle 16 of the 30 MoT blocks, so early encoding and late decoding stay stream-specific while cross-modal fusion happens in the trunk. All outputs a, z^o, z^p, d are finally decoded by stream-specific feedforward prediction heads trained with the flow matching loss (Eq. (1)). Because the action expert is narrower than the backbone, we initialize it from Wan-2.2 by *resampling* rather than copying (Yuan et al., 2026b); Sec. A.3 details this procedure and the per-stream adapters that map each modality into and out of the shared trunk.

Causal Joint Generation. All outputs $z_{t+1}^o, z_{t+1}^p, d_{t+1}, a_t$ are *jointly generated*: action tokens attend to current observation tokens z_t^o, z_t^p, d_t and cross-attend to whichever visual output tokens are active, so action generation benefits from the model’s evolving representation of the future (Zhu et al., 2025; Ye et al., 2026b). Attention is one-way—no visual token ever attends to the action stream—see full attention rules in Sec. A.5.

3.2 FLEXIBLE TRAINING VIA VISUAL STREAM DROPOUT AND CROSS-MODALITY FORCING

A single FLEX- π checkpoint supports any combination of available input and output streams at inference—from action-only to full joint generation, even with just 1 visual input—without retraining. We achieve this with visual stream dropout and cross-modality forcing, detailed below.

Visual Stream Dropout. We construct two independent, per-sample binary masks over the three latent visual streams, RGB (z^o), DINO (d), and pointmap (z^p): the *input presence mask* $\mathbf{m}^{\text{in}} \in \{0, 1\}^3$ selects which streams are provided as conditioning at time t , and the *output attention mask* $\mathbf{m}^{\text{out}} \in \{0, 1\}^3$ (■ in Figure 2) governs the *joint-generation attention* among the future tokens: both what the action tokens cross-attend to and how the future visual tokens attend to one another. Every visual input is dropped independently with probability 0.5, subject to at least one visual stream remaining observed (Sec. A.5). Crucially, $\mathbf{m}^{\text{out}}$ is not a loss mask: it selects which futures the action tokens read, but every future stream is always denoised and incurs its flow-matching loss (Eq. (3)). Those futures attend to one another and to whichever streams are observed at time t , so actions are conditioned on a jointly generated future rather than three independent ones.

Cross-Modality Forcing. Because the two masks are drawn independently, a stream dropped from the input is still denoised at the output; the model must synthesize that modality’s future from the remaining streams. We call this *cross-modality forcing* and enable it for all three visual streams, so training covers every mapping from a non-empty subset of $\{z^o, d, z^p\}$ observed at time t to any subset generated at $t+1$: imagining future pointmaps from RGB and DINO with no 3D input, future DINO semantics from RGB and geometry, and so on (see Figure 4). Reminiscent of masked language models (Devlin et al., 2019; Reimers & Gurevych, 2019) or masked visual autoencoders (He et al., 2022), this constraint forces FLEX- π to internalize 3D, RGB, and object-centric representations, thereby aiding policy learning: we show in Sec. 4.5 that removing it degrades performance.

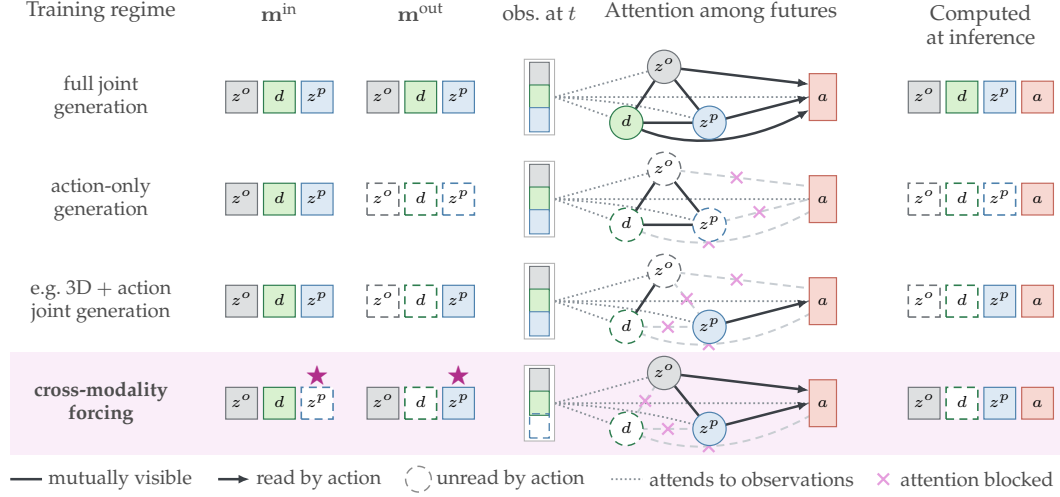


Figure 4: **One checkpoint, any visual input and output.** Each row is one example training scheme determined by sampling $\mathbf{m}^{\text{in}}$, selecting which streams are observed at time t , and $\mathbf{m}^{\text{out}}$, determining what visual outputs are visible for joint prediction. ★ shows an example of cross-modality forcing where the pointmap input is not attended to, yet joint generation of other outputs still conditions on generated pointmap futures, encouraging FLEX- π to internalize 3D representations.

3.3 TRAINING OBJECTIVES, DATA, AND INFERENCE

With the architecture (Sec. 3.1) and dropout scheme (Sec. 3.2) in place, training and inference both reduce to running flow matching over whichever streams are active in a given sample.

Loss. Because every future stream is denoised regardless of $\mathbf{m}^{\text{out}}$, the training objective sums the per-stream flow-matching loss of Eq. (1) over the action stream and *all three* visual streams:

$$\mathcal{L}(\theta) = \lambda_a \mathcal{L}_a^{\text{FM}}(a_t) + \sum_{i \in \{o, d, p\}} \lambda_i \mathcal{L}_i^{\text{FM}}(i_{t+1}), \quad (3)$$

where $\lambda_a, \{\lambda_i\}$ are per-stream loss weights, all set to 1 in every experiment we report. The output mask $\mathbf{m}^{\text{out}}$ is only an attention mask, not a loss mask—every stream head still trains on Eq. (3). For DINO we use “ x -prediction” (Salimans & Ho, 2022): the head predicts the clean features d_{t+1} rather than the velocity, since the DINO folding of Sec. 3.1 raises each token’s feature dimension to 3072, where velocity prediction degrades (Li & He, 2025) (Sec. A.4).

Pre-training and Fine-tuning. We pre-train FLEX- π on ~ 500 hours drawn from 100 tasks of AG-IBOT World-Beta (AgiBot-World-Contributors et al., 2025), a large-scale bimanual manipulation dataset recorded at 30 Hz from a head camera and two wrist cameras. Pointmaps come from annotating all three views with Depth Anything 3 (Lin et al., 2026). See Sec. B for additional pre-training details. After pre-training, we perform domain-specific fine-tuning for each experiment domain.

Inference. Given a chosen input/output regime, FLEX- π runs K Euler steps of the flow-matching ODE over the active output streams and emits an action chunk of length H (Sec. A.2). Sec. 4.5 measures what each of these choices costs and buys; Sec. I describes the training-free deployment stack the reported latencies are measured on, and Sec. A gives further architecture details.

4 EXPERIMENTS

We design our experiments to answer four questions:

- (Q1) Is **FLEX- π** effective in contact-rich, precise, and long-horizon manipulation on real robots?
- (Q2) Does **FLEX- π** hold that performance under OOD conditions or limited demonstrations?
- (Q3) How does **FLEX- π** compare against state-of-the-art VLAs and WAMs across the inference speed-performance spectrum?

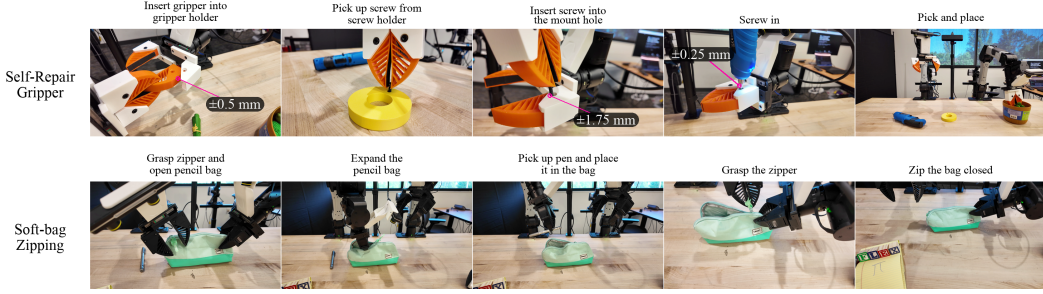


Figure 5: **Illustration of selected evaluation tasks.** *Self-Repair Gripper* rebuilds the robot’s own gripper over eight stages that must be completed in order, at $\pm 0.25\text{--}0.5$ mm of insertion clearance; *Soft-Bag Zipping* opens a deformable pencil case, places a pen inside, and zips it shut (Sec. G).

(Q4) How important are **FLEX- π** ’s additional visual inputs (dino and pointmaps) and their joint generation in policy performance?

4.1 EXPERIMENTAL SETUP

Benchmarks. We evaluate on two simulation suites and one real-world platform: (i) **RoboTwin** (Chen et al., 2025a) — a bimanual simulation benchmark with ground-truth 3D, used for the Pareto and data-scaling analyses; (ii) **LIBERO** (Liu et al., 2023a) — four task suites (Spatial, Object, Goal, Long) testing model fitting capabilities; (iii) **LIBERO-Plus** (Fei et al., 2025) — a perturbed variant of the LIBERO suites that injects seven categories of visual, spatial, and language shifts to probe generalization; and (iv) a real bimanual **YAM** robot evaluated on five dexterous tasks, with a held-out subset for generalization.

Baselines. We compare against three representative robot policy baselines on RoboTwin: $\pi_{0.5}$ (Intelligence et al., 2025) as the VLA baseline, and **Fast-WAM** (Yuan et al., 2026b) and **LingBot-VA** (Li et al., 2026) as representative, similar parameter-count WAM baselines, which unlike **FLEX- π** , train only with RGB latent prediction. We retrain all three at the reduced demonstration budgets of the data-scaling sweep, since no published work reports them, and quote published figures at full data (Sec. F). We additionally report published RoboTwin and LIBERO numbers for a variety of additional WAM and VLA baselines. In the real world, we again compare against $\pi_{0.5}$ and **Fast-WAM** along with a 3D VLA baseline, **ManiFlow** (Yan et al., 2025b).

Training protocol. All **FLEX- π** variants are pre-trained on AGIBOT World (AgiBot-World-Contributors et al., 2025) and fine-tuned in each setting. Full hyperparameters are in Sec. J.

4.2 (Q1): REAL-WORLD BIMANUAL MANIPULATION

Task selection and setup. We deploy a single pre-trained **FLEX- π** checkpoint on a real bimanual YAM robot (Sec. C) across five tasks that span the difficulty range we can measure. For all methods, we perform per-task fine-tuning. For fairness, we chose the number of per-task demonstrations to collect by iteratively collecting data and training the smallest baseline method, **ManiFlow**, until it achieved reasonable task completion rates. We also selected tasks for evaluation mode coverage: dexterity, precision, long-horizon, and contact-rich manipulation. **Put Plate on Rack** and **Sort Utensils** test bimanual coordination under sustained contact, and **Kitchen Organization** chains four such skills in a single long-horizon episode: placing a plate, inserting a spoon, stacking cups, and a bimanual handover into a rack slot. Every method trains on all four skills, and we score the two we evaluate under: placing the bowls and the bimanual handover into the rack (Table 3). The remaining two are the most difficult (Figure 5): **Self-Repair Gripper** has the robot use an electric screwdriver to re-insert and screw in *its own gripper* over eight stages, with insertions having just $\pm 0.25\text{--}0.5$ mm of clearance (Sec. G.3); **Soft-Bag Zipping** acts on a deformable pencil case so the target pose changes significantly between every rollout (Sec. G.4). Every rollout is scored under the partial-credit rubric of Sec. D. We report *task completion* (the points earned as a fraction of the maximum attainable) and its standard deviation, along with *binary success*, the percentage of rollouts which solve the entire task, over 10–20 trials per task (Sec. G.1).

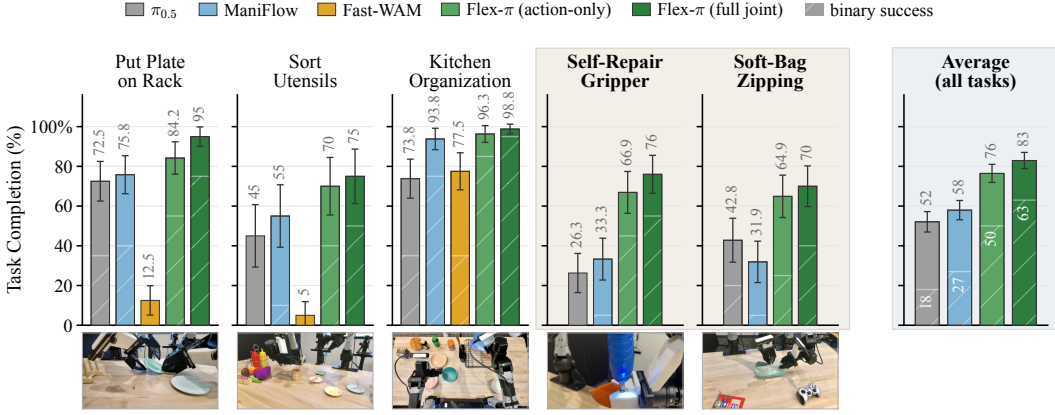


Figure 6: **Real-world results.** We report task completion for **FLEX- π** and three baselines on five bimanual tasks. Each bar is task completion; the hatched region at its base is the binary success rate, the fraction of rollouts satisfying the entire rubric. The rightmost panel averages the five tasks. Both metrics are scored under the rubric of Sec. D. **FLEX- π** leads on every task, with the largest margins on *Self-Repair Gripper* and *Soft-Bag Zipping*, which require sub-millimeter precision over a long horizon and dexterous manipulation of a deformable object respectively. The action-only variant, the cheapest policy here to run (Figure 7), already outperforms every baseline on every task.

FLEX- π outperforms on every task. Figure 6 shows both action-only and full joint generation *outperform every baseline* on all five tasks, and the margin grows with task difficulty: with full joint generation, **FLEX- π** achieves +5.0 points of task completion over the strongest baseline on *Kitchen Organization* but more on difficult tasks: +42.7 on *Self-Repair Gripper* and +27.2 on *Soft-Bag Zipping*. Averaged over all tasks, **FLEX- π** achieves 2.3 $\times$ higher success rate against the strongest baseline (**ManiFlow**). **Fast-WAM** is not competitive on any of these tasks and does not complete a single *Put Plate on Rack* rollout, hence we do not evaluate it on two most difficult tasks.

Inference speed vs task completion. We compare real-world inference speed vs averaged task completion in Figure 7. **FLEX- π** action-only exceeds the best baseline on all five tasks at 60 ms per call, faster than every other baseline, so the multi-stream training objective pays off even when no visual stream is generated at test time (more ablations later in Sec. 4.5). Figure 15 gives the same comparison with every measured configuration broken out. Enabling joint generation adds latency but results in higher task completion: it increases success rates by +13% on average.

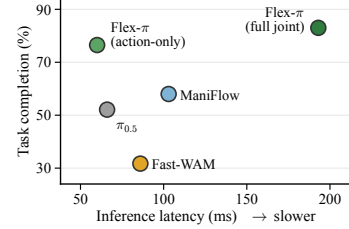


Figure 7: **Real-world speed-success frontier.** Five-task mean completion against measured latency (Sec. F.3).

4.3 (Q2): REAL WORLD OOD GENERALIZATION AND DEMO EFFICIENCY

Next, we test *generalization* and *demonstration-efficiency* in the real world. We re-evaluate the same models on three tasks from Sec. 4.2 but with out-of-distribution objects, under extreme clutter visual clutter and distractors, and after retraining on only half the real-world demonstrations. See Figure 8 for an example and Figure 14 for more.

FLEX- π is robust to visual distribution shift. In Figure 9(a) we plot *performance drop* of each method after significant visual distribution shift. **FLEX- π** gives up 4.7 points on average at full joint generation and 4.1 action-only, while **ManiFlow**, the strongest baseline originally, drops 26.7 despite having access to depth. **Fast-WAM** holds its performance too, but only because it had almost none to give up, and $\pi_{0.5}$ loses 25.6 points on the difficult, unseen soft bag. Since **FLEX- π** in both action-only and full joint prediction modes perform similarly well and both are significantly better than **ManiFlow** with

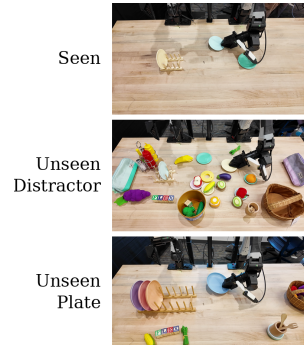


Figure 8: **Plate on Rack generalization conditions.**

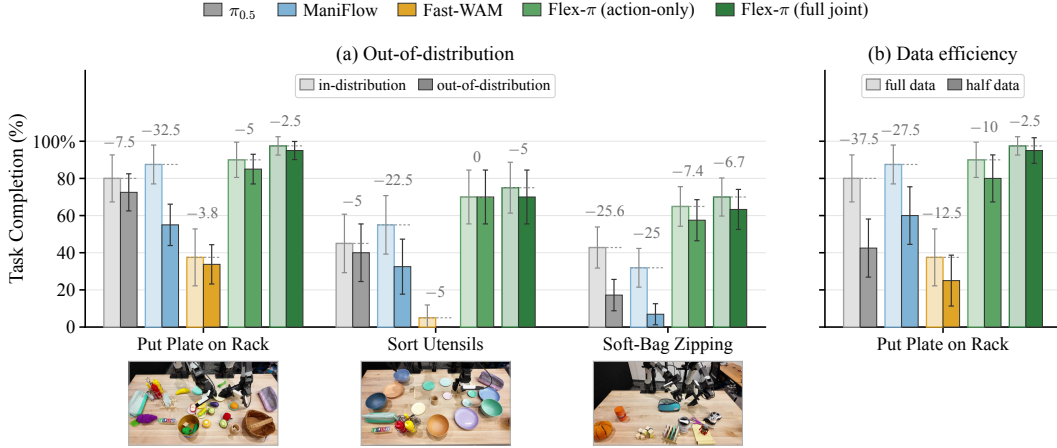


Figure 9: **Out-of-distribution performance and data efficiency.** (a) Unseen objects and distractors. (b) Training on 50% of the data. Each pair of bars is labelled with the change in task completion. **FLEX- π** stays ahead of both **ManiFlow** and $\pi_{0.5}$ under distribution shift and reduced data. Seen “put plate on rack” numbers are higher than Figure 6 due to evaluating with 1 plate to put in the rack instead of up to 2.

Method	Clean	Rand.	Avg.
VLA s			
X-VLA (2025)	72.9	72.8	72.9
$\pi_{0.5}$ (2025)	82.7	76.8	79.8
Qwen-RobotManip (2026a)	93.7	94.0	93.9
FLEX-π (action-only)	94.5	94.6	94.6
WAM s			
Motus (2025)	88.7	87.0	87.8
Fast-WAM (2026b)	91.9	91.8	91.8
LingBot-VA (2026)	92.9	91.6	92.2
LingBot-VA 2.0 (2026)	93.8	93.4	93.6
FLEX-π (full joint)	94.3	94.8	94.6

Table 1: **RoboTwin.** Success rate (%) over 50 tasks. Training: 2,500 clean + 25,000 randomized demos. **Bold** = best per column per category.

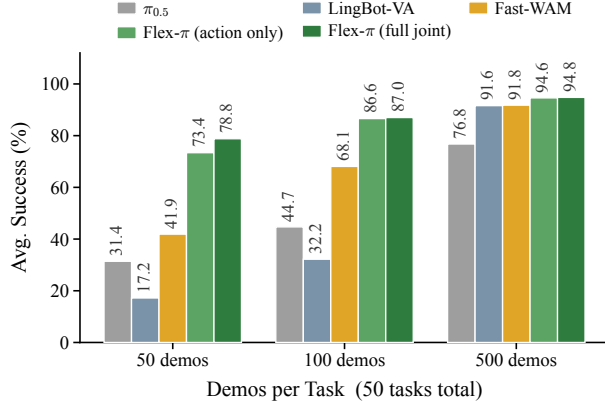


Figure 10: **RoboTwin data scaling** (domain-randomized, 50-task average). **FLEX- π** leads at every data scale in both modes, with the largest margin at low data; baselines only close the gap at 500 demos per task.

depth, **FLEX- π** ’s performance improvement over other baselines is explained by the superior representation learned during WAM *pre-training* with joint action-RGB-DINO-3D latent prediction. We ablate training objectives further in Sec. 4.5.

Superior data efficiency. In Figure 9(b) we see that when fine-tuning on half the real-world data, **FLEX- π** maintains the highest success rates, even in action-only prediction mode. In fact, **FLEX- π** with full-joint prediction trained with just half the data still outperforms all baselines trained on the full dataset, and action-only on half the data matches $\pi_{0.5}$ fine-tuned on the full set. The world-action objective supplies supervision that would otherwise have to come from more demonstrations. We next detail simulation results, which also further test generalization and data efficiency.

4.4 (Q3): LARGE-SCALE COMPARISON OF FLEX- π AGAINST MANY VLAS AND WAMS

RoboTwin. We start simulation comparisons with RoboTwin (Chen et al., 2025a), on a 50-task comparison. Table 1 reports success rate under the standard clean background and domain-randomized

evaluation settings, we fine-tune with one checkpoint on both datasets and all tasks. **FLEX- π** leads with 94.6% action-only against 93.9% for the strongest VLA baseline, Qwen-RobotManip (Yuan et al., 2026a), which uses a $\sim 38,100$ -hour pre-training corpus $76\times$ larger than ours. Full joint prediction also outperforms every WAM baseline, including Motus (Bi et al., 2025) and the strongest, LingBot-VA 2.0 (Zhang et al., 2026). Interestingly, in these results, both **FLEX- π** full joint and action-only perform similarly, indicating potential near-saturation of this benchmark.

We next study **data scaling** against $\pi_{0.5}$, **LingBot-VA**, and **Fast-WAM** by varying the number of training demonstrations per task, using $N \in \{50, 100, 500\}$. We report 50-task average success rates in Figure 10, showing that **FLEX- π** is significantly more data-efficient than the baselines: in lower demonstration regimes, **FLEX- π** outperforms all three by $1.9\text{--}4.5\times$. Importantly, full joint prediction outperforms at all data budgets, indicating that generating visual futures at inference time improves data efficiency.

LIBERO. In LIBERO, we test the model’s *action-fitting capacity* (since typical evaluations contain no train/test split) against 21 other VLA and WAM baselines. We fine-tune a single **FLEX- π** checkpoint on the four standard evaluation suites (Spatial, Object, Goal, and Long; 10 tasks each, 50 demonstrations per task) and evaluate it with 50 rollouts per task, reporting success rates in Table 2; Sec. E details how we obtain the pointmap stream in simulation and the evaluation protocol we follow.

In LIBERO, we observe that stream dropout (Sec. 3.2) unsurprisingly slightly hurts action overfitting capacity. Therefore, we also report **FLEX- π^*** numbers, which come from fine-tuning without stream dropout. We see full joint prediction slightly improves performance in both cases, and **FLEX- π^*** with full joint prediction matches the best baseline, Qwen-RobotManip (pre-trained with $76\times$ more data) while outperforming all other VLA and WAM baselines in each respective category.

LIBERO-Plus. To probe generalization, we also evaluate on LIBERO-Plus (Fei et al., 2025), which perturbs the LIBERO evaluation set along seven axes; Appendix Table 7 reports the per-perturbation breakdown over all 10,030 perturbed tasks. **FLEX- π** with full joint performance outperforms or matches action-only on every perturbation type, signifying that generating future visual streams at inference time can help even under significant perturbations. **FLEX- π** outperforms Fast-WAM and all VLA baselines except $\pi_{0.5}$ and Qwen-RobotManip, which have among the strongest VLM backbones or pre-training among the VLAs, signifying additional gains could come from combining **FLEX- π** with strong VLM backbones and further pre-training.

Method	LIBERO
<i>VLAs</i>	
$\pi_{0.5}$ (2025)	96.9
GR00T-N1 (2025)	93.9
OpenVLA-OFT (2025)	97.1
MolmoAct2-Think (2026)	98.1
Qwen-RobotManip (2026a)	99.2
FLEX-π (action-only)	98.4
FLEX-π^* (action-only)	98.7
<i>WAMs</i>	
LingBot-VA (2026)	98.5
Fast-WAM (2026b)	97.6
FLEX-π (full joint)	98.5
FLEX-π^* (full joint)	99.2

Table 2: **LIBERO success rates.** Per-suite results are in Table 6.

4.5 (Q4): IMPACT OF FLEX- π ’S ADDITIONAL INPUTS AND OUTPUTS IN POLICY PERFORMANCE

Finally, we perform ablation studies on additional input modalities, cross-modality forcing, output stream generation, and the reduction of flow-matching inference steps. All three ablations share the same setup: five RoboTwin tasks (listed in Sec. G) with domain randomization, 50 demonstrations per task, and 5 epochs from scratch.

Input Modalities. First, we ablate each *input* modality **FLEX- π** conditions on, training with video only, video + DINO, and all three visual streams (video + DINO + pointmap). In Figure 11a, adding DINO to video increases success by 6.8%, and adding pointmaps on top of both increases it by a further 20%. DINO adds object-centric structure and pointmaps add explicit 3D geometry, significantly improving policy performance over video-only predictions during the training process.

Output Modalities. Next, given *the same pre-trained checkpoint* and RGB-only input, we vary which streams **FLEX- π** generates at inference (Figure 11b). The action-only path reaches 40.2% at ~ 60 ms, undercutting even a PyTorch-compiled Fast-WAM (90 ms) at four times its success rate (10.0%). Also generating video lifts success to 60.4%, and adding DINO and pointmaps reaches 63.8% at ~ 193 ms. A single checkpoint thus spans more than a $3\times$ latency range and 24 points of success, leaving the operating point to be chosen at deployment.


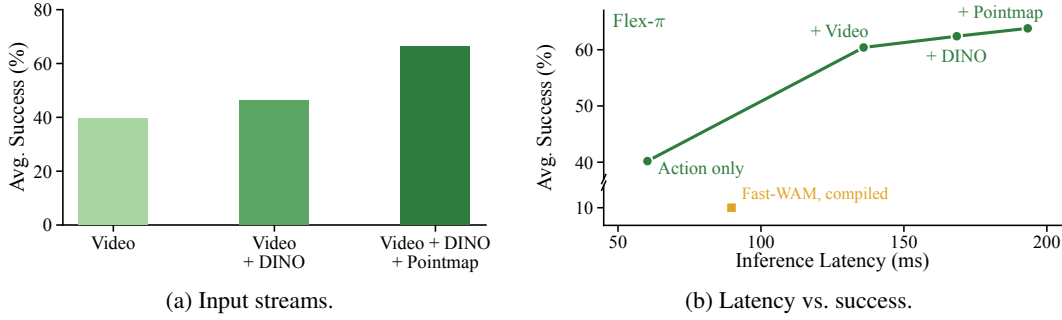


Figure 11: **RoboTwin ablations and system tradeoffs** (Sec. G). **(a)**: which visual streams the model observes, added cumulatively. For each ablation, all available streams are predicted at inference. **(b)**: with RGB-only input, generating more streams trades latency for success, from one checkpoint throughout.

Cross-Modality Forcing. Figure 12 ablates cross-modality forcing, i.e., training to generate visual modalities not present in the input mask (Sec. 3.2). Removing cross-modality forcing actually *hurts* success rates by 21%: The benefit of cross-modality forcing is therefore not only robustness to missing sensors at inference time, but also that requiring each modality to be predictable from the others encourages **FLEX- π** to construct a representation in which appearance, geometry, and semantics are mutually predictive. This stronger representation results in better action prediction. Appendix Figure 13 shows what this looks like at inference: with the pointmap withheld from the input, the same checkpoint still generates scene geometry matching what it produces when all three streams are observed.

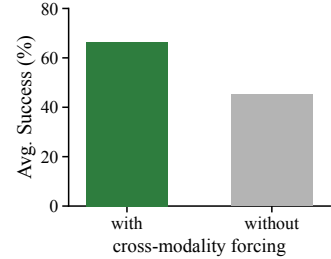

Few-Step Inference. We also ablate the number of Euler steps K during flow matching. Sweeping it on the same checkpoint, action-only success peaks at $K=4$ and stays within 1.0 point of that peak for every $K \geq 2$, so we used $K=4$ throughout our experiments, at ~ 60 ms action-only and ~ 193 ms full joint inference time. See Sec. I.1 for results and more details.

Figure 12: **Cross-modality forcing** on RoboTwin. Both models observe all three streams; only the training rule differs.

5 CONCLUSION AND LIMITATION

We introduce **FLEX- π** , a world-action model that embeds RGB, 3D, and DINO semantics into a shared latent space, yielding a single checkpoint that supports any combination of input and output streams at inference without the need for additional sensor modalities or training new visual priors. Our results demonstrate that it outperforms the strongest baselines on real robot hardware, while remaining faster than all of them in action-only mode. Ablations demonstrate that its demonstration efficiency and generalization capabilities come from the WAM training objective on all visual streams.

Limitations. Although well-optimized, the additional modalities and cross-modality forcing mean that **FLEX- π** takes longer to converge, requiring at least 10 epochs of fine-tuning on our real-world tasks. Furthermore, the joint generation mode of all output modalities is still slower than parameter-comparable VLAs. LIBERO-plus experiments, where 2 baselines with far more robot data pre-training and strong VLM backbones slightly outperform **FLEX- π** , demonstrate that having strong semantic reasoning capabilities and access to significantly more robot data would further improve **FLEX- π** , albeit while also increasing needed computation for pre-training. We leave addressing these challenges to future work and encourage the community to build upon **FLEX- π** .

ACKNOWLEDGMENTS

We thank Katherine Liu for providing valuable writing feedback. Additionally, we thank the University of Washington Hyak and Tillicum high-performance computing clusters for providing us with compute resources. Ge Yan, Jesse Zhang, and Dieter Fox acknowledge compute and funding support by the Toyota Research Institute.

REFERENCES

- AgiBot-World-Contributors, Qingwen Bu, Jisong Cai, Li Chen, Xiuqi Cui, Yan Ding, Siyuan Feng, Shenyuan Gao, Xindong He, Xuan Hu, Xu Huang, Shu Jiang, Yuxin Jiang, Cheng Jing, Hongyang Li, Jialu Li, Chiming Liu, Yi Liu, Yuxiang Lu, Jianlan Luo, Ping Luo, Yao Mu, Yuehan Niu, Yixuan Pan, Jiangmiao Pang, Yu Qiao, Guanghui Ren, Cheng Ruan, Jiaqi Shan, Yongjian Shen, Chengshi Shi, Mingkan Shi, Modi Shi, Chonghao Sima, Jianheng Song, Huijie Wang, Wenhao Wang, Dafeng Wei, Chengen Xie, Guo Xu, Junchi Yan, Cunbiao Yang, Lei Yang, Shukai Yang, Maoqing Yao, Jia Zeng, Chi Zhang, Qinglin Zhang, Bin Zhao, Chengyue Zhao, Jiaqi Zhao, and Jianchao Zhu. Agibot world colosseum: A large-scale manipulation platform for scalable and intelligent embodied systems. *arXiv preprint arXiv:2503.06669*, 2025.
- Jose Barreiros, Andrew Beaulieu, Aditya Bhat, Rick Cory, Eric Cousineau, Hongkai Dai, Ching-Hsin Fang, Kunimatsu Hashimoto, Muhammad Zubair Irshad, Masha Itkina, Naveen Kuppuswamy, Kuan-Hui Lee, Katherine Liu, Dale McConachie, Ian McMahon, Haruki Nishimura, Calder Phillips-Grafflin, Charles Richter, Paarth Shah, Krishnan Srinivasan, Blake Wulfe, Chen Xu, Mengchao Zhang, Alex Alspach, Maya Angeles, Kushal Arora, Vitor Campagnolo Guizilini, Alejandro Castro, Dian Chen, Ting-Sheng Chu, Sam Creasey, Sean Curtis, Richard Denitto, Emma Dixon, Eric Dusel, Matthew Ferreira, Aimee Goncalves, Grant Gould, Damrong Guoy, Swati Gupta, Xuchen Han, Kyle Hatch, Brendan Hathaway, Allison Henry, Hillel Hochshtein, Phoebe Horgan, Shun Iwase, Donovan Jackson, Siddharth Karamcheti, Sedrick Keh, Joseph Masterjohn, Masayuki Masuda, Jean Mercat, Patrick Miller, Paul Mitiguy, Tony Nguyen, Jeremy Nimmer, Yuki Noguchi, Reko Ong, Aykut Onol, Owen Pfannenstiehl, Richard Poyner, Leticia Priebe Mendes Rocha, Gordon Richardson, Christopher Rodriguez, Derick Seale, Michael Sherman, Mariah Smith-Jones, David Tago, Pavel Tokmakov, Matthew Tran, Basile Van Hoorick, Igor Vasiljevic, Sergey Zakharov, Mark Zolotas, Rareş Ambrus, Kerri Fetzer-Borelli, Benjamin Burchfiel, Hadas Kress-Gazit, Siyuan Feng, Stacie Ford, and Russ Tedrake. A careful examination of large behavior models for multitask dexterous manipulation. *Science Robotics*, 11(113): eaea6201, 2026. doi: 10.1126/scirobotics.aea6201.
- Hongzhe Bi, Hengkai Tan, Shenghao Xie, Zeyuan Wang, Shuhe Huang, Haitian Liu, Ruowen Zhao, Yao Feng, Chendong Xiang, Yinze Rong, Hongyan Zhao, Hanyu Liu, Zhizhong Su, Lei Ma, Hang Su, and Jun Zhu. Motus: A unified latent action world model. *arXiv preprint arXiv:2512.13030*, 2025.
- Kevin Black, Noah Brown, Danny Driess, Adnan Esmail, Michael Equi, Chelsea Finn, Niccolo Fusai, Lachy Groom, Karol Hausman, Brian Ichter, Szymon Jakubczak, Tim Jones, Liyiming Ke, Sergey Levine, Adrian Li-Bell, Mohith Mothukuri, Suraj Nair, Karl Pertsch, Lucy Xiaoyang Shi, James Tanner, Quan Vuong, Anna Walling, Haohuan Wang, and Ury Zhilinsky. π_0 : A vision-language-action flow model for general robot control. *arXiv preprint arxiv:2410.24164*, 2024.
- Adam Block, Ali Jadbabaie, Daniel Pfrommer, Max Simchowitz, and Russ Tedrake. Provable guarantees for generative behavior cloning: Bridging low-level stability and high-level behavior. In *Thirty-seventh Conference on Neural Information Processing Systems*, 2023.
- Anthony Brohan, Noah Brown, Justice Carbajal, Yevgen Chebotar, Xi Chen, Krzysztof Choromanski, Tianli Ding, Danny Driess, Avinava Dubey, Chelsea Finn, Pete Florence, Chuyuan Fu, Montse Gonzalez Arenas, Keerthana Gopalakrishnan, Kehang Han, Karol Hausman, Alexander Herzog, Jasmine Hsu, Brian Ichter, Alex Irpan, Nikhil Joshi, Ryan Julian, Dmitry Kalashnikov, Yuheng Kuang, Isabel Leal, Lisa Lee, Tsang-Wei Edward Lee, Sergey Levine, Yao Lu, Henryk Michalewski, Igor Mordatch, Karl Pertsch, Kanishk Rao, Krista Reymann, Michael Ryoo, Grecia Salazar, Pannag Sanketi, Pierre Sermanet, Jaspiar Singh, Anikait Singh, Radu Soricut, Huong Tran, Vincent Vanhoucke, Quan Vuong, Ayzaan Wahid, Stefan Welker, Paul Wohlhart,

- Jialin Wu, Fei Xia, Ted Xiao, Peng Xu, Sichun Xu, Tianhe Yu, and Brianna Zitkovich. Rt-2: Vision-language-action models transfer web knowledge to robotic control. In *Conference on Robot Learning (CoRL)*, 2023.
- Qingwen Bu, Yanting Yang, Jisong Cai, Shenyuan Gao, Guanghui Ren, Maoqing Yao, Ping Luo, and Hongyang Li. Univla: Learning to act anywhere with task-centric latent actions. In *Robotics: Science and Systems (RSS)*, 2025.
- Chi-Lam Cheang, Guangzeng Chen, Ya Jing, Tao Kong, Hang Li, Yifeng Li, Yuxiao Liu, Hongtao Wu, Jiafeng Xu, Yichu Yang, et al. Gr-2: A generative video-language-action model with web-scale knowledge for robot manipulation. *arXiv preprint arXiv:2410.06158*, 2024.
- Tianxing Chen, Zanzin Chen, Baijun Chen, Zijian Cai, Yibin Liu, Zixuan Li, Qiwei Liang, Xi-anliang Lin, Yiheng Ge, Zhenyu Gu, et al. Robotwin 2.0: A scalable data generator and benchmark with strong domain randomization for robust bimanual robotic manipulation. *arXiv preprint arXiv:2506.18088*, 2025a.
- William Chen, Suneel Belkhale, Suvir Mirchandani, Oier Mees, Danny Driess, Karl Pertsch, and Sergey Levine. Training strategies for efficient embodied reasoning. *arXiv preprint arXiv:2505.08243*, 2025b.
- William Chen, Jagdeep Singh Bhatia, Catherine Glossop, Nikhil Mathihalli, Ria Doshi, Andy Tang, Danny Driess, Karl Pertsch, and Sergey Levine. Steerable vision-language-action policies for embodied reasoning and hierarchical control. *arXiv preprint arXiv:2602.13193*, 2026.
- Cheng Chi, Zhenjia Xu, Siyuan Feng, Eric Cousineau, Yilun Du, Benjamin Burchfiel, Russ Tedrake, and Shuran Song. Diffusion policy: Visuomotor policy learning via action diffusion. *The International Journal of Robotics Research*, 2023.
- Hyung Won Chung, Xavier Garcia, Adam Roberts, Yi Tay, Orhan Firat, Sharan Narang, and Noah Constant. Unimax: Fairer and more effective language sampling for large-scale multilingual pretraining. In *The Eleventh International Conference on Learning Representations*, 2023.
- Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. BERT: Pre-training of deep bidirectional transformers for language understanding. In Jill Burstein, Christy Doran, and Tamar Solorio (eds.), *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pp. 4171–4186, Minneapolis, Minnesota, June 2019. Association for Computational Linguistics. doi: 10.18653/v1/N19-1423.
- Yilun Du, Sherry Yang, Bo Dai, Hanjun Dai, Ofir Nachum, Josh Tenenbaum, Dale Schuurmans, and Pieter Abbeel. Learning universal policies via text-guided video generation. *Advances in neural information processing systems*, 36:9156–9172, 2023.
- Bardienus Pieter Duisterhof, Deva Ramanan, Jeffrey Ichnowski, Justin Johnson, and Keunhong Park. Modality forcing for scalable spatial generation. *arXiv preprint arXiv:2606.13676*, 2026.
- Dyna Robotics. Dyna-2: Learning manipulation from a million hours of human experience, August 2026.
- Haoquan Fang, Jiafei Duan, Donovan Clay, Sam Wang, Shuo Liu, Weikai Huang, Xiang Fan, Wei-Chuan Tsai, Shirui Chen, Yi Ru Wang, Shanli Xing, Jaemin Cho, Jae Sung Park, Ainaz Eftekhari, Peter Sushko, Karen Farley, Angad Wadhwa, Cole Harrison, Winson Han, Ying-Chun Lee, Eli VanderBilt, Rose Hendrix, Suveen Ellawela, Lucas Ngoo, Joyce Chai, Zhongzheng Ren, Ali Farhadi, Dieter Fox, and Ranjay Krishna. Molmoact2: Action reasoning models for real-world deployment. *arXiv preprint arXiv:2605.02881*, 2026.
- Senyu Fei, Siyin Wang, Junhao Shi, Zihao Dai, Jikun Cai, Pengfang Qian, Li Ji, Xinzhe He, Shiduo Zhang, Zhaoye Fei, Jinlan Fu, Jingjing Gong, and Xipeng Qiu. Libero-plus: In-depth robustness analysis of vision-language-action models. *arXiv preprint arXiv:2510.13626*, 2025.
- Galaxea Team. Galaxea g0.5 technical report. 2026.

- Shenyuan Gao, William Liang, Kaiyuan Zheng, Ayaan Malik, Seonghyeon Ye, Sihyun Yu, Wei-Cheng Tseng, Yuzhu Dong, Kaichun Mo, Chen-Hsuan Lin, Qianli Ma, Seungjun Nah, Loic Magne, Jiannan Xiang, Yuqi Xie, Ruijie Zheng, Dantong Niu, You Liang Tan, K.R. Zentner, George Kurian, Suneel Indupuru, Pooya Jannaty, Jinwei Gu, Jun Zhang, Jitendra Malik, Pieter Abbeel, Ming-Yu Liu, Yuke Zhu, Joel Jang, and Linxi "Jim" Fan. Dreamdojo: A generalist robot world model from large-scale human videos. *arXiv preprint arXiv:2602.06949*, 2026.
- Ankit Goyal, Valts Blukis, Jie Xu, Yijie Guo, Yu-Wei Chao, and Dieter Fox. Rvt2: Learning precise manipulation from few demonstrations. *RSS*, 2024.
- Ankit Goyal, Hugo Hadfield, Xuning Yang, Valts Blukis, and Fabio Ramos. Vla-0: Building state-of-the-art vlas with zero modification. *arXiv preprint arXiv:2510.13054*, 2025.
- Yanjiang Guo, Lucy Xiaoyang Shi, Jianyu Chen, and Chelsea Finn. Ctrl-world: A controllable generative world model for robot manipulation. In *The Fourteenth International Conference on Learning Representations*, 2026.
- Yoav HaCohen, Nisan Chiprut, Benny Brazowski, Daniel Shalem, Dudu Moshe, Eitan Richardson, Eran Levin, Guy Shiran, Nir Zabari, Ori Gordon, Poriya Panet, Sapir Weissbuch, Victor Kulikov, Yaki Bitterman, Zeev Melumian, and Ofir Bibi. Ltx-video: Realtime video latent diffusion. *arXiv preprint arXiv:2501.00103*, 2024.
- Danijar Hafner, Timothy Lillicrap, Mohammad Norouzi, and Jimmy Ba. Mastering atari with discrete world models. *arXiv preprint arXiv:2010.02193*, 2020.
- Danijar Hafner, Jurgis Pasukonis, Jimmy Ba, and Timothy Lillicrap. Mastering diverse domains through world models. *arXiv preprint arXiv:2301.04104*, 2023.
- Nicklas Hansen, Hao Su, and Xiaolong Wang. TD-MPC2: Scalable, robust world models for continuous control. In *The Twelfth International Conference on Learning Representations*, 2024.
- Nicklas Hansen, Hao Su, and Xiaolong Wang. Learning massively multitask world models for continuous control. In *International Conference on Learning Representations (ICLR)*, 2026.
- Kaiming He, Xinlei Chen, Saining Xie, Yanghao Li, Piotr Dollar, and Ross Girshick. Masked Autoencoders Are Scalable Vision Learners. In *2022 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pp. 15979–15988. IEEE Computer Society, June 2022. doi: 10.1109/CVPR52688.2022.01553.
- Matthew M. Hong, Jesse Zhang, Anusha Nagabandi, and Abhishek Gupta. Tmrl: Diffusion timestep-modulated pretraining enables exploration for efficient policy finetuning. In *Robotics: Science and Systems (RSS)*, 2026.
- Suning Huang, Qianzhong Chen, Xiaohan Zhang, Jiankai Sun, and Mac Schwager. Particleformer: A 3d point cloud world model for multi-object, multi-material robotic manipulation. *arXiv preprint arXiv:2506.23126*, 2025a.
- Wenlong Huang, Yu-Wei Chao, Arsalan Mousavian, Ming-Yu Liu, Dieter Fox, Kaichun Mo, and Li Fei-Fei. Pointworld: Scaling 3d world models for in-the-wild robotic manipulation. *arXiv preprint arXiv:2601.03782*, 2026.
- Yuhang Huang, Shilong Zou, Jiazhaoh Zhang, Xinwang Liu, Ruizhen Hu, and Kai Xu. Adapower: Specializing world foundation models for predictive manipulation. *arXiv preprint arXiv:2512.03538*, 2025b.
- Zixuan Huang, Huaidian Hou, and Dmitry Berenson. Multimodal diffusion forcing for forceful manipulation. *arXiv preprint arXiv:2511.04812*, 2025c.
- Chia-Yu Hung, Qi Sun, Pengfei Hong, Amir Zadeh, Chuan Li, U-Xuan Tan, Navonil Majumder, and Soujanya Poria. Nora: A small open-sourced generalist vision language action model for embodied tasks. *arXiv preprint arXiv:2504.19854*, 2025.

- Physical Intelligence, Kevin Black, Noah Brown, James Darpinian, Karan Dhabalia, Danny Driess, Adnan Esmail, Michael Equi, Chelsea Finn, Niccolo Fusai, et al. $\pi_{0.5}$: a vision-language-action model with open-world generalization. *arXiv preprint arXiv:2504.16054*, 2025.
- Joel Jang, Seonghyeon Ye, Zongyu Lin, Jiannan Xiang, Johan Bjorck, Yu Fang, Fengyuan Hu, Spencer Huang, Kaushil Kundalia, Yen-Chen Lin, et al. Dreamgen: Unlocking generalization in robot learning through video world models. *arXiv preprint arXiv:2505.12705*, 2025.
- Dongyoung Kim, Huiwon Jang, Myungkyu Koo, Suhyeok Jang, Taeyoung Kim, Beomjun Kim, Byungjun Yoon, Changsung Jang, Daewon Choi, Dongsu Han, et al. Rldx-1 technical report. *arXiv preprint arXiv:2605.03269*, 2026a.
- Moo Jin Kim, Karl Pertsch, Siddharth Karamcheti, Ted Xiao, Ashwin Balakrishna, Suraj Nair, Rafael Rafailov, Ethan P Foster, Pannag R Sanketi, Quan Vuong, Thomas Kollar, Benjamin Burchfiel, Russ Tedrake, Dorsa Sadigh, Sergey Levine, Percy Liang, and Chelsea Finn. Open-VLA: An open-source vision-language-action model. In *Conference on Robot Learning (CoRL)*, 2024.
- Moo Jin Kim, Chelsea Finn, and Percy Liang. Fine-tuning vision-language-action models: Optimizing speed and success. *arXiv preprint arXiv:2502.19645*, 2025.
- Moo Jin Kim, Yihuai Gao, Tsung-Yi Lin, Yen-Chen Lin, Yunhao Ge, Grace Lam, Percy Liang, Shuran Song, Ming-Yu Liu, Chelsea Finn, and Jinwei Gu. Cosmos policy: Fine-tuning video models for visuomotor control and planning. In *International Conference on Learning Representations (ICLR)*, 2026b.
- Diederik P. Kingma and Max Welling. Auto-encoding variational bayes. *CoRR*, abs/1312.6114, 2013.
- Wei jie Kong, Qi Tian, Zijian Zhang, Rox Min, Zuozhuo Dai, Jin Zhou, Jiangfeng Xiong, Xin Li, Bo Wu, Jianwei Zhang, et al. Hunyuanvideo: A systematic framework for large video generative models. *arXiv preprint arXiv:2412.03603*, 2024.
- Jason Lee, Jiafei Duan, Haoquan Fang, Yuquan Deng, Shuo Liu, Boyang Li, Bohan Fang, Jieyu Zhang, Yi Ru Wang, Sangho Lee, et al. Molmoact: Action reasoning models that can reason in space. *arXiv preprint arXiv:2508.07917*, 2025.
- Lin Li, Qihang Zhang, Yiming Luo, Shuai Yang, Ruilin Wang, Fei Han, Mingrui Yu, Zelin Gao, Nan Xue, Xing Zhu, Yujun Shen, and Yinghao Xu. Causal world modeling for robot control. *arXiv preprint arXiv:2601.21998*, 2026.
- Tianhong Li and Kaiming He. Back to basics: Let denoising generative models denoise. *arXiv preprint arXiv:2511.13720*, 2025.
- Yi Li, Yuquan Deng, Jesse Zhang, Joel Jang, Marius Memmel, Caelan Reed Garrett, Fabio Ramos, Dieter Fox, Anqi Li, Abhishek Gupta, and Ankit Goyal. Hamster: Hierarchical action models for open-world robot manipulation. In *International Conference on Learning Representations (ICLR)*, 2025a.
- Yuelei Li, Ge Yan, Annabella Macaluso, Mazeyu Ji, Xueyan Zou, and Xiaolong Wang. Integrating lmm planners and 3d skill policies for generalizable manipulation. *arXiv preprint arXiv:2501.18733*, 2025b.
- Weixin Liang, LILI YU, Liang Luo, Srini Iyer, Ning Dong, Chunting Zhou, Gargi Ghosh, Mike Lewis, Wen tau Yih, Luke Zettlemoyer, and Xi Victoria Lin. Mixture-of-transformers: A sparse and scalable architecture for multi-modal foundation models. *Transactions on Machine Learning Research*, 2025. ISSN 2835-8856.
- Yue Liao, Pengfei Zhou, Siyuan Huang, Donglin Yang, Shengcong Chen, Yuxin Jiang, Yue Hu, Jingbin Cai, Si Liu, Jianlan Luo, Liliang Chen, Shuicheng Yan, Maoqing Yao, and Guanghui Ren. Genie envisioner: A unified world foundation platform for robotic manipulation. In *International Conference on Learning Representations (ICLR)*, 2026.

- Haotong Lin, Sili Chen, Junhao Liew, Donny Y Chen, Zhenyu Li, Guang Shi, Jiashi Feng, and Bingyi Kang. Depth anything 3: Recovering the visual space from any views. In *International Conference on Learning Representations (ICLR)*, 2026.
- Yaron Lipman, Ricky T. Q. Chen, Heli Ben-Hamu, Maximilian Nickel, and Matthew Le. Flow matching for generative modeling. In *The Eleventh International Conference on Learning Representations*, 2023.
- Bo Liu, Yifeng Zhu, Chongkai Gao, Yihao Feng, Qiang Liu, Yuke Zhu, and Peter Stone. Libero: Benchmarking knowledge transfer for lifelong robot learning. *arXiv preprint arXiv:2306.03310*, 2023a.
- Xingchao Liu, Chengyue Gong, and qiang liu. Flow straight and fast: Learning to generate and transfer data with rectified flow. In *The Eleventh International Conference on Learning Representations*, 2023b.
- Qi Lv, Weijie Kong, Hao Li, Jia Zeng, Zherui Qiu, Delin Qu, Haoming Song, Qizhi Chen, Xiang Deng, and Jiangmiao Pang. F1: A vision-language-action model bridging understanding and generation to actions. *arXiv preprint arXiv:2509.06951*, 2025.
- Lucas Maes, Quentin Le Lidec, Damien Scieur, Yann LeCun, and Randall Balestriero. Leworld-model: Stable end-to-end joint-embedding predictive architecture from pixels. *arXiv preprint arXiv:2603.19312*, 2026.
- Dantong Niu, Yuvan Sharma, Giscard Biamby, Jerome Quenum, Yutong Bai, Baifeng Shi, Trevor Darrell, and Roei Herzig. LLARVA: Vision-action instruction tuning enhances robot learning. In *8th Annual Conference on Robot Learning*, 2024.
- NVIDIA. Cosmos-predict2: World simulation model for physical ai, 2025.
- NVIDIA, Johan Bjorck, Fernando Castañeda, Nikita Cherniadev, Xingye Da, Runyu Ding, Linxi "Jim" Fan, Yu Fang, Dieter Fox, Fengyuan Hu, Spencer Huang, Joel Jang, Zhenyu Jiang, Jan Kautz, Kaushil Kundalia, Lawrence Lao, Zhiqi Li, Zongyu Lin, Kevin Lin, Guilin Liu, Edith Llontop, Loic Magne, Ajay Mandlekar, Avnish Narayan, Soroush Nasiriany, Scott Reed, You Liang Tan, Guanzhi Wang, Zu Wang, Jing Wang, Qi Wang, Jiannan Xiang, Yuqi Xie, Yinzheng Xu, Zhenjia Xu, Seonghyeon Ye, Zhiding Yu, Ao Zhang, Hao Zhang, Yizhou Zhao, Ruijie Zheng, and Yuke Zhu. Gr00t n1: An open foundation model for generalist humanoid robots. *arXiv preprint arXiv:2503.14734*, 2025.
- NVIDIA, :, Aditi, Niket Agarwal, Arslan Ali, Jon Allen, Martin Antolini, Adeline Aubame, Alisson Azzolini, Junjie Bai, Maciej Bala, Yogesh Balaji, Josh Bapst, Aarti Basant, Mukesh Beladiya, Mohammad Qazim Bhat, Zaid Pervaiz Bhat, Dan Blick, Vanni Brighella, Han Cai, Tiffany Cai, Eric Cameracci, Jiaxin Cao, Yulong Cao, Mark Carlson, Carlos Casanova, Ting-Yun Chang, Yan Chang, Yu-Wei Chao, Prithvijit Chattopadhyay, Roshan Chaudhari, Chieh-Yun Chen, Junyu Chen, Ke Chen, Qizhi Chen, Wenkai Chen, Xiaotong Chen, Yu Chen, An-Chieh Cheng, Click Cheng, Xiu Chia, Jeana Choi, Chaeyeon Chung, Wenyan Cong, Yin Cui, Magdalena Dadela, Nalin Dadhich, Wenliang Dai, Joyjit Daw, Alperen Degirmenci, Rodrigo Vieira Del Monte, Robert Denomme, Sameer Dharur, Marco Di Lucca, Ke Ding, Wenhao Ding, Yifan Ding, Yuzhu Dong, Nicole Drumheller, Yilun Du, Aigul Dzhumamuratova, Aleksandr Efitorov, Hamid Eghbalzadeh, Naomi Eigbe, Imad El Hanafi, Hassan Eslami, Benedikt Falk, Jiaojiao Fan, Jim Fan, Amol Fasale, Sergiy Fefilatyev, Liang Feng, Francesco Ferroni, Sanja Fidler, Xiao Fu, Vikram Fugro, Prashant Gaikwad, TJ Galda, Katelyn Gao, Yihuai Gao, Wenhao Ge, Sreyan Ghosh, Arushi Goel, Vivek Goel, Akash Gokul, Rama Govindaraju, Jinwei Gu, Miguel Guerrero, Elfie Guo, Aryaman Gupta, Siddharth Gururani, Hugo Hadfield, Song Han, Ankur Handa, Zekun Hao, Mohammad Harrim, Ali Hassani, Nathan Hayes-Roth, Yufan He, Chris Helvig, Cyrus Hogg, Madison Huang, Michael Huang, Sophia Huang, Yufan Huang, Jacob Huffman, DeLesley Hutchins, Suneel Indupuru, Boris Ivanovic, Arihant Jain, Joel Jang, Ryan Ji, Yanan Jian, Dongfu Jiang, Jingyi Jin, Atharva Joshi, Nikhilesh Joshi, Pranjali Joshi, Andy Ju, Jaehun Jung, Weiwei Kang, Scott Kassekert, Jan Kautz, Ashna Khetan, Julia Kiczka, Slawek Kierat, Gwanghyun Kim, Kuno Kim, Sunny Kim, Kezhi Kong, Xin Kong, Zhifeng Kong, Tomasz Kornuta, Egor Krivov, Hui Kuang, Saurav Kumar, Chia-Wen Kuo, George Kurian, Wojciech Kutak, JF Lafleche, Himangshu Lahkar, Omar Laymoun, Jayjun Lee, Sanggil Lee, Gabriele Leone, Boyi Li, Freya Li, Jiajun

- Li, Jinfeng Li, Ling Li, Pengcheng Li, Shangru Li, Tingle Li, Xiaolong Li, Xuan Li, Zhaoshuo Li, Zhiqi Li, Hao Liang, Maosheng Liao, Chen-Hsuan Lin, Tsung-Yi Lin, Ming-Yu Liu, Sifei Liu, Zihan Liu, Hai Loc Lu, Xiangyu Lu, Alice Luo, Ruipu Luo, Wenjie Luo, Jiangran Lyu, Martin Ding Ma, Nic Ma, Qianli Ma, Dawid Majchrowski, Louis Marcoux, Miguel Martin, Qing Miao, Ashkan Mirzaei, Shreyas Misra, Kaichun Mo, Durra Mohsin, Hyejin Moon, Pawel Morkisz, Saeid Motiian, Kirill Motkov, Seungjun Nah, Yashraj Narang, Deepak Narayanan, Thabang Ngazimbi, Julian Ouyang, Shubham Pachori, David Page, Yatian Pang, Sehwi Park, Mahesh Patekar, Mostofa Patwary, Marco Pavone, Trung Pham, Wei Ping, Soha Pouya, Shrimai Prabhumoye, Varun Praveen, Delin Qu, Hesam Rabeti, Morteza Ramezanali, Marilyn Reeb, Xuanchi Ren, Kristen Rumley, Wojciech Rymer, Jun Saito, Yeongho Seol, John Shao, Piyush Shekdar, Tianwei Shen, Humphrey Shi, Min Shi, Stella Shi, Kevin Shih, Mohammad Shoeibi, Mateusz Sieniawski, Shuran Song, Alexander Sotelo, Amir Sotoodeh, Sunil Srinivasa, Vignesh Srinivasakumar, Bartosz Stefaniak, Rahul Heinrich Steiger, Shangkun Sun, Jiaxiang Tang, Shitao Tang, Yangyang Tang, Yue Tang, Tolou Tavakkoli, Kayley Ting, Krzysztof Tomala, Wei-Cheng Tseng, Jibin Varghese, Sergei Vasilev, Thomas Volk, Raju Wagwani, Roger Waleffe, Andrew Z. Wang, Boxiang Wang, Haoxiang Wang, Qiao Wang, Shihao Wang, Shijie Wang, Ting-Chun Wang, Yan Wang, Yu Wang, Rohit Watve, David Wehr, Fangyin Wei, Xinshuo Weng, Jay Zhangjie Wu, Kedi Wu, Hongchi Xia, Summer Xiao, Tianjun Xiao, Kevin Xie, Daguang Xu, Jiashu Xu, Mengyao Xu, Ruqing Xu, Xingqian Xu, Yao Xu, Dinghao Yang, Dong Yang, Hans Yang, Xiaodong Yang, Xuning Yang, Yichu Yang, Yurong You, Zhiding Yu, Hao Yuan, Simon Yuen, Xiaohui Zeng, Pengcuo Zeren, Cindy Zha, Haotian Zhang, Jenny Zhang, Jing Zhang, Liangkai Zhang, Paris Zhang, Shun Zhang, Xuanmeng Zhang, Zhizheng Zhang, Ann Zhao, Yilin Zhao, Yuliya Zhautouskaya, Charles Zhou, Fengzhe Zhou, Shilin Zhu, Yuke Zhu, Dima Zhylko, and Artur Zolkowski. Cosmos 3: Omnimodal world models for physical ai. *arXiv preprint arXiv:2606.02800*, 2026.
- Octo Model Team, Dibya Ghosh, Homer Walke, Karl Pertsch, Kevin Black, Oier Mees, Sudeep Dasari, Joey Hejna, Tobias Kreiman, Charles Xu, Jianlan Luo, You Liang Tan, Lawrence Yunliang Chen, Pannag Sanketi, Quan Vuong, et al. Octo: An open-source generalist robot policy. In *Robotics: Science and Systems (RSS)*, 2024.
- William S. Peebles and Saining Xie. Scalable diffusion models with transformers. *2023 IEEE/CVF International Conference on Computer Vision (ICCV)*, pp. 4172–4182, 2022.
- Skand Peri, Iain Lee, Chanh Kim, Li Fuxin, Tucker Hermans, and Stefan Lee. Point cloud models improve visual robustness in robotic learners. *International Conference on Robotics and Automation*, 2024.
- Karl Pertsch, Kyle Stachowicz, Brian Ichter, Danny Driess, Suraj Nair, Quan Vuong, Oier Mees, Chelsea Finn, and Sergey Levine. Fast: Efficient action tokenization for vision-language-action models. In *Robotics: Science and Systems (RSS)*, 2025.
- Delin Qu, Haoming Song, Qizhi Chen, Yuanqi Yao, Xinyi Ye, Yan Ding, Zhigang Wang, JiaYuan Gu, Bin Zhao, Dong Wang, et al. Spatialvla: Exploring spatial representations for visual-language-action model. *arXiv preprint arXiv:2501.15830*, 2025.
- Nils Reimers and Iryna Gurevych. Sentence-bert: Sentence embeddings using siamese bert-networks. In *Empirical Methods in Natural Language Processing (EMNLP)*, 2019.
- Olaf Ronneberger, Philipp Fischer, and Thomas Brox. U-net: Convolutional networks for biomedical image segmentation. In Nassir Navab, Joachim Hornegger, William M. Wells, and Alejandro F. Frangi (eds.), *Medical Image Computing and Computer-Assisted Intervention – MICCAI 2015*, pp. 234–241, Cham, 2015. Springer International Publishing. ISBN 978-3-319-24574-4.
- Stéphane Ross, Geoffrey J. Gordon, and J. Andrew Bagnell. A reduction of imitation learning and structured prediction to no-regret online learning. In *Proceedings of the Fourteenth International Conference on Artificial Intelligence and Statistics (AISTATS)*, pp. 627–635, 2011.
- Tim Salimans and Jonathan Ho. Progressive distillation for fast sampling of diffusion models. In *International Conference on Learning Representations*, 2022.

- Haochen Shi, Huazhe Xu, Samuel Clarke, Yunzhu Li, and Jiajun Wu. Robocook: Long-horizon elasto-plastic object manipulation with diverse tools. *arXiv preprint arXiv:2306.14447*, 2023.
- Wenzhe Shi, Jose Caballero, Ferenc Huszár, Johannes Totz, Andrew P. Aitken, Rob Bishop, Daniel Rueckert, and Zehan Wang. Real-time single image and video super-resolution using an efficient sub-pixel convolutional neural network. In *2016 IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, pp. 1874–1883, 2016.
- Mohit Shridhar, Lucas Manuelli, and Dieter Fox. Perceiver-actor: A multi-task transformer for robotic manipulation. In *Proceedings of the 6th Conference on Robot Learning (CoRL)*, 2022.
- Oriane Siméoni, Huy V. Vo, Maximilian Seitzer, Federico Baldassarre, Maxime Oquab, Cijo Jose, Vasil Khalidov, Marc Szafraniec, Seung Eun Yi, Michael Ramamonjisoa, Francisco Massa, Daniel HAZIZA, Luca Wehrstedt, Jianyuan Wang, Timothée Darcet, Théo Moutakanni, Leonel Sentana, Claire Roberts, Andrea Vedaldi, Jamie Tolan, John Brandt, Camille Couprie, Julien Mairal, Herve Jegou, Patrick Labatut, and Piotr Bojanowski. DINOv3. *Transactions on Machine Learning Research*, 2026. ISSN 2835-8856. Featured Certification.
- Ishika Singh, Ankit Goyal, Stan Birchfield, Dieter Fox, Animesh Garg, and Valts Blukis. Og-vla: Orthographic image generation for 3d-aware vision-language action model. *arXiv preprint arXiv:2506.01196*, 2025.
- Shuhan Tan, Kairan Dou, Yue Zhao, and Philipp Krähenbühl. Interactive post-training for vision-language-action models. *arXiv preprint arXiv:2505.17016*, 2025.
- Gemini Robotics Team, Saminda Abeyruwan, Joshua Ainslie, Jean-Baptiste Alayrac, Montserrat Gonzalez Arenas, Travis Armstrong, Ashwin Balakrishna, Robert Baruch, Maria Bauza, Michiel Blokzijl, Steven Bohez, Konstantinos Bousmalis, Anthony Brohan, Thomas Buschmann, Arunkumar Byravan, Serkan Cabi, Ken Caluwaerts, Federico Casarini, Oscar Chang, Jose Enrique Chen, Xi Chen, Hao-Tien Lewis Chiang, Krzysztof Choromanski, David D’Ambrosio, Sudeep Dasari, Todor Davchev, Coline Devin, Norman Di Palo, Tianli Ding, Adil Dostmohamed, Danny Driess, Yilun Du, Debidatta Dwibedi, Michael Elabd, Claudio Fantacci, Cody Fong, Erik Frey, Chuyuan Fu, Marissa Giustina, Keerthana Gopalakrishnan, Laura Graesser, Leonard Hasenclever, Nicolas Heess, Brandon Hernaez, Alexander Herzog, R. Alex Hofer, Jan Humplik, Atil Iscen, Mithun George Jacob, Deepali Jain, Ryan Julian, Dmitry Kalashnikov, M. Emre Karagözler, Stefani Karp, Chase Kew, Jerad Kirkland, Sean Kirmani, Yuheng Kuang, Thomas Lampe, Antoine Laurens, Isabel Leal, Alex X. Lee, Tsang-Wei Edward Lee, Jacky Liang, Yixin Lin, Sharath Maddineni, Anirudha Majumdar, Assaf Hurwitz Michaely, Robert Moreno, Michael Neunert, Francesco Nori, Carolina Parada, Emilio Parisotto, Peter Pastor, Acorn Pooley, Kanishka Rao, Krista Reymann, Dorsa Sadigh, Stefano Saliceti, Pannag Sanketi, Pierre Sermanet, Dhruv Shah, Mohit Sharma, Kathryn Shea, Charles Shu, Vikas Sindhwani, Sumeet Singh, Radu Soricut, Jost Tobias Springenberg, Rachel Sterneck, Razvan Surdulescu, Jie Tan, Jonathan Tompson, Vincent Vanhoucke, Jake Varley, Grace Vesom, Giulia Vezzani, Oriol Vinyals, Ayzaan Wahid, Stefan Welker, Paul Wohlhart, Fei Xia, Ted Xiao, Annie Xie, Jinyu Xie, Peng Xu, Sichun Xu, Ying Xu, Zhuo Xu, Yuxiang Yang, Rui Yao, Sergey Yaroshenko, Wenhao Yu, Wentao Yuan, Jingwei Zhang, Tingnan Zhang, Allan Zhou, and Yuxiang Zhou. Gemini robotics: Bringing ai into the physical world. *arXiv preprint arXiv:2503.20020*, 2025.
- Team Wan, Ang Wang, Baole Ai, Bin Wen, Chaojie Mao, Chen-Wei Xie, Di Chen, Fei Wu Yu, Haiming Zhao, Jianxiao Yang, Jianyuan Zeng, Jiayu Wang, Jingfeng Zhang, Jingren Zhou, Jinkai Wang, Jixuan Chen, Kai Zhu, Kang Zhao, Keyu Yan, Lianghua Huang, Mengyang Feng, Ningyi Zhang, Pandeng Li, Pingyu Wu, Ruihang Chu, Ruili Feng, Shiwei Zhang, Siyang Sun, Tao Fang, Tianxing Wang, Tianyi Gui, Tingyu Weng, Tong Shen, Wei Lin, Wei Wang, Wei Wang, Wenmeng Zhou, Wenting Wang, Wenting Shen, Wenyuan Yu, Xianzhong Shi, Xiaoming Huang, Xin Xu, Yan Kou, Yangyu Lv, Yifei Li, Yijing Liu, Yiming Wang, Yingya Zhang, Yitong Huang, Yong Li, You Wu, Yu Liu, Yulin Pan, Yun Zheng, Yuntao Hong, Yupeng Shi, Yutong Feng, Zeyinzi Jiang, Zhen Han, Zhi-Fan Wu, and Ziyu Liu. Wan: Open and advanced large-scale video generative models. *arXiv preprint arXiv:2503.20314*, 2025.
- Yixuan Wang, Rhythm Syed, Fangyu Wu, Mengchao Zhang, Aykut Onol, Jose Barreiros, Hooshang Nayyeri, Tony Dear, Huan Zhang, and Yunzhu Li. Interactive world simulator for robot policy training and evaluation. In *Robotics: Science and Systems (RSS)*, 2026.

- Hongtao Wu, Ya Jing, Chilam Cheang, Guangzeng Chen, Jiafeng Xu, Xinghang Li, Minghuan Liu, Hang Li, and Tao Kong. Unleashing large-scale video generative pre-training for visual robot manipulation. In *International Conference on Learning Representations*, volume 2024, pp. 10641–10662, 2024.
- Wei Wu, Fangjing Wang, Fan Lu, He Sun, Shi Liu, Yunnan Wang, Yibin Yan, Yong Wang, Shuailei Ma, Xinyang Wang, Yibin Liu, Shuai Yang, Tianxiang Zhou, Kejia Zhang, Lei Zhou, Cheng Su, Nan Xue, Bin Tan, Han Zhang, Youchao Zhang, Fei Liao, Xing Zhu, Yujun Shen, and Kecheng Zheng. From foundation to application: Improving vla models in practice. *arXiv preprint arXiv:2607.06403*, 2026.
- Ge Yan, Yueh-Hua Wu, and Xiaolong Wang. Dnact: Diffusion guided multi-task 3d policy learning. In *2025 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*, pp. 9464–9471. IEEE, 2025a.
- Ge Yan, Jiyue Zhu, Yuquan Deng, Shiqi Yang, Ri-Zhao Qiu, Xuxin Cheng, Marius Memmel, Ranjay Krishna, Ankit Goyal, Xiaolong Wang, and Dieter Fox. ManiFlow: A general robot manipulation policy via consistency flow training. In *Conference on Robot Learning (CoRL)*, 2025b.
- Angen Ye, Boyuan Wang, Chaojun Ni, Guan Huang, Guosheng Zhao, Hao Li, Hengtao Li, Jie Li, Jindi Lv, Jingyu Liu, Min Cao, Peng Li, Qiuping Deng, Wenjun Mei, Xiaofeng Wang, Xinze Chen, Xinyu Zhou, Yang Wang, Yifan Chang, Yifan Li, Yukun Zhou, Yun Ye, Zhichao Liu, and Zheng Zhu. Gigaworld-policy: An efficient action-centered world–action model. *arXiv preprint arXiv:2603.17240*, 2026a.
- Seonghyeon Ye, Yunhao Ge, Kaiyuan Zheng, Shenyuan Gao, Sihyun Yu, George Kurian, Suneel Indupuru, You Liang Tan, Chuning Zhu, Jiannan Xiang, Ayaan Malik, Kyungmin Lee, William Liang, Nadun Ranawaka, Jiasheng Gu, Yinzhen Xu, Guanzhi Wang, Fengyuan Hu, Avnish Narayan, Johan Bjorck, Jing Wang, Gwanghyun Kim, Dantong Niu, Ruijie Zheng, Yuqi Xie, Jimmy Wu, Qi Wang, Ryan Julian, Danfei Xu, Yilun Du, Yevgen Chebotar, Scott Reed, Jan Kautz, Yuke Zhu, Linxi ”Jim” Fan, and Joel Jang. World action models are zero-shot policies. *arXiv preprint arXiv:2602.15922*, 2026b.
- Tenny Yin, Zhiting Mei, Zhonghe Zheng, Miyu Yamane, David Wang, Jade Sceats, Samuel M Bateman, Lihan Zha, Apurva Badithela, Ola Shorinwa, et al. Playworld: Learning robot world models from autonomous play. *arXiv preprint arXiv:2603.09030*, 2026.
- Haoqi Yuan, Zhixuan Liang, Anzhe Chen, Ye Wang, Haoyang Li, Pei Lin, Yiyang Huang, Zixing Lei, Tong Zhang, Jiazhao Zhang, et al. Qwen-robotmanip technical report: Alignment unlocks scale for robotic manipulation foundation models. *arXiv preprint arXiv:2606.17846*, 2026a.
- Tianyuan Yuan, Zibin Dong, Yicheng Liu, and Hang Zhao. Fast-wam: Do world action models need test-time future imagination? *arXiv preprint arXiv:2603.16666*, 2026b.
- Yanjie Ze, Gu Zhang, Kangning Zhang, Chenyuan Hu, Muhan Wang, and Huazhe Xu. 3d diffusion policy: Generalizable visuomotor policy learning via simple 3d representations. In *Proceedings of Robotics: Science and Systems (RSS)*, 2024.
- Lihan Zha, Asher J Hancock, Mingtong Zhang, Tenny Yin, Yixuan Huang, Dhruv Shah, Allen Z Ren, and Anirudha Majumdar. Lap: Language-action pre-training enables zero-shot cross-embodiment transfer. *arXiv preprint arXiv:2602.10556*, 2026.
- Qihang Zhang, Lin Li, Luyao Zhang, Shuai Yang, Yiming Luo, Shuaiting Li, Ruilin Wang, Junke Wang, Jiahao Shao, Gangwei Xu, et al. Native video-action pretraining for generalizable robot control. *arXiv preprint arXiv:2607.08639*, 2026.
- Haoyu Zhen, Xiaowen Qiu, Peihao Chen, Jincheng Yang, Xin Yan, Yilun Du, Yining Hong, and Chuang Gan. 3d-vla: A 3d vision-language-action generative world model. *arXiv preprint arXiv:2403.09631*, 2024.
- Jinliang Zheng, Jianxiong Li, Zhihao Wang, Dongxiu Liu, Xirui Kang, Yuchun Feng, Yinan Zheng, Jiayin Zou, Yilun Chen, Jia Zeng, Ya-Qin Zhang, Jiangmiao Pang, Jingjing Liu, Tai Wang, and Xi-anyuan Zhan. X-vla: Soft-prompted transformer as scalable cross-embodiment vision-language-action model. *arXiv preprint arXiv:2510.10274*, 2025.

- Gaoyue Zhou, Hengkai Pan, Yann LeCun, and Lerrel Pinto. Dino-wm: World models on pre-trained visual features enable zero-shot planning. *arXiv preprint arXiv:2411.04983*, 2024a.
- Siyuan Zhou, Yilun Du, Jiaben Chen, Yandong Li, Dit-Yan Yeung, and Chuang Gan. Robodreamer: Learning compositional world models for robot imagination. *arXiv preprint arXiv:2404.12377*, 2024b.
- Chuning Zhu, Raymond Yu, Siyuan Feng, Benjamin Burchfiel, Paarth Shah, and Abhishek Gupta. Unified world models: Coupling video and action diffusion for pretraining on large robotic datasets. In *Proceedings of Robotics: Science and Systems (RSS)*, 2025.
- Yifeng Zhu, Zhenyu Jiang, Peter Stone, and Yuke Zhu. Learning generalizable manipulation policies with object-centric 3d representations. In Jie Tan, Marc Toussaint, and Kourosh Darvish (eds.), *Proceedings of The 7th Conference on Robot Learning*, volume 229 of *Proceedings of Machine Learning Research*, pp. 3418–3433. PMLR, 06–09 Nov 2023.
- Yuke Zhu, Josiah Wong, Ajay Mandlekar, Roberto Martín-Martín, Abhishek Joshi, Soroush Nasiriany, Yifeng Zhu, and Kevin Lin. robosuite: A modular simulation framework and benchmark for robot learning. In *arXiv preprint arXiv:2009.12293*, 2020.

APPENDIX CONTENTS

A	Model Architecture Details	22
A.1	Proprioception Encoding	22
A.2	Action Representation and Chunk Horizon	22
A.3	Action Expert Initialization and Per-Modality Adapters	23
A.4	x -Prediction for the Folded DINO Stream	23
A.5	Stream Masking: Attention Rules	24
B	Pre-training Data	24
C	Real-World Robot Platform (YAM)	24
D	Real World Experiment Criteria	26
E	LIBERO Setup and Evaluation Protocol	26
F	Baseline Implementation Details	27
F.1	Simulation Baseline Sources	27
F.2	Real-Robot Baseline Deployment	28
F.3	Latency Measurement Protocol	28
G	Additional Experiments	29
G.1	(Q1) Real-World Evaluation: Protocol and Generalization Analysis	29
G.2	(Q4) Real-World Depth Input Ablation	31
G.3	(Q1) Long-Horizon Dexterity: Self-Repair Gripper	31
G.4	(Q1) Deformable Manipulation: Soft-Bag Zipping	33
G.5	RoboTwin Ablation Setup	33
G.6	Data Scaling Experiment in RoboTwin	34
G.7	Full LIBERO and LIBERO-Plus Results	34
H	Per-Task RoboTwin Results	36
I	Inference Optimization	36
I.1	Denoising Steps	39
J	Training Hyperparameters	39

A MODEL ARCHITECTURE DETAILS

A.1 PROPRIOCEPTION ENCODING

Canonical state layout. All embodiments share a single 32-dimensional proprioception vector. Each arm owns 16 of the 32 channels: the end-effector position (3), its orientation in a continuous 6D rotation representation (6), the gripper state (1), and the arm’s joint positions (6). The vector is grouped by *field* rather than by arm, so the two end-effector poses come first, then the two grippers, then the two joint blocks.

Slots	Contents	Slots	Contents
0–2, 9–11	L/R end-effector position	18, 19	L/R gripper
3–8, 12–17	L/R rotation (6D)	20–31	L/R joint positions

Rather than left-packing each robot’s native state, we scatter its channels into the fixed slots above, zero-filling unused slots and storing a per-dimension padding mask. This keeps shared channels at consistent indices and allows the same pre-trained proprioception encoder to transfer across embodiments without reshaping. LIBERO is the exception: it uses a 3-D axis-angle rotation in slots 3–5, whereas other embodiments use the first three components of a 6D rotation.

At fine-tuning time, RoboTwin’s native 14-D bimanual state is mapped into the shared 32-D layout, allowing the AGIBOT World encoder to be reused directly. LIBERO occupies 8 slots, while the real-robot YAM platform (Sec. C) uses all 32.

Normalization is embodiment-specific. Pre-training and real-robot runs linearly map each non-rotation channel to $[-1, 1]$ using per-episode 1st/99th-percentile bounds, aggregated across episodes by min/max. The 6D rotation slots are left unchanged and orthonormalized with Gram–Schmidt at decode time. LIBERO instead z-scores all channels, including its axis-angle rotation, since it does not use a 6D rotation representation.

Encoder and conditioning. Only the state at the current timestep, s_t , is encoded; the model receives no proprioception history. The encoder is a single linear layer $\mathbb{R}^{32} \rightarrow \mathbb{R}^{4096}$ mapping s_t to the width of the umT5 text tokens, and thus emitting exactly one token. That token is then *appended to the language token sequence itself*, with the text attention mask extended by one entry. Proprioception consequently reaches v_θ through the same cross-attention pathway as the instruction l , as one additional conditioning token rather than a separate input branch or an AdaLN offset, so every stream, and the action expert, attend to the robot’s state exactly as they attend to language.

A.2 ACTION REPRESENTATION AND CHUNK HORIZON

Representation. Actions reuse the 32-dimensional canonical layout of Sec. A.1, so a given slot denotes the same physical quantity whether it is being observed as state or predicted as an action. The two differ in frame of reference: proprioception is always absolute, whereas on the real robot every step of an action chunk is expressed *relative* to a single anchor: the state observed at the chunk’s first timestep. Under that anchor, end-effector targets become body-frame relative poses $R_{\text{base}}^\top(p - p_{\text{base}})$ with rotations reparameterized as $\text{rot6D}(R_{\text{base}}^\top R)$, joint angles become scalar displacements, and the two gripper channels stay absolute (continuous in $[0, 1]$ on the real robot; binary in LIBERO). Anchoring all H steps to one pose, rather than each step to its predecessor, keeps targets from accumulating integration error along the chunk and makes the representation invariant to where in the workspace the motion begins. LIBERO keeps its native per-step operational-space deltas inside the same slots, so the canonical layout fixes *which* channel each slot carries, while the choice of reference frame remains a per-embodiment property of the data.

Chunk horizon. Each training sample spans 33 consecutive timesteps, yielding an action chunk of $H = 32$ actions. The RGB and pointmap streams are subsampled from that same window at a stride of 4 into 9 frames, which the VAE’s $4 \times$ temporal compression turns into 3 latent frames: the current observation and two futures. The DINO stream is taken at those same three timesteps. The action chunk and the generated visual future therefore cover an identical horizon: the futures a given action attends to under $\mathbf{m}^{\text{out}}$ are always the futures contemporaneous with it. How much of that chunk is

executed before re-planning is a deployment choice rather than a property of the representation: on the real robot we run all 32 steps open-loop (Sec. C), whereas in LIBERO we re-plan every 10 steps.

Tokenization and head. We do not discretize actions. Each of the H timesteps is embedded by a single linear layer into one token at the action expert’s width (Sec. A.3), giving 32 action tokens that are denoised jointly under the flow-matching objective of Eq. (3); a single linear layer maps each denoised token back to the 32-dimensional action space. Both are randomly initialized at the start of pre-training, being the two modules with no counterpart in a video model; because the canonical layout keeps their shapes fixed across embodiments, both are then carried over intact when a pre-trained checkpoint is fine-tuned.

A.3 ACTION EXPERT INITIALIZATION AND PER-MODALITY ADAPTERS

Action expert initialization. The action expert matches the video expert in head count (24), per-head dimension (128), and depth (30 blocks); these three must agree so that the two streams’ queries, keys, and values stay shape-compatible when concatenated for MoT joint attention. Its residual and feedforward widths are smaller, $d_a = 1024$ and 4096 against $d_v = 3072$ and 14336, which makes a direct weight copy impossible. We therefore initialize by *resampling*: each backbone tensor is resized one axis at a time to its target shape by 1D linear interpolation, and any tensor whose fan-in was reduced is rescaled by $\sqrt{d_v/d_a}$ so that activation variance is preserved at initialization. Only the action encoder and the action output head, which have no counterpart in a video model, are randomly initialized.

Per-modality adapters. The shared visual trunk operates at the single width d_v , so every stream needs a mapping into and out of it. Pointmaps are encoded by the same frozen VAE as RGB and therefore already lie in the video latent space; their adapter is a private copy of the video expert’s patch embedding and unpatchify head, initialized from the pre-trained $\mathcal{W}_{\text{an-2.2}}$ weights so the pointmap stream inherits the video prior before specializing. DINO features do not share that space, so the DINO stream instead applies a LayerNorm to the raw features followed by a single linear layer in and a single linear layer out, both Xavier-initialized, between the folded DINO width and d_v (below). The action stream likewise uses one linear layer in and one out, at its own width d_a .

DINO feature folding. A DINOv3 encoder emits one 768-dimensional token per image patch, and because FLEX- π generates future DINO features as well as consuming current ones, DINO tokens can become quite compute-intensive in the observation and in generation. We therefore apply a pixel-unshuffle (Shi et al., 2016) (space-to-channel) fold of factor $f = 2$ to each view’s native patch grid before the adapter: each 2×2 block of neighboring patches is concatenated along the channel axis, so the encoder’s 14×14 grid of 768-dimensional tokens becomes a 7×7 grid of $f^2 \cdot 768 = 3072$ -dimensional tokens per view. The rearrangement is exactly invertible, so no feature content is lost; the model simply predicts each 2×2 neighborhood jointly within one token instead of across four. Token count per view drops $f^2 = 4\times$, i.e. 75% fewer DINO tokens in both the attention sequence and the generation target, and the RoPE grid is the post-fold grid so positions remain one-per-token.

A.4 x -PREDICTION FOR THE FOLDED DINO STREAM

Why velocity prediction is hard. Folding raises each DINO token to $f^2 \cdot 768 = 3072$ dimensions, the same as the feedforward hidden dim d_v . Li & He (2025) demonstrate that x -prediction (Salimans & Ho, 2022) works better than standard velocity prediction (Eq. (1)) when the data dimension is large, and we also found this to empirically be the case for our setting. Only the folded DINO stream sits at this ratio: the video and pointmap latents are at $192/3072 \approx 0.06$ and the action stream between 0.01 and 0.03 of its own width d_a , all far from the regime where x -prediction is required, so they use standard flow matching velocity prediction.

Clean-feature prediction. The DINO head therefore estimates the clean features $\hat{d}_{t+1}$, and we convert that estimate to a velocity for the standard flow matching loss. The linear path is $d_{t+1}^\tau = \tau d_{t+1} + (1-\tau)\epsilon$, where τ is the flow timestep $\in [0, 1]$, and the identity $d_{t+1} - d_{t+1}^\tau = (1-\tau)(d_{t+1} - \epsilon)$ gives us the velocity $\hat{v}$ by:

$$\hat{v} = \frac{\hat{d}_{t+1} - d_{t+1}^\tau}{1 - \tau}. \quad (4)$$

Eq. (1) and (3) are therefore untouched: Eq. (4) converts the x -prediction into a velocity, which is used for the loss and for Euler integration exactly as a velocity head’s output would; only how the head’s output is read changes. See Table 1 of Li & He (2025) for a comparison of noise, x , and velocity prediction.

A.5 STREAM MASKING: ATTENTION RULES

Sampling. $\mathbf{m}^{\text{in}}$ and $\mathbf{m}^{\text{out}}$ are drawn independently per sample, each entry Bernoulli(0.5), with rejection sampling on $\mathbf{m}^{\text{in}}$ so that at least one visual stream is always observed. A stream absent from $\mathbf{m}^{\text{in}}$ has its current-timestep tokens zeroed rather than removed: the sequence layout is fixed, so tensor shapes stay identical across a batch. Cross-modal prediction is enabled for all three visual streams, so a presence-dropped stream is still denoised rather than dropped from its loss.

Attention rules. Write obs for the current-timestep tokens of the observed streams, X_{t+1} for a future visual stream, and a for the action tokens. Within the joint-attention layers:

- $X_{t+1} \rightarrow \text{obs}$ and $a \rightarrow \text{obs}$ always, for *every* observed stream, not only a stream’s own modality;
- $X_{t+1} \leftrightarrow Y_{t+1}$ iff $m_X^{\text{out}} = m_Y^{\text{out}}$, so $\mathbf{m}^{\text{out}}$ splits the futures into two groups and removes attention only *between* them. Two streams the action does not read therefore remain visible to one another;
- $a \rightarrow X_{t+1}$ iff $m_X^{\text{out}} = 1$, and one-way only. No token ever attends to the action stream, so it can be dropped entirely at inference.

The action stream is never masked, and $\mathbf{m}^{\text{out}}$ enters no term of Eq. (3): every head is denoised and supervised on every draw, keeping cross-modality forcing well-posed.

Scope. These rules govern the middle 16 of the 30 MoT blocks; the outer blocks attend within each stream independently (Sec. 3.1). Language and proprioception reach every token by cross-attention regardless of either mask, so even a fully presence-dropped stream still receives the task conditioning.

Training versus inference. At training, $\mathbf{m}^{\text{out}}$ is purely an attention pattern and all four streams are generated on every sample. At inference it additionally selects which futures are *computed*: a stream the action does not read is dropped from the sequence outright, producing the action-only speedup.

B PRE-TRAINING DATA

Episode sampling and re-segmentation. From 100 tasks of AGIBOT World-Beta (AgiBot-World-Contributors et al., 2025) we draw the first 285 episodes of each task, taking all of them where a task holds fewer, which is the case for 12 tasks; this yields roughly 500 hours in total. AGIBOT World stores one episode per *full* task execution, whereas its language annotations label the individual action segments *within* an episode. We therefore re-segment every sampled episode at those annotation boundaries, so that each training sample is a sub-episode paired with the instruction that actually describes the motion it contains, rather than with a whole-task label.

Large-scale depth labeling. AGIBOT World does release sensed depth, but only for the head view, so the two wrist views would have no geometry at all. The head stream is also uneven for our purpose, dropping large regions to holes and returning noisy values elsewhere, and that error would propagate straight into the pointmaps the VAE has to encode. We therefore leave it aside and annotate all three views of the sampled episodes offline from RGB alone with a monocular metric-depth estimator (Depth Anything 3) (Lin et al., 2026), lift the result to pointmaps with only the camera intrinsics (no calibrated extrinsics needed), and tile them into the same three-view composite canvas we use on the real robot (Sec. C).

C REAL-WORLD ROBOT PLATFORM (YAM)

Hardware. We run all real-robot experiments on a stationary bimanual YAM setup: two 6-DoF arms, each with a single-DoF parallel gripper, for 14 commanded degrees of freedom in total, filling the 32-dimensional canonical layout of Sec. A.1 exactly. We mount three calibrated stereo cameras,

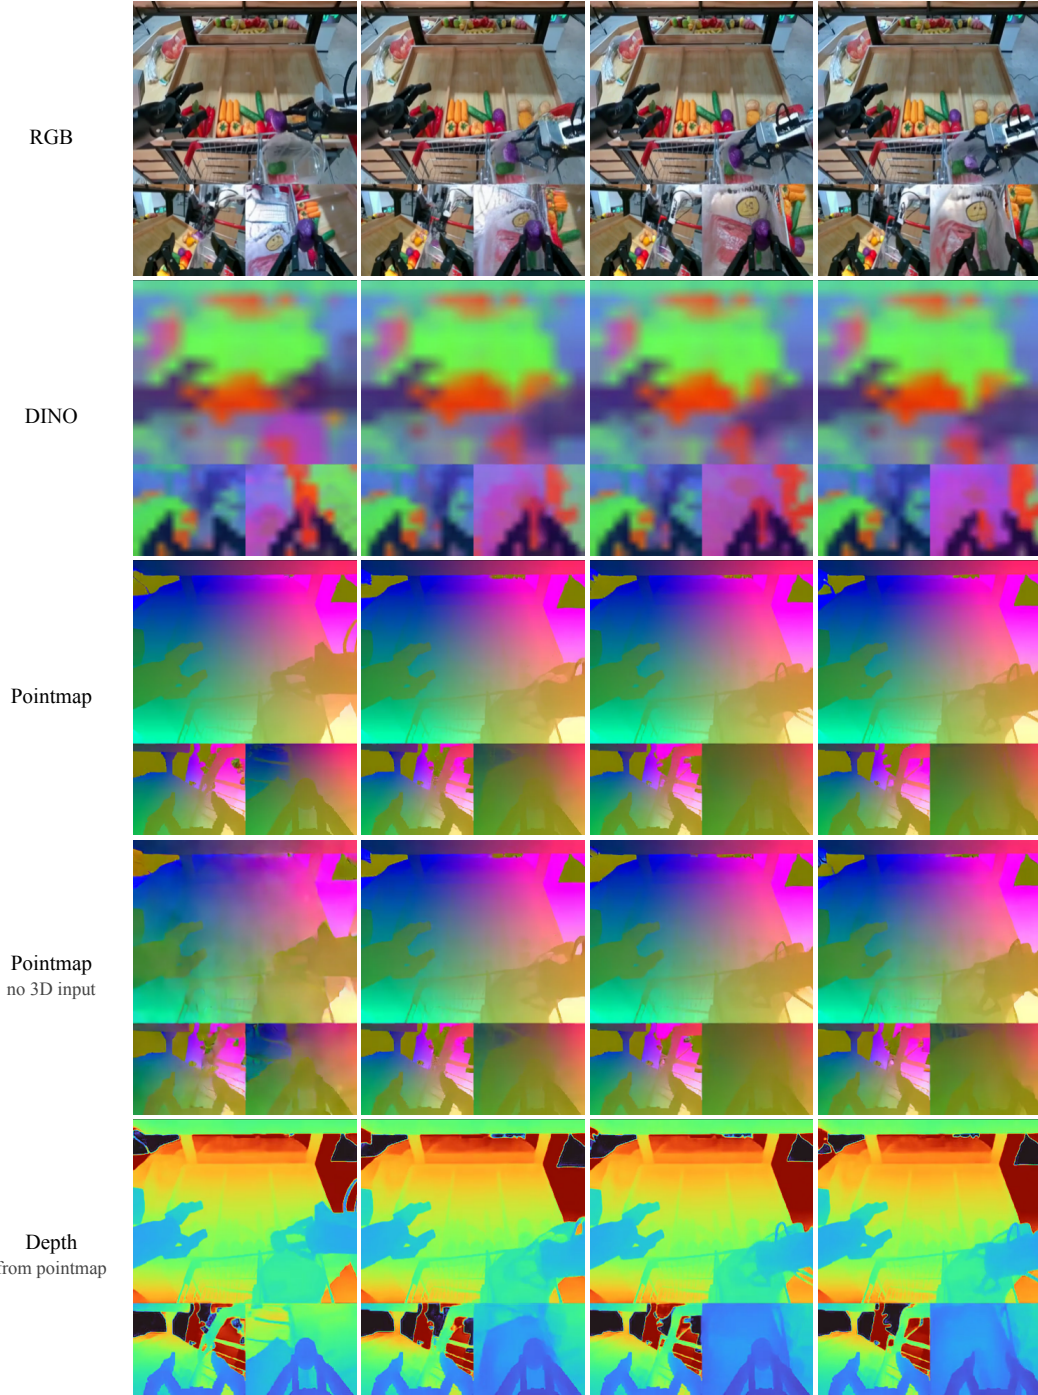


Figure 13: **Generated streams** on AGIBOT World. Examples of the visual streams a single FLEX- π checkpoint generates, at sampled frames (left to right); each panel is the three-view composite canvas, head camera above and the two wrist cameras below. The first three rows generate with every stream observed. The fourth repeats the episode with the pointmap dropped from the input, so the geometry has to come from RGB and DINO alone (cross-modality forcing in Sec. 3.2), yet the scene structure still looks good. The last row renders the third row’s generated pointmap as depth, which is easier to see; it is not a separate output.

a ZED 2i overhead and a ZED Mini on each wrist, each returning an RGB image and a *sensed* metric depth map; we lift depth to pointmaps using the per-camera intrinsics shipped with every frame.

Observations and actions. We tile the three views into one composite canvas, overhead on top and the two wrists side by side beneath it, so all three views cost a single VAE pass. The layout is checkpoint-specific and read from that checkpoint’s configuration at deployment. We record demonstrations and command the arms at 30 Hz, querying the policy once per chunk. Each chunk is conditioned on a single observation frame, with no visual or proprioceptive history, and the policy predicts $H=32$ actions alongside a 9-frame window per generated visual stream: the first frame is the current observation and the remaining 8 are future. Proprioception is the absolute 32-D state read from the arms; actions use the body-frame relative representation of Sec. A.2, converted back to absolute targets against the current state at execution time. States and actions are normalized the same way (Sec. A.1).

Deployment. We serve the policy over a local socket on a single RTX 5090. The robot executes all 32 predicted steps before the next chunk is planned, so the policy re-plans every 1.07 s. Our client is synchronous, so the arms hold position at each chunk boundary while the next chunk is computed; inference cost therefore surfaces as idle time between chunks rather than a slower control loop, and reported episode times include it. The input and output stream masks are runtime arguments rather than architectural choices, so the action-only and full-joint conditions come from one checkpoint invoked with different flags, not separately trained models.

D REAL WORLD EXPERIMENT CRITERIA

Every rollout is scored by a human evaluator against the partial-credit rubric of Table 3. The reported *score* is the credit earned normalized by the maximum attainable, not a binary success rate.

E LIBERO SETUP AND EVALUATION PROTOCOL

Camera layout. LIBERO provides an agentview and a single wrist camera, one fewer than the three-slot composite of Sec. C. We fill the right-wrist slot with zeros in RGB and depth alike rather than special-casing the model, so one encoder, one composite geometry, and one set of layout constants serve LIBERO, RoboTwin, and the real robot.

Depth and pointmaps. During fine-tuning, LIBERO’s depth is rendered from the simulator rather than estimated. The released demonstrations carry RGB only, so instead of annotating them the way we annotate AGIBOT World (Sec. B), we replay each one in the simulator with the depth pass enabled and re-render it at 512×512 , capturing RGB and depth together for both cameras. MuJoCo returns a normalized z -buffer, which we convert to metric depth with robosuite’s (Zhu et al., 2020) camera utilities and store as `uint16` millimetres, losslessly encoded alongside the video. Intrinsics are read once from the scene rather than per task: both cameras are declared in robosuite’s XML, so a single K per camera holds across every task and suite, and we rescale it to the resolution each stream is consumed at. Pointmaps are then unprojected with K alone, in the camera frame and needing no extrinsics, and clipped at 2 m, well outside the working volume of a LIBERO tabletop. The same code runs at evaluation, so training targets and test-time observations come from one renderer.

States and actions. LIBERO’s 8-dimensional state (end-effector position, a 3-D axis-angle orientation, and two gripper channels) and its 7-dimensional action (per-step operational-space deltas plus the gripper) are scattered into the canonical 32-dimensional layout of Sec. A.1, with the axis-angle in slots 3–5. The platform is single-armed and exposes no joint readings, so it occupies 8 slots and zero-pads the other 24. Every channel is z -scored.

Evaluation. We fine-tune across all four suites at once rather than one model per suite, and evaluate each of the 40 tasks over 50 rollouts, so every average in Table 6 rests on 2,000 episodes. We adopt the step budgets the LIBERO leaderboard is scored under—220/280/300/520 for Spatial/Object/Goal/Long—and use each task’s language annotation verbatim as the instruction. A call predicts $H=32$ actions with $K=4$ Euler steps, of which 10 are executed before re-planning.

LIBERO-Plus. Here we follow the official protocol unchanged: all 10,030 perturbed tasks at one trial each, a fresh environment per task, the official initial states, success predicates, and instructions,

Table 3: **Real-world scoring rubrics.** Stages are listed in execution order. *Self-Repair Gripper* and *Soft-Bag Zipping* are strictly sequential—each stage presupposes the ones above it—so for those two we also report the fraction of rollouts that clear every stage (Figure 19b).

Stage	Points
<i>Put Plate on Rack</i> — N plates start on the table beside the rack; scored per plate	
Push one edge of the plate down and grasp it from the tilted edge	0.5
Place it in the rack in any condition, including an occupied or misaligned slot	0.25
Place it cleanly into an empty slot (in addition to the credit above)	0.25
<i>Maximum, per plate</i>	1.0
<i>Sort Utensils</i> — two utensils, several plates of different colors, and a container	
Place one utensil onto any plate	0.5
That plate is the one of the specified color	0.5
Insert the second utensil vertically into the container	1.0
<i>Maximum</i>	2.0
<i>Kitchen Organization</i> — bowls and a plate on the table, a rack within reach of both arms	
Place the bowls onto the rack	1.0
Hand the plate from one arm to the other without dropping it	0.5
Insert the plate correctly into a rack slot	0.5
<i>Maximum</i>	2.0
<i>Self-Repair Gripper</i> — gripper, screw holder, and powered driver at randomized positions on the right; vegetable and bucket on the left	
Reach the pose from which the repair can begin	0.25
Pick up the replacement gripper	0.25
Insert the gripper into its holder	0.5
Pick up the screw	0.5
Insert the screw into the mounting hole	0.25
Pick up the driver	0.25
Drive the screw home	0.75
Place the vegetable into the bucket	0.25
<i>Maximum</i>	3.0
<i>Soft-Bag Zipping</i> — a closed fabric pouch and one or two pens, all at randomized positions	
Close the gripper on the zipper pull, to open	1.0
Draw the slider far enough that the mouth admits a pen	1.0
Hold the mouth open wide enough to insert a pen without it touching the rim	0.25
Place every pen inside, divided evenly among the pens present	0.25
Close the gripper on the zipper pull again, to close	1.0
Draw the slider to its closed end stop	1.0
<i>Maximum</i>	4.5

and the official task-count-weighted *Total* rather than a mean over the seven categories. Our one addition is the depth render pass, which changes neither the rendered RGB nor the physics.

F BASELINE IMPLEMENTATION DETAILS

This section records where every baseline number in the paper comes from and, for the baselines we trained ourselves, how they were configured and deployed.

F.1 SIMULATION BASELINE SOURCES

All LIBERO and LIBERO-Plus baseline numbers are published figures from the original work, under the same evaluation protocol; we train no baseline on either suite. One exception: neither Fast-WAM (Yuan et al., 2026b) nor $\pi_{0.5}$ (Intelligence et al., 2025) reports LIBERO-Plus, so the

rows marked [†] in Table 7 are our own evaluations of the released checkpoints, following Fei et al. (2025), with no weights updated.

The RoboTwin data-scaling experiment (Figure 10) is the one simulation setting we train ourselves, since it probes demonstration budgets no published work reports: $\pi_{0.5}$, Fast-WAM, and LingBot-VA are each retrained at 50 and 100 demonstrations per task. The 500-demonstration point needs no retraining — it is the setting the original work already reports, so we quote those published figures, given per task in Table 8.

F.2 REAL-ROBOT BASELINE DEPLOYMENT

No published numbers exist for the YAM platform (Sec. C) or the five tasks of Sec. G, so every real-robot baseline — $\pi_{0.5}$ (Intelligence et al., 2025), ManiFlow (Yan et al., 2025b), and Fast-WAM (Yuan et al., 2026b) — is one we trained. For a given task, every model, FLEX- π included, sees an identical dataset: the same demonstrations, DAgger corrections where the task has them, train split, and preprocessing. Beyond the data, each baseline runs in its own native configuration: several carry pre-trained weights trained under a particular observation layout, action parameterization, and chunk length, which we keep at the released defaults rather than override. Real-robot performance differences are therefore attributable to the model and training recipe, not to the data shown.

Task coverage. Not every baseline runs on every task: $\pi_{0.5}$ and ManiFlow cover all five, while Fast-WAM covers *Put Plate on Rack*, *Sort Utensils*, and *Kitchen Organization* only, since its performance on those three indicated it would not reach a scoreable level on the two long-horizon dexterous tasks. Table 4 records the pairing; every comparison we report is against baselines actually run on that task.

Table 4: **Real-robot task coverage.** Which baselines were trained and evaluated on each task.

Task	$\pi_{0.5}$	ManiFlow	Fast-WAM
Put Plate on Rack	✓	✓	✓
Sort Utensils	✓	✓	✓
Kitchen Organization	✓	✓	✓
Soft-Bag Zipping	✓	✓	
Self-Repair Gripper	✓	✓	

Camera inputs. The baselines do not share one view of the scene. Fast-WAM (Yuan et al., 2026b) takes the same three-view composite canvas FLEX- π does (Sec. C) at 384×320 , RGB only. $\pi_{0.5}$ (Intelligence et al., 2025) takes the three views as separate 224×224 tensors, matching its released checkpoint. ManiFlow (Yan et al., 2025b) takes the three RGB views at the same resolution plus the three depth maps, back-projected to pointmaps on device by its own encoder. This departs from its released recipe, which conditions on a sampled point cloud. We ran ManiFlow both ways and found that RGB plus pointmaps performs much better on our tasks, so we use it as the stronger baseline.

Chunk length and control rate. Every method is queried once per chunk and the arms are commanded at 30 Hz (Sec. C). Chunk length differs following best practices for each baseline: $\pi_{0.5}$ and ManiFlow predict 50 steps, Fast-WAM and FLEX- π predict 32. All methods share the same synchronous client, so the arms hold position at each chunk boundary and inference cost surfaces as idle time between chunks—included in wall-clock episode time for every method, though a longer chunk pays it fewer times per episode.

F.3 LATENCY MEASUREMENT PROTOCOL

Common conditions. All latencies are measured on the same machine and RTX 5090, at batch size 1, with warmup calls discarded. The unit is one policy call producing one action chunk, not one control step, since every method is queried once per chunk (Sec. F.2); text encoding sits outside the timed region wherever a method caches it per task, matching deployment.

Each method is measured in its deployed configuration. We do not hold optimization level fixed across methods: the comparison reports what each policy costs as we actually run it, not what it

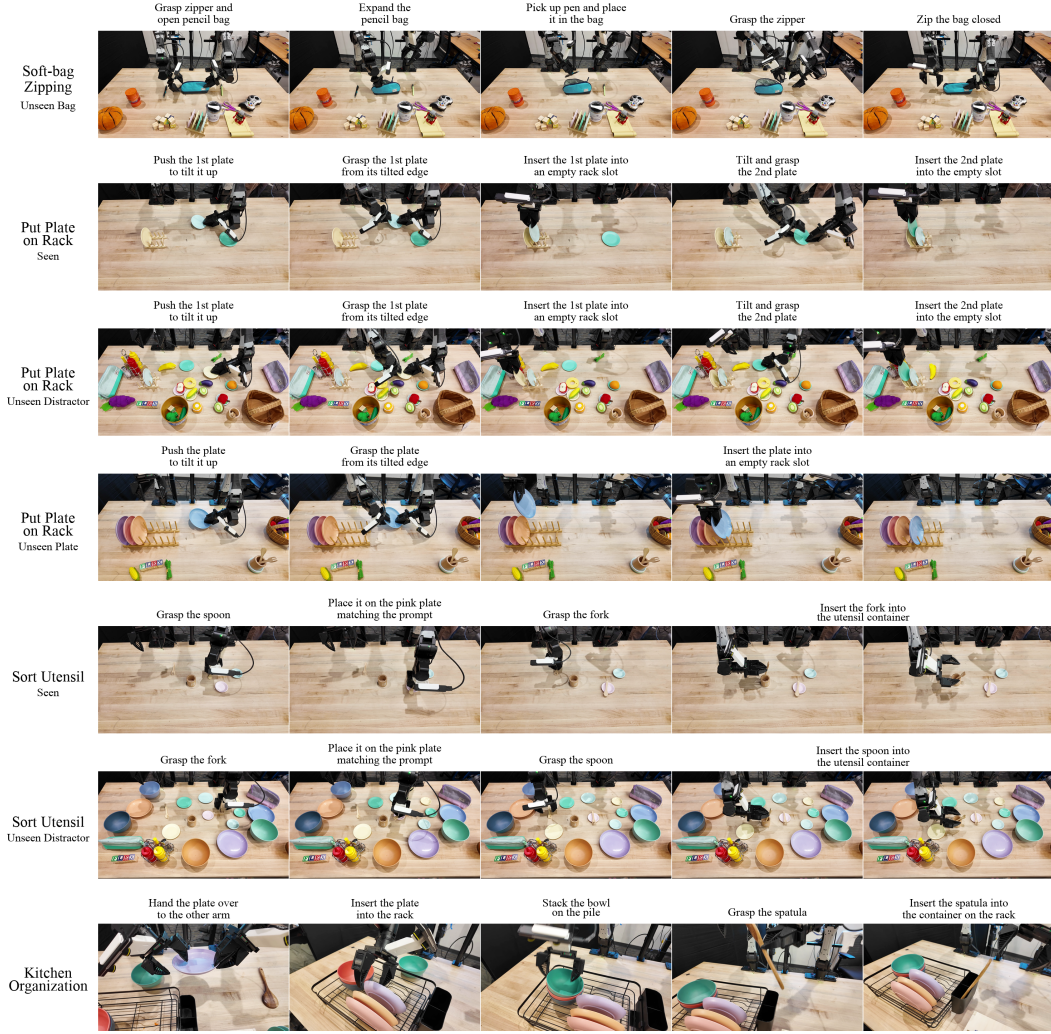


Figure 14: **The remaining evaluation tasks and generalization cases.** *Put Plate on Rack* and *Sort Utensils* test bimanual coordination under sustained contact; *Kitchen Organization* chains four such skills into one long-horizon episode and is evaluated in a single setting. Rows are grouped by task, with the seen condition first and the unseen conditions after: added distractor objects for *Put Plate on Rack* and *Sort Utensils*, and an unseen plate for *Put Plate on Rack*. The top row is the unseen-bag case of *Soft-Bag Zipping*, whose seen condition appears in Figure 5 alongside *Self-Repair Gripper*.

would cost under equal engineering effort. FLEX- π 's full-joint path used the optimization stack of Sec. I to reach a deployable range. We did optimize Fast-WAM via adding torch compilation to make it much faster. We report these faster numbers.

G ADDITIONAL EXPERIMENTS

G.1 (Q1) REAL-WORLD EVALUATION: PROTOCOL AND GENERALIZATION ANALYSIS

Protocol. We score every rollout under the partial-credit rubric of Sec. D and report the score normalized by the maximum attainable score. Each task gets 20 rollouts per method, except *Sort Utensils* (10). *Put Plate on Rack* splits its 20 into one-plate and two-plate rubric variants of 10 each. Object placements are re-randomized between rollouts and methods are interleaved within each round, so every policy sees the same lighting and environmental drift. Both FLEX- π inference modes are runtime flags on one fine-tuned checkpoint (Sec. C), not separate models.

Table 5: **Real-robot training data per task.** Hours are wall-clock demonstration time, and every method trains on the identical set for its task (Sec. F). *Self-Repair Gripper* is the only task with DAGger corrections (Ross et al., 2011): operator take-overs during ManiFlow rollouts, each clipped into its own training episode (Sec. F.2). Its policies train on the last two rows together. The Kitchen Organization set combines a rack-combo collection with a multi-skill collection that omits the plate stage.

Task	Episodes	Hours
Put Plate on Rack	301	2.7
Sort Utensils	152	1.2
Kitchen Organization	448	3.8
Soft-Bag Zipping	534	9.7
Self-Repair Gripper	802	11.8
Self-Repair Gripper (DAGger)	570	5.6

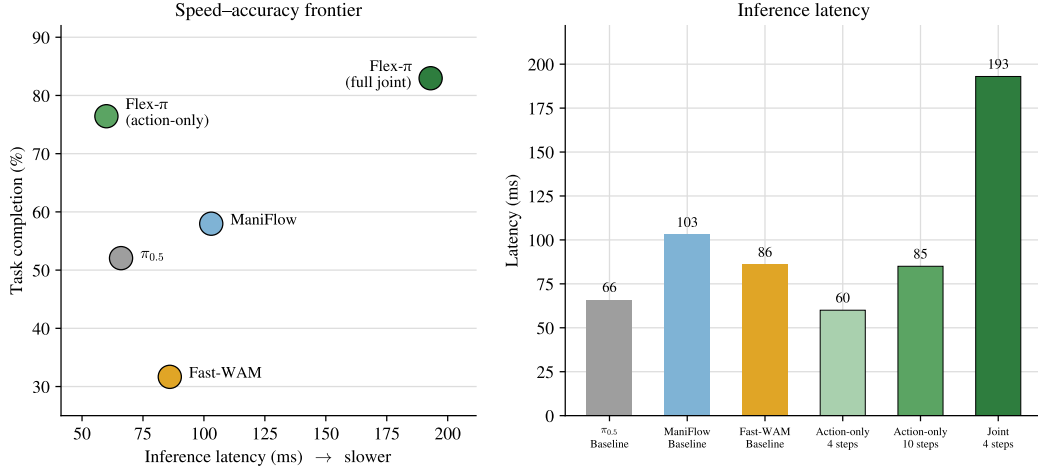


Figure 15: **Action-only is the fastest policy and also the most accurate; joint generation trades latency for further accuracy.** *Left:* in-distribution task completion against single-inference latency on an RTX 5090, best stack per path (Tables 9 and 10). The vertical axis is the five-task average reported in Sec. 4.2, with *Put Plate on Rack* pooled over its one- and two-plate rubric variants. *Right:* the same latency measurements per configuration. At four denoise steps action-only is the fastest configuration shown, below all three baselines, and still delivers an 18.5% gain over the strongest of them. Full joint generation costs roughly 3 $\times$ that latency and provides a further 6.5% gain. Baselines run on only some of the five tasks are averaged over those.

The margin over $\pi_{0.5}$ grows with the size of the shift. Figure 16 orders the held-out conditions by the $\pi_{0.5}$ -to-FLEX- π success-rate gain: +18% with added distractors on *Put Plate on Rack*, +28% on the unseen plate, +30% with added distractors on *Sort Utensils*, and +46% on the unseen soft bag. The ordering follows how much of the training-time appearance each shift invalidates, matching the pattern LIBERO-Plus shows in simulation (Table 2).

FLEX- π has the smallest drop from seen to unseen conditions. Figure 17 plots each unseen condition against its matching seen condition. Both FLEX- π settings stay within 8% of the diagonal on all three tasks, and full joint stays within 7% of the diagonal; their largest drop is on the soft bag. ManiFlow starts from a comparable seen score on *Put Plate on Rack* and still exhibits a 22–33% drop. $\pi_{0.5}$ drops by less than 8% on the two rigid-object tasks but by 26% on the soft bag, from a seen score 28% below FLEX- π .

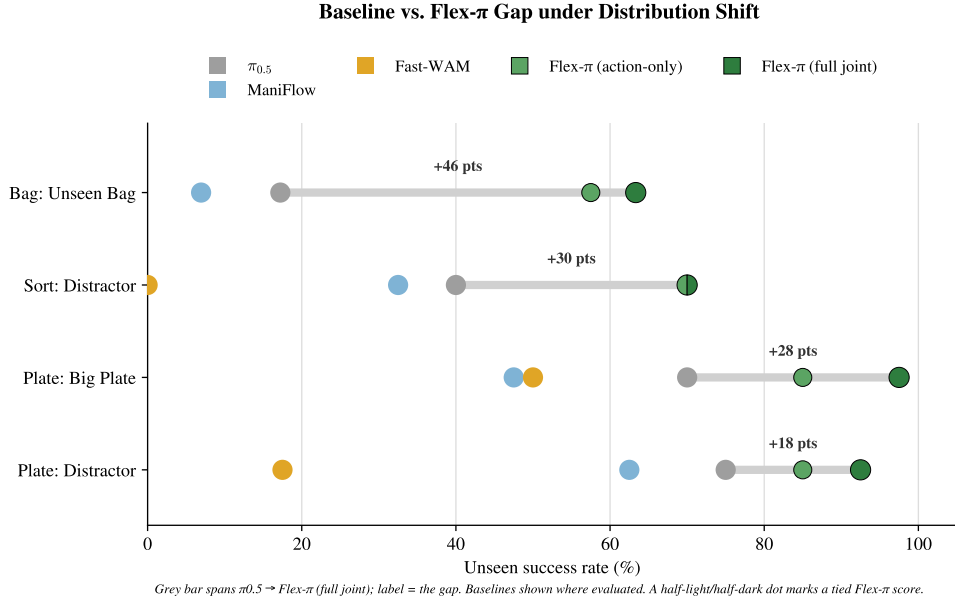


Figure 16: **FLEX- π pulls further ahead of $\pi_{0.5}$ as the domain shift gets harder.** Each row is one unseen condition, ordered by the size of the gap; the grey bar spans $\pi_{0.5}$ to FLEX- π (full joint). A half-light, half-dark dot marks a condition on which the two FLEX- π settings score identically.

G.2 (Q4) REAL-WORLD DEPTH INPUT ABLATION

The pointmap carries metric geometry and is the only one of the three visual streams FLEX- π observes that needs a depth sensor at deployment. Withholding it from the input costs nothing measurable. On *Put Plate on Rack* in full joint generation, task completion is 95.0% with the depth input and 91.7% without (Figure 18).

Per-stream dropout with cross-modality forcing (Sec. 3.2) is what makes this possible: the model is trained to generate each stream from the others, so it can supply the geometry it is not given. Figure 13 shows that the generated scene structure survives the same withholding. This makes the depth sensor optional at deployment, but not the pointmap stream itself: removing it from *training* causes a 20.0% performance drop in average RoboTwin success (Figure 11a).

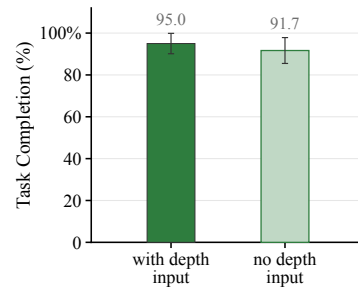


Figure 18: **Depth input is optional at deployment.** Task completion on *Put Plate on Rack*, with and without the depth input.

G.3 (Q1) LONG-HORIZON DEXTERITY: SELF-REPAIR GRIPPER

In *Self-Repair Gripper*, the robot repairs its own gripper, fastens it with a screw, and finally clears the workspace by placing a vegetable into a bucket. The task consists of eight sequential stages shared across both arms (Figure 19a). The replacement gripper, screw holder, and screwdriver begin at randomized locations on the right side of the table, while the vegetable and bucket remain on the left. Three insertion and fastening stages account for half of the rubric's 3.0 points, so high scores require accurate assembly rather than object transport alone.

The three assembly stages have millimeter-level clearances. Seating the replacement gripper leaves ± 0.5 mm of lateral clearance. Starting the screw is more forgiving, at ± 1.75 mm, with the screw head preventing over-insertion. Driving the screw is the tightest stage, leaving only ± 0.25 mm between the driver bit and the socket. Grasping the screwdriver automatically depresses its trigger,

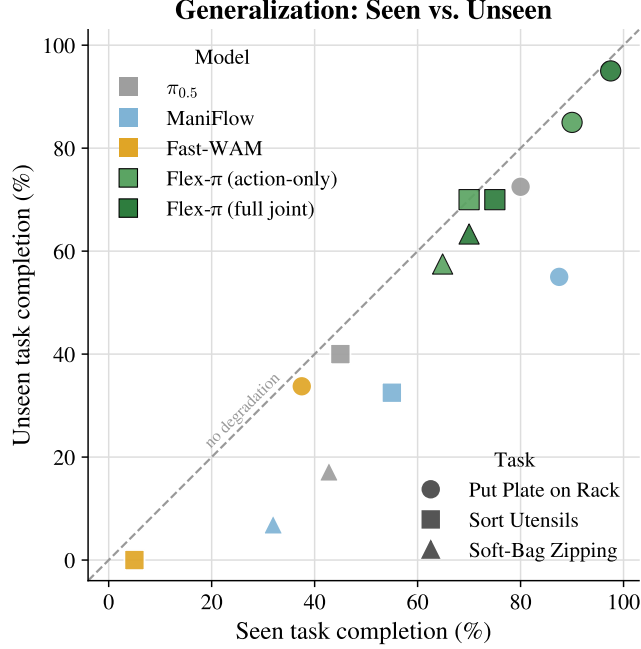


Figure 17: **How much each method loses under distribution shift.** Unseen task completion against the matching seen condition, one point per task; for *Put Plate on Rack* the unseen coordinate averages the unseen-plate and distractor conditions. Distance below the dashed diagonal is the cost of the shift. Fast-WAM’s full-completion rate is 0% in every condition of the two tasks it appears in, so both of its coordinates are partial credit for attempts that never finish.

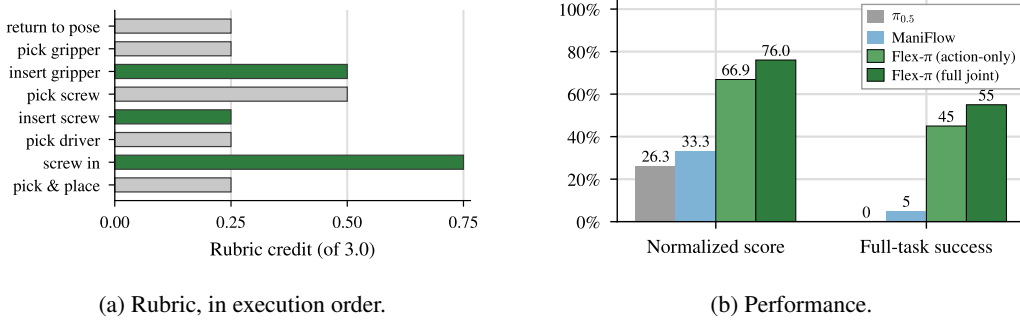


Figure 19: **Self-Repair Gripper: an eight-stage task, and how far each method gets.** **Left:** the eight stages, which must be completed in order; green marks the three insertion and fastening stages, which together carry half of the 3.0 available points. **Right:** partial-credit score normalized by the maximum attainable score, and the fraction of rollouts completing every stage.

causing it to rotate for a fixed one-second interval, so failures arise from perception and placement rather than force control.

Data collection and evaluation. We collect teleoperated demonstrations of the complete sequence at 30 Hz (Table 5). We then roll out a first-stage ManiFlow (Yan et al., 2025b) policy for two rounds and record human corrections wherever it fails; this is the only task with DAGger corrections. Using ManiFlow rather than FLEX- π to collect corrections avoids biasing the dataset toward our own failure modes; ManiFlow is therefore also the only baseline evaluated on corrections generated from its own rollouts. All methods train on the identical dataset for a comparable number of steps. We evaluate FLEX- π in both inference modes, ManiFlow, and $\pi_{0.5}$ (Intelligence et al., 2025) over 20 rollouts, reporting both normalized partial-credit score and complete-task success.

Why we also report complete-task success. A policy that succeeds at each stage with 90% probability still completes the entire sequence only 43% of the time. We therefore report complete-task success alongside normalized partial credit.

FLEX- π leads every baseline, and full joint generation leads action-only. With full joint generation, FLEX- π more than doubles the normalized score of the stronger baseline and completes the entire sequence in over half of its rollouts, where ManiFlow finishes one rollout in twenty and $\pi_{0.5}$ none (Figure 19b). Against action-only inference, full joint generation improves the normalized partial-credit score by 9.1% and complete-task success by 10%. Partial credit tolerates isolated failures whereas complete-task success does not, explaining why ManiFlow retains roughly a third of the rubric yet almost never finishes.

G.4 (Q1) DEFORMABLE MANIPULATION: SOFT-BAG ZIPPING

Unlike the previous tasks, *Soft-Bag Zipping* requires manipulating an object with no stable rest shape. The robot unzips a fabric pouch, places one or two pens inside, and zips it shut. The pouch deforms whenever it is placed, opened, or loaded, so the geometry and location of the zipper pull vary across rollouts.

The zipper pull requires precise localization and grasping. The pull is small, hangs slack, and is similar in color to the bag. The gripper must isolate the pull without catching the surrounding fabric, which can jam the slider. The rubric therefore scores grasping the pull separately from traversing the zipper (Sec. D). Closing is the harder traverse because the loaded pouch deforms around its contents and the fabric must remain clear of the slider.

Data collection and evaluation. We collect teleoperated demonstrations of the full sequence at 30 Hz (Table 5). Unlike Self-Repair Gripper, this task uses no DAgger corrections, so all methods train on the same demonstration set. The pouch starts beneath the head camera with a small randomized lateral displacement, while the pens are placed freely and picked with the nearer arm. We evaluate both inference modes of FLEX- π , ManiFlow, and $\pi_{0.5}$ (Intelligence et al., 2025) over 20 rollouts each, reporting normalized partial credit and the fraction of rollouts that finish with the pouch zipped shut.

FLEX- π progresses through the deformable task where both baselines stall. Full joint generation scores over $1.5\times$ the stronger baseline and finishes the task twice as often as $\pi_{0.5}$ and eight times as often as ManiFlow (Figure 6); action-only inference sits between full joint and the baselines on both measures. Because the rubric is sequential, the average raw score also indicates where rollouts tend to fail: both baselines stop before finishing the traverse that draws the slider open, whereas FLEX- π in either mode gets past loading the pouch and stops short of the closing grasp.

This is also the only task on which $\pi_{0.5}$ outperforms ManiFlow in the seen condition, after trailing it on the other four; under distribution shift, $\pi_{0.5}$ leads ManiFlow more broadly (Figure 17). One possible explanation is that dense 3D input provides less advantage for a deformable object whose geometry changes substantially across rollouts. Soft-Bag Zipping also shows a large gap between partial progress and completion: ManiFlow earns roughly one-third of the rubric on average but completes only one of twenty rollouts, echoing the gap observed over the longer sequence in Sec. G.3.

G.5 ROBOTWIN ABLATION SETUP

The three RoboTwin ablations of Figures 11 and 12 share one recipe: five tasks (`lift_pot`, `place_shoe`, `pick_diverse_bottles`, `place_object_basket`, and `stack_bowls_two`), 50 demonstrations per task, 5 epochs from scratch, evaluated under domain randomization. Figures 11a and 12 train one model per variant on that recipe; Figure 11b trains nothing further, varying only what a single checkpoint from that recipe generates at inference. Every variant sees the identical task set, demonstration budget, and schedule; only the ablated factor changes.

Table 6: **LIBERO standard benchmark.** Per-suite and average success rate (%); **bold** = best within each group (VLAs / WAMs). FLEX- π is finetuned with flexible generation (one model, run action-only or jointly); FLEX- π^* is finetuned for a single fixed mode. *no depth*: trained without the depth (pointmap) stream.

Methods	LIBERO				
	Spatial	Object	Goal	Long	Avg
<i>VLAs</i>					
Diffusion Policy (Chi et al., 2023)	78.3	92.5	68.3	50.5	72.4
Octo (Octo Model Team et al., 2024)	78.9	85.7	84.6	51.1	75.1
OpenVLA (Kim et al., 2024)	84.7	88.4	79.2	53.7	76.5
SpatialVLA (Qu et al., 2025)	88.2	89.9	78.6	55.5	78.1
π_0 +FAST (Pertsch et al., 2025)	96.4	96.8	88.6	60.2	85.5
GR00T-N1 (NVIDIA et al., 2025)	94.4	97.6	93.0	90.6	93.9
π_0 (Black et al., 2024)	96.8	98.8	95.8	85.2	94.1
UniVLA (Bu et al., 2025)	96.5	96.8	95.6	92.0	95.2
$\pi_{0.5}$ (Intelligence et al., 2025)	98.8	98.2	98.0	92.4	96.9
OpenVLA-OFT (Kim et al., 2025)	97.6	98.4	97.9	94.5	97.1
RIPT-VLA (Tan et al., 2025)	98.6	98.6	99.0	93.8	97.5
X-VLA (Zheng et al., 2025)	98.2	98.6	97.8	97.6	98.1
MomloAct2 (Fang et al., 2026)	97.8	100.0	97.8	93.2	97.2
MomloAct2-Think (Fang et al., 2026)	98.8	99.8	98.5	95.4	98.1
Qwen-RobotManip (Yuan et al., 2026a)	—	—	—	—	99.2
FLEX- π (action-only, no depth)	97.8	99.8	98.0	96.2	98.0
FLEX- π (action-only)	99.4	99.6	98.0	96.6	98.4
FLEX- π^* (action-only, no depth)	97.0	100.0	98.8	98.6	98.6
FLEX- π^* (action-only)	98.8	100.0	98.4	97.4	98.7
<i>WAMs</i>					
F1 (Lv et al., 2025)	98.2	97.8	95.4	91.3	95.7
GE-Act (Liao et al., 2026)	98.2	97.6	95.8	94.4	96.5
Fast-WAM (Yuan et al., 2026b)	98.2	100.0	97.0	95.2	97.6
Motus (Bi et al., 2025)	96.8	99.8	96.6	97.6	97.7
LingBot-VA (Li et al., 2026)	98.5	99.6	97.2	98.5	98.5
Cosmos-Policy (Kim et al., 2026b)	98.1	100.0	98.2	97.6	98.5
FLEX- π (full joint, no depth)	99.0	99.8	98.6	96.6	98.5
FLEX- π (full joint)	99.6	99.8	98.6	96.0	98.5
FLEX- π^* (full joint, no depth)	98.8	99.6	98.6	98.8	99.0
FLEX- π^* (full joint)	99.2	99.8	99.0	98.6	99.2

G.6 DATA SCALING EXPERIMENT IN ROBOTWIN

FLEX- π is the most data-efficient method at every demonstration budget. We re-train each method on fractional subsets of the RoboTwin demonstrations and report success rate against dataset size (Figure 10). This experiment uses the 50 random-scene RoboTwin tasks, not the five-task recipe of the ablations above. At 50 demos per task FLEX- π reaches 78.8%, against 31.4% for $\pi_{0.5}$ (Intelligence et al., 2025), 41.9% for Fast-WAM (Yuan et al., 2026b) and 17.2% for LingBot-VA (Li et al., 2026). At 100 demos it improves to 87.0% against 44.7%, 68.1% and 32.2%, and reaches 94.8% at 500 demos.

G.7 FULL LIBERO AND LIBERO-PLUS RESULTS

Table 6 and Table 7 give the full per-suite and per-perturbation breakdowns summarized in Table 2.

Table 7: **Robustness on LIBERO-Plus.** Success rate (%) under the seven perturbation types; **bold** = best per column. *Total* is the official task-count-weighted mean over all 10,030 perturbed tasks, not an unweighted mean of the seven categories, since the categories differ in size. Baselines are the published numbers of Fei et al. (2025). [†]Neither Fast-WAM nor $\pi_{0.5}$ reports LIBERO-Plus, so those two rows are our own evaluations of the released checkpoints under the same protocol. The FLEX- π rows are evaluated from the same checkpoint run in different inference modes.

Method	Cam.	Robot	Lang.	Light	BG	Noise	Layout	Total
VLA								
OpenVLA (Kim et al., 2024)	0.8	3.5	23.0	8.1	34.8	15.2	28.5	15.6
NORA (Hung et al., 2025)	2.2	37.0	65.1	45.7	58.6	12.8	62.1	39.0
UniVLA (Bu et al., 2025)	1.8	46.2	69.6	69.0	81.0	21.2	31.9	42.9
π_0 (Black et al., 2024)	13.8	6.0	58.8	85.0	81.4	79.0	68.9	53.6
π_0 -FAST (Pertsch et al., 2025)	65.1	21.6	61.0	73.2	73.2	74.4	68.8	61.6
RIPT-VLA (Tan et al., 2025)	55.2	31.2	77.6	88.4	91.6	73.5	74.2	68.4
OpenVLA-OFT (Kim et al., 2025)	56.4	31.9	79.5	88.7	93.3	75.8	74.2	69.6
$\pi_{0.5}$ (Intelligence et al., 2025) [†]	72.2	76.8	85.1	96.2	95.5	87.0	86.9	84.7
Qwen-RobotManip (Yuan et al., 2026a)	89.9	83.9	86.5	98.6	99.9	97.9	87.5	91.4
FLEX- π (action-only)	71.9	50.7	83.3	91.9	91.5	86.0	80.4	78.3
WAM								
Fast-WAM (Yuan et al., 2026b) [†]	40.0	65.3	68.8	91.4	58.2	63.8	75.5	65.3
FLEX- π (full joint)	73.7	53.1	84.3	91.9	93.8	93.4	82.9	80.9

H PER-TASK ROBOTWIN RESULTS

Table 8 gives the per-task breakdown behind the RoboTwin averages of Table 1, for the three baselines that report per-task figures and for both FLEX- π deployment modes.

Table 8: **Per-task RoboTwin success rate (%)** on all 50 tasks under clean and domain-randomized (*Rand.*) evaluation, in the full-data setting of Table 1: 50 clean + 500 randomized demonstrations per task (2,500 + 25,000 in total). Baseline columns are the published per-task figures of Yuan et al. (2026b); the FLEX- π columns are our own evaluations of a single checkpoint in its two deployment modes.

Task	$\pi_{0.5}$		Fast-WAM		LingBot-VA		FLEX- π (action-only)		FLEX- π (full joint)	
	Clean	Rand.	Clean	Rand.	Clean	Rand.	Clean	Rand.	Clean	Rand.
adjust bottle	100	99	100	100	90	94	100	100	98	97
beat block hammer	96	93	99	97	96	98	99	99	99	93
blocks ranking rgb	92	85	100	100	99	98	98	92	100	93
blocks ranking size	49	26	94	98	94	96	84	85	82	84
click alarmclock	98	89	100	100	99	100	100	98	91	91
click bell	99	66	100	100	100	100	98	95	94	97
dump bin bigbin	92	97	97	96	89	96	93	91	87	86
grab roller	100	100	100	100	100	100	100	100	100	100
handover block	66	57	95	81	99	78	100	96	99	95
handover mic	98	97	99	100	94	96	98	99	100	99
hanging mug	18	17	58	62	40	28	79	84	84	86
lift pot	96	85	100	100	100	99	100	100	99	100
move can pot	51	55	90	88	94	97	99	100	98	100
move pillbottle pad	84	61	100	99	99	99	100	100	100	100
move playingcard away	96	84	100	100	100	99	99	100	100	100
move stapler pad	56	42	77	64	91	79	93	92	96	94
open laptop	90	96	98	100	92	94	98	100	98	100
open microwave	34	77	62	45	82	86	60	64	70	77
pick diverse bottles	81	71	80	85	89	82	95	92	92	93
pick dual bottles	93	63	100	96	100	99	100	100	100	100
place a2b left	87	82	95	93	97	93	97	100	95	97
place a2b right	87	84	93	99	97	95	100	96	97	97
place bread basket	77	64	91	93	97	95	96	94	96	94
place bread skillet	85	66	90	93	95	90	90	90	90	95
place burger fries	94	87	96	99	97	95	98	97	98	99
place can basket	62	62	71	69	81	84	80	85	80	84
place cans plasticbox	94	84	99	96	100	99	100	100	100	100
place container plate	99	95	96	100	99	97	100	99	97	100
place dual shoes	75	75	94	88	94	89	93	93	98	93
place empty cup	100	99	100	100	100	100	100	100	100	100
place fan	87	85	96	96	99	93	96	96	97	97
place mouse pad	60	39	83	89	93	96	98	97	100	98
place object basket	80	76	89	88	91	88	90	92	84	92
place object scale	86	80	90	97	96	95	97	98	96	98
place object stand	91	85	90	94	99	96	96	98	97	99
place phone stand	81	81	97	99	97	97	97	98	98	100
place shoe	92	93	96	99	98	98	97	100	98	98
press stapler	87	83	90	97	85	82	96	99	97	98
put bottles dustbin	84	79	95	90	87	91	96	95	95	96
put object cabinet	80	79	94	89	85	87	81	84	90	95
rotate qrcode	89	87	93	89	96	91	91	89	84	88
scan object	72	65	89	92	96	91	91	89	92	87
shake bottle	99	97	100	100	100	97	100	100	100	99
shake bottle horizontally	99	99	100	100	100	99	100	100	100	99
stack blocks three	91	76	95	97	99	98	99	98	99	96
stack blocks two	97	100	100	100	100	98	100	100	100	100
stack bowls three	77	71	80	81	86	83	85	85	77	84
stack bowls two	95	96	92	98	94	98	93	96	95	98
stamp seal	79	55	90	94	96	97	98	100	99	99
turn switch	62	54	61	59	44	45	77	77	81	77
<i>Average</i>	82.7	76.8	91.9	91.8	92.9	91.5	94.5	94.6	94.3	94.8

I INFERENCE OPTIMIZATION

The latencies quoted throughout the paper, including Table 11, are measured on the deployment stack described here. Every component is *training-free*: no distillation, no architectural change, no

Table 9: **Joint-path inference ladder** (ms/call, RTX 5090, full input and full joint generation). Each row adds one component to the row above except where noted. *fixed* and *per-step* are the least-squares decomposition of $T(K)$ over the four step counts.

Stack	$K=1$	$K=2$	$K=4$	$K=10$	fixed	per-step
L0 eager bf16, SDPA (baseline)	147.2	246.0	447.5	1065.3	42.2	102.2
L1 + SDPA backend auto-selection	152.7	251.3	447.9	1053.3	50.6	100.2
L2 + loop-scope compile + compiled encoders	106.3	191.2	359.5	867.8	21.6	84.6
L3 TensorRT joint core (<i>replaces L2</i>)	97.1	148.7	252.0	572.0	42.9	52.8
L4 + host-glue memoization	79.2	131.0	236.3	553.4	25.9	52.7
L5 + encoder CUDA graphs	73.1	125.5	230.0	545.5	20.4	52.5
L6 prefill/decode split (<i>replaces L3</i>), +L4, +L5	77.8	115.9	193.3	428.1	~20	38.5

dropped stream, and the same checkpoint throughout, so the success rates reported elsewhere in the paper transfer unchanged, subject to the fidelity checks below.

Protocol. All measurements use one NVIDIA RTX 5090 (32 GB), PyTorch 2.7.1/CUDA 12.8 with TensorRT 10.16, and the same fine-tuned checkpoint. Inputs use the deployed three-camera 384×320 composite, including RGB, depth, intrinsics, and proprioception. The 128-token language context is precomputed and cached per task. Each configuration runs in a separate process with 3 warmup and 20 timed calls, synchronizing after each call; we report the mean. All runs use Euler integration.

Token accounting. At full joint generation, the model processes 360 video +441 DINO +360 pointmap +32 action = 1193 tokens across 30 blocks, including 387 first-frame anchors and 806 noisy visual/action tokens. For action-only generation, the same 387 anchors are prefetched into a key/value cache, and each step denoises only the 32 action tokens. Generated visual latents are not copied back to the host, since deployment only consumes the actions. This saves ~ 25 ms per call in the full-generation setting.

Joint path. Table 9 is a ladder in which each row differs from the one above by exactly one component. Fitting $T(K) = \text{fixed} + K \cdot \text{per-step}$ over the four step counts separates one-per-call from one-per-step cost, and each component falls cleanly into one term or the other. Exporting the 30-block denoise core to a TensorRT engine is purely per-step, cutting it by 48%; the dense joint attention mask rides as a runtime input rather than a baked constant, so one engine serves every input/output regime. The two host-side components remove CPU work and nothing else, and so move only the fixed term. Only whole-loop compilation touches both, since capturing the loop as one graph fuses kernels and collapses per-call launch overhead at once. The best stack is therefore step-dependent, and the achievable speedup rises from $2.0 \times$ at $K=1$ to $2.5 \times$ at $K=10$: engine work attacks the term that scales with K , while the ~ 20 ms floor of encoders and host glue does not.

Prefill/decode split. The 387 anchor tokens attend only to one another and are modulated at flow time $\tau=0$, so their per-layer keys and values are step-invariant; we verify this directly, as the anchor output of the joint block stack is bit-identical across denoise steps. Prefilling them once and decoding only the 806 noisy tokens against the cached prefix therefore removes $\sim 32\%$ of the tokens from every step without changing steps, streams, or math, and cuts per-step cost a further 27%. As a TensorRT engine the decode/full ratio reaches 0.719 against a 0.676 token ratio, the gap being the key/value assembly the engine fuses and the eager path pays for. The split is bought with a ~ 20 ms once-per-call prefill, so it pays only for $K \geq 2$; at $K=1$ the single engine wins by ~ 5 ms. One caveat for anyone re-measuring it: the prefill is cached on anchor content, so a benchmark replaying one fixed observation pays it once and reports the split ~ 20 ms/call too fast. The L6 row of Table 9 carries the correction, measured by counting engine launches under rotating versus static observations (20 versus 0 prefills over 20 calls); the single-engine stack has no such cache and is flat under the same test.

Action-only path. The fast path inverts the picture (Table 10): the dominant lever is loop-scope compilation, not TensorRT. A 32-token step against a cached prefix is launch-bound rather than FLOP-bound, so capturing the entire loop, including the key/value prefill, as one graph cuts per-step cost $3.5 \times$, from 14.2 to 4.1 ms, far more than better kernels could. The two host-side components

Table 10: **Action-only inference ladder** (ms/call, RTX 5090, full input, no visual stream generated). Columns as in Table 9.

Stack	$K=1$	$K=2$	$K=4$	$K=10$	fixed	per-step
A0 eager bfl16, SDPA (baseline)	89.1	100.4	131.8	215.7	73.9	14.2
A1 + SDPA backend auto-selection	89.3	102.9	128.5	220.3	73.1	14.6
A2 + host-glue memoization + encoder graphs	66.7	80.1	106.7	188.7	52.9	13.6
A3 loop-scope compile (<i>replaces eager</i>)	56.0	60.1	66.8	92.9	51.5	4.1
A4 + compiled encoders	49.0	52.6	60.3	85.2	44.6	4.0
A5 + encoder CUDA graphs instead	48.6	52.5	62.0	87.4	44.2	4.3

reproduce their joint-path effects almost exactly, as expected for costs that are per-call and independent of what is being denoised.

What did not work. Several standard accelerations are no-ops on this stack. FP8 inside the TensorRT engine is a 1.4% wash with slightly worse numerics, since on this architecture the FP16 tactics already saturate, and MXFP8/NVFP4 engines do not build at all under TensorRT 10.16. A whole-loop CUDA graph over the engine path is impossible, as the engine’s async execution is not capturable, and would have bought only $\sim 3\%$. Compiling the encoders is a no-op on the *joint* engine path, as is overlapping the three encoders on separate streams, for the same root cause: those encoders are launch-bound, and four per-forward synchronizing constants broke both graph capture and compilation until removed. Raising the TensorRT builder optimization level from 3 to 5 changes per-step cost by 0.5%. A second-order multistep solver is mathematically sound but collapses in rollout (20.5% vs 94.7% success at six steps): these checkpoints are Euler-tuned, and plain Euler with fewer steps is the better trade.

What imagination costs. With the same checkpoint, the same observation, and the best stack for each path, the only difference between the two regimes is whether the three visual streams are denoised. At $K=1$ they nearly converge (49.0 vs 73.1 ms, $1.5\times$); at $K=10$ they differ by $5\times$ (85.2 vs 428.1 ms). The ratio grows because imagination is almost entirely per-step: 38.5 ms for the 1193-token joint sequence against 4.0 ms for 32 action tokens, over a shared ~ 20 ms floor. Cutting steps is therefore the one lever that shortens the joint path without giving up a stream (Table 11).

Numerical fidelity. Host-glue memoization and encoder CUDA graphs are bit-exact by construction, since they remove host work and nothing else, and we verify this with identical fixed-seed action fingerprints. The TensorRT engine does introduce rounding: 1.4% relative L_2 per denoise step, but only 0.55% on the final action chunk, so the denoise loop contracts per-step error rather than compounding it. We validated the engine end-to-end separately, where it ties the compiled PyTorch path at 90.7% success over three RoboTwin tasks $\times 50$ episodes. The $K=1$ column of Table 9 is a latency floor rather than an operating point: success collapses there (Table 11).

Memory. Torch’s allocator does not see TensorRT engine weights or scratch, so torch-side figures understate the engine stacks; sampling the whole process instead gives 15.8 GB peak for the eager and compiled stacks, 26.4 GB for the single engine, and 25.7 GB for the prefill/decode split. The two engine stacks cost essentially the same resident memory despite the split’s on-disk footprint being ~ 9 GB larger, because the split shares one scratch buffer sized to the larger of its two engines and both stacks free the now-dead PyTorch expert weights once the engines are installed. On a 32 GB card this leaves 5–6 GB of headroom: enough for pure inference, but tight when a simulator’s renderer is co-resident.

I.1 DENOISING STEPS

The number of Euler steps K is a deploy-time knob orthogonal to the choice of streams. Joint generation denoises every active stream at every step, so its cost is near-linear in K ; the action-only path denoises only the 32 action tokens against a cached prefix, so K costs it far less. Sweeping K on the same checkpoint in action-only mode (Table 11), success peaks at $K=4$ and stays within 1.0 point of that peak for every $K \geq 2$, then collapses below 60% at a single step. Predicting in latent space rather than pixels is what buys this: the action expert reads the future streams for geometry and semantics, which settle well before the latents are visually converged. Full joint generation was swept over the same K and peaks at $K=4$ as well, so we use $K=4$ in both modes for the main simulation and real-world experiments.

K	Latency	Clean	Rand.
10	85	93.5	93.6
4	60	94.5	94.6
2	53	93.7	93.9
1	49	51.0	52.9

Table 11: **Denoising steps, action-only.** RoboTwin success (%) and latency (ms, RTX 5090, measured on the stack of Sec. I) from one checkpoint. Success peaks at $K=4$.

J TRAINING HYPERPARAMETERS

Table 12 lists the settings shared by every run reported in this paper. Pre-training and each fine-tuning domain differ only in the dataset, the number of epochs, and the batch size; the optimizer, schedule, precision, and all stream-specific settings are held fixed, so a comparison across domains is a comparison of data rather than of recipe. Architectural sizes (expert widths, depth, head counts, adapter construction) are given in Sec. A and are not repeated here.

What is trained. The Wan-2.2 VAE, the `umT5` text encoder, and the DINOv3 encoder are frozen throughout pre-training and fine-tuning. We train the shared visual trunk, the action expert, the per-stream adapters, and the per-stream output heads. The action expert is initialized by resampling the Wan-2.2 blocks (Sec. A.3); everything else in the trunk is loaded from Wan-2.2-5B, and only the action encoder and action head start from scratch.

Stream dropout. The two masks of Sec. 3.2 are drawn per sample from the Bernoulli probabilities in Table 12, independently of one another, with rejection sampling on the input mask so that at least one visual stream is always observed (Sec. A.5). Cross-modality forcing is enabled for all three visual streams, so a stream dropped from the input is still denoised at the output.

Table 12: **Training hyperparameters.** Shared across AGIBOT World pre-training and all fine-tuning runs unless noted. Per-domain values are given in the last group.

Setting	Value
<i>Optimization</i>	
Optimizer	AdamW, $\beta = (0.9, 0.95)$
Learning rate	1×10^{-4}
Schedule	cosine, linear warmup over the first 5% of steps
Weight decay	1×10^{-2}
Gradient clipping	1.0 (global norm)
Precision	bfloat16 mixed precision
Sharding	DeepSpeed ZeRO stage 1 via Accelerate
<i>Sample window (Sec. A.2)</i>	
Timesteps per sample	33
Action chunk	$H = 32$
Visual frames per sample	9 (stride 4)
<i>Streams</i>	
Loss weights $\lambda_a, \lambda_o, \lambda_d, \lambda_p$	1.0 each
Flow-matching shift (video / DINO / pointmap)	6.0
Flow-matching shift (action)	1.0
DINO encoder	DINOv3 ViT-B/16, frozen, 768-d
Pointmap encoding	shared VAE, clipped at 2 m
Language context	128 umT5 tokens + 1 proprioception token
<i>Per-sample stream dropout (Sec. 3.2)</i>	
$p(\text{stream observed})$	0.5 per visual stream
$p(\text{stream read by the action tokens})$	0.5 per visual stream
Constraint on the input mask	at least one visual stream observed
Cross-modality forcing	enabled for all three visual streams