

# Rollout Pass-Rate Control: Steering Binary-Reward RL Toward Its Most Informative Regime

Tianshu Zhu<sup>1</sup>, Wenyu Zhang<sup>1</sup>, Xiaoying Zuo<sup>1</sup>, Lun Tian<sup>1</sup>, Haotian Zhao<sup>1</sup>,  
Yucheng Zeng, Jingnan Gu<sup>1†</sup>, Daxiang Dong<sup>1†</sup>, Jianmin Wu<sup>1†</sup>,  
Dawei Yin<sup>1†</sup>, Dou Shen<sup>1†</sup>  
<sup>1</sup>Baidu

Emails: {zhutianshu,zhangwenyu08,zuoxiaoying,tianlun,zhaohaotian02,  
gujingnan,dongdaxiang,wujianmin,yindawei02,shendou}@baidu.com

<sup>†</sup>Corresponding authors: Jingnan Gu, Daxiang Dong, Jianmin Wu, Dawei Yin, and Dou Shen

## Abstract

SWE-bench-style agentic reinforcement learning relies on expensive stateful trajectories, yet substantial compute is wasted on sampled rollout groups with skewed pass rates, where binary rewards provide a weak contrastive signal. We frame this inefficiency as a pass-rate control problem and show that a 50% pass rate is the most informative operating point: it maximizes reward entropy, the probability of surviving group filtering, RLOO advantage energy under GRPO, and success-failure contrastive structure. Guided by this principle, we propose *Prefix Sampling* (PS), which replays trajectory prefixes to steer skewed groups toward this regime: successful prefixes serve as head starts for mostly failing groups, while failing prefixes serve as handicaps for mostly passing groups. In stateful agent environments, prefix states are reconstructed through replay while replayed tokens are excluded from the loss, restricting optimization to continuations generated by the current policy. On SWE-bench-style agentic RL, PS delivers end-to-end wall-clock speedups of  $2.01\times$  on Qwen3-14B and  $1.55\times$  on Qwen3-32B while preserving or improving final verified performance. For 14B, the SWE-bench Verified peak rises from the baseline peak of 0.273 to 0.295 under PS. Additional mathematical reasoning experiments on AIME 2025 show the same pass-rate control pattern and decompose the gains into replay, bidirectional coverage, and adaptive control.

## 1 Introduction

Reinforcement learning with verifiable rewards (RLVR) is now widely used for post-training on tasks with clear external feedback, including software engineering and mathematical reasoning [1–3]. Within this paradigm, online policy-gradient methods such as Group Relative Policy Optimization (GRPO) rely on rollout trajectories to produce contrastive learning signal [1]. As these tasks move toward agentic reinforcement learning, rollouts become longer, more interactive, and substantially more expensive to generate [3, 4]. This raises a basic efficiency question: **when rollouts dominate compute and wall-clock time, how much of that effort actually produces useful learning signal?** Existing filtering heuristics show that not all rollouts are equally valuable, but the relationship among rollout pass rates, compute, and training benefit remains under-specified.

To reduce compute spent on uninformative rollouts, many RLVR pipelines use group-level filtering [1–3]. We use *group filtering* to denote the GRPO-style practice of discarding rollout groups whose binary rewards are all zero or all one. This operation is sometimes called rejection sampling in RLVR implementations, but differs from positive-only rejection sampling, which keeps only successful samples for supervised fine-tuning (SFT) or reinforcement. The need for such filtering is implicit in

DeepSeekMath/GRPO, since group-relative normalization gives no relative advantage signal when every reward in a group is identical [1]. DAPO later formalizes this exclusion as dynamic sampling, replacing all-zero/all-one groups until the batch is filled [2]. Beyond filtering, prior work injects guidance, reallocates rollout budget, mixes supervision, or calibrates hint strength to rescue difficult instances or preserve effective batches [5–9]. These methods reshape pass rates implicitly. They rarely derive the target regime from binary-reward learning signal, and they do not directly control both too-hard and too-easy groups under fixed compute.

We therefore formulate Rollout Pass-Rate Control (Rollout-PRC) for binary-reward RLVR tasks such as software engineering and mathematical reasoning [10, 11]. For a task with multiple rollouts, the rollout pass rate is the fraction of successful rollouts in the group. Even after group filtering, many retained rollout groups in SWE-bench-style tasks remain highly skewed, such as  $1/8$  or  $7/8$ , and provide weak contrast. Three perspectives—reward entropy, RLOO advantage energy under GRPO, and success–failure contrastive structure—all identify the same target: **training is most informative when rollout pass rates are close to 50%** [1, 12, 13]. Rollout-PRC turns pass-rate management from an implicit byproduct of training into an explicit control objective.

Guided by Rollout-PRC, we propose Prefix Sampling (PS), a bidirectional framework that routes skewed rollout groups toward the 50% regime through trajectory prefix replay. For mostly failing groups, it replays a successful prefix as a head start; for mostly passing groups, it replays a failing prefix as a handicap. Unlike hint-based approaches that rely on oracle solutions or reasoning traces from stronger models [5, 6, 14–17], Prefix Sampling reuses trajectories produced by the current policy itself. In stateful agent environments, it reconstructs the prefix state through the existing rollout path and masks replayed tokens from the loss, so optimization is restricted to fresh continuations generated by the current policy. On SWE-bench-style agentic RL, it reaches the baseline’s best verified score in up to  $1.76\times$  fewer evaluation steps and delivers  $2.01\times$  and  $1.55\times$  end-to-end speedups on Qwen3-14B [18] and Qwen3-32B [19] without sacrificing final performance.

Our contributions are:

- We identify Rollout Pass-Rate Control (Rollout-PRC) as a principled efficiency objective for binary-reward RL, and show that a 50% rollout pass rate maximizes reward entropy, RLOO advantage energy under GRPO, and success–failure contrastive structure.
- We propose Prefix Sampling, a bidirectional pass-rate steering framework that replays trajectory prefixes to move skewed rollout groups toward this high-signal regime. The method works in stateful multi-turn agent environments because it reconstructs prefix state through the existing rollout path, applies optimization only to the continuation generated by the current policy, and adjusts prefix length for different pass-count buckets.
- We demonstrate cross-scale gains on SWE-bench-style agentic RL and AIME 2025 reasoning [20], including up to  $1.76\times$  fewer benchmark-evaluation steps,  $2.01\times$  end-to-end speedup, and mechanistic and ablation evidence showing that the gains stem from steering rerollout pass rates toward the 50% target.

## 2 Method

### 2.1 Why target 50% rollout pass rate

Given the limitations of implicit filtering, a natural question is which rollout pass rate yields the strongest binary-reward learning signal. Equation 1 summarizes four complementary quantities:

$$\left\{ \begin{array}{ll} H(p) = -p \log_2 p - (1-p) \log_2 (1-p), & \arg \max_p H(p) = 0.5, \\ S_N(p) = \Pr(0 < K < N) = 1 - p^N - (1-p)^N, & \arg \max_p S_N(p) = 0.5, \\ E_{\text{RLOO}}(k) = \frac{k(N-k)}{(N-1)^2}, & \arg \max_k E_{\text{RLOO}}(k) = N/2, \\ C(k) = k(N-k), & \arg \max_k C(k) = N/2. \end{array} \right. \quad (1)$$

The first two are maximized at  $p = 0.5$ , while the latter two are maximized at  $k = N/2$  for an observed group [1, 12, 13]. Appendix E gives the full derivation and the finite- $N$  contrastive-pair

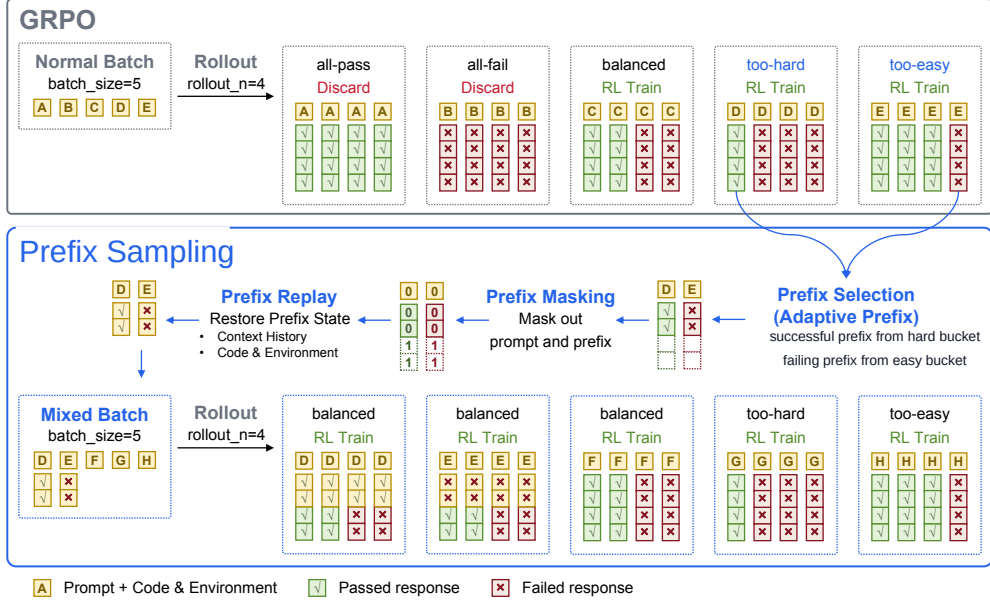


Figure 1: **Prefix Sampling pipeline.** For each task we sample a rollout group and route it by pass count: degenerate 0/8 or 8/8 groups are filtered, already balanced 3/8–5/8 groups are used for standard training, and skewed groups provide replay prefixes. Mostly failing hard buckets reuse a successful prefix as a head start, while mostly passing easy buckets reuse a failing prefix as a handicap. The current policy generates fresh continuations from the replay-reconstructed prefix state; masking applies RL loss only to continuation tokens, steering rerollouts toward 50% without crediting replayed actions. Counts in the diagram are schematic; experiments use  $N = 8$  rollouts.

counts in Table 11. Prefix Sampling therefore treats 50% pass rate as a control target. Rather than simply drawing more rollouts, it uses saved prefixes to move skewed partially successful rollout groups toward balanced, high-information continuations.

## 2.2 Prefix selection and adaptive prefix control

Consider the concrete case of  $N = 8$  rollouts grouped by pass count  $k$ . We discard degenerate groups ( $k \in \{0, 8\}$ ) and train on balanced groups ( $k \in \{3, 4, 5\}$ ) as-is. Skewed groups are further split into *hard*, or *too-hard*, buckets ( $k \in \{1, 2\}$ ), for which a successful trajectory is saved as a replay prefix, and *easy*, or *too-easy*, buckets ( $k \in \{6, 7\}$ ), for which a failing trajectory is saved. This is the *Prefix Selection* stage in Figure 1.

The *Adaptive Prefix* controller decides a single per-bucket scalar: the prefix ratio  $r_b$  for each bucket  $b \in \mathcal{B} = \{1/8, 2/8, 6/8, 7/8\}$ . We keep  $r_b \in [0.05, 0.95]$  and, for a saved trajectory of length  $T$ , set the replay boundary to  $M = \lfloor r_b \cdot T \rfloor$ .

For hard buckets ( $k \in \{1, 2\}$ ), larger  $r_b$  gives a longer successful head start and raises pass rate; for easy buckets ( $k \in \{6, 7\}$ ), larger  $r_b$  replays more of a failing trajectory and lowers pass rate. Both aim to move the rerollout pass rate toward  $p = 0.5$ .

Because model capability drifts during training, any fixed calibration can become stale. We therefore close the loop with a per-bucket feedback controller. For each bucket  $b$ , the trainer maintains an exponential moving average of the rerollout pass rate  $\hat{p}_b$ , updated each time a replayed group from that bucket completes rerollout:

$$\hat{p}_b \leftarrow (1 - \alpha)\hat{p}_b + \alpha p_b^{(\text{new})}. \quad (2)$$

We use  $\alpha = 0.05$  (half-life  $\approx 13.5$  updates), a deadzone  $\delta = 0.03$  around 0.5, an adjustment step  $\eta = 0.05$ , and a five-update cooldown after each adjustment. When  $\hat{p}_b$  exits the deadzone,  $r_b$  shifts by  $\eta$  in the direction that pulls the bucket back toward the target. The update direction reverses across the two sides: for hard buckets,  $r_b$  decreases when  $\hat{p}_b > 0.5 + \delta$  and increases when  $\hat{p}_b < 0.5 - \delta$ ;

for easy buckets, the rule is inverted. Thus each bucket has an independent closed-loop controller, with  $r_b$  as the control knob and  $\hat{p}_b$  as feedback.

### 2.3 Prefix replay and prefix masking

Once the controller settles on replay boundary  $M$ , *Prefix Replay* reconstructs the saved prefix state. In single-turn reasoning, this amounts to prepending tokens. For stateful coding agents, our implementation feeds the saved prefix responses through the same action parser and environment executor used for ordinary model-generated responses. This replay-through-execution path reconstructs the code state, conversation history, tool outputs, and execution context at step  $M$  without introducing a separate sandbox-snapshot restore mechanism. From this state, the current policy generates a fresh continuation.

However, if the loss were applied to the entire trajectory, replayed prefix tokens would inherit the advantage of the new rollout and contaminate credit assignment with off-policy actions. *Prefix Masking* prevents this. Let  $t_{\text{cont}}$  denote the first token generated by the current policy after the replay boundary; the response mask is set to zero for all assistant tokens before  $t_{\text{cont}}$ . Omitting clipping, normalization, and other implementation details, the masked GRPO policy-gradient term [1, 21] can be written schematically as

$$\mathcal{L}_{\text{GRPO}} = - \sum_i A_i \sum_{t \geq t_{\text{cont}}} \log \pi_{\theta}(a_{i,t} \mid s_{i,t}), \quad (3)$$

with  $i$  indexing rollouts in the group. Tokens in the replayed prefix shape the context  $s_{i,t}$  but do not contribute to the loss. Together, replay and masking decouple state manipulation from credit assignment: replay alters the distribution of starting states, while masking ensures that gradients originate only from actions sampled by the current policy after the replay boundary. After rerollout, non-degenerate rerollout groups are combined with ordinary balanced groups into the same *Mixed Batch* shown in Figure 1, then optimized by the same GRPO update.

## 3 Experiments

Our evaluation uses two complementary regimes. SWE-bench-style agentic RL [3, 10] is the primary target: rollouts are long, stateful, and expensive, so both sample efficiency and wall-clock efficiency matter. Mathematical reasoning is a lighter single-turn setting that exposes per-task pass-count distributions and parent-to-rerollout transitions, and therefore lets us audit the mechanism more directly.

### 3.1 Experimental recipe

For SWE-bench, we train Qwen3-14B [18] and Qwen3-32B [19] in thinking mode on R2E-Gym-Subset [22] and evaluate on SWE-bench Verified [10]. Thinking mode provides the stronger long-horizon reasoning needed for high-difficulty software-engineering agents [23]. The baseline follows the DeepSWE GRPO++ recipe [3]: clip-high updates, KL-free policy optimization, no reward-standard-deviation normalization, length-normalized loss, leave-one-out advantage estimation, compact filtering, zero entropy bonus, and group filtering that discards 0/8 and 8/8 groups.

Mathematical reasoning rollouts are single-turn, so the recipe needs no environment-state restoration. Our backbones are Qwen3-4B-Instruct-2507 [24] and Qwen3-8B [25], both run without thinking mode to model RL training on instruction-style policies [23]. We train on an AceReason-Math-Subset constructed locally from AceReason-Math [26]: we run Qwen3-4B-Instruct-2507 with 8 rollouts per problem, estimate each problem’s empirical pass rate, and exclude problems with pass rate at least 75%. This curation yields roughly 15,000 harder problems, and we evaluate the final models on AIME 2025 [20]. The baseline uses the same GRPO++ recipe but excludes components specific to agents.

Both setups share several core configuration choices. We sample  $N = 8$  rollouts per task. SWE-bench runs use max prompt length 4096, while mathematical reasoning runs use max prompt length 2048. The optimizer uses clip-high GRPO with upper clip bound 0.28, actor learning rate  $1 \times 10^{-6}$ , and zero entropy bonus [1, 3, 13, 21]. The batch size is 64 on SWE-bench and 128 on mathematical reasoning. Hardware is matched within each backbone: 4B uses  $2 \times 8$  A800 GPUs, 8B uses  $4 \times 8$

A800 GPUs, and 14B/32B use  $4 \times 8$  H200 GPUs. In the four main runs, Prefix Sampling uses the 4-bucket adaptive controller (PS-ada). Appendix C reports the run-level settings, shared GRPO++ backbone, and PS-ada controller parameters in Tables 5–8.

**Matched baseline.** Our main comparison is against the matched DeepSWE/GRPO++ recipe because Prefix Sampling is intended as a drop-in controller with the same prompts, scalar rewards,  $N = 8$  rollout budget, and deployment protocol. Prefix, hint, SFT-RL, and dynamic-allocation systems often add oracle/reference prefixes, teacher traces, SFT buffers, hint calibration, replacement rollouts, constructed prompts, or variable rollout budgets [2, 5–8, 14–17, 27–29]; comparing to them directly would conflate pass-rate control with extra data, supervision, or compute. We therefore treat DAPO-style replacement sampling, DynaMO-style variable allocation, and oracle/hint-prefix methods as protocol-changing alternatives rather than matched fixed-budget baselines. Appendix B summarizes these resource/protocol differences.

### 3.2 Evaluation metrics

The headline outcome metric is task-level Pass@1, evaluated on SWE-bench Verified for agentic RL and AIME 2025 for mathematical reasoning [10, 20]. All benchmark scores are averaged over 8 evaluation runs at each checkpoint. Efficiency is tracked by same-score convergence step, average wall-clock time per step, and valid rollout groups per batch, where a valid group is a non-degenerate group that survives group filtering. Outcome and efficiency metrics are reported across all four backbones where available. The mechanism analysis uses the 4B math run and reports distance to the 4/8 target, parent-to-rerollout pass-count transitions, bucket-level correction toward 0.5, and rollout-budget allocation across degenerate, skewed, and target-band outcomes.

## 4 Results

Prefix Sampling is designed to steer skewed rollout groups toward the 50% operating point. We first evaluate whether that design improves benchmark performance and training efficiency across all four backbones.

### 4.1 Main benchmark performance

Table 1 anchors Pass@1 at the Prefix Sampling evaluation peak and reports the same-step baseline; the baseline peak/reference checkpoints are represented by the Eval/Train step columns and the full trajectories in Figure 2. Entries are average-8 checkpoint evaluations, not independent training-seed estimates; Appendix D.1 reports the same avg8 means with variability estimates. Evaluation steps compare the baseline peak checkpoint with the earliest Prefix Sampling checkpoint reaching that score, or the same level within available avg8 variability; training steps use the analogous EMA-smoothed ordinary-task training score. Appendix D plots the corresponding signal and system dynamics.

On SWE-bench Verified, Prefix Sampling reaches the baseline’s high-score regime substantially earlier while giving a higher same-step score at the PS peak. Qwen3-14B reaches the baseline peak level at step 170 instead of the baseline’s step 300 and peaks at 0.295, a 4.7 pp same-step gain over the baseline at the PS peak. Qwen3-32B reaches the baseline peak level within available avg8 variability at step 290 instead of 410 and reports a peak of 0.422, a 5.4 pp same-step gain. Figure 2 shows the same benchmark trajectories.

The math runs follow the same pattern on AIME 2025. Qwen3-4B reaches the baseline peak level within available avg8 variability at step 140 instead of 230 and improves the same-step score by 7.3 pp. Qwen3-8B reaches the baseline peak level at step 190 instead of 260 and improves the same-step score by 10.8 pp. These results show that the evaluation-side convergence gain is not limited to stateful agent environments.

### 4.2 Training efficiency and wall-clock cost

The training-side columns of Table 1 explain where these gains come from. Prefix Sampling reaches the baseline ordinary-task training score earlier on all four backbones: 110 versus 211 steps on 4B, 161 versus 251 on 8B, 206 versus 312 on 14B, and 282 versus 395 on 32B. Valid groups also rise on

Table 1: Main benchmark and efficiency results across four backbones. Ours is Prefix Sampling with adaptive bucket-level control (PS-ada). Pass@1 is averaged over 8 evaluation runs and anchored at the Ours peak: Ours is the peak score and Baseline is the same-step baseline. Only Pass@1 is same-step anchored; timing and convergence columns report the reference values used for same-score comparisons. Arrows mark the preferred direction; Gain reports improvement.

| Model     | Benchmark             | Row         | Pass@1↑<br>@ Ours peak | Eval<br>E2E↓  | Train<br>E2E↓ | Eval<br>step↓ | Train<br>step↓ | Step<br>time↓ | Valid<br>groups↑ |
|-----------|-----------------------|-------------|------------------------|---------------|---------------|---------------|----------------|---------------|------------------|
| Qwen3-32B | SWE-bench<br>Verified | Baseline    | 0.368                  | 268.0h        | 258.2h        | 410           | 395            | 2353s         | 30.9             |
|           |                       | <b>Ours</b> | <b>0.422</b>           | <b>172.9h</b> | <b>168.1h</b> | <b>290</b>    | <b>282</b>     | <b>2146s</b>  | <b>39.8</b>      |
|           |                       | Gain        | +5.4 pp                | 1.55×         | 1.54×         | 1.41×         | 1.40×          | 1.10×         | 1.29×            |
| Qwen3-14B | SWE-bench<br>Verified | Baseline    | 0.247                  | 133.1h        | 138.4h        | 300           | 312            | 1597s         | 25.9             |
|           |                       | <b>Ours</b> | <b>0.295</b>           | <b>66.3h</b>  | <b>80.4h</b>  | <b>170</b>    | <b>206</b>     | <b>1405s</b>  | <b>36.7</b>      |
|           |                       | Gain        | +4.7 pp                | 2.01×         | 1.72×         | 1.76×         | 1.51×          | 1.14×         | 1.41×            |
| Qwen3-8B  | AIME 2025             | Baseline    | 0.571                  | 45.4h         | 43.8h         | 260           | 251            | 628s          | 61.0             |
|           |                       | <b>Ours</b> | <b>0.679</b>           | <b>36.9h</b>  | <b>31.3h</b>  | <b>190</b>    | <b>161</b>     | 699s          | <b>77.7</b>      |
|           |                       | Gain        | +10.8 pp               | 1.23×         | 1.40×         | 1.37×         | 1.56×          | 0.90×         | 1.27×            |
| Qwen3-4B  | AIME 2025             | Baseline    | 0.590                  | 49.5h         | 45.4h         | 230           | 211            | 775s          | 66.0             |
|           |                       | <b>Ours</b> | <b>0.662</b>           | <b>29.5h</b>  | <b>23.1h</b>  | <b>140</b>    | <b>110</b>     | <b>757s</b>   | <b>80.2</b>      |
|           |                       | Gain        | +7.3 pp                | 1.68×         | 1.96×         | 1.64×         | 1.92×          | 1.02×         | 1.22×            |

Table 2: **4B AceReason-Math-Subset ablation summary.** Convergence is the ordinary-task training-score peak step marked in Figure 3; valid groups/step is the mean number of non-degenerate rollout groups left after group filtering over each method’s own pre-convergence window.

| Method           | Replay | Adaptive | Buckets   | Conv. step ↓ | Speedup ↑    | Valid groups<br>per step ↑ |
|------------------|--------|----------|-----------|--------------|--------------|----------------------------|
| Baseline         | No     | No       | —         | 211          | 1.00×        | 66.0                       |
| PS-fix           | Yes    | No       | all four  | 131          | 1.61×        | 85.1                       |
| PS-ada hard-only | Yes    | Yes      | hard only | 186          | 1.13×        | 71.9                       |
| PS-ada           | Yes    | Yes      | all four  | <b>110</b>   | <b>1.92×</b> | 80.2                       |

every backbone: 25.9 → 36.7 on 14B, 30.9 → 39.8 on 32B, 66.0 → 80.2 on 4B, and 61.0 → 77.7 on 8B.

An independent system-level saving appears in the agentic runs, where prefix replay reuses the reconstructed prefix state instead of regenerating the prefix trajectory from scratch. Average per-step wall-clock drops from 1597s to 1405s on 14B and from 2353s to 2146s on 32B, equivalent to 1.14×

and 1.10×

### 4.3 Ablations

step-time speedups. Combined with evaluation-side step reductions, this gives end-to-end speedups of 2.01×

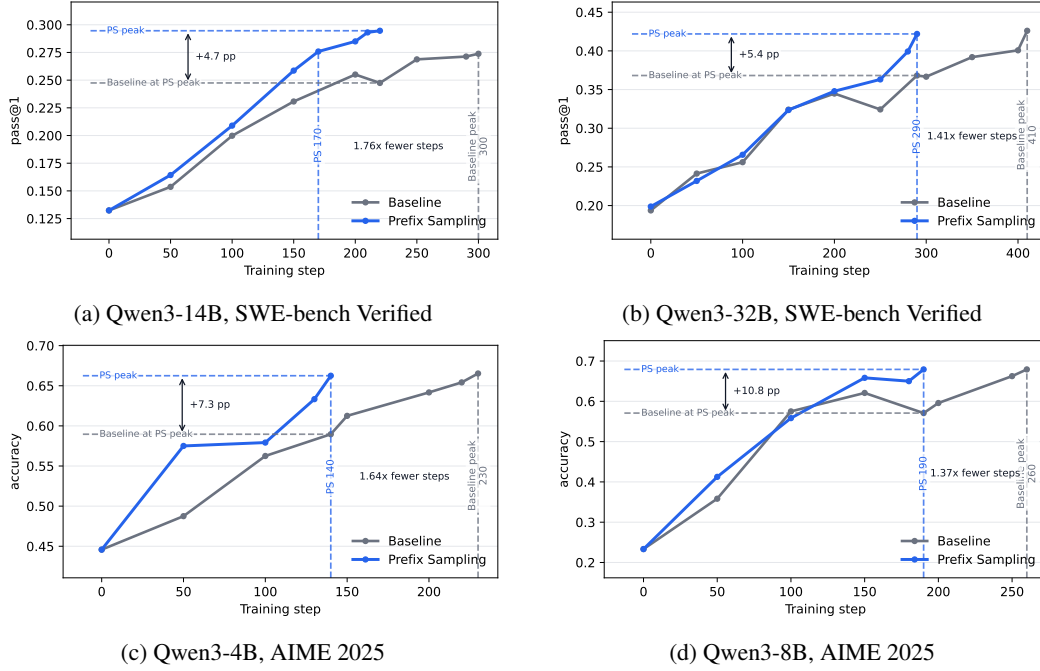


Figure 2: **Benchmark performance over training** for Prefix Sampling and the baseline across agentic SWE-bench Verified runs and single-turn AIME 2025 runs. All points average 8 evaluation runs and windows end at selected peaks. Dashed vertical projections compare the baseline peak step with the earliest Prefix Sampling step reaching the same score level, or the same level within available avg8 variability for 32B; dashed horizontal projections mark the same-step score gap at the Prefix Sampling peak.

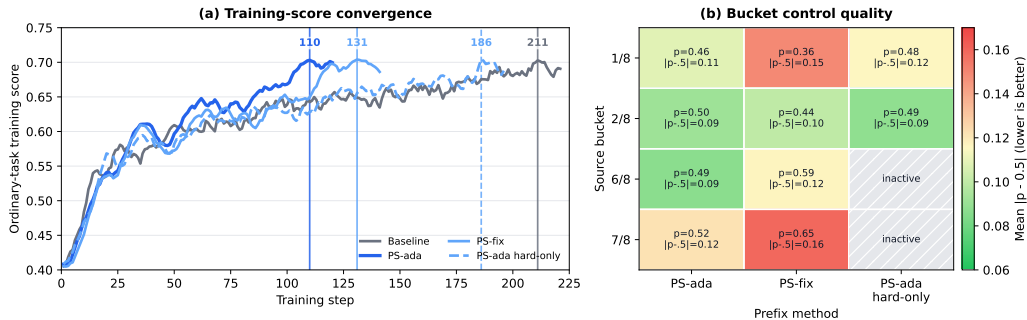


Figure 3: **4B AceReason-Math-Subset ablations**. Left: ordinary-task training-score trajectories, with vertical markers at each method’s convergence step. Right: bucket-level control quality for the prefix-based arms, reporting mean rerollout pass rate  $p$  and mean absolute distance  $|p - 0.5|$  before each method’s convergence step; greener cells are closer to the 50% target and gray cells are disabled by design.

The left panel of Figure 3 shows the main outcome: the full PS-ada controller converges earliest at step 110, followed by PS-fix at 131, PS-ada hard-only at 186, and the baseline at 211. Enabling replay gives the largest jump: PS-fix reduces convergence from 211 to 131 steps, a  $1.61\times$  speedup, by converting skewed groups into extra continuation-level training opportunities.

More valid groups help but do not fully explain the ordering. PS-fix keeps the largest number of valid groups per step, 85.1, yet converges later than PS-ada, which keeps 80.2. PS-ada hard-only keeps only 71.9, closer to the baseline’s 66.0, and also converges much later. Thus the full method is not simply winning by retaining more groups after filtering; the rerollout groups also need to reach a useful operating regime.

The right panel explains the remaining gap. PS-ada keeps all four enabled buckets near the target, with mean rerollout pass rates 0.46, 0.50, 0.49, and 0.52 for the 1/8, 2/8, 6/8, and 7/8 buckets. PS-fix uses the same four source buckets but has no feedback loop, so the hard-side 1/8 bucket stays too difficult at  $p = 0.36$  while the easy-side 7/8 bucket drifts to  $p = 0.65$ . PS-ada hard-only adapts the hard side successfully, with  $p = 0.48$  and  $0.49$  for 1/8 and 2/8, but disables the easy side entirely. Thus adaptive control keeps continuations near 50%, while bidirectional coverage corrects both mostly failing and mostly passing groups.

Together, the ablations support the intended decomposition. Replay supplies most of the raw convergence reduction, adaptive control makes rerollout groups land closer to the high-signal regime, and hard/easy bidirectionality prevents the controller from ignoring the already-mastered side of the distribution. Only the combination yields the full  $1.92\times$  speedup over the baseline.

## 5 Analysis

The cross-scale results above establish the main empirical effect. We now use the 4B AceReason-Math-Subset run, where pass counts, parent-child mappings, and prefix metadata are recorded, to ask a narrower mechanism question: does Prefix Sampling move the controlled rerollout cohort toward the 50% operating point? These diagnostics explain the results; they are not a substitute for the four-backbone evaluation above.

### 5.1 Controlled rerollouts move toward the 50% operating point

Each sampled task group has  $N = 8$  rollouts, so a group with  $k$  successful rollouts has pass rate  $k/8$ . We measure closeness to the target by the pass-count distance  $|k - 4|$ , where 0 is exactly balanced, 1 is the 3/8–5/8 target band, and 4 is the degenerate 0/8 or 8/8 case.

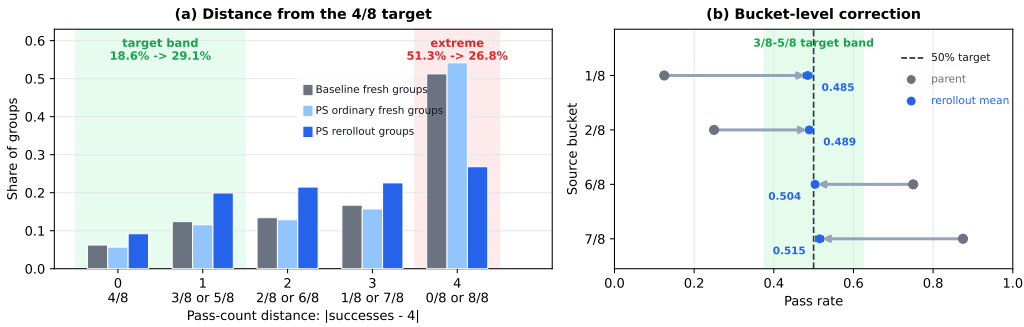


Figure 4: **Prefix Sampling moves controlled rerollouts toward the 50% operating point on the 4B math run.** Left: pass-count distance from the 4/8 target for baseline fresh groups, ordinary fresh groups from the PS run, and PS rerollout groups. Right: source-bucket pass rates before replay and mean rerollout pass rates after replay.

The left panel of Figure 4 gives the aggregate distributional check. Prefix Sampling rerollouts reduce degenerate 0/8 or 8/8 mass from 51.3% to 26.8%, increase the 3/8–5/8 target band from 18.6% to 29.1%, raise the exact 4/8 bin from 6.2% to 9.2%, and lower mean distance from 2.94 to 2.38. Ordinary fresh groups from the same Prefix Sampling run remain baseline-like, with target-band share 17.2%, extreme share 54.2%, and mean distance 3.01, so the movement is localized to the



controlled rerollout cohort. This gap also persists over training: rerollouts have a higher target-band share in 345 of 372 paired steps and a lower mean distance in 362 of 372.

The right panel checks that the aggregate shift is not hiding opposite bucket-level behavior. Parent pass rates remain 0.125, 0.25, 0.75, and 0.875 for the 1/8, 2/8, 6/8, and 7/8 buckets; after replay, their rerollout means are 0.485, 0.489, 0.504, and 0.515. Hard buckets are pulled upward by successful prefixes, easy buckets are pulled downward by failing prefixes, and all four controlled buckets end within  $\pm 1.5$  percentage points of 0.5.

## 5.2 From pass-rate control to trainable signal

The pass-rate movement in Figure 4 matters because degenerate groups provide little binary contrast: 0/8 has no successful trajectory, 8/8 has no failure, and both are typically removed before the policy update. By reducing extreme mass and increasing target-band mass, Prefix Sampling turns more of the same rollout budget into update-bearing groups that can carry reward entropy, RLOO advantage energy, and success–failure contrast. This keeps the causal claim narrow: Prefix Sampling does not balance every task or globally reshape the ordinary fresh-task distribution; it changes continuations for skewed partially successful groups, moving the controlled cohort toward the high-signal regime in Section 2.1. It also changes what the model practices: hard-side replay scaffolds missing steps, while easy-side replay creates self-correction. Appendix F audits transitions and controller dynamics (Figures 7–8); Appendix G gives concrete hard/easy traces.

## 6 Related Work

Skewed pass rates are known to degrade binary-reward reinforcement learning efficiency, but existing methods usually mitigate them by reshaping the training distribution or adding scaffolding, rather than targeting a pass-rate regime explicitly [1, 2].

**Implicitly reshaping pass rates via guidance.** A first line rescues hard tasks by injecting partial supervision into failing rollout groups. PrefixRL and POPE condition on successful or oracle prefixes and optimize only the continuation [5, 6]. StepHint and hint-GRPO adapt hint granularity or hint usage for difficult samples [14, 17]. ADHint adds difficulty-aware hint ratios and gradient modulation, while Self-Hinting uses model-generated hints to reduce external-supervisor dependence [15, 16]. These methods change learner information through offline traces, oracle/reference solutions, teacher chains, or hints, and mostly rescue low-pass-rate tasks while leaving high-pass-rate tasks unaddressed.

**Implicitly reshaping pass rates via distribution.** A second line preserves signal by reallocating compute, modifying batch construction, or mixing supervision into reinforcement learning. DAPO’s dynamic sampling filters all-fail/all-pass groups and samples replacements until the batch is filled, while DynaMO reallocates rollout budgets toward more informative prompts [2, 7]. LUFFY uses off-policy guidance, SRFT and UFT mix supervised and reinforcement fine-tuning, and ReLIFT interleaves online fine-tuning for hard questions [8, 27–29]. Composition-RL constructs harder composite prompts from mastered ones and notes that always-solved prompts are wasteful [30]. Episode-level methods such as iGRPO, RLTF, and Experiential RL enrich interaction through self-conditioning, natural-language feedback, or reflection [31–33]. These approaches are valuable but alter the resource or interaction protocol rather than steer retained skewed groups toward the 50% operating point.

**Explicitly targeting an informative regime.** The closest conceptual line treats partial support as a mechanism for controlling effective task difficulty. SEELE uses item-response-style hint calibration to steer each instance toward a balanced success–failure regime [9]. This aligns with our motivation, but through hint calibration rather than our binary-reward criteria, and without bidirectional hard/easy control or replay-through-execution state reconstruction for agentic environments. Appendix B and Table 4 provide a detailed axis-by-axis comparison.

## 7 Conclusion

Binary-reward RL is most informative near  $p = 0.5$ : reward entropy, RLOO advantage energy, and success–failure contrast all peak there. Prefix Sampling uses replay-through-execution and prefix masking to steer skewed groups toward that regime. Across SWE-bench Verified and AIME 2025, it reaches baseline-level performance earlier, improves usable training signal, delivers  $2.01\times/1.55\times$  end-to-end speedups on 14B/32B, and ablations attribute the gains to replay, bidirectional coverage, and adaptive control.

## Acknowledgments and Disclosure of Funding

We thank Mingzhe Lu for his contributions to manuscript writing and structural organization.

## References

- [1] Zhihong Shao, Peiyi Wang, Qihao Zhu, Runxin Yang, Yifan Xu, Sida Piao, Wei Dong, Jun Li, Pengfei Gao, et al. DeepSeekMath: Pushing the limits of mathematical reasoning in open language models. *CoRR*, abs/2402.03300, 2024. doi: 10.48550/arXiv.2402.03300. URL <https://arxiv.org/abs/2402.03300>.
- [2] Qiyang Yu, Zheng Zhang, Ruofei Zhu, Yufeng Yuan, Xiaochen Zuo, Yu Yue, Tiantian Fan, Gaohong Liu, Lingjun Liu, Xin Liu, Haibin Lin, Zhiqi Lin, Bole Ma, Guangming Sheng, Yuxuan Tong, Chi Zhang, Mofan Zhang, Wang Zhang, Hang Zhu, Jinhua Zhu, Jiaze Chen, Jiangjie Chen, Chengyi Wang, Hongli Yu, Weinan Dai, Yuxuan Song, Xiangpeng Wei, Hao Zhou, Jingjing Liu, Wei-Ying Ma, Ya-Qin Zhang, Lin Yan, Mu Qiao, Yonghui Wu, and Mingxuan Wang. DAPO: An open-source LLM reinforcement learning system at scale. In *Advances in Neural Information Processing Systems*, 2025. doi: 10.48550/arXiv.2503.14476. URL <https://openreview.net/forum?id=2a36EMSSTp>.
- [3] Together AI. DeepSWE: Training open coding agents with reinforcement learning at scale. <https://www.together.ai/blog/deepswe>, 2025.
- [4] ROCK & ROLL & iFlow & DT Joint Team. Let it flow: Agentic crafting on rock and roll, building the ROME model within an open agentic learning ecosystem. <https://arxiv.org/abs/2512.24873>, 2026.
- [5] Amrith Setlur, Zijian Wang, Andrew Cohen, Paria Rashidinejad, and Sang Michael Xie. Reuse your FLOPs: Scaling RL on hard problems by conditioning on very off-policy prefixes. *CoRR*, abs/2601.18795, 2026. URL <https://arxiv.org/abs/2601.18795>.
- [6] Yuxiao Qu, Amrith Setlur, Virginia Smith, Ruslan Salakhutdinov, and Aviral Kumar. POPE: Learning to reason on hard problems via privileged on-policy exploration. *CoRR*, abs/2601.18779, 2026. URL <https://arxiv.org/abs/2601.18779>.
- [7] Yangyi Fang, Jiaye Lin, Xiaoliang Fu, Cong Qin, Haolin Shi, Chaowen Hu, Lu Pan, Ke Zeng, and Xunliang Cai. How to allocate, how to learn? dynamic rollout allocation and advantage modulation for policy optimization. *CoRR*, abs/2602.19208, 2026. URL <https://arxiv.org/abs/2602.19208>.
- [8] Jianhao Yan, Yafu Li, Zican Hu, Zhi Wang, Ganqu Cui, Xiaoye Qu, Yu Cheng, and Yue Zhang. Learning to reason under off-policy guidance. In *Advances in Neural Information Processing Systems*, 2025. URL <https://openreview.net/forum?id=v08LLoNWk>.
- [9] Ziheng Li, Zexu Sun, Jinman Zhao, Erxue Min, Yongcheng Zeng, Hui Wu, Hengyi Cai, Shuaiqiang Wang, Dawei Yin, Xu Chen, and Zhi-Hong Deng. Staying in the sweet spot: Responsive reasoning evolution via capability-adaptive hint scaffolding. *CoRR*, abs/2509.06923, 2025. URL <https://arxiv.org/abs/2509.06923>.
- [10] Carlos E. Jimenez, John Yang, Alexander Wettig, Shunyu Yao, Kexin Pei, Ofir Press, and Karthik Narasimhan. SWE-bench: Can language models resolve real-world GitHub issues? In *International Conference on Learning Representations (ICLR)*, 2024.
- [11] Dan Hendrycks, Collin Burns, Saurav Kadavath, Akul Arora, Steven Basart, Eric Tang, Dawn Song, and Jacob Steinhardt. Measuring mathematical problem solving with the MATH dataset. *CoRR*, abs/2103.03874, 2021. URL <https://arxiv.org/abs/2103.03874>.
- [12] Thomas M. Cover and Joy A. Thomas. *Elements of Information Theory*. Wiley-Interscience, 2nd edition, 2006.
- [13] Ronald J. Williams. Simple statistical gradient-following algorithms for connectionist reinforcement learning. *Machine Learning*, 8:229–256, 1992.
- [14] Kaiyi Zhang, Ang Lv, Jinpeng Li, Yongbo Wang, Feng Wang, Haoyuan Hu, and Rui Yan. StepHint: Multi-level stepwise hints enhance reinforcement learning to reason. *CoRR*, abs/2507.02841, 2025. URL <https://arxiv.org/abs/2507.02841>.

- [15] Feng Zhang, Zezhong Tan, Xinhong Ma, Ziqiang Dong, Xi Leng, Jianfei Zhao, Xin Sun, and Yang Yang. ADHint: Adaptive hints with difficulty priors for reinforcement learning. *CoRR*, abs/2512.13095, 2026. URL <https://arxiv.org/abs/2512.13095>.
- [16] Baohao Liao, Hanze Dong, Xinxing Xu, Christof Monz, and Jiang Bian. Self-hinting language models enhance reinforcement learning. *CoRR*, abs/2602.03143, 2026. URL <https://arxiv.org/abs/2602.03143>.
- [17] Qihan Huang, Weilong Dai, Jinlong Liu, Wanggui He, Hao Jiang, Mingli Song, Jingyuan Chen, Chang Yao, and Jie Song. Boosting MLLM reasoning with text-debiased Hint-GRPO. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 4848–4857, 2025. URL [https://openaccess.thecvf.com/content/ICCV2025/html/Huang\\_Boosting\\_MLLM\\_Reasoning\\_with\\_Text-Debiased\\_Hint-GRPO\\_ICCV\\_2025\\_paper.html](https://openaccess.thecvf.com/content/ICCV2025/html/Huang_Boosting_MLLM_Reasoning_with_Text-Debiased_Hint-GRPO_ICCV_2025_paper.html).
- [18] Qwen Team. Qwen3-14B. <https://huggingface.co/Qwen/Qwen3-14B>, 2025.
- [19] Qwen Team. Qwen3-32B. <https://huggingface.co/Qwen/Qwen3-32B>, 2025.
- [20] Mathematical Association of America. AIME 2025 mathematical olympiad problems. <https://www.maa.org/math-competitions/aime>, 2025.
- [21] John Schulman, Filip Wolski, Prafulla Dhariwal, Alec Radford, and Oleg Klimov. Proximal policy optimization algorithms. *arXiv preprint arXiv:1707.06347*, 2017.
- [22] R2E Team. R2E-Gym: Reinforcement-learning-ready real-world software engineering benchmarks. <https://huggingface.co/datasets/R2E-Gym/R2E-Gym-Subset>, 2025.
- [23] Qwen Team. Qwen3 technical report. <https://qwenlm.github.io/blog/qwen3/>, 2025.
- [24] Qwen Team. Qwen3-4B-Instruct-2507. <https://huggingface.co/Qwen/Qwen3-4B-Instruct-2507>, 2025.
- [25] Qwen Team. Qwen3-8B. <https://huggingface.co/Qwen/Qwen3-8B>, 2025.
- [26] NVIDIA. AceReason-Math: A curated reasoning corpus for mathematical RLVR. <https://huggingface.co/datasets/nvidia/AceReason-Math>, 2025.
- [27] Yuqian Fu, Tinghong Chen, Jiajun Chai, Xihuai Wang, Songjun Tu, Guojun Yin, Wei Lin, Qichao Zhang, Yuanheng Zhu, and Dongbin Zhao. SRFT: A single-stage method with supervised and reinforcement fine-tuning for reasoning. In *International Conference on Learning Representations (ICLR)*, 2026. URL <https://openreview.net/forum?id=n6E0r6kQWQ>.
- [28] Lu Ma, Hao Liang, Meiyi Qiang, Lexiang Tang, Xiaochen Ma, Zhen Hao Wong, Junbo Niu, Chengyu Shen, Runming He, Yanhao Li, Bin Cui, and Wentao Zhang. Learning what reinforcement learning can’t: Interleaved online fine-tuning for hardest questions. In *International Conference on Learning Representations (ICLR)*, 2026. URL <https://openreview.net/forum?id=LzCBLrNoyM>.
- [29] Mingyang Liu, Gabriele Farina, and Asuman Ozdaglar. UFT: Unifying supervised and reinforcement fine-tuning. In *Advances in Neural Information Processing Systems*, 2025. URL <https://openreview.net/forum?id=us0kGv1S7M>.
- [30] Xin Xu, Clive Bai, Kai Yang, Tianhao Chen, Yangkun Chen, Weijie Liu, Hao Chen, Yang Wang, Saiyong Yang, and Can Yang. Composition-RL: Compose your verifiable prompts for reinforcement learning of large language models. *CoRR*, abs/2602.12036, 2026. URL <https://arxiv.org/abs/2602.12036>.
- [31] Ali Hatamizadeh, Shrimai Prabhumoye, Igor Gitman, Ximing Lu, Seungju Han, Wei Ping, Yejin Choi, and Jan Kautz. iGRPO: Self-feedback-driven LLM reasoning. *CoRR*, abs/2602.09000, 2026. URL <https://arxiv.org/abs/2602.09000>.
- [32] Yuda Song, Lili Chen, Fahim Tajwar, Rémi Munos, Deepak Pathak, J. Andrew Bagnell, Aarti Singh, and Andrea Zanette. Expanding the capabilities of reinforcement learning via text feedback. *CoRR*, abs/2602.02482, 2026. URL <https://arxiv.org/abs/2602.02482>.

- [33] Taiwei Shi, Sihao Chen, Bowen Jiang, Linxin Song, Longqi Yang, and Jieyu Zhao. Experiential reinforcement learning. *CoRR*, abs/2602.13949, 2026. URL <https://arxiv.org/abs/2602.13949>.
- [34] verl project. verl: Volcano engine reinforcement learning for LLMs. <https://github.com/verl-project/verl/releases/tag/v0.5.0>, 2025.
- [35] ModelScope Team. EvalScope: Evaluation framework for large models. <https://github.com/modelscope/evalscope>, 2024.

## A Limitations and Scope

### A.1 Scope of Claims

Our claims are scoped to binary-reward RLVR with grouped rollouts, and all main experiments use  $N = 8$  rollouts per task. The largest-scale experiments are the intended stateful-agent setting on SWE-bench-style training, while the finest-grained mechanism audits use the 4B mathematical-reasoning run where pass counts, prefix metadata, and parent-to-rerollout transitions are easiest to inspect. The math results are scoped to the curated AceReason-Math-Subset described in Section 3.1; this shared subset supports the 4B/8B comparison, but is not a claim about unfiltered AceReason-Math. Finally, our main comparison is a matched GRPO++ baseline under the same data and rollout budget. Methods that use oracle hints, teacher traces, extra rollouts, or additional SFT buffers are discussed as related work and in Appendix B, but are not treated as directly comparable under the same fixed-resource protocol.

### A.2 Agentic Replay Assumptions and Costs

Prefix Sampling assumes that replay prefixes can be saved. In agentic environments, prefix replay does not introduce a separate sandbox restoration mechanism: during prefix steps, saved model responses are fed through the same action parser and environment executor used for ordinary model-generated responses, so the environment state is reconstructed by replaying the prefix trajectory through the standard rollout path. We did not observe prefix-replay-specific restoration failures in our runs, but framework-specific nondeterministic tools remain implementation-dependent.

The reported agentic step-time measurements are end-to-end measurements of this replay-through-execution training path. Prefix steps skip model generation and instead execute saved responses through the same environment path, so replay does not add a separate restore-latency component beyond the ordinary environment execution. Prefix replay also stores text prefixes rather than full sandbox snapshots. Table 3 gives a conservative upper-bound estimate for the prefix pool under our run configurations, using int32 token ids and the ratio cap of 0.95. This state can be kept in CPU memory, so the additional GPU-memory footprint is negligible relative to model and rollout-system memory. The wall-clock gains should still be read as measurements for our implementation rather than a universal guarantee for all agent frameworks. The 50% target and the derivations in Appendix E apply to binary reward-side signal for grouped rollouts; they do not imply that every curriculum, every rollout count  $N$ , or every controller hyperparameter schedule is globally optimal. Our ablations compare fixed versus adaptive replay and hard-only versus bidirectional coverage, but they are not a full sensitivity sweep over ratio bounds, deadzone, step size, or non-50% targets.

Table 3: **Conservative prefix-pool memory estimate.** We estimate the maximum text-prefix state as batch size  $\times$  (max prompt +  $0.95 \times$  max response) token ids, with 4 bytes per int32 token id. The estimate intentionally ignores compression, shorter realized prefixes, and CPU/off-GPU placement, so it is an upper bound for the text prefix pool rather than a measured runtime allocation.

| Setup      | Batch | Max prompt | Max response | Upper-bound pool |
|------------|-------|------------|--------------|------------------|
| 4B/8B math | 128   | 2048       | 16384        | 8.6 MiB          |
| 14B SWE    | 64    | 4096       | 32768        | 8.6 MiB          |
| 32B SWE    | 64    | 4096       | 65536        | 16.2 MiB         |

### A.3 Supplemental Artifacts and Broader Impacts

The anonymized supplemental material includes code, data, and reproduction instructions for the 4B/8B mathematical-reasoning experiments. The 14B/32B agentic SWE runs rely on internal sandbox infrastructure; for those runs, the paper provides configurations, metrics, evaluation protocol, and training dynamics rather than releasing the infrastructure. Broader impacts include reduced rollout compute and energy use for binary-reward RLVR, but the same efficiency gain could make stronger coding or reasoning agents cheaper to train. To limit release risk, we release no trained models or deployed agents; supplemental artifacts are limited to 4B/8B math research code, data, and documentation.

## B Detailed Comparison with Prior Methods

Prefix Sampling bridges the gaps identified in Section 6 along four axes, summarized in Table 4. It uses self-generated prefixes rather than oracle prefixes or external hints; performs bidirectional control over both hard and easy tasks; explicitly targets the 50% operating point derived from binary-reward theory; and implements replay-through-execution state reconstruction for agentic reinforcement learning rather than text-only prefix concatenation. Prior methods satisfy one or two of these properties, but Prefix Sampling combines them into a single pass-rate steering framework that directly controls the rollout operating point. The table is intended to clarify resource and protocol differences rather than claim that all methods are directly comparable under a single benchmark. DAPO-style dynamic sampling and DynaMO-style rollout allocation are omitted from the prefix-method table because they change batch construction or rollout budgeting rather than the prefix intervention itself; Section 3.1 discusses why these are not matched fixed-budget baselines.

Table 4: Comparison of related prefix, hint, and difficulty-control methods along key design axes. *On-pol. pref.* indicates whether the prefix is produced by the policy being trained rather than by an oracle, teacher, or offline solution. *Pref.-mask* means replayed or provided prefix tokens are excluded from the RL loss, so credit is assigned only to the continuation. *Adapt. pref.* denotes online adjustment of prefix length or hint strength based on training feedback. *Bi-dir. pref.* denotes explicit steering of both low-pass-rate tasks with helpful prefixes and high-pass-rate tasks with handicapping prefixes. *Agentic replay* requires continuing from a reconstructed environment, tool, code, and conversation state rather than only concatenating text. ✓/▲/✗ indicate present, partial, and absent support.

| Method                      | On-pol. pref. | Pref.-mask | Adapt. pref. | Bi-dir. pref. | Agentic replay |
|-----------------------------|---------------|------------|--------------|---------------|----------------|
| <b>Prefix Sampling (PS)</b> | ✓             | ✓          | ✓            | ✓             | ✓              |
| PrefixRL [5]                | ✗             | ✓          | ✗            | ✗             | ✗              |
| POPE [6]                    | ✗             | ✓          | ✗            | ✗             | ✗              |
| StepHint [14]               | ✗             | ▲          | ✓            | ✗             | ✗              |
| ADHint [15]                 | ✗             | ▲          | ✓            | ✗             | ✗              |
| Self-Hinting [16]           | ✓             | ▲          | ✓            | ✗             | ✗              |
| hint-GRPO [17]              | ✗             | ▲          | ✓            | ✗             | ✗              |
| SEELE [9]                   | ✗             | ✗          | ✓            | ✗             | ✗              |
| UFT [29]                    | ✗             | ✗          | ✗            | ✗             | ✗              |

## C Hyperparameters and Training Configuration

Tables 5–8 separate three concerns: scale- and task-specific run budgets, the matched GRPO++ optimizer backbone, and the Prefix Sampling controller. The Baseline and Prefix Sampling runs share the first two; Prefix Sampling differs by adding the controller in Table 8. The model, data, and benchmark sources are Qwen3 [18, 19, 23–25], AceReason-Math/AIME [20, 26], and R2E-Gym/SWE-bench [10, 22]. The math runs train on AceReason-Math-Subset, constructed by the rollout-8 Qwen3-4B-Instruct-2507 filtering procedure described in Section 3.1; the SWE runs train on R2E-Gym-Subset. All benchmark evaluation scores are averaged over 8 evaluation runs. The training implementation is based on verl v0.5.x [34]. AIME 2025 evaluation is run with EvalScope [35]; SWE-bench Verified evaluation uses the same verl validation pipeline as training, with the validation data replaced by SWE-bench Verified. Table 6 records the upstream sources and license/terms notes for these models, datasets, benchmarks, and software frameworks.

Table 7 gives the shared GRPO++ backbone [1–3, 13, 21]. This table is intentionally optimizer-focused: task scale, context length, and hardware are isolated in Table 5, while Prefix Sampling-specific control knobs are isolated in Table 8.

Table 8 lists the Prefix Sampling controller settings used in the main runs. The controller acts only on skewed but non-degenerate buckets, leaving balanced groups to train normally and degenerate groups to be handled by group filtering.

Table 5: **Run-level training configuration.** This is the transposed form of the run-level setup table: columns are experiment setups and rows list model, data, thinking mode, hardware, batch, rollout, context, temperature, and agent budget. Batch is the pre-filter training batch size, and  $N$  is the number of rollouts sampled per task group.

| Setting       | 4B math                | 8B math               | 14B SWE            | 32B SWE            |
|---------------|------------------------|-----------------------|--------------------|--------------------|
| Model         | Qwen3-4B-Instruct-2507 | Qwen3-8B              | Qwen3-14B          | Qwen3-32B          |
| Train data    | AceReason-Math-Subset  | AceReason-Math-Subset | R2E-Gym-Subset     | R2E-Gym-Subset     |
| Benchmark     | AIME 2025              | AIME 2025             | SWE-bench Verified | SWE-bench Verified |
| Thinking      | off                    | off                   | on                 | on                 |
| Hardware      | $2 \times 8$ A800      | $4 \times 8$ A800     | $4 \times 8$ H200  | $4 \times 8$ H200  |
| Batch size    | 128                    | 128                   | 64                 | 64                 |
| Rollouts/task | $N = 8$                | $N = 8$               | $N = 8$            | $N = 8$            |
| Max prompt    | 2048                   | 2048                  | 4096               | 4096               |
| Max response  | 16384                  | 16384                 | 32768              | 65536              |
| Temperature   | 1.0                    | 1.0                   | 1.0                | 1.0                |
| Agent budget  | no agent               | no agent              | 50 steps, 1200s    | 100 steps, 1200s   |

Table 6: **Existing assets, frameworks, and license/terms notes.** We cite the upstream sources used for models, data, benchmarks, and software. For assets whose dataset card or official page does not list an explicit open license, we follow upstream terms and do not redistribute the original benchmark content in this paper.

| Asset              | Upstream source and use                                                                         | License / terms note                                                                                                                                 |
|--------------------|-------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|
| Qwen3 variants     | Hugging Face / Qwen; 4B/8B/14B/32B model backbones                                              | Apache-2.0 model license as listed upstream                                                                                                          |
| AceReason-Math     | Hugging Face / NVIDIA; math training source, with a local subset derived by pass-rate filtering | CC-BY-4.0 as listed upstream                                                                                                                         |
| R2E-Gym-Subset     | Hugging Face / R2E-Gym; SWE training source                                                     | Use follows upstream terms; dataset card does not list a separate license                                                                            |
| SWE-bench Verified | SWE-bench / Princeton-NLP; SWE evaluation benchmark                                             | MIT license for SWE-bench code/evaluation harness; benchmark instances derive from upstream GitHub repositories/issues/PRs and follow upstream terms |
| AIME 2025          | Mathematical Association of America; math evaluation benchmark                                  | Official competition content; used for evaluation and not redistributed                                                                              |
| verl v0.5.x        | GitHub / verl project; training and SWE validation framework                                    | Apache-2.0 software license                                                                                                                          |
| EvalScope          | GitHub / ModelScope; AIME evaluation framework                                                  | Apache-2.0 software license                                                                                                                          |



Table 7: **Shared GRPO++ backbone.** The same backbone is used for the Baseline and Prefix Sampling runs at each model scale.

| Component         | Setting                                                                     |
|-------------------|-----------------------------------------------------------------------------|
| Clip High         | Upper clip bound 0.28                                                       |
| No KL Loss        | KL regularization disabled                                                  |
| No Reward Std.    | Reward standard-deviation normalization disabled                            |
| Len. Norm.        | Length-normalized surrogate loss                                            |
| Leave-One-Out     | Leave-one-out / Loop-RLOO advantage estimation                              |
| Compact Filtering | Mask invalid max-context, timeout, or max-step trajectories when applicable |
| No Entropy Loss   | Entropy coefficient 0.0                                                     |
| Actor LR          | $1 \times 10^{-6}$                                                          |
| PPO mini-batch    | 64                                                                          |
| PPO micro/GPU     | 1                                                                           |

Table 8: **Prefix Sampling controller configuration.** The controller adapts each skew bucket independently toward the 0.5 rollout pass-rate target.

| Item                 | Value               |
|----------------------|---------------------|
| Variant              | 4-bucket PS-ada     |
| Controlled buckets   | 1/8, 2/8, 6/8, 7/8  |
| Target pass rate     | 0.5                 |
| Initial prefix ratio | 0.5 for each bucket |
| Ratio bounds         | [0.05, 0.95]        |
| EMA alpha            | 0.05                |
| Deadzone             | 0.03                |
| Step size            | 0.05                |
| Cooldown             | 5 updates           |

## D Additional Training Dynamics

This appendix expands the aggregate entries in Table 1. The figures use the same panel order as the main benchmark figure: Qwen3-14B, Qwen3-32B, Qwen3-4B, and Qwen3-8B. Thin traces are raw W&B values, thick traces are EMA-smoothed with factor 0.80, and vertical markers denote the baseline convergence step, the first Prefix Sampling step reaching the same ordinary-task training score, and, when different, the Prefix Sampling convergence step.

Figure 5 gives the training-signal view. Prefix Sampling reaches the baseline’s ordinary-task training-score level earlier on all four backbones: step 206 versus 312 on 14B, 282 versus 395 on 32B, 110 versus 211 on 4B, and 161 versus 251 on 8B. At the same time, the PS rerollout pass-rate curves stay near the intended middle regime, with raw means 0.519, 0.510, 0.502, and 0.497 for 14B, 32B, 4B, and 8B. The row for valid groups explains the corresponding entries in Table 1: prefix replay reduces the share of rerollout groups that collapse to all-fail or all-pass, increasing update-bearing groups and raising mean valid groups per step from 25.9 to 36.7 on 14B, 30.9 to 39.8 on 32B, 66.0 to 80.2 on 4B, and 61.0 to 77.7 on 8B.

Figure 6 reports system-side diagnostics. On the two stateful SWE-bench Verified runs, Prefix Sampling reduces mean wall-clock time per step from 1597s to 1405s on 14B and from 2353s to 2146s on 32B, while also maintaining higher mean entropy before convergence. The math runs do not exercise replay-through-execution agent-state reconstruction, so their step-time and entropy traces are diagnostics rather than the main claim: 4B step time is roughly comparable, while 8B is slower under Prefix Sampling. This is why the main 4B/8B evidence in the paper emphasizes benchmark convergence, valid groups, and the operating-point analysis in Section 5.

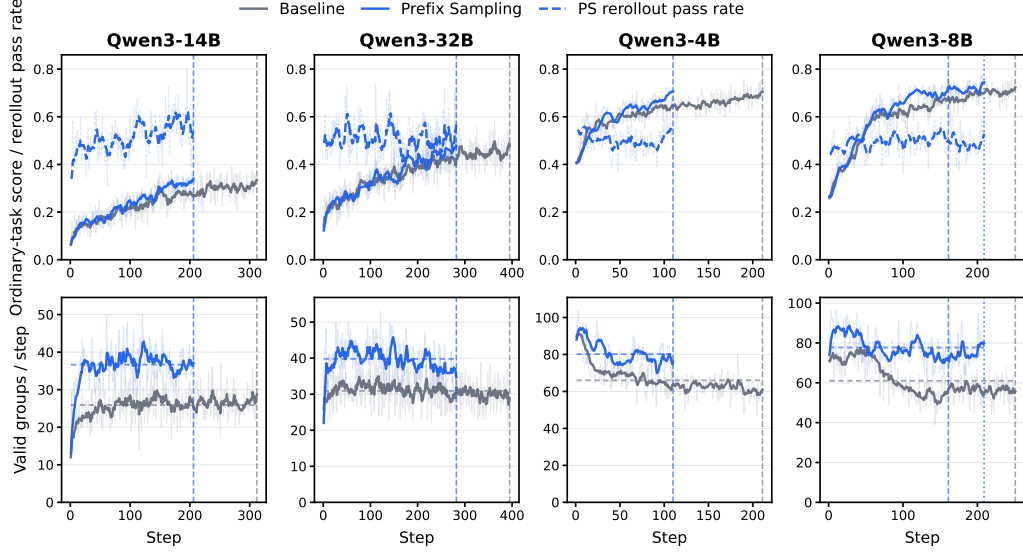


Figure 5: **Training-signal dynamics across all four backbones.** Top row: ordinary-task training score for the baseline and Prefix Sampling, plus the PS rerollout pass rate. Bottom row: valid rollout groups after group filtering. Gray curves are baselines; blue solid curves are Prefix Sampling ordinary-task or per-step metrics; blue dashed curves are PS rerollout pass rates. Dashed horizontal segments in the row for valid groups mark each method’s raw mean over its own convergence-cropped window.

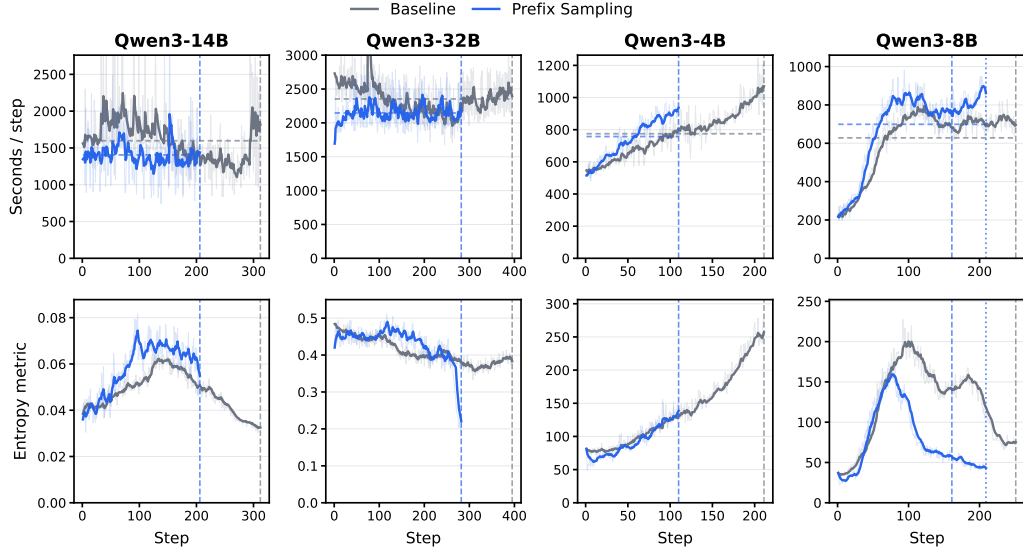


Figure 6: **System diagnostics across all four backbones.** Top row: wall-clock time per training step. Bottom row: entropy metric. Gray curves are baselines and blue curves are Prefix Sampling. Dashed horizontal segments in the timing row mark each method’s raw mean over its own convergence-cropped window. These diagnostics support the wall-clock claims on the stateful 14B/32B SWE-bench Verified runs; on 4B/8B math, they are reported for completeness rather than used as the primary efficiency claim.

### D.1 Benchmark evaluation variability

Table 9 reports the avg8 benchmark means used in the main results together with variability estimates from repeated evaluation records available at the same checkpoint. The table is not an independent-training-seed analysis; each row summarizes a fixed checkpoint. The standard error is  $\text{std}/\sqrt{n}$ , and the interval is a two-sided Student- $t$  95% half-width.

Table 9: **Avg8 variability for benchmark checkpoints used in the main results.** Mean is the benchmark score used in Table 1 and Figure 2; Std. and 95% CI are estimated from repeated evaluation records available at the same checkpoint. These rows do not estimate independent training-seed variance.

| Model | Checkpoint role              | Step | Mean  | Std.  | 95% CI |
|-------|------------------------------|------|-------|-------|--------|
| 14B   | Baseline at Ours peak        | 220  | 0.247 | 0.008 | 0.013  |
| 14B   | Ours peak                    | 220  | 0.295 | 0.009 | 0.014  |
| 14B   | Baseline peak                | 300  | 0.274 | 0.013 | 0.020  |
| 14B   | Ours reaches baseline peak   | 170  | 0.276 | 0.012 | 0.031  |
| 32B   | Baseline at Ours peak        | 290  | 0.368 | 0.005 | 0.008  |
| 32B   | Ours peak / reaches baseline | 290  | 0.422 | 0.011 | 0.018  |
| 32B   | Baseline peak reference      | 410  | 0.426 | 0.006 | 0.010  |
| 4B    | Baseline at Ours peak        | 140  | 0.590 | 0.056 | 0.020  |
| 4B    | Ours peak / reaches baseline | 140  | 0.662 | 0.055 | 0.046  |
| 4B    | Baseline peak reference      | 230  | 0.665 | 0.042 | 0.018  |
| 8B    | Baseline at Ours peak        | 190  | 0.571 | 0.051 | 0.019  |
| 8B    | Ours peak / reaches baseline | 190  | 0.679 | 0.043 | 0.036  |
| 8B    | Baseline peak reference      | 260  | 0.679 | 0.035 | 0.030  |

## E Optimality of $p = 0.5$ for Binary-Reward Learning Signal

This appendix derives the sense in which a rollout pass rate of  $p = 0.5$  is the optimal operating point for binary-reward RL, using standard Bernoulli entropy and the GRPO/RLOO advantage setting used in our training recipe [1, 12, 13]. The claim is not that a final trained model should solve each task with only 50% probability. Rather, during training, a task group whose rollouts are balanced between success and failure carries the strongest binary learning signal. The derivation assumes a fixed task,  $N$  independently sampled rollouts from the current policy, binary terminal rewards  $r_i \in \{0, 1\}$ , and pass probability  $p = \Pr(r_i = 1)$ . In an observed group, let  $K = k$  be the number of successes and  $\hat{p} = k/N$  be the empirical pass rate. Table 10 summarizes the complementary quantities below.

Table 10: Complementary measures of binary-reward learning signal. All identify  $p = 0.5$ , or, for even  $N$ ,  $k = N/2$  in an observed group, as the maximally informative training regime.

| Perspective       | Quantity                   | Expression            | Maximized at |
|-------------------|----------------------------|-----------------------|--------------|
| Information       | Reward entropy             | $H(p)$                | $p = 0.5$    |
| Filtering         | Non-degenerate group prob. | $1 - p^N - (1 - p)^N$ | $p = 0.5$    |
| Optimization      | RLOO advantage energy      | $k(N - k)/(N - 1)^2$  | $k = N/2$    |
| Credit assignment | Contrastive pairs          | $k(N - k)$            | $k = N/2$    |
| Expected contrast | Expected pair count        | $N(N - 1)p(1 - p)$    | $p = 0.5$    |

### E.1 Reward Entropy

With binary rewards, a single rollout outcome is a Bernoulli random variable with success probability  $p$ . Its information content is the entropy

$$H(p) = -p \log_2 p - (1 - p) \log_2 (1 - p). \quad (4)$$

When  $p$  approaches 0 or 1, the outcome becomes predictable and each additional rollout provides little new information. Taking derivatives,

$$\frac{dH}{dp} = -\log_2 p - \frac{1}{\ln 2} + \log_2(1-p) + \frac{1}{\ln 2} = \log_2\left(\frac{1-p}{p}\right), \quad (5)$$

so the only stationary point satisfies

$$\log_2\left(\frac{1-p}{p}\right) = 0 \iff 1-p = p \iff p = 0.5. \quad (6)$$

The second derivative is

$$\frac{d^2 H}{dp^2} = -\frac{1}{p \ln 2} - \frac{1}{(1-p) \ln 2} < 0 \quad \text{for all } p \in (0, 1), \quad (7)$$

so  $H(p)$  is uniquely maximized at  $p = 0.5$ , where  $H(0.5) = 1$  bit. For  $N$  independent rollouts from the same task, the joint entropy of the reward vector is  $NH(p)$ , which has the same maximizer. Thus the conclusion is not an artifact of considering one rollout at a time.

The finite- $N$  numbers used in our experiments make the loss from skew concrete. For  $N = 8$ , a group with empirical pass rate  $\hat{p} = 4/8$  has empirical Bernoulli entropy  $H(\hat{p}) = 1.00$  bit per rollout, a  $2/8$  or  $6/8$  group has  $H(\hat{p}) \approx 0.81$  bits, and a  $1/8$  or  $7/8$  group has  $H(\hat{p}) \approx 0.54$  bits. A  $1/8$  group therefore carries barely over half the per-rollout information of a balanced group. Entropy measures information available in the reward; the following perspectives ask whether that information survives filtering and turns into optimization signal.

## E.2 Survival Under Group Filtering

Our training recipe filters out all-fail and all-pass groups before the RL update, following the group-filtering logic used in GRPO-style RLVR systems and later formalized in DAPO’s dynamic sampling [1, 2]. For  $K \sim \text{Binomial}(N, p)$ , the probability that a sampled group is non-degenerate is

$$\Pr(0 < K < N) = 1 - \Pr(K = 0) - \Pr(K = N) = 1 - (1-p)^N - p^N. \quad (8)$$

This quantity is maximized when the probability of the two degenerate extremes is minimized. Differentiating,

$$\frac{d}{dp} \Pr(0 < K < N) = N(1-p)^{N-1} - Np^{N-1}. \quad (9)$$

The stationary point satisfies  $(1-p)^{N-1} = p^{N-1}$ , hence  $p = 0.5$ . The second derivative is

$$-N(N-1)((1-p)^{N-2} + p^{N-2}) < 0, \quad (10)$$

so this is the unique maximum on  $(0, 1)$ . For  $N = 8$ , the non-degenerate probability is 99.22% at  $p = 0.5$ , 89.99% at  $p = 0.25$ , and 65.64% at  $p = 0.125$ . Balanced groups are therefore not only more informative conditional on being used; they are also much less likely to be discarded as all-fail or all-pass.

## E.3 GRPO and RLOO Advantage Signal

The optimization view asks how much reward contrast becomes an advantage signal. With binary rewards and  $k$  successes in a group, the empirical pass rate is  $\hat{p} = k/N$ . For ordinary mean-centered advantages,

$$A_i = 1 - \hat{p} \quad (r_i = 1), \quad A_i = -\hat{p} \quad (r_i = 0). \quad (11)$$

The within-group mean of  $A$  is zero, and a direct calculation gives

$$\text{Var}_{\text{centered}}(A) = \hat{p}(1-\hat{p})^2 + (1-\hat{p})\hat{p}^2 = \hat{p}(1-\hat{p}). \quad (12)$$

As a function of  $\hat{p}$ , this is a downward parabola maximized at  $\hat{p} = 0.5$ .

Our experiments use leave-one-out (RLOO) advantage estimation [13], so we also spell out the exact finite-group form. The leave-one-out baseline for rollout  $i$  is the average reward of the other  $N-1$  rollouts. If  $r_i = 1$ , the remaining group has  $k-1$  successes, so

$$A_i^{\text{RLOO}} = 1 - \frac{k-1}{N-1} = \frac{N-k}{N-1}. \quad (13)$$

If  $r_i = 0$ , the remaining group has  $k$  successes, so

$$A_i^{\text{RLOO}} = 0 - \frac{k}{N-1} = -\frac{k}{N-1}. \quad (14)$$

The RLOO advantages take two outcome-dependent values with opposite signs; their magnitudes become equal only at  $k = N/2$ . Averaging squared RLOO advantages within the observed group yields

$$\frac{1}{N} \sum_{i=1}^N (A_i^{\text{RLOO}})^2 = \frac{1}{N} \left[ k \left( \frac{N-k}{N-1} \right)^2 + (N-k) \left( \frac{k}{N-1} \right)^2 \right] \quad (15)$$

$$= \frac{k(N-k)}{(N-1)^2}. \quad (16)$$

The denominator is constant for fixed  $N$ , so RLOO advantage energy is maximized exactly when  $k(N-k)$  is maximized, i.e., at  $k = N/2$ . For  $N = 8$ , this value is  $16/49$  at  $k = 4$ ,  $12/49$  at  $k = 2$  or  $k = 6$ , and  $7/49$  at  $k = 1$  or  $k = 7$ . Thus the same 50% target follows under the leave-one-out advantage estimator used in the GRPO++ backbone.

This argument should be read as a statement about reward-side signal strength, not as a claim that the realized policy-gradient norm is determined only by  $p$ . The gradient also depends on the continuation trajectories and their log-probability derivatives. However, when the reward contrast collapses, no optimizer can extract a strong binary-reward update from that group; balancing the pass rate maximizes the part of the signal controlled by the rollout outcomes.

#### E.4 Success–Failure Contrastive Pairs

The credit-assignment view counts how many success–failure comparisons are available within a rollout group. With  $N$  rollouts and  $k$  successes, each successful trajectory can be compared against each failing trajectory, giving

$$C(k) = k(N-k). \quad (17)$$

Completing the square,

$$C(k) = -\left(k - \frac{N}{2}\right)^2 + \frac{N^2}{4}, \quad (18)$$

so the maximum occurs at  $k = N/2$  when  $N$  is even, and at the two adjacent integers when  $N$  is odd. For our  $N = 8$  setting, Table 11 shows the complete count.

Table 11: Success–failure contrastive-pair count for the  $N = 8$  rollout groups used in our experiments. The exact optimum is  $4/8$ , while  $3/8$  and  $5/8$  preserve 94% of the maximum contrastive-pair count.

| Successes $k$ | Pass rate | $C(k) = k(8-k)$ | Relative to max. |
|---------------|-----------|-----------------|------------------|
| 0             | 0/8       | 0               | 0.00             |
| 1             | 1/8       | 7               | 0.44             |
| 2             | 2/8       | 12              | 0.75             |
| 3             | 3/8       | 15              | 0.94             |
| 4             | 4/8       | 16              | 1.00             |
| 5             | 5/8       | 15              | 0.94             |
| 6             | 6/8       | 12              | 0.75             |
| 7             | 7/8       | 7               | 0.44             |
| 8             | 8/8       | 0               | 0.00             |

This table also explains why the empirical analysis often reports the  $3/8$ – $5/8$  band rather than only exact  $4/8$ . Finite rollout groups are noisy, and a controller that tries to force every rerollout group to exact  $4/8$  would oscillate. The neighboring  $3/8$  and  $5/8$  groups remain almost maximally contrastive, whereas  $1/8$  and  $7/8$  retain less than half of the maximum pair count. The target band is therefore a stable practical proxy for the theoretical optimum.

The same conclusion holds in expectation before the group is sampled. If  $K \sim \text{Binomial}(N, p)$ , then

$$\mathbb{E}[K(N - K)] = N \mathbb{E}[K] - \mathbb{E}[K^2] \quad (19)$$

$$= N(Np) - (Np(1 - p) + N^2p^2) \quad (20)$$

$$= N(N - 1)p(1 - p), \quad (21)$$

which is again maximized at  $p = 0.5$ . Thus both the realized count  $k(N - k)$  and its expectation under policy sampling identify the same operating point.

## E.5 Summary

These derivations identify  $p = 0.5$  from several independent angles. It maximizes binary reward entropy, maximizes the probability that a group survives group filtering, maximizes mean-centered advantage variance and RLOO advantage energy, and maximizes both observed and expected success-failure contrastive pairs. Skewed partial groups such as 1/8 or 7/8 are not useless, but they provide much weaker binary learning signal than balanced groups. Prefix Sampling is designed around this fact: rather than merely drawing more rollouts, it changes the continuation state so that skewed but partially solved rollout groups move toward the high-signal region around 4/8. This is a statement about the binary reward-side signal available to a grouped policy-gradient update, not a theorem that every global curriculum should keep all tasks at 50% success or that trajectory diversity and policy-gradient geometry are irrelevant.

## F Additional Mechanism Diagnostics

This appendix expands the 4B mechanism analysis in Section 5. Appendix F.1 audits parent-to-rerollout transitions at the pass-count level, while Appendix F.2 checks whether the adaptive prefix ratios produce the expected closed-loop behavior.

### F.1 Parent-to-rerollout transition audit

Figure 7 gives the transition audit behind the bucket-level correction summary in Figure 4. Rows are conditioned on the source bucket that supplied the prefix, and columns show the full child rerollout pass-count distribution from 0/8 through 8/8. This view keeps the degenerate child rerollout groups in the table, so the reader can see both outcomes at once: some rerollout groups still collapse to all-fail or all-pass, but each source bucket also sends a visible mass into the 3/8–5/8 target band around the 4/8 operating point.

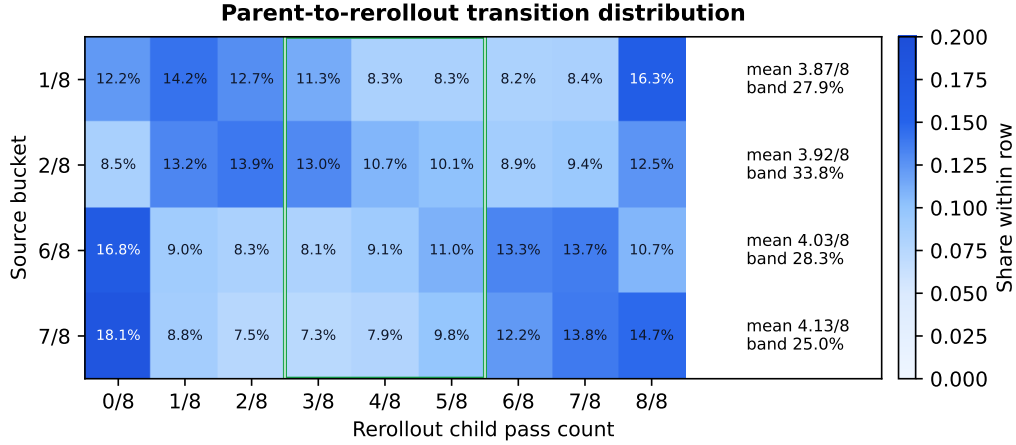


Figure 7: **Parent-to-rerollout transition distribution for the 4B adaptive controller.** Rerollout groups generated from hard-side parents shift upward, while those from easy-side parents shift downward. The green outline marks the 3/8–5/8 target band, and the values on the right report the full mean child pass count and target-band share for each source bucket.

The hard-side rows move inward from below. A 1/8 parent has a mean child pass count of 3.87/8 and 27.9% target-band mass; a 2/8 parent has a mean child pass count of 3.92/8 and 33.8% target-band mass. The easy-side rows show the symmetric effect: 6/8 and 7/8 parents have mean child pass counts of 4.03/8 and 4.13/8, with 28.3% and 25.0% target-band mass. Because this audit keeps the residual 0/8 and 8/8 outcomes, it does not overstate the controller’s precision. The direction is still clear: successful prefixes lift hard buckets, failing prefixes handicap easy buckets, and both sides are pulled toward the informative middle.

## F.2 Adaptive-prefix controller dynamics

Section 2.2 defines the adaptive controller. Here we audit whether its observed time series match the intended behavior. Figure 8 plots the bucket-level feedback EMAs and the corresponding prefix ratios on the 4B adaptive run through the convergence step used in Table 1. The feedback traces start from the neutral initialization at 0.5, temporarily separate as the controller observes skewed rerollouts, and return close to the target by convergence: the final EMA values are 0.508, 0.539, 0.491, and 0.537 for the 1/8, 2/8, 6/8, and 7/8 buckets.

The ratio traces show that this behavior is not produced by a single global replay length. By step 110, the four bucket-specific ratios have separated to 0.90, 0.65, 0.70, and 0.80, indicating that different source buckets require different intervention strengths. The directions also match the controller’s semantics. For too-hard buckets (1/8 and 2/8), increasing the successful-prefix ratio gives the continuation a longer head start, and the feedback EMAs rise from the early under-target region back toward 0.5. For too-easy buckets (6/8 and 7/8), increasing the failing-prefix ratio commits the continuation to more of a failing trajectory, and the feedback EMAs fall from the early over-target region toward 0.5. The important check is the joint pattern: despite non-uniform ratio schedules and opposite intervention semantics on the two sides, all four rerollout EMAs remain in a narrow band around 0.5 by convergence. This is consistent with the expected closed-loop effect: bucket-specific prefix ratios compensate for bucket-specific drift and keep the controlled rerollout cohort near the intended operating point.

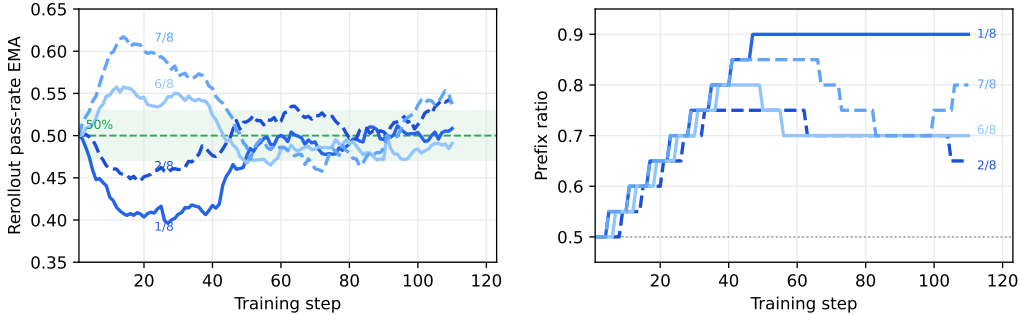


Figure 8: **Adaptive-controller dynamics on the 4B run.** Left: the rerollout pass-rate EMA used as bucket-level feedback. Right: the adaptive prefix ratio applied to each source bucket. The plotted window ends at the 4B Prefix Sampling convergence step.

## G Case Study Details

The two cases below illustrate the two directions of the Prefix Sampling intervention with one example each, both drawn from the 4B AceReason-Math-Subset run using Qwen3-4B-Instruct-2507 [24, 26]. Each case is formatted as a compact audit panel followed by an evidence trail. The panel states the task, parent group, replayed prefix, and rerollout group; the evidence trail then separates model-generated snippets from our interpretation. Ellipses mark omitted text from longer trajectories.

### G.1 Hard-side rescue: missing overlap correction

**Problem.** Surface area of a  $3 \times 3 \times 3$  wooden cube after three centered  $1 \times 1$  tunnels are drilled through opposite faces.

**Gold answer.** 72.

**Parent group.** 2/8 correct; answer distribution 84:6, 72:2.

**Prefix.** Successful parent trajectory from the 2/8 bucket; prefix length 4644.

**Rerollout group.** 4/8 correct; answer distribution 72:4, 78:3, 84:1.

---

**Evidence trail.** The parent failures treat the three tunnels as independent and add all tunnel-wall area:

**Parent failure, pred. 84.** “Remaining outer surface:  $48 \text{ m}^2$ . Internal tunnel surfaces:  $36 \text{ m}^2$ . Total surface area =  $48 + 36 = 84 \text{ m}^2$ .”

**Parent success, pred. 72.** “The holes intersect at the center of the cube ... we must be careful not to double-count the internal surface areas, or to subtract overlapping areas where the hole walls meet.”

**Replayed prefix state.** “The three holes cross each other at the center. So, we must be careful not to double-count the internal surface areas ... because the holes intersect, internal surfaces from different holes may overlap or share area.”

**Rerollout partial failure, pred. 78.** “The three tunnels contribute  $36 \text{ m}^2$  internally, but they intersect in three pairs ... remove  $3 \times 2 = 6 \text{ m}^2$  from the 36. So inner surface area =  $36 - 6 = 30$  ... total surface area =  $48 + 30 = 78$ .”

**Rerollout success, pred. 72.** “Each tunnel has 4 walls ... in the central  $1 \times 1 \times 1$  cube ... subtract  $3 \times 4 = 12 \text{ m}^2$ . So internal surface =  $3 \times 12 - 12 = 24$ . Final surface area =  $48 - 6 + 24 = 72$ .”

**Takeaway.** This case shows the hard-side role of Prefix Sampling. A rare policy-generated successful trajectory becomes an on-policy scaffold, and the fresh continuations produce contrast around the exact reasoning step that the parent group usually misses: whether the central overlap removes 0, 6, or 12 square meters of tunnel-wall area.

## G.2 Easy-side handicap: recovery from a common misconception

---

**Problem.** Largest number of students, out of 50, who can score strictly above the class mean.

**Gold answer.** 49.

**Parent group.** 7/8 correct; answer distribution 49:7, 25:1.

**Prefix.** Failing parent trajectory from the 7/8 bucket; prefix length 273.

**Rerollout group.** 4/8 correct; answer distribution 25:4, 49:4.

---

**Evidence trail.** The parent group is mostly correct, but the single failure exposes the tempting misconception that “above average” means at most half the class:

**Parent success, pred. 49.** “49 students score 100. 1 student scores 0. Total sum = 4900. Mean = 98. Now, the 49 students who got 100 are above 98, so they are above the mean.”

**Parent failure, pred. 25.** “By definition, half of the scores are above the mean and half below ... it is impossible for more than half of the students to score above the mean, because the mean is the balance point of the data.”

**Replayed prefix state.** “The mean is the sum of all scores divided by the number of students. By definition, half of the scores are above the mean and half below ... it is impossible for more than half of the students to score above the mean.”

**Rerollout failure, pred. 25.** “You cannot have more than 25 students strictly above the mean ... the maximum number of students who can score strictly above the mean is 25.”



**Rerollout success, pred. 49.** “Actually, no. There is no rule that says only half the students can score above the mean ... 49 students scored 1, 1 student scored 0. Mean =  $49/50 = 0.98$ . Each of the 49 students scored  $1 > 0.98$ .”

**Takeaway.** This case shows the easy-side role of Prefix Sampling. A mostly solved task would otherwise provide little new signal, because most parent rollouts already repeat the answer 49. Replaying the model’s own failing branch turns the task into a self-correction exercise: the continuation first inherits the plausible but false “half above the mean” heuristic, then explicitly rejects it in the highlighted sentence and constructs a counterexample. Thus the easy-side intervention does more than make an easy problem harder; it creates direct training signal for detecting and repairing a tempting wrong reasoning branch.