

Low-Cost Black-Box Detection of LLM Hallucinations via Dynamical System Prediction

Dan Wilson*
University of Tennessee
dwilso81@tennessee.edu

Mohamed Akrou*
University of Tennessee
makrou@tennessee.edu

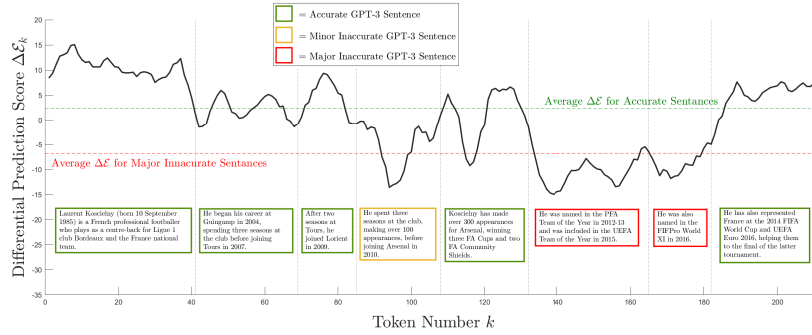


Figure 1: Our proposed differential residual score $\Delta\mathcal{E}$ accurately captures the transition between factual and hallucinated sentences in segmented LLM responses from the WikiBio dataset. The score is computed by comparing the relative accuracy between predictions of the dynamics of token embeddings from Llama-3 with dynamical system models inferred from both hallucinated and non-hallucinated responses.

Abstract

Large Language Models (LLMs) frequently generate plausible but non-factual content, a phenomenon known as hallucination. While existing detection methods typically rely on computationally expensive sampling-based consistency checks or external knowledge retrieval, we propose a new method that treats the LLM as a black-box dynamical system. By projecting LLM responses into a high-dimensional manifold via an embedding model, we characterize the resulting vector sequences as observable realizations of the model’s latent state-space dynamics. Leveraging Koopman operator theory, we fit the transition operators for both factual and hallucinated regimes and define a differential residual score based on their respective prediction errors. To accommodate varying user requirements and domain-specific sensitivities, we introduce a preference-aware calibration mechanism that optimizes the classification threshold based on a small set of demonstrations. This approach enables low-cost hallucination detection in a single-sample pass, avoiding the need for secondary sampling or external grounding. Extensive testing across three data benchmarks demonstrates that our method achieves state-of-the-art performance with reduced resource overhead.

1 Introduction

Large Language Models (LLMs) have achieved remarkable success across diverse natural language processing tasks [1, 2]. However, their tendency to generate fluent yet factually incorrect content, commonly known as hallucination, remains a critical barrier to reliable deployment in high-stakes domains such as healthcare, law, finance, and autonomous agents [3, 4, 5]. As LLMs become

*Equal contribution

increasingly integrated into real-world applications, the ability to detect and mitigate hallucinations has emerged as a pressing research priority.

Hallucination in LLMs is not merely a design flaw but a statistical necessity [3, 6]. Any calibrated language model must inevitably produce false or unsubstantiated claims, establishing hallucination as theoretically unavoidable [7]. This phenomenon emerges from the fundamental trade-off between finite training data and open-ended generation [8]. Empirical evidence shows that even state-of-the-art models cannot reliably distinguish belief from knowledge [9, 10, 11, 12]. Ultimately, the persistent reliance on external verification [4, 13] highlights a critical gap in LLM autonomy. To achieve scalable trust, it is critical to develop self-contained detection frameworks that identify hallucinations with minimal to no reliance on external knowledge retrieval.

Hallucination detection methods are generally categorized by their level of model access. *White-box* approaches leverage internal representations like hidden states or attention maps [14, 15, 16], while *gray-box* methods utilize token-level output probabilities [17, 18]. However, both remain impractical for many commercial LLMs accessed via restricted application programming interfaces (APIs). *Black-box* methods circumvent these access barriers by operating solely on generated text, typically through knowledge retrieval or sampling-based consistency checks, such as SelfCheckGPT [19]. Existing black-box approaches suffer from significant computational overhead: retrieval-based methods depend on external knowledge latency, and sampling-based methods require multiple forward passes. This creates a dual barrier of high API costs and latency for real-time applications.

To address these limitations, we treat the LLM as a dynamical system (DS) and propose a novel DS prediction approach that considers the temporal evolution of generated token embeddings. Our method identifies hallucinations by classifying the evolution of the output token embeddings by comparing the relative accuracy of predictive models trained from both hallucinated and non-hallucinated responses allowing for the definition of a differential prediction score $\Delta\mathcal{E}$. Fig. 1 provides an example of this strategy showing the evolution of this score over the token embedding of an LLM response. Here $\Delta\mathcal{E}$ rises and falls with the factuality of LLM’s output sentences in the embedding space. We build upon the differential prediction score to provide a hallucination detection technique that uses one-single pass detection without the need for output token probabilities or access to external information. To our knowledge, this is the first work to consider the output of an LLM as a black-box dynamical system with hallucinations and factual responses stemming from trajectories evolving on different manifolds embedded in the state space. Our primary contributions are as follows:

- 1) We devise a new method for hallucination detection that treats LLM generation as a dynamical system with a high-dimensional observable space. Results suggest that the temporal evolution of the observables stemming from factual and hallucinated responses evolve on distinct manifolds that can be distinguished from one another.
- 2) We introduce a computationally efficient hallucination detection algorithm using a differential error score between the prediction for trajectories evolving on the accurate and inaccurate manifolds. Unlike traditional black-box metrics that necessitate multiple samples or external grounding, our method identifies hallucinations using a one-sample pass. This is achieved by fitting linear dynamical systems on a small set of LLM responses, bypassing the need for computationally heavy retrieval modules.
- 3) We establish the state-of-the-art performance of our DS method through an extensive evaluation across three data benchmarks: FELM [20], HaluEval [21], and WikiBio [19]. We benchmark our approach against established methods that generally require significantly greater resources, including multi-sample consistency checks and/or external knowledge retrieval. Despite the absence of comparable single-pass retrieval-free black-box baselines in current literature, our DS approach consistently outperforms or matches these resource-intensive benchmarks.
- 4) We introduce a calibration mechanism that tunes the classification threshold via a set of user-annotated samples according to the user’s preferred strictness (e.g., tolerant or strict of minor hallucinations). This personalization allows the detector to adapt to individual preferences.

2 Related Work

Hallucination detection methods differ in the degree of model access they require, and this difference their applicability across different deployment settings (see [22] for a comprehensive review).

White-box and gray-box methods. White-box methods require full access to the internal representations of the model, including hidden-state activations, embedding layers, attention maps, and gradients [14, 16, 15, 23]. By directly inspecting these internal signals, white-box approaches can capture fine-grained indicators of hallucination that are invisible at the output level [24]. Despite their strong performance, white-box methods are typically feasible only when the model is hosted locally, as they require unrestricted access to the model architecture and its intermediate computations. Gray-box methods, however, relax the access requirements of white-box approaches by leveraging the output probability distribution over tokens, including next-token probabilities [25] and logit entropy [26, 27] which are commonly exposed by commercial LLM APIs without granting access to internal model states [17, 18, 28, 29].

Black-box methods. Black-box methods impose the fewest access requirements because they operate exclusively on the generated output tokens with no visibility into internal states or probability distributions. These approaches typically rely on sampling multiple responses and evaluating their consistency through lexical overlap, entailment-based comparison, or knowledge-graph representations of factual claims [19, 30, 31, 32, 33]. For example, Manakul et al. propose SelfCheckGPT, which detects hallucinations by measuring the consistency among multiple stochastically sampled responses under the assumption that factual statements tend to be reproduced consistently, whereas hallucinated content varies across samples [19]. Zhang et al. introduce SAC, which performs semantic-aware cross-check consistency verification to identify unreliable outputs [31]. Kong et al. further extend this line of work by proposing a multi-perspective consistency checking framework that operates in a zero-resource setting, requiring neither external knowledge bases nor access to model internals [32]. Because black-box methods depend solely on the generated text, they offer the broadest deployability and are compatible with any LLM, including fully closed-source systems [26].

3 Method

Moving from traditional token-level analysis to a dynamical systems perspective, we address the limitations of treating the LLM outputs as a sequence of independent tokens. Existing black-box methods rely on lexical overlap or semantic consistency between multiple sampled responses [33, 31]. However, as illustrated in Fig. 2, the first two embedding singular value decomposition (SVD) modes of correct and hallucinated samples are not sufficient to distinguish between factual and hallucinated responses from the LLM and are dependent of the embedding model. To design a hallucination detection algorithm, we present a method to probe the dynamics of the token embeddings.

3.1 Overview

We consider an LLM and its output as a dynamical system of the form

$$\begin{aligned} \mathbf{x}_{k+1} &= F(\mathbf{x}_k), \\ \mathbf{q}_k &= G_1(\mathbf{x}_k), \\ \mathbf{y}_k &= H(\mathbf{x}_k) = G_2(G_1(\mathbf{x}_k)). \end{aligned} \quad (1)$$

Table 1: Conceptual mapping between dynamical systems and LLM variables.

variable	Corresponding Element of LLMs
$\mathbf{x}_k$	full set of activations maps
F	Transformer’s forward operations
G_1	softmax and sampling
G_2	Embedding model

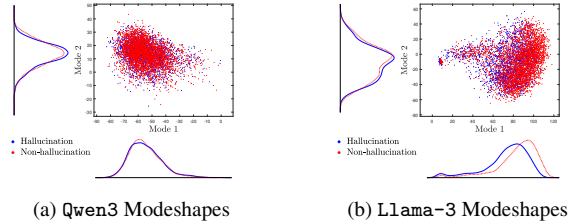


Figure 2: For 300 factual ground-truth and hallucinated responses from the HaluEval dataset, the magnitudes of the dominant SVD modes from Qwen and Llama-3 token embeddings are shown in (a) and (b), respectively. While the probability distributions show minor differences between hallucinated and factual responses, these differences are subtle and would require a prohibitively long token sequence for accurate sample classification.

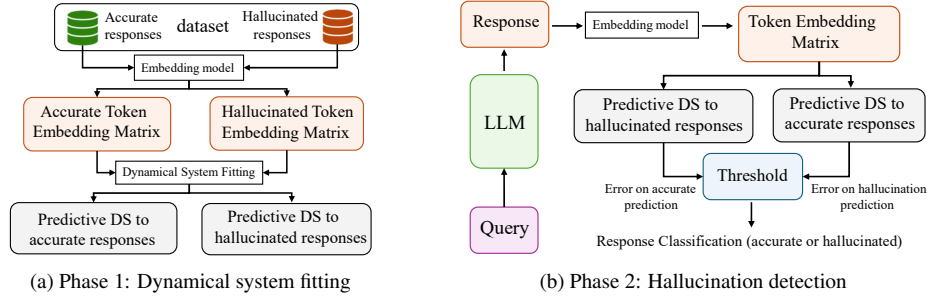


Figure 3: Hallucination Detection Dynamical System (DS): (a) Phase 1: Dynamical system fitting by embedding accurate and hallucinated datasets into token embedding matrices. This data is used to provide two different estimates for the action of the Koopman operator that describes the temporal evolution of the token embedding for accurate and hallucinated responses, (b) Phase 2: Hallucination detection of LLM responses to queries by embedding them and passing them through both predictive models. The classification is determined by comparing the relative accuracy of these estimates.

In (1), $\mathbf{x}_k \in \mathbb{R}^N$ represents state variables internal to the LLM immediately before the next token $\mathbf{q}_k$ is chosen, and F is a nonlinear map that determines the state evolution between tokens. Here, $\mathbf{q}_k$ is in the space of all possible tokens produced by the LLM, i.e., its vocabulary. We take G_1 to be a nonlinear function that maps the state to a token and G_2 to be map between the token and the embedding (via Qwen, Mistral, etc.). The dimension N is on the order of millions or billions depending on the specific LLM used and is generally not accessible. We take $\mathbf{y}_k \in \mathbb{R}^M$ to be the observable where M depends on the embedding model used. Table 1 summarizes the conceptual mapping between the dynamical system from Equation (1) and the LLM’s internal modules. We treat the LLM as a discrete-time non-linear black-box system and employ Koopman operator theory as a foundation for our approach to characterize the dynamics of observables. From this perspective, The Koopman operator $K : \mathbb{R}^M \rightarrow \mathbb{R}^M$ is defined as

$$KH(\mathbf{x}_k) \equiv H(F(\mathbf{x}_k)). \quad (2)$$

Despite the fact that the functions F and H are nonlinear, the Koopman operator is linear (a property inherited from the linearity of the composition [34], [35]) but generally infinite-dimensional.

To build a model for classification, we use LLM output data that consists of both hallucinations and correct responses in order to infer Koopman-based dynamical models for each. From a dynamics systems perspective, we posit that correct and hallucinated responses from the LLM represent solutions evolving on different manifolds $\mathcal{M}_h, \mathcal{M}_c \in \mathbb{R}^N$, respectively so that Koopman-based model identification strategies applied to hallucinated and correct datasets will yield different estimates for the action of the Koopman operator [34] (see Appendix B for more discussions about our assumptions and implications from a DS perspective). Models that were inferred on data from hallucinated (resp., non-hallucinated) responses will better predict the dynamics of the token embedding for hallucinated (resp., non-hallucinated) responses. The relative accuracy between these estimates can subsequently be used for classification on a sentence-level and response-level basis.

Our method illustrated in Fig. 3 proceeds in two phases. The offline DS fitting stage shown in Fig. 3a learns *i)* a DS on non-hallucinated token embedding trajectories, and *ii)* a DS on hallucinated token embedding trajectories. The inference stage depicted in Fig. 3b classifies a previously unseen LLM response by considering the relative accuracy between predictions of the token embedding trajectories from models inferred from hallucinated and non-hallucinated responses.

3.2 Data-Driven Dynamical System Inference (Phase 1)

Dynamic mode decomposition (DMD) is a well-established strategy for estimating a finite-dimensional approximation for the action of the Koopman operator from data [36], [37], [38], [39], [40]. Here we use the Extended DMD approach [39] which first ‘lifts’ the observables to a higher dimensional space:

$$\mathbf{z}_k = [\mathbf{y}_k^\top \quad f_{\text{lift}}^\top(\mathbf{y}_k)]^\top, \quad (3)$$

where $\mathbf{z}_k \in \mathbb{R}^{M+\gamma}$ is the lifted observable with $f_{\text{lift}} \in \mathbb{R}^\gamma$ where γ being the dimension of the lifting. Above, $^\top$ indicates the vector transpose. Common choices of lifted coordinates include polynomial combinations of observables and radial basis functions [39]. This lifting yields a higher-dimensional set of observables which ultimately improves the accuracy of the subsequent model fitting. A series of snapshot pairs $s_k = (\mathbf{z}_k, \mathbf{z}_{k+1})$ is collected for $k = 1, \dots, q$ and the pairs are arranged into matrices $\mathbf{X} = [\mathbf{z}_1 \dots \mathbf{z}_q]$ and $\mathbf{X}^+ = [\mathbf{z}_2 \dots \mathbf{z}_{q+1}]$. A finite-dimensional approximation of the Koopman operator that captures the evolution of $\mathbf{z}_{k+1} = \mathbf{A}\mathbf{z}_k$ can be obtained taking

$$\mathbf{A} = \mathbf{X}^+ \mathbf{X}^\dagger, \quad (4)$$

where † denotes the pseudoinverse. To avoid overfitting, low-rank fits to the data can also be obtained by truncating the SVD modes of $\mathbf{X}$ prior to taking the pseudoinverse [41].

From a dynamics systems perspective, we posit that correct and hallucinated responses from the LLM represent solutions evolving on different manifolds $\mathcal{M}_h, \mathcal{M}_c \in \mathbb{R}^N$, respectively. As such, data-driven Koopman-based model identification strategies applied to hallucinated and correct snapshot pairs will yield different estimates for the action of the Koopman operator [34]. Snapshot pairs of lifted observables are placed in the matrices $\mathbf{X}_c$ and $\mathbf{X}_c^+$ or $\mathbf{X}_h$ and $\mathbf{X}_h^+$ depending on whether the LLM passages are hallucinations or not (as gauged by humans with separate annotations provided in the datasets). This data is used to approximate the action of the Koopman operator according to (4) yielding two approximations: $\mathbf{z}_{k+1} = \mathbf{A}_c \mathbf{z}_k$ and $\mathbf{z}_{k+1} = \mathbf{A}_h \mathbf{z}_k$.

3.3 Classification via Differential Residual Score (Phase 2)

For a LLM response containing L tokens, we obtain a set of lifted observables $\mathbf{z}_1, \dots, \mathbf{z}_L$ defined according to (3). We consider the error associated with the prediction of the evolution of the token embeddings from $\mathbf{y}_k$ to $\mathbf{y}_{k+1}$ according to

$$\begin{aligned} \epsilon_{c,k} &\equiv \|\mathbf{y}_{k+1} - [\mathbf{I} \quad \mathbf{0}] \mathbf{A}_c \mathbf{z}_k\|, \\ \epsilon_{h,k} &\equiv \|\mathbf{y}_{k+1} - [\mathbf{I} \quad \mathbf{0}] \mathbf{A}_h \mathbf{z}_k\|, \end{aligned} \quad (5)$$

where $\mathbf{I} \in \mathbb{R}^{M \times M}$ denotes the identity matrix, $\mathbf{0} \in \mathbb{R}^{M \times \gamma}$ is a matrix of zeros, and $\|\cdot\|$ denotes the 2-norm. In the above definition, recall that the first M rows of $\mathbf{z}_k$ comprise the observable $\mathbf{y}_k$ so that the $\epsilon_{c,k}$ and $\epsilon_{h,k}$ do not consider the error associated with the prediction of the lifted coordinates. The prediction errors can subsequently be compared to determine whether $\mathbf{A}_c$ or $\mathbf{A}_h$ (capturing the behavior on $\mathcal{M}_c$ and $\mathcal{M}_h$, respectively) provide a better estimate of the dynamics. We then define

$$\Delta \mathcal{E}_k = \epsilon_{h,k} - \epsilon_{c,k}, \quad (6)$$

as the token-level residual score and

$$\Delta \mathcal{E} = \left(\sum_{j=1}^{L-1} \epsilon_{h,j}^2 \right)^{1/2} - \left(\sum_{j=1}^{L-1} \epsilon_{c,j}^2 \right)^{1/2}, \quad (7)$$

as the response-level residual score. Intuitively, when the output of an LLM is (resp., is not) a hallucination, $\mathbf{A}_h$ (resp., $\mathbf{A}_c$) should yield a better prediction biasing $\Delta \mathcal{E}_k$ and $\Delta \mathcal{E}$ towards negative (resp., positive) values. To yield a binary classification $\hat{D} \in \{0, 1\}$, where 1 denotes a hallucination and 0 denotes factual text, we apply a decision threshold η :

$$\hat{D} = \begin{cases} 1, & \text{if } \Delta \mathcal{E} < \eta, \\ 0, & \text{if } \Delta \mathcal{E} \geq \eta. \end{cases} \quad (8)$$

The threshold η serves as a hyperparameter to tune the balance between precision and recall, allowing for the optimization of the F_1 score across various LLM architectures. The length of the response in (7) can be adjusted as desired to classify individual sentences produced by the LLM or entire passages in response to a user prompt.

4 Experiments and Results

4.1 Experimental Setup

Datasets. To evaluate the performance of our DS approach, we benchmark on three diverse datasets that represent varying levels of hallucination granularity:

- WikiBio [19] contains 238 LLM-generated biographies, totaling 1,908 sentences, each manually annotated for factual drift. sentences are categorized into three classes: major inaccurate, minor inaccurate, and accurate.
- The summarization task of the HaluEval dataset [21] provides 10K pairs of correct and hallucinated responses annotated at the summary level only.
- FELM [20] focuses on sentence-level reasoning across specialized domains (Math, Science, and Logic). It has 4427 manually labeled sentences with 3642 being correct and 785 being hallucinated.

Embedding Models. We test our DS method using five top-performing embedding models from the HuggingFace leaderboard of the Massive Text Embedding Benchmark (MTEB) as described in Table 2. Working within limited computing resources, we selected models of varying sizes, from the lightweight 30M-parameter Jina-v5-Nano to the larger 8B-parameter Llama-3, thereby balancing performance with practical hardware constraints. Implementation details are given in Appendix A.

Table 2: Benchmarked embedding models for DS hallucination detection.

Model	Parameters	Dim (M)	Max Context	Architecture Type
Jina-v5-Nano [42]	0.03 B	768	8192	Bi-directional Encoder
Qwen3-Embed [43]	0.6 B	1024	32768	Dense Decoder-Only
F2LLM [44]	4.0 B	2560	4096	Hybrid (Code/NL)
Mistral [45]	7.2 B	4096	32768	Sparse Attention (SMoE)
Llama-3 [46]	8.0 B	4096	8192	Dense Causal Decoder

4.2 Main Results

4.2.1 Dynamical System Classification Improves Hallucination Detection

We begin by analyzing the performance of our method on the summarization task of the HaluEval dataset. Fig. 4a illustrates the comparative accuracy across models, showing how our DS approach achieves high classification accuracy across a diverse range of embedding scales, even for the highly compressed 0.03B Jina-v5 model. This confirms our hypothesis on how the factual drift is fundamentally encoded within the embedding transitions across tokens. The ROC curves in Fig. 4b further validate this discriminative capability of our method across embedding models. The Llama-3 and Mistral models exhibit the highest area under the curve (AUC), indicating that increased parameter count and embedding dimensionality provide a clear separation of generative regimes. The performance of the smaller models highlights the efficiency of our differential residual score $\Delta\mathcal{E}$ as they are already outperforming zero-shot hallucination LLM detectors with a single-sample pass and without the need for multiple stochastic samples or external verification.

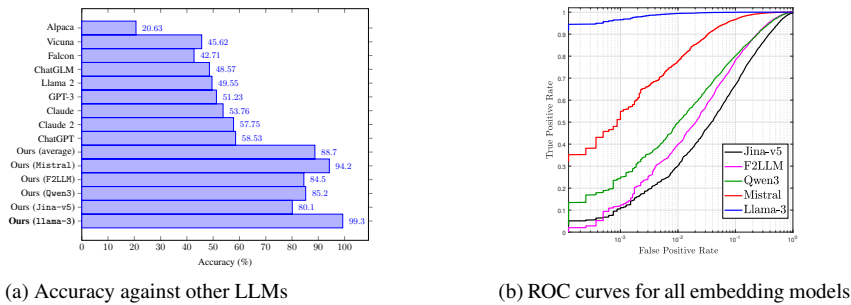


Figure 4: Hallucination detection performance using DS classification on 8K samples of the HaluEval summarization task, showing (a) classification accuracy for multiple black-box LLMs and (b) the corresponding ROC curves for all embedding models.

We then investigate whether our DS-based hallucination detector can identify the factuality of sentences on the WikiBio dataset. In detecting non-factual sentences, both `major-inaccurate` labels and `minor-inaccurate` labels are grouped together into the *non-factual* class, while the *factual* class refers to accurate sentences. In addition, we consider the task of detecting major-inaccurate sentences in passages that are *not* total hallucination passages, which we refer to as *non-factual**. Table 3 reports hallucination detection performance measured in AUC-PR since the data is unbalanced. For the primary NonFact task, all of our methods outperform both the random baseline

Table 3: Hallucination detection performance on the WikiBio dataset.

Method	Sentence-level (AUC-PR)		
	NonFact	NonFact*	Factual
Random	73.0	29.7	27.0
SelfCheckGPT	81.96	45.96	44.23
Ours (Llama-3)	85.3	51.2	42.4
Ours (Jina-v5)	82.2	44.5	37.2
Ours (Qwen3)	84.7	47.5	37.6
Ours (F2LLM)	82.2	44.3	42.0
Ours (Mistral)	82.8	54.1	38.1
Ours (avg)	83.4	48.3	39.5

Table 4: Comparison of hallucination detection methods on the FELM dataset.

	F_1 Score	Bal. Acc.
gpt4-0314	48.3	67.1
Vicuna-33B	32.5	56.5
gpt3.5-0301	25.5	55.9
Ours (Jina-v5)	39.3	63.5
Ours (F2LLM)	41.4	65.4
Ours (Qwen3)	44.8	67.7
Ours (Mistral)	44.7	67.0
Ours (Llama-3)	43.0	68.4

and SelfCheckGPT, with llama-3 achieving the best result. The more challenging NonFact* task proves substantially more difficult across all methods, as reflected by the lower scores. Here, Mistral delivers the strongest performance and significantly surpasses SelfCheckGPT [19]. On the Factual class, performance is generally lower than NonFact across all methods, with SelfCheckGPT slightly ahead of our variants.

Table 4 compares hallucination detection performance on the FELM dataset, reporting F_1 score and balanced accuracy for three baseline LLMs alongside our five embedding-based methods. GPT-4 achieves the highest F_1 score. On balanced accuracy, our DS method using Llama-3 embedding achieves the top score, while Qwen3 also matches GPT-4.

4.2.2 Detection Performance Improves with Longer Token Sequences

A central hypothesis of our DS approach is that longer token sequences yield more reliable hallucination detection, as they provide richer semantic trajectories. Indeed, for a semantic trajectory of length L , it has been shown that the prediction residual $\epsilon_k = \|\mathbf{x}_{k+1} - \mathbf{A}\mathbf{x}_k\|$ converges at a rate of $O(1/\sqrt{L})$ under a stable semantic manifold [47]. To validate this hypothesis, we evaluate our DS hallucination detection method on the summarization samples of the HaluEval dataset, by varying the minimum sequence length threshold $L \in \{1, 50, 100, 150\}$. The ROC curves in Fig. 5 illustrate the effect of increasing the minimum sequence length L on detection performance.

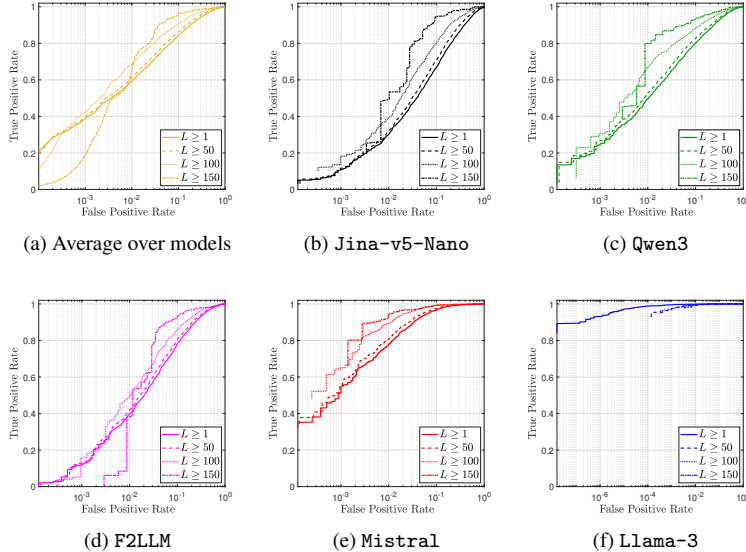


Figure 5: ROC curves on the HaluEval dataset as a function of the sequence length L for (a) the average classification performance and for (b)–(f) each embedding model showing the variation of the true positive rate against the false positive rate at various prediction error thresholds.

Notably, the magnitude of the improvement from shorter to longer sequence length correlates inversely with model size. Smaller embedding models, such as Jina-v5 (Fig. 5b), exhibit the most substantial gains, with the ROC curve transitioning from a gradual ascent at $L \geq 1$ to a sharp rise

Table 5: Performance of our DS hallucination detection method on 8K summarization samples of the HaluEval dataset over the number of tokens L . The value of each cell denotes F_1 score/balanced accuracy/AUC.

	$L \geq 1$	$L \geq 50$	$L \geq 100$	$L \geq 150$
Jina-v5	80.2 / 80.1 / 87.7	82.1 / 82.0 / 89.8	86.3 / 86.0 / 93.2	92.6 / 92.5 / 96.6
F2LLM	84.6 / 84.5 / 92.2	85.5 / 85.5 / 93.0	88.1 / 88.0 / 94.7	92.0 / 92.1 / 96.0
Qwen3	85.0 / 85.2 / 92.7	86.3 / 86.4 / 93.6	89.1 / 89.3 / 95.7	92.3 / 92.6 / 97.4
Mistral	94.2 / 94.2 / 98.6	94.9 / 94.9 / 98.9	96.5 / 96.5 / 99.5	97.3 / 97.3 / 99.4
Llama-3	99.3 / 99.3 / 99.9	99.4 / 99.4 / 99.9	99.4 / 99.4 / 99.9	99.3 / 99.3 / 99.9

that hugs the upper boundary of the plot at $L \geq 150$. A similar pattern is observed for Qwen3 (Fig. 5c) and F2LLM (Fig. 5d), where the separation between the curves for $L \geq 1$ and $L \geq 150$ is clearly visible across the entire range of false positive rates. The average over models (Fig. 5a) summarizes this behavior, showing a consistent leftward and upward shift with increasing L . For larger models such as Mistral (Fig. 5e) and Llama-3 (Fig. 5f), the improvements are more subtle, as their embedding spaces already capture sufficiently discriminative semantic trajectories at shorter sequence lengths.

Table 5 corroborate these observations. Across all embedding models, the F_1 score, balanced accuracy, and AUC improve consistently as the minimum sequence length increases, with the most substantial gains observed for smaller models. Llama-3 maintains near-perfect performance across all sequence lengths, confirming that its richer embedding space compensates for shorter sequences. This reveals a practical trade-off between model size and sequence length, suggesting that the representational limitations of smaller embedding models can be mitigated by increasing the observed token context.

4.2.3 Cross-Embedding Generalization of Dynamical Predictions

Table 6 evaluates the cross-embedding generalization of our method across the three datasets. Each row corresponds to the embedding model used to fit the DS parameters and each column corresponds to the target embedding model on which the fitted system is evaluated, with each cell reporting balanced accuracy. The diagonal entries represent the matched setting, where the same embedding model is used for both fitting and evaluation. From a dynamical systems perspective, transfer between models is surprising. The approximations $\mathbf{A}_h$ and $\mathbf{A}_c$ are inferred for a specific embedding using the extended DMD algorithm [39]. When applying this method, in general, even permutations to the ordering of the observables will completely ruin the predictive ability of the resulting model requiring the matrices to be refit to the data. There is no obvious reason that a model fit using one set of observables could give information about the dynamics of a model with completely different observables. Nonetheless, many off-diagonal entries in table 6 exceed the 50% chance level by a non-trivial margin. For instance, on HaluEval, fitting on Qwen3 and testing on F2LLM yields 63.0%, and fitting on Qwen3 and testing on Llama-3 reaches 60.4%. Similar patterns appear on WikiBio, where fitting on Mistral and testing on Jina-v5 achieves 59.7%, and fitting on Mistral and testing on Qwen3 reaches 59.0%. Recalling that the observables used for model identification are the magnitudes of the most dominant SVD modes of the token embeddings, there may be differences in power law scalings present between hallucinated and correct responses. This partial transferability suggests that, despite operating in distinct embedding spaces, certain embedding models share overlapping manifold properties in how they represent semantic evolution. This suggests that the dynamical signatures of embedding factuality and hallucination have universal properties of the observation manifold rather than model-specific artifacts.

Table 6: Cross-embedding generalization across multiple datasets. Rows represent the embedding model used to fit the DS parameters (Fit), and columns represent the target embedding model for evaluation (Test). Each cell reports balanced accuracy.

Fit ↓ Test →	HaluEval					FELM					WikiBio				
	Jina	F2	Qw3	Mis	L13	Jina	F2	Qw3	Mis	L13	Jina	F2	Qw3	Mis	L13
Jina-v5	80.1	54.6	56.7	49.4	51.3	63.5	52.7	50.4	52.8	53.5	65.2	50.3	56.1	52.1	53.9
F2LLM	54.4	84.6	50.5	50.7	57.6	53.0	65.4	56.8	50.0	53.9	51.7	65.7	52.0	50.0	54.9
Qwen3	51.9	63.0	85.2	51.4	60.4	50.6	50.2	67.7	54.0	54.8	54.6	50.6	66.4	50.0	56.8
Mistral	53.9	54.8	55.4	94.2	53.4	52.2	54.9	51.8	67.0	52.6	59.7	52.2	59.0	69.3	55.1
Llama-3	51.8	51.3	50.9	52.0	99.3	50.5	50.0	50.0	50.0	68.3	52.5	56.5	57.0	52.9	65.6

4.2.4 Calibration through Sample Demonstration Updates DS Classification Thresholds

The analysis of the differential residual scores across accurate and hallucinated samples reveals a clear first-moment separation. Fig. 6 depicts how the mean value (in dashed lines) of test samples from the WikiBio dataset labeled as major inaccurate exhibit the smallest mean residuals, followed by minor inaccuracy, while accurate samples maintain the largest baseline values. During the DS fitting stage, $\mathbf{A}_c$ and $\mathbf{A}_h$ are fit using token embeddings for major inaccurate and accurate sentences only. Nonetheless, minor inaccurate sentences have an average residual score that falls between the other two categories. This distributional shift illustrates that the magnitude of $\Delta\mathcal{E}$ directly scales with the severity of the factual drift.

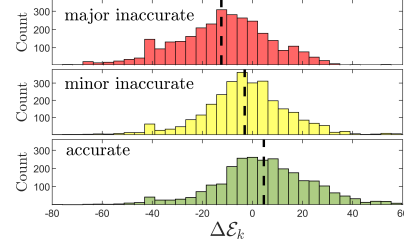


Figure 6: Histograms of token-level residual scores from (6) for Wikibio test data.

This effect can be leveraged to implement a calibration process that utilizes a small set of user-provided demonstrations to determine the classification threshold η . A sketch of this process is provided here. Whether the user is strict or tolerant to minor hallucinations, our method sets the classification threshold η to align with the desired sensitivity of the user as depicted in Fig. 7. We compute per-token differential residual scores $\Delta\mathcal{E}$ of the user-provided samples to quantify the degree of factual drift within their embedding trajectories. These scores then inform the calibration of the classification threshold η , which is determined by sweeping over a range of score values and selecting the threshold that maximizes a target performance metric. By doing so, our DS method ensures that the classification boundary is not just statistically optimal, but personalized to the preference required by the end-user.

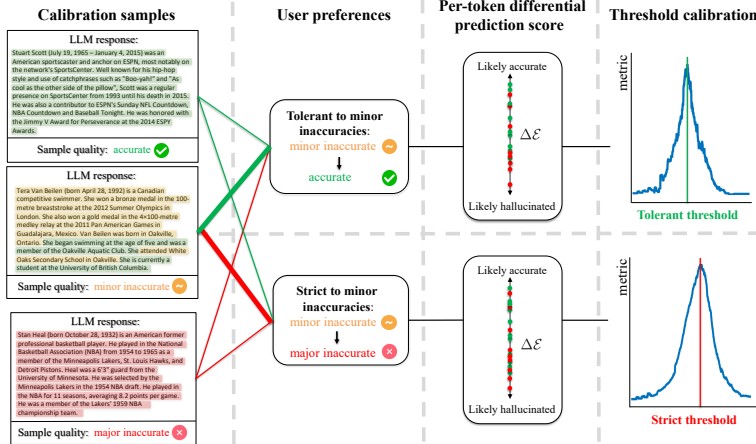


Figure 7: User-centric threshold calibration: (1) selection of calibration samples based on user preference (tolerant or strict to minor inaccuracies), (2) computation of per-token differential residual scores $\Delta\mathcal{E}$, and (3) calibration of the classification threshold η to maximize the target metric.

5 Conclusion

In this paper, we introduce a new hallucination detection method by rethinking a Large Language Model as a black-box dynamical system where the temporal evolution of trajectories in the output space can reveal whether the text is correct or hallucinated. Our classification strategy thresholds a differential residual score $\Delta\mathcal{E}$ that corresponds to the prediction error between two dynamical systems fitted in the embedding space on correct or hallucinated samples. Empirical results demonstrate that our method consistently matches or outperforms state-of-the-art black-box baselines, thereby providing a low-cost alternative to existing detection methods.

Limitations. While the single-pass nature of our method is highly efficient, it identifies that a hallucination has occurred but does not provide an external factual correction. Additionally, our algorithm does not provide any formal strategy for hallucination mitigation, for instance, through modification of the prompt or through direct manipulation of the internal state variables.

Acknowledgments and Disclosure of Funding

This material is based upon the work supported by the National Science Foundation (NSF) under Grant No. CMMI-2140527 and the startup funding from the University of Tennessee.

References

- [1] Tom Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared D Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, et al. Language models are few-shot learners. *Advances in neural information processing systems*, 33:1877–1901, 2020.
- [2] Josh Achiam, Steven Adler, Sandhini Agarwal, Lama Ahmad, Ilge Akkaya, Florencia Leoni Aleman, Diogo Almeida, Janko Altenschmidt, Sam Altman, Shyamal Anadkat, et al. Gpt-4 technical report. *arXiv preprint arXiv:2303.08774*, 2023.
- [3] Ziwei Ji, Nayeon Lee, Rita Frieske, Tiezheng Yu, Dan Su, Yan Xu, Etsuko Ishii, Yejin Bang, Andrea Madotto, and Pascale Fung. A survey of hallucination in large language models: Principles, taxonomy, challenges, and open questions. *arXiv preprint arXiv:2311.05232*, 2023.
- [4] Yejin Bang, Samuel Cahyawijaya, Nayeon Lee, Wenliang Dai, Dan Su, Bryan Wilie, Holy Lovenia, Ziwei Ji, Tiezheng Yu, Willy Chung, et al. A multitask, multilingual, multi-modal evaluation of chatgpt on reasoning, hallucination, and interactivity. *arXiv preprint arXiv:2302.04023*, 2023.
- [5] Muhammad Khurram Shahzad Warraich, Hazrat Usman, Sidra Zakir, and Mohaddas Mehboob. Ethical governance of artificial intelligence hallucinations in legal practice. *Social Sciences Spectrum*, 4(2):603–615, 2025.
- [6] Ziwei Xu, Sanjay Jain, and Mohan Kankanhalli. A survey on hallucination in large language models: Principles, taxonomy, and challenges. *arXiv preprint arXiv:2411.08009*, 2024.
- [7] Adam Tauman Kalai and Santosh S Vempala. Calibrated language models must hallucinate. In *Proceedings of the 56th Annual ACM Symposium on Theory of Computing*, pages 160–171, 2024.
- [8] Emily M Bender, Timnit Gebru, Angelina McMillan-Major, and Shmargaret Shmitchell. On the dangers of stochastic parrots: Can language models be too big? In *Proceedings of the 2021 ACM conference on fairness, accountability, and transparency*, pages 610–623, 2021.
- [9] Adam Tauman Kalai, Ofir Nachum, Santosh S Vempala, and Edwin Zhang. Why language models hallucinate. *arXiv preprint arXiv:2509.04664*, 2025.
- [10] Mirac Suzgun, Tayfun Gur, Federico Bianchi, Daniel E Ho, Thomas Icard, Dan Jurafsky, and James Zou. Language models cannot reliably distinguish belief from knowledge and fact. *Nature Machine Intelligence*, pages 1–11, 2025.
- [11] Amos Azaria and Tom Mitchell. Truthful: A benchmark for evaluating the truthfulness of large language models. *arXiv preprint arXiv:2310.06689*, 2023.
- [12] Stephanie Lin, Jacob Hilton, and Owain Evans. Truthfulqa: Measuring how models mimic human falsehoods. *arXiv preprint arXiv:2201.08045*, 2022.
- [13] Junyi Li, Tianyi Tang, Wayne Xin Zhao, and Ji-Rong Wen. Benchmarking large language models for news summarization. *arXiv preprint arXiv:2305.09034*, 2023.
- [14] Amos Azaria and Tom Mitchell. The internal state of an llm knows when its lying. In *Findings of the Association for Computational Linguistics: EMNLP 2023*, pages 967–976, 2023.
- [15] Weihang Su, Changyue Wang, Qingyao Ai, Yiran Hu, Zhijing Wu, Yujia Zhou, and Yiqun Liu. Unsupervised real-time hallucination detection based on the internal states of large language models. In *Findings of the Association for Computational Linguistics: ACL 2024*, pages 14379–14391, 2024.

- [16] Chao Chen, Kai Liu, Ze Chen, Yi Gu, Yue Wu, Mingyuan Tao, Zhihang Fu, and Jieping Ye. Inside: LLMs’ internal states retain the power of hallucination detection. *arXiv preprint arXiv:2402.03744*, 2024.
- [17] Junlang Qian, Zixiao Zhu, Hanzhang Zhou, Zijian Feng, Zepeng Zhai, and Kezhi Mao. Beyond the next token: Towards prompt-robust zero-shot classification via efficient multi-token prediction. In *Proceedings of the 2025 Conference of the Nations of the Americas Chapter of the Association for Computational Linguistics: Human Language Technologies (Volume 1: Long Papers)*, pages 7093–7115, 2025.
- [18] Guy Bar-Shalom, Fabrizio Frasca, Derek Lim, Yoav Gelberg, Yftah Ziser, Ran El-Yaniv, Gal Chechik, and Haggai Maron. Learning on llm output signatures for gray-box behavior analysis. In *ICML 2025 Workshop on Reliable and Responsible Foundation Models*, 2025.
- [19] Potsawee Manakul, Adian Liusie, and Mark Gales. Selfcheckgpt: Zero-resource black-box hallucination detection for generative large language models. In *Proceedings of the 2023 conference on empirical methods in natural language processing*, pages 9004–9017, 2023.
- [20] Yiran Zhao, Jinghan Zhang, I Chern, Siyang Gao, Pengfei Liu, Junxian He, et al. Felm: Benchmarking factuality evaluation of large language models. *Advances in Neural Information Processing Systems*, 36:44502–44523, 2023.
- [21] Junyi Li, Xiaoxue Cheng, Wayne Xin Zhao, Jian-Yun Nie, and Ji-Rong Wen. Halueval: A large-scale hallucination evaluation benchmark for large language models. In *Proceedings of the 2023 conference on empirical methods in natural language processing*, pages 6449–6464, 2023.
- [22] Lei Huang, Weijiang Yu, Weitao Ma, Weihong Zhong, Zhangyin Feng, Haotian Wang, Qianglong Chen, Weihua Peng, Xiaocheng Feng, Bing Qin, et al. A survey on hallucination in large language models: Principles, taxonomy, challenges, and open questions. *ACM Transactions on Information Systems*, 43(2):1–55, 2025.
- [23] Xiaomeng Hu, Yiming Zhang, Ru Peng, Haozhe Zhang, Chenwei Wu, Gang Chen, and Junbo Zhao. Embedding and gradient say wrong: A white-box method for hallucination detection. In *Proceedings of the 2024 Conference on Empirical Methods in Natural Language Processing*, pages 1950–1959, 2024.
- [24] Gaurang Sriramanan, Siddhant Bharti, Vinu Sankar Sadasivan, Shoumik Saha, Priyatham Katkunda, and Soheil Feizi. Llm-check: Investigating detection of hallucinations in large language models. *Advances in Neural Information Processing Systems*, 37:34188–34216, 2024.
- [25] Ernesto Quevedo, Jorge Yero Salazar, Rachel Koerner, Pablo Rivas, and Tomas Cerny. Detecting hallucinations in large language model generation: A token probability approach. In *World Congress in Computer Science, Computer Engineering & Applied Computing*, pages 154–173. Springer, 2024.
- [26] Sebastian Farquhar, Jannik Kossen, Lorenz Kuhn, and Yarin Gal. Detecting hallucinations in large language models using semantic entropy. *Nature*, 630(8017):625–630, 2024.
- [27] Lorenz Kuhn, Yarin Gal, and Sebastian Farquhar. Semantic uncertainty: Linguistic invariances for uncertainty estimation in natural language generation. In *The Eleventh International Conference on Learning Representations, ICLR 2023, Kigali, Rwanda, May 1-5, 2023*. OpenReview.net, 2023.
- [28] Guy Bar-Shalom, Fabrizio Frasca, Derek Lim, Yoav Gelberg, Yftah Ziser, Ran El-Yaniv, Gal Chechik, and Haggai Maron. Beyond next token probabilities: Learnable, fast detection of hallucinations and data contamination on llm output distributions. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 40, pages 30058–30066, 2026.
- [29] Yitong Qiao, Licheng Pan, Yu Mi, Lei Liu, Yue Shen, Fei Sun, and Zhixuan Chu. Lowest span confidence: A zero-shot metric for efficient and black-box hallucination detection in llms. *arXiv preprint arXiv:2601.19918*, 2026.

- [30] Albert Sawczyn, Jakub Binkowski, Denis Janiak, Bogdan Gabrys, and Tomasz Jan Kajdanowicz. Factselfcheck: Fact-level black-box hallucination detection for llms. In *Findings of the Association for Computational Linguistics: EACL 2026*, pages 5603–5621, 2026.
- [31] Jiaxin Zhang, Zhuohang Li, Kamalika Das, Bradley Malin, and Sricharan Kumar. SAC3: reliable hallucination detection in black-box language models via semantic-aware cross-check consistency. In *Findings of the Association for Computational Linguistics: EMNLP 2023*, pages 15445–15458, 2023.
- [32] Linggang Kong, Xiaofeng Zhong, Jie Chen, Haoran Fu, and Yongjie Wang. Multi-perspective consistency checking for large language model hallucination detection: a black-box zero-resource approach. *Frontiers of Information Technology & Electronic Engineering*, 26(11):2298–2309, 2025.
- [33] Aman Goel, Daniel Schwartz, and Yanjun Qi. Zero-knowledge llm hallucination detection and mitigation through fine-grained cross-model consistency. In *Proceedings of the 2025 Conference on Empirical Methods in Natural Language Processing: Industry Track*, pages 1982–1999, 2025.
- [34] M. Budišić, R. Mohr, and I. Mezić. Applied Koopmanism. *Chaos: An Interdisciplinary Journal of Nonlinear Science*, 22(4):047510, 2012.
- [35] I. Mezić. Analysis of fluid flows via spectral properties of the Koopman operator. *Annual Review of Fluid Mechanics*, 45:357–378, 2013.
- [36] J. N. Kutz, S. L. Brunton, B. W. Brunton, and J. L. Proctor. *Dynamic mode decomposition: data-driven modeling of complex systems*. Society for Industrial and Applied Mathematics, Philadelphia, PA, 2016.
- [37] P. J. Schmid. Dynamic mode decomposition of numerical and experimental data. *Journal of Fluid Mechanics*, 656:5–28, 2010.
- [38] C. W. Rowley, I. Mezic, S. Bagheri, P. Schlatter, and D. S. Henningson. Spectral analysis of nonlinear flows. *Journal of Fluid Mechanics*, 641(1):115–127, 2009.
- [39] M. O. Williams, I. G. Kevrekidis, and C. W. Rowley. A data-driven approximation of the koopman operator: Extending dynamic mode decomposition. *Journal of Nonlinear Science*, 25(6):1307–1346, 2015.
- [40] D. Wilson. Koopman operator inspired nonlinear system identification. *SIAM Journal on Applied Dynamical Systems*, 22(2):1445–1471, 2023.
- [41] J. L. Proctor, S. L. Brunton, and J. N. Kutz. Dynamic mode decomposition with control. *SIAM Journal on Applied Dynamical Systems*, 15(1):142–161, 2016.
- [42] Mohammad Kalim Akram, Saba Sturua, Nastia Havriushenko, Quentin Herreros, Michael Günther, Maximilian Werk, and Han Xiao. jina-embeddings-v5-text: Task-targeted embedding distillation. *arXiv preprint arXiv:2602.15547*, 2026.
- [43] Mingxin Li, Yanzhao Zhang, Dingkun Long, Keqin Chen, Sibao Song, Shuai Bai, Zhibo Yang, Pengjun Xie, An Yang, Dayiheng Liu, et al. Qwen3-vl-embedding and qwen3-vl-reranker: A unified framework for state-of-the-art multimodal retrieval and ranking. *arXiv preprint arXiv:2601.04720*, 2026.
- [44] Ziyin Zhang, Zihan Liao, Hang Yu, Peng Di, and Rui Wang. F2llm-v2: Inclusive, performant, and efficient embeddings for a multilingual world. *arXiv preprint arXiv:2603.19223*, 2026.
- [45] Albert Q. Jiang, Alexandre Sablayrolles, Arthur Mensch, Chris Bamford, Devendra Singh Chaplot, Diego de las Casas, Florian Bressand, Gianna Lengyel, Guillaume Lample, Lucile Saulnier, L  lio Renard Lavaud, Marie-Anne Lachaux, Pierre Stock, Teven Le Scao, Thibaut Lavril, Thomas Wang, Timoth  e Lacroix, and William El Sayed. Mistral 7b, 2023.
- [46] Aaron Grattafiori, Abhimanyu Dubey, Abhinav Jauhri, Abhinav Pandey, Abhishek Kadian, Ahmad Al-Dahle, Aiesha Letman, Akhil Mathur, Alan Schelten, Alex Vaughan, et al. The llama 3 herd of models. *arXiv preprint arXiv:2407.21783*, 2024.

- [47] Christophe Zhang and Enrique Zuazua. A quantitative analysis of koopman operator methods for system identification and predictions. *Comptes Rendus. Mécanique*, 351(S1):1–31, 2023.
- [48] H. S. Hemati, C. W. Rowley, E. A. Deem, and L. N. Cattafesta. De-biasing the dynamic mode decomposition for applied koopman spectral analysis of noisy datasets. *Theoretical and Computational Fluid Dynamics*, 31(4):349–368, 2017.
- [49] S. T. M. Dawson, H. S. Hemati, M. O. Williams, and C. W. Rowley. Characterizing and correcting for the effect of sensor noise in the dynamic mode decomposition. *Experiments in Fluids*, 57(3):42, 2016.

A Implementation Details

A.1 Embedding extraction

Embedding extraction for all datasets relies on capturing the embedding per token for a given sentence. For encoder-based models like Jina-v5 and Qwen3-Embed, we extract the last hidden state of the final layer which represents each token as a high-dimensional vector. For decoder-only models such as F2LLM and Mistral, we explicitly enable the parameter `output_hidden_states=True` and get the activation trajectory from the final transformer block. In the case of Llama-3, we utilize the LLM2Vec wrapper which patches the causal attention mask to allow for bidirectional context and ensures that each embedding in the sequence is informed by both preceding and succeeding tokens. Across all models, the resulting tensors are of size `embedding dimension × number of tokens` format.

A.2 Dynamical system fitting

Because the dimension of each embedding varies between models, we take the observable from (1) to be $\mathbf{y}_k = \Phi^\top H(\mathbf{x}_k)$ where $\Phi \in \mathbb{R}^{M \times 500}$ is comprised of the 500 most dominant SVD modes from the fitting data, as gauged by the singular values of the covariance matrix of the fitting data. This standardizes the dimension of the observables and allows for the investigation of cross-embedding generalization (Section 4.2.3). Taking the observable to be $H(\mathbf{x}_k)$ results in negligible differences in the classification accuracy. The lifting function f_{lift} takes polynomial combinations up to order 4 of a subset of the most dominant SVD modes. For the HaluEval dataset, 2000 entries are used for fitting the data-driven models with the remaining 8000 datasets used for testing. The WikiBio and FELM datasets have substantially fewer samples necessitating the use of a larger portion for fitting. For the WikiBio dataset, 206 entries are used for fitting and 32 are used for testing. For the FELM dataset, 746 entries are used for fitting and 100 total datasets (with 20 each from the science, world knowledge, reasoning, math, and writing categories) are used for testing. For each dataset, the division of the fitting and testing samples does not meaningfully alter the results. AUC curves are obtained by sweeping η from (8) over plausible values and computing true/false positives and negatives over this sweep. F_1 score and balanced accuracy is reported for η that maximizes the reported metric.

B Assumptions and Implications from a Dynamical System Perspective

Our method posits the existence of separate manifolds $\mathcal{M}_h, \mathcal{M}_c \in \mathbb{R}^N$ on which the internal state variables of hallucinated or non-hallucinated responses evolve. Numerical results are consistent with this hypothesis, yielding dynamical models with differences that can be exploited for classification. Nonetheless, other explanations could account for the differences in the dynamics. For instance, it is possible that different prompts to the LLM could yield different model parameters that modulate the dynamical system itself. From the perspective of the classification algorithm developed in this work, determining the exact mechanism giving rise to the different dynamics is not essential; ultimately it only matters whether these differences can be detected. Explicit analysis of the internal state variables and underlying dynamics would shed light on the mechanisms underlying the shifting dynamics and will be the subject of future investigations.

Our proposed methodology assumes that the LLM can be viewed as a dynamical system of the form (1). This specific formulation does not take stochasticity (e.g., temperature) into account which is reflected in the state-to-token mapping given by G_1 . Modifications to the proposed algorithm could be implemented, for instance, with debiasing algorithms to account for the influence of noise [48], [49]. Despite the fact that we do not consider stochasticity in the algorithm presented here, the resulting approach still does find variations in the dynamics of hallucinated and factual responses that can be exploited for classification. Additionally, since our method focuses on the temporal evolution of observations, rather than on the discrete token selection, it is inherently more robust to temperature variations that rely purely on token probabilities.