

ISRS-DETR: Detection-Guided Click Propagation for Remote Sensing Interactive Segmentation

Thanh Duc Pham¹, Anh Nguyen², Duong Duc Hieu¹, Minh-Tan Pham^{3*}

¹FPT Software AI Center, Vietnam

²Department of Computer Science, University of Liverpool, UK

³IRISA, Université Bretagne Sud, UMR 6074, 56000 Vannes, France
thanhp29@fpt.com, minh-tan.pham@irisa.fr

Abstract

Interactive segmentation reduces the prohibitive cost of pixel-level annotation by allowing users to delineate objects with a few clicks. However, applying this paradigm directly to remote sensing imagery is non-trivial: ultra-high resolutions, small object sizes, and sparse spatial distributions all degrade segmentation quality. Recent work has addressed the resolution barrier and achieved competitive results in interactive segmentation for remote sensing (ISRS). However, they treat all instances of a class within an image as a single objective target. Consequently, interactions spent on one object contribute nothing to its same-class neighbours, and satisfactory masks may demand up to 40 clicks per image, hindering the practicality of these frameworks. We observe that remote sensing scenes exhibit markedly strong inter-object correlation, meaning a single clicked object is highly informative about the rest of its category. Building on this, we propose ISRS-DETR, a detection-guided interactive segmentation framework that injects object-level evidence into both training and inference. Our ISRS-DETR employs an RF-DETR decoder with the interactive segmentation backbone to localise co-occurring same-class objects, and introduces a Dynamic Top-K Click Selection strategy that retains only reliable proposals and converts each into a simulated click, so one user interaction propagates across an entire class. Experiments on three standard remote sensing benchmarks show that ISRS-DETR achieves state-of-the-art accuracy while substantially reducing Number of Clicks per Image (NoC-I). All codes and data splits will be released for reproducibility upon acceptance.

Introduction

Segmentation is a common computer vision task in the real world implementations, and in many applications such as medical, these demands emerge simultaneously. In spite of great success in varied visual data, traditional image segmentation commonly require substantial precise annotated data. Nevertheless, acquiring pixel-level annotations is not only labor-intensive but also time-consuming. To this end, interactive segmentation is proposed to address this problem (Xu et al. 2016). It enables users to select objects and delineate them easily with minimal user interacts. Numerous interactive image segmentation approaches have been widely applied to annotate large-scale image datasets, which support the success of deep models in various applications, including

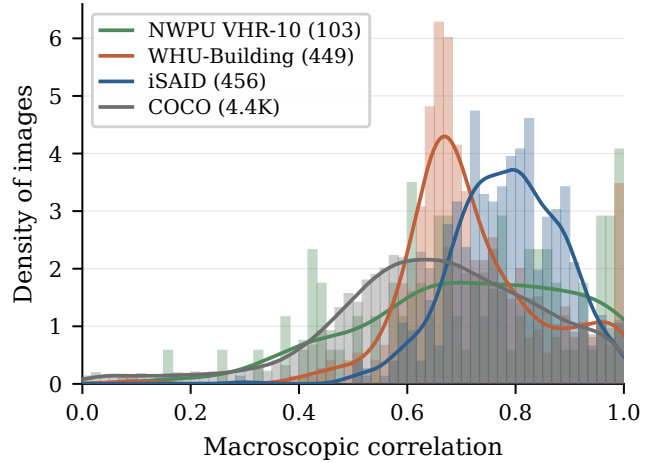


Figure 1: Statistical distribution of macroscopic correlation (MC) on the three remote sensing benchmarks compared with the MS-COCO benchmark. Values in brackets indicate the number of evaluated images. The remote sensing datasets concentrate at markedly higher MC values, indicating stronger inter-object position dependence than natural-image scenes.

autonomous driving (Cordts et al. 2016), and medical imaging (Isensee et al. 2021).

However, applying interactive segmentation directly to remote sensing remains challenging. Compared with natural images, remote sensing imagery poses unique challenges for interactive segmentation. In particular, the presence of its ultra-high resolution, small object sizes, and sparse spatial distribution of objects have been recognised as a key factor contributing to the performance degradation (Cheng, Han, and Lu 2017; Zhu et al. 2017; Audebert, Le Saux, and Lefèvre 2018) observed in segmentation models. Due to the importance and the difficulty, **interactive segmentation in remote sensing image (ISRS)** has attracted much research attention. Recently, Lin et al. (2026) introduced Crosscut, an interactive framework that divides the image into patches and encodes the click map into a global prompt, which is subsequently injected back into each patch to facilitate information exchange.

*Corresponding author.

While being the first to effectively solved the ultra high image resolution challenge in ISRS, Crosscut suffers from several issues. (i) First, Crosscut overlooks a fundamental characteristic of remote sensing imagery: the relationship between multiple objects within the same image. In particular, during both training and inference, they considered all samples of the same class as a single segmentation target. As a result, user interactions performed on one object provide no benefit for segmenting other instances of the same category, despite the strong semantic and visual relationships among them. (ii) Second, despite achieving competitive performance in terms of interaction efficiency, CrossCut still requires up to 40 clicks per image to obtain satisfactory segmentation masks. This substantial interaction cost limits the efficiency and scalability of existing ISRS systems in practical implementations.

Moreover, following Hou et al. (2024), we quantify the Pearson Correlation Coefficient (PCC) between object representations within the same image; as shown in Fig. 1, remote sensing scenes exhibit markedly strong inter-object correlation, indicating that a clicked object is highly informative about its same-class neighbours.

Motivated by the above observations, we introduce ISRS-DETR, a detection-guided interactive segmentation model built on a DETR-based detector, with dedicated components to address in ISRS setting. Unlike conventional approaches that treats all instances of the same class as a single segmentation objective, ISRS-DETR further incorporates object-level representations during both training and inference, enabling interactions on one object to benefit the segmentation of other semantically related instances. First, we integrate the decoder of the RF-DETR ((Robinson et al. 2026)) with the interactive segmentation framework in order to localise the bounding boxes of same-class objects co-occurring within the image. Second, to control the quality of these proposals, we propose a Dynamic Top-K Box Selection strategy, which retains only the most reliable boxes; each selected box is then converted into a simulated click, so that a single user interaction propagates to all instances of the corresponding class.

Extensive experiments on three challenging remote sensing interactive segmentation benchmarks demonstrate that ISRS-DETR consistently outperforms existing state-of-the-art methods. To assess both practical usability and the per-object accuracy alone, we adopt Number of Clicks per Image (NoC-I) as our primary evaluation metric. All quantitative comparisons and qualitative visualizations verify the effectiveness of our object-aware design in improving segmentation quality while substantially reducing user interactions. These results establish ISRS-DETR as a new state-of-the-art framework for interactive segmentation in remote sensing imagery.

Overall, our contributions are summarized as follows:

- We identify and empirically characterize a fundamental limitation of existing ISRS methods: they collapse all same-class instances into a single segmentation target and therefore cannot exploit inter-object relationships. Hence, we propose ISRS-DETR, a detection-guided interactive segmentation framework for remote sensing imagery.

- We introduce a Dynamic Top-K Box Selection strategy that adaptively retains only high-confidence proposals and converts each into a simulated click, propagating a single user interaction across an entire class while suppressing the error accumulation caused by unreliable detections.
- We adopt Number of Clicks per Image (NoC-I) as a primary evaluation protocol that reflects the practical annotation cost of scene-scale interaction, complementing conventional per-object metrics. Extensive experiments on three remote sensing benchmarks show that ISRS-DETR achieves state-of-the-art segmentation quality while substantially reducing the required user interactions.

Related Work

Interactive Image Segmentation.

Recently, interactive image segmentation has witnessed remarkable advancements. Early frameworks (Boykov and Funka-Lea 2006; Blake et al. 2004; Rother, Kolmogorov, and Blake 2004; Vicente, Kolmogorov, and Rother 2008; Veksler 2008) addressed this challenge as a graph-based optimization problem. However, these traditional methods primarily rely on handcrafted features, resulting in suboptimal performance. With the rise of deep learning, Xu et al. (2016) first introduced a click simulation strategy and preprocessed the simulated clicks via a distance transform and combining them with the original image as the model input. Many recent work have attempted to integrate ViTs into interactive segmentation (Chen et al. 2022; Liu et al. 2023; Lee, Lee, and Kim 2024), achieving competitive performance on natural images. Another line of works is SAM (Kirillov et al. 2023), which was trained on a large dataset and supports flexible prompts such as points and boxes. These advances highlight the increasing attention devoted to interactive segmentation.

Remote Sensing Image Segmentation

Remote sensing image segmentation plays a fundamental role in earth observation and geospatial science. Numerous research has been devoted to address this challenge. Conventional CNN-based methods have achieved remarkable success by leveraging large-scale pixel-wise annotations. However, acquiring such annotations is labor-intensive, time-consuming, and expensive, particularly for high-resolution remote sensing images that contain numerous small objects. Prior work has been done to reduce the annotation cost of labeling images in remote sensing imagery such as: semi-supervised and interactive segmentation. (Shan et al. 2025) adapts SAM (Kirillov et al. 2023) to remote sensing imagery through LoRA fine-tuning and boundary refinement, improving mask quality for moving objects. Moreover, AeroSeg (Dutta et al. 2025) enhances open-vocabulary remote sensing segmentation by integrating SAM guidance, orientation-invariant CLIP features, and semantic-preserving refinement. CrossCut (Lin et al. 2026) using flexible patch division strategies to creating global click prompt, that effectively captures global information across patches. Despite all the progress, existing methods largely overlook the relationships among objects that co-occur within the same image.

DETR-based Detectors

Carion et al. (2020) first proposed an end-to-end Transformer-based object detector (DETR), which eliminates the need for hand-crafted anchors and non-maximum suppression (NMS). Although DETR has achieved competitive performance, it suffers from slow convergence, high computational cost, and limitations in the role of decoder queries. Another line of work addresses the severe problems arising from the instability of the Hungarian matching algorithm. DN-DETR (Li et al. 2022) introduces a novel training method that speeds up DETR training through denoising queries and attention masks. Building upon this idea, DINO (Zhang et al. 2022) proposed Contrastive DeNoising Training to enhance the model’s ability to suppress confusion caused by multiple anchors referring to the same object using "negative queries." Moreover, Relation DETR (Hou et al. 2024) addressed the significance of object positional relationships in the detection task by introducing a position relation encoder with attention refinement. However, previous works remain computationally intensive and largely neglect the problem of real-time inference. RT-DETR (Zhao et al. 2024) and RF-DETR (Robinson et al. 2026) are the only Transformer-based object detectors capable of real-time inference while still achieving competitive performance.

Method

Overall Structure

The overall architecture of our ISRS-DETR builds upon the CrossCut and RF-DETR frameworks. The image encoder is a plain ViT-B with a simple feature pyramid network (FPN) to produce multi-scale features similar to the original base-lines. These features are then shared by two branches: (i) the segmentation branch follows CrossCut, decoding per-patch masks that are reassembled into final prediction, (ii) the detection guide branch employ the RF-DETR’s decoder with dedicated components to propagate a single user click to every remaining appropriate instance of the same category. An overview of the structured of our proposed framework is illustrated in Figure 2.

Segmentation Branch

Following CrossCut (Lin et al. 2026), the input image is resized to $H \times H$ ($H = 448 \times n$), then split into an $n \times n$ grid of non-overlapping patches $\{\mathbf{I}_1, \dots, \mathbf{I}_{n^2}\}$. Each patch is embedded by the plain ViT image encoder E_{img} , and the click maps concatenated with the previous mask are embedded by DistMap E_{ext} . To avoid inter-patch information isolation, a cross-patch branch derives a global Cross-Patch Prompt Embedding $\mathbf{P}$ from the click semantics and splits it into per-patch prompts $\{\mathbf{P}_i\}_{i=1}^{n^2}$, so that every patch receives guidance even when it contains no click. The three terms are fused by element-wise addition,

$$\begin{aligned}\mathbf{F}_i &= E_{img}(\mathbf{I}_i) + E_{ext}(\mathbf{C}_i) + \mathbf{P}_i, \\ \mathbf{S}_i &= \text{Decoder}(\text{Backbone}(\mathbf{F}_i)).\end{aligned}\quad (1)$$

where $\mathbf{F}_i$ is the fused feature, the Backbone is the a shared ViT and the Decoder is the stacks of $\text{Conv}_{1 \times 1}$. The patch

predictions are concatenated back into final prediction mask $\mathbf{S}_t^{(n)}$.

Detection Guide Branch

Motivation. Remote sensing imagery exhibits strong inter-object correlations, where multiple instances of the same semantic category frequently appear within a single scene. Consequently, a user click on one object naturally provides valuable information about other objects of the same class. However, existing interactive frameworks neglect this property, because they treat every object of the same class as the single target, therefore allowing a user interaction to benefit only the clicked instance. Consequently, segmenting the remaining instances of that category commonly requires a fresh click, even though those instances share identical semantics and appearance. To this end, we introduce a *detector-guided simulated click* strategy that propagates the user interaction to every appropriate instances by generating simulated clicks.

Detector Architecture. To identify potential same class instances, we introduce an object detection branch based on RF-DETR (Robinson et al. 2026). Since the fused feature $\mathbf{F}_i$ of Eq. (1) already encodes both image content and click features, we reuse only the decoder part of the RF-DETR. Following (Robinson et al. 2026), the decoder employs $N_q = 300$ learnable object queries.

During training, pseudo ground-truth bounding boxes are obtained by extracting the axis-aligned bounding box of every connected component in the segmentation mask. To stabilize Hungarian matching and accelerate query convergence, we adopt the denoising-query strategy throughout training. Furthermore, during the first 20 epochs, we additionally apply the position-relation attention refinement of Relation-DETR (Hou et al. 2024). The detector is trained using the standard DETR objective function $\mathcal{L}_{\text{detr}}$, which consists of the classification loss, ℓ_1 regression loss, and GIoU loss.

Box Filtering Every box, that is below a confidence threshold θ or below the minimum side length, is discarded. Moreover, after the detector define the category of the box containing the user click defines the target class $\hat{c}$, all boxes detected to be in different classes $c_j \neq \hat{c}$ are removed. Finally, we employ non-maximum suppression (NMS) to eliminate duplicated detections, resulting in a filtered proposal set: $\mathcal{B} = \{\mathbf{b}_j\}_{j=1}^{N_b}$, where N_b is the number of the proposed bounding boxes.

Simulated Click Generation Let $\mathcal{U}$, be the user click and $\mathbf{b}_s$ the box containing it. We first compute the relative location of the user click inside the source bounding box and then project this relative position to every proposal box in $\mathcal{B}$. Because objects in remote sensing imagery are arbitrarily oriented while the proposals are axis-aligned, so each box $\mathbf{b}_j \in \mathcal{B}$ can produce four candidate click locations with respect to four possible orientation assumptions. Collecting candidates from all proposals yields: $\mathcal{C} = \{\mathbf{u}_j\}_{j=1}^{4 \times N_b}$, which is the set of all proposed clicks.

Dynamic Top- K Simulated Click Selection Not every candidate click corresponds to a valid object instance. Di-

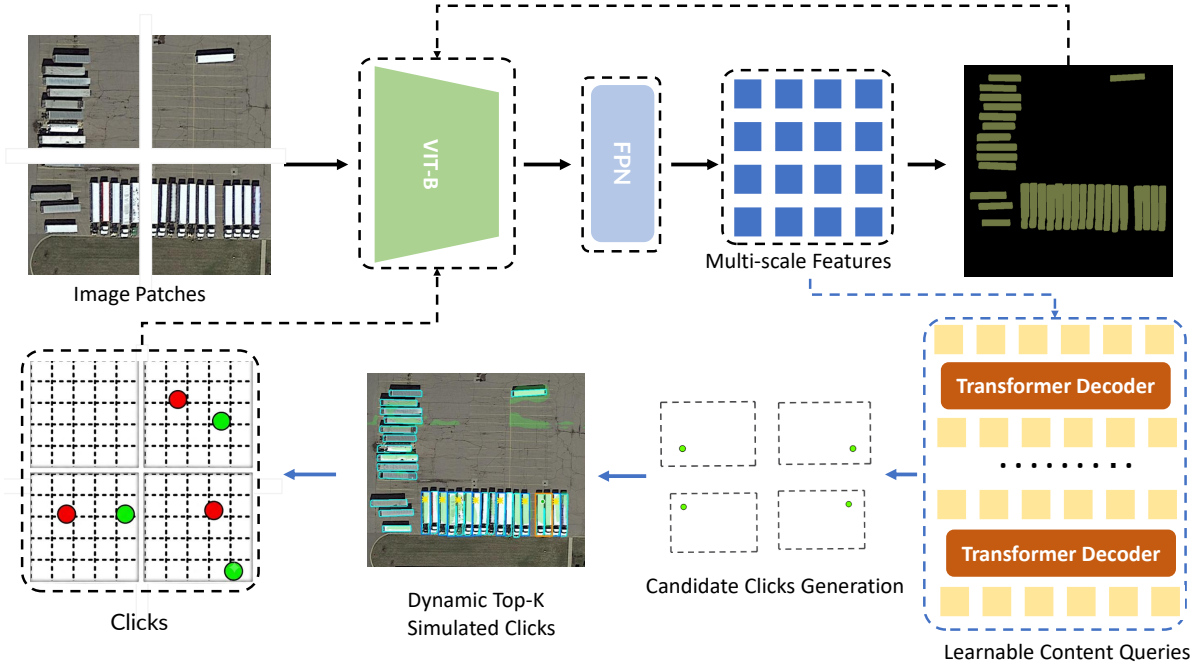


Figure 2: An overview of our ISRS-DETR framework: Our framework consists of two branches: (i) The segmentation branch follows CrossCut to predict patch-level masks and reconstruct the final segmentation map. (ii) The detection guide branch leverages the RF-DETR decoder with dedicated modules to propagate a single user click to all remaining similar instances of the same category.

rectly converting all candidate clicks into simulated click would introduce noisy interacts that may degrade the segmentation performance. Furthermore, it is inappropriate to use a fixed top-k number of simulated clicks, as the number of valid same-class objects varies considerably across images.

To address these issues, we propose a "Dynamic Top- K Simulated Click Selection" strategy. First, for each candidate click $\mathbf{u}_j$, we obtain its feature representation $\mathbf{v}_j$ by bilinearly interpolating the fused feature map $\mathbf{F}_i$. Let $\mathbf{v}$ denote the feature vector at the original user click. Then we calculate the similarity of a candidate to the user click by using the inner product:

$$s_{u_j, u} = \langle \mathbf{v}_j, \mathbf{v} \rangle, \quad (2)$$

The similarities are normalized by softmax function,

$$p_{u_j, u} = \frac{\exp(s_{u_j, u})}{\sum_{k=1}^{4 \times N_b} \exp(s_{u_k, u})} = \frac{\exp(\langle \mathbf{v}_j, \mathbf{v} \rangle)}{\sum_{k=1}^{4 \times N_b} \exp(\langle \mathbf{v}_k, \mathbf{v} \rangle)}, \quad (3)$$

After sorting the normalized scores in ascending order, we have a ordered list $\tilde{S} = \tilde{s}_{(1)} \leq \dots \leq \tilde{s}_{(4 \times N_b)}$. We observe that the score distribution typically exhibits a sharp transition between highly similar candidates and ambiguous ones due to the effect of softmax function, the curve of $\tilde{S}$ appears alike a sigmoid function. Hence, the optimal number of simulated clicks should be preserved is the minimum second-order

discrete derivative of the sorted $\tilde{S}$ curve

$$\begin{aligned} k^* &= \arg \min_{1 \leq k \leq 4N_b} [(\tilde{s}_{(k+1)} - \tilde{s}_{(k)}) - (\tilde{s}_{(k)} - \tilde{s}_{(k-1)})] \\ &= \arg \min_{1 \leq k \leq 4N_b} (\tilde{s}_{(k+1)} - 2\tilde{s}_{(k)} + \tilde{s}_{(k-1)}) \end{aligned} \quad (4)$$

The top- k^* candidates with the highest similarity scores are retained as the final simulated clicks.

These simulated clicks are injected into the subsequent interaction round as additional positive prompts. Since they are generated automatically from a single positive user click, they are not counted toward the interaction budget. Consequently, one real user interaction can be effectively propagated to multiple reliably detected instances of the same class.

Training Procedures

Training Procedure: Algorithm 1 presents the end-to-end training procedure of ISRS-DETR. Following existing interactive segmentation methods, Φ is trained on a simulated interaction sequence.

1. **Initialization** (Line 1): The set of user click $\mathcal{U}$ is initialized, the simulated click set $\mathcal{U}_{sim}$ is empty, and the previous predicted mask $\mathbf{S}_0$ is set to zero.
2. **Iterative Clicks** (Lines 3–8): The model is finetuned on a simulated interaction sequence. In each iteration, the patch features are fused as in Eq. (1) to predict $\mathbf{S}_t$, which is compared with $\mathbf{Y}$ to place the next click on the largest error region.

3. **Candidate Click Generation** (Lines 10–16): After, the detector generates the set of proposal boxes $\mathcal{B}_{raw}$, we filter out the low-quality boxes. In particular, all of the low-confidence boxes (confidence $< \theta$), boxes with low side lengths, and boxes whose predicted class differs from the user-selected target class $\hat{c}$ are discarded. Finally, we apply non-maximum suppression (NMS) to remove duplicate detections. Each box contributes four orientation candidates to $\mathcal{C} = \{\mathbf{u}_j\}_{j=1}^{4 \times N_b}$.
4. **Simulated Click Generation** (Lines 10–1): We rank candidate clicks by the feature similarity to the user click. Next, we determine the adaptive threshold k^* from the sorted similarity curve, and use the top- k^* candidates as simulated clicks for the next interaction.

Our training objective function for the iteration t^th is as below:

$$\mathcal{L} = \mathcal{L}_{seg}(\mathbf{S}_{T+1}, \mathbf{Y}) + \mathcal{L}_{detr}(\mathcal{B}_{raw}, \mathcal{B}^{gt}), \quad (5)$$

where $\mathcal{L}_{seg}$ is the normalized focal loss and $\mathcal{L}_{detr}$ is the set of the standard DETR losses.

Experiments

Experimental Settings

Datasets: We conduct experiments on 3 benchmark datasets iSAID (Waqas Zamir et al. 2019), WHU-Building (Maggiori et al. 2017), NWPU VHR-10 (Cheng et al. 2014) to assess the model performance.

1. **iSAID:** This is a large-scale aerial image dataset for instance and semantic segmentation, derived from DOTA (Xia et al. 2018). It includes 1,411 images for training and 458 images for validation (image sizes from 800×800 up to 4000×13000), and we use the validation images for testing. It covers 15 object categories with dense, multi-oriented instance masks, and is the most crowded of the three benchmarks, with hundreds of instances per scene in categories such as *small vehicle* and *ship*.
2. **WHU-Building:** It is a building extraction dataset covering Christchurch, New Zealand, containing 8,188 aerial tiles of 512×512 pixels at 0.3 m/pixel and roughly 187,000 annotated building footprints. The official protocol splits it into 4,736 training, 1,036 validation, and 2,416 test tiles; as only the training and validation subsets were available to us, we train on the training split and report results on the validation split. It is a single-category dataset in which buildings appear as dense, repetitive rows of near-identical instances, which makes it the setting where class-aware click propagation matters most.
3. **NWPU VHR-10:** It is a very-high-resolution optical remote sensing dataset with 800 images, of which 650 positive images contain annotated objects from 10 geospatial categories. Images are collected from Google Earth (0.5–2 m/pixel) and pan-sharpened Vaihingen imagery (0.08 m/pixel), with sizes ranging from roughly 500×500 to 1100×1100 pixels. We use the instance-level mask annotations of Cheng et al. (2014) and follow their split of the 650 annotated images into training and test sets.

Evaluation Metrics: Conventional interactive segmentation methods typically report the Number of Clicks (NoC@70, NoC@75, and NoC@80), which measures the average number of user clicks required to achieve a target IoU. However, this metric is designed for few object interactive segmentation and does not adequately reflect the usability of interactive segmentation in remote sensing images, where numerous instances of the target category often co-exist within a single scene. Although a method may achieve a low NoC score, users still have to interact with a substantially large number of clicks (often 40 clicks or more) to segment an entire image. To better evaluate both the effectiveness and practical usability of interactive segmentation for remote sensing, we introduce NoC-I (Number of Clicks per Image). Similar to the traditional NoC metric, NoC-I measures the number of user clicks required to reach a target IoU threshold of every target instances of that image. Consequently, NoC-I provides a more realistic assessment of the user interaction required in multi-object remote sensing scenarios. Moreover, we also plot the mean Intersection over Union (mIoU) score as a function of the number of clicks and report the area under the curve (AUC).

Implementation Details: All experiments are conducted on four NVIDIA A100 GPUs. Following previous work (Lee, Lee, and Kim 2024), we train our model using all three datasets (iSAID, WHU-Building, NWPU VHR-10) with a ratio of 0.4:0.35:0.25. Moreover, we apply random resizing, random cropping, horizontal flipping, random rotation, and brightness adjustment for data augmentation. During training, the top-300 features from the fused feature map $\mathbf{F}_i$ are selected to initialize the positional queries (Robinson et al. 2026) in the detection branch. To improve the stability of Hungarian matching, we further adopt denoising queries and the attention refinement with position relation proposed in Relation-DETR (Hou et al. 2024). All models are trained for 55 epochs on the three benchmark datasets using the Adam optimizer (Kingma and Ba 2017) with an initial learning rate of 5×10^{-5} .

Results & Analysis

In this section, we present the main results of our experiments, highlighting the performance of ISRS-DETR compared to state-of-the-art baselines.

ISRS-DETR versus SOTA baselines Table 1 reports NoC-I on the three benchmark datasets. Our method achieves the best score in all nine settings, saving 9.64 clicks per image on average relative to the previous baseline in each column. The largest improvement is observed on WHU-Building, where our method requires only 10.71 clicks to achieve 70% IoU, compared with 38.69 clicks for CrossCut, a reduction of nearly 28 clicks per image. This substantial gain aligns with our design motivation. WHU-Building contains a single object category with numerous visually similar instances in each scene (Figure X), allowing our class-aware propagation mechanism to leverage a single user interaction to guide the segmentation of all same-class instances. On iSAID, which contains 16 object categories with fewer in-

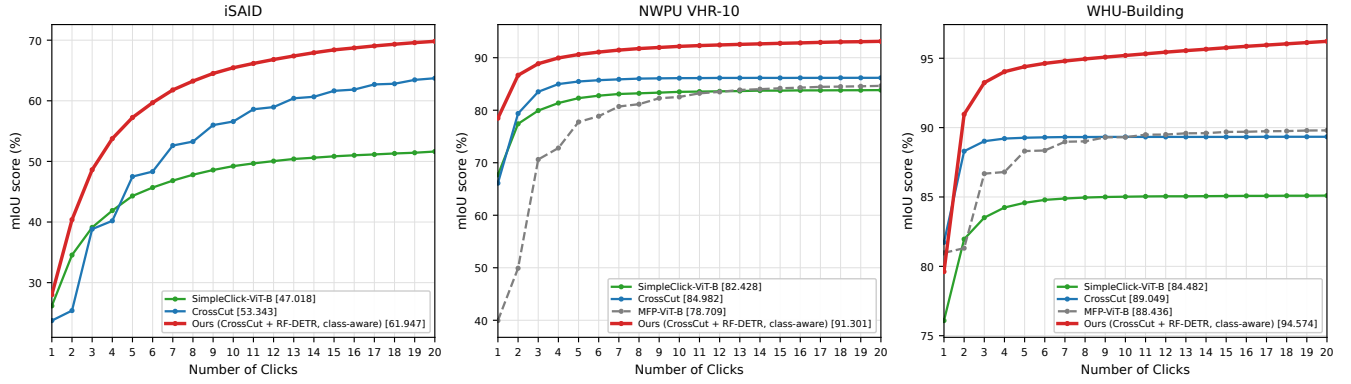


Figure 3: Comparison of the mean IoU scores according to the number of clicks on the iSAID (Waqas Zamir et al. 2019), NWPU VHR-10 (Cheng et al. 2014), and WHU-Building (Maggiori et al. 2017) datasets. All models are trained on the same mixture of the three datasets. The legend of each graph contains the AuC score for the corresponding algorithm.

Table 1: The NoC per-image (NoC-I) scores of the proposed ISRS-DETR and existing interactive segmentation baselines on the iSAID (Waqas Zamir et al. 2019), WHU-Building (Maggiori et al. 2017), and NWPU VHR-10 (Cheng et al. 2014) datasets. Columns report the target IoU ratio in percent. The best and second-best results in each column are **boldfaced** and underlined, respectively. [†] indicates using all three above dataset for training.

Algorithm	Backbone	iSAID			WHU-Building			NWPU VHR-10		
		70	75	80	70	75	80	70	75	80
SimpleClick [†] (Liu et al. 2023)	ViT-B	47.65	50.97	54.24	50.58	64.24	95.68	16.35	23.37	31.77
MFP [†] (Lee, Lee, and Kim 2024)	ViT-B	34.33	38.04	45.50	39.44	42.32	47.61	<u>8.52</u>	<u>11.35</u>	19.66
CrossCut [†] (Lin et al. 2026)	ViT-B	<u>33.18</u>	<u>36.73</u>	<u>41.31</u>	<u>38.69</u>	<u>41.22</u>	<u>45.95</u>	9.71	11.40	<u>14.88</u>
ISRS-DETR	ViT-B	28.30	33.10	39.98	10.71	16.58	32.42	6.94	7.78	9.29

stances per category, our method still reduces the interaction cost by 4.88 clicks at 70% IoU.

Comparison of IoU & AUC Figure 3 plots mIoU against the number of clicks, with AUC in the legend. Our method attains the highest mIoU at every click count on all three datasets and the highest AUC (61.95 on iSAID, 91.30 on NWPU VHR-10, 94.57 on WHU-Building), exceeding the strongest baseline by 8.60, 6.32 and 5.53 respectively. The advantage is largest in the low-click regime: with only two clicks we reach 91.0 mIoU on WHU-Building and 86.8 on NWPU VHR-10, already above what CrossCut attains with twenty, and four clicks on iSAID surpass SimpleClick’s twenty-click score.

Visualization Results

Figure 4 compares the four methods on a commercial aircraft from NWPU VHR-10 at an equal budget of five clicks as a hard case. Row (c) separates the methods sharply: SimpleClick collapses the object to a fuselage blob and amputates both wings, CrossCut and MFP recover much of the wing span but leave the tips and tailplane fragmentary, and ISRS-DETR returns a single connected airframe with both wings and tail surfaces resolved.

	iSAID	WHU-Building	NWPU VHR-10
Avg simulated clicks	7.33	2.01	0.59
Click amplification	8.33×	3.01×	1.59×

Table 2: Effectiveness of the detector branch. For each real user click, the branch propagates supervision to same-class instances, yielding the reported number of simulated clicks. Amplification is $1 + \text{simulated clicks}$, i.e. the total supervision per interaction relative to a per-object baseline.

Ablation Study

Effectiveness of Detector Table 2 reports the average number of simulated clicks the detector branch contributes per class episode. These clicks are free: they are generated by transferring the user’s seed onto detected co-class instances and do not count against the interaction budget. The amplification factor varies substantially across datasets, and the ordering is informative. iSAID contains many instances per class in each image tile and a large number of object classes, giving propagation the greatest opportunity to improve performance.

Impact of Proposal Quality The Detection Guide Branch relies on class-labelled region proposals, so its benefit is

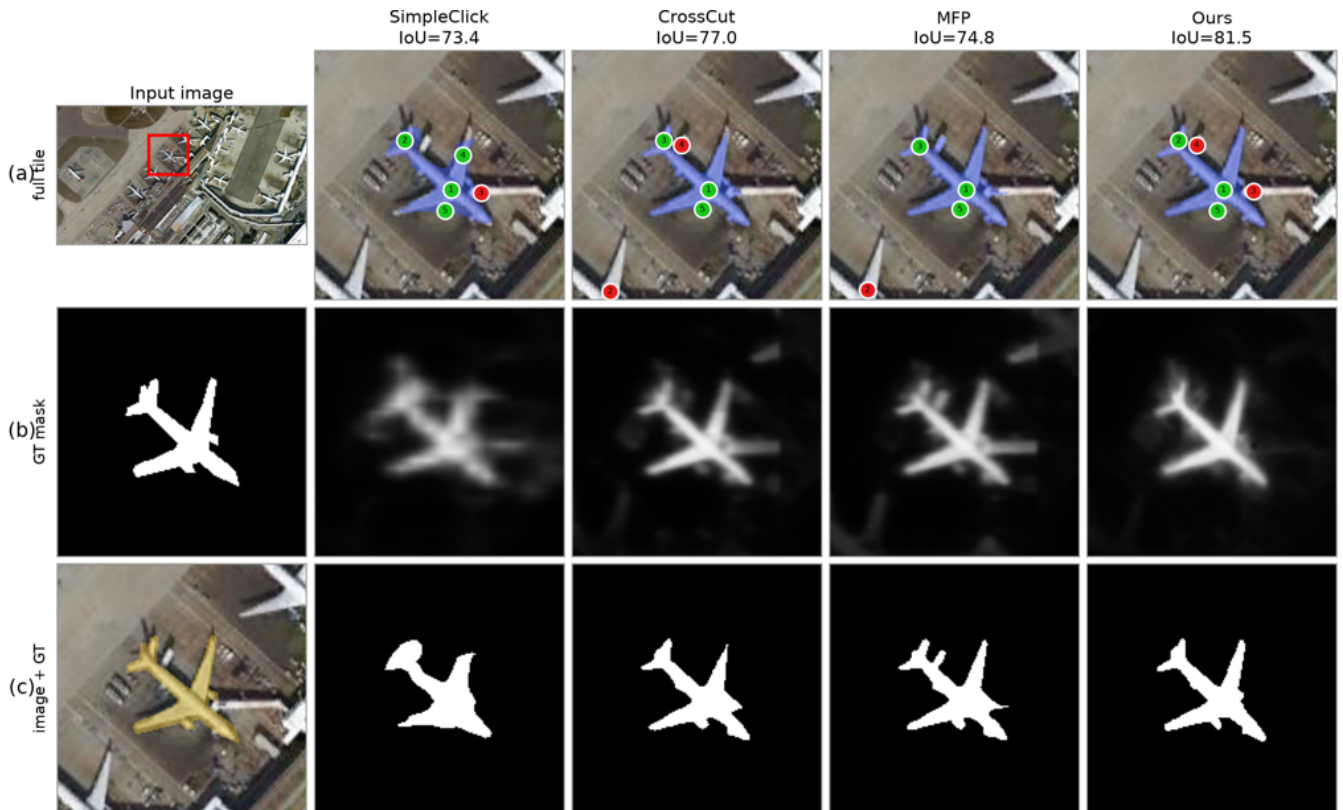


Figure 4: Qualitative comparison on NWPU VHR-10 at the same interaction budget of 5 clicks. The leftmost column shows the input tile (the red box marks the crop used in the other columns), the ground-truth mask of the target object, and their overlay. For each method, row (a) overlays the prediction and the simulated clicks (green: foreground, red: background, numbered in the order they were placed), row (b) shows the probability map from the previous round P^{t-1} , and row (c) the current binary mask Y^t . All methods use the same automatic clicking strategy; because each method’s own prediction determines where the next click falls, click locations differ across columns. Our method recovers the object boundary that the baselines leave fragmented, despite receiving the same number of clicks.

bounded by proposal quality. To isolate this factor we replace the RF-DETR-XL predictions with ground-truth boxes, which serves as an oracle upper bound on the branch. As can be seen from Table 3, while our full model therefore does not yet realize the full potential of detector guidance, we regard this gap as encouraging rather than limiting. Even with an off-the-shelf detector operating at its own accuracy on dense urban scenes, class-aware propagation already reduces NoC-I by nearly 28 clicks per image over the strongest baseline (Table 1). These results suggest that detector-guided interaction is a promising direction for scene-scale interactive annotation.

Conclusion

We presented a class-aware interactive segmentation framework for remote sensing imagery, coupling a CrossCut segmentation path with an RF-DETR-XL detection head so that a single user click propagates to all co-class instances in a scene. Experiments on iSAID, WHU-Building, and NWPU VHR-10 show consistent gains under the per-image interaction protocol, with the largest margins where instance den-

Table 3: Effect of proposal quality on the Detection Guide Branch, evaluated on WHU-Building (Maggiori et al. 2017).

Proposals	mIoU		NoC-I		
	@1	@5	70	75	80
RF-DETR-XL (ours)	68.64	72.09	10.71	16.58	32.42
GT proposals	68.64	82.37	4.99	6.86	11.94

sity is highest, confirming that per-object interaction does not scale to scene-level annotation, and that class-level guidance, rather than stronger per-object refinement alone, is what recovers the cost. Qualitatively, our method resolves thin, low-contrast structures that baselines leave fragmented at equal click budgets. Remaining limitations are the dependence on detector quality, which bounds propagation on categories the detector localizes poorly, and a narrowing advantage at high IoU targets, indicating that class-aware guidance accelerates instance coverage more than boundary refinement.

Acknowledgments

References

- Audebert, N.; Le Saux, B.; and Lefèvre, S. 2018. Beyond RGB: Very high resolution urban remote sensing with multimodal deep networks. *ISPRS Journal of Photogrammetry and Remote Sensing*, 140: 20–32.
- Blake, A.; Rother, C.; Brown, M.; Perez, P.; and Torr, P. 2004. Interactive image segmentation using an adaptive GMMRF model. In *European Conference on Computer Vision (ECCV)*.
- Boykov, Y.; and Funka-Lea, G. 2006. Graph cuts and efficient N-D image segmentation. *International Journal of Computer Vision (IJCV)*.
- Carion, N.; Massa, F.; Synnaeve, G.; Usunier, N.; Kirillov, A.; and Zagoruyko, S. 2020. End-to-End Object Detection with Transformers. arXiv:2005.12872.
- Chen, X.; Zhao, Z.; Zhang, Y.; Duan, M.; Qi, D.; and Zhao, H. 2022. FocalClick: Towards practical interactive image segmentation. In *IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*.
- Cheng, G.; Han, J.; and Lu, X. 2017. Remote sensing image scene classification: Benchmark and state of the art. *Proceedings of the IEEE*, 105(10): 1865–1883.
- Cheng, G.; Han, J.; Zhou, P.; and Guo, L. 2014. Multi-class geospatial object detection and geographic image classification based on collection of part detectors. *ISPRS Journal of Photogrammetry and Remote Sensing*, 98: 119–132.
- Cordts, M.; Omran, M.; Ramos, S.; Rehfeld, T.; Enzweiler, M.; Benenson, R.; Franke, U.; Roth, S.; and Schiele, B. 2016. The Cityscapes Dataset for Semantic Urban Scene Understanding. arXiv:1604.01685.
- Dutta, S.; Vasim, A.; Gole, S.; Rezatofighi, H.; and Banerjee, B. 2025. AerOSeg: Harnessing SAM for Open-Vocabulary Segmentation in Remote Sensing Images. arXiv:2504.09203.
- Hou, X.; Liu, M.; Zhang, S.; Wei, P.; Chen, B.; and Lan, X. 2024. Relation DETR: Exploring Explicit Position Relation Prior for Object Detection. In *Computer Vision – ECCV 2024*, Lecture Notes in Computer Science, 89–105. Springer.
- Isensee, F.; Jaeger, P. F.; Kohl, S. A.; Petersen, J.; and Maier-Hein, K. H. 2021. nnU-Net: a self-configuring method for deep learning-based biomedical image segmentation. *Nature methods*, 18(2): 203–211.
- Kingma, D. P.; and Ba, J. 2017. Adam: A Method for Stochastic Optimization. arXiv:1412.6980.
- Kirillov, A.; Mintun, E.; Ravi, N.; Mao, H.; Rolland, C.; Gustafson, L.; Xiao, T.; Whitehead, S.; Berg, A. C.; Lo, W.-Y.; et al. 2023. Segment anything. In *IEEE/CVF International Conference on Computer Vision (ICCV)*.
- Lee, C.; Lee, S.-H.; and Kim, C.-S. 2024. MFP: Making Full Use of Probability Maps for Interactive Image Segmentation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 4051–4059.
- Li, F.; Zhang, H.; Liu, S.; Guo, J.; Ni, L. M.; and Zhang, L. 2022. Dn-detr: Accelerate detr training by introducing query denoising. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 13619–13627.
- Lin, Z.; Zhou, N.; Wang, Y.; and Zhang, B. 2026. Cross-Cut: Cross-Patch Aware Interactive Segmentation for Remote Sensing Images. In *Proceedings of the AAAI Conference on Artificial Intelligence (AAAI)*.
- Liu, Q.; Xu, Z.; Bertasius, G.; and Niethammer, M. 2023. SimpleClick: Interactive image segmentation with simple vision transformers. In *IEEE/CVF International Conference on Computer Vision (ICCV)*.
- Maggiori, E.; Tarabalka, Y.; Charpiat, G.; and Alliez, P. 2017. Can Semantic Labeling Methods Generalize to Any City? The Inria Aerial Image Labeling Benchmark. In *2017 IEEE International Geoscience and Remote Sensing Symposium (IGARSS)*, 3226–3229.
- Robinson, I.; Robicheckaux, P.; Popov, M.; Ramanan, D.; and Peri, N. 2026. RF-DETR: Neural Architecture Search for Real-Time Detection Transformers. In *International Conference on Learning Representations (ICLR)*.
- Rother, C.; Kolmogorov, V.; and Blake, A. 2004. GrabCut: Interactive foreground extraction using iterated graph cuts. *ACM Transactions on Graphics (TOG)*.
- Shan, Z.; Liu, Y.; Zhou, L.; Yan, C.; Wang, H.; and Xie, X. 2025. ROS-SAM: High-Quality Interactive Segmentation for Remote Sensing Moving Object. arXiv:2503.12006.
- Veksler, O. 2008. Star shape prior for graph-cut image segmentation. In *European Conference on Computer Vision (ECCV)*.
- Vicente, S.; Kolmogorov, V.; and Rother, C. 2008. Graph cut based image segmentation with connectivity priors. In *IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*.
- Waqas Zamir, S.; Arora, A.; Gupta, A.; Khan, S.; Sun, G.; Shahbaz Khan, F.; Zhu, F.; Shao, L.; Xia, G.-S.; and Bai, X. 2019. iSAID: A Large-scale Dataset for Instance Segmentation in Aerial Images. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR) Workshops*, 28–37.
- Xia, G.-S.; Bai, X.; Ding, J.; Zhu, Z.; Belongie, S.; Luo, J.; Datcu, M.; Pelillo, M.; and Zhang, L. 2018. DOTA: A Large-Scale Dataset for Object Detection in Aerial Images. In *The IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*.
- Xu, N.; Price, B.; Cohen, S.; Yang, J.; and Huang, T. S. 2016. Deep interactive object selection. In *CVPR*, 373–381.
- Zhang, H.; Li, F.; Liu, S.; Zhang, L.; Su, H.; Zhu, J.; Ni, L. M.; and Shum, H.-Y. 2022. Dino: Detr with improved denoising anchor boxes for end-to-end object detection. *arXiv preprint arXiv:2203.03605*.
- Zhao, Y.; Lv, W.; Xu, S.; Wei, J.; Wang, G.; Dang, Q.; Liu, Y.; and Chen, J. 2024. DETRs Beat YOLOs on Real-time Object Detection. arXiv:2304.08069.
- Zhu, X. X.; Tuia, D.; Mou, L.; Xia, G.-S.; Zhang, L.; Xu, F.; and Fraundorfer, F. 2017. Deep learning in remote sensing: A comprehensive review and list of resources. *IEEE Geoscience and Remote Sensing Magazine*, 5(4): 8–36.

Supplementary Material

ISRS-DETR: Detection-Guided Click Propagation for Remote Sensing Interactive Segmentation

Macroscopic Correlation of Object Positions

This section details the metric used in Fig. 1 to quantify how strongly the objects within a single image are geometrically related to one another. We adopt the macroscopic correlation (MC) proposed by Hou (Hou et al. 2024) and report it for the three remote sensing benchmarks considered in this work, with MS-COCO (?).

Definition

Let an image I contain N annotated instances, and let the i -th instance be described by its axis-aligned bounding box

$$\mathbf{b}_i = [x_i, y_i, w_i, h_i] \in \mathcal{R}^4, \quad (\text{A1})$$

where (x_i, y_i) is the top-left corner and (w_i, h_i) the box extent, in pixels. Treating the objects of I as the nodes of an undirected graph, we weight the edge between nodes i and j by the absolute Pearson correlation coefficient (PCC) between their box descriptors,

$$\begin{aligned} \rho_{ij} &= |\text{Pearson}(\mathbf{b}_i, \mathbf{b}_j)| \\ &= \frac{\left| \sum_{k=1}^4 (b_{ik} - \bar{b}_i)(b_{jk} - \bar{b}_j) \right|}{\sqrt{\sum_{k=1}^4 (b_{ik} - \bar{b}_i)^2} \sqrt{\sum_{k=1}^4 (b_{jk} - \bar{b}_j)^2}}, \end{aligned} \quad (\text{A2})$$

with $\bar{b}_i = \frac{1}{4} \sum_k b_{ik}$. The macroscopic correlation of the image is the mean edge weight of this graph, i.e. its graph intensity:

$$\text{MC}(I) = \frac{\sum_i \sum_{j \neq i} \rho_{ij}}{N(N-1)}. \quad (\text{A3})$$

Since $\rho_{ij} \in [0, 1]$ and the diagonal is excluded, $\text{MC}(I) \in [0, 1]$. A value of 1 indicates that every pair of boxes is perfectly linearly related, while 0 indicates that no pair carries any mutual positional information. The metric is symmetric ($\rho_{ij} = \rho_{ji}$) and is undefined for $N < 2$.

We compute Eq. A3 for NWPU VHR-10, WHU-Building, iSAID and MS-COCO. Boxes are read directly from the released annotations in COCO format; for iSAID, we use the official available instance annotations, for WHU-Building, we reduce the provided per-building polygons to their corresponding boxes, and for NWPU VHR-10, the standard COCO-converted annotations under the same fixed-seed split used for our experiments.

Equation A2 quantifies the extent to which the position and spatial extent of one object can be linearly predicted from those of another. In natural image datasets such as COCO, images typically contain objects with diverse scales, aspect ratios, and spatial layouts, resulting in relatively low values of ρ_{ij} . In contrast, remote sensing imagery often consists of repeated instances of the same object category appearing at similar scales and following regular spatial patterns, such as rows of vehicles, arrays of storage tanks, or tiled building footprints. Consequently, object pairs within the same image

exhibit substantially higher spatial correlation. As illustrated in Fig. 1, remote sensing images consistently demonstrate stronger inter-object correlation than natural images.

Conventional Per-Object NoC

Our main paper argues that per-object NoC does not reflect the cost of scene-scale annotation and therefore we report the NoC-I as the primary protocol. To ensure fair comparison with prior studies, we also report the conventional NoC@70/75/80 in Table A1.

While the margins are smaller than under NoC-I setting, the Table. A1 demonstrates that our ISRS-DETR consistently achieves significant improvements across all 3 benchmark datasets.

Implementation Details

Table A2 lists every hyperparameter needed to reproduce the main results.

Algorithm Pipeline

Algorithm A1 gives the end-to-end training procedure of our ISRS-DETR.

Extended Qualitative Analysis of Class-Aware Propagation

Figure A1 illustrates the behaviour ISRS-DETR is designed for. In both scenes the user supplies exactly one seed click. The detection branch proposes class-conditioned boxes over the entire scene, the "dynamic Top-K click strategy" selects the subset whose interpolated features are most similar to the given click, and each selected box contributes a simulated click; the segmentation path then resolves the user click and all simulated clicks.

These two examples represent challenges commonly encountered in remote sensing imagery. The vehicle depot demonstrates a highly redundant scene containing numerous visually similar trailers. In such cases, conventional interactive segmentation commonly requires repeated user interactions for each object, causing annotation effort to grow approximately linearly with the number of instances. By exploiting the strong visual similarity among same-class objects, ISRS-DETR propagates a single user click to trailers distributed across both the densely packed row and the obliquely parked column, substantially reducing the required interactions.

In contrast, the shoreline example contains only a few instances, but each exhibits a specific geometrically complex shape. However, ISRS-DETR can still identify and propagating supervision to other semantically similar instances in the scene, demonstrating that the proposed click propagation strategy is effective across both densely populated object images and images containing geometrically complex objects.

Method	iSAID			WHU-Building			NWPU VHR-10		
	@70	@75	@80	@70	@75	@80	@70	@75	@80
SimpleClick	14.07	15.05	16.02	6.24	7.92	11.80	3.03	4.33	5.88
MFP	10.14	11.23	13.43	4.88	5.24	5.88	1.58	2.10	3.63
CrossCut	9.80	10.85	12.20	4.76	5.08	5.68	1.80	2.11	2.75
ISRS-DETR	8.36	9.77	11.81	1.32	2.04	4.00	1.29	1.44	1.72

Table A1: Conventional per-object NoC (lower is better). All methods trained on the same three-dataset mixture. The best in each column is **boldfaced**.

Table A2: Complete hyperparameter configuration of ISRS-DETR. Baselines use the identical data mixture, augmentation, optimiser, schedule and epoch settings.

<i>Backbone and segmentation branch</i>	
Image encoder	plain ViT-B + simple FPN
Encoder initialisation	cocolvis_vit_base (SimpleClick)
Input resolution H	$448 \times n$
Grid sizes n	2 (train); {2, 3, 4} fused at test
Mask decoder	stack of $\text{Conv}_{1 \times 1}$
Segmentation loss	normalised focal loss ($\alpha=0.5$, $\gamma=2$)
<i>Detection guide branch</i>	
Decoder	RF-DETR-XL decoder, $N_q = 300$, 5 layers
Positional query init	top-300 features of $\mathbf{F}_i$
Content queries	learnable
Detection loss	$\text{cls} + \ell_1 + \text{GIoU}$ (DETR)
<i>Click propagation</i>	
Confidence threshold θ	0.30
Min. side length $s_{\min}$	0.004 (normalised)
NMS IoU threshold	0.6
Max detections per episode	64
Orientation candidates/box	4
k^* selection	min. 2nd-order difference (Eq. 4)
<i>Optimisation</i>	
Optimiser	Adam ($\beta=(0.9, 0.999)$, $\epsilon=10^{-8}$)
Initial learning rate	5×10^{-5}
LR schedule	MultiStepLR, milestones {50, 55}, $\gamma=0.1$
Weight decay	0
Epochs	55
Batch size (per GPU / total)	4 / 16
Max clicks per sample	20
Hardware	4x NVIDIA A100
<i>Data</i>	
Mixture ratio	0.40 : 0.35 : 0.25
Epoch length (train / val)	4500 / 2000 episodes

Algorithm A1: Training procedure of ISRS-DETR

Input:

$\mathbf{I}$: Input image

$\mathbf{Y}$: Ground-truth class mask of $\mathbf{I}$

$\mathcal{U}_0$: Initial user clicks

$\mathcal{B}^{gt}$: Pseudo boxes from the ground-truth class mask $\mathbf{Y}$

$\hat{c}$: Target class indicated by the user click

Parameter:

T : Number of interaction iterations

θ : Confidence threshold for box filtering

$s_{\min}$: Minimum side length for box filtering

Φ : The whole framework parameters

Output: total loss $\mathcal{L}$

```

1:  $\mathcal{U} \leftarrow \mathcal{U}_0$ ,  $\mathcal{U}_{sim} \leftarrow \emptyset$ ,  $\mathbf{S}_0 \leftarrow \mathbf{0}$ 
2: – Iterative Clicks –
3: for  $t = 1$  to  $T$  do
4:    $\mathbf{F}_i \leftarrow \text{E}_{img}(\mathbf{I}_i) + \text{E}_{ext}(\mathbf{C}_i) + \mathbf{P}_i$  {Eq. (1)}
5:    $\mathbf{S}_t \leftarrow \text{Decoder}(\text{Backbone}(\mathbf{F}_i))$ 
6:    $\mathbf{u} \leftarrow \text{NEXTCLICK}(\mathbf{S}_t, \mathbf{Y})$ 
7:    $\mathcal{U} \leftarrow \mathcal{U} \cup \{\mathbf{u}\}$ 
8:    $\{\mathbf{F}_i\}, \mathcal{B}_{raw} \leftarrow \Phi(\mathbf{I}, \mathbf{S}_t, \mathcal{U})$ 
9:    $\mathcal{B} \leftarrow \text{FILTER}(\mathcal{B}_{raw}, \theta, s_{\min}, \hat{c})$  {confidence, size, class}
10:   $\mathcal{B} \leftarrow \text{NMS}(\mathcal{B}) = \{\mathbf{b}_j\}_{j=1}^{N_b}$ 
11:   $\mathcal{C} \leftarrow \{\mathbf{u}_j\}_{j=1}^{4 \times N_b}$  {4 orientations per box}
12:   $\mathbf{v}_j \leftarrow \text{INTERP}(\{\mathbf{F}_i\}, \mathbf{u}_j)$ ,  $\mathbf{v} \leftarrow \text{INTERP}(\{\mathbf{F}_i\}, \mathbf{u})$ 
13:   $\tilde{s} \leftarrow \text{SORT}(\{p_{u_j, u}\}_{j=1}^{4 \times N_b})$  {Eqs. (2), (3)}
14:   $k^* \leftarrow \arg \min_{1 < k < 4N_b} (\tilde{s}_{(k+1)} - 2\tilde{s}_{(k)} + \tilde{s}_{(k-1)})$  {Eq. (4)}
15:   $\mathcal{U}_{sim} \leftarrow \text{top-}k^* \text{ candidates of } \mathcal{C}$ 
16:   $\mathcal{L} \leftarrow \mathcal{L}_{seg}(\mathbf{S}_t, \mathbf{Y}) + \mathcal{L}_{detr}(\mathcal{B}_{raw}, \mathcal{B}^{gt})$ 
17:  return  $\mathcal{L}$ 
18: end for

```


Figure A1: Class-aware propagation from a single seed click on iSAID. Top: a truck depot (*large vehicle*). Bottom: a residential shoreline (*harbor*, rotated 90° for layout). In (c), the orange box marks the user-clicked instance and the green dot is the user's click; yellow markers and blue boxes indicate co-class instances that received a simulated click from the detection branch; cyan contours are the predicted masks and the green overlay the predicted probability field.

