

Token Radius Attention for Efficient Video Generation

Jiayu Chen^{1*}, Zhikun Jiang^{2*}, Maoliang Li¹, Jiayi Luo^{4,5}, Jiawei Yang¹,
Zihao Zheng¹, Hengyi Zhang¹, Guojie Luo^{1,3}, Xiang Chen^{1†}

¹School of Computer Science, Peking University

²School of Electronics Engineering and Computer Science, Peking University

³State Key Laboratory of Multimedia Information Processing, Peking University

⁴School of Computer Science and Engineering, Beihang University

⁵Zhongguancun Academy

jiayu.chen.25@stu.pku.edu.cn, 2400013188@stu.pku.edu.cn, xiang.chen@pku.edu.cn

Abstract

Video Diffusion Transformers (VDiTs) enable high-fidelity generation but incur quadratic cost from dense 3D self-attention. Existing head- and block-level sparse methods share computation budgets across queries, overlooking token-specific attention demand. We observe that retained density varies across queries yet correlates log-linearly with attention entropy, while dominant interactions form query-centered neighborhoods with token-dependent radii. Based on these findings, we propose **Token Radius Attention (TRA)**, a training-free framework that maps query entropy to an analytic token budget and converts it into a temporally decayed radius without explicit key ranking. Fused entropy extraction, warm-up reuse, and block-sparse mask construction further reduce overhead. Across seven Wan2.1, Wan2.2, and HunyuanVideo T2V/I2V configurations, TRA retains only 9–19% of attention interactions and achieves $1.56\times$ – $2.05\times$ speedup with competitive generation quality. Code is available at <https://github.com/IF-LAB-PKU/Token-Radius-Attention>.

1 Introduction

Video Diffusion Transformers (VDiTs) (Peebles and Xie 2023) have become a dominant architecture for high-fidelity video generation (Wan et al. 2025; Kong et al. 2024; Yang et al. 2024), enabling applications such as audiovisual content creation and world modeling (Seedance et al. 2026; Brooks et al. 2024). Their success relies on dense 3D self-attention to capture spatial and temporal dependencies. Given N video tokens, however, dense attention computes $\mathcal{O}(N^2)$ pairwise interactions, causing its cost to grow rapidly with video duration and resolution. Attention has therefore become a major inference bottleneck for scaling and deployment.

Recent studies (Zhang et al. 2026) reduce this cost by exploiting the intrinsic sparsity of attention and computing only potentially important interactions. Based on the granularity of sparse decisions, existing methods can be broadly categorized into two groups. *Head-level* methods assign structured spatial or temporal patterns to individual attention heads (Xi et al. 2025; Chen et al. 2026b; Li et al. 2026), whereas *block-level* methods select important query–key block pairs (Yang

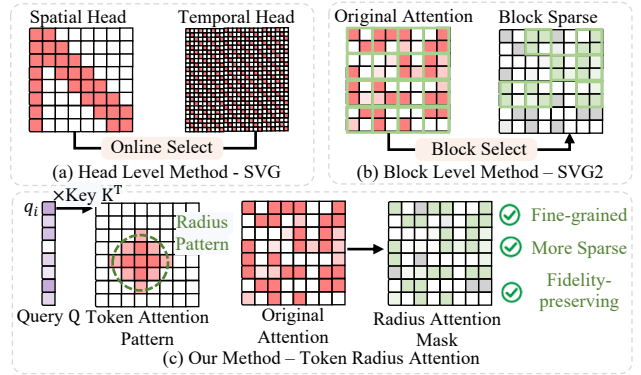


Figure 1: Comparison of sparse attention paradigms: TRA performs token-level radius masking for higher sparsity while preserving fidelity, unlike head-and block-level methods.

et al. 2026; Zhang et al. 2025; Luo et al. 2026). Despite their effectiveness, both paradigms typically share a single computation allocation across all query tokens within a head or query block, implicitly assuming uniform attention demand within each group.

This shared-allocation assumption conflicts with the query token-specific computation of self-attention (Vaswani et al. 2017). Since softmax is normalized independently for each query, the number of keys required to preserve a target attention mass is inherently a **token-specific attention demand**. Even within the same head or query block, concentrated queries require a small **token budget**, whereas diffuse queries require a much larger one. Consequently, shared head- or block-level allocation can waste computation on concentrated queries and miss critical keys for diffuse ones, degrading generation quality.

Token-level sparse allocation can address this mismatch by aligning sparse decisions with the atomic unit of attention, but replacing shared allocation with token-specific decisions introduces an adaptivity–efficiency tension. First, estimating and assigning an individual token budget to every query may itself incur substantial identification and decision overhead, calling for a low-cost model of token-specific attention

*These authors contributed equally.

†Corresponding author.

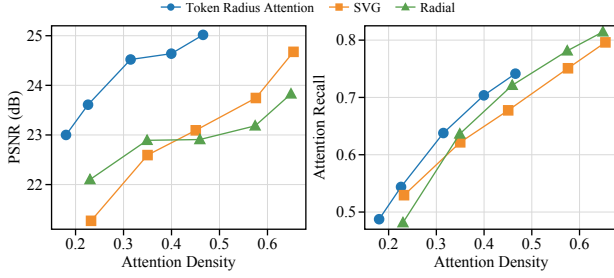


Figure 2: **PSNR and attention recall versus attention density.** Token Radius Attention achieves a favorable quality-efficiency trade-off compared with baselines.

demand. Second, a budget specifies only how much computation to allocate, but not where to allocate it.

To address this challenge, we analyze token-specific attention sparsity and its spatial support geometry. For each query, we define retained density as the minimum fraction of top-ranked keys required to preserve a target attention mass. Our analysis shows that retained density varies by orders of magnitude across queries within the same layer and head, while its logarithm grows approximately linearly with attention entropy, revealing token-specific attention sparsity (**Insight I**). Accordingly, attention entropy provides a compact signal for assigning query-specific token budgets without requiring per-query key ranking. We further observe that high-attention keys form query-centered circular neighborhoods and normalized attention probability decays approximately exponentially with two-dimensional spatial distance, establishing the token radius attention pattern (**Insight II**). Consequently, each budget can be converted into a structured spatial support through a token radius. With the temporal distance-decay rule (Li et al. 2026), these radii form regular spatiotemporal supports across video frames.

Based on these insights, we propose **Token Radius Attention (TRA)**, a training-free framework that realizes token-specific structured sparsity through an *entropy-to-budget-to-radius* pipeline. Based on **Insight I**, TRA uses an analytic entropy-based approximation to estimate a query-specific token budget, determining how much computation each query receives without per-query key ranking. During early dense warm-up, TRA computes attention entropy and reuses its budgets, radii, and masks throughout subsequent sparse steps. Based on **Insight II**, TRA converts each predicted budget into a query-specific base radius and applies temporal distance decay to construct regular two-dimensional supports across video frames, determining where the computation is allocated. Finally, a tile-major token layout and fused CUDA kernel perform distance computation, radius comparison, block pruning, and token voting, converting logical token-radius masks into regular block masks for FlashInfer (Ye et al. 2025) execution. These components combine token-level adaptivity with efficient structured computation.

Our contributions are threefold: (1) We uncover token-specific attention sparsity in VDiTs: retained density varies dramatically across queries yet follows a log-linear re-

lationship with attention entropy, while interactions exhibit a query-centered token radius attention pattern. (2) We introduce **Token Radius Attention (TRA)**, a training-free entropy-to-budget-to-radius framework that transforms query-specific computation demand into regular spatiotemporal supports under temporal distance decay without explicit key ranking. (3) We co-design a radius-mask kernel and a fused entropy kernel, and comprehensively validate TRA across seven Wan2.1, Wan2.2, and HunyuanVideo variants spanning text-to-video and image-to-video generation, where it demonstrates a favorable quality-efficiency trade-off.

2 Token Radius Attention

2.1 Preliminary and Challenge

Video Diffusion Transformers (VDiTs) represent a latent video using $N = FHW$ tokens, where F , H , and W denote the temporal length and spatial grid dimensions, respectively. Each video token is associated with a spatiotemporal coordinate (f, x, y) . For a single self-attention head, let $Q, K, V \in \mathbb{R}^{N \times d}$ denote the query, key, and value matrices, where d is the head dimension. Dense 3D self-attention computes all query-key interactions as

$$s_{ij} = \frac{q_i^\top k_j}{\sqrt{d}}, \quad p_{ij} = \frac{\exp(s_{ij})}{\sum_{n=1}^N \exp(s_{in})}, \quad o_i = \sum_{j=1}^N p_{ij} v_j. \quad (1)$$

Although dense attention captures unrestricted spatial and temporal dependencies, it incurs $\mathcal{O}(N^2)$ interactions. Sparse attention reduces this cost by retaining a subset of keys. **Challenge: reconciling token-specific attention demand with structured sparse execution.** Existing head- or block-level methods share one retained density, radius schedule, or key-block set across multiple queries. However, this shared allocation conflicts with the row-wise nature of self-attention: because $p_i = (p_{i1}, \dots, p_{iN})$ is normalized independently for each query i , different queries need not require the same amount or extent of attention. Consequently, a large shared mask wastes computation on queries with concentrated support, whereas a small one may remove important interactions for queries with broader support. Addressing this challenge requires **token-specific structured sparsity**, with allocation adapting to each query while preserving a regular mask.

2.2 Insight I: Token-Specific Attention Sparsity

We first determine *how much* computation each query requires. For a target attention mass τ , let K_i^τ be the minimum number of top-ranked keys whose cumulative probability reaches τ , and define the retained density as $B_i^\tau = K_i^\tau / N$. Because obtaining K_i^τ requires the complete attention row, it serves only as an oracle measure of query-specific attention demand. We therefore seek a compact statistic that exposes this demand without treating all queries uniformly.

To characterize the dispersion of query i 's attention distribution, we introduce its attention entropy:

$$\mathcal{H}_i = - \sum_{j=1}^N p_{ij} \log p_{ij}, \quad 0 \leq \mathcal{H}_i \leq \log N. \quad (2)$$

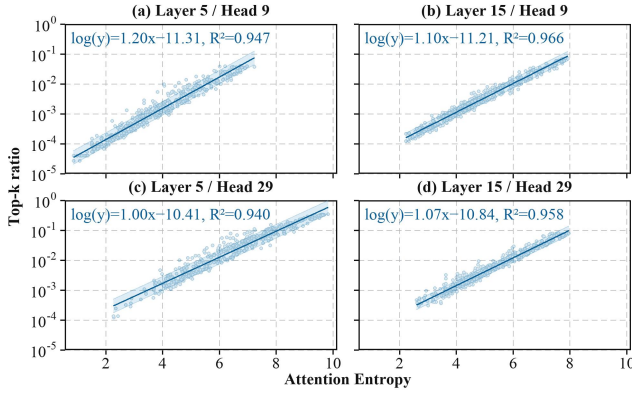


Figure 3: **Relationship between token-specific retained density and attention entropy on Wan2.2-A14B.** Their strong log-linear relationship ($R^2 = 0.940\text{--}0.966$) supports attention entropy as a query-specific budget signal.

A low entropy indicates that most attention mass is concentrated on a few keys, whereas a high entropy indicates that the mass is distributed over a broader support. Entropy therefore describes not merely whether attention is sparse, but how many interactions a particular query is likely to need.

Figure 3 reveals two complementary properties. First, the retained density varies by orders of magnitude among tokens from the same layer and head, directly contradicting the shared-budget assumption. Second, $\log B_i^r$ grows approximately linearly with $\mathcal{H}_i$, with $R^2 = 0.940\text{--}0.966$ across the four profiled layer-head groups. This log-linear trend is consistent with the effective-support interpretation of entropy: when attention spreads over more keys, its entropy increases logarithmically, while the number of keys needed to preserve the same mass grows exponentially. Thus, attention entropy serves as a compact signal for assigning query-specific token budgets without requiring a separately trained predictor.

2.3 Insight II: Token Radius Attention Pattern

A token budget specifies how many keys to retain, but it does not determine *where* those keys should be placed. Selecting arbitrary top-ranked keys would require dense attention scores and an expensive per-query search. We therefore examine whether the dominant interactions of each video token follow a coordinate-defined pattern that can translate a scalar budget into structured support. For query $i = (f_i, x_i, y_i)$ and key $j = (f_j, x_j, y_j)$, we define

$$d_s(i, j) = \sqrt{(x_i - x_j)^2 + (y_i - y_j)^2}, \quad d_t(i, j) = |f_i - f_j|. \quad (3)$$

As shown in Figure 4(a), high-attention keys form approximately circular neighborhoods around the query’s spatial position. Crucially, these neighborhoods are not identical: their radii vary substantially across queries, heads, and layers, mirroring the token-specific budgets identified above. Figure 4(b) explains why a radius is an effective support parameter. The normalized attention probability decays approximately exponentially with two-dimensional spatial distance ($R^2 = 0.791$); hence, enlarging a query-centered disk

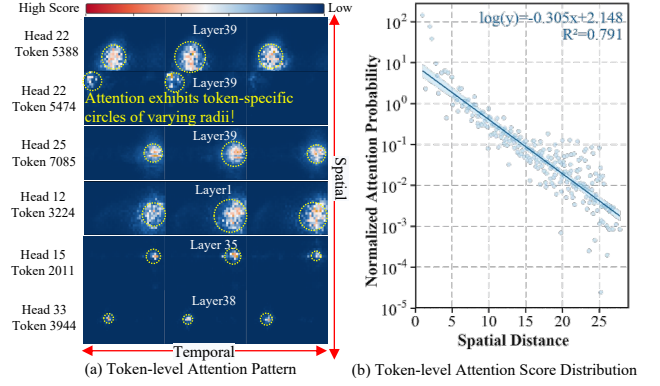


Figure 4: **Token-specific attention patterns on Wan2.2-A14B.** Dominant interactions form query-centered neighborhoods with token-dependent radii, while attention decays exponentially with two-dimensional spatial distance.

progressively incorporates lower-probability keys, whereas shrinking it removes distant interactions first. The radius therefore provides a monotonic, structured way to convert each predicted budget into a spatial support without ranking arbitrary key tokens.

The pattern also reflects the structure of video generation rather than sequence proximity. Within each frame, a video token attends most strongly to spatially nearby visual content; across frames, the query-centered layout provides a common coordinate system for aggregating locally aligned appearance and motion context. Because the useful extent varies with both the token and temporal offset, the spatial geometry can share an established temporal distance-decay rule (Li et al. 2026), while its base radius remains query specific.

3 Efficient Video Generation with TRA

In this section, we introduce **Token Radius Attention (TRA)**, a training-free sparse attention framework that allocates computation at query-token granularity while retaining a regular execution structure for VDiTs. As illustrated in Figure 5, TRA follows an *entropy-to-budget-to-radius* pipeline. First, entropy-guided token budgeting estimates a query-specific *effective token budget* under a common attention-mass target (Section 3.1). Second, a budget-preserving radius construction converts this scalar budget into a query-specific spatiotemporal mask without explicitly ranking individual keys (Section 3.2). Additionally, fused entropy extraction, cross-step reuse, and a customized block-sparse kernel amortize the decision overhead and translate token-level sparsity into practical execution (Section 3.3).

3.1 Entropy-to-Budget Mapping

Token-Specific Budget Formulation. Following **Insight I**, a low-entropy query concentrates its attention mass on a small number of key tokens, whereas a high-entropy query distributes its mass over a broader support. Consequently, different queries require different numbers of keys to preserve the same target attention mass. This heterogene-

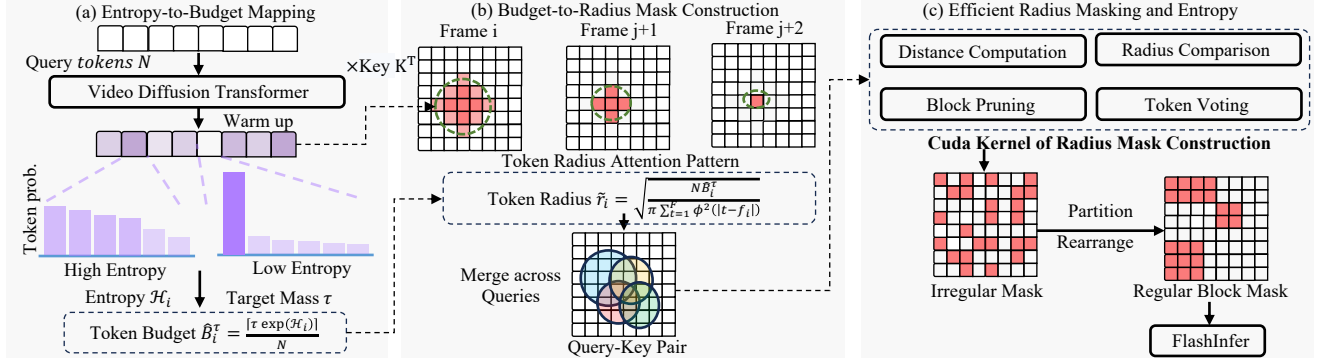


Figure 5: **Overview of Token Radius Attention (TRA).** (a) Query-wise entropy predicts a token budget. (b) The budget is converted into temporally decayed spatial radii. (c) A fused CUDA kernel constructs efficient block masks for execution.

ity motivates an entropy-based estimate of the effective token budget for each query.

Specifically, consider the attention distribution $\mathbf{p}_i = (p_{i1}, \dots, p_{iN}) \in \mathbb{R}^N$ of query i , where N is the number of key tokens. Let π_i denote the permutation that sorts its probabilities in descending order. Given a target attention mass $\tau \in (0, 1)$, we define the oracle support size as

$$K_i^\tau = \min \left\{ k : \sum_{n=1}^k p_{i, \pi_i(n)} \geq \tau \right\}. \quad (4)$$

The corresponding *effective token budget*, expressed as the fraction of retained keys, is $B_i^\tau = K_i^\tau / N$. Although B_i^τ directly characterizes query-specific attention demand, computing it requires the complete attention distribution and an explicit per-query top- k search. It therefore serves as an oracle diagnostic rather than an efficient inference-time policy.

Entropy-Equivalent Support Approximation. To motivate a tractable entropy-to-budget relationship, we introduce an idealized effective-support approximation. For query i , consider an entropy-equivalent distribution $\mathbf{p}'_i$ that assigns uniform probability to a set $\mathcal{S}_i$ of m_i effective key tokens and zero probability elsewhere:

$$p'_{ij} = \begin{cases} \frac{1}{m_i}, & j \in \mathcal{S}_i, \\ 0, & j \notin \mathcal{S}_i, \end{cases} \quad |\mathcal{S}_i| = m_i. \quad (5)$$

Requiring $\mathbf{p}'_i$ to have the same entropy $\mathcal{H}_i$ as the original distribution gives

$$\mathcal{H}(\mathbf{p}'_i) = - \sum_{j=1}^N p'_{ij} \log p'_{ij} = - \sum_{j \in \mathcal{S}_i} \frac{1}{m_i} \log \frac{1}{m_i} = \log m_i.$$

Hence, $m_i = \exp(\mathcal{H}_i)$, which represents an entropy-equivalent effective support size rather than the exact Top- τ support of the original distribution.

Entropy-Based Budget Approximation. From the entropy-equivalent distribution in Equation 5, we define $m_i^{\text{eff}} = \exp(\mathcal{H}_i)$ as the continuous effective support size of query i , rather than the exact number of nonzero attention

probabilities. Under the uniform-support approximation, the attention mass associated with k retained effective keys is approximated by

$$\widetilde{M}_i(k) = \min \left\{ \frac{k}{m_i^{\text{eff}}}, 1 \right\}, \quad k \in \{0, \dots, N\}. \quad (6)$$

Consequently, the estimated number of keys required to reach a target attention mass τ is

$$\widehat{K}_i^\tau = \min \left\{ k : \widetilde{M}_i(k) \geq \tau \right\} = \lceil \tau \exp(\mathcal{H}_i) \rceil. \quad (7)$$

The corresponding effective token budget is therefore

$$\widehat{B}_i^\tau = \frac{\widehat{K}_i^\tau}{N} = \frac{\lceil \tau \exp(\mathcal{H}_i) \rceil}{N} \approx \frac{\tau \exp(\mathcal{H}_i)}{N}. \quad (8)$$

Equation 8 provides an analytic and monotonic approximation of the query-specific token budget under the effective-support assumption, assigning smaller budgets to low-entropy queries and larger budgets to high-entropy ones. It does not imply that entropy uniquely determines the exact Top- τ support of the original attention distribution. Nevertheless, its exponential dependence is consistent with the empirical log-linear trend in Figure 3. Appendix further evaluates this approximation using measured attention distributions and provides the corresponding derivation.

3.2 Budget-to-Radius Mask Construction

Temporally Decayed Radius Model. The entropy-based budget approximation determines how many keys a query should retain, but not where those keys should be placed. Explicitly selecting the top- $\widehat{K}_i^\tau$ keys would still require dense attention scores and a per-query ranking operation. Following **Insight II**, TRA instead converts each budget into query-centered 2D disks, producing a coordinate-defined spatiotemporal support without arbitrary key selection.

Let query i be located at (f_i, x_i, y_i) , and let key j be located at (f_j, x_j, y_j) . We use the spatial and temporal distances defined in Equation 3. Following the established temporal-locality prior (Li et al. 2026), we model the contraction of spatial support using

$$\phi(\delta) = \exp(-\gamma\delta), \quad \gamma \geq 0, \quad \delta = |f_j - f_i|. \quad (9)$$

Here, γ is a fixed decay rate shared by all queries; query-level adaptivity is introduced only through the base radius r_i . The radius assigned to target frame t is $r_{i,t} = r_i \phi(|t - f_i|)$. Thus, the predicted token budget controls the overall support scale, whereas temporal distance determines how this support is distributed across video frames.

Budget-Matched Radius Construction. The predicted density $\hat{B}_i^\tau$ corresponds to a target key count $\hat{K}_i^\tau = N\hat{B}_i^\tau$. We determine a base radius whose frame-dependent disks contain approximately this number of video keys. Assuming latent-grid coordinates and temporarily ignoring discretization and spatial boundaries, the retained-key count is approximated by the sum of disk areas:

$$C_i^{\text{cont}}(r) = \sum_{t=1}^F \pi r^2 \phi^2(|t - f_i|). \quad (10)$$

Equating $C_i^{\text{cont}}(r)$ with $\hat{K}_i^\tau$ yields the analytic initialization

$$\tilde{r}_i = \sqrt{\frac{\hat{K}_i^\tau}{\pi \sum_{t=1}^F \phi^2(|t - f_i|)}}. \quad (11)$$

This formulation completes the entropy-to-budget-to-radius chain: entropy estimates a query-specific key count, while the temporal decay distributes spatial support across frames. However, $\tilde{r}_i$ is only a continuous approximation and does not account for finite grid boundaries or lattice effects.

To obtain a boundary-aware radius, we count the retained keys exactly for each candidate r :

$$C_i^{\text{grid}}(r) = \sum_{t=1}^F |\{j : f_j = t, d_s(i, j) \leq r\phi(|t - f_i|)\}|. \quad (12)$$

TRA selects the smallest candidate radius whose discrete support reaches the target key count:

$$r_i = \min \left\{ r \in \mathcal{R} : C_i^{\text{grid}}(r) \geq \hat{K}_i^\tau \right\}, \quad (13)$$

where $\mathcal{R}$ includes all candidate radii on the latent grid and a full-support radius. Because the count changes discretely, the selected support may slightly exceed $\hat{K}_i^\tau$; the construction therefore matches the predicted budget conservatively rather than exactly. For fixed grid dimensions and γ , the boundary-aware counts depend only on the query coordinate, query frame, and candidate radius, allowing them to be stored in a lookup table.

Token-Radius Mask Definition. The resulting logical video-token mask is

$$M_{ij} = \mathbb{I}[d_s(i, j) \leq r_i \phi(|f_j - f_i|)]. \quad (14)$$

The mask is query specific because r_i depends on the entropy-derived budget $\hat{K}_i^\tau$, yet structurally regular because its support is a union of nested two-dimensional disks. Conceptually, TRA applies the mask as

$$\text{TRA}(Q, K, V) = \text{Softmax} \left(\frac{QK^\top}{\sqrt{d}} + \mathcal{B}(M) \right) V, \quad (15)$$

where $\mathcal{B}_{ij}(M) = 0$ when $M_{ij} = 1$, and $\mathcal{B}_{ij}(M) = -\infty$ otherwise. Equation 15 is a mathematical definition; the sparse kernel evaluates only retained query-key blocks rather than materializing dense $QK^\top$. For joint text-video attention, all text keys remain visible and M is applied only to the video-key submatrix; architectures with separate cross-attention retain their original text-attention path.

3.3 Efficient Radius Masking and Entropy

Flash Radius Mask Kernel. Fixed-block sparse-attention kernels cannot represent Token-Radius masks because irregular regions do not align with fixed block boundaries. Under the original token order, tokens retained for one query may span multiple disjoint blocks, producing a fragmented sparse mask. TRA resolves this mismatch by partitioning each $H \times W$ frame into $b_h \times b_w$ tiles and rearranging video tokens in tile-major order. This layout makes neighboring tokens contiguous in the one-dimensional sequence, grouping retained interactions into fewer, denser blocks for efficient block-sparse computation. Before attention, Q , K , and V are consistently reordered; afterward, outputs are restored to the original token order.

Given this layout, TRA converts the query-specific token-level mask M into a hardware-compatible block-sparse mask. We fuse distance computation, radius comparison, block pruning, and token-level voting into one CUDA kernel. A three-dimensional grid covers all query blocks, key blocks, and attention heads, generating head-specific masks in one launch. For each query-key block pair, the kernel uses pre-computed spatial bounding boxes to discard pairs that cannot contain valid token interactions. It then evaluates remaining candidates at token granularity and votes to determine whether each block is retained. Finally, all head masks are packed into one block-sparse attention invocation, avoiding per-head planning and dispatch overhead.

Fused Attention Entropy Kernel. Computing query-wise attention entropy at every denoising step would offset the benefit of sparse attention. TRA therefore extracts entropy only during selected early dense warm-up steps and reuses the resulting budgets, radii, and masks throughout the subsequent sparse steps. Specifically, letting $s_{ij} = q_i^\top k_j / \sqrt{d}$, $Z_i = \sum_j \exp(s_{ij})$, and $p_{ij} = \exp(s_{ij}) / Z_i$, the entropy can be rewritten as $\mathcal{H}_i = \log Z_i - \sum_{j=1}^N p_{ij} s_{ij}$. This formulation allows entropy to be accumulated during online softmax without materializing the complete attention matrix. Following prior observations of cross-step entropy stability (Chen et al. 2026a), TRA directly reuses the entropy estimates from the final dense warm-up step to construct radius maps for subsequent sparse steps, reducing entropy estimation and mask-construction overhead.

4 Experiments

4.1 Experimental settings

Models and tasks. We evaluate TRA on seven T2V and I2V configurations based on Wan2.1, Wan2.2, and Hunyuan-Video, covering model sizes from 1.3B to 14B. Unless otherwise specified, videos are generated at 720×1280 resolution.

Model/Method	VBench (%)							Efficiency			
	Overall↑	Subject↑	Flicker↑	Back.↑	Aesthetic↑	Motion↑	Image↑	Density↓	FLOPs↓	Latency↓	Speedup↑
<i>Wan2.1-1.3B-T2V</i>	87.67	97.56	99.55	97.93	65.46	98.52	67.01	1.00	105.34	417	1.000×
SVG1	84.44	94.27	98.75	91.16	61.14	98.05	63.26	0.30	48.41	266	1.568×
SVG2	85.30	95.88	98.75	96.47	60.15	98.71	61.83	<u>0.20</u>	<u>40.22</u>	<u>241</u>	<u>1.730×</u>
Radial	86.30	96.56	99.05	97.07	62.76	98.72	63.67	0.39	55.31	257	1.623×
TRA	86.53	96.89	99.11	97.17	63.25	98.78	64.01	0.12	33.63	230	1.813×
<i>Wan2.1-14B-T2V</i>	87.41	97.52	99.46	97.70	61.27	99.08	69.43	1.00	374.56	1982	1.000×
SVG1	86.45	97.09	98.49	97.12	58.95	99.26	67.80	0.30	183.13	1239	1.600×
SVG2	86.52	97.24	98.29	97.07	59.06	99.18	68.29	0.32	188.58	1261	1.572×
Radial	<u>86.83</u>	97.55	98.16	<u>97.49</u>	60.83	99.28	67.66	0.36	261.99	1297	1.528×
TRA	87.39	<u>97.43</u>	99.10	97.61	<u>60.24</u>	<u>99.27</u>	71.86	0.15	141.93	1131	1.752×
<i>Wan2.2-14B-T2V</i>	88.63	97.29	99.22	97.39	67.22	98.94	71.75	1.00	374.56	1608	1.000×
SVG1	<u>87.63</u>	96.16	<u>97.16</u>	96.67	<u>65.13</u>	<u>98.83</u>	<u>71.84</u>	0.30	<u>183.02</u>	<u>1049</u>	1.533×
SVG2	86.93	96.22	96.83	96.45	62.17	98.41	71.51	0.34	192.91	1061	1.516×
Radial	87.29	95.78	97.01	96.22	64.76	98.48	71.47	0.36	261.99	1164	1.381×
TRA	87.91	<u>96.18</u>	99.05	<u>96.46</u>	65.27	99.55	71.96	0.15	142.99	1020	1.576×
<i>HunyuanVideo-13B-T2V</i>	86.52	97.67	99.43	97.76	57.28	99.45	67.56	1.00	416.22	1783	1.000×
SVG1	85.55	96.47	98.43	96.51	55.56	99.27	67.04	0.27	193.55	897	1.988×
SVG2	85.57	96.78	98.65	96.49	55.31	99.31	66.90	<u>0.26</u>	187.68	909	1.961×
Radial	<u>85.87</u>	<u>97.04</u>	99.03	96.72	56.74	<u>99.35</u>	66.33	0.28	<u>183.41</u>	916	1.947×
TRA	85.95	97.10	99.60	<u>96.58</u>	<u>56.36</u>	99.38	67.05	0.09	136.30	870	2.049×
<i>Wan2.1-14B-I2V</i>	86.56	94.48	97.24	95.37	61.86	98.91	71.52	1.00	374.56	1658	1.000×
SVG1	85.97	94.42	96.68	94.51	61.02	98.28	<u>70.93</u>	0.30	183.13	1047	1.584×
SVG2	<u>86.36</u>	95.72	<u>96.98</u>	94.93	61.45	98.33	<u>70.76</u>	<u>0.29</u>	<u>179.71</u>	<u>998</u>	<u>1.661×</u>
Radial	86.30	94.52	96.95	<u>95.36</u>	61.62	<u>98.44</u>	70.91	0.36	261.99	1046	1.585×
TRA	86.41	<u>95.55</u>	97.15	95.42	<u>61.59</u>	98.74	71.09	0.19	151.96	971	1.708×
<i>Wan2.2-14B-I2V</i>	88.60	97.55	97.54	97.24	66.23	98.67	74.36	1.00	374.56	1605	1.000×
SVG1	<u>87.40</u>	97.17	97.01	<u>97.08</u>	62.05	98.23	72.88	0.30	183.03	<u>1034</u>	<u>1.552×</u>
SVG2	87.16	96.79	97.04	96.65	62.36	98.84	71.28	0.28	176.48	1057	1.518×
Radial	87.10	95.91	97.48	96.49	<u>63.73</u>	97.80	71.19	0.36	261.99	1157	1.387×
TRA	87.87	<u>97.10</u>	<u>97.36</u>	97.11	64.50	<u>98.70</u>	<u>72.45</u>	0.15	143.00	1028	1.561×
<i>HunyuanVideo-13B-I2V</i>	87.30	96.55	98.91	96.54	62.06	99.45	70.30	1.00	416.22	1761	1.000×
SVG1	85.31	96.51	98.15	95.47	55.57	99.11	67.04	0.27	193.55	887	1.985×
SVG2	86.14	95.61	<u>98.28</u>	<u>95.68</u>	59.75	99.06	68.45	<u>0.27</u>	192.07	889	1.981×
Radial	86.48	95.30	97.58	95.62	61.66	99.21	69.52	0.28	<u>183.41</u>	912	1.931×
TRA	86.63	<u>96.17</u>	98.41	96.01	<u>60.73</u>	99.38	<u>69.41</u>	0.09	136.30	874	2.015×

Table 1: Quality and efficiency comparisons of TRA and training-free sparse-attention baselines on T2V and I2V tasks. VBench scores are reported in percentage, FLOPs in P, and latency in seconds. Speedup is measured against the corresponding dense model. Best and second-best sparse results are bolded and underlined, respectively.

Datasets. For T2V evaluation, we use the prompt-enhanced Penguin benchmark provided by the VBench team (Huang et al. 2024). For I2V evaluation, we use the 16:9 prompt-image pairs from VBench++ (Zheng et al. 2025).

Evaluation metrics and baselines. Generation quality is evaluated using VBench Overall and six dimensions: Subject Consistency, Temporal Flickering, Background Consistency, Aesthetic Quality, Motion Smoothness, and Imaging Quality. We report attention density, FLOPs, end-to-end latency, and speedup for efficiency evaluation. We measure fidelity to Dense Attention using PSNR, SSIM (Wang et al. 2004), and LPIPS (Zhang et al. 2018). We compare TRA with three training-free sparse attention methods: SVG (Xi et al. 2025), SVG2 (Yang et al. 2026), and Radial (Li et al. 2026).

Implementation details. All experiments are conducted on an NVIDIA H200 GPU. At the default resolution, Wan2.1-1.3B, Wan2.1-14B, and Wan2.2-14B generate 81 frames, whereas HunyuanVideo-13B generates 129 frames. For TRA, SVG, and SVG2, the first transformer layer remains dense, and dense attention is applied during the first 25% of the denoising process as warm-up. Method-specific sparse attention is used in the remaining layers and denoising steps. TRA uses a temporal decay factor of 0.6 for all Wan models and 0.95 for HunyuanVideo. SVG adopts its calibrated target block density, while SVG2 uses $K_q = 300$ and $K_k = 1000$; both follow the same layer-wise and denoising-step warm-up protocol as TRA. For Radial Attention, due to constraints imposed by its acceleration strategy, we use a resolution of



Figure 6: Qualitative comparison of various methods on Wan2.1 and HunyuanVideo.

Method	PSNR $\uparrow$	SSIM $\uparrow$	LPIPS $\downarrow$
Wan2.1-14B	—	—	—
SVG	21.2930	0.7980	0.2100
Radial	20.4520	0.7020	0.2700
TRA	23.3772	0.8275	0.1742
w/o Budget Mapping	22.2070	0.5648	0.4403
w/o Radius Masking	13.1320	0.2724	0.7011

Table 2: Ablation study on the key components of TRA.

Operation / Time (s)	Per Layer	Total	Speedup
Naive Token Radius Mask	15.78	615.30	1.00×
Flash Radius Mask	1.52	59.46	10.35×
Naive Attention Entropy	4.77	190.91	1.00×
Fused Attention Entropy	0.39	15.47	12.34×

Table 3: Efficiency evaluation for customized kernels.

768 $\times$ 1280 and generate 69, 77, and 117 frames for Wan2.1, Wan2.2, and HunyuanVideo, respectively.

4.2 Main Results

Quantitative Comparison on VBench. We evaluate TRA on seven T2V and I2V configurations in Table 1. TRA achieves the best VBench Overall score among sparse methods in all seven configurations. Notably, it nearly matches dense attention on Wan2.1-14B T2V while achieving a 1.75 $\times$ speedup, showing a favorable quality–efficiency trade-off.

Efficiency Analysis. TRA achieves the highest speedup across all configurations, ranging from 1.56 $\times$ to 2.05 $\times$, while TRA retains only 9%–19% of attention interactions. On Hunyuan-13B, it reaches 2.05 $\times$ and 2.02 $\times$ speedups for T2V and I2V, respectively. TRA also consistently reduces FLOPs compared with SVG and Radial Attention, confirming the effectiveness of token-level adaptive sparsity.

Qualitative Visualizations of Different Methods. Figure 6 compares TRA with dense attention and existing sparse methods. TRA better preserves subject identity, structural integrity, fine-grained details, and temporal consistency, while reducing artifacts such as distortion, flickering, and motion discontinuity. Its outputs remain visually close to dense attention despite substantial acceleration.

4.3 Ablation Studies

Impact of Key Components. As shown in Table 2, replacing entropy-guided allocation with a uniform budget degrades

generation quality. Replacing the budget-preserving radius with a 1D radial distance causes a more severe degradation, including a PSNR drop of over 10 dB. These results confirm that the two components jointly enable TRA to allocate computation adaptively while preserving informative tokens.

Computational Cost Analysis. As shown in Table 3, Flash Radius Mask and Fused Attention Entropy achieve 10.35 $\times$ and 12.34 $\times$ speedups over their naive implementations, respectively. This demonstrates that the customized kernels substantially reduce the auxiliary cost of TRA, enabling its efficient practical deployment.

Additional ablations are provided in the Appendix.

5 Related Work

Efficient Video Generation. Existing methods accelerate video diffusion by caching computation across denoising steps (Liu et al. 2025a,b; Ma et al. 2026), reducing sampling steps through distillation (Salimans and Ho 2022; Yin et al. 2024), or lowering per-evaluation cost through quantization (Shang et al. 2023; He et al. 2023; Feng et al. 2025), and parallelism. These techniques optimize repeated evaluations or numerical cost, whereas TRA reduces the quadratic query–key interactions within executed attention layers and is therefore complementary.

Sparse Attention for Video Generation. Training-free sparse attention methods for video DiTs can be categorized by their allocation granularity. Head-level methods, including SVG (Xi et al. 2025), Radial Attention (Li et al. 2026), and Sparse-vDiT (Chen et al. 2026b), assign structured spatial or temporal patterns to entire heads. Block-level methods, such as SpargAttn (Zhang et al. 2025), SVG2 (Yang et al. 2026), and SVOO (Luo et al. 2026), select important query–key block pairs. Both paradigms typically share one sparse allocation across queries, overlooking query-specific attention demand. TRA instead maps each query’s entropy to its own token budget and spatiotemporal radius, combining token-level allocation with regular block-sparse execution.

6 Conclusion

We presented Token Radius Attention (TRA), a training-free framework that maps attention entropy to query-specific token budgets and temporally decayed radii. Across seven 720P T2V and I2V settings, TRA retains only 9%–19% attention density, achieves 1.56 $\times$ –2.05 $\times$ speedup, and delivers the competitive VBench score in seven settings.

References

- Brooks, T.; Peebles, B.; Holmes, C.; DePue, W.; Guo, Y.; Jing, L.; Schnurr, D.; Taylor, J.; Luhman, T.; Luhman, E.; et al. 2024. Video generation models as world simulators. *OpenAI Blog*, 1(8): 1.
- Chen, J.; Zhang, H.; Li, M.; Li, M.; Zheng, Z.; Liu, X.; Luo, G.; and Chen, X. 2026a. EcoVideo: Entropy-Orchestrated Video Generation Paradigm in Cloud-Edge Dynamics. *ECCV*.
- Chen, P.; Zeng, X.; Zhao, M.; Shen, M.; Cheng, W.; Yu, G.; and Chen, T. 2026b. Sparse-vdit: Unleashing the power of sparse attention to accelerate video diffusion transformers. In *AAAI*, volume 40, 2957–2965.
- Feng, W.; Qin, H.; Yang, C.; Li, X.; Yang, H.; Li, Y.; An, Z.; Huang, L.; Magno, M.; and Xu, Y. 2025. S^2Q -VDiT: Accurate Quantized Video Diffusion Transformer with Salient Data and Sparse Token Distillation. *arXiv preprint arXiv:2508.04016*.
- He, Y.; Liu, L.; Liu, J.; Wu, W.; Zhou, H.; and Zhuang, B. 2023. Ptq4: Accurate post-training quantization for diffusion models. *NeurIPS*, 36: 13237–13249.
- Huang, Z.; He, Y.; Yu, J.; Zhang, F.; Si, C.; Jiang, Y.; Zhang, Y.; Wu, T.; Jin, Q.; Chanpaisit, N.; et al. 2024. Vbench: Comprehensive benchmark suite for video generative models. In *CVPR*, 21807–21818.
- Kong, W.; Tian, Q.; Zhang, Z.; Min, R.; Dai, Z.; Zhou, J.; Xiong, J.; Li, X.; Wu, B.; Zhang, J.; et al. 2024. Hunyuan-video: A systematic framework for large video generative models. *arXiv preprint arXiv:2412.03603*.
- Li, X.; Li, M.; Cai, T.; Xi, H.; Yang, S.; Lin, Y.; Zhang, L.; Yang, S.; Hu, J.; Peng, K.; et al. 2026. Radial Attention: $O(n \log n)$ Sparse Attention with Energy Decay for Long Video Generation. *NeurIPS*, 38: 16822–16852.
- Liu, F.; Zhang, S.; Wang, X.; Wei, Y.; Qiu, H.; Zhao, Y.; Zhang, Y.; Ye, Q.; and Wan, F. 2025a. Timestep Embedding Tells: It’s Time to Cache for Video Diffusion Model. In *CVPR*, 7353–7363.
- Liu, J.; Zou, C.; Lyu, Y.; Chen, J.; and Zhang, L. 2025b. From reusing to forecasting: Accelerating diffusion models with taylorseers. In *ICCV*, 15853–15863.
- Luo, J.; Chen, J.; Wang, J.; Wang, C.; Zhu, H.; Sun, Q.; Gao, C.; Chen, Z.; and Li, J. 2026. Attention Sparsity is Input-Stable: Training-Free Sparse Attention for Video Generation via Offline Sparsity Profiling and Online QK Co-Clustering. *ICML*.
- Ma, Z.; Wei, L.; Wang, F.; Zhang, S.; and Tian, Q. 2026. Mag-cache: Fast video generation with magnitude-aware cache. *NeurIPS*, 38: 34348–34380.
- Peebles, W.; and Xie, S. 2023. Scalable diffusion models with transformers. In *ICCV*, 4195–4205.
- Salimans, T.; and Ho, J. 2022. Progressive distillation for fast sampling of diffusion models. *arXiv preprint arXiv:2202.00512*.
- Seedance, T.; Chen, D.; Chen, L.; Chen, X.; Chen, Y.; Chen, Z.; Chen, Z.; Cheng, F.; Cheng, T.; Cheng, Y.; et al. 2026. Seedance 2.0: Advancing video generation for world complexity. *arXiv preprint arXiv:2604.14148*.
- Shang, Y.; Yuan, Z.; Xie, B.; Wu, B.; and Yan, Y. 2023. Post-training quantization on diffusion models. In *CVPR*, 1972–1981.
- Vaswani, A.; Shazeer, N.; Parmar, N.; Uszkoreit, J.; Jones, L.; Gomez, A. N.; Kaiser, Ł.; and Polosukhin, I. 2017. Attention is all you need. *NeurIPS*, 30.
- Wan, T.; Wang, A.; Ai, B.; Wen, B.; Mao, C.; Xie, C.-W.; Chen, D.; Yu, F.; Zhao, H.; Yang, J.; et al. 2025. Wan: Open and advanced large-scale video generative models. *arXiv preprint arXiv:2503.20314*.
- Wang, Z.; Bovik, A. C.; Sheikh, H. R.; and Simoncelli, E. P. 2004. Image quality assessment: from error visibility to structural similarity. *IEEE transactions on image processing*, 13(4): 600–612.
- Xi, H.; Yang, S.; Zhao, Y.; Xu, C.; Li, M.; Li, X.; Lin, Y.; Cai, H.; Zhang, J.; Li, D.; et al. 2025. Sparse videogen: Accelerating video diffusion transformers with spatial-temporal sparsity. *ICML*.
- Yang, S.; Xi, H.; Zhao, Y.; Li, M.; Zhang, J.; Cai, H.; Lin, Y.; Li, X.; Xu, C.; Peng, K.; et al. 2026. Sparse videogen2: Accelerate video generation with sparse attention via semantic-aware permutation. *NeurIPS*, 38: 96965–96991.
- Yang, Z.; Teng, J.; Zheng, W.; Ding, M.; Huang, S.; Xu, J.; Yang, Y.; Hong, W.; Zhang, X.; Feng, G.; et al. 2024. Cogvideox: Text-to-video diffusion models with an expert transformer. *arXiv preprint arXiv:2408.06072*.
- Ye, Z.; Chen, L.; Lai, R.; Lin, W.; Zhang, Y.; Wang, S.; Chen, T.; Kasikci, B.; Grover, V.; Krishnamurthy, A.; and Ceze, L. 2025. FlashInfer: Efficient and Customizable Attention Engine for LLM Inference Serving. *arXiv preprint arXiv:2501.01005*.
- Yin, T.; Gharbi, M.; Zhang, R.; Shechtman, E.; Durand, F.; Freeman, W. T.; and Park, T. 2024. One-step diffusion with distribution matching distillation. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, 6613–6623.
- Zhang, J.; Xiang, C.; Huang, H.; Wei, J.; Xi, H.; Zhu, J.; and Chen, J. 2025. Spargeattention: Accurate and training-free sparse attention accelerating any model inference. *ICML*.
- Zhang, P.; Chen, Y.; Huang, H.; Lin, W.; Liu, Z.; Stoica, I.; Xing, E.; and Zhang, H. 2026. Faster video diffusion with trainable sparse attention. *NeurIPS*, 38: 152509–152534.
- Zhang, R.; Isola, P.; Efros, A. A.; Shechtman, E.; and Wang, O. 2018. The unreasonable effectiveness of deep features as a perceptual metric. In *CVPR*, 586–595.
- Zheng, D.; Huang, Z.; Liu, H.; Zou, K.; He, Y.; Zhang, F.; Gu, L.; Zhang, Y.; He, J.; Zheng, W.-S.; et al. 2025. Vbench-2.0: Advancing video generation benchmark suite for intrinsic faithfulness. *arXiv preprint arXiv:2503.21755*.

A Supplementary Analyses

A.1 Cross-Model Validation on HunyuanVideo

Analysis setup. TRA is motivated by two empirical properties of video self-attention: query-specific retained density is strongly correlated with attention entropy, and dominant query-key interactions follow a query-centered Token Radius Attention pattern. To verify that these properties are not specific to the Wan architecture, we repeat the analyses on HunyuanVideo-13B (Kong et al. 2024).

Entropy-budget relation. For each query, we compute its attention entropy $\mathcal{H}_i$ and oracle retained density B_i^τ , defined as the minimum fraction of top-ranked keys required to preserve the target attention mass τ . Figure 7 presents representative fitting results across different denoising steps, transformer layers, and attention heads. Across all sampled configurations, the logarithm of the retained density remains approximately linear in attention entropy, with R^2 values ranging from 0.978 to 0.993. The fitted slopes also remain consistent across the denoising trajectory. These results demonstrate that entropy provides a stable query-specific budget signal across both network components and denoising stages on HunyuanVideo.

Token Radius Attention pattern. Figure 8(a) aggregates normalized attention probabilities according to the two-dimensional spatial distance between query and key tokens. Within the fitted range $10 \leq d_s \leq 75$, the logarithm of the normalized attention probability follows $\log y = -0.067d_s + 6.081$, with $R^2 = 0.994$. The corresponding attention heatmaps in Figure 8(b) further show that dominant interactions form query-centered spatial neighborhoods whose extent varies across queries. Together, these results show that both token-specific attention sparsity and the Token Radius Attention pattern generalize beyond Wan-based models.

A.2 Distributional Analysis of the Entropy-to-Budget Mapping

Effective-support approximation. The entropy-to-budget mapping used in the main paper is derived from an *entropy-equivalent uniform-support approximation*. Importantly, this approximation does not assume that the original attention probabilities are uniformly distributed. Instead, it replaces each query distribution with a surrogate that uniformly distributes its probability mass over $\exp(\mathcal{H})$ effective keys while preserving the same entropy. For a target attention mass τ , this gives the parameter-free mapping

$$\hat{B}_{\text{Uni}}^\tau(\mathcal{H}) = \frac{\tau \exp(\mathcal{H})}{N}. \quad (16)$$

Although idealized, this approximation provides a simple monotonic relation between query entropy and computation demand. We next examine whether this relation remains valid under more realistic parametric models of attention distributions and quantify the approximation error introduced by the uniform-support surrogate.

General distributional formulation. Let $X_1, \dots, X_N$ be positive unnormalized attention weights drawn from a parametric distribution F_θ , and define

$$p_j = \frac{X_j}{\sum_{\ell=1}^N X_\ell}. \quad (17)$$

Let $\mu_\theta = \mathbb{E}_\theta[X]$. For sufficiently large N , the entropy of the normalized attention distribution can be approximated by

$$\mathcal{H}(\theta) = \log N + \log \mu_\theta - \frac{\mathbb{E}_\theta[X \log X]}{\mu_\theta}. \quad (18)$$

For a retained key fraction q , let $x_q = F_\theta^{-1}(1 - q)$. The expected attention mass retained by the largest qN weights is

$$L_\theta(q) = \frac{\mathbb{E}_\theta[X \mathbf{1}\{X \geq x_q\}]}{\mu_\theta}. \quad (19)$$

The corresponding retained density required to preserve target attention mass τ is

$$B_\theta^\tau = \inf \{q : L_\theta(q) \geq \tau\}. \quad (20)$$

Therefore, an entropy-to-budget mapping can be obtained by identifying the distribution parameters from entropy and substituting them into Equation (20).

Parametric models of attention distributions. We fit 44,400 query-wise attention distributions collected from Wan2.2-14B T2V under the 40-step denoising setting. The observed attention distributions can be approximated by several positive parametric families, including Lognormal, Gamma, Weibull, Burr XII, and Johnson SU. However, the best-fitting family varies across queries and entropy ranges, rather than remaining fixed globally.

For one-shape scale families such as Lognormal, Gamma, and Weibull, normalization eliminates the scale parameter and leaves one effective shape parameter. This parameter can be identified from entropy through either a closed-form expression or one-dimensional numerical inversion, yielding an entropy-only budget mapping. More flexible families such as Burr XII and Johnson SU retain multiple scale-free shape parameters. For these families, entropy provides one constraint, while the remaining degrees of freedom must be estimated from offline distribution statistics.

Entropy-identified Lognormal mapping. Consider $X \sim \text{Lognormal}(\mu, \sigma^2)$. Its relevant moments satisfy

$$\mathbb{E}[X] = \exp\left(\mu + \frac{\sigma^2}{2}\right), \quad \frac{\mathbb{E}[X \log X]}{\mathbb{E}[X]} = \mu + \sigma^2. \quad (21)$$

Substituting them into Equation (18) gives

$$\mathcal{H} = \log N - \frac{\sigma^2}{2}. \quad (22)$$

The scale parameter μ disappears after normalization, and the remaining parameter is uniquely determined by entropy:

$$\sigma(\mathcal{H}) = \sqrt{2(\log N - \mathcal{H})}. \quad (23)$$

Let $\bar{\Phi}(z) = 1 - \Phi(z)$. The expected mass retained by the largest fraction q of Lognormal samples is

$$L_{\text{LN}}(q) = \bar{\Phi}(\Phi^{-1}(1 - q) - \sigma). \quad (24)$$

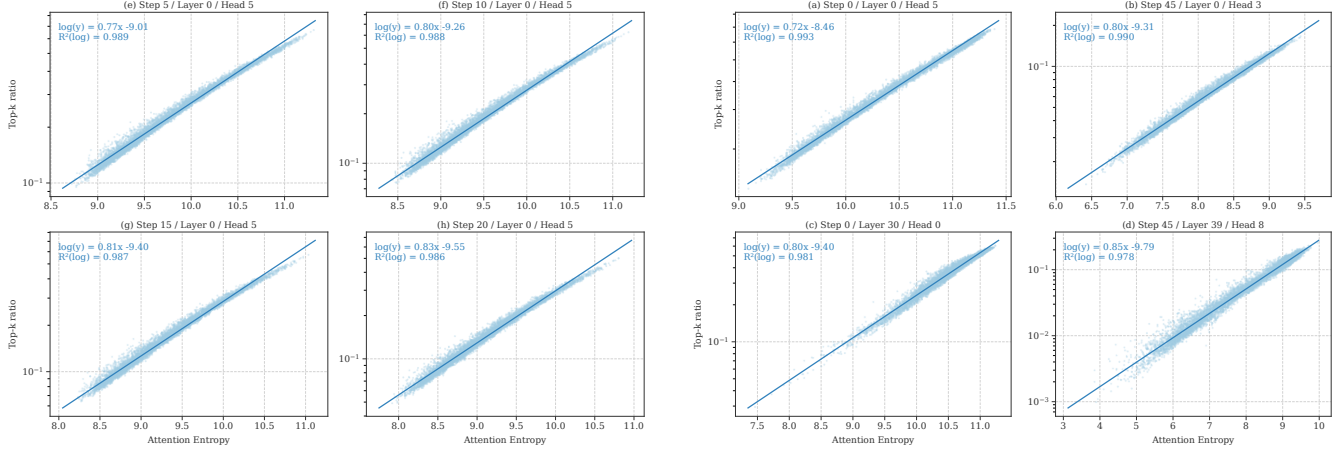


Figure 7: Query-wise entropy-retained-density relation on HunyuanVideo-13B across different denoising steps, transformer layers, and attention heads. Each plot shows attention entropy against oracle retained density on a logarithmic vertical scale. Across all sampled configurations, the logarithm of retained density remains approximately linear in attention entropy, with $R^2 = 0.978\text{--}0.993$. The consistently strong fits confirm that attention entropy provides a stable query-specific budget signal across model depths, attention heads, and denoising stages.

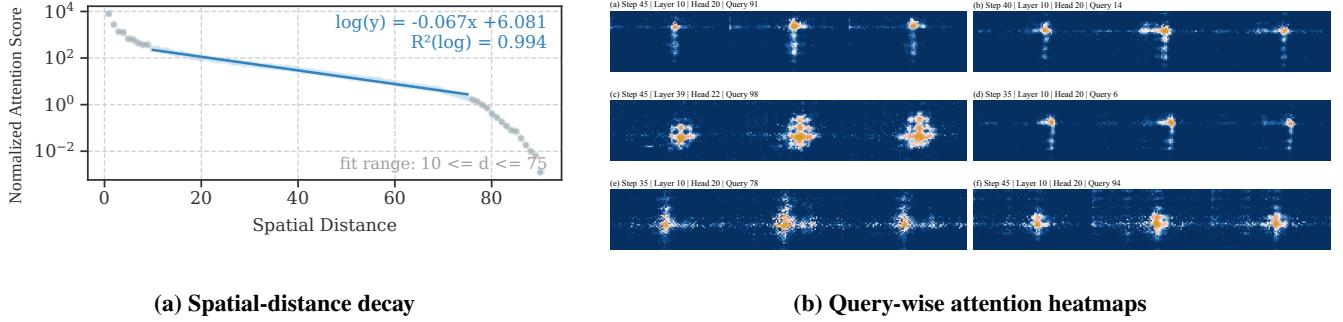


Figure 8: Token Radius Attention pattern on HunyuanVideo-13B. **(a)** The normalized attention probability decays approximately exponentially with two-dimensional spatial distance, achieving $R^2 = 0.994$ in log space over the fitted interval. **(b)** Representative query-wise heatmaps exhibit localized, query-centered supports with token-dependent spatial extents. These observations validate the query-centered spatial prior underlying Token Radius Attention beyond Wan-based models.

Mapping	Parameter source	MAE ↓	Median AE ↓	P90 AE ↓	Mean error
Uniform	Entropy only; closed form	0.0460	0.0282	0.1125	-0.0415
Lognormal	Entropy only; analytic	0.0299	0.0205	0.0683	+0.0164
Gamma	Entropy only; analytic	0.0420	0.0270	0.1024	-0.0406
Weibull	Entropy only; analytic	0.0320	0.0196	0.0787	-0.0243
Entropy-bin Oracle [†]	Best mapping per entropy bin	0.0246	0.0122	0.0651	-0.0064
Per-query Oracle [‡]	Best mapping per query	0.0127	0.0065	0.0296	-0.0061
Conditional Johnson SU [§]	Entropy + offline statistics	0.0881	0.0277	0.2303	+0.0261

Table 4: Budget-prediction errors at $\tau = 0.9$. Mean error is defined as $\mathbb{E}[\hat{B}^{0.90} - B^{0.90}]$, where positive values indicate over-estimation. [†] and [‡] are oracle references among the four entropy-only mappings and are not available during inference. [§] Conditional Johnson SU uses fitted offline statistics and is evaluated on all 44,400 queries as a post-hoc reference.

Solving $L_{LN}(q) = \tau$ yields

$$B_{LN}^{\tau}(\mathcal{H}) = \bar{\Phi} \left(\sqrt{2(\log N - \mathcal{H})} - \Phi^{-1}(\tau) \right). \quad (25)$$

Thus, the Lognormal assumption also produces an analytic

entropy-to-budget mapping without requiring a learned budget predictor. Gamma and Weibull similarly yield entropy-only mappings through one-dimensional parameter inversion.

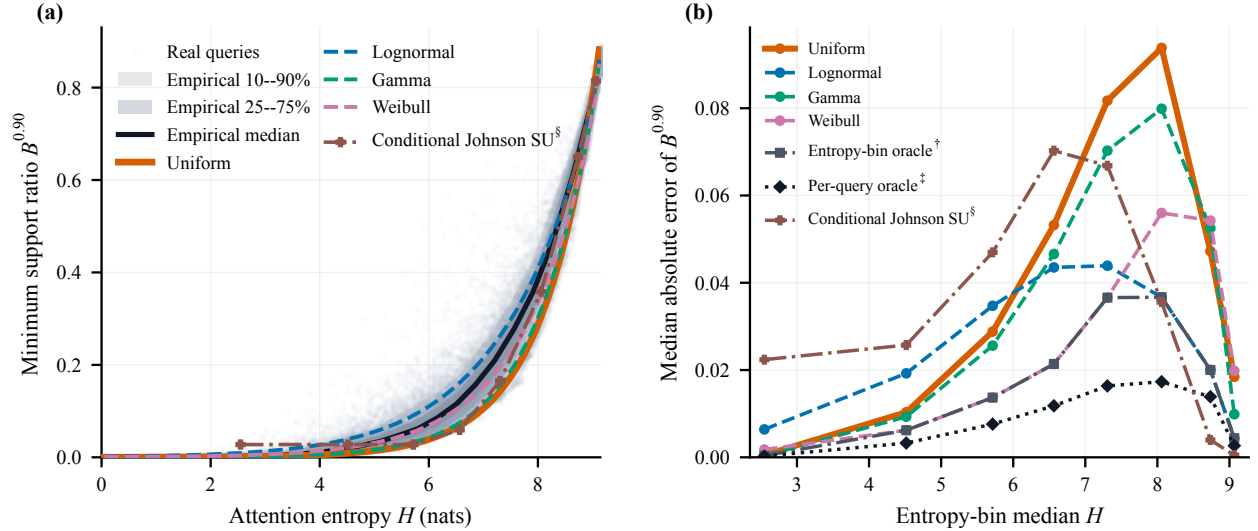


Figure 9: Distributional validation of the entropy-to-budget mapping at $\tau = 0.9$. **(a)** Oracle retained densities from real attention queries, empirical conditional intervals, and mappings derived under different distributional assumptions. Uniform, Lognormal, Gamma, and Weibull recover a consistent monotonic relation between entropy and the required retained density. Conditional Johnson SU uses offline statistics fitted on the complete query set. **(b)** Median absolute budget-prediction error within each entropy bin. The entropy-bin and per-query oracles select the best entropy-only mapping using ground-truth budgets and are included only as reference lower bounds.

Empirical comparison. Figure 9(a) shows that oracle retained density increases monotonically with attention entropy (Spearman $\rho = 0.9884$). Uniform-support, Lognormal, Gamma, and Weibull models recover the same dominant trend despite different tail assumptions, confirming that entropy is the primary signal for query-specific attention demand. Table 4 shows that the uniform-support approximation has an MAE of 0.0460, only 0.0161 higher than the best individual entropy-only mapping. More flexible oracle or conditional models either require ground-truth budgets or offline fitted statistics and are not available in TRA’s inference pipeline. We therefore retain the uniform-support mapping because it is closed form, parameter free, and consistent with the empirical entropy–budget relation.

A.3 Cross-Step Stability of Attention Entropy

Entropy stability across denoising steps. TRA estimates query-wise attention entropy during the dense warm-up stage and reuses the resulting token budgets and radius maps in subsequent sparse denoising steps, following prior observations of cross-step entropy stability (Chen et al. 2026a). To validate this design, for each transformer block and attention head, we flatten the entropy values of all queries at each denoising step into an entropy vector and compute pairwise cosine similarities between different steps.

As shown in Figure 10, the query-wise entropy patterns remain highly consistent across denoising steps for representative network depths and attention heads. The cosine similarities are consistently close to 1, and even the least similar step pair achieves a similarity of 0.945. These results indicate that, although the absolute entropy values may evolve during denoising, their relative distribution across queries remains

largely stable. Since TRA adopts a monotonic entropy-to-budget mapping, this stability supports reusing the token budgets and attention radii estimated during dense warm-up.

B Supplementary Experiments

B.1 Hyperparameter Sensitivity

Experimental settings. We conduct all hyperparameter ablations on Wan2.2-14B for T2V generation with 40 denoising steps at 720×1280 resolution. Unless otherwise specified, TRA uses 10 dense warm-up steps, one prefix dense transformer layer, a block size of 90, and no periodic entropy refresh. PSNR, SSIM, and LPIPS are measured against the corresponding Dense Attention outputs.

Hyperparameter sensitivity. As shown in Table 5, increasing the dense warm-up length consistently improves reconstruction fidelity at the cost of moderately increased runtime. In particular, increasing the warm-up length from 10 to 20 steps improves PSNR from 23.452 to 29.214, while increasing runtime from 1015 s to 1234 s. Increasing the number of dense layers or distributing them uniformly across the network provides no consistent quality improvement, supporting the use of a single prefix dense layer.

Increasing the block size generally reduces runtime, whereas an excessively large block size of 120 noticeably degrades reconstruction fidelity. A block size of 90 therefore provides a favorable quality–efficiency trade-off. Together with the cross-step stability in Section A.3, these results support reusing the entropy estimated during dense warm-up without periodic refresh.

Entropy Step-Pairwise Cosine Similarity
(Rows: Block / Layer, Cols: Head)

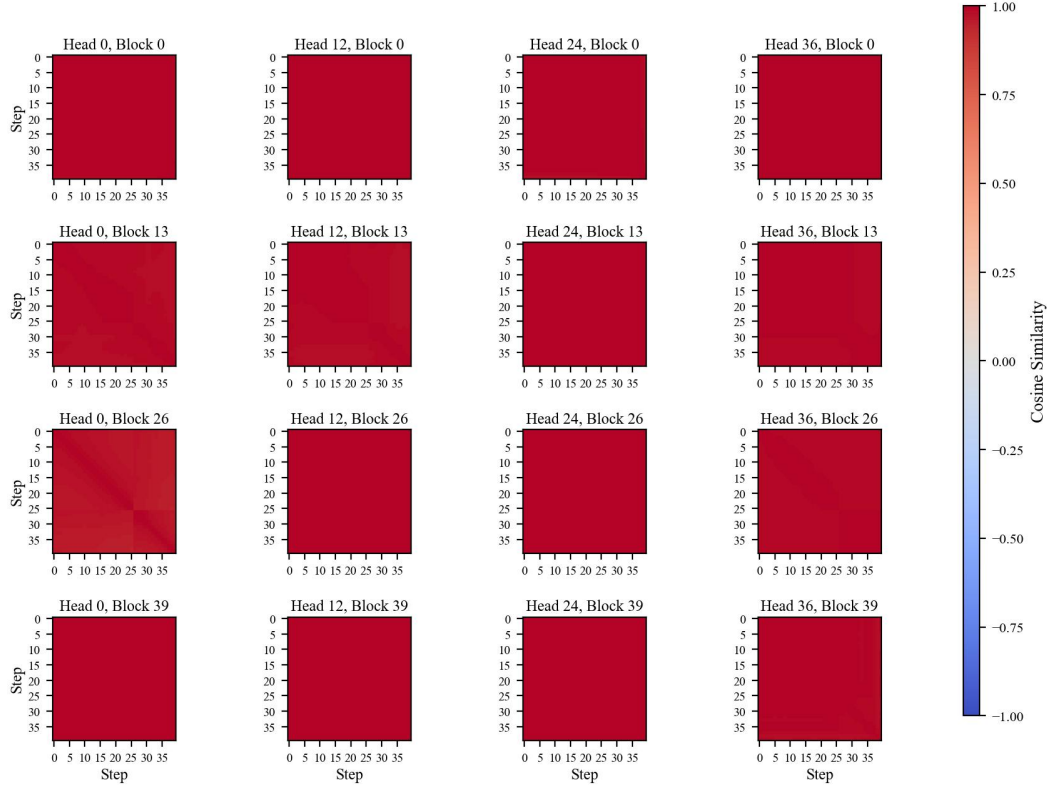


Figure 10: Cross-step stability of query-wise attention entropy. Each matrix reports the pairwise cosine similarity between entropy vectors at different denoising steps for a representative transformer block and attention head. The similarities remain close to 1, with a minimum value of 0.945.

Setting	Time	PSNR	SSIM	LPIPS
<i>Dense Warm-up Steps</i>				
10	1015	23.4520	0.8020	0.1615
11	1043	24.2380	0.8163	0.1504
12	1075	24.8880	0.8287	0.1346
13	1104	25.7220	0.8411	0.1214
14	1105	26.5170	0.8562	0.1053
15	1128	27.2420	0.8674	0.0958
16	1146	27.5740	0.8714	0.0927
17	1167	27.7680	0.8749	0.0896
18	1195	28.3360	0.8831	0.0814
19	1228	28.8090	0.8895	0.0763
20	1234	29.2140	0.8946	0.0716
<i>Entropy and Mask Refresh</i>				
Never	1018	21.6030	0.7589	0.2035
Every 10 Steps	1112	21.6030	0.7589	0.2035
Every 5 Steps	1198	21.6030	0.7589	0.2035
Every 2 Steps	1481	21.6030	0.7589	0.2035

Setting	Time	PSNR	SSIM	LPIPS
<i>Number and Placement of Dense Layers</i>				
1, Prefix	1036	23.4520	0.8020	0.1615
1, Uniform	1016	23.4520	0.8020	0.1615
2, Prefix	1030	23.5820	0.8053	0.1490
2, Uniform	1036	23.4690	0.8001	0.1622
3, Prefix	1067	23.2840	0.8044	0.1488
3, Uniform	1043	23.3890	0.7962	0.1658
4, Prefix	1057	23.2200	0.8033	0.1534
4, Uniform	1060	23.4270	0.7993	0.1626
<i>Block Size</i>				
40	1295	23.3930	0.7957	0.1690
48	1211	23.3710	0.7923	0.1734
72	1068	23.6530	0.7957	0.1686
90	1019	23.4520	0.8020	0.1615
120	952	22.2880	0.7742	0.1767

Table 5: Additional hyperparameter ablations on Wan2.2-14B T2V with 40 denoising steps at 720×1280 resolution. Time is reported in seconds. Unless otherwise specified, TRA uses 10 dense warm-up steps, one prefix dense layer, block size 90, and no periodic entropy refresh. Reconstruction metrics are measured against Dense Attention outputs.

B.2 Additional Qualitative Results

Figure 11 presents additional frame-level visualizations generated with TRA. Each row contains temporally ordered frames sampled from one video. TRA preserves subject ap-

pearance, scene structure, fine-grained details, and temporal consistency while using query-specific sparse attention.

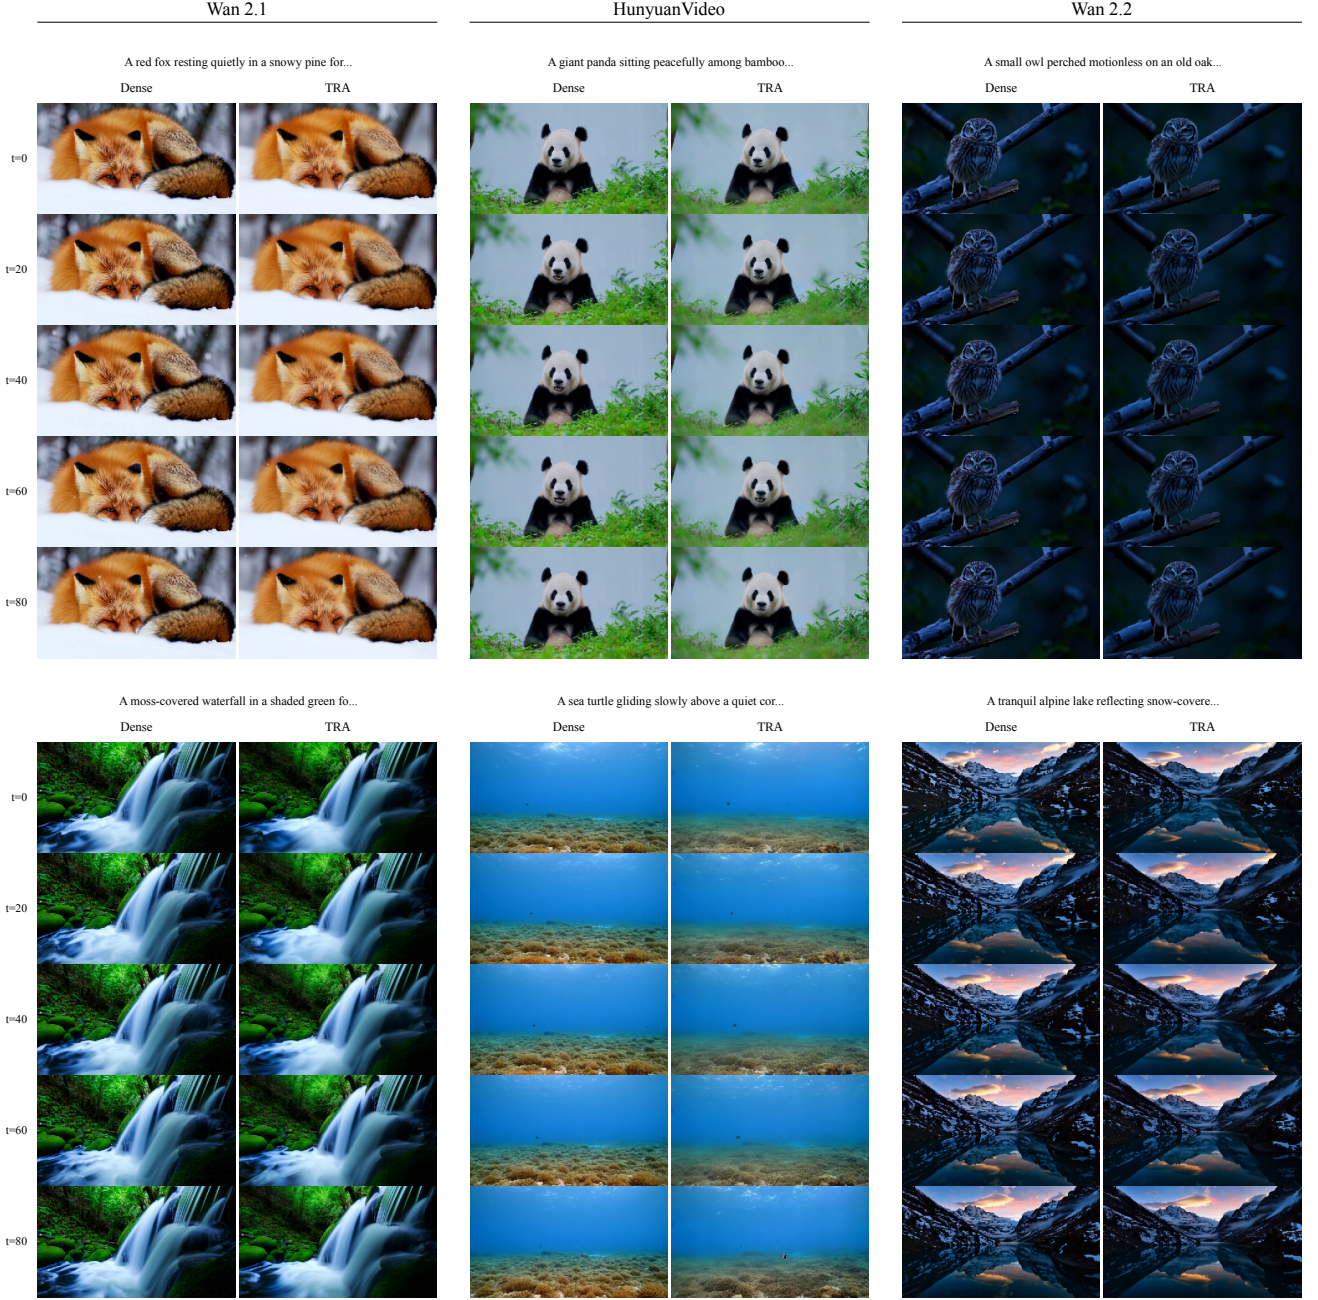


Figure 11: Additional qualitative results generated with TRA. Each row shows temporally ordered frames sampled from one video. TRA preserves coherent appearance, scene structure, and motion throughout the generated sequence.

C Implementation Details

Let F be the number of latent video frames, $P = HW$ the number of spatial tokens per frame, and $N = FP$ the number of video tokens. Let S denote the total sequence length, including optional text tokens. The sequence is partitioned

into

$$B = \left\lceil \frac{S}{b} \right\rceil$$

blocks of b tokens. The mask-construction kernel outputs a Boolean block mask, where an entry of one denotes a retained query-key block pair. We use H_a to denote the number of

attention heads.

C.1 Flash Radius Mask Construction

Entropy-to-budget-to-radius lookup. For attention head h and query token q , the fused entropy kernel produces the query-wise attention entropy $\mathcal{H}_{h,q}$. Following the main method, TRA first estimates the target key count and then obtains the smallest boundary-aware base radius whose discrete support reaches that count:

$$\hat{K}_{h,q}^\tau = \lceil \tau \exp(\mathcal{H}_{h,q}) \rceil, \quad r_{h,q} = \mathcal{L} \left(f_q, x_q, y_q, \hat{K}_{h,q}^\tau \right), \quad (26)$$

where τ is the target attention mass and $\mathcal{L}$ implements the boundary-aware radius selection defined by the discrete support count in the main method. For fixed latent-grid dimensions and temporal decay, the discrete counts are precomputed; inference therefore requires only the analytic budget evaluation and a lookup, without per-query key ranking or iterative radius search.

Temporal radius decay. The implementation uses the same exponential temporal decay as the main method (Li et al. 2026), $\phi(\delta) = \exp(-\gamma\delta)$. Thus, for a query-key pair (q, k) , the spatial threshold is

$$\rho_{h,q,k} = r_{h,q} \phi(|f_q - f_k|). \quad (27)$$

Token-pair distance. Let $\mathbf{x}_q = (x_q, y_q)$ denote the two-dimensional spatial coordinate of token q . Consistent with Insight II and the mask definition in the main paper, the kernel evaluates

$$d_s(q, k) = \|\mathbf{x}_q - \mathbf{x}_k\|_2. \quad (28)$$

For the sequence-distance ablation, the spatial term is replaced by $|q - k|$. To match the area of a two-dimensional disk using a symmetric one-dimensional interval, the corresponding radius is initialized as

$$\rho_{1D} = \frac{\pi}{2} \rho_{2D}^2. \quad (29)$$

Kernel execution. Before mask construction, each $H \times W$ frame is partitioned into spatial tiles, and its video tokens are rearranged in tile-major order. Spatially neighboring tokens therefore become contiguous in the one-dimensional sequence, allowing token-radius supports to be represented by fewer and denser query-key blocks. The same permutation is applied to Q , K , and V , and the attention outputs are restored to the original token order after sparse attention.

The CUDA grid assigns one thread block to each (h, u, v) tuple. A bounding-box test first rejects block pairs that cannot contain any valid token interactions. For the remaining pairs, one thread is assigned to each query lane, while warp ballots and population counts compute the number of valid query tokens for every key column. A single final write produces $M_{h,u,v}$.

The resulting block mask remains head and query specific. For joint text-video attention, blocks containing text keys remain dense, matching the text-key handling defined in the main method.

Algorithm 1: CUDA block-mask construction.

Require: attention entropy $\mathcal{H} \in \mathbb{R}^{H_a \times N}$; target attention mass τ ; boundary-aware radius lookup $\mathcal{L}$; block size b ; number of video blocks $B_v = \lceil N/b \rceil$
Ensure: block mask $M \in \{0, 1\}^{H_a \times B \times B}$

- 1: $\hat{K} \leftarrow \lceil \tau \exp(\mathcal{H}) \rceil$, $R \leftarrow \mathcal{L}(\hat{K})$ ▷ query-specific budgets and radii
- 2: **for all** attention heads h , query blocks u , and key blocks v **in parallel do**
- 3: **if** $u \geq B_v$ **or** $v \geq B_v$ **then**
- 4: $M_{h,u,v} \leftarrow 1$
- 5: **continue** ▷ text or non-video blocks remain dense
- 6: **end if**
- 7: **if** BoundingBoxReject(h, u, v, R) **then**
- 8: $M_{h,u,v} \leftarrow 0$
- 9: **continue** ▷ no token pair can satisfy the radius constraint
- 10: **end if**
- 11: **for all** key columns $j = 0, \dots, b-1$ **in parallel do**
- 12: $c_j \leftarrow 0$
- 13: **for all** query lanes $i = 0, \dots, b-1$ **in parallel do**
- 14: $q \leftarrow ub + i$, $k \leftarrow vb + j$
- 15: **if** $q < N$ **and** $k < N$ **then**
- 16: $\rho \leftarrow R_{h,q} \phi(|f_q - f_k|)$
- 17: $z_{i,j} \leftarrow [d_s(q, k) \leq \rho]$
- 18: $c_j \leftarrow c_j + z_{i,j}$ ▷ warp ballot and population count
- 19: **end if**
- 20: **end for**
- 21: **end for**
- 22: $\mathcal{C} \leftarrow \{j : c_j > 0\}$ ▷ nonempty key columns
- 23: $\mathcal{C}_{hi} \leftarrow \{j : c_j > b/3\}$ ▷ high-coverage columns
- 24: $M_{h,u,v} \leftarrow [|\mathcal{C}| > 0] \wedge [10|\mathcal{C}_{hi}| > 6|\mathcal{C}|]$
▷ retain if > 60% of nonempty columns have high coverage
- 25: **end for**

C.2 Fused Attention Entropy Kernel

For query row i , let

$$s_{ij} = \frac{\mathbf{q}_i^\top \mathbf{k}_j}{\sqrt{d}}, \quad p_{ij} = \frac{\exp(s_{ij})}{\sum_\ell \exp(s_{i\ell})}. \quad (30)$$

The Shannon entropy in nats can be rewritten as

$$\mathcal{H}_i = - \sum_j p_{ij} \log p_{ij} = \log \left(\sum_j e^{s_{ij}} \right) - \sum_j p_{ij} s_{ij}. \quad (31)$$

This identity allows entropy to be accumulated together with the online softmax state without materializing the complete attention matrix.

Computational cost. The entropy accumulator reuses the same score tiles and online-softmax states as the dense attention forward pass. It introduces only scalar per-row accumulators and one entropy writeback, rather than a second

Algorithm 2: Fused online softmax and entropy extraction.

Require: Query tile Q ; key/value tiles $\{(K^{(r)}, V^{(r)})\}_{r=1}^R$;
softmax scale $\alpha = 1/\sqrt{d}$

Ensure: Attention output O ; per-query attention entropy $\mathcal{H}$

```

1: for all query rows  $i$  in the tile in parallel do
2:    $m \leftarrow -\infty, \ell \leftarrow 0, a \leftarrow 0, o \leftarrow \mathbf{0}$ 
3:   for  $r = 1$  to  $R$  do
4:      $\mathbf{s} \leftarrow \alpha \mathbf{q}_i (K^{(r)})^\top$ 
5:      $m_r \leftarrow \max_j s_j$ 
6:      $\mathbf{w} \leftarrow \exp(\mathbf{s} - m_r)$ 
7:      $\ell_r \leftarrow \sum_j w_j$ 
8:      $a_r \leftarrow \sum_j w_j s_j$ 
9:      $\mathbf{o}_r \leftarrow \sum_j w_j \mathbf{v}_j$ 
10:     $m' \leftarrow \max(m, m_r)$ 
11:     $u \leftarrow \exp(m - m'), v \leftarrow \exp(m_r - m')$ 
12:     $\ell \leftarrow u\ell + v\ell_r$ 
13:     $a \leftarrow ua + va_r$ 
14:     $\mathbf{o} \leftarrow u\mathbf{o} + v\mathbf{o}_r$ 
15:     $m \leftarrow m'$ 
16:   end for
17:    $O_i \leftarrow \mathbf{o}/\ell$ 
18:    $\mathcal{H}_i \leftarrow \log \ell + m - a/\ell$ 

```

▷ equivalent to Equation (31)

19: **end for**

attention pass or explicit softmax materialization. Consequently, entropy extraction does not change the asymptotic complexity of dense attention and requires only $O(H_a N)$ additional storage.

Let B_v be the number of video-token blocks. The worst-case logical complexity of mask construction is

$$O(H_a B_v^2 b^2). \quad (32)$$

In practice, the bounding-box test rejects spatially incompatible block pairs before token-level evaluation, while tile-major ordering concentrates valid interactions into a small number of neighboring blocks. The final mask requires $O(H_a B^2)$ Boolean storage and is consumed directly by the FlashInfer block-sparse attention backend (Ye et al. 2025).

D Limitations and Future Work

Restricted and static sparsity patterns. TRA uses a spatiotemporal distance prior to convert query-specific token budgets into structured sparse supports. Although the radius is adapted to the entropy of each query, the resulting support is still constrained to a predefined, distance-based pattern with a fixed temporal-decay rule. Such a pattern may not fully capture content-dependent interactions, including long-range object correspondence, nonlocal motion, or scene-dependent attention structures. Future work could explore online token selection or richer adaptive patterns that jointly account for semantic content, motion, and spatial structure.

Lack of a dedicated token-level sparse-attention kernel.

TRA currently executes query-specific token-level sparsity through an existing block-sparse attention backend. Tile-major token reordering and block-mask construction reduce blockification overhead but retain redundant computation

within selected blocks. A dedicated kernel that fuses mask construction, token gathering, and sparse attention could further improve the practical efficiency of TRA.