

Portfolio Optimization under Dynamic Rebalancing via Topological Data Analysis and News Sentiments

Divyaneer Garg^{a,*}

ARTICLE INFO

Keywords:

Portfolio optimization

Topological data analysis

Agglomerative clustering

FinBERT

News sentiments

Rebalancing

ABSTRACT

Understanding similarity among financial assets is essential for portfolio diversification. This paper proposes a novel portfolio framework that addresses three key aspects of asset management: investment-worthy asset selection, optimal weight allocation under practical constraints, including transaction costs, short-selling, and upper and lower bounds, and dynamic rebalancing. The framework integrates Topological Data Analysis (TDA) with multi-dimensional data by combining technical indicators with sentiment scores derived from financial news using FinBERT. A TDA-based distance measure is introduced within agglomerative clustering to select topologically dissimilar assets. The inclusion of sentiment as a feature enhances asset selection, as sentiment signals are highly dynamic and capture rapid changes in market perception and investor behavior that are not reflected in technical indicators. Unlike traditional correlation and Euclidean distances, the proposed approach captures complex, non-linear dependencies through topological summaries such as persistence diagrams and landscapes.

To capture rapidly evolving market sentiment, the proposed framework adopts a dynamic rolling-window rebalancing strategy with frequent portfolio updates. In addition, a retention mechanism is introduced to preserve high-quality assets across consecutive rebalancing windows, thereby reducing excessive portfolio turnover and transaction costs. Extensive empirical analysis on S&P500 constituents using a rolling window framework demonstrates that the proposed framework consistently achieves higher returns and better reward-risk ratios than correlation and Euclidean based frameworks, as well as benchmark strategies including Naïve, Index, and portfolios formed from the full asset universe. Notably, the model exhibits robustness by generating positive performance even during periods of heightened market uncertainty, such as the U.S.-Israel-Iran conflict.

1. Introduction

Portfolio optimization (PO) encompasses three key processes: asset selection, asset weighting, and asset management. Asset selection involves identifying a subset of promising assets from a wider investment universe by assessing their characteristics, including historical performance and market conditions. Asset weighting allocates capital among these selected assets to construct an efficient portfolio, either by minimizing portfolio risk for a given expected return or maximizing expected return for a specified level of risk [42]. Finally, asset management entails the ongoing monitoring and adjustment of the portfolio over time, particularly through periodic rebalancing in response to evolving market conditions and new information. Collectively, these processes form the backbone of modern portfolio construction, essential to both financial economics and practical investment management.

Asset management [1] can be categorized into passive and active strategies. Passive management [17], often involving index funds, aims to replicate a benchmark index's performance with minimal trading and lower risk, appealing to risk-averse investors. Conversely, active management [19, 66] frequently adjusts portfolios to outperform benchmarks, attracting more risk-tolerant investors willing to accept higher transaction costs and risk for potentially higher

returns. This study emphasizes on actively managed portfolios.

Despite the foundational role of asset selection [69], much existing literature focuses on the asset-weighting stage without selecting investment-worthy assets, treating portfolio design as primarily an optimization problem. However, the choice of assets significantly impacts portfolio performance, highlighting the critical nature of the asset selection step. Markowitz's principle of diversification [42, 45] reinforces that spreading investments across diverse asset classes reduces risk. Conversely, excessive diversification can incur higher transaction costs, complicate portfolio management, and dilute the potential benefits of active asset selection. Keynes et al. [30] advocated for concentrated investment in a limited number of strategically chosen assets, thus favoring focused strategies. This dynamic between diversification and concentration has sparked interest in sparse portfolio selection [7, 13], aiming to construct portfolios with relatively few assets. Methods to induce sparsity typically fall into three categories: regularization-based approaches, cardinality-constrained optimization models, and clustering via unsupervised learning. Regularization methods introduce penalty terms, typically based on the ℓ_1 -norm of portfolio weights, to shrink insignificant asset positions toward zero [23, 32]. Alternatively, cardinality constraints directly restrict the number of selected assets [28, 65]. However, regularization approaches often require careful hyperparameter tuning and may lead to risk concentration in high-dimensional

 maz228080@iitd.ac.in (Divyaneer Garg)

ORCID(s): 0009-0008-1503-1666 (Divyaneer Garg)

settings [32, 64]. Similarly, cardinality-constrained portfolio models are non-convex and NP-hard, resulting in significant computational complexity and reliance on specialized heuristic algorithms for practical implementation [61]. In contrast, clustering-based asset selection provides a computationally efficient alternative by grouping assets into homogeneous clusters, simplifying the identification of representative assets. Clustering-based methods have shown strong potential for sparse portfolio construction by reducing dimensionality. Studies have shown the effectiveness of agglomerative clustering for portfolio construction using correlation-based similarity [35] and its applicability and superiority in pair trading frameworks [25]. Consequently, this work employs agglomerative clustering (also known as hierarchical clustering) to identify investment-worthy assets for portfolio construction. For recent advancements in agglomerative clustering methods, see Ran et al. [50].

Financial markets generate both structured data, such as prices and technical indicators, and unstructured data, including financial news headlines. While structured data can easily integrate into quantitative models, extracting insights from textual data remains complex due to financial terminology and contextual dependencies. Recent advances in domain-specific language models have led to architectures such as FinBERT [3] and FinLLaMA [31], which extend BERT [16] and LLaMA [60] using financial-domain training corpora. In particular, FinBERT employs transformer-based contextual learning to better capture financial semantics and sentiment compared to traditional lexicon-based and general-purpose language models [3, 15, 51]. FinBERT is pre-trained and fine-tuned on financial documents, enabling better understanding of financial language and sentiment, and outperforming standard BERT and dictionary-based methods in financial sentiment analysis [39].

Recent studies highlight the importance of investor sentiment and multi-source data in financial decision-making. Investor sentiment has been linked to asset volatility and market behavior [57, 62], while integrating financial news, social media sentiment, and technical indicators has been shown to improve asset prediction and portfolio performance [63, 66]. Similarly, Zhou et al. [71] propose an asset selection framework based on data envelopment analysis that incorporates multiple data sources, including technical and social media data. A comprehensive review of textual data-driven asset market prediction is provided in Nardo et al. [47].

The effective integration of these heterogeneous data sources can provide a more comprehensive representation of asset behavior and improve investment decision-making. In particular, financial news sentiment contains valuable information about market perception and investor reaction that may not be fully reflected in historical price-based variables and indicators alone. Motivated by this, we employ FinBERT to extract sentiment scores from financial news headlines and incorporate them into the multi-dimensional feature representation used for agglomerative clustering. Consequently, the portfolio construction process comprises asset selection

based on multi-dimensional data, including news sentiment, followed by investment weight determination and dynamic rebalancing.

The effectiveness of any clustering approach largely depends on the choice of distance measure, with correlation-based [35] and Euclidean distances [25] being among the most commonly used. However, Pearson correlation can be misleading when returns do not follow Gaussian or elliptical distributions, possibly leading to erroneous similarity assessments between financial variables [18]. As a result, highly correlated assets may still exhibit different return patterns, leading to misleading similarity assessments and unintended portfolio exposures. Similarly, Euclidean distance captures only pointwise differences and may overlook complex nonlinear relationships in financial data. These limitations become more pronounced when asset trading data are represented using multidimensional features rather than univariate return series.

These limitations motivate the use of Topological Data Analysis (TDA), which is effective in extracting structural and non-linear information from multidimensional data. Unlike correlation and Euclidean measures, TDA captures qualitative features such as connected components, loops, and void providing insights into the underlying patterns in financial datasets, particularly in non-linear contexts [4, 24]. These features provide insights into the intrinsic organization of data, particularly in settings characterized by non-linearity and complex dependence patterns. For instance, Goel et al. [24] proposed a TDA norm-based asset filtering strategy that outperformed correlation-based approaches, while Aromi et al. [4] demonstrated the effectiveness of persistence landscapes (PLs) in capturing structural properties of financial data.

TDA is typically applied to multidimensional point-cloud data, whereas univariate time series require an additional embedding step to reconstruct a higher-dimensional space. In contrast, our framework naturally forms a four-dimensional point-cloud representation for each asset using relative strength index (RSI), stochastic oscillator (SO), moving average convergence divergence (MACD), and sentiment scores, enabling a direct application of TDA. Motivated by this advantage, the present study integrates multi-dimensional asset representations with TDA to construct more informative distance measures for capturing asset similarity. Specifically, we compute distance matrices based on persistence diagrams (PDs) and persistence landscapes (PLs), and subsequently employ these within an agglomerative clustering framework for effective asset selection. In particular, persistence homology (PH), a key tool in TDA, summarizes these topological features across multiple scales through PDs and PLs, offering a robust representation that is less sensitive to noise and small perturbations.

TDA has been successfully applied in various domains, including finance, such as in pair trading [40], classification [29], pattern recognition [9], and biological data analysis

[38, 48]. In finance, TDA has shown promise in detecting structural market changes and financial crises [21], though its application to portfolio construction remains relatively limited [22, 52, 58]. Topologically distinct assets exhibit fundamentally different structural and temporal characteristics. Since TDA captures higher-order structural relationships beyond linear dependence, topologically distinct assets are less likely to exhibit similar market behavior, thereby improving diversification, which is desirable for portfolio construction. Motivated by this, we employ TDA-based similarity measures for asset selection.

We employ two TDA-based distance measures, namely the Average Wasserstein Distance (AWD) on PDs and the Average Persistence Landscape (APL) distance on PLs [22]. These distances are computed on multidimensional asset point clouds constructed using technical indicators and sentiment scores. To analyze the impact of sentiment information, we consider both 3-dimensional representations based only on technical indicators and 4-dimensional representations that additionally include sentiment scores, and compare their effects on clustering and subsequent portfolio construction.

For benchmarking, we also consider correlation and Euclidean distances under both feature settings, with and without sentiment, resulting in eight distinct distance measures. The selected assets are then incorporated into a dynamic rebalancing mean–variance (DRMV) framework. Following [67, 68], the model incorporates practical constraints such as transaction costs, short-selling decisions, and lower and upper bounds on holdings, thereby improving the realism and implementability of the portfolio strategy. Incorporating these real-world constraints, particularly transaction costs, is essential, as they are often neglected in existing portfolio construction studies despite their significant impact on portfolio turnover, implementability, and realized performance.

The proposed framework is implemented using a rolling-window rebalancing mechanism. At each rebalancing date, assets are first selected through the proposed clustering-based filtering approach and then allocated using the (DRMV) model. The allocation from the previous period is incorporated into the current optimization problem to dynamically account for transaction costs and reduce unnecessary turnover, thereby improving portfolio stability and practical applicability. We conduct extensive empirical analysis using eight different distance measures and compare the proposed framework against several benchmark strategies, including the full-universe (DRMV) model without clustering, the equally weighted portfolio, the market index, and the buy-and-hold version of the proposed framework. This comparison enables a systematic evaluation of the effects of clustering, sentiment integration, TDA-based similarity measures, and dynamic rebalancing on portfolio performance.

The proposed framework is evaluated using daily returns of S&P500 constituents from January 2025 to December 2025, and further tested during the recent U.S.–Israel–Iran conflict

period from October 2025 to March 2026 to assess robustness under market uncertainty. The empirical results show that TDA-based portfolios, particularly those incorporating sentiments with indicators, consistently outperform correlation and Euclidean based portfolios as well as benchmark strategies.

1.1. Motivation

Portfolio diversification relies on identifying sufficiently distinct assets to reduce portfolio risk without sacrificing return. Most existing portfolio construction and asset screening methods use similarity measures such as Pearson correlation [27, 44, 46, 49] and Euclidean distance [43]. However, these measures often fail to capture the nonlinear, noisy, and time-varying structure of financial markets [22], which may limit diversification benefits.

Meanwhile, modern financial markets are influenced by heterogeneous data sources, including historical prices, technical indicators, and investor sentiment from financial news and media [25, 66, 71]. Although these sources contain valuable information, they are often analyzed separately or used only during portfolio allocation [66]. This motivates the need for a unified framework that integrates multidimensional asset information for asset selection.

In this context, TDA provides a promising alternative by capturing structural and persistent geometric patterns in complex and high-dimensional data through tools such as PDs and PLs. Unlike traditional similarity measures, TDA can effectively identify nonlinear dependence structures and hidden patterns, making it well-suited for financial applications. Furthermore, financial markets are frequently affected by geopolitical events, economic uncertainty, and sentiment-driven reactions, motivating the development of robust and adaptive portfolio strategies. These considerations motivate the proposed framework, which integrates TDA, multidimensional asset representations, sentiment information, and dynamic portfolio optimization (PO) into a unified investment framework.

1.2. Objectives

The primary objective of this study is to develop an asset screening and portfolio construction framework that improves portfolio performance by identifying topologically dissimilar assets using multidimensional financial information. Each asset is represented using technical indicators (RSI, SO, and MACD) along with sentiment scores extracted from financial news headlines using FinBERT, thereby incorporating both quantitative and textual information into the asset representation.

The second objective is to measure asset similarity using topological summaries rather than conventional linear measures. Specifically, TDA is employed to construct PD and PL, from which pairwise similarity measures are computed and integrated into an agglomerative clustering framework for asset selection.

The third objective is to examine the effectiveness of the proposed TDA-based asset screening within the (DRMV) framework that incorporates practical constraints such as transaction costs, short selling, and rolling rebalancing. Finally, the study evaluates the robustness of the proposed framework under volatile and stressed market conditions. Overall, the study investigates whether TDA-based multidimensional representations and sentiment integration can improve asset selection and portfolio performance compared to conventional approaches.

1.3. Main findings

The empirical results demonstrate that the proposed framework effectively identifies informative asset subsets and improves portfolio performance. TDA-based similarity measures derived from PDs and PLs provide more informative asset screening than conventional correlation and Euclidean distance measures. The inclusion of investor sentiment extracted from financial news further enhances asset representation and clustering quality, leading to improved asset selection.

Portfolios constructed using the proposed TDA-based filtering and dynamic rebalancing framework consistently outperform traditional filtering methods and benchmark strategies, including the naïve portfolio, market index, optimization without filtering, and buy-and-hold strategies. The proposed framework achieves superior return and reward-to-risk ratios while maintaining sparse and implementable portfolios under practical constraints.

The robustness analysis further shows that the proposed methodology remains effective during periods of market stress and geopolitical uncertainty. Overall, the findings highlight the potential of combining TDA, multidimensional asset representations, and sentiment information for robust and practical PO.

1.4. Contributions

This paper makes several methodological and empirical contributions to the literature on the application of TDA, asset selection, and PO. First, the study develops a multidimensional asset representation that integrates technical indicators and investor sentiment extracted from financial news using FinBERT, enabling a richer characterization of asset behavior and incorporating alternative textual information directly into the asset similarity structure. Second, the paper introduces a TDA-driven asset screening framework based on topological dissimilarity. By employing topological distance within an agglomerative clustering framework, the proposed approach identifies structurally distinct assets to enhance portfolio diversification and sparse asset selection.

Third, the study provides a comprehensive empirical comparison against benchmark strategies, including correlation- and Euclidean-based filtering methods, the naïve portfolio, market index, and optimization over the full asset universe. The results demonstrate the economic value of integrating

TDA, multidimensional representations, and sentiment information in dynamic portfolio construction. Overall, the paper contributes to the intersection of financial optimization, machine learning, and TDA by proposing an interpretable, data-driven, and practically implementable framework for asset selection and PO.

2. The description of data sources

Traditional asset selection methods mainly rely on price-based information. However, financial markets are influenced by multiple heterogeneous data sources, including technical indicators and investor sentiment reflected in news headlines. While technical indicators capture historical market dynamics, sentiment data provide behavioral and forward-looking information.

2.1. Technical indicator

The proposed framework utilizes daily open, high, low, and close asset prices to compute three widely used technical indicators: RSI, SO, and MACD [2, 6, 63]. These indicators are employed as input features for the asset selection process. A brief description of each indicator is provided in Appendix A.

2.2. News-based sentiment indicators

Financial news reflects investor perception and market expectations that may not be fully captured by historical prices [5, 14]. Prior studies show that sentiment-driven textual information significantly influences asset prices and trading behavior [11]. Motivated by this, we incorporate firm-level financial news headlines obtained from the *Refinitiv Eikon* platform through the LSEG workspace API.

Framework for measuring sentiment score:

Since TDA requires quantitative inputs, textual financial news must first be transformed into numerical representations. To achieve this, sentiment extraction techniques are employed to quantify the polarity and intensity of sentiment expressed in news headlines.

Traditional dictionary-based approaches, such as the financial lexicon proposed by Loughran and McDonald [37], may not adequately capture contextual information, nuanced tone, or sarcasm in financial text. To address these limitations, this study employs FinBERT [3], a transformer-based model developed by Prosus AI for financial sentiment analysis. FinBERT has shown strong performance in financial NLP applications and has been widely utilized in recent studies [26, 34, 56]. In addition, its computational efficiency makes it suitable for high-frequency and real-time financial data processing. Validation studies by Mantshimuli [41] further demonstrate its superior classification accuracy compared with alternative benchmark models.

The sentiment extraction procedure consists of four steps: (i) collecting firm-level financial news headlines from the Refinitiv platform, (ii) translating non-English headlines into English, (iii) classifying each headline using FinBERT

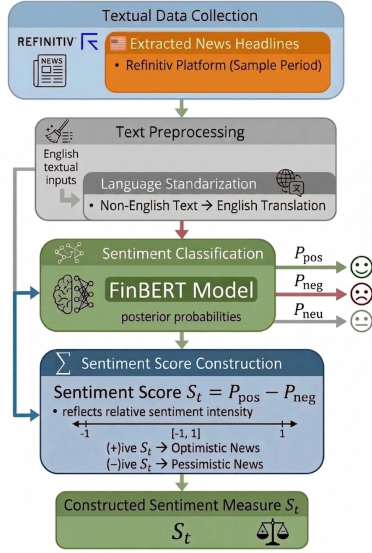


Figure 1: Flowchart for sentiment score computation from news headlines. Google Gemini was used to refine and enhance the visual presentation of a flowchart developed by the author. The resulting figure was subsequently reviewed, modified, and finalized by the author.

to obtain posterior probabilities for positive, negative, and neutral sentiments, denoted by P_{pos} , P_{neg} , and P_{neu} , respectively, and (iv) constructing the sentiment score as

$$S_t = P_{\text{pos}} - P_{\text{neg}}, \quad S_t \in [-1, 1],$$

where positive and negative values of S_t indicate optimistic and pessimistic sentiment, respectively, and larger absolute values represent stronger sentiment intensity.

The overall sentiment extraction framework is illustrated in Figure 1. For each asset, the daily sentiment score is computed as the average sentiment score of all associated news headlines that day. To ensure consistency with trading data, sentiment values from non-trading days are reassigned to the immediately following trading day. By integrating sentiment scores with RSI, SO, and MACD, a four-dimensional representation is constructed for each asset.

Data preprocessing: Before clustering and topological analysis, all input variables are standardized to ensure equal contribution in distance computations. Since RSI, SO, MACD, and sentiment scores are measured on different scales, standardization transforms them to a comparable scale and prevents the clustering process from being biased toward features with larger numerical magnitudes.

3. Topological data analysis

A key requirement of TDA is that the data must be represented as a point cloud in a multidimensional space. In financial applications, however, portfolio construction is often based only on return data, which forms a one-dimensional time series and does not naturally provide such a representation. Therefore, existing studies [22, 23, 24] commonly use

Takens' embedding [59] to reconstruct a higher-dimensional space from a single time series. Although theoretically sound, this approach generates an artificial point cloud and depends heavily on heuristic choices of embedding parameters such as delay and embedding dimension. The choice of these parameters may influence the extracted topological features. In contrast, our approach constructs the point cloud directly from multiple economically meaningful time-series features. Each observation consists of three technical indicators (RSI, SO, and MACD) along with a sentiment indicator derived from FinBERT, resulting in a natural four-dimensional representation of a point cloud. This enables the extraction of topological structures directly from multidimensional market and behavioral information, avoiding the need for artificial embedding.

After constructing the point cloud representation, the next step is to build an appropriate simplicial complex. A m -simplex¹ is defined as the convex hull of $m + 1$ affinely independent points $\{u_0, u_1, \dots, u_m\}$, where each $u_i \in \mathbb{R}^q$. A simplicial complex C is a collection of simplices satisfying two conditions: (i) Every face² of a simplex in C is also contained in C ; that is, if $\sigma \in C$ and $\tau \subseteq \sigma$, then $\tau \in C$; (ii) The intersection of any two simplices in C is either empty or a common face of both. Equivalently, a geometric simplicial complex in $\mathbb{R}^q$ is a collection of simplices for which every face of a simplex is also included and the intersection of any two simplices is either empty or a common face.

Basically, the simplicial complex of a point cloud $Z = \{Z_{t_1}\}_{t_1=1}^{T_1}$, $Z_{t_1} \in \mathbb{R}^q$ is the space comprising points, edges, triangles, tetrahedra, and higher-dimensional polytopes. Note that 0-dimensional simplices represent data points (vertices), 1-dimensional simplices are connected pairs of vertices (edges), and 2-dimensional simplices are filled triangles determined by their three vertices. Several constructions are available to build a simplicial complex, including the Čech complex [8] and the Vietoris–Rips complex [20]. In this study, we adopt the Vietoris–Rips (Rips) complex due to its computational tractability and widespread use in applied TDA. The fundamental idea of the Rips complex is to connect sufficiently close points. This leads to the question of how “sufficient closeness” is determined. This notion is governed by a scale parameter $\epsilon > 0$, which determines whether pairs of points are connected. The choice of ϵ directly influences the resulting topological structure. If ϵ is too small, few or no edges are formed, and the complex consists primarily of isolated vertices, yielding limited structural information. Conversely, if ϵ is excessively large, all points become mutually connected, resulting in a single connected component and the disappearance of meaningful topological features.

¹A m -simplex $[u_0, u_1, \dots, u_m]$ is a convex hull $\{\sum_{i=0}^m \eta_i u_i \mid \sum_{i=0}^m \eta_i = 1 \text{ and } \eta_i \geq 0 \text{ for all } i\}$ of $m + 1$ geometrically independent points $\{u_0, u_1, \dots, u_m\}$.

²The faces of a k -simplex $[u_0, \dots, u_k]$ are the $(k-1)$ -simplices spanned by subsets of $\{u_0, \dots, u_k\}$.

Rather than selecting a single arbitrary value of ϵ , TDA addresses this issue by examining the evolution of the simplicial complex across a continuum of scales. Specifically, we construct a sequence of Vietoris–Rips complexes indexed by an increasing set of scale parameters, forming a filtration $\{R(Z, \epsilon_n)\}_{n \in \mathbb{N}}$ where $Z \subset \mathbb{R}^q$ denotes the point cloud and ϵ_n is a non-decreasing sequence with $\epsilon_0 = 0$. This nested sequence satisfies $R(Z, \epsilon_1) \subset R(Z, \epsilon_2)$ whenever $\epsilon_1 < \epsilon_2$, allowing the topological structure of the data to be studied as a function of scale.

Formally, for a threshold $\epsilon > 0$, the Vietoris–Rips complex $R(Z, \epsilon)$ contains all m -simplices whose vertices are pairwise within distance 2ϵ . In particular, an edge between two points $z_a, z_b \in Z$ is included if $d(z_a, z_b) < 2\epsilon$. A triangle is formed when all pairwise distances among three vertices satisfy this condition. More generally, an m -simplex $\{z_0, \dots, z_m\}$ is included in $R(Z, \epsilon)$ whenever every pair of vertices lies within distance 2ϵ .

As ϵ increases, the collection $\{R(Z, \epsilon)\}$ forms a filtration, i.e., a nested sequence of simplicial complexes. Across this filtration, topological features such as connected components, loops, and higher-dimensional voids appear (birth) and disappear (death) as the scale parameter changes. Their disappearance occurs due to the addition of simplices that merge components or fill existing holes. Features that persist over a wide range of ϵ are considered robust and geometrically meaningful, as they reflect intrinsic structures of the point cloud, whereas short-lived features are generally treated as noise.

Given the filtration $\{R(Z, \epsilon)\}_{\epsilon > 0}$, the homology groups $H_r(R(Z, \epsilon))$, denoted simply by H_r , for $r = 0, 1, 2, \dots$, are computed to capture different types of topological structure of the simplicial complex. In particular, H_0 represents connected components, describing how data points cluster as ϵ increases, while H_1 characterizes one-dimensional loops formed by closed cycles that are not filled by higher-dimensional simplices. Higher-order groups such as H_2 correspond to two-dimensional voids or cavities enclosed by simplices. As the scale parameter changes, these topological features may appear, merge, or disappear due to the addition of simplices in the filtration. This evolution of features across scales is known as *persistent homology*, where each feature is identified by its birth and death scales, providing a multi-scale representation of the underlying topological structure of the data.

For a fixed homological dimension r , each topological feature is characterized by a birth time b and a death time d , representing the values of ϵ at which the feature appears and disappears, respectively. The set of all such birth–death pairs forms the PD $\mathcal{D}_Z$, defined as a multiset of points in $\mathcal{W} = \{(b, d) \in \mathbb{R}^2 \mid 0 \leq b \leq d\}$. Each point (b, d) in the diagram corresponds to a topological feature that is created at scale b and vanishes at scale d during the filtration.

The primary aim of applying TDA is to uncover the intrinsic geometric structure of the four-dimensional point

cloud formed from technical and sentiment features through PH over multiple scales of the Vietoris–Rips filtration. By constructing the filtration and analyzing its PH, a multiscale representation is obtained. In this study, we mainly consider $r = 0$ and $r = 1$, corresponding to connected components and loops, respectively. To compare the topological structures of different assets, a distance measure between PDs is required. For this purpose, we employ the p -Wasserstein distance, which quantifies the optimal matching cost between the birth–death pairs of two PDs.

To analyze PD quantitatively, a suitable distance metric is required. One of the most commonly used measures for comparing PD is the p -Wasserstein distance.

Definition 3.1. The p -Wasserstein distance [12] between two PDs $\mathcal{D}_{Z_i}$ and $\mathcal{D}_{Z_j}$ is defined as

$$W_p(\mathcal{D}_{Z_i}, \mathcal{D}_{Z_j}) = \left(\inf_{\gamma} \sum_{z \in \mathcal{D}_{Z_i}} \|z - \gamma(z)\|_{\infty}^p \right)^{1/p}, \quad (1)$$

where $p \geq 1$, γ is a bijection between the diagrams, and $\|\cdot\|_{\infty}$ denotes the L^{∞} norm.

Although PD captures rich topological information, its metric space under the Wasserstein distance is incomplete, limiting direct statistical and machine learning analysis [8]. To overcome this, PLs were introduced as a functional representation of PDs. A PLs map birth–death pairs into continuous piecewise-linear functions, where significant topological features appear as prominent peaks.

Definition 3.2. Given birth–death pairs (b_i, d_i) , $i = 1, \dots, m$, the PLs are defined as

$$\zeta(k, t) = \zeta_k(t), \quad \zeta : \mathbb{N} \times \mathbb{R} \rightarrow [0, \infty),$$

where $\zeta_k(t)$ is the k -th largest value among $\{\Lambda_{(b_i, d_i)}(t)\}_{i=1}^m$, and $\zeta_k(t) = 0$ for $k > m$. The function $\Lambda_{(b, d)}(t)$ is defined as

$$\Lambda_{(b, d)}(t) = \begin{cases} t - b, & t \in \left[b, \frac{b+d}{2}\right], \\ d - t, & t \in \left[\frac{b+d}{2}, d\right], \\ 0, & \text{otherwise.} \end{cases} \quad (2)$$

To construct a PL, each birth–death pair (b, d) in the PD is transformed into a triangular function with center $(b + d)/2$ and height $(d - b)/2$. These functions are stacked to form a sequence of piecewise-linear functions, where the k -th landscape function $\zeta_k(t)$ is defined as the k -th largest value among all triangular functions at t .

PLs provide a functional representation of PDs, enabling the use of tools from functional analysis and statistical learning. In particular, PLs belong to the Banach space $L^p(\mathbb{N} \times \mathbb{R})$, consisting of sequences of functions $\zeta = (\zeta_k)_{k \in \mathbb{N}}$, where each $\zeta_k : \mathbb{R} \rightarrow \mathbb{R}$ denotes the k -th PL. To quantify the

magnitude of a PL and to compare landscapes obtained from different datasets, the L^p norm is commonly used:

$$\|\zeta\|_p = \left(\sum_{k=1}^{\infty} \|\zeta_k\|_p^p \right)^{1/p}, \quad (3)$$

where $\|\cdot\|_p$ is the standard L^p norm. Equipped with this norm, the space of PLs becomes a Banach space. The norm provides a numerical summary of the PLs and measures the overall prominence of topological features in the data. In practice, the cases $p = 1$ and $p = 2$ are most commonly used, allowing PLs to be treated as functional data objects for statistical analysis such as averaging and hypothesis testing. However, the mapping from PD to PL is generally not one-to-one, meaning that different PD may yield the same PL.

4. Asset selection procedure

4.1. Similarity measure between assets

Since TDA operates on point clouds in multi-dimensional spaces, consider a d -dimensional time series $Z = \{z_t \in \mathbb{R}^d\}_{t=1}^{T_1}$, where $d = 4$ in our case and T_1 denotes the in-sample period. The corresponding point cloud representation is

$$Z = \begin{bmatrix} z_1 \\ z_2 \\ \vdots \\ z_{T_1} \end{bmatrix} = \begin{bmatrix} z_1^{(1)} & z_1^{(2)} & z_1^{(3)} & z_1^{(4)} \\ z_2^{(1)} & z_2^{(2)} & z_2^{(3)} & z_2^{(4)} \\ \vdots & \vdots & \vdots & \vdots \\ z_{T_1}^{(1)} & z_{T_1}^{(2)} & z_{T_1}^{(3)} & z_{T_1}^{(4)} \end{bmatrix}, \quad (4)$$

where each row corresponds to a d -dimensional observation at time t .

Treating the entire series as a single point cloud ignores temporal ordering, since persistent homology depends only on the geometric structure of the point cloud. Consequently, two series with similar geometric structures but different temporal dynamics may produce identical PD (for example, one being the time-reversal of the other). To preserve temporal information, we employ a sliding-window framework.

For a fixed window length $L \in \{1, \dots, T_1\}$, the time series is divided into K sub-series:

$$\begin{aligned} \text{sub}(Z) &= \left\{ (z_1, \dots, z_L)_1, (z_{1+s}, \dots, z_{L+s})_2, \dots, \right. \\ &\quad \left. (z_{T_1-L+1}, \dots, z_{T_1})_K \right\} \\ &= \{Z_1, Z_2, \dots, Z_K\}. \end{aligned} \quad (5)$$

where the step size $s \in \{1, \dots, L\}$ satisfies $T_1 - L = s(K - 1)$. Here, $s = L$ corresponds to non-overlapping windows, while $s = 1$ gives maximal overlap. For each sub-series $\{Z_k\}_{k=1}^K$, a PD D_{Z_k} is computed.

Given two d -dimensional time series $Z_i = \{z_{it}\}_{t=1}^{T_1}$ and $Z_j = \{z_{jt}\}_{t=1}^{T_1}$ corresponding to asset i and j , their similarity is measured by aggregating the p -Wasserstein distances between the PDs of corresponding sub-series.

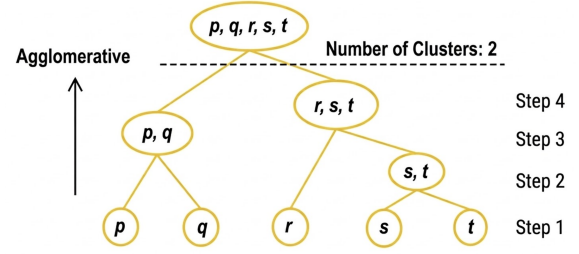


Figure 2: Illustration of agglomerative clustering.

Definition 4.1. For $1 \leq p < \infty$, the average p -Wasserstein distance is defined as

$$d_{\text{AWD}}(Z_i, Z_j) = \sum_{k=1}^K w_k W_p(D_{Z_{ik}}, D_{Z_{jk}}), \quad (6)$$

where $W_p(D_{Z_{ik}}, D_{Z_{jk}})$ denotes the p -Wasserstein distance between the PDs of the k -th sub-series of Z_i and Z_j , respectively. The weights satisfy $w_k > 0$ and $\sum_{k=1}^K w_k = 1$.

This framework preserves both the geometric information captured by persistent homology and the temporal evolution of the series. A similar distance can be defined using PL. Let $\zeta_{Z_{ik}}$ and $\zeta_{Z_{jk}}$ denote the PL corresponding to the PD $D_{Z_{ik}}$ and $D_{Z_{jk}}$ of the k -th sub-series of Z_i and Z_j , respectively.

Definition 4.2. For $1 \leq p < \infty$, the average p -landscape distance between Z_i and Z_j is defined as

$$d_{\text{ALD}}(Z_i, Z_j) = \sum_{k=1}^K w_k \|\zeta_{Z_{ik}} - \zeta_{Z_{jk}}\|_p, \quad (7)$$

where $\|\cdot\|_p$ denotes the L^p norm, and $w_k > 0$ with $\sum_{k=1}^K w_k = 1$.

In this study, we set $w_k = \frac{1}{K}$. The step-by-step procedures for computing d_{AWD} and d_{ALD} are summarized in Algorithms 1, 2, and 3. As benchmark measures, we also consider correlation-based and Euclidean-based distances for multivariate time series, denoted by d_{AC} and d_{AE} , respectively³. These benchmark measures are compared with the proposed TDA-based distances d_{AWD} and d_{ALD} ⁴.

To group assets based on similarity, we employ agglomerative clustering (see Figure 2) using these eight pairwise distance measures. The detailed clustering procedure is provided in Appendix C.

4.2. Asset selection

Let $\mathcal{N} = \{1, 2, \dots, n\}$ denote the set of available assets. At each rebalancing period t , assets are clustered using

³The definitions of these distances are provided in Appendix B.

⁴Distances computed using the four-dimensional feature space (technical indicators and sentiment score) are denoted by AWDS, APLS, ACS, and AES, whereas those computed using only technical indicators are denoted by AWDI, APLI, ACI, and AEI.

historical data, producing a selected asset set $\mathcal{S}_t \subseteq \mathcal{N}$ with cardinality $k_t = |\mathcal{S}_t|$. Since clustering results vary across rolling windows, k_t is time-varying. The portfolio strategy is implemented using a rolling-window framework with in-sample period T_1 and out-of-sample period T_2 . At each rebalancing step:

- Clustering is performed via agglomerative clustering described in Appendix C.
- Since assets within the same cluster are expected to exhibit similar behavior and risk-return characteristics, selecting assets from different clusters helps improve portfolio diversification. Therefore, representative assets are selected from each cluster based on their Sharpe ratio (SR) computed over the in-sample period. Let n_c denote the number of assets in cluster c . Clusters with $n_c = 1$ are treated as outliers and excluded. For clusters with $n_c \geq 2$, assets are ranked in descending order of SR, and the top $k_c = \lceil \rho n_c \rceil$ assets are selected, where ρ denotes the selection proportion and $\lceil \cdot \rceil$ is the ceiling operator. In this study, $\rho = 0.10$, implying that approximately the top 10% of assets are selected from each cluster. The final selected set $\mathcal{S}_t$ is obtained by taking the union of selected assets across all clusters, promoting diversification while maintaining a sparse portfolio.
- Since clustering outcomes vary across windows, the selected asset set may change substantially over time, leading to high portfolio turnover and transaction costs. To address this, we incorporate a retention mechanism using the previously selected asset set $\mathcal{S}_{t-1}$. Assets in $\mathcal{S}_{t-1}$ but not in $\mathcal{S}_t$ are re-evaluated based on their SR, and assets ranked within the next top 10% are retained in the portfolio. This mechanism reduces unnecessary trading while preserving assets with stable historical performance.

Figure 3 illustrates the overall asset selection framework, from data collection and preprocessing to clustering and final asset selection.

5. Portfolio formation and trading strategy

Assets are selected at the end of each in-sample period using the agglomerative clustering framework and distance measures described in Section 4. This selection process reduces the dimensionality of the investment universe and identifies representative assets for portfolio construction. The PO problem is then formulated over the selected asset set $\mathcal{S}_t$.

In this study, we employ a mean–variance framework to determine the optimal portfolio weights. Let $\bar{r}_t \in \mathbb{R}^{k_t}$ and $C_t \in \mathbb{R}^{k_t \times k_t}$ denote the expected return vector and covariance matrix of the selected assets, respectively, where $k_t = |\mathcal{S}_t|$. Based on these quantities, we propose a dynamic rebalancing PO framework that combines clustering-based

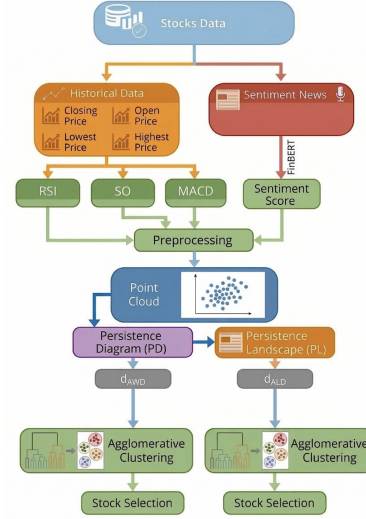


Figure 3: Flowchart of the proposed asset selection framework integrating data preprocessing, agglomerative clustering, and final asset selection. The initial flowchart concept was developed by the author and subsequently enhanced using Google Gemini to improve its visual presentation. The final figure was carefully reviewed and edited by the author.

asset selection with mean–variance optimization, while incorporating short-selling constraints and transaction costs within the budget constraint. The model is solved repeatedly in a rolling-window setting to adapt the portfolio to changing market conditions. Given the selected asset set $\mathcal{S}_t$, the portfolio rebalancing model following [68, 67] is formulated as follows:

$$\begin{aligned}
 \max \quad & \bar{r}_t^\top (w_t^+ - w_t^-) - \lambda (w_t^+ - w_t^-)^\top C_t (w_t^+ - w_t^-) \\
 & - \mathbf{1}^\top (p_1 l_t^+ + p_2 l_t^- + p_3 s_t^+ + p_4 s_t^-) \quad (\text{DRMV}) \\
 \text{s.t.} \quad & w_t^+ = w_{t-1}^+ + l_t^+ - l_t^- \quad (8) \\
 & w_t^- = w_{t-1}^- + s_t^+ - s_t^- \quad (9) \\
 & m^+ u_t \leq w_t^+ \leq M^+ u_t \quad (10) \\
 & m^- v_t \leq w_t^- \leq M^- v_t \quad (11) \\
 & u_t + v_t \leq \mathbf{1} \quad (12) \\
 & \mathbf{1}^\top (w_t^+ + k w_t^- + p_1 l_t^+ + p_2 l_t^- + p_3 s_t^+ + p_4 s_t^-) = 1 \quad (13) \\
 & u_t, v_t \in \{0, 1\}^{k_t} \quad (14) \\
 & w_t^+, w_t^-, l_t^+, l_t^-, s_t^+, s_t^- \in \mathbb{R}_+^{k_t}, \quad (15) \\
 & t = 1, \dots, M.
 \end{aligned}$$

Here, $\lambda \in [0, 1]$ is the trade-off parameter balancing expected return and portfolio risk, and its optimal value is determined through a grid search over $[0, 1]$. Further, M denotes the total number of rolling windows (rebalancing periods) in the out-of-sample horizon.

The parameters m^+ and M^+ denote the lower and upper bounds on long positions, while m^- and M^- represent the corresponding bounds on short positions. These bounds

control the minimum and maximum exposure to individual assets, preventing extremely small allocations and promoting diversification. The binary variables u_t and v_t indicate whether an asset is included in the long or short portfolio, respectively. Constraint (12) ensures that an asset can be held either long or short, but not both simultaneously. If $u_{i,t} = v_{i,t} = 0$, then asset i is excluded from the portfolio.

Decision variables

The vectors $w_t^+, w_t^- \in \mathbb{R}^{k_t}$ denote the long and short portfolio weights after rebalancing at time t , with net portfolio position $x_t = w_t^+ - w_t^-$. Initially, the portfolio is assumed to be empty, i.e., $w_0^+ = 0$ and $w_0^- = 0$. The vectors l_t^+ and l_t^- represent purchases and sales from existing long positions, whereas s_t^+ and s_t^- denote newly initiated short positions and repurchases of previously shorted assets. The binary vectors u_t and v_t determine asset inclusion in long and short portfolios, respectively.

Transaction costs

Transaction costs are incorporated using parameters p_1, p_2, p_3 , and p_4 within the budget constraint, which represent the proportional costs associated with buying assets, selling long positions, initiating short positions, and repurchasing assets to close short positions, respectively. Since the set of selected assets S_t obtained from clustering may vary across rolling windows, the number of selected assets $k_t = |S_t|$ can differ from that in the previous period k_{t-1} . As a result, the portfolio composition needs to be adjusted at each rebalancing step. However, small variations in clustering outcomes across consecutive windows may lead to frequent changes in the selected asset set, resulting in excessive portfolio turnover and increased transaction costs. To address this issue, we incorporate a continuity mechanism consistent with the asset selection procedure described in Section 4.2. Portfolio adjustments are categorized into three cases:

1. **Common assets:** If an asset i belongs to both S_{t-1} and S_t , its previous long and short weights are carried forward and used as the initial positions for the current optimization problem. These weights correspond to w_{t-1}^+ and w_{t-1}^- in the rebalancing equations.
2. **Dropped assets:** If $i \in S_{t-1}$ but $i \notin S_t$, the asset is removed from the investable universe. To ensure proper liquidation, the asset is temporarily retained in the optimization at rebalancing period t with its portfolio weights fixed at

$$w_{i,t}^+ = 0, \quad w_{i,t}^- = 0.$$

Consequently, no new long or short positions are initiated,

$$l_{i,t}^+ = 0, \quad s_{i,t}^+ = 0,$$

while the existing positions are fully liquidated,

$$l_{i,t}^- = w_{i,t-1}^+, \quad s_{i,t}^- = w_{i,t-1}^-.$$

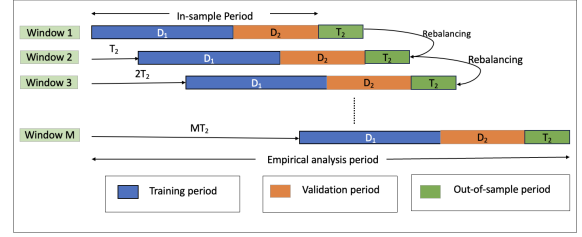


Figure 4: Rolling-window framework with cross-validation. The in-sample period is divided into a training period D_1 and a validation period D_2 for selecting the parameter λ in the (DRMV) model. The optimized portfolio is then evaluated over the out-of-sample period with rebalancing every T_2 days.

Accordingly, the associated transaction costs are automatically accounted for through the (DRMV) model.

3. **Newly selected assets:** If $i \in S_t$ but $i \notin S_{t-1}$, it has no existing position carried over from the previous rebalancing period. Therefore, its long and short holdings for period $t - 1$ are set to zero, i.e., $w_{i,t-1}^+ = 0$ and $w_{i,t-1}^- = 0$. The optimal portfolio allocation for such assets is then determined entirely by the optimization model at time t .

This procedure aligns portfolio weights from consecutive windows and ensures consistent rebalancing under a dynamically changing asset universe.

6. Experimental setup

6.1. Sample data

Firm-level financial news data are obtained from the LSEG Refinitiv Workspace news database, which provides high-frequency textual information on a daily basis. Specifically, news headlines per day are collected for each constituent stock of the S&P500 over the period from January 1, 2025 to December 31, 2025 (approximately 250 trading days). Corresponding market data, including daily opening, closing, highest, and lowest prices, are also collected for the same set of stocks.

Stocks with missing observations during the sample period are excluded to maintain data consistency, resulting in a final sample of 493 assets. Sentiment scores derived from the news data are combined with technical indicators to construct a multidimensional feature representation for each asset. These features are subsequently used to generate point cloud representations, compute similarity measures between assets, and implement the clustering and asset selection framework described in Section 4.

6.2. Rolling window with cross-validation framework

To simulate a realistic investment setting and avoid look-ahead bias, we employ a rolling-window framework (see Figure 4). The procedure is summarized as follows:

1. **Window construction:** At each step, a window⁵ of length $D_1 + D_2 + T_2$ is considered, where the first $T_1 = D_1 + D_2$ observations form the in-sample period and the remaining T_2 observations are used for out-of-sample evaluation.
2. **Stock selection:** Representative stocks are selected from the in-sample period using the clustering framework described in Section 4.
3. **In-sample partitioning and parameter selection:** After stock selection, the in-sample period is divided into two consecutive segments for selecting the trade-off parameter λ :
 - **Training period (D_1 days):** The first D_1 observations are used to estimate the (DRMV) model for the selected subset of stocks. A grid search is performed over a predefined set of candidate values $\lambda \in \{0.2, 0.4, 0.6, 0.8, 1\}$.
 - **Validation period (D_2 days):** The remaining D_2 observations are used to evaluate the portfolios corresponding to each candidate λ . The value maximizing the SR is selected for portfolio construction.
4. **Portfolio optimization:** Using the selected assets and optimal λ , the (DRMV) model is solved over the entire in-sample period to obtain the optimal portfolio weights.
5. **Out-of-sample evaluation:** The portfolio is held fixed over the next T_2 trading days, and its performance is evaluated on the out-of-sample period.
6. **Rolling update:** The window is shifted forward by T_2 days, and the entire procedure, including clustering, parameter selection, and PO, is repeated.
7. **Performance aggregation:** The process continues until the dataset is exhausted, and the overall strategy performance is obtained by aggregating the out-of-sample results across all rolling windows.

The daily return of asset i on day t_1 is computed as

$$r_{it_1} = \frac{C_{i(t_1)} - C_{i(t_1-1)}}{C_{i(t_1-1)}},$$

where $C_{i(t_1)}$ denotes the closing price of asset i on day t_1 .

6.3. Sample period and parameters

In the first rolling window, an in-sample period of $T_1 = 63$ ⁶ trading days (approximately three months) is used for portfolio construction, followed by an out-of-sample period of T_2 trading days for performance evaluation. To examine the

⁵Throughout the paper, we consider $T_1 = D_1 + D_2$, where D_1 denotes the training period, D_2 denotes the validation period, and T_1 represents the overall in-sample period.

⁶For $T_1 = 63$, the in-sample period consists of a training period $D_1 = 42$ trading days and a validation period $D_2 = 21$ trading days.

effect of rebalancing frequency, we consider $T_2 \in \{3, 5, 10\}$. The choice of relatively short out-of-sample horizons is motivated by the inclusion of sentiment-based features in our framework. Financial sentiment is inherently short-lived and tends to lose its predictive power over longer horizons. The number of rolling windows M depends on the choice of T_1 and T_2 .

Although historical price data of assets are readily available, collecting firm-level news headlines from the LSEG Refinitiv Workspace is computationally intensive due to API rate limits and large-scale data extraction requirements. Consequently, the empirical analysis is restricted to a one-year sample period, which still provides a sufficient number of rolling windows for evaluation. For robustness, we additionally consider a longer in-sample period of $T_1 = 84$ ⁷ trading days. Table 1 reports the number of rolling windows corresponding to different choices of T_1 and T_2 .

Transaction costs are incorporated consistent with those commonly observed in the U.S. market [67] by setting all transaction cost parameters (p_j , $j = 1, 2, 3, 4$) at 25 basis points of the trading value, with trading margin $k = 100\%$. To ensure realistic portfolio allocations, lower and upper bounds are imposed on long and short positions. Specifically, for long positions, we set $m^+ = 5\%$ and $M^+ = 20\%$, while for short positions, we set $m^- = 1\%$ and $M^- = 5\%$. These settings, consistent with [68], are intended to maintain diversification and limit excessive short exposure.

6.4. Performance measures

The portfolio performance is evaluated using out-of-sample data after calibrating the model on the corresponding in-sample period. Let M denote the total number of rolling windows and T_2 the out-of-sample horizon. The daily out-of-sample portfolio return is computed as $r_{t_1}^* = \sum_{i=1}^n r_{it_1} x_i^*$, $t_1 = 1, \dots, MT_2$, where $x_i^* = w_i^{+*} - w_i^{-*}$ denotes the optimal portfolio weight of asset i , and r_{it_1} is the realized return of asset i on day t_1 .

The out-of-sample performance is evaluated using the following measures:

1. **Mean:** The average out-of-sample portfolio return is computed as $\hat{\mu}_p = \frac{1}{MT_2} \sum_{t_1=1}^{MT_2} r_{t_1}^*$.
2. **Standard deviation (SD):** The out-of-sample portfolio risk is measured using the SD of returns as $\hat{\sigma} = \sqrt{\frac{\sum_{t_1=1}^{MT_2} (\hat{\mu}_p - r_{t_1}^*)^2}{MT_2}}$.
3. **VaR:** VaR at the 95% confidence level [36].
4. **CVaR:** CVaR at the 95% confidence level [53].
5. **Min:** The minimum out-of-sample portfolio return is given by $\min_{t_1=1, \dots, MT_2} r_{t_1}^*$.

⁷For $T_1 = 84$, the in-sample period consists of a training period $D_1 = 63$ trading days and a validation period $D_2 = 21$ trading days.

Table 1

Number of rolling windows (M) obtained for different choices of in-sample period (T_1) and out-of-sample period (T_2).

Out-of-sample Period (T_2)	Number of Rolling Windows (M)	
	$T_1 = 63$ (3 months)	$T_1 = 84$ (4 months)
3	62	55
5	37	33
10	18	16

6. **Max:** The maximum out-of-sample portfolio return is given by $\max_{t_1=1, \dots, MT_2} r_{t_1}^*$.
7. **Maximum drawdown (MDD):** Largest peak-to-trough decline in cumulative portfolio value.
8. **Average drawdown (ADD):** Average decline from previously attained peaks during the out-of-sample period.
9. **Sharpe ratio (SR):** The SR [55] measures excess return per unit of portfolio risk by

$$SR = \frac{\hat{\mu}_p - r_f}{\hat{\sigma}}, \quad \hat{\mu}_p \geq r_f,$$

where r_f denotes the risk-free rate.

10. **Stable tail-adjusted return ratio (STARR):** The STARR ratio measures excess return relative to downside tail risk:

$$STARR = \frac{\hat{\mu}_p - r_f}{CVaR}, \quad \hat{\mu}_p > r_f.$$

11. **Sterling ratio:** It measures excess return per unit of average drawdown risk:

$$\text{Sterling ratio} = \frac{\hat{\mu}_p - r_f}{ADD}, \quad \hat{\mu}_p > r_f.$$

12. **Cumulative returns:** Total portfolio growth over the out-of-sample horizon.

We also conduct statistical significance tests to examine whether the out-of-sample performance of one strategy differs significantly from the other. In particular, we employ two statistical tests corresponding to mean return and SR, namely the t-test and Sharpe-test [33].⁸

7. Empirical results

This section presents the empirical results of the proposed framework. We first analyze the clustering structures obtained from agglomerative clustering using different distance measures, namely AWD, ALD, AC, and AE distances, with and without the sentiment feature. These measures capture different notions of similarity among assets, ranging from topological structures to conventional statistical and geometric relationships. We then evaluate the out-of-sample portfolio performance of the proposed framework using the performance measures defined in Section 6.4.

⁸Detailed formulations of these statistical tests are provided in Appendix D.

7.1. Clustering characteristics

To analyze the clustering structure, we employ agglomerative clustering with a percentile-based threshold determined from nearest-neighbor distances in the asset distance matrix. We report results for $\alpha = 0.95$ and 0.99 , as these values produce a sufficient number of clusters for portfolio construction. Table 2 presents the clustering results for four distance measures: AWD, APL, AC, and AE.

To examine the impact of sentiment information, we compare clustering results obtained using all four feature representation (C_{AWDS} , C_{APLS} , C_{ACS} , and C_{AES}) with those based only on technical indicators (C_{AWDI} , C_{APLI} , C_{ACI} , and C_{AEI}). The reported results correspond to an in-sample period of 63 days and an out-of-sample period of 3 days, yielding 62 rolling windows. All clustering statistics are averaged across these windows and rounded to the nearest integer.

Unlike k-means clustering, the proposed agglomerative clustering framework is able to identify outliers. Among the 493 stocks, the number of clustered stocks ranges from 452 to 480, while the number of outliers varies between 13 (2.63%) and 41 (8.32%). As the threshold level increases from $\alpha = 95\%$ to $\alpha = 99\%$, the number of outliers decreases, consistent with the fact that more clusters merge at higher threshold levels. The resulting cluster structure is well distributed and not overly concentrated. Across all specifications, the largest cluster contains between 62 and 92 stocks, corresponding to approximately 13%–19% of the total stock universe. The second and third largest clusters contain 25–69 and 19–42 stocks, respectively, indicating the presence of several meaningful clusters beyond the dominant group. Overall, the agglomerative clustering framework produces a balanced cluster structure across all distance measures.

We also report the average numbers of traded, long, and short positions across all rolling windows for the eight clustering-based models and for $(DRMV)_A$, where no clustering is performed. Since these averages do not fully capture the temporal variation in portfolio composition, Figure 5 illustrates the numbers of long and short positions across rolling windows for $(DRMV)_{AWDS}$, $(DRMV)_{AWDI}$, and $(DRMV)_A$ under an in-sample period of 63 days and an out-of-sample period of 3 days.

It can be observed that, compared with the clustering-based models $(DRMV)_{AWDS}$ and $(DRMV)_{AWDI}$ ⁹, the model $(DRMV)_A$ tends to trade a larger number of assets across

⁹Same trend is consistently observed across all other distance-based clustering methodologies.

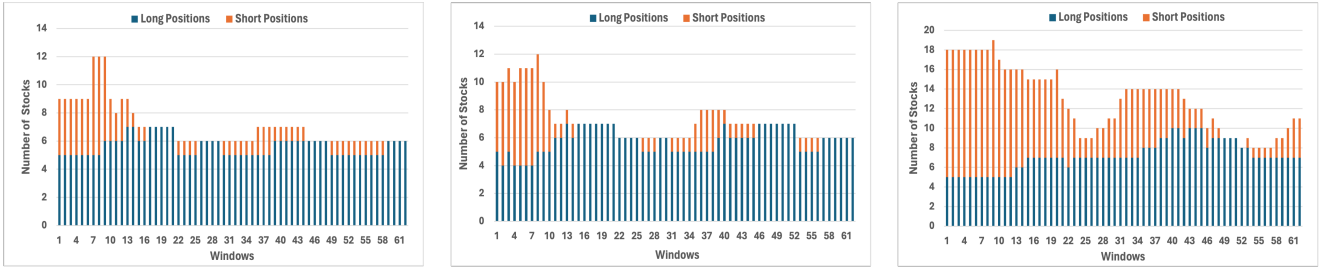


Figure 5: Comparison of total number of long and short positions across rolling windows for an in-sample period of 63 trading days and an out-of-sample period of 3 trading days under the $(\text{DRMV})_{\text{AWDS}}$ (left), the $(\text{DRMV})_{\text{AWDI}}$ (center), and the $(\text{DRMV})_{\text{A}}$ (right) models.

rolling windows. Moreover, the number of traded assets under $(\text{DRMV})_{\text{A}}$ exhibits greater variation over time, indicating a less stable portfolio composition. This higher and more unstable trading activity likely contributes to the larger transaction costs incurred by $(\text{DRMV})_{\text{A}}$. The result is intuitive, as optimization over the full stock universe provides a larger set of candidate assets, leading to more frequent portfolio adjustments across rebalancing periods.

Table 3 reports the Average Adjusted Rand Index (AARI) [70] and Average Silhouette Score (ASS) [54] for all eight clustering specifications under an in-sample period of 3 months and an out-of-sample period of 3 days, resulting in 62 rolling windows¹⁰. Since the AARI measures the similarity of cluster assignments across consecutive windows, higher values indicate greater temporal stability. Across all specifications, the AARI values range from 0.70964 to 0.80948, indicating reasonably stable clustering structures over time.

Among the different distance measures, the correlation and Euclidean based methods generally yield higher AARI values, particularly for C_{ACI} and C_{AEI} , suggesting more stable cluster assignments. In contrast, the TDA-based methods, especially C_{AWDS} , produce relatively lower AARI values, indicating greater sensitivity to evolving and nonlinear market dynamics. Furthermore, incorporating sentiment information generally reduces the AARI values relative to the corresponding indicator-only specifications, suggesting that sentiment introduces additional time-varying information into the clustering process and produces more adaptive clustering structures that are responsive to changing market perceptions and short-term fluctuations.

The ASS values, which measure intra-cluster cohesion and inter-cluster separation, range from 0.22621 to 0.27710 across all specifications. Although moderate, these values still indicate meaningful clustering structures, which is expected in financial datasets [35, 10] due to noisy, overlapping, and time-varying asset behavior. Among the different methods, the TDA-based specifications, particularly C_{AWDS} and C_{APLS} , generally achieve higher ASS values, indicating

better-separated clusters. In contrast, the correlation and Euclidean based methods, despite exhibiting greater temporal stability, tend to produce slightly lower ASS values. This is because these measures mainly capture linear dependencies or global geometric similarities, resulting in smoother but less distinct cluster boundaries. Overall, the results suggest a trade-off between clustering stability and clustering quality across different distance specifications.

Next, we analyze the composition of selected stocks across rolling windows using the Jaccard similarity (JS) between the corresponding selected stock sets¹¹. The results are presented in Figure 6. For all eight clustering specifications, the highest JS values are concentrated near the main diagonal, indicating that nearby rolling windows produce similar selected stock sets and that portfolio composition evolves gradually over time. As expected, the similarity generally declines as one moves farther away from the diagonal. For instance, the selected stock universe in Window 1 is more similar to that in Window 2 than to that in Window 18.

Second, the heatmaps corresponding to the AWDS, AWDI, APLS, and APLI exhibit relatively greater variability in the off-diagonal regions, with more pronounced fluctuations in similarity across distant windows. This suggests that the selected stocks under these TDA-based filtering strategies are more responsive to changes in the underlying market structure and may capture evolving non-linear relationships among assets more effectively. In contrast, the correlation and Euclidean distance-based clustering, namely ACS, ACI, AES, and AEI, display comparatively smoother heatmaps. In particular, ACI and AEI show broader bands of moderate similarity away from the diagonal, indicating greater temporal consistency in stock selection, consistent with the higher AARI values. Comparisons between sentiment-based and non-sentiment-based variants further show that incorporating sentiment information generally increases variation in the similarity structure across windows, suggesting that sentiment-based filtering leads to a more adaptive and responsive stock selection process.

¹¹Figure 6 reports pairwise Jaccard similarity values for the proposed clustering framework under different distance measures with an in-sample period of 3 months and an out-of-sample period of 10 days, resulting in 18 rolling windows.

¹⁰The reported AARI and ASS values are averaged across all 62 rolling windows.

Table 2

Clustering Results for in-sample period $T_1 = 63$ and out-of-sample period $T_2 = 3$ for eight different distance based agglomerative clustering under $\alpha = 95\%$ and $\alpha = 99\%$, including the $(\text{DRMV})_A$ model. The reported values represent averages over all 62 windows and are rounded up to the nearest integer.

Metric	C_{AWDS}		C_{APLS}		C_{ACS}		C_{AES}		$(\text{DRMV})_A$
	$\alpha = 95\%$	$\alpha = 99\%$	$\alpha = 95\%$	$\alpha = 99\%$	$\alpha = 95\%$	$\alpha = 99\%$	$\alpha = 95\%$	$\alpha = 99\%$	
Number of clusters	64	34	50	23	69	44	70	53	-
Number of stocks in total	493	493	493	493	493	493	493	493	493
Number of stocks in clusters	455	474	458	477	456	472	452	473	-
Number of outliers	38	19	35	16	37	21	41	20	-
Largest cluster	75	86	70	81	78	89	77	84	-
2nd largest cluster	35	57	48	58	25	36	27	43	-
3rd largest cluster	21	30	36	35	19	27	20	26	-
Total selected stocks	72	66	75	59	72	69	84	78	-
Total traded stocks	8	8	9	8	9	8	8	9	13
Stocks in long position	6	7	6	6	6	5	6	6	8
Stock in short position	2	2	2	3	2	3	2	3	6

Metric	C_{AWDI}		C_{APLI}		C_{ACI}		C_{AEI}		$(\text{DRMV})_A$
	$\alpha = 95\%$	$\alpha = 99\%$	$\alpha = 95\%$	$\alpha = 99\%$	$\alpha = 95\%$	$\alpha = 99\%$	$\alpha = 95\%$	$\alpha = 99\%$	
Number of clusters	55	26	45	21	76	50	72	48	-
Number of stocks in total	493	493	493	493	493	493	493	493	493
Number of stocks in clusters	461	478	470	480	461	476	458	474	-
Number of outliers	32	15	23	13	32	17	35	19	-
Largest cluster	62	83	74	87	83	90	82	92	-
2nd largest cluster	38	45	46	69	26	35	26	37	-
3rd largest cluster	21	33	31	42	23	24	21	28	-
Total selected stocks	68	63	73	60	83	76	80	75	-
Total traded stocks	8	8	8	9	9	9	8	8	13
Stocks in long position	6	6	6	5	6	5	6	5	8
Stock in short position	2	2	3	3	3	3	2	3	6

Table 3

Average Adjusted Rand Index (AARI) and Average Silhouette Score (ASS) for in-sample period $T_1 = 63$ and out-of-sample period $T_2 = 3$ for eight different distance-based agglomerative clustering under $\alpha = 95\%$ and $\alpha = 99\%$

Metric	C_{AWDS}		C_{APLS}		C_{ACS}		C_{AES}	
	$\alpha = 95\%$	$\alpha = 99\%$	$\alpha = 95\%$	$\alpha = 99\%$	$\alpha = 95\%$	$\alpha = 99\%$	$\alpha = 95\%$	$\alpha = 99\%$
AARI	0.73418	0.70964	0.75762	0.76384	0.78024	0.77284	0.76698	0.79681
ASS	0.27710	0.25831	0.26406	0.24679	0.25722	0.25039	0.24276	0.22621

Metric	C_{AWDI}		C_{APLI}		C_{ACI}		C_{AEI}	
	$\alpha = 95\%$	$\alpha = 99\%$	$\alpha = 95\%$	$\alpha = 99\%$	$\alpha = 95\%$	$\alpha = 99\%$	$\alpha = 95\%$	$\alpha = 99\%$
AARI	0.756811	0.73021	0.76946	0.77567	0.77127	0.80948	0.78677	0.77011
ASS	0.25388	0.24840	0.25153	0.24937	0.24445	0.23232	0.24282	0.22861

Finally, we compare the composition of selected stocks across the eight distance measures using JS. For each rolling window, the JS is computed between the selected stock sets obtained from every pair of distance measures, and the resulting values are averaged across all windows. Figure 7 presents the average pairwise JS for the 3-day, 5-day, and 10-day rebalancing horizons under $\alpha = 95\%$. A clear block structure is observed across all rebalancing frequencies. The TDA-based methods (AWDS, AWDI, APLS, and APLI) exhibit moderate similarity among themselves, indicating that they tend to select relatively similar stock subsets. Similarly, the correlation and Euclidean methods (ACS, ACI, AES, and AEI) also show high within-group similarity. In contrast, the similarity between the TDA-based and conventional distance-based methods is lower, suggesting that the two groups identify materially different stock subsets for portfolio construction. Nevertheless, the presence of moderate cross-group similarity between TDA and correlation or Euclidean, indicates that TDA-based methods still capture some common market structure while additionally identifying nonlinear asset relationships beyond conventional correlation and geometric dependencies. This overall pattern remains consistent across all rebalancing horizons.

7.2. Performance analysis

Following the asset selection phase, the optimal portfolio is constructed by solving the (DRMV) model over the filtered asset universe for each of the eight distance measures. The resulting portfolios are denoted by $(\text{DRMV})_{\text{AWDS}}$, $(\text{DRMV})_{\text{APLS}}$, $(\text{DRMV})_{\text{ACS}}$, $(\text{DRMV})_{\text{AES}}$, $(\text{DRMV})_{\text{AWDI}}$, $(\text{DRMV})_{\text{APLI}}$, $(\text{DRMV})_{\text{ACI}}$, and $(\text{DRMV})_{\text{AEI}}$ ¹². To evaluate the effectiveness of the proposed clustering-based portfolio framework, these eight strategies are compared against the following benchmark portfolio strategies:

- **$(\text{DRMV})_A$: Full-universe (DRMV) model.** This portfolio is obtained by solving the (DRMV) model over the entire asset universe without applying clustering or asset selection.
- **Naïve.** An equally weighted portfolio in which capital is allocated uniformly across the selected assets.
- **Index.** The underlying market index is used as a passive investment benchmark.

¹²Throughout the empirical analysis, portfolio results corresponding to clustering-based asset selection are represented using the notation $(\text{DRMV})_{\cdot}$.

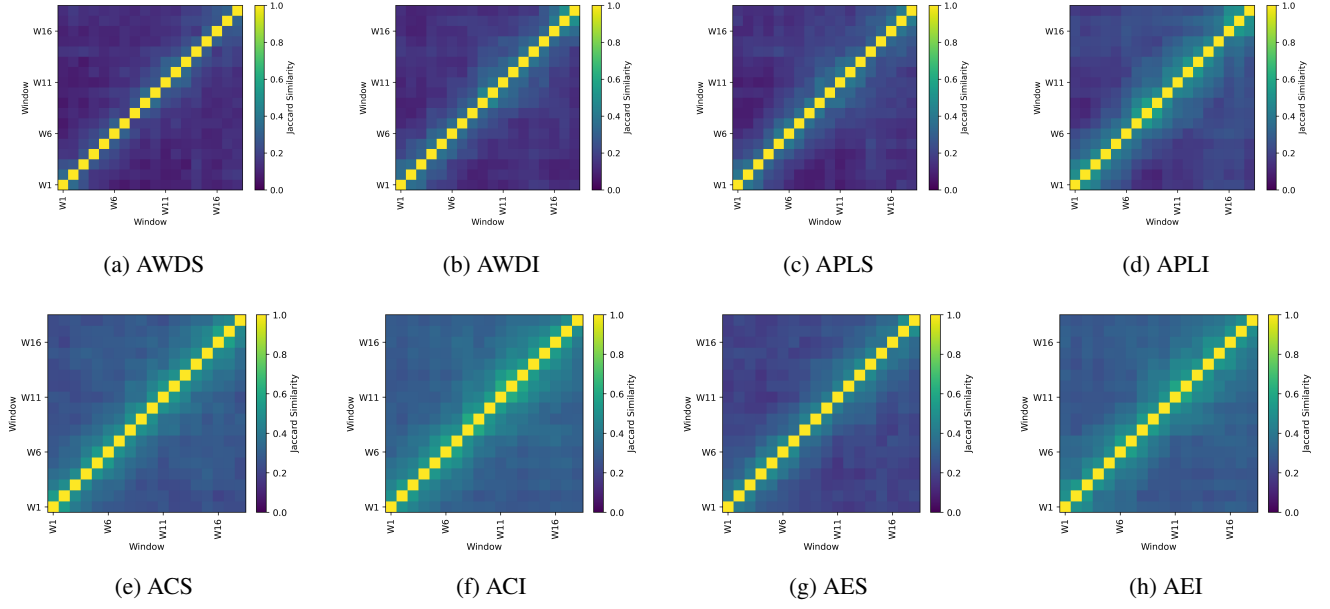


Figure 6: Average Jaccard similarity heatmaps of selected stocks across the eight filtering strategies.

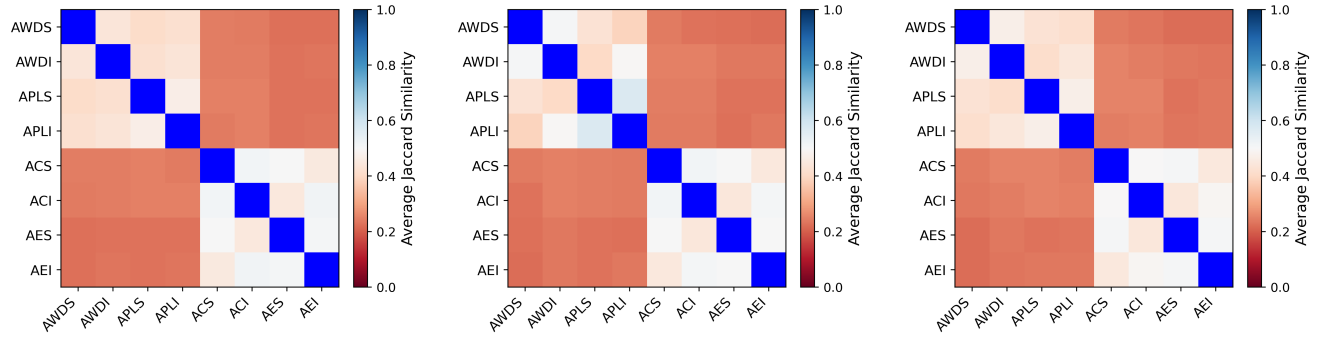


Figure 7: Comparison of average Jaccard similarity on selected stocks across the eight filtering strategies corresponding to different rebalancing frequencies, namely 3-day (left), 5-day (center), and 10-day (right), with 3 month in-sample period and $\alpha = 95\%$.

- **B&H_S and B&H_I: Buy-and-hold strategies.** These portfolios represent passive investment strategies and are used as benchmarks to compare the proposed actively managed framework. They are constructed by solving the (DRMV) model once at the beginning of the investment horizon and holding the resulting portfolio without rebalancing throughout the out-of-sample period¹³. Here, B&H_S and B&H_I denote the buy-and-hold portfolios under the indicator-sentiment and indicator-only settings, respectively. In both cases, asset selection is based on the AWD distance measure¹⁴.

Before analyzing the out-of-sample performance, we first examine the structural characteristics of the portfolios generated under the eight distance specifications reported in Table

¹³For a 3-month in-sample period, the investment horizon is 9 months, while for a 4-month in-sample period, it is 8 months.

¹⁴The AWD distance measure is adopted due to its superior out-of-sample performance.

2. The average number of traded stocks across all clustering-based strategies ranges from 8 to 9 for both $\alpha = 95\%$ and $\alpha = 99\%$, indicating that the optimization model further refines the selected asset universe into a sparse portfolio. Across all strategies, the average number of long positions varies between 5 and 7, while the average number of short positions ranges from 2 to 3, demonstrating that the proposed framework consistently constructs sparse long-short portfolios irrespective of the distance measure or confidence level.

Figure 5 illustrates the numbers of long and short positions across rolling windows, where the upper boundary of the shaded region represents the total number of traded stocks in each window. The results show that portfolio composition evolves dynamically over time while remaining sparse throughout the investment horizon. In particular, the number of long positions remains relatively stable, typically between 5 and 7 stocks, whereas the number of short positions is higher in the early rolling windows and gradually declines in

later periods, reaching 1 or even 0 in several windows. Consequently, the total number of traded assets exhibits greater variability during the early part of the sample and becomes more stable over time. Similar patterns are observed across the remaining distance specifications; therefore, for brevity, only their average values are reported in Table 2.

Rolling window framework with 3-month in-sample and 3-day rebalancing.

Table 4¹⁵ represents the average out-of-sample performance of the proposed filtering-based (DRMV) model under eight different distance-measure specifications for a 3-month in-sample period and 3-day rebalancing frequency. In addition, the last column, (DRMV)_A represents the baseline (DRMV) model without any filtering of assets. The Table 7 reports the performance of four benchmark portfolios, namely B&H_S, B&H_I, Naïve, and Index models.

We first compare the out-of-sample performance of the first four columns corresponding to the indicator-sentiment based filtering strategies in Table 4. Under both confidence levels $\alpha = 0.95$ and $\alpha = 0.99$, (DRMV)_{APLS} consistently emerges as the best-performing portfolio among the four. In particular, it attains the highest mean return, SR, STARR, Sterling, and cumulative return across both confidence levels. It also achieves the highest maximum return and the least negative minimum return.

Among the remaining sentiment-based strategies, (DRMV)_{AWDS} performs next best in terms of return and risk-adjusted measures, which further reinforces the effectiveness of the proposed TDA-based filtering framework. Further, (DRMV)_{ACS} performs relatively well in terms of volatility, VaR, and CVaR for $\alpha = 0.95$, whereas (DRMV)_{AWDS} provides more favorable downside risk measures under $\alpha = 0.99$. In particular, for $\alpha = 0.99$, (DRMV)_{AWDS} demonstrates strong overall performance, ranking second in terms of mean return and risk-adjusted ratios, while achieving the best results across key risk measures such as standard deviation, VaR, and CVaR. On the other hand, (DRMV)_{AES} yields the smallest MDD and ADD across both confidence levels among the indicator-sentiment-based filtering strategies. Since the portfolios are rebalanced at a high frequency, the primary objective is to achieve higher returns by taking a slightly higher level of risk. From this perspective, (DRMV)_{APLS} offers the most favorable trade-off between return and risk-adjusted measures among all sentiment-based approaches, followed by (DRMV)_{AWDS} as the second-best performing model.

Next, we compare the four indicator-only filtering strategies, namely (DRMV)_{AWDI}, (DRMV)_{APLI}, (DRMV)_{ACI}, and (DRMV)_{AEI}, as reported in Table 4. Similar to the sentiment-based case, the TDA-based strategies outperform their non-TDA counterparts. In particular, (DRMV)_{AWDI} emerges as the strongest performer within this group across

both confidence levels in terms of return and risk-adjusted measures. Moreover, for $\alpha = 99\%$, it also attains lower risk measures such as SD, VaR, and CVaR, highlighting its superior overall performance. Among the remaining strategies, (DRMV)_{APLI} delivers comparatively better return and risk-adjusted performance for $\alpha = 99\%$, whereas (DRMV)_{AEI} ranks second for $\alpha = 95\%$ in terms of these measures. On the other hand, (DRMV)_{ACI} performs relatively better from a downside risk perspective, emerging as the best among the four for $\alpha = 95\%$ and the second-best for $\alpha = 99\%$. Overall, these findings suggest that even in the absence of sentiment information, TDA-based filtering models provide a more effective and return-oriented portfolio construction framework than the non-TDA approaches.

Next, we compare the indicator-sentiment based filtering strategies with their corresponding indicator-only counterparts, as reported in Table 4, i.e., (DRMV)_{AWDS} vs. (DRMV)_{AWDI}, (DRMV)_{APLS} vs. (DRMV)_{APLI}, (DRMV)_{ACS} vs. (DRMV)_{ACI}, and (DRMV)_{AES} vs. (DRMV)_{AEI} for both $\alpha = 95\%$ and 99% . The results show that the indicator-sentiment based strategies consistently outperform the indicator only approaches across almost all distance measures in terms of return and risk-adjusted performance. However, these improvements are generally accompanied by a marginal increase in risk. We further compare the proposed framework, comprising an initial filtering stage followed by portfolio allocation through the (DRMV) model, with (DRMV)_A, as presented in Table 4. Specifically, the eight filtering-based models, ranging from (DRMV)_{AWDS} to (DRMV)_{AEI}, are evaluated against (DRMV)_A. The results reveal that all eight filtering-based models outperform the benchmark in terms of return and risk-adjusted performance. In addition, one-sided *t*-tests and Sharpe-tests for both $\alpha = 95\%$ and 99% on out-of-sample return series confirm that the mean return and SR of (DRMV)_{APLS} are significantly higher than those of (DRMV)_{AES}, (DRMV)_{APLI}, (DRMV)_{ACI}, (DRMV)_{AEI}, and (DRMV)_A.

Rolling window framework with 3-month in-sample and 5-day rebalancing.

Similar to Table 4, Table 5 reports the average out-of-sample performance of the proposed filtering-based (DRMV) strategies for the case of a 3-month in-sample period and 5-day rebalancing frequency. The results remain broadly consistent with those obtained under the 3-day rebalancing setting, again highlighting the effectiveness of sentiment-enriched and TDA-based filtering in the portfolio construction process. For the sentiment-indicator strategies, (DRMV)_{AWDS} records the highest mean return, SR, STARR, and cumulative return under $\alpha = 0.95$, whereas (DRMV)_{APLS} attains the highest values of these performance measures under $\alpha = 0.99$, along with the highest Sterling value. A similar pattern is observed for the indicator-only strategies as in Table 4. The TDA-based portfolios (DRMV)_{AWDI} and (DRMV)_{APLI} generally record higher mean returns, stronger SR and STARR values, and larger cumulative returns than the non-TDA strategies (DRMV)_{ACI} and (DRMV)_{AEI}. In

¹⁵In all tables, the best-performing indicator values among all models are highlighted in bold, while the second-best values are highlighted in bold italics.

particular, $(\text{DRMV})_{\text{AWDI}}$ remains the most favorable specification within the indicator-only setting, reflecting more efficient return generation relative to risk.

We also compare the indicator-sentiment-based filtering strategies with their corresponding indicator-only counterparts in Table 5, for both $\alpha = 95\%$ and 99% . Overall, the empirical evidence under the 5-day rebalancing setting remains consistent with that of the 3-day case. In most pairwise comparisons, the sentiment-enhanced strategies outperform their indicator-only counterparts in terms of return and risk-adjusted performance. The results are further supported by one-sided t -tests and Sharpe-tests. For $\alpha = 95\%$, the $(\text{DRMV})_{\text{AWDS}}$ model exhibits a significantly higher mean return compared to $(\text{DRMV})_{\text{ACS}}$, $(\text{DRMV})_{\text{AES}}$, $(\text{DRMV})_{\text{APLI}}$, $(\text{DRMV})_{\text{ACI}}$, $(\text{DRMV})_{\text{AEI}}$, and $(\text{DRMV})_{\text{A}}$. In addition, the $(\text{DRMV})_{\text{AWDS}}$ model achieves a significantly higher SR than $(\text{DRMV})_{\text{ACS}}$, $(\text{DRMV})_{\text{AES}}$, $(\text{DRMV})_{\text{AEI}}$, and $(\text{DRMV})_{\text{A}}$.

Rolling window framework with 3-month in-sample and 10-day rebalancing.

Table 6 reports the average out-of-sample performance of the proposed filtering-based (DRMV) strategies for the case of a 3-month in-sample period and 10-day rebalancing frequency. Similar to the 3 months in-sample and 3-day or 5-day rebalancing settings, the results continue to support the usefulness of sentiment-enriched and TDA-based filtering in improving portfolio performance. For the sentiment-based strategies, $(\text{DRMV})_{\text{AWDS}}$ records the highest mean return, SR, STARR, and cumulative return under $\alpha = 0.95$, whereas $(\text{DRMV})_{\text{APLS}}$ attains the highest mean return, SR, Sterling, and cumulative return under $\alpha = 0.99$.

A similar trend is observed in the indicator-only setting. The TDA-based portfolios $(\text{DRMV})_{\text{AWDI}}$ and $(\text{DRMV})_{\text{APLI}}$ generally yield higher mean returns, stronger SR and STARR values, and larger cumulative returns than the non-TDA strategies $(\text{DRMV})_{\text{ACI}}$ and $(\text{DRMV})_{\text{AEI}}$. In particular, $(\text{DRMV})_{\text{AWDI}}$ remains the most favorable specification within the indicator-only group under both confidence levels. We also compare the indicator-sentiment based filtering strategies with their corresponding indicator-only counterparts, as presented in Table 6. The empirical findings under the 10-day rebalancing setting remain broadly consistent with those observed in the 3-day and 5-day cases. In almost all pairwise comparisons, the sentiment-enhanced strategies deliver superior performance relative to their indicator-only counterparts, particularly in terms of return and risk-adjusted measures.

Furthermore, all filtering-based (DRMV) strategies continue to outperform the classical full-universe model, $(\text{DRMV})_{\text{A}}$, in terms of mean return and risk-adjusted measures, indicating that the proposed two-stage framework remains effective even under a relatively lower rebalancing frequency. The superiority of the proposed approach is further validated through a one-sided t -test and the Sharpe-test. For $\alpha = 95\%$, the $(\text{DRMV})_{\text{AWDS}}$ portfolio delivers a statistically

significant improvement in mean return over $(\text{DRMV})_{\text{ACS}}$, $(\text{DRMV})_{\text{AES}}$, $(\text{DRMV})_{\text{APLI}}$, $(\text{DRMV})_{\text{ACI}}$, $(\text{DRMV})_{\text{AEI}}$, and $(\text{DRMV})_{\text{A}}$. Moreover, the SR of $(\text{DRMV})_{\text{AWDS}}$ is found to be significantly higher than those of $(\text{DRMV})_{\text{ACS}}$, $(\text{DRMV})_{\text{AEI}}$, and $(\text{DRMV})_{\text{A}}$.

Finally, we compare the proposed models reported in Tables 4, 5, and 6 with the four benchmark portfolios presented in Table 7, namely $\text{B\&H}_S$, $\text{B\&H}_I$, Naïve, and Index. The results clearly show that all nine models in Tables 4, 5, and 6 including the full-universe benchmark $(\text{DRMV})_{\text{A}}$, outperform the benchmark portfolios in Table 7 in terms of return (see Figure 8 (left)) and risk-adjusted measures. This superior performance is, to some extent, expected, as the proposed portfolios are rebalanced every 3, 5, or 10 days, enabling them to respond more actively to evolving market conditions compared to the relatively static benchmark portfolios. The results are further reinforced by a one-sided t -test and the Sharpe-test. For both $\alpha = 95\%$ and $\alpha = 99\%$, the $(\text{DRMV})_{\text{AWDS}}$ and $(\text{DRMV})_{\text{APLS}}$ models exhibit significantly higher mean returns and SR compared to the $\text{B\&H}_S$, $\text{B\&H}_I$, Naïve, and Index portfolios. However, such frequent rebalancing also leads to higher portfolio turnover, which is reflected in the relatively larger transaction costs reported in Table 8. Moreover, the higher rebalancing frequency may also result in elevated portfolio risk in certain cases. Nevertheless, despite these additional costs and increases in risk, the proposed filtering-based strategies deliver substantially higher mean returns and superior risk-adjusted performance than all benchmark portfolios, thereby demonstrating the effectiveness of the proposed framework.

Comparison across 3, 5, and 10 days rebalancing horizons.

A comparison across the three rebalancing horizons, namely 3-day, 5-day, and 10-day (see Tables 4, 5, 6), reveals a clear effect of rebalancing frequency on portfolio performance. Across most of the eight filtering specifications, the 3-day rebalancing setting yields higher mean returns, SR, STARR, Sterling, and cumulative returns, followed by the 5-day and then the 10-day rebalancing horizon. For example, the cumulative return of $(\text{DRMV})_{\text{APLS}}$ decreases from 2.18968 under the 3-day rebalancing horizon to 2.04184 under the 5-day horizon and further to 1.92273 under the 10-day horizon for $\alpha = 0.95$. A similar decline is observed under $\alpha = 0.99$. However, there are some instances in which less frequent rebalancing yields higher returns. For example, under $\alpha = 0.95$, $(\text{DRMV})_{\text{AWDS}}$ with 5-day rebalancing achieves higher mean return and cumulative return than its 3-day counterpart. Similarly, under $\alpha = 0.99$, $(\text{DRMV})_{\text{AES}}$ and $(\text{DRMV})_{\text{AWDI}}$ generate higher returns and cumulative performance under the 5-day rebalancing horizon compared to the 3-day setting. In addition, under $\alpha = 0.99$, $(\text{DRMV})_{\text{ACS}}$ records higher mean return and cumulative return under the 10-day rebalancing horizon than under the 5-day horizon. Nevertheless, in the majority of configurations, more frequent rebalancing leads to stronger return generation.

Table 4

Performance comparison of eight different distance based clustering portfolios under $\alpha = 95\%$ and $\alpha = 99\%$, including the (DRMV)_A model for in-sample period $T_1 = 63$ and out-of-sample period $T_2 = 3$.

$\alpha = 0.95$	(DRMV) _{AWDS}	(DRMV) _{APLS}	(DRMV) _{ACS}	(DRMV) _{AES}	(DRMV) _{AWDI}	(DRMV) _{APLI}	(DRMV) _{ACI}	(DRMV) _{AEL}	(DRMV) _A
Mean	0.00435	0.00454	0.00417	0.00386	0.00408	0.00391	0.00381	0.00399	0.00225
SD	0.02469	0.02378	0.02243	0.02459	0.02386	0.02501	0.02365	0.02446	0.02542
VaR	0.03030	0.03279	0.02901	0.03223	0.03243	0.03569	0.02980	0.03125	0.03572
CVaR	0.04965	0.05015	0.04642	0.05289	0.05105	0.05735	0.04794	0.05333	0.05693
Min	-0.11358	-0.08882	-0.09986	-0.10067	-0.08882	-0.08887	-0.10281	-0.10825	-0.10784
Max	0.07718	0.08405	0.07422	0.07121	0.07453	0.08401	0.07216	0.07444	0.07546
MDD	-0.54043	-0.54815	-0.53853	-0.52384	-0.53821	-0.53115	-0.51835	-0.53384	-0.43730
ADD	0.35492	0.36648	0.35899	0.33446	0.32796	0.32554	0.32467	0.31780	0.29552
SR	0.17618	0.19092	0.18582	0.15693	0.17095	0.15626	0.16124	0.16305	0.08851
STARR	0.08761	0.09053	0.08980	0.07296	0.07989	0.06814	0.07956	0.07479	0.03953
Sterling	0.01226	0.01238	0.01161	0.01154	0.01243	0.01220	0.01175	0.01230	0.00761
Cumulative Return	2.11184	2.18968	2.06939	1.93566	2.02296	1.94965	1.92764	1.97637	1.43056
$\alpha = 0.99$									
Mean	0.00435	0.00503	0.00415	0.00383	0.00387	0.00381	0.00369	0.00358	0.00225
SD	0.02255	0.02540	0.02571	0.02473	0.02385	0.02500	0.02451	0.02505	0.02542
VaR	0.02902	0.03415	0.03297	0.03423	0.03180	0.03661	0.03417	0.03254	0.03572
CVaR	0.04829	0.05335	0.05680	0.05346	0.05033	0.05510	0.05291	0.05512	0.05693
Min	-0.09967	-0.08894	-0.11340	-0.09005	-0.08861	-0.08897	-0.10071	-0.10583	-0.10784
Max	0.07388	0.08405	0.07718	0.07720	0.07453	0.08405	0.07124	0.07106	0.07546
MDD	-0.55272	-0.56657	-0.55606	-0.52701	-0.52294	-0.52542	-0.50874	-0.62760	-0.43730
ADD	0.34228	0.35602	0.33871	0.32860	0.31875	0.30694	0.34489	0.36700	0.29552
SR	0.19281	0.19819	0.16143	0.15483	0.16231	0.15241	0.15060	0.14295	0.08851
STARR	0.09005	0.09434	0.07307	0.07164	0.07692	0.06916	0.06975	0.06496	0.03953
Sterling	0.01270	0.01413	0.01225	0.01165	0.01242	0.01242	0.01070	0.00975	0.00761
Cumulative Return	2.13837	2.39762	2.03221	1.92413	1.94702	1.91503	1.87692	1.83432	1.43056

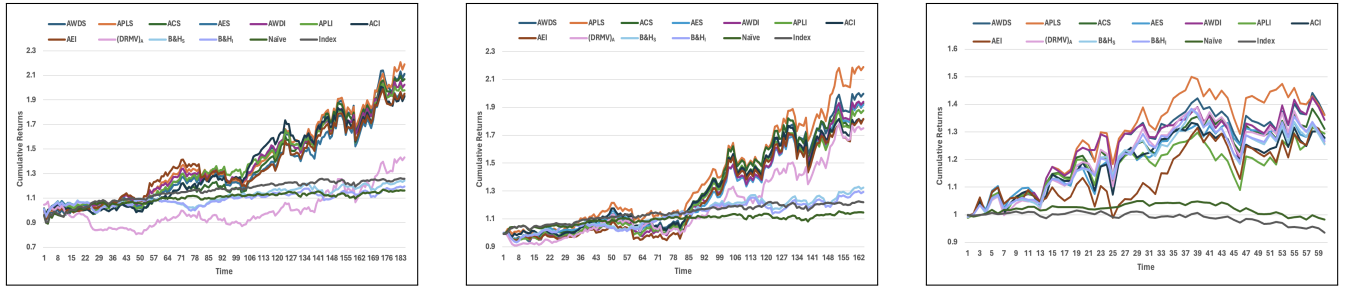


Figure 8: Out-of-sample cumulative returns for all considered models, including the benchmark models B&H₁, B&H₂, Naïve, and Index, under a 3-month in-sample period with 3-day rebalancing (left), a 4-month in-sample period with 3-day rebalancing (center), and a 3-month in-sample period with 3-day rebalancing during the U.S.-Israel-Iran conflict (right).

At the same time, a reduction in rebalancing frequency is often associated with a moderation in return variability and, in certain cases, lower downside risk measures such as SD, VaR, CVaR, and drawdown-related quantities. This indicates a trade-off between return enhancement and downside containment: while the 3-day rebalancing horizon generally delivers stronger return and risk-adjusted performance, the 10-day horizon tends to provide relatively more stable portfolio behavior in some specifications, albeit at the cost of lower cumulative wealth. An important practical consideration in this comparison is transaction cost, reported in Table 8. As expected, more frequent rebalancing leads to higher transaction costs, with the 3-day horizon incurring the highest costs, followed by the 5-day and 10-day horizons. In contrast, passive buy-and-hold strategies involve significantly lower trading costs. Overall, the empirical evidence suggests that more frequent rebalancing enhances the ability of the proposed framework to generate higher returns and higher risk-adjusted ratios, although this comes at the expense of increased trading costs and higher risk. From an investment perspective, such actively managed strategies are suitable for relatively aggressive investors who are willing to tolerate higher trading intensity and risk in pursuit of superior returns.

7.3. Sensitivity check to in-sample window size

To examine the robustness of the proposed strategy, we extend the in-sample period from 63 trading days (approximately 3 months) to 84 trading days (approximately 4 months). Tables 9, 10, and 11 present the average out-of-sample performance when the portfolio is rebalanced every 3 days, 5 days, and 10 days, respectively.

In particular, the TDA-based sentiment-indicator based filtering and allocation framework, followed by the (DRMV) model, continues to exhibit relatively stronger mean returns (see Figure 8 (middle)) and superior risk-adjusted performance across most configurations. Among the proposed strategies, (DRMV)_{APLS} remains one of the best-performing specifications followed by (DRMV)_{AWDS} in terms of return generation and risk-adjusted measures, while also maintaining competitive performance across all three rebalancing horizons, namely 3-day, 5-day, and 10-day (see Tables 9, 10, and 11). In addition, we compare Tables 9, 10, and 11 across the three rebalancing frequencies of 3, 5, and 10 days. In general, the results indicate that the 3-day rebalancing strategy yields higher mean returns and stronger risk-adjusted measures in most cases, highlighting the ability of

Table 5

Performance comparison of eight different distance based clustering portfolios under $\alpha = 95\%$ and $\alpha = 99\%$, including the $(\text{DRMV})_A$ model for in-sample period $T_1 = 63$ and out-of-sample period $T_2 = 5$.

$\alpha = 0.95$	$(\text{DRMV})_{\text{AWDS}}$	$(\text{DRMV})_{\text{APLS}}$	$(\text{DRMV})_{\text{ACS}}$	$(\text{DRMV})_{\text{AES}}$	$(\text{DRMV})_{\text{AWDH}}$	$(\text{DRMV})_{\text{APLI}}$	$(\text{DRMV})_{\text{ACI}}$	$(\text{DRMV})_{\text{AEI}}$	$(\text{DRMV})_A$
Mean	0.00452	0.00420	0.00318	0.00342	0.00396	0.00373	0.00352	0.00321	0.00124
SD	0.02625	0.02603	0.02653	0.02541	0.02579	0.02659	0.02503	0.02458	0.02599
VaR	0.03368	0.03300	0.03305	0.03687	0.03391	0.03398	0.03204	0.03429	0.03885
CVaR	0.05533	0.05477	0.05882	0.05797	0.05588	0.05703	0.05250	0.05412	0.06056
Min	-0.10939	-0.08919	-0.10931	-0.10363	-0.10933	-0.10930	-0.10852	-0.10154	-0.10934
Max	0.08405	0.08626	0.08405	0.07688	0.07622	0.08625	0.08405	0.07118	0.08167
MDD	-0.58347	-0.55536	-0.44982	-0.48709	-0.52719	-0.51434	-0.48782	-0.46205	-0.33517
ADD	0.36082	0.32394	0.29288	0.32157	0.33625	0.32347	0.32283	0.30955	0.23237
SR	0.17211	0.16146	0.11978	0.13452	0.15354	0.14031	0.14073	0.13048	0.04788
STARR	0.08166	0.07673	0.05403	0.05897	0.07087	0.06542	0.06709	0.05925	0.02055
Sterling	0.01252	0.01297	0.01085	0.01063	0.01178	0.01154	0.01091	0.01009	0.00536
Cumulative Return	2.16128	2.04184	1.68567	1.77148	1.95434	1.86618	1.80901	1.71527	1.18244
$\alpha = 0.99$									
Mean	0.00403	0.00440	0.00359	0.00388	0.00396	0.00372	0.00368	0.00354	0.00124
SD	0.02599	0.02625	0.02577	0.02570	0.02582	0.02661	0.02661	0.02532	0.02599
VaR	0.03288	0.03198	0.03278	0.03224	0.03386	0.03446	0.03386	0.03518	0.03885
CVaR	0.05373	0.05576	0.05541	0.05505	0.05558	0.05816	0.05798	0.05685	0.06056
Min	-0.08922	-0.08918	-0.08886	-0.10937	-0.10930	-0.10927	-0.10927	-0.10600	-0.10934
Max	0.08405	0.08405	0.08812	0.08031	0.07619	0.08405	0.08405	0.07720	0.08167
MDD	-0.54256	-0.57201	-0.49208	-0.52805	-0.52723	-0.51427	-0.51077	-0.49684	-0.33517
ADD	0.32412	0.34011	0.31638	0.31702	0.32206	0.31672	0.31583	0.31689	0.23237
SR	0.15494	0.16742	0.13933	0.15103	0.15342	0.13980	0.13834	0.13983	0.04788
STARR	0.07495	0.07883	0.06480	0.07051	0.07128	0.06396	0.06348	0.06229	0.02055
Sterling	0.01242	0.01292	0.01135	0.01224	0.01230	0.01174	0.01165	0.01117	0.00536
Cumulative Return	1.97723	2.11324	1.82600	1.92686	1.95462	1.86212	1.84881	1.81270	1.18244

Table 6

Performance comparison of eight different distance based clustering portfolios under $\alpha = 95\%$ and $\alpha = 99\%$, including the $(\text{DRMV})_A$ model for in-sample period $T_1 = 63$ and out-of-sample period $T_2 = 10$.

$\alpha = 0.95$	$(\text{DRMV})_{\text{AWDS}}$	$(\text{DRMV})_{\text{APLS}}$	$(\text{DRMV})_{\text{ACS}}$	$(\text{DRMV})_{\text{AES}}$	$(\text{DRMV})_{\text{AWDH}}$	$(\text{DRMV})_{\text{APLI}}$	$(\text{DRMV})_{\text{ACI}}$	$(\text{DRMV})_{\text{AEI}}$	$(\text{DRMV})_A$
Mean	0.00405	0.00395	0.00315	0.00322	0.00381	0.00343	0.00309	0.00322	0.00104
SD	0.02541	0.02512	0.02652	0.02393	0.02290	0.02528	0.02267	0.02517	0.02259
VaR	0.03286	0.03342	0.03238	0.03219	0.02969	0.03365	0.02773	0.03245	0.03643
CVaR	0.05445	0.05659	0.06017	0.05383	0.04675	0.05607	0.04527	0.05383	0.05558
Min	-0.08995	-0.08939	-0.10937	-0.09118	-0.08998	-0.09014	-0.09008	-0.10945	-0.09303
Max	0.08405	0.07720	0.08498	0.07531	0.07720	0.07720	0.07474	0.07412	0.05980
MDD	-0.55573	-0.54975	-0.45231	-0.49105	-0.53167	-0.50177	-0.50799	-0.52291	-0.34580
ADD	0.35065	0.35120	0.27975	0.31640	0.36975	0.33891	0.33163	0.35076	0.23193
SR	0.15940	0.15738	0.11869	0.13458	0.16618	0.13585	0.13627	0.12804	0.04617
STARR	0.07439	0.06985	0.05231	0.05983	0.08140	0.06125	0.06822	0.05987	0.01876
Sterling	0.01155	0.01126	0.01125	0.01018	0.01029	0.01013	0.00931	0.00919	0.00450
Cumulative Return	1.95437	1.92273	1.65297	1.69466	1.89067	1.75076	1.66410	1.68625	1.15207
$\alpha = 0.99$									
Mean	0.00394	0.00407	0.00400	0.00375	0.00372	0.00346	0.00341	0.00328	0.00104
SD	0.02492	0.02551	0.02754	0.02528	0.02378	0.02622	0.02626	0.02456	0.02259
VaR	0.03074	0.03249	0.03877	0.03290	0.03102	0.03413	0.03720	0.03222	0.03643
CVaR	0.05336	0.05826	0.05684	0.05397	0.05164	0.06292	0.05680	0.05325	0.05558
Min	-0.08955	-0.08940	-0.10941	-0.09016	-0.10939	-0.10937	-0.08996	-0.10855	-0.09303
Max	0.08405	0.08405	0.11887	0.08405	0.07557	0.08405	0.09945	0.07473	0.05980
MDD	-0.53984	-0.54713	-0.51892	-0.53151	-0.51591	-0.49352	-0.48534	-0.47427	-0.34580
ADD	0.33592	0.33176	0.32700	0.33543	0.31956	0.30777	0.30264	0.32015	0.23193
SR	0.15815	0.15947	0.14519	0.14839	0.15623	0.13213	0.12987	0.13366	0.04617
STARR	0.07387	0.06983	0.07034	0.06952	0.07195	0.05505	0.06004	0.06165	0.01876
Sterling	0.01173	0.01226	0.01223	0.01118	0.01163	0.01125	0.01127	0.01025	0.00450
Cumulative Return	1.92069	1.95954	1.91722	1.85335	1.85305	1.75185	1.73563	1.70896	1.15207

Table 7

Performance of four benchmark models for an in-sample period $T_1 = 63$ (3 months) and out-of-sample period $T_2 = 187$ (9 months), i.e., without rebalancing.

	$B\&H_S$		$B\&H_I$		Naïve	Index
	$\alpha = 0.95$	$\alpha = 0.99$	$\alpha = 0.95$	$\alpha = 0.99$		
Mean	0.00124	0.00141	0.00102	0.00095	0.00088	0.00130
SD	0.01181	0.01341	0.01077	0.01165	0.01248	0.01250
VaR	0.01576	0.01517	0.01479	0.01436	0.01270	0.01366
CVaR	0.02920	0.02992	0.02729	0.02719	0.02707	0.02793
Min	-0.06406	-0.07143	-0.05473	-0.05564	-0.05887	-0.06393
Max	0.06541	0.07533	0.06549	0.06450	0.07463	0.07812
MDD	-0.23731	-0.27295	-0.20484	-0.19474	-0.23721	-0.28579
ADD	0.09369	0.09159	0.08626	0.08122	0.06490	0.08812
SR	0.10499	0.10532	0.09471	0.08152	0.07071	0.10442
STARR	0.04242	0.04713	0.03746	0.03492	0.03259	0.04672
Sterling	0.01323	0.01539	0.01185	0.01169	0.01359	0.01481
Cumulative Return	1.24088	1.27874	1.19395	1.17821	1.16144	1.25628

Table 8

Transaction cost (%) for eight clustering based portfolios under $\alpha = 95\%$ including (DRMV)_A model, for in-sample period $T_1 = 63$ and out-of-sample period $T_2 = 3, 5, \text{ and } 10$. The table reports results along with B&H_S and B&H_I models, which are implemented without rebalancing.

TC	3D	5D	10D	TC	3D	5D	10D
(DRMV) _{AWDS}	3.68174	3.35026	2.86638	(DRMV) _{AWDI}	3.34919	3.10257	2.70163
(DRMV) _{APLS}	3.74900	3.30013	2.95862	(DRMV) _{APLI}	3.14923	2.85087	2.79962
(DRMV) _{ACS}	3.55926	2.98252	2.33242	(DRMV) _{ACI}	2.92264	2.65826	2.37898
(DRMV) _{AES}	3.21652	3.06161	2.64509	(DRMV) _{AEI}	3.36298	2.76815	2.69718
B&H _S	0.34988	0.34988	0.34988	B&H _I	0.32487	0.32487	0.32487
(DRMV) _A	3.91892	3.32951	2.93689				

Table 9

Performance comparison of eight different distance based clustering portfolios under $\alpha = 95\%$ and $\alpha = 99\%$, including the (DRMV)_A model for in-sample period $T_1 = 84$ and out-of-sample period $T_2 = 3$.

$\alpha = 0.95$	(DRMV) _{AWDS}	(DRMV) _{APLS}	(DRMV) _{ACS}	(DRMV) _{AES}	(DRMV) _{AWDI}	(DRMV) _{APLI}	(DRMV) _{ACI}	(DRMV) _{AEI}	(DRMV) _A
Mean	0.00448	0.00506	0.00431	0.00429	0.00428	0.00414	0.00394	0.00395	0.00365
SD	0.02352	0.02489	0.02500	0.02567	0.02278	0.02537	0.02556	0.02545	0.02257
VaR	0.03401	0.03448	0.03167	0.03640	0.03160	0.03445	0.03342	0.03439	0.03116
CVaR	0.04882	0.05200	0.05449	0.05384	0.04603	0.05471	0.05593	0.05509	0.04852
Min	-0.09028	-0.09011	-0.11033	-0.11734	-0.08997	-0.10944	-0.11602	-0.11141	-0.08452
Max	0.06905	0.08495	0.08573	0.07514	0.06870	0.08369	0.09192	0.08510	0.07377
MDD	-0.53068	-0.55730	-0.51065	-0.50703	-0.51349	-0.49640	-0.46464	-0.47997	-0.48904
ADD	0.34751	0.36860	0.32127	0.33914	0.34654	0.32341	0.31291	0.31461	0.33032
SR	0.19033	0.20340	0.17227	0.16696	0.18768	0.16338	0.15410	0.15511	0.16179
STARR	0.09168	0.09736	0.07902	0.07959	0.09290	0.07575	0.07043	0.07166	0.07526
Sterling	0.01288	0.01374	0.01340	0.01264	0.01234	0.01281	0.01259	0.01255	0.01106
Cumulative Return	1.99693	2.18728	1.93032	1.91830	1.93792	1.87684	1.81306	1.81644	1.75018
$\alpha = 0.99$									
Mean	0.00451	0.00418	0.00412	0.00434	0.00446	0.00401	0.00394	0.00403	0.00365
SD	0.02493	0.02504	0.02586	0.02426	0.02288	0.02508	0.02556	0.02526	0.02257
VaR	0.03733	0.03154	0.03494	0.03271	0.03152	0.03330	0.03342	0.03609	0.03116
CVaR	0.05509	0.05408	0.05567	0.05057	0.04726	0.05230	0.05593	0.05356	0.04852
Min	-0.11734	-0.10930	-0.11613	-0.09402	-0.08993	-0.11403	-0.11602	-0.11331	-0.08452
Max	0.08356	0.08499	0.08459	0.08154	0.06867	0.09133	0.09192	0.08494	0.07377
MDD	-0.51032	-0.47310	-0.49245	-0.51063	-0.48810	-0.46787	-0.46464	-0.48699	-0.48904
ADD	0.33340	0.29197	0.31933	0.34620	0.33588	0.30275	0.29896	0.32138	0.33032
SR	0.18079	0.16683	0.15936	0.17873	0.19511	0.15974	0.15410	0.15940	0.16179
STARR	0.08181	0.07724	0.07402	0.08573	0.09446	0.07659	0.07043	0.07517	0.07526
Sterling	0.01352	0.01431	0.01290	0.01252	0.01328	0.01323	0.01318	0.01253	0.01106
Cumulative Return	1.99549	1.88947	1.86569	1.94577	1.99791	1.83693	1.81306	1.84145	1.75018

the proposed framework to effectively capture short-term market movements through more frequent portfolio revision.

These filtering-based models are also compared with the one-stage (DRMV)_A model. Across all configurations, the proposed two-stage framework consistently yields more favorable mean returns, cumulative returns, and risk-adjusted measures than (DRMV)_A benchmark model across all eight filtering-based specifications, including both TDA and non-TDA based approaches under sentiment-indicator and indicator-only settings. Models in Tables 9, 10, and 11 outperform all benchmark models in Table 12 in terms of returns and risk-adjusted ratios. This indicates that the preliminary filtering stage and dynamic rebalancing play an important role in removing less informative assets and enabling the optimization model to focus on a more relevant and investable subset of stocks.

Overall, the consistency of results across both 63 days and 84 days in-sample specifications indicates that the proposed two-stage framework is robust to changes in the estimation window. The empirical findings confirm that incorporating sentiment information and employing TDA-based distance measures consistently improve portfolio performance in terms of returns across different sample configurations and rebalancing horizons.

8. Robustness analysis during the U.S.–Israel–Iran conflict

We next evaluate the portfolio performance over a turbulent market period from 1 October 2025 to 31 March 2026, comprising approximately 125 trading days (around six months), which overlaps with the U.S.–Israel–Iran conflict. This period is considered to test the robustness of the proposed portfolio strategies under adverse geopolitical conditions and elevated market volatility. For consistency with the above empirical analysis, we keep the in-sample window fixed at 3 months and consider out-of-sample rebalancing horizons of 3, 5, and 10 days. Based on the rolling window framework, these horizons yield 20, 12, and 6 out-of-sample windows, respectively.

Table 13 reports the average out-of-sample performance of the proposed framework over the conflict period for a 3-month in-sample and 3-day rebalancing horizon. We first compare the four indicator-sentiment based strategies (first four columns). Under $\alpha = 0.95$, (DRMV)_{AWDS} achieves the highest mean return, maximum return, and cumulative return (see Figure 8 (right)), while (DRMV)_{APLS} delivers the strongest risk-adjusted performance with the highest Sharpe and STARR ratios. Under $\alpha = 0.99$, (DRMV)_{APLS} emerges

Table 10

Performance comparison of eight different distance based clustering portfolios under $\alpha = 95\%$ and $\alpha = 99\%$, including the $(\text{DRMV})_A$ model for in-sample period $T_1 = 84$ and out-of-sample period $T_2 = 5$.

$\alpha = 0.95$	$(\text{DRMV})_{\text{AWDS}}$	$(\text{DRMV})_{\text{APLS}}$	$(\text{DRMV})_{\text{ACS}}$	$(\text{DRMV})_{\text{AES}}$	$(\text{DRMV})_{\text{AWDI}}$	$(\text{DRMV})_{\text{APLI}}$	$(\text{DRMV})_{\text{ACI}}$	$(\text{DRMV})_{\text{AEI}}$	$(\text{DRMV})_A$
Mean	0.00449	0.00469	0.00431	0.00409	0.00416	0.00410	0.00385	0.00392	0.00370
SD	0.02300	0.02518	0.02368	0.02561	0.02472	0.02409	0.02547	0.02334	0.02325
VaR	0.03210	0.03322	0.03205	0.03466	0.03342	0.03657	0.03646	0.02926	0.03219
CVaR	0.04723	0.05059	0.05009	0.05354	0.05182	0.05116	0.05574	0.04730	0.04919
Min	-0.07638	-0.09213	-0.09368	-0.11752	-0.09506	-0.09138	-0.11282	-0.09033	-0.08953
Max	0.07662	0.09017	0.08457	0.08456	0.09021	0.07627	0.08457	0.06881	0.06089
MDD	-0.52899	-0.53015	-0.51385	-0.49949	-0.50400	-0.50347	-0.48575	-0.48992	-0.49259
ADD	0.35275	0.34869	0.33724	0.32855	0.32584	0.33810	0.30439	0.33622	0.33720
SR	0.19533	0.18613	0.18211	0.15960	0.17016	0.16835	0.15132	0.16784	0.15931
STARR	0.09513	0.09264	0.08611	0.07634	0.08030	0.08014	0.06915	0.08281	0.07530
Sterling	0.01274	0.01344	0.01279	0.01244	0.01277	0.01213	0.01266	0.01165	0.01099
Cumulative Return	2.00672	2.05403	1.94315	1.85727	1.88747	1.87309	1.78859	1.82304	1.76077
$\alpha = 0.99$									
Mean	0.00448	0.00479	0.00411	0.00410	0.00437	0.00398	0.00366	0.00378	0.00370
SD	0.02584	0.02539	0.02565	0.02575	0.02400	0.02360	0.02547	0.02319	0.02325
VaR	0.03950	0.03400	0.03408	0.03577	0.03430	0.03379	0.03478	0.03019	0.03219
CVaR	0.05489	0.05348	0.05529	0.05548	0.05048	0.04839	0.05539	0.04702	0.04919
Min	-0.11728	-0.10937	-0.11584	-0.11909	-0.09512	-0.08992	-0.11280	-0.09002	-0.08953
Max	0.08458	0.08459	0.08459	0.07661	0.07628	0.10406	0.08572	0.06878	0.06089
MDD	-0.50678	-0.53013	-0.49625	-0.49815	-0.51756	-0.46730	-0.45128	-0.48579	-0.49259
ADD	0.30873	0.33176	0.30878	0.31248	0.34601	0.31608	0.26715	0.33202	0.33720
SR	0.17334	0.18860	0.16031	0.15918	0.18228	0.16858	0.14366	0.16295	0.15931
STARR	0.08161	0.08953	0.07437	0.07388	0.08666	0.08222	0.06606	0.08037	0.07530
Sterling	0.01451	0.01443	0.01332	0.01312	0.01263	0.01259	0.01370	0.01138	0.01099
Cumulative Return	1.97893	2.08622	1.86454	1.85970	1.96020	1.84020	1.73204	1.78304	1.76077

Table 11

Performance comparison of eight different distance based clustering portfolios under $\alpha = 95\%$ and $\alpha = 99\%$, including the $(\text{DRMV})_A$ model for in-sample period $T_1 = 84$ and out-of-sample period $T_2 = 10$.

$\alpha = 0.95$	$(\text{DRMV})_{\text{AWDS}}$	$(\text{DRMV})_{\text{APLS}}$	$(\text{DRMV})_{\text{ACS}}$	$(\text{DRMV})_{\text{AES}}$	$(\text{DRMV})_{\text{AWDI}}$	$(\text{DRMV})_{\text{APLI}}$	$(\text{DRMV})_{\text{ACI}}$	$(\text{DRMV})_{\text{AEI}}$	$(\text{DRMV})_A$
Mean	0.00419	0.00472	0.00402	0.00423	0.00394	0.00402	0.00381	0.00392	0.00336
SD	0.02313	0.02552	0.02425	0.02445	0.02345	0.02484	0.02663	0.02347	0.02417
VaR	0.03187	0.03354	0.03278	0.03601	0.02933	0.03773	0.03968	0.03594	0.03380
CVaR	0.05047	0.05217	0.05291	0.05304	0.04664	0.05440	0.06034	0.05140	0.05792
Min	-0.09029	-0.09218	-0.09022	-0.09095	-0.08697	-0.09186	-0.11563	-0.08114	-0.08844
Max	0.06902	0.09019	0.08456	0.08350	0.06883	0.08837	0.08456	0.08456	0.06344
MDD	-0.50019	-0.54002	-0.48460	-0.50224	-0.50142	-0.48691	-0.46737	-0.48192	-0.44757
ADD	0.34833	0.38091	0.32764	0.35051	0.35810	0.33053	0.31407	0.33456	0.29737
SR	0.18110	0.18500	0.16569	0.17285	0.16812	0.16192	0.14317	0.16717	0.13901
STARR	0.08301	0.09050	0.07594	0.07969	0.08452	0.07393	0.06318	0.07631	0.05801
Sterling	0.01203	0.01239	0.01226	0.01206	0.01101	0.01216	0.01214	0.01172	0.01130
Cumulative Return	1.87079	2.01812	1.81298	1.87287	1.79675	1.80996	1.73727	1.79093	1.63236
$\alpha = 0.99$									
Mean	0.00423	0.00440	0.00418	0.00420	0.00405	0.00407	0.00369	0.00383	0.00336
SD	0.02336	0.02479	0.02609	0.02445	0.02365	0.02440	0.02622	0.02485	0.02417
VaR	0.02977	0.03793	0.03288	0.03601	0.03186	0.03292	0.03966	0.03774	0.03380
CVaR	0.05090	0.05218	0.05861	0.05304	0.04950	0.05113	0.06020	0.05363	0.05792
Min	-0.09025	-0.09008	-0.11729	-0.09091	-0.08590	-0.08598	-0.11493	-0.08769	-0.08844
Max	0.06897	0.08348	0.08457	0.08350	0.09196	0.06909	0.08456	0.08457	0.06344
MDD	-0.49894	-0.49412	-0.49323	-0.49977	-0.50961	-0.49011	-0.45814	-0.47146	-0.44757
ADD	0.35278	0.33704	0.32077	0.35024	0.36049	0.33915	0.30825	0.32391	0.29737
SR	0.18096	0.17744	0.16007	0.17162	0.17132	0.16700	0.14091	0.15398	0.13901
STARR	0.08304	0.08429	0.07126	0.07911	0.08185	0.07969	0.06138	0.07134	0.05801
Sterling	0.01198	0.01305	0.01302	0.01198	0.01124	0.01200	0.01199	0.01181	0.01130
Cumulative Return	1.88052	1.92239	1.84511	1.86358	1.82700	1.82864	1.70777	1.75422	1.63236

as the strongest performer among the sentiment-based models, attaining the highest mean return, SR, STARR, and cumulative return, while $(\text{DRMV})_{\text{AWDS}}$ ranks closely behind in terms of return performance. Overall, among the sentiment-based strategies, $(\text{DRMV})_{\text{AWDS}}$ and $(\text{DRMV})_{\text{APLS}}$ dominate in terms of return and reward-to-risk performance during the conflict period.

We next compare the four indicator-only filtering-based strategies. Under $\alpha = 0.95$, $(\text{DRMV})_{\text{AWDI}}$ provides the strongest return performance, attaining the highest mean return, maximum return, and cumulative return among the four, whereas $(\text{DRMV})_{\text{APLI}}$ performs best in terms of downside risk and risk-adjusted performance, achieving the lowest VaR, minimum return, MDD, and the highest STARR and Sterling ratio. For $\alpha = 0.99$, $(\text{DRMV})_{\text{AWDI}}$ again remains the strongest performer in terms of return-based measures. Overall, similar to the normal market period, the TDA-based filtering strategies continue to outperform the

non-TDA alternatives even during the conflict period, especially in terms of return. We further compare the indicator-sentiment based models with their corresponding indicator-only counterparts. The results indicate that the inclusion of sentiment information generally improves return performance and risk-adjusted measures. Except for $\alpha = 99\%$, $(\text{DRMV})_{\text{AWDI}}$ performing better than $(\text{DRMV})_{\text{AWDS}}$ in terms of returns and risk-adjusted ratios.

Further, we compare the eight filtering-based (DRMV) models with the full asset universe model $(\text{DRMV})_A$. The results show that almost all filtering-based strategies, except $(\text{DRMV})_{\text{AES}}$ and $(\text{DRMV})_{\text{AEI}}$ in some cases, outperform $(\text{DRMV})_A$ in terms of return and risk-adjusted measures under both confidence levels. In particular, the best-performing filtered portfolios achieve notably higher mean returns, SR, STARR values, and cumulative returns than the $(\text{DRMV})_A$

Table 12

Performance of four benchmark models for an in-sample period $T_1 = 84$ (4 months) and out-of-sample period $T_2 = 166$ (8 months), i.e., without rebalancing.

	B&H _S		B&H _I		Naïve	Index
	$\alpha = 0.95$	$\alpha = 0.99$	$\alpha = 0.95$	$\alpha = 0.99$		
Mean	0.00164	0.00176	0.00162	0.00143	0.00086	0.00123
SD	0.00929	0.01011	0.00908	0.01077	0.00730	0.00731
VaR	0.01802	0.01512	0.01890	0.01429	0.01215	0.01122
CVaR	0.02033	0.02051	0.02131	0.01989	0.01445	0.01694
Min	-0.03416	-0.03384	-0.03493	-0.03609	-0.01744	-0.02704
Max	0.02962	0.03353	0.03234	0.03055	0.02373	0.02246
MDD	-0.22619	-0.22776	-0.218286	-0.21132	-0.13830	-0.19177
ADD	0.09151	0.09953	0.93796	0.09439	0.05124	0.07052
SR	0.17653	0.17409	0.17841	0.13233	0.11721	0.16872
STARR	0.08067	0.08564	0.07602	0.07189	0.05920	0.07279
Sterling	0.01792	0.01768	0.01727	0.01515	0.01669	0.01749
Cumulative Return	1.29697	1.32331	1.29276	1.25298	1.14650	1.22017

model. Moreover, several filtering-based strategies also exhibit improved downside risk characteristics and lower drawdowns relative to $(\text{DRMV})_A$.

Similar patterns are observed in Tables 14 and 15, corresponding to the 5-day and 10-day rebalancing horizons, respectively. The main findings remain qualitatively unchanged during the conflict period. In particular, the proposed TDA-based filtering strategies continue to outperform the benchmark distance-based specifications in terms of return and risk-adjusted performance across both confidence levels. Among them, $(\text{DRMV})_{\text{AWDS}}$ remains one of the strongest performers across most return-oriented and reward-to-risk measures. Overall, these results further support the robustness of the proposed two-stage filtering framework under heightened geopolitical uncertainty and across lower rebalancing frequencies.

We also compare Tables 13, 14, and 15 to assess the impact of rebalancing frequency during the conflict period. Overall, the results indicate that more frequent rebalancing is generally advantageous in terms of return and reward-to-risk performance. In particular, the 3-day rebalancing horizon often delivers higher mean returns, SR, STARR values, and cumulative returns for several of the best-performing models, highlighting the benefit of more responsive portfolio adjustment during periods of elevated market stress. Interestingly, when comparing the lower-frequency rebalancing settings, the 10-day horizon often performs better than the 5-day horizon in terms of return and risk-adjusted measures. This suggests that, beyond a certain point, increasing the rebalancing frequency does not necessarily lead to monotonic improvements in performance. Further, the 5-day and 10-day settings occasionally exhibit relatively better downside risk and drawdown characteristics for some specifications, which is also expected, since more frequent rebalancing may enhance return generation but can simultaneously expose the portfolio to higher risk and trading frictions.

Finally, we compare the proposed filtering-based (DRMV) models reported in Tables 13, 14, and 15 with the benchmark

portfolios presented in Table 16, namely B&H_S, B&H_I, Naïve, and Index. The results clearly demonstrate the superiority of the proposed two-stage framework during the conflict period. In particular, the Naïve and Index portfolios generate negative average returns over the period from January 2026 to March 2026, whereas all proposed filtering-based strategies continue to deliver positive returns. Even the benchmark portfolios, B&H_S and B&H_I, perform relatively better than Naïve and Index and are able to generate positive returns over the same period. Although Naïve and Index exhibit relatively lower risk, such portfolios remain unattractive from an investment perspective due to their negative return performance. Moreover, the 3-day rebalanced filtering-based models substantially outperform B&H_S and B&H_I in terms of return and reward-to-risk measures. For the 5-day and 10-day rebalancing settings, the strongest filtering strategies, particularly $(\text{DRMV})_{\text{AWDS}}$, $(\text{DRMV})_{\text{AWDI}}$, $(\text{DRMV})_{\text{APLS}}$, and $(\text{DRMV})_{\text{APLI}}$, continue to outperform all benchmark portfolios. In contrast, some of the correlation and Euclidean distance-based filtering strategies, while still superior to Naïve and Index, do not consistently dominate B&H_S and B&H_I across all performance measures. Overall, these findings indicate that the proposed two-stage dynamic rebalancing framework remains highly effective even during a period of elevated geopolitical uncertainty and market stress. Moreover, the inclusion of sentiment as an additional feature in measuring asset similarity, together with the proposed TDA-based framework, appears to further strengthen the filtering stage and improve the overall portfolio allocation process by delivering higher returns and superior risk-adjusted performance even during stressed market conditions.

9. Conclusion

In this work, we introduced distance measures based on topological features derived via PH on multi-dimensional data, integrating technical indicators and news-based sentiment, to quantify similarity among assets. Notably, these measures capture complex, non-linear dependencies and

Table 13

Performance comparison of eight different distance based clustering portfolios under $\alpha = 95\%$ and $\alpha = 99\%$, including the $(\text{DRMV})_A$ model for in-sample period $T_1 = 63$ and out-of-sample period $T_2 = 3$, during the period of heightened U.S.–Israel–Iran conflict.

$\alpha = 0.95$	$(\text{DRMV})_{\text{AWTS}}$	$(\text{DRMV})_{\text{APLS}}$	$(\text{DRMV})_{\text{ACS}}$	$(\text{DRMV})_{\text{AES}}$	$(\text{DRMV})_{\text{AWDI}}$	$(\text{DRMV})_{\text{APLI}}$	$(\text{DRMV})_{\text{ACTI}}$	$(\text{DRMV})_{\text{AEII}}$	$(\text{DRMV})_A$
Mean	0.00594	0.00586	0.00515	0.00468	0.00579	0.00503	0.00477	0.00457	0.00458
SD	0.03979	0.03814	0.03585	0.03545	0.04188	0.03840	0.03659	0.03994	0.03667
VaR	0.04090	0.04913	0.03916	0.04213	0.04666	0.04661	0.04734	0.05443	0.05245
CVaR	0.07910	0.07107	0.07029	0.06438	0.08102	0.07031	0.07780	0.06993	0.07316
Min	-0.11865	-0.08678	-0.08511	-0.07901	-0.11865	-0.08678	-0.09229	-0.08850	-0.09836
Max	0.11710	0.10114	0.07841	0.09456	0.11710	0.11108	0.10921	0.10570	0.09781
MDD	-0.31450	-0.34106	-0.28441	-0.25952	-0.30676	-0.24889	-0.25741	-0.25431	-0.28656
ADD	0.13334	0.14346	0.12054	0.09920	0.12993	0.10925	0.10701	0.13448	0.12523
Sharpe	0.14937	0.15358	0.14360	0.13215	0.13821	0.13097	0.13045	0.11453	0.12487
STARR	0.07513	0.08243	0.07324	0.07276	0.07145	0.07154	0.06135	0.06540	0.06259
Sterling	0.04457	0.04083	0.04271	0.04722	0.04455	0.04604	0.04460	0.03401	0.03657
Cumulative Returns	1.36254	1.36084	1.31079	1.27618	1.34357	1.29468	1.27959	1.25525	1.26463
$\alpha = 0.99$									
Mean	0.00514	0.00572	0.00518	0.00435	0.00534	0.00522	0.00490	0.00401	0.00458
SD	0.04046	0.03872	0.03749	0.04109	0.03801	0.03943	0.03836	0.04187	0.03667
VaR	0.04825	0.04925	0.04375	0.05650	0.04901	0.05872	0.05146	0.06293	0.05245
CVaR	0.08194	0.06640	0.07361	0.07814	0.07385	0.07709	0.06228	0.07652	0.06640
Min	-0.11865	-0.07519	-0.08678	-0.08869	-0.08678	-0.08707	-0.07519	-0.09801	-0.09836
Max	0.11710	0.09718	0.09028	0.09246	0.09737	0.10792	0.10326	0.10157	0.09781
MDD	-0.33542	-0.34155	-0.28482	-0.26448	-0.30292	-0.31404	-0.31668	-0.25255	-0.28656
ADD	0.15235	0.14687	0.12900	0.13811	0.12557	0.13935	0.14106	0.13472	0.12523
Sharpe	0.12711	0.14762	0.13804	0.10577	0.14045	0.13228	0.12772	0.09581	0.12487
STARR	0.06276	0.08609	0.07031	0.05562	0.07228	0.06766	0.07867	0.05243	0.06259
Sterling	0.03376	0.03892	0.04012	0.03147	0.04251	0.03743	0.03473	0.02978	0.04012
Cumulative Returns	1.29689	1.34766	1.30838	1.23468	1.31963	1.30581	1.28468	1.20804	1.26463

Table 14

Performance comparison of eight different distance based clustering portfolios under $\alpha = 95\%$ and $\alpha = 99\%$, including the $(\text{DRMV})_A$ model for in-sample period $T_1 = 63$ and out-of-sample period $T_2 = 5$, during the period of heightened U.S.–Israel–Iran conflict.

$\alpha = 0.95$	$(\text{DRMV})_{\text{AWTS}}$	$(\text{DRMV})_{\text{APLS}}$	$(\text{DRMV})_{\text{ACS}}$	$(\text{DRMV})_{\text{AES}}$	$(\text{DRMV})_{\text{AWDI}}$	$(\text{DRMV})_{\text{APLI}}$	$(\text{DRMV})_{\text{ACTI}}$	$(\text{DRMV})_{\text{AEII}}$	$(\text{DRMV})_A$
Mean	0.00528	0.00436	0.00440	0.00441	0.00522	0.00433	0.00407	0.00394	0.00406
SD	0.04005	0.03916	0.03394	0.03434	0.04059	0.03469	0.03760	0.03356	0.03255
VaR	0.04195	0.05230	0.04987	0.04953	0.05919	0.04594	0.06381	0.04222	0.04048
CVaR	0.08453	0.07774	0.07100	0.07409	0.09084	0.06850	0.08105	0.06181	0.06865
Min	-0.11865	-0.08333	-0.07519	-0.08670	-0.12761	-0.07519	-0.08511	-0.07194	-0.08629
Max	0.09464	0.10114	0.08249	0.09031	0.11116	0.08249	0.09222	0.08433	0.07666
MDD	-0.30134	-0.28106	-0.28998	-0.25683	-0.28065	-0.25911	-0.24873	-0.23109	-0.26248
ADD	0.12780	0.11248	0.12182	0.10815	0.11659	0.11499	0.09256	0.08197	0.12011
Sharpe	0.13184	0.11136	0.12976	0.12842	0.12873	0.12492	0.10838	0.11733	0.12479
STARR	0.06247	0.05609	0.06202	0.05953	0.05752	0.06327	0.05028	0.06371	0.05917
Sterling	0.04132	0.03877	0.03615	0.04078	0.04481	0.03769	0.04402	0.04804	0.03382
Cumulative Returns	1.30849	1.24146	1.25852	1.25787	1.30225	1.25152	1.22443	1.22511	1.23634
$\alpha = 0.99$									
Mean	0.00512	0.00445	0.00410	0.00418	0.00452	0.00443	0.00441	0.00385	0.00406
SD	0.03654	0.03671	0.03725	0.04104	0.03592	0.03434	0.03434	0.04184	0.03255
VaR	0.04929	0.04913	0.05858	0.05650	0.04959	0.05122	0.04953	0.06293	0.04048
CVaR	0.07302	0.07103	0.07593	0.07814	0.06571	0.07413	0.07409	0.07652	0.06865
Min	-0.08666	-0.08678	-0.08207	-0.08869	-0.08673	-0.08921	-0.08670	-0.09801	-0.08629
Max	0.08902	0.10114	0.08907	0.09246	0.09463	0.10077	0.09031	0.10157	0.07666
MDD	-0.29601	-0.31026	-0.23225	-0.26448	-0.26184	-0.23409	-0.25683	-0.25255	-0.26248
ADD	0.12690	0.12807	0.09947	0.13798	0.10344	0.09096	0.10815	0.13460	0.12011
Sharpe	0.14014	0.12133	0.11011	0.10182	0.12596	0.12885	0.12842	0.09192	0.12479
STARR	0.07012	0.06270	0.05402	0.05348	0.06885	0.05970	0.05953	0.05026	0.05917
Sterling	0.04035	0.03478	0.04124	0.03029	0.04374	0.04865	0.04078	0.02857	0.04124
Cumulative Returns	1.30667	1.25530	1.22757	1.22256	1.26268	1.25908	1.25787	1.19618	1.23634

incorporate behavioral market signals that are often overlooked by traditional covariance and Euclidean distance-based approaches. These distance measures are subsequently used as inputs to an agglomerative clustering framework for asset selection, followed by the development of a dynamic rebalancing mean–variance model that incorporates practical constraints such as transaction costs, short-selling, and lower and upper bounds on portfolio weights. Specifically, we propose a novel, fully data-driven framework grounded in TDA and contextual sentiment analysis for constructing sparse portfolios within a practically implementable, actively managed PO setting.

Our empirical findings demonstrate that sparse portfolios selected using TDA on multi-dimensional data, including sentiment, are not only comparable to existing methods but often outperform them. The results remain robust under

volatile market conditions and across multiple performance measures, including returns and risk-adjusted ratios, albeit with a marginal increase in risk. Furthermore, the inclusion of sentiment enhances the model's ability to capture market regime shifts and investor behavior, thereby improving adaptability and robustness. Thus, this study contributes to the literature on sparse portfolio selection and advances the application of TDA and sentiment-informed modeling in finance.

Acknowledgements

The author sincerely thanks Prof. Aparna Mehra, Department of Mathematics, IIT Delhi, for her valuable guidance, insightful suggestions, and careful review of the manuscript. Puneet Pasricha, Department of Mathematics, IIT Ropar, for his insightful comments. The author sincerely acknowledges

Table 15

Performance comparison of eight different distance based clustering portfolios under $\alpha = 95\%$ and $\alpha = 99\%$, including the $(\text{DRMV})_A$ model for in-sample period $T_1 = 63$ and out-of-sample period $T_2 = 10$, during the period of heightened U.S.–Israel–Iran conflict.

$\alpha = 0.95$	$(\text{DRMV})_{\text{AWTS}}$	$(\text{DRMV})_{\text{APLS}}$	$(\text{DRMV})_{\text{ACS}}$	$(\text{DRMV})_{\text{AES}}$	$(\text{DRMV})_{\text{AWDI}}$	$(\text{DRMV})_{\text{APLI}}$	$(\text{DRMV})_{\text{ACTI}}$	$(\text{DRMV})_{\text{AEII}}$	$(\text{DRMV})_A$
Mean	0.00535	0.00429	0.00423	0.00383	0.00508	0.00431	0.00418	0.00349	0.00393
SD	0.03933	0.04044	0.02867	0.03384	0.03954	0.03627	0.03887	0.03114	0.02855
VaR	0.04912	0.05233	0.04652	0.04542	0.04896	0.04580	0.06044	0.05438	0.03878
CVaR	0.07571	0.08761	0.05942	0.06719	0.07077	0.07200	0.08092	0.06542	0.04908
Min	-0.08706	-0.12476	-0.07211	-0.07687	-0.08666	-0.08395	-0.08473	-0.07157	-0.05463
Max	0.09628	0.10100	0.08952	0.09205	0.11157	0.09084	0.09222	0.06838	0.08316
MDD	-0.34467	-0.27947	-0.29450	-0.27071	-0.31882	-0.27907	-0.25850	-0.21191	-0.24977
ADD	0.16709	0.12739	0.12919	0.12256	0.14061	0.13055	0.09802	-0.08672	0.12003
Sharpe	0.13615	0.10604	0.14743	0.11321	0.12860	0.11871	0.11220	0.10746	0.13780
STARR	0.07073	0.04895	0.07113	0.05702	0.07185	0.05980	0.05162	0.05341	0.08015
Sterling	0.03205	0.03366	0.03272	0.03126	0.03616	0.03298	0.04262	0.04029	0.03277
Cumulative Returns	1.31697	1.23178	1.25749	1.21660	1.29555	1.24524	1.22855	1.19800	1.23604
$\alpha = 0.99$									
Mean	0.00529	0.00512	0.00438	0.00401	0.00457	0.00494	0.00450	0.00400	0.00393
SD	0.03708	0.03549	0.03904	0.03566	0.03701	0.04020	0.03251	0.04030	0.02855
VaR	0.04909	0.04740	0.05589	0.05189	0.05144	0.05207	0.05866	0.06576	0.03878
CVaR	0.07160	0.06997	0.07394	0.06826	0.07145	0.08366	0.07294	0.09147	0.04908
Min	-0.08666	-0.08395	-0.08473	-0.08867	-0.08473	-0.11865	-0.08323	-0.10263	-0.05463
Max	0.09669	0.08691	0.11234	0.07996	0.10104	0.11710	0.10252	0.09548	0.08316
MDD	-0.32658	-0.30958	-0.30943	-0.24610	-0.27921	-0.33249	-0.28357	-0.25868	-0.24977
ADD	0.14342	0.14308	0.14563	0.11927	0.10904	0.12705	0.12341	0.12290	0.12003
Sharpe	0.14264	0.14413	0.11229	0.11252	0.12361	0.12295	0.13835	0.09936	0.13780
STARR	0.07386	0.07311	0.05928	0.05878	0.06402	0.05909	0.06166	0.04378	0.08015
Sterling	0.03687	0.03575	0.03010	0.03364	0.04195	0.02873	0.03687	0.03258	0.03277
Cumulative Returns	1.31845	1.30914	1.24372	1.22512	1.26356	1.28212	1.26908	1.21142	1.23604

Table 16

Performance of four benchmark models for an in-sample period $T_1 = 63$ (3 months) and out-of-sample period $T_2 = 62$ (3 months), i.e., without rebalancing, during the period of heightened U.S.–Israel–Iran conflict.

	B&H _S		B&H _I		Naïve	Index
	$\alpha = 0.95$	$\alpha = 0.99$	$\alpha = 0.95$	$\alpha = 0.99$		
Mean	0.00428	0.00438	0.00439	0.00431	-0.00027	-0.00108
SD	0.03151	0.03069	0.02991	0.02964	0.00798	0.00774
VaR	0.04268	0.03899	0.03788	0.03788	0.01343	0.01378
CVaR	0.05020	0.04997	0.04885	0.04885	0.01557	0.01677
Min	-0.05753	-0.05964	-0.05702	-0.05702	-0.01700	-0.01772
Max	0.08752	0.07184	0.08108	0.08108	0.01665	0.01523
MDD	-0.28210	-0.28830	-0.28263	-0.27692	-0.06442	-0.07828
ADD	0.13193	0.13842	0.12920	0.13010	0.02732	0.02355
Sharpe	0.13584	0.14275	0.14690	0.14541	-	-
STARR	0.08528	0.08766	0.08994	0.08822	-	-
Sterling	0.03245	0.03165	0.03401	0.03313	-	-
Cumulative Returns	1.25540	1.26471	1.26749	1.26172	0.98211	0.93529

the financial support provided through the Prime Minister Research Fellowship under award number PMRF ID-11CS142003.

Declaration of Generative AI and AI-assisted technologies in the manuscript preparation process

During the preparation of this work, the author used GPT-Go (ChatGPT) to improve the language, readability, and clarity of the manuscript. In addition, Google Gemini was used to assist in the creation of explanatory images included in the manuscript. Following the use of these tools, the author carefully reviewed, edited, and verified all content and images and takes full responsibility for the accuracy and integrity of the published work.

Appendix A. Technical indicators

Relative Strength Index (RSI): RSI is a momentum-based technical indicator that measures the speed and magnitude of recent price changes to assess overbought or oversold

conditions in a stock. It is computed using the ratio of average gains to average losses over a specified look-back period, typically 14 trading days, and is scaled to lie between 0 and 100. Higher RSI values indicate strong upward momentum and potential overbought conditions, whereas lower values suggest downward momentum and potential oversold conditions.

The average gain AG_t and average loss AL_t over a look-back window of length L (typically $L = 10$) are computed as

$$AG_t = \frac{1}{L} \sum_{i=1}^L \max(\Delta C_{t-i+1}, 0),$$

$$AL_t = \frac{1}{L} \sum_{i=1}^L \max(-\Delta C_{t-i+1}, 0), \quad \text{where} \quad \Delta C_t = C_t - C_{t-1}.$$

$$RSI_t = 100 - \frac{100}{1 + RSI_t}, \quad \text{where} \quad RSI_t = \frac{AG_t}{AL_t}.$$

where $RSI_t \in [0, 100]$. $RSI_t \geq 70$ indicate stronger upward momentum and is overbought, while $RSI_t \leq 30$ suggest stronger downward momentum and is oversold.

Stochastic Oscillator (SO): SO is a momentum-based technical indicator that evaluates the position of a stock's closing price relative to its recent trading range. It is designed to capture overbought and oversold conditions by comparing the current closing price with the highest and lowest prices over a specified look-back period. Let H_t , L_t , and C_t denote the highest, lowest, and closing prices of a stock at time t , respectively. It is defined as

$$SO_t = \frac{C_t - L_t}{H_t - L_t} \times 100.$$

SO index has a value between 0 and 100. Similar to RSI, a value above 90 is overbought and below 10 is oversold.

Moving Average Convergence Divergence (MACD): MACD [2] is a momentum-based technical indicator widely used to identify changes in trend direction and to generate buy-sell signals. It measures the relationship between two exponential moving averages (EMAs) of a stock's closing price. A positive MACD value indicates upward momentum, while a negative value suggests downward momentum. In practice, a buy signal is typically generated when the MACD crosses from negative to positive, whereas a sell signal is indicated when it moves from positive to negative. It is computed as

$$MACD_t = 2 (DIFF_t - DEA_t),$$

$$DIFF_t = EMA_t^{(SHORT)} - EMA_t^{(LONG)},$$

$$DEA_t = \frac{2}{M+1} DIFF_t + \frac{M-1}{M+1} DEA_{t-1},$$

where, $EMA_t^{(N)}$ denotes the exponential moving average of the closing price with window length N , which is computed recursively as

$$EMA_t^{(N)} = \frac{2}{N+1} C_t + \frac{N-1}{N+1} EMA_{t-1}^{(N)}. \quad (16)$$

Following standard practice in technical analysis, we set the parameters $SHORT = 12$, $LONG = 26$, and $M = 9$ in this study. These values are commonly used to balance short-term responsiveness with long-term trend stability and are adopted to ensure comparability with widely used trading benchmarks.

Appendix B. Correlation and Euclidean distances

As a benchmark for comparison, we also consider a correlation-based distance between the multivariate time series. Correlation measures the degree of co-movement between two time series and is widely used in financial applications to quantify similarity in asset dynamics. Unlike TDA-based

distances, which capture the geometric structure of the underlying point clouds, correlation-based distance reflects the linear dependence between the corresponding time-series components.

Definition B.1. The correlation-based distance between the two multivariate time series Z_i and Z_j is defined as

$$d_{AC}(Z_i, Z_j) = \sqrt{2(1 - \rho(Z_i, Z_j))},$$

$$\rho(Z_i, Z_j) = \frac{1}{d} \sum_{k=1}^d \rho(Z_{ik}, Z_{jk}),$$

where $\rho(Z_{ik}, Z_{jk})$ denotes the Pearson correlation coefficient between the k -th components of the time series Z_i and Z_j .

Definition B.2. The Euclidean distance between two multivariate time series Z_i and Z_j is defined as

$$d_{AE}(Z_i, Z_j) = \|Z_i - Z_j\|_2 = \sqrt{\sum_{k=1}^d \|Z_{ik} - Z_{jk}\|_2^2},$$

where Z_{ik} and Z_{jk} denote the k -th component time series of Z_i and Z_j , respectively, and $\|\cdot\|_2$ represents the Euclidean norm.

Appendix C. Agglomerative clustering algorithm

Clustering methods operate in an unsupervised manner and aim to uncover inherent group structures in data without relying on labeled observations. In this study, we employ agglomerative clustering to group stocks based on pairwise distance measures derived from their multivariate time-series representations. Prior to clustering, pairwise distances between all stocks are computed using the measures introduced in Section 4.1, namely the topological distances d_{AWD} and d_{ALD} , along with the benchmark distances d_{AC} and d_{AE} . These distances are used to construct a symmetric distance matrix, which serves as the input to the clustering algorithm.

Compared to widely used clustering methods such as k-means, agglomerative clustering does not require the number of clusters to be specified in advance and naturally accommodates the identification of outliers. In contrast, k-means assigns every observation to a cluster, even if certain stocks exhibit behavior that is significantly different from others. Agglomerative clustering follows a bottom-up strategy, where each stock is initially treated as an individual cluster. At each iteration, the two closest clusters are merged according to a chosen linkage criterion. In this study, we adopt the average linkage method, which defines the distance between two clusters as the mean of all pairwise distances between their constituent elements. Specifically, let A and B denote two clusters containing N_A and N_B observations,

Algorithm 1 Algorithm to compute the TDA-based distance between assets

1: For asset i , represent the multivariate time series in the in-sample period as

$$Z_i = \{z_{it} \in \mathbb{R}^d\}_{t=1}^{T_1}, \quad d = 3 \text{ or } 4,$$

where $z_{it} = (z_{it}^{(1)}, z_{it}^{(2)}, z_{it}^{(3)}, z_{it}^{(4)})$ denotes the four-dimensional observation at time t , and T_1 is the length of the in-sample period.

2: The corresponding point cloud representation for $d = 4$ is

$$Z_i = \begin{bmatrix} z_{i1} \\ z_{i2} \\ \vdots \\ z_{iT_1} \end{bmatrix} = \begin{bmatrix} z_{i1}^{(1)} & z_{i1}^{(2)} & z_{i1}^{(3)} & z_{i1}^{(4)} \\ z_{i2}^{(1)} & z_{i2}^{(2)} & z_{i2}^{(3)} & z_{i2}^{(4)} \\ \vdots & \vdots & \vdots & \vdots \\ z_{iT_1}^{(1)} & z_{iT_1}^{(2)} & z_{iT_1}^{(3)} & z_{iT_1}^{(4)} \end{bmatrix}.$$

3: Form the first point cloud using a time-window of size L , resulting in a matrix of order $L \times d$ with $L = 21$,

$$Z_{i1} = \begin{bmatrix} z_{i1}^{(1)} & z_{i1}^{(2)} & z_{i1}^{(3)} & z_{i1}^{(4)} \\ z_{i2}^{(1)} & z_{i2}^{(2)} & z_{i2}^{(3)} & z_{i2}^{(4)} \\ \vdots & \vdots & \vdots & \vdots \\ z_{iL}^{(1)} & z_{iL}^{(2)} & z_{iL}^{(3)} & z_{iL}^{(4)} \end{bmatrix}.$$

4: Apply Algorithm 2 to construct the Rips filtration $\{R(Z_{i1}, \epsilon_j)\}_{j=1}^N$ and Algorithm 3 to compute the persistence diagram $\mathcal{D}_{Z_{i1}}$ and the persistence landscape $\zeta_{Z_{i1}}$.

5: Using a sliding step of one day, construct the next point cloud

$$Z_{i2} = \begin{bmatrix} z_{i2}^{(1)} & z_{i2}^{(2)} & z_{i2}^{(3)} & z_{i2}^{(4)} \\ z_{i3}^{(1)} & z_{i3}^{(2)} & z_{i3}^{(3)} & z_{i3}^{(4)} \\ \vdots & \vdots & \vdots & \vdots \\ z_{i(L+1)}^{(1)} & z_{i(L+1)}^{(2)} & z_{i(L+1)}^{(3)} & z_{i(L+1)}^{(4)} \end{bmatrix}.$$

6: For each subsequent window $k = 2, \dots, K$, repeat the above procedure to construct the point cloud Z_{ik} and compute its persistence diagram $\mathcal{D}_{Z_{ik}}$ and persistence landscape $\zeta_{Z_{ik}}$ using Algorithms 2 and 3.

7: This process yields $K = T_1 - L + 1$ point clouds $\{Z_{ik}\}_{k=1}^K$ and their corresponding persistence diagrams and persistence landscapes for each asset $i = 1, 2, \dots, n$.

8: For two assets i and j , compute the average Wasserstein distance (AWD) between the persistence diagrams

$$d_{\text{AWD}}(Z_i, Z_j) = \sum_{k=1}^K w_k W_p(\mathcal{D}_{Z_{ik}}, \mathcal{D}_{Z_{jk}}),$$

as defined in (6). Similarly, the average landscape distance (ALD) is computed using (7) in the manuscript.

9: By computing these distances for all pairs of assets, obtain the symmetric distance matrix $D \in \mathbb{R}^{n \times n}$, where n denotes the number of assets considered for portfolio construction.

respectively. The inter-cluster distance is computed as

$$d_{\text{average}}(A, B) = \frac{1}{N_A N_B} \sum_{Z_i \in A} \sum_{Z_j \in B} d(Z_i, Z_j), \quad (17)$$

where $d(Z_i, Z_j)$ represents the pairwise distance between observations Z_i and Z_j , corresponding to one of the four distance measures considered in this study, namely d_{AWD} , d_{ALD} , d_{AC} , or d_{AE} .

The iterative merging process produces a hierarchical structure, typically represented by a dendrogram (see Figure 2 in the manuscript), which provides insight into the nested relationships among clusters. A key component of the clustering procedure is the stopping criterion, which determines when the merging process terminates. Instead of specifying the

Algorithm 2 Construction of Vietoris–Rips filtration from a point cloud

Data: A point cloud

$$Z_{ik}^T = \{z_{ik}, z_{i(k+1)}, \dots, z_{i(k+L-1)}\}, \quad z_{it} \in \mathbb{R}^d,$$

and a sequence of scales $0 < \epsilon_1 < \epsilon_2 < \dots < \epsilon_N$.

Result: Vietoris–Rips filtration $\{R(Z_{ik}, \epsilon_j)\}_{j=1}^N$.

1: **for** $j = 1, 2, \dots, N$ **do**

2: Draw a ball of radius ϵ_j centered at each point of the point cloud $\{z_{ik}, z_{i(k+1)}, \dots, z_{i(k+L-1)}\}$.

3: Connect each pair of points in Z_{ik} with an edge if

$$d(z_{ia}, z_{ib}) < 2\epsilon_j.$$

4: Connect each triplet of points in Z_{ik} to form a triangle if

$$d(z_{ia}, z_{ib}), d(z_{ia}, z_{ic}), d(z_{ib}, z_{ic}) < 2\epsilon_j.$$

5: More generally, connect any set of p points to form a $(p-1)$ -simplex if all pairwise distances between them are less than $2\epsilon_j$.

6: **return** the filtration $\{R(Z_{ik}, \epsilon_j)\}_{j=1}^N$.

Algorithm 3 Algorithm to obtain persistence diagram and persistence landscape from Rips filtration

Data: Rips filtration $\{R(Z_{ik}, \epsilon_j)\}_{j=1}^N$.

Result: Persistence diagram $\mathcal{D}_{Z_{ik}}$ and persistence landscape $\zeta_{Z_{ik}}$.

1: Compute the r -dimensional homology groups

$$H_r(R(Z_{ik}, \epsilon_j)), \quad r = 0, 1.$$

2: Record the birth and death scales of each topological feature

$$\mathcal{D}_{Z_{ik}} = \{(b_\ell, d_\ell)\}_{\ell=1}^m.$$

3: For each pair (b_ℓ, d_ℓ) construct the triangular function

$$\Lambda_{(b_\ell, d_\ell)}(t).$$

4: Construct the persistence landscape

$$\zeta_h(t) = h\text{-th largest value of } \{\Lambda_{(b_\ell, d_\ell)}(t)\}_{\ell=1}^m.$$

For $h > m$, set $\zeta_h(t) = 0$.

5: **return** $\mathcal{D}_{Z_{ik}}$ and $\zeta_{Z_{ik}}$.

number of clusters in advance, we employ a distance-based threshold ϵ , referred to as the linkage distance. Clusters are merged only if their inter-cluster distance does not exceed ϵ , allowing the number of clusters to emerge endogenously from the data.

Hyperparameter ϵ selection: To determine an appropriate value of ϵ , we adopt an approach based on nearest-neighbor distances. For each stock, the minimum distance to its closest neighbor is computed, and ϵ is defined as the α -th percentile of these distances. This percentile-based rule controls the granularity of clustering: smaller values of α lead to a larger number of smaller clusters, while larger values produce fewer and more compact clusters. In our empirical analysis, we consider $\alpha = 0.95$ and $\alpha = 0.99$. Figure 2 in the manuscript illustrates the clustering mechanism using five data points p, q, r, s, t .

Overall, agglomerative clustering (see Algorithm 4) provides a flexible and interpretable framework for grouping assets based on their similarity structure. By applying the clustering procedure separately for each distance measure,

we are able to examine how different notions of similarity influence the resulting cluster configurations and, consequently, the performance of the proposed (DRMV) portfolio strategy.

Algorithm 4 Agglomerative clustering

Require: $D \in \mathbb{R}^{n \times n}$: pairwise distance matrix computed using one of the distance measures (d_{AWD} , d_{ALD} , d_{AC} , or d_{AE}); α : percentile parameter

- 1: Compute ϵ as the α -th percentile of nearest-neighbor distances
- 2: Initialize each stock as an individual cluster
- 3: **while** minimum inter-cluster distance $< \epsilon$ **do**
- 4: Compute inter-cluster distances using average linkage
- 5: Identify the closest pair of clusters
- 6: Merge the selected pair
- 7: Remove singleton clusters and treat them as outliers
- 8: **end while**
- 9: **return** Final clusters

Appendix D. Statistical significance test

We conduct a one-sided paired t-test to examine whether the mean return of the one strategy s_1 is significantly greater than that of the other strategy s_2 . The hypotheses are $H_0 : \mu_{s_1} \leq \mu_{s_2}$ and $H_1 : \mu_{s_1} > \mu_{s_2}$, where μ_{s_1} and μ_{s_2} denote the out-of-sample mean returns of the strategies s_1 and s_2 , respectively. The statistics used in the t-test are $t = \frac{\bar{d}}{s_d / \sqrt{n}}$, where $\bar{d}$ and s_d denote the sample mean and sample SD of the paired return differences, respectively.

Finally, we employ a one-sided bootstrap-based Sharpe ratio test following the methodology proposed in [33] to examine whether the s_1 strategy provides significantly superior risk-adjusted performance relative to the s_2 strategy. The hypotheses are $H_0 : SR_{s_1} \leq SR_{s_2}$ and $H_1 : SR_{s_1} > SR_{s_2}$, where SR_{s_1} and SR_{s_2} denote the out-of-sample Sharpe ratios of the s_1 and s_2 strategies, respectively.

References

- [1] Ali Al-Arabi and Sebastian Jaimungal. Outperformance and tracking: Dynamic asset allocation for active and passive portfolio management. *Applied Mathematical Finance*, 25(3):268–294, 2018.
- [2] Gerald Appel. *Technical analysis: power tools for active investors*. FT Press, 2005.
- [3] Dogu Araci. Finbert: Financial sentiment analysis with pre-trained language models. *arXiv preprint arXiv:1908.10063*, 2019.
- [4] Lloyd L Aromi, Yuri A Katz, and Josep Vives. Topological features of multivariate distributions: Dependency on the covariance matrix. *Communications in Nonlinear Science and Numerical Simulation*, 103:105996, 2021.
- [5] Malcolm Baker and Jeffrey Wurgler. Investor sentiment in the stock market. *Journal of Economic Perspectives*, 21(2):129–151, 2007.
- [6] Suryoday Basak, Saibal Kar, Snehanshu Saha, Luckyson Khaidem, and Sudeepa Roy Dey. Predicting the direction of stock market prices using tree-based classifiers. *The North American Journal of Economics and Finance*, 47:552–567, 2019.
- [7] Joshua Brodie, Ingrid Daubechies, Christine De Mol, Domenico Giannone, and Ignace Loris. Sparse and stable markowitz portfolios. *Proceedings of the National Academy of Sciences*, 106(30):12267–12272, 2009.
- [8] Peter Bubenik et al. Statistical topological data analysis using persistence landscapes. *The Journal of Machine Learning Research*, 16(1):77–102, 2015.
- [9] Gunnar Carlsson. Topological pattern recognition for point cloud data. *Acta Numerica*, 23:289–368, 2014.
- [10] Yuefeng Cen, Mingxing Luo, Gang Cen, Cheng Zhao, and Zhigang Cheng. Financial market correlation analysis and stock selection application based on tcn-deep clustering. *Future Internet*, 14(11):331, 2022.
- [11] MS Checkley, D Añón Higón, and H Alles. The hasty wisdom of the mob: How market sentiment predicts stock market behavior. *Expert Systems with Applications*, 77:256–263, 2017.
- [12] David Cohen-Steiner, Herbert Edelsbrunner, John Harer, and Yuriy Mileyko. Lipschitz functions have l_p -stable persistence. *Foundations of Computational Mathematics*, 10(2):127–139, 2010.
- [13] Zhifeng Dai and Fenghua Wen. Some improved sparse and stable portfolio optimization problems. *Finance Research Letters*, 27:46–52, 2018.
- [14] J Bradford De Long, Andrei Shleifer, Lawrence H Summers, and Robert J Waldmann. Noise trader risk in financial markets. *Journal of Political Economy*, 98(4):703–738, 1990.
- [15] Shuyuan Deng, Atish P Sinha, and Huimin Zhao. Adapting sentiment lexicons to domain-specific social media texts. *Decision Support Systems*, 94:65–76, 2017.
- [16] Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. Bert: Pre-training of deep bidirectional transformers for language understanding. In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, volume 1 (long and short papers)*, pages 4171–4186, 2019.
- [17] Vrinda Dhingra, Amita Sharma, and Shiv Kumar Gupta. A comprehensive evaluation of constrained mean-expected portfolios with short selling. *Annals of Operations Research*, pages 1–39, 2024.
- [18] Paul Embrechts, Andrea Höing, and Alessandro Juri. Using copulae to bound the value-at-risk for functions of dependent risks. *Finance and Stochastics*, 7(2):145–167, 2003.
- [19] Divyaneer Garg, Ahmad Zaman Khan, and Aparna Mehra. Enhanced indexing using cumulative prospect theory utility function with expected risk. *Omega*, page 103444, 2025.
- [20] Robert Ghrist. Barcodes: the persistent topology of data. *Bulletin of the American Mathematical Society*, 45(1):61–75, 2008.
- [21] Marian Gidea and Yuri Katz. Topological data analysis of financial time series: Landscapes of crashes. *Physica A: Statistical Mechanics and its Applications*, 491:820–834, 2018.
- [22] Anubha Goel, Damir Filipović, and Puneet Pasricha. Sparse portfolio selection via topological data analysis based clustering. *Quantitative Finance*, 25(8):1261–1291, 2025.
- [23] Anubha Goel, Puneet Pasricha, and Juho Kannianen. Risk reduced sparse index tracking portfolio: A topological data analysis approach. *Omega*, page 103432, 2025.
- [24] Anubha Goel, Puneet Pasricha, and Aparna Mehra. Topological data analysis in investment decisions. *Expert Systems with Applications*, 147:113222, 2020.
- [25] Chulwoo Han, Zhaodong He, and Alenson Jun Wei Toh. Pairs trading via unsupervised learning. *European Journal of Operational Research*, 307(2):929–947, 2023.
- [26] Wen jun Gu, Yi hao Zhong, Shi zun Li, Chang song Wei, Li ting Dong, Zhuo yue Wang, and Chao Yan. Predicting stock prices with finbert-lstm: Integrating news sentiment analysis. In *Proceedings of the 2024 8th International Conference on Cloud and Big Data Computing*, pages 67–72, 2024.
- [27] Sean S Jung and Woojin Chang. Clustering stocks using partial correlation coefficients. *Physica A: Statistical Mechanics and its Applications*, 462:410–420, 2016.
- [28] Can B Kalayci, Olcay Polat, and Mehmet A Akbay. An efficient hybrid metaheuristic algorithm for cardinality constrained portfolio optimization. *Swarm and Evolutionary Computation*, 54:100662, 2020.
- [29] Alperen Karan and Atabey Kaygun. Time series classification via topological data analysis. *Expert Systems with Applications*, 183:115326, 2021.

- [30] John Maynard Keynes, E Johnson, and D Moggridge. Keynes as an investor. *The Collected Works of John Maynard Keynes*, 12:1–113, 1983.
- [31] Thanos Konstantinidis, Giorgos Iacovides, Mingxue Xu, Tony G Constantinides, and Danilo Mandic. Finllama: Financial sentiment classification for algorithmic trading applications. *arXiv preprint arXiv:2403.12285*, 2024.
- [32] Philipp J Kremer, Damian Brzyski, Małgorzata Bogdan, and Sandra Paterlini. Sparse index clones via the sorted ℓ_1 -norm. *Quantitative Finance*, 22(2):349–366, 2022.
- [33] Oliver Ledoit and Michael Wolf. Robust performance hypothesis testing with the sharpe ratio. *Journal of Empirical Finance*, 15(5):850–859, 2008.
- [34] Jean Lee, Nicholas Stevens, and Soyeon Caren Han. Large language models in finance (finllms). *Neural Computing and Applications*, 37(30):24853–24867, 2025.
- [35] Diego León, Arbey Aragón, Javier Sandoval, Germán Hernández, Andrés Arévalo, and Jaime Niño. Clustering algorithms for risk-adjusted portfolio construction. *Procedia Computer Science*, 108:1334–1343, 2017.
- [36] Thomas J Linsmeier and Neil D Pearson. Risk measurement: An introduction to value at risk. 1996.
- [37] Tim Loughran and Bill McDonald. When is a liability not a liability? textual analysis, dictionaries, and 10-ks. *The Journal of Finance*, 66(1):35–65, 2011.
- [38] Pek Y Lum, Gurjeet Singh, Alan Lehman, Tigran Ishkanov, Mikael Vejdemo-Johansson, Muthu Alagappan, John Carlsson, and Gunnar Carlsson. Extracting insights from the shape of complex data using topology. *Scientific Reports*, 3(1):1236, 2013.
- [39] Manish Barath Mahendran, Aswin Kumar Gokul, Poornima Lakshmi, and S Pavithra. Comparative advances in financial sentiment analysis: A review of bert, finbert, and large language models. In *2025 3rd International Conference on Intelligent Data Communication Technologies and Internet of Things (IDCIoT)*, pages 39–45. IEEE, 2025.
- [40] Sourav Majumdar and Arnab Kumar Laha. Pairs trading with topological data analysis. *International Journal of Theoretical and Applied Finance*, 26(08):2450002, 2023.
- [41] Lamukanyani A Mantshimuli. Sentiment-aware portfolio optimization: Cvar-based diversification with deep reinforcement learning. *IEEE Access*, 2025.
- [42] Harry M Markowitz. Portfolio selection. *Journal of Finance*, 7(1):71–91, 1952.
- [43] Raffaele Mattera, Germana Scepi, and Parmjit Kaur. Time series clustering for high-dimensional portfolio selection: a comparative study: R. mattera et al. *Soft Computing*, 29(8):4219–4231, 2025.
- [44] Antonis A Michis. Multiscale partial correlation clustering of stock market returns. *Journal of Risk and Financial Management*, 15(1):24, 2022.
- [45] Milena Migliavacca, John W Goodell, and Andrea Paltrinieri. A bibliometric review of portfolio diversification literature. *International Review of Financial Analysis*, 90:102836, 2023.
- [46] Tristan Millington and Mahesan Niranjan. Construction of minimum spanning trees from financial returns using rank correlation. *Physica A: Statistical Mechanics and its Applications*, 566:125605, 2021.
- [47] Michela Nardo, Marco Petracco-Giudici, and Minás Naltsidis. Walking down wall street with a tablet: A survey of stock market predictions using the web. *Journal of Economic Surveys*, 30(2):356–369, 2016.
- [48] Theodore Papamarkou, Tolga Birdal, Michael Bronstein, Gunnar Carlsson, Justin Curry, Yue Gao, Mustafa Hajji, Roland Kwitt, Pietro Lio, Paolo Di Lorenzo, et al. Position: Topological deep learning is the new frontier for relational learning. *Proceedings of Machine Learning Research*, 235:39529, 2024.
- [49] Justo Puerto, Moisés Rodríguez-Madrena, and Andrea Scozzari. Clustering and portfolio selection problems: A unified framework. *Computers & Operations Research*, 117:104891, 2020.
- [50] Xingcheng Ran, Yue Xi, Yonggang Lu, Xiangwen Wang, and Zhenyu Lu. Comprehensive survey on hierarchical clustering algorithms and the recent developments. *Artificial Intelligence Review*, 56(8):8219–8264, 2023.
- [51] Thomas Renault. Intraday online investor sentiment and return patterns in the us stock market. *Journal of Banking & Finance*, 84:25–40, 2017.
- [52] Rodrigo Rivera-Castro, Polina Pilyugina, and Evgeny Burnaev. Topological data analysis for portfolio management of cryptocurrencies. In *2019 International Conference on Data Mining Workshops (ICDMW)*, pages 238–243. IEEE, 2019.
- [53] R Tyrrell Rockafellar, Stanislav P Uryasev, and Michael Zabarankin. Deviation measures in risk analysis and optimization. *University of Florida, Department of Industrial & Systems Engineering Working Paper*, (7), 2002.
- [54] Peter J Rousseeuw. Silhouettes: a graphical aid to the interpretation and validation of cluster analysis. *Journal of Computational and Applied Mathematics*, 20:53–65, 1987.
- [55] William F Sharpe. The Sharpe ratio. *Streetwise—the Best of the Journal of Portfolio Management*, pages 169–185, 1998.
- [56] Thendo Sidogi, Rendani Mbuvha, and Tshilidzi Marwala. Stock price prediction using sentiment analysis. In *2021 IEEE International Conference on Systems, Man, and Cybernetics (SMC)*, pages 46–51. IEEE, 2021.
- [57] Antonios Siganos, Evangelos Vagenas-Nanos, and Patrick Verwijmeren. Divergence of sentiment and stock market trading. *Journal of Banking & Finance*, 78:130–141, 2017.
- [58] Petr Sokerin, Kristian Kuznetsov, Elizaveta Makhneva, and Alexey Zaytsev. Portfolio selection via topological data analysis. In *Sixteenth International Conference on Machine Vision (ICMV 2023)*, volume 13072, pages 371–379. SPIE, 2024.
- [59] Floris Takens. Detecting strange attractors in turbulence. In *Dynamical Systems and Turbulence, Warwick 1980: proceedings of a symposium held at the University of Warwick 1979/80*, pages 366–381. Springer, 2006.
- [60] Hugo Touvron, Thibaut Lavril, Gautier Izacard, Xavier Martinet, Marie-Anne Lachaux, Timothée Lacroix, Baptiste Rozière, Naman Goyal, Eric Hambro, Faisal Azhar, et al. Llama: Open and efficient foundation language models. *arXiv preprint arXiv:2302.13971*, 2023.
- [61] Chun Wang, Zhongming Wu, Wei Xu, and Yu Yuan. An exact algorithm for a cardinality-constrained index tracking model considering investment preferences in portfolio optimization. *Journal of Industrial and Management Optimization*, 22(1):612–641, 2026.
- [62] Yu-Chen Wei, Yang-Cheng Lu, Jen-Nan Chen, and Yen-Ju Hsu. Informativeness of the market news sentiment in the taiwan stock market. *The North American Journal of Economics and Finance*, 39:158–181, 2017.
- [63] Bin Weng, Mohamed A Ahmed, and Fadel M Megahed. Stock market one-day ahead movement prediction using disparate data sources. *Expert Systems with Applications*, 79:153–163, 2017.
- [64] Zhongming Wu, Kexin Sun, Zhili Ge, Zhihua Allen-Zhao, and Tieyong Zeng. Sparse portfolio optimization via ℓ_1 over ℓ_2 regularization. *European Journal of Operational Research*, 319(3):820–833, 2024.
- [65] Wei Xu, Jie Tang, Ka Fai Cedric Yiu, and Jian Wen Peng. An efficient global optimal method for cardinality constrained portfolio optimization. *INFORMS Journal on Computing*, 36(2):690–704, 2024.
- [66] Jing-Rung Yu, W Paul Chiou, Cing-Hung Hung, Wen-Kuei Dong, and Yi-Hsuan Chang. Dynamic rebalancing portfolio models with analyses of investor sentiment. *International Review of Economics & Finance*, 77:1–13, 2022.
- [67] Jing-Rung Yu, Wan-Jiun Paul Chiou, and Ren-Ting Liu. Incorporating transaction costs, weighting management, and floating required return in robust portfolios. *Computers & Industrial Engineering*, 109:48–58, 2017.
- [68] Jing-Rung Yu and Wen-Yi Lee. Portfolio rebalancing model using multiple criteria. *European Journal of Operational Research*, 209(2):166–175, 2011.

- [69] Pengrui Yu, Zhipeng Ge, Xiaomin Gong, and Xiao Cao. Dynamic portfolio optimization with the marcos approach under uncertainty. *International Review of Financial Analysis*, 96:103565, 2024.
- [70] Shaohong Zhang, Hau-San Wong, and Ying Shen. Generalized adjusted rand indices for cluster ensembles. *Pattern Recognition*, 45(6):2214–2226, 2012.
- [71] Zhongbao Zhou, Meng Gao, Helu Xiao, Rui Wang, and Wenbin Liu. Big data and portfolio optimization: A novel approach integrating dea with multiple data sources. *Omega*, 104:102479, 2021.