

Not What You Asked For: Typographic Attacks in Household Robot Manipulation

1st Ali Iranmanesh
Cyber Security Lab
The Pennsylvania State University
State College, USA
afi5220@psu.edu

2nd Peng Liu
Cyber Security Lab
The Pennsylvania State University
State College, USA
pxl20@psu.edu

Abstract—Open-vocabulary embodied AI agents increasingly rely on vision-language models such as CLIP for object perception and task grounding. However, the shared embedding space that enables this flexibility introduces a structural vulnerability to typographic attacks, where printed text in a physical scene semantically overrides visual judgment. While prior work has quantified this threat in static 2D benchmarks and 3D navigation tasks, its impact on the full Sense-Plan-Act pipeline of household robot manipulation remains unexplored.

This work evaluates typographic attacks in a Habitat-based simulation using the HomeRobot benchmark. We introduce a decoupled perception architecture that exposes a frozen CLIP encoder to adversarial stickers while maintaining geometric grounding via DETIC. In a controlled evaluation pool of 59 attributable episodes, the attack achieves an overall Attack Success Rate (ASR) of 67.8%, rising to 70.0% among fully successful episodes, under uncontrolled viewing angles and occlusion with no perceptual optimization.

Critically, we find that perceptual errors propagate through the persistent 3D semantic map to produce kinetic failures, defined here as physically executed grasping and transport of the wrong object driven by an adversarially poisoned semantic state. In these cases, the robot physically grasps and delivers the wrong object to a target receptacle. These results establish typographic misclassification as a real, measurable, and physically consequential threat to the safety of modular manipulation pipelines that prior typographic attack research has left unexamined.

I. INTRODUCTION

The integration of large-scale vision-language models has transformed household robotics from closed-set systems into open-vocabulary agents capable of following natural language instructions. Models like Contrastive Language-Image Pre-training (CLIP) [2] allow robots to identify and interact with thousands of object categories without task-specific retraining. This capability is foundational to modern modular manipulation stacks, which combine open-vocabulary perception with 3D semantic mapping and heuristic planning to execute complex pick-and-place tasks in unstructured residential environments.

However, the alignment of visual and linguistic features in a shared embedding space creates a structural security risk known as a typographic attack. By introducing printed text into the physical environment, an adversary can cause a vision-language model to misclassify an object as whatever the text says, effectively overriding its visual judgment [10]. While this

phenomenon is well documented in 2D image classification, the implications for embodied agents are significantly more severe. In a robotic manipulation pipeline, a misclassification is not a momentary error. It is written into a persistent 3D semantic map and propagated through all downstream planning cycles. This produces a kinetic failure where the agent physically commits to the wrong object, grasps it, and delivers it to the target receptacle.

Despite the rapid expansion of adversarial research in embodied AI, household robot manipulation remains unexamined in the context of typographic threats. SCAM [8] evaluated 99 vision-language models under real-world handwritten typographic attacks and found an average accuracy drop of 26 percentage points. CHAI [19] achieved attack success rates above 87% against navigation agents including autonomous drones and ground vehicles. Both benchmarks, however, target either static image classification or high-level navigation decisions. Neither captures the failure modes specific to manipulation agents, where errors involve distinguishing among small, cluttered household objects and executing a physical grasp that irreversibly alters the state of the world within the episode.

In this paper, we fill this gap by evaluating typographic attacks against a full-stack HomeRobot [14] agent within the Habitat [12] simulation environment. We introduce adversarial stickers labeled with goal-object names into residential scenes to intercept the agent’s perception loop. Additionally, we develop a modified OvmmPerception module that exposes CLIP to typographic cues while preserving the geometric accuracy required for navigation and manipulation.

Our contributions are as follows:

- We identify and formalize household robot manipulation as an unexamined attack surface for typographic attacks. We characterize the kinetic failure mode that distinguishes it from prior evaluations: a perceptual misclassification that propagates through the full Sense-Plan-Act loop to produce a physical grasping error.
- We instantiate a **representative reference architecture** for open-vocabulary manipulation that mirrors the joint-embedding paradigm used in deployed systems like EmbCLIP and TidyBot. While we independently validated the typographic vulnerability against the third-party Em-

bCLIP agent, that system is restricted to navigation, and our architecture isolates the vision-language alignment stage to enable the first controlled evaluation of how these confirmed perceptual flaws propagate through a full-stack manipulation pipeline.

- We evaluate the attack across 59 attributable episodes from a 1,199-episode validation set, the complete subset of episodes in which failures are unambiguously attributable to the adversarial perturbation rather than pre-existing agent limitations. Our results show a 67.8% overall ASR and a 70.0% ASR on fully successful episodes, achieved without perceptual optimization under uncontrolled physical conditions.
- We characterize the attack mechanism and phase-level consequences, showing that typographic cues are written into persistent spatial memory. This causes task failure even after the sticker leaves the agent’s field of view, frequently resulting in the physical delivery of the wrong object to the receptacle.

By establishing that typographic misclassification is a physically consequential threat in household robot manipulation, this work highlights the need for robust perceptual defenses in the next generation of vision-language-action models.

II. BACKGROUND

A. Contrastive Language-Image Pretraining (CLIP)

Object recognition in computer vision has historically depended on fixed, closed-set vocabularies: a model trained to classify among 1,000 ImageNet categories cannot generalize to a novel label without retraining. A foundational step toward breaking this constraint was the construction of large-scale image-text corpora that ground visual content in natural language descriptions rather than discrete category indices [1]. Building on this direction, Radford et al. [2] introduced CLIP (Contrastive Language-Image Pretraining), a dual-encoder model trained on 400 million image-text pairs scraped from the web. CLIP trains a **vision encoder** and a text encoder jointly by maximizing the cosine similarity of matching image-text pairs and minimizing it for non-matching pairs within each batch, forming a contrastive objective that aligns visual and linguistic representations in a shared embedding space. At inference, classification is performed without any task-specific training: a text prompt such as “*a photo of a {class}*” is encoded alongside the image, and the class whose text embedding scores highest against the image embedding is selected. This zero-shot transfer capability made CLIP the perceptual backbone of choice for open-vocabulary embodied AI agents such as EmbCLIP [3], TidyBot [4], and CLIPort [5]. Subsequent vision-language-action (VLA) models including OpenVLA [6] transitioned to SigLIP [7] as their vision encoder, which replaces CLIP’s softmax contrastive loss with a sigmoid-based objective yet remains vulnerable to typographic attacks [8], confirming that the threat extends across the joint vision-language embedding paradigm.

The same embedding alignment that enables open-vocabulary generalization, however, introduces a structural

vulnerability. Because CLIP’s text encoder and vision encoder share a joint embedding space, any text visible within the image can activate text-like features in the vision encoder and **compete** with purely visual evidence for the final similarity score [9]. In embodied settings where the agent receives crop-level RGB inputs for each detected instance, this competition occurs at the scale of individual bounding-box crops, making the classifier sensitive to text that appears anywhere within the crop’s field of view.

B. Typographic Attacks

Typographic attacks exploit CLIP’s joint embedding space by introducing printed text into the physical scene that semantically overrides the model’s visual judgment. The phenomenon was first characterized by Goh et al. [10], who demonstrated that affixing a handwritten label to an object causes CLIP to classify the object as whatever the label says, regardless of its visual appearance, a behavior they described as the model “reading first, looking later.” [10] Mechanistic work has traced this sensitivity to specialized attention heads in the later layers of CLIP’s vision encoder, where typographic tokens are transferred to the class token before the final similarity computation [9]; the vulnerability is structurally encoded in the attention circuit and persists across model sizes.

The practical severity of this vulnerability at scale has been quantified by the SCAM benchmark [8], the largest real-world typographic attack dataset to date, which evaluated 99 vision-language models and found an average accuracy drop of 26% under typographic attack. SCAM also establishes that synthetic attacks closely mirror real-world handwritten ones, directly motivating the use of physical stickers as the attack medium in our evaluation. SceneTAP [11] extended the attack surface further by using an LLM-driven planner to generate scene-coherent adversarial text placed at locations most likely to deceive the model while remaining visually natural to human observers, and successfully misled state-of-the-art vision-language models even when deployed in physical environments.

C. Household Robot Manipulation

Household robots perform pick-and-place tasks in unstructured indoor environments, navigating to a goal object specified by a free-form text prompt, grasping it, and delivering it to a target receptacle. A single execution of this task is called an episode, which instantiates a specific scene, goal object, and agent starting pose. Modular manipulation agents typically combine an open-vocabulary object detector, a persistent 3D semantic map, and a finite-state task planner to execute these tasks. Evaluating attacks in this setting requires a simulation platform that supports open-vocabulary perception, 3D semantic mapping, and physical manipulation in residential scenes. The platform used in this work and how CLIP is introduced as the attack-exposed classifier within it are described in Section VI.

III. RELATED WORK

A. Embodied AI Architectures and VLA Models

Early domestic robotics platforms follow a modular Sense-Plan-Act paradigm in which perception, mapping, planning, and execution are distinct components [14], introducing integration boundaries that silently amplify perceptual errors through the pipeline. The field has moved rapidly toward unified VLA models that collapse this stack into a single end-to-end network [6], [15]. These architectures inherit the semantic richness of large-scale vision-language pretraining but also inherit its vulnerabilities: adversarial perturbations that previously affected only classification can now directly influence motor outputs, collapsing the safety margins that modularity once provided.

B. Typographic and Adversarial Attacks on Robotic Stacks

Typographic attacks on CLIP were first characterized by Goh et al. [10] and quantified at scale by SCAM, which found an average accuracy drop of 26 percentage points across 99 vision-language models. SceneTAP [11] extended this to physical environments using LLM-driven scene-coherent adversarial text. The broader VLA attack landscape reveals additional threat dimensions: adversarial patches can reduce task success to zero [16], Tex3D [17] achieves failure rates of up to 96.7% via optimized 3D textures, and FreezeVLA [18] introduces action-freezing attacks that render agents persistently unresponsive. CHAI [19] extends typographic attacks into fully embodied 3D settings by jointly optimizing the semantic content and perceptual appearance of injected text signs against Large Vision-Language Model (LVLM)-driven navigation agents, including autonomous drones and ground vehicles, achieving attack success rates above 87% in real-world robotic experiments. On the supply-chain side, Trojan-Robot [20] and LoRATK [21] demonstrate backdoor injection through modular policy components and LoRA adapters respectively.

C. Defenses

Defense-Prefix [22] mitigates typographic attacks by prepending a learned token to each class name in CLIP’s text encoder, hardening the prompt against typographic interference without modifying model parameters. Dyslexify [9] takes a more mechanistic approach, identifying and ablating the small set of attention heads in CLIP’s vision encoder that causally transmit typographic information to the class token, producing a model that resists typographic attacks without any retraining. Both methods reduce but do not eliminate typographic misclassifications. Fully eliminating the vulnerability at the encoder level in CLIP and its successors such as SigLIP remains an open problem.

IV. MOTIVATION: THE MANIPULATION DOMAIN GAP

Typographic attack research has expanded significantly in scope, from static 2D benchmarks such as SCAM [8] and SceneTAP [11] that measure misclassification rates on fixed

image datasets, to embodied 3D settings: CHAI [19] evaluates physical-world typographic attacks against LVLM-driven navigation agents including autonomous drones and ground vehicles, and Tex3D [17] targets VLA models through adversarial 3D object textures. Despite this breadth, one setting has received no coverage: household robot manipulation, where the agent must navigate a furnished indoor environment, identify and grasp a goal object from among household distractors, and place it at a target receptacle. This gap exists for three reasons that are specific to the manipulation domain.

Reason 1: Navigation and driving agents measure decision-level outputs; In contrast, manipulation agents expose a distinct, propagating failure mode. CHAI and related 3D attack works measure whether an agent issues a wrong high-level command, such as landing on an unsafe rooftop or proceeding through a crosswalk. In a household robot manipulation pipeline, the failure is different in kind. A typographic misclassification at the object-classification stage is written into a persistent semantic voxel map and propagated with opaque persistence through all downstream Sense-Plan-Act cycles. The agent navigates to the wrong target, attempts to grasp it, and physically picks it up, committing a kinetic error that is not a decision about where to go but about what object now exists in the robot’s gripper. No prior 3D attack evaluation tracks this class of failure.

Reason 2: Household object classification involves dense, cluttered scenes that are structurally different from navigation targets. Navigation and driving attacks operate in scenes where the adversarial target is a landmark, a rooftop, or a vehicle; these are spatially prominent and typically occupy a large portion of the agent’s field of view. Household robot manipulation requires distinguishing among many small, visually similar household objects, such as cups, bottles, and containers, that share category-level features. Adversarial stickers placed on one distractor must compete against multiple plausible candidates in the same crop-level view passed to CLIP, making the attack surface and the conditions for misclassification accumulation structurally distinct from anything evaluated in prior 3D work.

Reason 3: The pick-and-place outcome requires a manipulation platform that no existing 3D attack benchmark provides. CHAI evaluates against navigation and flight agents. Tex3D targets end-to-end VLA models but does not evaluate the full Sense-Plan-Act loop of a modular manipulation agent in a residential setting. The kinetic failure mode central to this work, where a misclassified household object is physically grasped and carried to a receptacle, is only observable in a simulator that couples open-vocabulary perception, 3D semantic mapping, heuristic planning, and snap-based manipulation in a household indoor scene. No existing attack benchmark, 2D or 3D, provides this infrastructure.

Goal of this work. We fill this gap by introducing typographic stickers into a Habitat-based household manipulation simulation and evaluating their effect on a full-stack Home-Robot agent across the complete Sense-Plan-Act loop. Our goal is not to improve attack strength or propose a new attack

method, but to establish that typographic misclassification is a real, measurable, and physically consequential threat in the household robot manipulation setting that the full body of prior typographic attack work, spanning static 2D benchmarks, physical-world VLM evaluations, and 3D navigation agents, has uniformly left unexamined.

V. THREAT MODEL

We consider an adversary who seeks to cause a household manipulation agent to physically pick and deliver the wrong object by placing typographic stickers in the agent’s operating environment. The adversary operates under the following capabilities and constraints.

Adversary capabilities. The adversary has physical access to the household environment and can place printed stickers on flat surfaces along plausible navigation routes, such as tables, chairs, and floors. The sticker bears the goal object label g_τ in printed text. No cyber access to the agent, its sensors, or its software stack is required. The attack is entirely physical and requires no modification to the agent’s hardware or code.

Adversary knowledge. The adversary requires only class-level knowledge of the robot’s operating domain (e.g., common targets like “cups” or “bottles”) rather than episode-specific prompts. A single printed label bearing the goal object name is sufficient to intercept the agent’s perception pipeline. This models a low-resource physical adversary such as an insider or a visitor with brief access to the space.

Attack surface. The attack targets the threshold-gated CLIP override mechanism in the OvmmPerception module. When a sticker bearing g_τ enters a DETIC bounding box crop and drives the cosine similarity score above θ , CLIP overrides DETIC’s semantic label for that instance. The pipeline contains no input sanitization, anomaly detection, or label provenance tracking, making the override fully exploitable through crafted visual text alone.

Persistence via semantic map poisoning. Once the adversarial label is written into the 3D semantic voxel map, it persists across all subsequent timesteps regardless of whether the sticker remains in the agent’s field of view. The voxel map functions as a spatial cache: each voxel at coordinates (x, y, z) stores a semantic label that is written on CLIP override and read by the state machine and FMM planner on every subsequent cycle. A successful typographic override constitutes a cache poisoning attack, where a single malicious write at the perception stage corrupts the agent’s spatial memory and drives all downstream navigation and manipulation decisions toward the wrong object for the remainder of the episode. No defensive mechanism intervenes between the poisoned cache entry and the kinetic outcome.

VI. HOUSEHOLD ROBOT MANIPULATION ENVIRONMENTS

A household robot manipulation task requires an agent to navigate a furnished indoor environment, identify a goal object specified by a free-form natural language prompt, grasp it, and place it at a designated receptacle. Each instantiation of this task is called an episode: a unique combination of a residential

scene, a goal object, and an agent starting pose. Episodes vary across room layouts, object arrangements, and goal categories, making no two evaluation conditions identical.

What distinguishes this setting from navigation-only embodied AI tasks is the combination of dense object clutter, persistent 3D semantic state, and a physical grasping outcome. Navigation agents decide where to go; manipulation agents decide what object to pick up and physically commit to that decision by grasping it. Household scenes contain many small, visually similar objects such as cups, bottles, and containers that share category-level features and occupy the same cluttered surfaces. A perception error in this setting is not a wrong turn but a wrong object in the robot’s gripper, carried through the rest of the task.

This physical commitment creates a distinct challenge for perception-level attacks. A typographic misclassification does not merely alter a navigation decision; it is written into a persistent 3D semantic map and propagated silently through every downstream planning and manipulation step until the task terminates with the wrong object physically placed at the receptacle. No defensive mechanism intervenes between the perceptual error and the kinetic outcome.

Habitat [12] is the simulation platform used in this work, providing photorealistic residential scenes with RGB-D observations, depth-grounded physics, and support for pick-and-place tasks. HomeRobot [14] is the open-vocabulary mobile manipulation benchmark built on Habitat that serves as our experimental platform, providing a pretrained Sense-Plan-Act agent capable of completing the full manipulation loop. The architecture of our modified agent and how CLIP is introduced as the attack-exposed classifier are described in Section VII.

VII. APPROACH

A. Technical Challenges

1) *Physical deployment and agent training from scratch are jointly infeasible for attack evaluation.* Deploying a physical manipulation platform across multiple furnished evaluation rooms carries financial and spatial overhead that exceeds typical academic resources. Training a manipulation agent from scratch solely for attack evaluation is similarly prohibitive, and would yield a model of unverified task competence whose failures could not be cleanly attributed to the adversarial perturbation.

2) *The pretrained agent succeeds on only a limited subset of available episodes.* The HomeRobot validation set contains 1,199 episodes spanning diverse scenes and goal categories, but the pretrained agent completes the full pick-and-place loop in only a small fraction of them. Evaluating attacks across the full set would conflate pre-existing agent failures with attack-induced ones, making it impossible to isolate the typographic perturbation as the cause of any observed deviation.

3) *The HomeRobot agent relies on DETIC for object detection, which does not expose CLIP to typographic attacks.* In the unmodified HomeRobot stack, DETIC handles both spatial proposal generation and semantic labeling. Because DETIC does not use a joint vision-language embedding, it

is not susceptible to typographic cues. Evaluating typographic attacks against this architecture would produce a null result by construction, independent of whether the vulnerability exists in the broader class of open-vocabulary agents we aim to model.

B. Addressing Challenge 1

An intuitive approach would be to deploy a physical robot in a household environment and observe its behavior when adversarial stickers are introduced. This is infeasible for two reasons. First, the financial and spatial overhead of obtaining a manipulation platform and configuring multiple furnished evaluation rooms exceeds typical academic resources; this is precisely the motivation behind sim-to-real frameworks such as Habitat [12] and RoboTHOR [13]. Second, training an embodied agent from scratch solely for attack evaluation is prohibitively time-consuming and would produce a model whose task competence is unverified. We therefore build on HomeRobot [14] within Habitat, which provides a pretrained agent that already succeeds at pick-and-place navigation, allowing us to introduce typographic attacks directly against a capable agent without incurring the overhead of environment construction or agent training.

C. Addressing Challenge 2

A naive approach would be to evaluate typographic attacks across all 1,199 episodes in the HomeRobot validation set. This is problematic because any observed failure must be attributable solely to the adversarial sticker, not to pre-existing limitations of the agent. Evaluating on episodes where the agent already fails without any attack present would introduce confounds that undermine the validity of the results. We therefore restrict evaluation to the subset of episodes where the unattacked agent either succeeds fully or fails only at the final placement step, ensuring that any deviation from pre-attack behavior under attack can be cleanly attributed to the typographic perturbation. Out of the full 1,199 episodes, the pretrained agent succeeds completely in only 10 and partially in 49, leaving a constrained but unambiguous pool of valid evaluation candidates. The full episode characterization and formal definitions are presented in Section IX as part of RQ1.

D. Addressing Challenge 3

Since our work targets typographic attacks against CLIP specifically, retaining Detecting Twenty-thousand Classes using Image-level Supervision (DETIC) [23] as the sole classifier would not expose the vulnerability under investigation. Fully replacing DETIC with CLIP is equally problematic: CLIP is a vision-language encoder that produces scalar text-image similarity scores and is not designed to generate spatial proposals or segmentation masks, so a full swap would leave the navigation stack without the geometric grounding it requires. We therefore introduce CLIP as a parallel goal-scoring layer inside the OvmmPerception module, running alongside DETIC, which is kept for spatial proposal generation and mask prediction. This decoupled design makes CLIP solely responsible for the final object classification

decision and directly exposes it to adversarial typographic stickers placed in the scene. It is important to note that the unmodified HomeRobot agent relies solely on DETIC, which is not vulnerable to typographic cues. We intentionally introduce the CLIP-based override to represent the architecture of modern open-vocabulary VLA agents such as EmbCLIP [3] and SigLIP-based systems [6], which rely on joint vision-language embeddings for object classification. HomeRobot was selected as the evaluation platform because it is the only open-source, simulation-available benchmark designed for open-vocabulary mobile manipulation; alternative agents using CLIP or SigLIP are either restricted to object navigation, closed-source, or unavailable in simulation, making controlled full-stack evaluation infeasible on those platforms. We acknowledge that the unmodified HomeRobot agent uses DETIC alone and is not natively vulnerable to typographic attacks. Introducing CLIP as a parallel classification layer is an intentional architectural choice whose representativeness warrants direct justification. To ensure external validity, we first confirmed the typographic vulnerability on the third-party EmbCLIP agent, achieving successful misclassification in its native object navigation tasks. While EmbCLIP is restricted to navigation, we utilize our modified HomeRobot stack as a **functional proxy** to evaluate how this confirmed vulnerability propagates through a full manipulation loop. Our decoupled architecture is an intentional choice to model the classification patterns of deployed open-vocabulary systems in a controllable form that allows us to measure downstream kinetic failures across the full Sense-Plan-Act loop.

The resulting system implements a Sense-Plan-Act loop across three tightly coupled components: a modified OvmmPerception module, a 3D Semantic Voxel Map, and a heuristic finite-state machine. Fig. 1 illustrates how these components interact and where the attack surface sits within the pipeline.

OvmmPerception serves as the system’s perception front-end and constitutes the primary attack surface. In the unmodified HomeRobot agent, a unified DETIC component handles both spatial proposal generation and semantic labeling. Our architecture decouples these two responsibilities: DETIC is retained exclusively for spatial grounding, while a frozen CLIP encoder is introduced as the sole final object identifier through a threshold-gated override mechanism. This separation ensures that the effects of a typographic attack can be precisely localized to the CLIP classification stage.

DETIC processes each RGB-D frame to produce per-instance bounding boxes, segmentation masks, and depth-grounded coordinates. Its preliminary semantic labels are forwarded to the override stage but are discarded whenever CLIP’s confidence exceeds the classification threshold $\theta = 0.28$. Critically, only the semantic label is overridden: the bounding box, segmentation mask, and depth coordinates produced by DETIC remain intact and are passed to the voxel map for backprojection and to the FMM planner for collision-free navigation, ensuring that geometric grounding is preserved regardless of whether an adversarial override occurs.

Frozen CLIP encoder. For each DETIC-detected instance,

the frozen CLIP encoder computes a text-image cosine similarity score between an RGB crop of that instance and the natural-language goal prompt. If the highest-scoring instance exceeds θ , CLIP overrides DETIC’s label and designates that instance as the goal object. An adversary exploits this by attaching a typographic sticker whose text aligns with the goal prompt to a distractor object, driving its similarity score above θ . Because the pipeline contains no input sanitization or anomaly detection, the override is fully exploitable through crafted visual text alone.

3D Semantic Voxel Map. The voxel map maintains persistent spatial memory by backprojecting relabeled instance masks and depth readings into a global voxel grid at 5 cm resolution, as configured in the HomeRobot agent [14]. A misclassification written into map state persists across timesteps: the agent may continue navigating toward an adversarially labeled distractor even after the sticker has left its field of view, amplifying the attack beyond the adversary’s window of visual influence.

From a security perspective, the voxel map functions as a spatial cache that maps voxel coordinates $(x, y, z) \in \mathbb{R}^3$ to semantic labels. A label is written on CLIP override and subsequently read by the state machine and FMM planner on every downstream cycle without re-verification. A successful typographic override therefore constitutes a cache poisoning attack: a single malicious write at the Override Relabeling stage (shown in red in Fig. 1) corrupts the agent’s spatial memory, a form of semantic state corruption where the robot’s fundamental understanding of which object exists at a given location is replaced with adversarially injected information. This drives all subsequent navigation and manipulation decisions toward the wrong object for the remainder of the episode, regardless of whether the physical sticker remains visible. In several episodes, this persistence was directly observable: the agent scored the adversarial sticker above θ on first observation, writing the poisoned label into the voxel map, then continued exploring the scene for several seconds before returning to pick the sticker. The pick was driven entirely by the cached map entry rather than any fresh visual observation, confirming that a single override event is sufficient to commit the agent to the wrong object across subsequent planning cycles.

Heuristic finite-state machine. The state machine drives task execution through four states: *Navigate to Object*, *Pick*, *Navigate to Receptacle*, and *Place*. It queries the voxel map for the current target and dispatches commands through two distinct paths. Navigation sub-goals are forwarded to the Act module, where the Fast Marching Method (FMM) computes collision-free paths on a 2D occupancy map and issues discrete *Move* and *Turn* actions to the simulator. Manipulation actions (*Pick* and *Place*) bypass Act entirely, issuing snap-based API calls directly to Habitat, which resolves them by proximity check without modeling contact physics. A misclassification propagates through both paths: the agent navigates to the wrong target via Act, then issues a *Pick* call for it, constituting the observable task failure used as the primary attack outcome

in our evaluation.

VIII. EVALUATION SETUP

A. Research Questions

We structure our evaluation around five research questions that together characterize the effectiveness, mechanism, limits, and pipeline-level consequences of typographic attacks in household robot manipulation.

RQ1: What does the full 1,199-episode validation set consist of, and which episodes are attributable for attack evaluation?

RQ2: Can a typographic sticker placed in a household scene cause a capable manipulation agent to pick the wrong object, and at what rate does this occur across a controlled evaluation pool?

RQ3: Through what mechanism does a successful attack operate: is the misclassification driven primarily by the target sticker or by background text captured incidentally in DETIC’s bounding box crops?

RQ4: Under what conditions does the attack fail, and can perceptual factors such as viewing angle, occlusion, or crop visibility naturally bound its reach without any defensive intervention?

RQ5: Does the attack shift the phase at which task failure occurs, and can it drive the agent to mechanical task completion with the wrong object?

B. Attack Configuration

Each episode $\tau \in \mathcal{E}^*$ is evaluated under a standardized two-item configuration: the actual goal object g_τ is present in the scene as usual, and one typographic sticker bearing the goal object name g_τ is placed on a flat surface along the agent’s expected navigation path, closer to the agent’s starting position than the actual goal object. This ensures the agent encounters and scores the sticker before ever observing the legitimate target, giving the typographic cue the first opportunity to poison the voxel map.

Sticker placement was designed to maximize visibility: stickers were positioned on surfaces at heights consistent with the agent’s camera field of view, on unobstructed faces, and oriented toward the expected approach direction. This placement strategy reflects a realistic threat model in which an adversary with partial knowledge of the environment can position a single typographic cue to intercept the agent’s perception pipeline prior to any observation of the legitimate target.

Threshold selection. The classification threshold θ is set to 0.28. To determine this value, we inspected CLIP’s cosine similarity score distribution across all detected instances in a representative set of episodes without any attack present. Non-goal objects consistently scored between 0.17 and 0.25, with semantically similar distractors approaching the upper end of this range. The true goal object, when visible to the agent, scored between 0.28 and 0.30. We therefore set $\theta = 0.28$ to sit above the distractor range while remaining within the goal object’s observed scoring range, ensuring that only

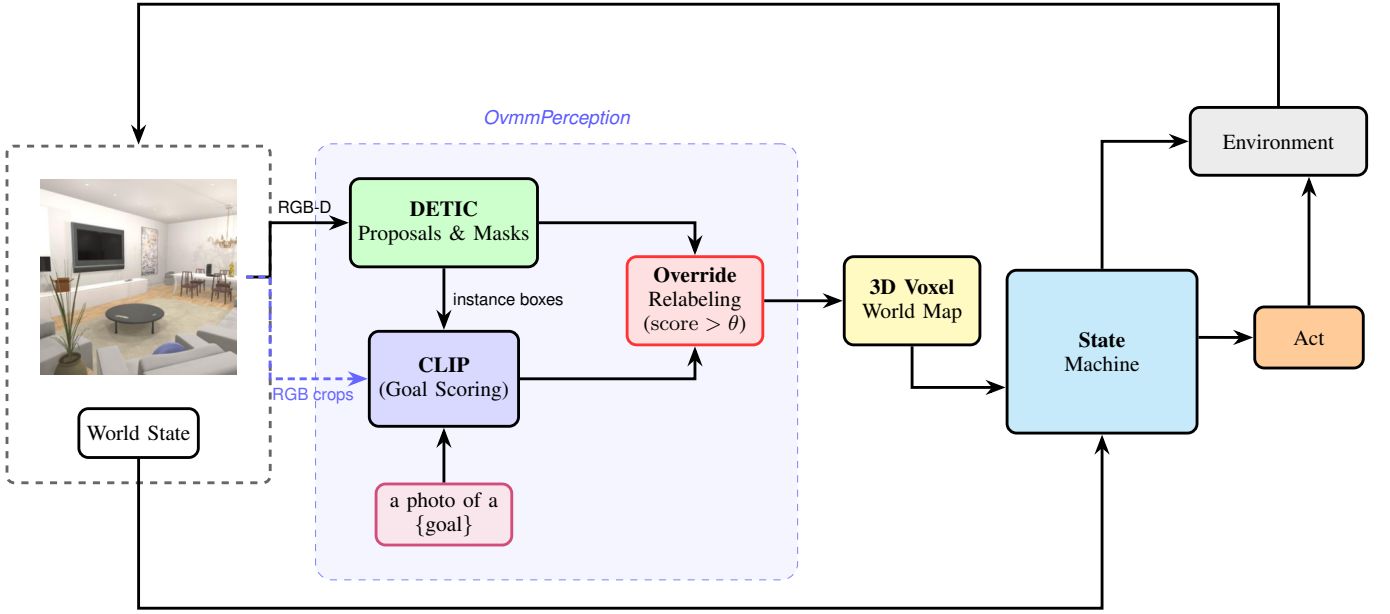


Fig. 1. Architecture of the modified HomeRobot agent. DETIC (green) handles spatial proposals and geometry; a frozen CLIP encoder (blue) serves as the sole object classifier through a threshold-gated override mechanism (red), making it the direct target of typographic attacks.

instances whose text-image similarity is consistent with the goal prompt g_τ trigger an override of DETIC’s label. Raising θ above 0.28 begins excluding valid goal object detections: at $\theta = 0.30$, no instance would ever exceed the threshold and the override mechanism would never trigger, making goal object identification impossible. Lowering θ below 0.28 pulls non-goal objects into the override range: below 0.25, semantically similar distractors begin triggering false overrides, and below 0.17 the threshold is so permissive that essentially any detected object would be misclassified as the goal regardless of its visual or semantic content. The two observed scoring ranges, 0.17 to 0.25 for non-goal objects and 0.28 to 0.30 for goal objects, have zero overlap. $\theta = 0.28$ sits at the boundary of this gap, above the distractor ceiling and within the goal object’s range, making it the optimal choice given the observed score distributions. A system designer aware of typographic attacks cannot harden the threshold by raising it above 0.28 without sacrificing legitimate goal detection: since the true goal object scores at most 0.30, any threshold above this range causes the agent to fail its primary task entirely. Furthermore, an adversarial sticker cannot be made to score arbitrarily higher than the goal object, since the goal object label g_τ and the sticker text are semantically identical, producing comparable cosine similarity scores under the same CLIP encoder. The vulnerability is therefore structural: the threshold that enables open-vocabulary goal identification is the same threshold that the attack exploits.

To characterize sensitivity to threshold selection, Table I summarizes the behavioral consequences of varying θ across the observed score range. Because the non-goal score range (0.17-0.25) and goal object score range (0.28-0.30) are non-overlapping, the viable range for θ is structurally constrained

to the gap between them.

TABLE I
BEHAVIORAL CONSEQUENCES OF VARYING THE CLASSIFICATION THRESHOLD θ ACROSS THE OBSERVED CLIP COSINE SIMILARITY SCORE RANGES.

θ	Override behavior	Consequence
< 0.17	All detected objects trigger override	Goal identification collapses; any object becomes goal
0.17-0.25	Non-goal distractors trigger override	Systematic false positives even without stickers
0.28	Only goal-range instances trigger override	Intended operating point
0.30	Upper bound of goal object range	Override barely fires; misses most goal detections
> 0.30	No observed score exceeds threshold	CLIP override never activates; goal identification impossible

This sweep confirms that $\theta = 0.28$ is not an arbitrary choice but the unique viable point given the observed score distributions. A system designer cannot raise it above 0.28 without losing valid goal detections, and cannot lower it below 0.28 without inducing false overrides on clean distractor objects. The attack exploits this structural constraint: an adversarial sticker bearing g_τ produces a similarity score in the same 0.28-0.30 range as the legitimate goal object, because both scores arise from CLIP comparing the same text string g_τ

against image evidence. No threshold value admits legitimate goal detections while excluding adversarial ones.

IX. RESULTS

A. RQ1: Episode Characterization and Attributability

The full HomeRobot validation set $\mathcal{E}$ consists of 1,199 episodes spanning diverse residential scenes with varying goal objects and room configurations. We define an episode $\tau \in \mathcal{E}$ as *fully successful*, $\tau \in \mathcal{E}_f^*$, if the unattacked agent completes all four phases: object navigation, pick, receptacle navigation, and place. We define τ as *partially successful*, $\tau \in \mathcal{E}_p^*$, if the agent completes object navigation, pick, and receptacle navigation but fails only at the final place step. All remaining episodes are filtered for attributability, as failures in those cases cannot be unambiguously attributed to the adversarial sticker. Evaluating on these episodes would produce false negatives regarding the attack’s perceptual effectiveness, since any observed failure could reflect pre-existing agent limitations rather than the typographic perturbation. Our evaluation pool is then $\mathcal{E}^* = \mathcal{E}_f^* \cup \mathcal{E}_p^* \subset \mathcal{E}$, where $|\mathcal{E}_f^*| = 10$, $|\mathcal{E}_p^*| = 49$, and $|\mathcal{E}^*| = 59$. Fig. 2 shows the phase-level failure distribution across all 1,199 episodes.

The dominant failure mode is *Object Navigation*, accounting for 860 episodes (71.7%). In these episodes the agent fails to locate the goal object entirely, meaning no pick attempt is ever made. Introducing a typographic sticker into such an episode produces no attributable result: the agent may still fail to navigate to the sticker for the same perceptual and navigational reasons it failed to find the goal object, making it impossible to isolate the sticker as the cause of any observed failure. The 159 episodes (13.3%) that fail at *Pick* and the 121 episodes (10.1%) that fail at *Receptacle Navigation* are excluded for a related but distinct reason. In these episodes the agent may successfully locate and pick an object, but without completing receptacle navigation and placement, the attack outcome is incomplete: our goal is to demonstrate that a household robot can be made to physically hand or deliver the wrong object to its destination, not merely to pick it. An episode that terminates before the full pick-and-place loop completes does not exhibit the kinetic failure mode central to this work, where a misclassified object travels through the entire pipeline and ends up in the wrong place, an outcome that most directly reflects the real-world risk of a robot handing a user the wrong, and potentially harmful, object.

The 49 episodes (4.1%) that fail only at *Place* are retained. In these episodes the agent successfully navigates to the goal object region, identifies and picks an object, and navigates to the receptacle, failing only at the final placement step. Because the agent has already demonstrated it can complete every upstream phase, any change in what object it picks under attack is directly attributable to the typographic perturbation rather than to pre-existing agent limitations. The 10 episodes (0.8%) in which the agent completes all four phases successfully are retained for the same reason and represent the strongest attributability condition.

The resulting pool of 59 episodes is the exhaustive set of HomeRobot validation episodes satisfying the attributability requirement. It is not a sample drawn from a larger population: every episode in $\mathcal{E}$ was inspected, and the 59 retained are the complete set where pre-existing agent failure cannot confound the attack outcome. A larger pool could be produced by relaxing the attributability criterion, but doing so would reintroduce confounds that make it impossible to isolate the typographic perturbation as the cause of any observed deviation. Within this pool the attack success rate is an exact figure rather than an estimate of a broader population parameter.

B. RQ2: Attack Performance

Of the 1,199 episodes in $\mathcal{E}$, 59 meet the attributability criterion established in RQ1 and form the evaluation pool $\mathcal{E}^*$ for this and all subsequent RQs. We evaluate the attack across these 59 episodes using Attack Success Rate (ASR), defined as the fraction of episodes in which the agent picks an object other than the goal object g_τ . Formally:

$$\text{ASR}(\mathcal{E}_f^*) = \frac{7}{10} = 0.70 \quad (1)$$

$$\text{ASR}(\mathcal{E}_p^*) = \frac{33}{49} \approx 0.673 \quad (2)$$

$$\text{ASR}(\mathcal{E}^*) = \frac{40}{59} \approx 0.678 \quad (3)$$

Table II summarizes the attack outcomes across $\mathcal{E}^*$. The attack achieves an overall ASR of 67.8% (40/59). Among the 10 fully successful episodes $\mathcal{E}_f^*$, the ASR reaches 70.0% (7/10), and among the 49 partially successful episodes $\mathcal{E}_p^*$, the ASR is 67.3% (33/49).

This result should be interpreted in the context of the evaluation conditions. ASR and accuracy drop measure fundamentally different quantities: ASR is an episode-level binary outcome spanning a full pick-and-place loop, while accuracy drop is an image-level classification delta. No quantitative comparison between them is meaningful, and we do not claim one. For orientation, SCAM [8] reports an average accuracy drop of 26 percentage points across 99 vision-language models under real-world handwritten typographic attacks, with individual model drops ranging from 2.67 to 66.37 percentage points; our 67.8% episode-level ASR reflects a structurally different and harder evaluation condition. Stickers are placed physically in the simulated environment without perceptual optimization, and the agent encounters them under uncontrolled viewing angles, distances, and occlusion that no adversary can fully govern. CHAI [19] targets LVLM-driven embodied agents including autonomous drones and ground vehicles, achieving up to 95.5% ASR on aerial object tracking and above 87% in real-world robotic vehicle experiments by jointly optimizing the semantic content and perceptual appearance of injected visual prompts. Both SCAM and CHAI evaluate attacks under conditions that maximize adversarial text exposure, either through standardized post-it note placement or jointly optimized color, font, and positioning. Our evaluation imposes none of these advantages.

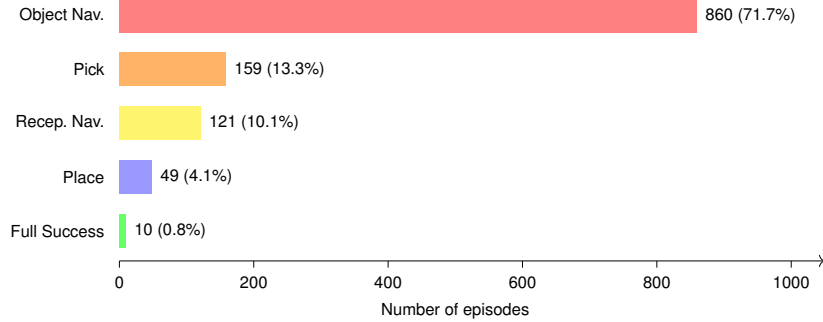


Fig. 2. Pre-attack failure distribution across all 1,199 HomeRobot validation episodes by phase of first failure.

TABLE II
ATTACK SUCCESS RATE ACROSS EVALUATION EPISODES.

Episodes	Total	Attacks	ASR
$\mathcal{E}_f^*$ (fully succ.)	10	7	70.0%
$\mathcal{E}_p^*$ (partially succ.)	49	33	67.3%
Combined $\mathcal{E}^*$	59	40	67.8%

C. RQ3: Attack Mechanism Breakdown

To address RQ3 we analyze the 40 successful attacks from $\mathcal{E}^*$. Of these, 37/40 (92.5%) resulted in the agent picking the primary malicious sticker directly, and 3/40 (7.5%) resulted in the agent picking the object immediately in front of the malicious sticker. This breakdown confirms that the attack operates primarily through CLIP’s text-image similarity mechanism rather than through incidental scene perturbation.

The 3 cases in which the agent picked the object in front of the malicious sticker are attributable to the sticker being partially occluded behind a distractor object. When DETIC generated a bounding box crop for that distractor, the sticker was visible in the background of the crop. CLIP then classified the crop based on the background typographic sticker rather than the foreground object, scoring it above $\theta = 0.28$ and causing the agent to pick the foreground object as the goal object g_τ . In all three cases the foreground object was a knife. This reflects the background classification failure mode documented in TidyBot, where Wu et al. observe that CLIP classifies background objects as the foreground target rather than restricting its response to the intended subject of the crop, a consequence of CLIP performing classification over the entire input region without spatial attention to object boundaries. In our setting this failure mode is triggered not by a background object but by a background typographic sticker, confirming that the same mechanism extends to adversarially placed text.

To quantify the impact of map poisoning, we analyzed the agent’s behavior during the execution phase. In 100% of successful attacks, the agent proceeded to grasp the adversarial target based on coordinates stored in the 3D Voxel Map. We

observed that the agent often classified the sticker early in the episode, sometimes wandering the scene for several seconds before returning to the poisoned coordinates. Although the sticker was visible in the robot’s field of view at the time of the pick, the agent issued the kinetic command based solely on the cached semantic label. No secondary perceptual check was performed to reconcile the typographic cue with the underlying object geometry, confirming that a single poisoned write to the spatial memory is sufficient to bypass all subsequent safety margins in the loop.

D. RQ4: Failure Attribution

To address RQ4 we examine the 19 unsuccessful attack episodes from $\mathcal{E}^*$. A successful attack in episode τ is defined as any outcome in which the agent picks an object other than the goal object g_τ , including the malicious sticker itself or an object immediately adjacent to the sticker. Of the 19 unsuccessful attack episodes, all produced behavior identical to their pre-attack behavior. The 3 episodes from $\mathcal{E}_f^*$ resulted in correct goal object picks despite the sticker’s presence, and the 16 episodes from $\mathcal{E}_p^*$ failed at placement exactly as in the unattacked agent, with no observable change in navigation or classification behavior.

In all 19 cases, the adversarial sticker had no measurable effect on the agent’s classification decisions at any timestep, indicating that the sticker’s cosine similarity score never exceeded $\theta = 0.28$. The threshold is the single gate through which a typographic attack must pass; when perceptual conditions prevent the sticker from being clearly captured within DETIC’s bounding box crop, CLIP receives insufficient visual evidence of the text to drive the similarity score above θ . Our findings show that viewing angle, occlusion, and crop visibility are the primary factors that naturally bound the attack’s reach without any defensive intervention, a result consistent with the perceptual failure conditions independently identified in CHAI [19]. No mechanism beyond the physical visibility constraints of the scene was responsible for the 19 failures, confirming that the 40 successful attacks represent episodes where those constraints were absent and CLIP’s vulnerability to typographic text was the direct and sole cause of task deviation.

E. RQ5: Pre-Attack vs. Attack Failure Distribution

The phase-level failure distribution shifts markedly once the attack is introduced across $\mathcal{E}^*$. All 40 attack-induced failures are concentrated at the *Place* phase. We distinguish between two kinetic failure modes observed across $\mathcal{E}^*$. The 7 successful attacks from $\mathcal{E}_f^*$ constitute *Hijacked Delivery*: the agent completes the full Sense-Plan-Act loop, picks the adversarial target, navigates to the receptacle, and successfully places it there. These represent the most severe outcome, where the attack drives the pipeline to mechanical completion with the wrong object physically delivered to the destination. The 33 successful attacks from $\mathcal{E}_p^*$ constitute *Malicious Transport*: the agent picks the adversarial target and physically carries it across the household environment to the receptacle, where placement fails as it did in the pre-attack condition. Although placement failure was already present in these episodes, the typographic sticker causes the agent to commit to and transport the wrong object under adversarial direction, representing a persistent kinetic deviation from the user’s intent that is fully attributable to the attack.

This phase-level contrast highlights the core contribution of this work. Pre-attack failures across the full 1,199 episodes are dominated by early-phase breakdowns, with 71.7% of episodes terminating before the agent locates the goal object, reflecting fundamental navigational and perceptual limitations of the unmodified agent. Our evaluation is deliberately scoped to $\mathcal{E}^*$, the 59 episodes where these limitations are absent, in order to isolate the specific failure mode introduced by typographic attacks. Within this pool, the attack does not change which phase fails but what causes the failure: a misclassification committed at the perception stage propagates with kinetic persistence through the voxel map, undetected across navigation and manipulation phases, until the task terminates with the wrong object. This propagation through the full Sense-Plan-Act loop, from perceptual override to physical grasping of an adversarial target, is precisely the kinetic failure mode that no prior typographic attack benchmark, whether static or embodied, has evaluated in a household manipulation context and that this work is designed to expose.

X. DISCUSSION AND ARCHITECTURAL MITIGATIONS

The vulnerability identified here stems from unconditional trust in perceptual overrides that corrupt long-term spatial state. A hardened encoder alone is insufficient: even a classifier that resists typographic attacks most of the time will occasionally be overridden, and a single poisoned voxel map entry commits the agent to the wrong object for the remainder of the episode. We therefore propose three architectural mitigations that target the propagation pathway rather than the classifier.

Multi-View Voxel Confirmation requires a semantic label to be confirmed from k distinct viewing angles or distances before it is committed to persistent map state, preventing a single adversarial crop from poisoning the voxel map.

Geometric-Semantic Anomaly Detection flags instances where a visual crop contains high-contrast printed text via lightweight OCR and treats the resulting joint-embedding

output as an untrusted input requiring secondary validation before any map write occurs.

Grasp-Time Re-Query re-runs the classifier against a fresh crop immediately before issuing a pick action, rather than committing to the cached map state. This breaks the persistence chain at the last actionable point before kinetic commitment.

Each mitigation is implementable without modifying the vision-language encoder and addresses the architectural condition that encoder-level defenses such as Dyslexify [9] and Defense-Prefix [22] leave unresolved.

XI. CONCLUSION

This work establishes that typographic misclassification is a real, measurable, and physically consequential threat in household robot manipulation, achievable by a low-resource physical adversary with nothing more than a printer and brief access to the environment. A single sticker placed along the agent’s navigation path is sufficient to poison the 3D semantic map and drive the full Sense-Plan-Act pipeline to deliver the wrong object to a target receptacle, achieving a 67.8% ASR under uncontrolled physical conditions with no perceptual optimization.

These results carry implications beyond the specific architecture evaluated here. The vulnerability demonstrated in this work is not unique to CLIP: any vision-language encoder that aligns visual and textual representations in a shared embedding space, including SigLIP-based VLA models such as OpenVLA [6] and LVLM-driven agents, inherits the same structural susceptibility to typographic interference [8]. As modular manipulation pipelines increasingly integrate open-vocabulary vision-language classifiers to enable natural language task specification, the attack surface demonstrated here will grow correspondingly. While encoder-level defenses such as Dyslexify [9] and Defense-Prefix [22] reduce misclassification rates at the classifier stage, they do not address the architectural condition that makes the manipulation setting uniquely dangerous. The preceding section proposes three mitigations that target the propagation pathway directly. Treating VLA classifier outputs as untrusted inputs requiring multi-stage validation before kinetic commitment is a necessary architectural principle for securing the next generation of open-vocabulary manipulation agents.

ACKNOWLEDGMENT

The authors would like to thank the anonymous reviewers and the shepherd for their valuable comments and suggestions.

REFERENCES

- [1] R. Krishna et al., “Visual Genome: Connecting language and vision using crowdsourced dense image annotations,” *Int. J. Comput. Vis.*, vol. 123, no. 1, pp. 32–73, 2017.
- [2] A. Radford et al., “Learning transferable visual models from natural language supervision,” in *Proc. ICML*, 2021.
- [3] A. Khandelwal, L. Weihs, R. Mottaghi, and A. Kembhavi, “Simple but effective: CLIP embeddings for embodied AI,” in *Proc. CVPR*, 2022, pp. 14809–14818.
- [4] J. Wu et al., “TidyBot: Personalized robot assistance with large language models,” *Autonomous Robots*, 2023.

- [5] M. Shridhar, L. Manuelli, and D. Fox, “CLIPort: What and where pathways for robotic manipulation,” in *Proc. CoRL*, 2021.
- [6] M. J. Kim et al., “OpenVLA: An open-source vision-language-action model,” arXiv:2406.09246, 2024.
- [7] X. Zhai et al., “Sigmoid loss for language image pre-training,” in *Proc. ICCV*, 2023.
- [8] J. Westerhoff et al., “SCAM: A real-world typographic robustness evaluation for multimodal foundation models,” arXiv:2504.04893, 2025.
- [9] L. Hufe et al., “Dyslexify: A mechanistic defense against typographic attacks in CLIP,” arXiv preprint, 2025.
- [10] G. Goh et al., “Multimodal neurons in artificial neural networks,” *Distill*, 2021. [Online]. Available: <https://distill.pub/2021/multimodal-neurons>
- [11] Y. Cao et al., “SceneTAP: Scene-coherent typographic adversarial planner against vision-language models in real-world environments,” arXiv:2412.00114, 2024.
- [12] M. Savva et al., “Habitat: A platform for embodied AI research,” in *Proc. ICCV*, 2019.
- [13] M. Deitke et al., “RoboTHOR: An open simulation-to-real embodied AI platform,” in *Proc. CVPR*, 2020.
- [14] A. Yenamandra et al., “HomeRobot: Open-vocabulary mobile manipulation,” in *Proc. CoRL*, 2023.
- [15] B. Zitkovich et al., “RT-2: Vision-language-action models transfer web knowledge to robotic control,” in *Proc. CoRL*, 2023.
- [16] T. Wang et al., “Exploring the adversarial vulnerabilities of vision-language-action models in robotics,” in *Proc. ICCV*, 2025.
- [17] J. Chen et al., “Tex3D: Objects as attack surfaces via adversarial 3D textures for vision-language-action models,” arXiv:2604.01618, 2025.
- [18] X. Wang et al., “FreezeVLA: Action-freezing attacks against vision-language-action models,” arXiv:2509.19870, 2025.
- [19] L. Burbano et al., “CHAI: Command hijacking against embodied AI,” in *Proc. IEEE SaTML*, 2026.
- [20] X. Wang et al., “Robot collapse: Supply chain backdoor attacks against VLM-based robotic manipulation,” arXiv:2411.11683, 2024.
- [21] H. Liu et al., “LoRATK: LoRA once, backdoor everywhere in the share-and-play ecosystem,” in *Proc. EMNLP Findings*, 2025.
- [22] H. Azuma and Y. Matsui, “Defense-Prefix for preventing typographic attacks on CLIP,” in *Proc. ICCVW*, 2023, pp. 3646–3655.
- [23] X. Zhou et al., “Detecting twenty-thousand classes using image-level supervision,” in *Proc. ECCV*, 2022.