Nowrosjee Wadia College

T.Y.B.Sc (Computer Science) Project

Academic Year 2020-2021

TOPIC: BAKERY ONLINE SHOP MANAGEMENT.

NAME : <u>SONU CHAUDHARY.</u>

ROLL NO : 12.

CLASS : T.Y.BSc(Computer Science).

DIV : <u>A.</u>

DEVELOPED BY:

GROUP NO: 13

- 1) 18 AKANKSHA DESHPANDE.
- 2) 12 SONU CHAUDARY.
- 3) 14 SAURABH CHOUDHARI.

Synopsis

Description:

- The main aim of this system is to handle the bakery shop in an efficient way.
- The system takes into account the transactions between customers and the shop, customer records, availability of products and much more.

Existing System:

- a) System Title: BAKERY SHOP MANAGEMENT SYSTEM
- **b) Software Used:** NONE(MANUAL SYSTEM)
- c) Platform Used: NONE
- d) Database Used: NONE {REGISTRATION BOOK)
- e) Features:
 - 1) The customers go to the shop and places order at the counter.

- 2) The staff keeps the count of orders and enters it into the register.
- 3) The prepared order is given to the customer based on the sequence in which the staff remembers.
- 4) The payment done by the customer is then entered into the register by a staff member/worker.

f) Drawbacks:

- 1) <u>Customers must visit bakery shop to buy the products unless and until the order amount is more than the shop's fixed amount for delivery.</u>
- 2) <u>Miscommunication between staff and customers</u> <u>happen often.</u>
- 3) Most of the times the bakery product isn't available in the bakery so the customer has to visit another bakery.
 i.e. there is no guarantee for availability of product.

4) The existing system is time consuming due to manual calculation.

Need for new system:

a) Software required: <u>HTML/CSS,PHP7</u>

b) Platform: WINDOWS XP and above

c) Tools or IDE: 1) VS CODE

2) XAMPP

3) GOOGLE CHROME BROWSER

d) Database: POSTGRESQL

e) File System required: Yes

f) Reasons for selecting this system:

1) It is not possible for people to visit bakery often.

- 2) The staff at a time may not keep a count of orders as well as mistakes may happen regarding the same.
- 3) If there are lots of customers in the shop some may feel ignored i.e. no customer satisfaction.
- 4) Staff also gets irritated by the customer's continuous demand for their order even before estimated duration which was told.

g) Features:

- 1) <u>User Registration: User can register on the system and get his online account on site.</u>
- 2) <u>User Login: User can login to system and check various bakery items.</u>
- 3) <u>Product Categories: The bakery products are arranged and can be viewed in categories.</u>
- 4) Add to Cart: Users can add new items to cart.

- 5) <u>Custom Cake: User may order a custom cake as per his needed flavor, size and shape on site.</u>
- 6) <u>Card Payment: After total bill is calculated user can pay with any type of card online.</u>
- 7) <u>Confirmation: On successful payment a thank-you message is sent to user.</u>
- 8) Online tracking: Users get an OTP which can be used at the time of receiving the order.

h) Types of End Users:

- 1) Customers
- 2) Manager

Feasibility Study

Technical Feasibility:

The technical feasibility focuses on existing computer hardware and software.

This includes evaluating, estimating, the need of more hardware and software.

As far as hardware and software are concerned, the propose system is completely liable with proper backup and security.

In our system we are using normal hardware rather than using any special type of hardware.

We are using open source software such as Xampp for PHP which is backend, HTML/CSS for frontend and PLPGSQL as database.

These being open source, the software is much cheaper.

Economical Feasibility:

This is the most frequently used method for evaluating of the proposed system.

The cost of hardware and software is affordable.

Easy and cheap maintenance of proposed system is possible.

In this system user will not require any special type of training, as this system consists of open software.

Here user can operate the proposed system without waste of time.

Operational Feasibility:

The system should be comfortable for the user to be used.


The GUI should be user friendly so that user can use it easily.

We follow the standard for Designing the UI, hence it will be easy for navigation of user.


Self-explanatory user manual will be provided hence no specialized training required.

Behavioral Models

1. Sequence Diagram :

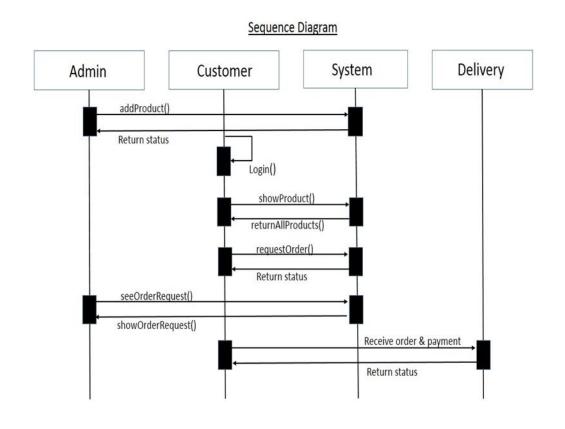

2. Class Diagram:

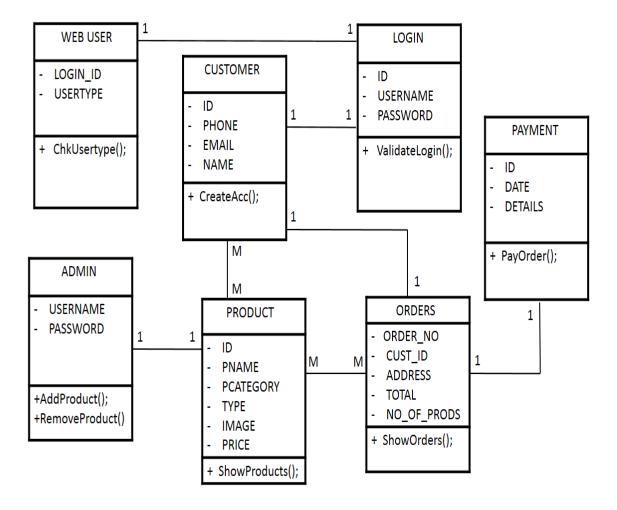

Database/File Design Form

Database name: <u>POSTGRES</u>

Relationship between tables:

Table1	Relationship	Table2
1) Web User	<u>1:1</u>	<u>Login</u>
2) Order	M:M	<u>Product</u>
3) <u>Customer</u>	<u>1:1</u>	<u>Order</u>
4) <u>Customer</u>	M:M	<u>Product</u>
7) <u>Customer</u>	<u>1:1</u>	<u>Login</u>
8) <u>Order</u>	<u>1:1</u>	<u>Payment</u>

Table name: Login

Field name	Field type	Description
1) <u>Lid</u>	<u>Integer</u>	Unique Login Id.
2) <u>Username</u>	<u>String</u>	Name given by user
3) <u>Password</u>	<u>String</u>	User password.

Table name: Web User

Field name	Field type	Description
1) <u>Lid</u>	<u>Integer</u>	Login Id.
2) <u>UserType</u>	<u>String</u>	Admin/Customer.

Table name: Product

Field name	Field type	Description
1)ProductId	<u>Integer</u>	Product Id.
2) <u>Name</u>	String	<u>ProductName</u>
3) <u>Category</u>	String	ProductCategory.
4) <u>Type</u>	String	Veg/Non-Veg
5) <u>Image</u>	String	Product Image.
6) <u>Price</u>	<u>Float</u>	Price.

Table name : Cart (3rd Table of Customer and Product)

Field name	Field type	Description
1) <u>CustomerId</u>	<u>Integer</u>	Id of customer.
2) <u>PID</u>	<u>Integer</u>	Id of Product.

3) Quantity Integer Number of products.

4) Weight Float Applicable for Cakes

5) <u>Status</u> <u>Bool</u> <u>Product order state.</u>

6) Price Float Weight changed price.

Table name: Order

Field name	Field type	Description
1) <u>OrderNo</u>	<u>Integer</u>	Order number.
2) <u>CID</u>	<u>Integer</u>	Customer's id.
3) <u>Address</u>	String	Customer address.
4) <u>Total</u>	<u>Float</u>	Payment.
5) <u>Pno</u>	<u>Integer</u>	No. of products

Table name: <u>Customer</u>

Field name	Field type	Description
1) <u>CustomerId</u>	String	Customer's id.
2) <u>Phone</u>	<u>String</u>	Phone number.
3) <u>Email</u>	String	Email Id.
4) <u>Name</u>	String	Customer name.

Table name: Order-Product

Field name	Field type	Description
1) <u>Oid</u>	<u>Integer</u>	Order Id.
2) <u>Pid</u>	<u>Integer</u>	Product ordered.
3) <u>Status</u>	String	Payment Status.

Table name: <u>Payment</u>

Field name	Field type	Description
1)PaymentId	String	Payment id.
2)PaidDate	<u>Date</u>	Payment date.
3) <u>Details</u>	String	Payment details.
4) <u>OrderNo</u>	<u>Integer</u>	Order number.
5) <u>FullName</u>	String	Receiver's name.
6) <u>Pin</u>	<u>String</u>	Pin for delivery.
7) <u>Landmark</u>	String	Common Place.
8)Phone	String	Receiver number

Screen Design Form


CUSTOMER SIDE:

(1)


Screen name: **CUSTOMER HOME PAGE.**

Screen Input: HOME, MENU, ABOUT US, MAP, CONTACT, LOGIN.

Screen Output: HOME, MENU, ABOUT US, MAP, CONTACT, LOGIN.

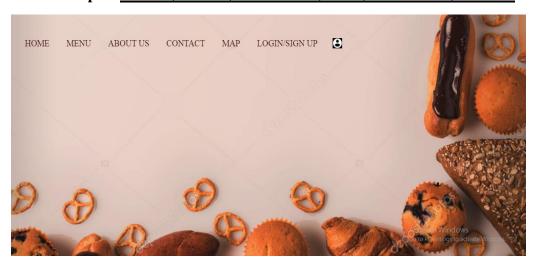


In Tabular Form:



Screen name: MAP PAGE.

Screen Input: MENU, ABOUTUS, CONTACT, MAP, LOGIN/SIGN UP.

Screen Output: **DISPLAY SHOP ON MAP.**

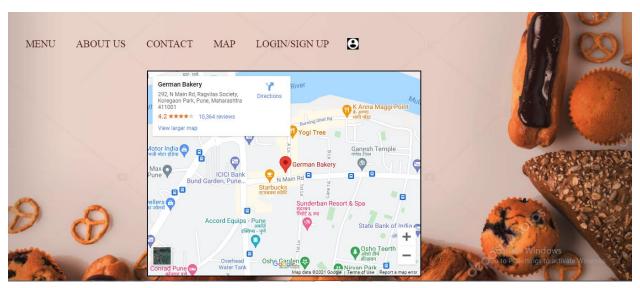

(3)

Screen name: <u>CUPCAKES PAGE.</u>

Screen Input: <u>CATEGORY, HOME, CART, MAP, ABOUTUS.</u>

Screen Output: <u>DISPLAY PRODUCTS IN CATEGORY FORM.</u>




(4)

Screen name: LOGIN.

Screen Input: <u>USERNAME</u>, <u>PASSWORD</u>.

Screen Output: <u>SUCCESSFUL LOGIN.</u>

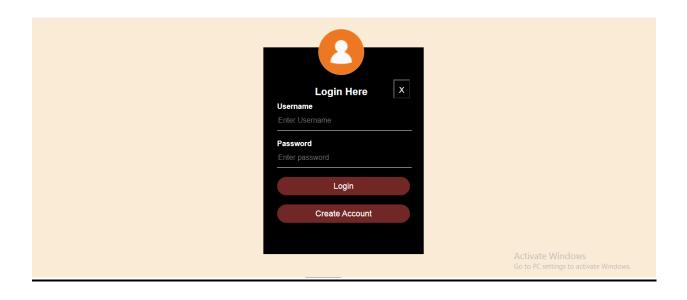


(5)

Screen name: **CART PAGE.**

Screen Input: <u>HOME, CATEGORY, ABOUTUS, CONTACT, CART.</u>

Screen Output: <u>ITEM, IMAGE, QUANTITY, WEIGHT, PRICE.</u>



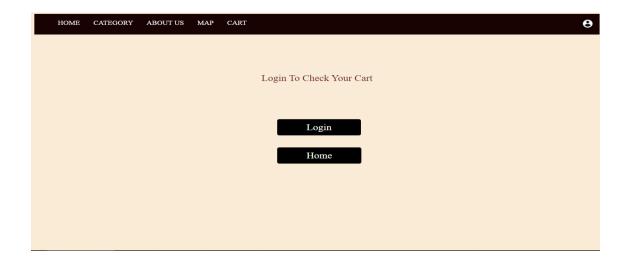

(6)

Screen Name: <u>CATEGORY PAGE.</u>

Screen Input: <u>CAKES,CUPCAKES,PASTRY,SNACKS,COOKIES,BREADS.</u>

Screen Output: <u>CATERGORY OF PRODUCTS DISPLAYED.</u>




(7)

Screen Name: **BREADS PAGE.**

Screen Input: <u>CATEGORY</u>, <u>HOME</u>, <u>CART</u>, <u>MAP</u>, <u>ABOUTUS</u>.

Screen Output: <u>DISPLAY PRODUCTS IN CATEGORY FORM.</u>

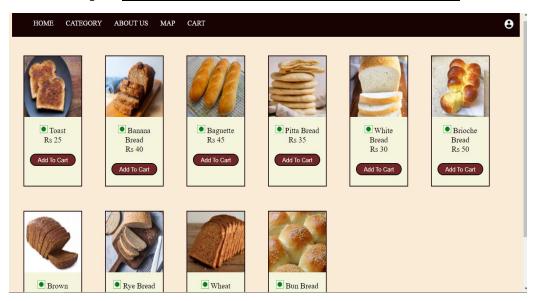


(8)

Screen Name: CAKES PAGE.

Screen Input: <u>CATEGORY, HOME, CART, MAP, ABOUTUS.</u>

Screen Output: <u>DISPLAY PRODUCTS IN CATEGORY FORM.</u>

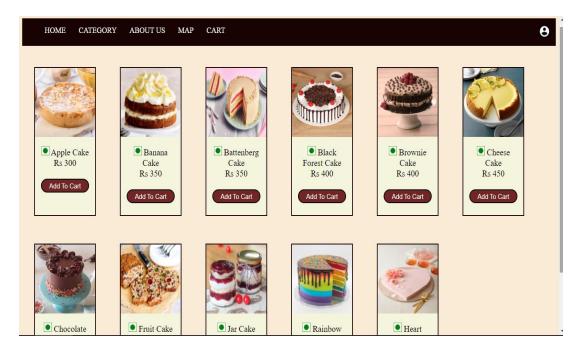

(9)

Screen Name: **COOKIES PAGE.**

Screen Input: <u>CATEGORY</u>, <u>HOME</u>, <u>CART</u>, <u>MAP</u>, <u>ABOUTUS</u>.

Screen Output: <u>DISPLAY PRODUCTS IN CATEGORY FORM.</u>




(10)

Screen Name: **PASTRIES PAGE.**

Screen Input: <u>CATEGORY, HOME, CART, MAP, ABOUTUS.</u>

Screen Output: <u>DISPLAY PRODUCTS IN CATEGORY FORM.</u>

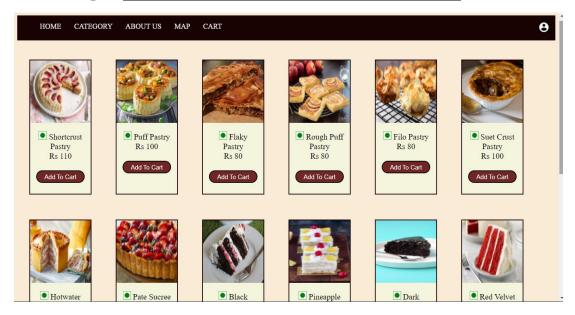


(11)

Screen Name: **SNACKS PAGE.**

Screen Input: <u>CATEGORY, HOME, CART, MAP, ABOUTUS.</u>

Screen Output: **DISPLAY PRODUCTS IN CATEGORY FORM.**

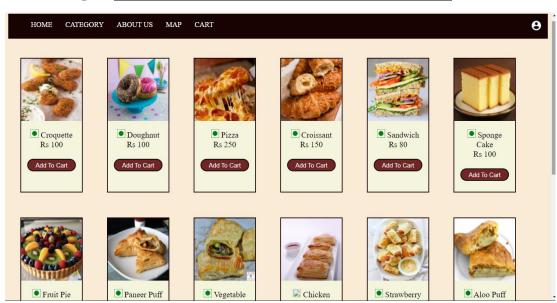

(12)

Screen Name: **BILL PAGE.**

Screen Input: PRODUCTS SELECTED.

Screen Output: PRICE, TOTAL, SUB-TOTAL.

	You	· Order	
	Item Name	Quantity	Price
	Red Velvet Cupcakes	1	50
	Pizza	1	250
	Pinwheel Cookies	1	80
	Sub Total:		380
	GST(5%):		19
	Total:		399
Update			Pay No

(13)

Screen Name: <u>CUSTOMER DETAILS FOR DELIVERY.</u>

Screen Input: NAME, PHONE, LANDMARK, ADDRESS, PIN.

Screen Output: PRICE, TOTAL, SUB-TOTAL.

	Order Details
	: FirstName LastName
Phone No.	x:
Address	:
Pin :	
Landmark	
Pay Type	o : ● Cash On Delivery ■ Card Payment
	Cancel Continue

(14)

Screen Name: **PAYMENT PAGE.**

Screen Input: <u>CARD DETAILS.</u>

Screen Output: <u>SUCCESSFUL ONLINE PAYMENT.</u>




14)

Screen Name: THANK YOU PAGE.

Screen Input: <u>HOME,MENU,MAP,ABOUT US.</u>

Screen Output: <u>ORDERED SUCCESSFULLY.</u>

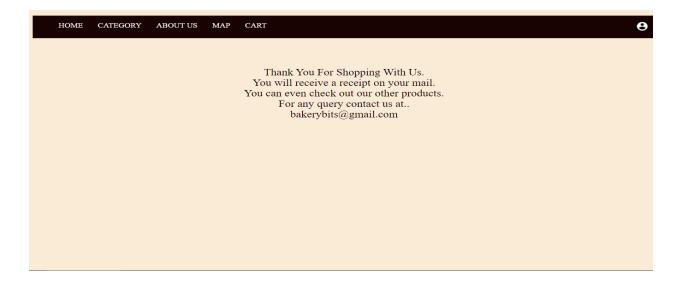


ADMIN SIDE:

(1)

Screen name: ADD PRODUCT PAGE.

Screen Input: NAME, CATEGORY, PRICE, TYPE, IMAGE.

Screen Output: PRODUCT ADDED SUCCESSFULLY.

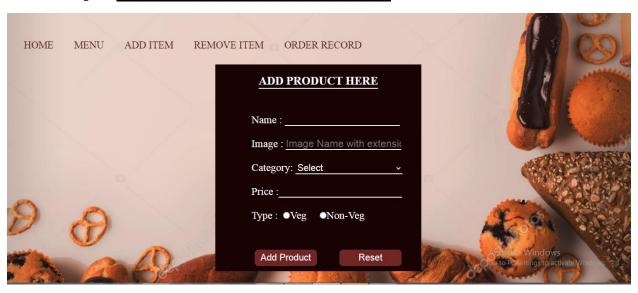


(2)

Screen name: **ORDER RECORDS.**

 ${\bf Screen\ Input: \underline{HOME,}\underline{MENU,}\underline{ADD\ ITEM,}\underline{REMOVE\ ITEM,}\underline{ORDER\ RECORDS.}}$

Screen Output: <u>DISPLAY ORDERS OF CUSTOMERS.</u>

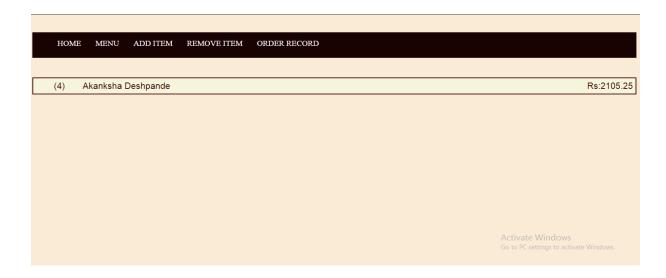

(3)

Screen name: **ORDER PAGE.**

Screen Input: <u>HOME,MENU,ADD ITEM,REMOVE ITEM,ORDER RECORDS.</u>

Screen Output: <u>DISPLAY DETAILS OF SPECIFIC ORDER.</u>




(4)

Screen name: <u>REMOVE PRODUCT PAGE.</u>

Screen Input: <u>NAME, CATEGORY, PRICE, TYPE, IMAGE.</u>

Screen Output: PRODUCT ADDED SUCCESSFULLY.

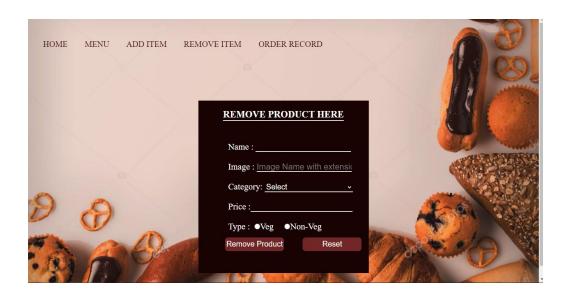


(5)

Screen name: **ADMIN HOME PAGE.**

Screen Input: <u>HOME, MENU, ADD ITEM, REMOVE ITEM, ORDER RECORD.</u>

Screen Output: <u>HOME, MENU, ADD ITEM, REMOVE ITEM, ORDER RECORD.</u>

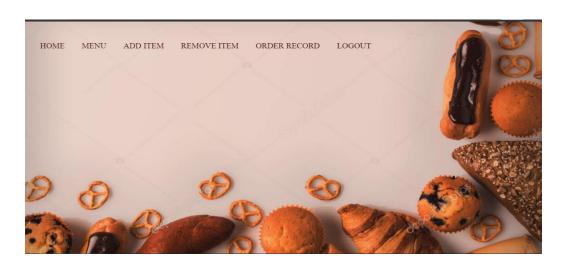

TEST CASES

Test Case No	Test Case Name	Input	Expected Output	Observed Output
1	Login	Username Password	Home page should be displayed.	Home page is displayed.
2	Registration	Username Name Password Phone Email	Home page should be displayed.	Home page id displayed and information is added to database.
3	Category	Add to cart	Products must be added to cart table in database and must visible in cart.	Products are added to cart table and are visible in cart page.

4.	Cart	Place order	Bill page must be visible.	Displays bill of customer.
5	Bill Page	Pay Now	Order details page must be made visible	Order details page is visible.
6	Order Details	Cash on Delivery	Thank you page must be made visible.	Thank you page is visible.
7	Order Details	Card Payment	Payment page must be visible	Payment page is visible.
8	Payment	Card Details	Thank you page must be visible.	Thank you page is made visible.
9	Admin	Username Password	Admin home page must be visible	Admin home page is visible.

10	Add Product	Product	Product	Product
	Remove	name	must get	gets saved
	Product	Price	saved or	or deleted
		Category	deleted	from
		Type	from	product
		Image	product	table.
		Name	table	
11	Order Record	Click on	Must	Shows
		customer	show	details of
			details of	orders
			products	
			ordered	

CONCLUSION

In group projects the main focus should be on discussions so that everyone is clear enough with the main idea. It saves a lot of time if everyone does their work on time. The focus should mainly be on making the project dynamic so that alterations to the project can be done in a user friendly way.

BIBLIOGRAPHY:

- (1) www.w3schools.com
- (2) <u>www.bakersbasket.pune</u>
- (3) www.justcakes.com
- (4) www.cakelounge.in
- (5) Programming Php 2nd Edition.

```
CODE
    //aboutus.html
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta http-equiv="X-UA-Compatible"
content="IE=edge">
  <meta name="viewport" content="width=device-
width, initial-scale=1.0">
  <link rel="stylesheet" href="page1.css">
  <script
src="https://kit.fontawesome.com/a076d05399.js"></scr
ipt>
  k rel="stylesheet"
href="https://cdnjs.cloudflare.com/ajax/libs/animate.css"
/4.1.1/animate.min.css"/>
  <title>Document</title>
```

```
<style>
  header
  {
   background-image: url(b1.jpg);
  }
   color: rgb(39, 3, 3);
  }
 </style>
</head>
<header>
  <nav>
   <input type="checkbox" id="check">
    <label for="check" class="checkbtn</pre>
animate__animated animate__slideInDown">
    <i class="fas fa-bars"></i>
    </label>
```

```
ul class="animate___animated
animate slideInDown">
   <a href="category.html">MENU</a>
   <a href="aboutus.html">ABOUT US</a>
   <!--<li><a href="contact.html">CONTACT</a>-->
   <a href="map.html">MAP</a>
   <a href="login.html">LOGIN/SIGN UP</a>
   <a href="profile.php"><img</pre>
src="user.png" style="width: 25px;height:
25px;"></a>
  </nav>
 <style>
 .Main{
 height: 400px;
 text-align: center;
 padding-top: 160px;
 padding-bottom: 100px;
 padding-left: 240px;
```

```
padding-right: 240px;
font-size: 23px;
}
.Main p{
 margin-left:-40px;
 font-weight: 600;
 padding: 5px;
}
@media (max-width: 858px){
 .Main{
  height: 400px;
  text-align: center;
  padding-top: 110px;
  padding-bottom: 100px;
  padding-left: 5px;
  padding-right: 5px;
  font-size: 20px;
 }
```

```
}
</style>
<div class="Main">
  <h2 style="font-size: 30px;">ABOUT US</h2><br>
```

We are committed to using fresh, high quality and local ingredients and proudly

serve our products. The shop has lush and green outdoor sitting area where

you can sit and have your meal while enjoying outdoor environment.

Here at the shop we believe in providing top quality products with no

shortcuts and our open kitchen concept allow visitor to watch our staff

at work and we also have vegan/gluten options on our menu.

so whether a birthday, a dinner party, a wedding or shower, let us help you

```
cater your next special event!<br>
      For any query contact us at
bakerybits@gmail.com<br>
    </div>
  </header>
</html>
//acakes.php
<?php
  error_reporting(E_ERROR | E_WARNING | E_PARSE);
  $pid=$ POST["cakes"];
  $con=pg_connect("host=localhost dbname=example
user=postgres password=cdadadad") or die("Unable to
connect");
  $res=pg_query($con,"Select * from product where
pid=$pid");
  $row=pg_num_rows($res);
  if($row==1)
```

```
{
    $rcheck=pg_query($con,"Select * from cart where
prodid='$pid'");
    if(!$rcheck)
    {
      echo "Error";
    }
    if(pg_num_rows($rcheck)==0)
      if(isset($_COOKIE["user"]))
      {
        $cid=$_COOKIE["user"];
         $prf=pg_fetch_assoc($res);
         $pr=$prf['price'];
         $r=pg_query($con,"Insert into cart
values($cid,$pid,1,'0.5','T',$pr)");
```

```
include "Allcakes.php";
?>
//addpro.php
<?php
  include "addProd.html";
  $con=pg_connect("host=localhost dbname=example
user=postgres password=cdadadad") or die("Unable to
connect");
  if(isset($ POST["protype"]))
  {
    $name=$_POST["proname"];
    $category=$ POST["procat"];
    $image=$ POST["proimage"];
    $type=$ POST["protype"];
    $price=$_POST["proprice"];
    if(strstr($category,"select"))
    {?><br>
```

```
<label style="font-size:23px;color:white;margin-</pre>
left:90px;">
      <?php
      echo "Product Category Not
Selected";?></label><?php
    }
    else
      $chkp=pg_query($con,"Select * from product
where pname='$name' and pimage='$image'");
      if(!$chkp)
         echo "Error";
      if(pg_num_rows($chkp)==0)
      {
      $res=pg_query($con,"Insert into product
values(nextval('prod'),'$name','$category','$type','$imag
e',$price)");
      if(!$res)
```

```
{
         echo "Error";
       else
       {?><br>
         <label style="font-size:23px;color:white;margin-</pre>
left:90px;">
         <?php
         echo "Product Added To Menu
Successfully";?></label><?php
  }
  else
  {?><br>
    <label style="font-size:23px;color:white;margin-</pre>
left:90px;">
```

```
<?php
    echo "Product Type Not Selected";?></label><?php
  }
?>
//addProd.html
<html>
  <script
src='https://kit.fontawesome.com/a076d05399.js'
crossorigin='anonymous'></script>
  <style>
    .opt select option
    {
      background-color: black;
      color: blanchedalmond;
      width:200px;
      height:25px;
      font-size: 18px;
```

```
input[type="text"]
{
  width: 200px;
  height: 25px;
}
input[type="radio"]
{
  width:15px;
  height:15px;
.box
  width:450px;
  height: 450px;
  background-color:rgb(24, 2, 2);
  color: white;
  margin-top: -250px;
  left: 50%;
  position: absolute;
```

```
transform: translate(-50%,-50%);
  box-sizing: border-box;
  border:2px solid rgb(24, 2, 2);
.box h1{
  text-align: center;
  font-size: 30px;
  list-style: none;
  text-decoration: underline;
  margin-top: 20px;
  text-underline-position: under;
  color: white;
.p input{
  width: 70%;
  /* margin-bottom: 20px; */
}
.box input[type="text"]
{
```

```
border:none;
  border-bottom: 2px solid white;
  background: transparent;
  outline: none;
  color:black;
  font-size: 22px;
.opt select{
  border:none;
  border-bottom: 2px solid white;
  background: transparent;
  outline: none;
  color:white;
  font-size: 20px;
  width: 65%;
}
.prod{
  margin-top: 10%;
```

```
margin-left: 15%;
}
.box p{
  line-height: 32px;
  font-size: 23px;
  padding: 10px;
}
.select input[type="submit"],input[type="reset"]
{
  border:2px solid black;
  outline: none;
  height: 40px;
  background: #722727;
  color: #fff;
  font-size: 20px;
  width: 140px;
  border-radius: 10px;
  /* padding-bottom: 20px; */
}
```

```
.select
input[type="submit"]:hover,input[type="reset"]:hover
    {
      cursor: pointer;
      background: #c03636;
      color: #000;
    }
    .price input{
      width: 75%;
    }
  </style>
   <head>
    <meta charset="utf-8">
    <meta name="viewport" content="width=device-
width, initial-scale=1.0">
    <link rel="stylesheet" href="page1.css">
    <script
src="https://kit.fontawesome.com/a076d05399.js"></scr</pre>
ipt>
    <link rel="stylesheet"</pre>
```

```
href="https://cdnjs.cloudflare.com/ajax/libs/animate.css"
/4.1.1/animate.min.css"/>
   </head>
    <header>
     <style>
      header
     background-image: url(b1.jpg);
     </style>
    <nav>
     <input type="checkbox" id="check">
     <label for="check" class="checkbtn</pre>
animate__animated animate__slideInDown">
      <i class="fas fa-bars" style="color:rgb(24, 2,
2);"></i>
     </label>
     animate__slideInDown">
```

```
<a href="admin_home.html">HOME</a>
     <a href="category.html">MENU</a>
     <a href="addProd.html">ADD ITEM</a>
     <a href="removeProd.html">REMOVE
ITEM</a>
     <a href="showord.php">ORDER</a>
RECORD</a>
    </nav>
   </header>
 <body>
 <div class="box">
   <form action="addpro.php" method="POST">
     <h1 style="font-size: 25px;">ADD PRODUCT
HERE</h1>
     <div class="prod">
       <div class="p">
         Name : <input type="text"
name="proname" required>
```

```
Image : <input type="text"</p>
name="proimage" placeholder="Image Name with
extension" required>
        </div>
        <div class="opt">
          Category: <select name="procat">
            <option selected</pre>
value="select">Select</option>
            <option value="Breads">Breads
            <option value="Cakes">Cakes</option>
            <option value="Cookies">Cookies</option>
            option
value="Cupcakes">Cupcakes</option>
            <option value="Pastries">Pastries
            <option value="Snacks">Snacks</option>
          </select>
          </div>
        <div class="price">
```

```
Price :<input type="text"</p>
name="proprice" required>
       </div>
       Type :  <input type="radio"</p>
name="protype" value="veg.png">Veg
    <input type="radio"
name="protype" value="nonveg.png">Non-Veg
       <div class="select">
           <input type="submit"
value="Add Product">   <input
type="reset" style="margin-left:30px;">
       </div>
   </form>
 </div>
</body>
</html>
```

```
//addtocart.php
<style>
 p
   color: #722727;
   text-align: center;
   font-size: 30px;
 }
</style>
<?php
 include "catnav.html";
 if(!isset($_COOKIE["user"]))
 {
   ?>
   Login To
Check Your Cart
```

```
<a href="login.html" style="margin-left:580px;font-
size:25px;text-decoration:none;padding-
left:70px;padding-right:70px;padding-top:10px;padding-
bottom:10px;background-color:
rgb(24,2,2);color:white;border-radius:5px;">Login</a>
    <br><br><br><a href="page1.html"</pre>
style="margin-left:580px;font-size:25px;text-
decoration:none;padding-left: 70px;padding-
right:70px;padding-top:10px;padding-
bottom:10px;background-color:
rgb(24,2,2);color:white;border-radius:5px;">Home</a>
    <?php
  }
  else
  {
    $c=$ COOKIE["user"];
    $con=pg_connect("host=localhost dbname=example
user=postgres password=cdadadad") or die("Unable to
connect");
    $res = pg query($con, "SELECT * from cart where
custid=$c and o status='T'");
```

```
if(!$res)
 {
   echo "Not able to fetch";
 }
 else
   if(pg_num_rows($res)==0)
   {
   ?>
    <i class="fa fa-shopping-cart"></i> Cart
Empty
   <?php
   else
   {
   ?>
   <form action="cart.php" method="POST">
```

```
<th align= "left" style="height: 10px;width: 75x;
font-size: 22px;">Item Name
   50px; font-size: 22px;">Item
   130px; font-size: 22px;">Quantity
   130px; font-size: 22px;">Weight
   50px; font-size: 22px;">Price
   50px; font-size: 22px;">Remove
  <?php
   while($row=pg_fetch_assoc($res))
   {
     $iid=$row['prodid'];
     $req=pg_fetch_assoc(pg_query("Select * from
product where pid=$iid"));
```

```
?>
   <?php
echo $req['pname'];?>
     <img src="<?php echo $req['pimage'];?>"
width="150" height="150">
     <button name="minus" value="<?php echo
$iid;?>" style="color: white;background-
color:#722727">-</button>
        <input type="text" value="<?php echo
$row['quantity']?>" size=2>
        <button name="plus" value="<?php echo</pre>
$iid;?>" style="color: white;background-
color:#722727">+</button>
     <button name="wminus" value="<?php echo
$iid;?>" style="color: white;background-
color:#722727">-</button>
```

```
<input type="text" value="<?php echo
$row['weight']?>"style="width:28px;height:22px;">
       <button name="wplus" value="<?php echo
$iid;?>" style="color: white;background-
color:#722727">+</button>&nbsp;KG
     <td align= "center" style="font-size:
20px;">Rs.<?php echo $row['price'];?>
      <button name="delete"
value="<?php echo $iid;?>"style="background:
transparent; border:white"><i class="fa fa-trash"
style="font-size: 40px;"></i></button>
   <?php
      }
      ?>
   <button class ="button"><a href="bill.php">Place
Order</a></button>
   </form>
   <?php
```

```
}
  }
}
?>
//admin.html
<!DOCTYPE html>
<html>
<head>
  <meta name="viewport" content="width=device-
width,initial-scale=1">
  <title>
    Login Form Design
  </title>
  <link rel="stylesheet" type="text/css" href="style.css">
  <style>
    body
    {
```

```
background-color: antiquewhite;
button
  background-color: black;
  color: white;
  float: right;
}
button a
  font-size: 20px;
  width: auto;
  height: auto;
  color: white;
  float: right;
  background-color: black;
  text-decoration: none;
.loginbox input[type="submit"]
```

```
{
    background-color:#722727;
  }
  .loginbox a
    background-color: #722727;
  .loginbox input[type="submit"]:hover
  {
    background: #c03636;
  }
  .loginbox a:hover
    background: #c03636;
</style>
</head>
<body>
<div class="loginbox">
```

```
<img src="ava.png" class="avatar">
 <button><a href="cust login.html"</pre>
style="color:white;background-color: black;width:
20px;height: 5px;" value=>X</a></button>
<h1>&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&
nbsp;       &
nbsp;  Login Here </h1>
 <form action="admin.php" method="GET">
 Username
 <input type="text" name="admin" placeholder="Enter
Username" required>
 Password
 <input type="password" name="adpassword"</pre>
placeholder="Enter password" required>
 <input type="submit" value="Login">
 </form>
```

```
//admin.php
<?php
  $ad=$_GET['admin'];
  $password=$_GET['adpassword'];
  if($ad=="root")
  {
    if($password=="admin")
    {
      include "admin_home.html";
    else
      include "admin.html";
      echo "Incorrect Password";
      ?></div></body></html><?php
    }
  }
  else
  {
```

```
include "admin.html";
    echo "Incorrect Password";
    ?></div></body></html><?php
  }
?>
//admin home.html
<!DOCTYPE html>
<html lang="en" dir="ltr">
 <head>
  <meta charset="utf-8">
  <meta name="viewport" content="width=device-
width, initial-scale=1.0">
  <link rel="stylesheet" href="page1.css">
  <script
src="https://kit.fontawesome.com/a076d05399.js"></scr</pre>
ipt>
  <link rel="stylesheet"</pre>
```

```
href="https://cdnjs.cloudflare.com/ajax/libs/animate.css
/4.1.1/animate.min.css"/>
 </head>
 <body>
  <header>
   <style>
    header
  {
   background-image: url(b1.jpg);
   color: rgb(24, 2, 2);
  }
   </style>
  <nav>
   <input type="checkbox" id="check">
```

```
<label for="check" class="checkbtn</pre>
animate__animated animate__slideInDown">
   <i class="fas fa-bars" style="color:rgb(24, 2, 2);"></i>
   </label>
   animate slideInDown">
   <a href="cust_login.html">HOME</a>
   <a href="category.html">MENU</a>
   <a href="addProd.html">ADD ITEM</a>
   <a href="removeProd.html">REMOVE</a>
ITEM</a>
   <a href="showord.php">ORDER</a>
RECORD</a>
   <a href="cust login.html">LOGOUT</a>
  </nav>
 </header>
</body>
</html>
```

```
//Allcakes.html
<?php
  include "catnav.html";
  $con=pg_connect("host=localhost dbname=example
user=postgres password=cdadadad") or die("Unable to
connect");
  $res=pg_query($con,"Select * from product where
pcategory='Cakes'");
  if(!$res)
  {
    echo "UNABLE";
  }
  while($row=pg_fetch_assoc($res))
  $prid=$row['pid'];
  $prname=$row['pname'];
  $ptypei=$row['ptype'];
  $primage=$row['pimage'];
```

```
$price=$row['price'];
?>
<form action="acakes.php" method="POST">
  <div class="gallery">
      <a target="_blank" href="#">
        <div class="dropdown">
          <img src="<?php echo $primage;?>"
width="150" height="150">
          <div class="dropdown-content">
            <img src="<?php echo $primage;?>"
width="200" height="200">
            <div class="desc"><?php echo
$prname;?><br><?php echo "Rs ".$price;?><br>
               <button class="button" name="cakes"</pre>
value= "<?php echo $prid;?>">Add To Cart</button>
            </div>
          </div>
        </div>
      </a>
```

```
<div class="desc"><img src="<?php echo</pre>
$ptypei;?>" width="20" height="20"> <?php echo
$prname;?><br><?php echo "Rs ".$price;?><br><br>
        <button class="button" name="cakes" value=</pre>
"<?php echo $prid;?>">Add To Cart</button>
      </div>
  </div>
  <?php
  }
  ?>
</form>
</body>
</html>
//bill.php
<?php
  session_start();
  $c=99;
```

```
if(isset($_COOKIE["user"]))
  {
    $c=$_COOKIE["user"];
  }
  include "catnav.html";
  $con=pg_connect("host=localhost dbname=example
password=cdadadad user=postgres") or die("Unable to
connect");
?>
<html>
  <style>
    .orderbox
    {
      color: rgb(24,2,2);
      margin-left:450px;
      text-align: center;
      width: 400px;
      height: auto;
      border: 2px solid rgb(24,2,2);
```

```
background-color: beige;
   }
   .it
   {
    margin-left:80px;
    width:240px;
    height:auto;
    color: rgb(24,2,2);
    font-size: 20px;
    padding-bottom: 10px;
   }
 </style>
 <body>
   <div class="orderbox">
    Your
Order
    <div class="it">
```

```
Item Name
    Quantity
    Price
    ----
    -----
    ----
    <?php
    $prs=pg_query($con, "SELECT * from cart where
custid=$c and o_status='T'");
    if(!$prs)
    {
      echo "Error Occured. <br > Please try again
after sometime";
    }
    else
```

```
$sum=0;
          while($row=pg_fetch_assoc($prs))
          {
            $iid=$row['prodid'];
            $req=pg_fetch_assoc(pg_query("Select *
from product where pid=$iid"));
$sum=$sum+($row['price']*$row['quantity']);
        ?>
        <?php
            $cat=strcmp("Cakes",$req['pcategory']);
           if(scat==0)
            {
              ?>
             <td align="center" style="font-
size:20px;"><?php echo $req['pname'];?>(<?php echo
$row['weight'];?>KG)
             <?php
            }
```

```
else
            {
            ?>
              <td align="center" style="font-size:
20px;"><?php echo $req['pname'];?>
          <?php
          ?>
          <td align="center" style="font-
size:20px;"><?php echo $row['quantity'];?>
          <td align="center" style="font-
size:20px;"><?php echo $row['price'];?>
        <?php
        $g=$sum*0.05;
        $ SESSION["total"]=$sum+$g;
        ?>
```

```
----
-----
----
Sub Total:
<?php echo $sum;?>
GST(5%):
<?php echo $g?>
----
-----
----
```

```
Total:
       <?php echo
$sum+$g;?>
       <?php
       }
     ?>
     </div>
     <a href="addtocart.php" style="float:left;margin-
top:8px;padding:8px;padding-left:10px;padding-
right:10px;border-radius:5px;border:2px solid
black; background-
color:#722727;color:white;">Update</a>
     <a href="order.html" style="float:right;margin-
top:8px;padding:8px;padding-left:10px;padding-
right:10px;border-radius:5px;border:2px solid
black;background-color:#722727;color:white;">Pay
Now</a>
```

```
</div>
  </body>
</html>
//br.php
<?php
  error_reporting(E_ERROR | E_WARNING | E_PARSE);
  $pid=$_POST["bread"];
  $con=pg_connect("host=localhost dbname=example
user=postgres password=cdadadad") or die("Unable to
connect");
  $res=pg_query($con,"Select * from product where
pid=$pid");
  $row=pg_num_rows($res);
  if($row==1)
    $rcheck=pg_query($con,"Select * from cart where
prodid='$pid'");
    if(!$rcheck)
```

```
{
      echo "Error";
    }
    if(pg_num_rows($rcheck)==0)
    {
      if(isset($_COOKIE["user"]))
      {
         $cid=$_COOKIE["user"];
         $prf=pg_fetch_assoc($res);
         $pr=$prf['price'];
         $r=pg_query($con,"Insert into cart
values($cid,$pid,1,0,'T',$pr)");
  }
  include "bread.php";
?>
```

```
//bread.php
<?php
  include "catnav.html";
  $con=pg_connect("host=localhost dbname=example
user=postgres password=cdadadad") or die("Unable to
connect");
  $res=pg_query($con,"Select * from product where
pcategory='Breads'");
  if(!$res)
    echo "UNABLE";
  while($row=pg_fetch_assoc($res))
  {
  $prid=$row['pid'];
  $prname=$row['pname'];
  $ptypei=$row['ptype'];
  $primage=$row['pimage'];
  $price=$row['price'];
```

```
$cat=$row['pcategory'];
?>
<form action="br.php" method="POST">
  <div class="gallery">
      <a target="_blank" href="#">
        <div class="dropdown">
          <img src="<?php echo $primage;?>"
width="150" height="150">
          <div class="dropdown-content">
            <img src="<?php echo $primage;?>"
width="200" height="200">
            <div class="desc"><?php echo
$prname;?><br><?php echo "Rs ".$price;?><br>
               <button class="button" name="bread"</pre>
value= "<?php echo $prid;?>">Add To Cart</button>
            </div>
          </div>
        </div>
      </a>
```

```
<div class="desc"><img src="<?php echo</pre>
$ptypei;?>" width="20" height="20"> <?php echo
$prname;?><br><?php echo "Rs ".$price;?><br><br>
        <button class="button" name="bread" value=</pre>
"<?php echo $prid;?>">Add To Cart</button>
      </div>
  </div>
  <?php
  ?>
</form>
</body>
</html>
//cad.html
<!DOCTYPE html>
<html>
  <head>
```

```
<meta name="viewport" content="width=device-
width,initial-scale=1">
    <link rel="stylesheet"</pre>
href="https://cdnjs.cloudflare.com/ajax/libs/font-
awesome/4.7.0/css/font-awesome.min.css">
    <style>
      ul
      {
         height: 60px;
         background-color: rgb(24, 2, 2);
         overflow:hidden;
      }
      li
         float: left;
         list-style-type: none;
```

```
a
  text-decoration: none;
  color:white;
  font-size: large;
}
li a,.dropbtn
  color: white;
  padding: 16px;
  padding-bottom: 5px;
  display: inline-block;
  text-align: center;
  text-decoration:none;
  border-bottom: 5px;
li a:hover, .dropdown:hover .dropbtn
```

```
{
  color: rgb(245, 210, 158);
  border-bottom:1px solid rgb(245, 210, 158);
.dropdown-content a
{
  color: white(59, 11, 11);
  padding: 16px;
  display: block;
  text-align: left;
  text-decoration: none;
.dropdown-content a:hover
{
  color:rgb(245, 210, 158);
.dropdown:hover .dropdown-content
  display: block;
```

```
.dropdown-content
{
  display: none;
  background-color:rgb(24, 2, 2);
  color: white;
  position: absolute;
div.gallery
  background-color:beige;
  margin: 30px;
  border: 2px solid rgb(24, 2, 2);
  float: left;
  width:150px;
  height:320px
}
div.gallery:hover
```

```
border:2px solid rgb(136, 30, 30);
div.desc
{
  padding: 15px;
  text-align: center;
  font-size: 20px;
  font-style: bold;
.button
{
  height: 30px;
  font-size: 15px;
  width: 120px;
  background-color:#722727;
  color:white;
  border-radius: 15px;
  border:2px solid black;
```

```
.button:hover
     {
       background-color: #c03636;
     body
     {
       background-color: antiquewhite;
   </style>
 </head>
 <body>
   ul>
     <a href="admin_home.html">HOME</a>
     <a href="category.html">MENU</a>
     <a href="addProd.html">ADD ITEM</a>
     <a href="removeProd.html">REMOVE</a>
ITEM</a>
```

```
<a href="showord.php">ORDER</a>
RECORD</a>
    //cart.php
<?php
error_reporting(0);
$c=$ COOKIE["user"];
$pw=$mw=3;
$act=$p=$m=0;
$act=$ POST["delete"];
$p=$ POST["plus"];
$m=$_POST["minus"];
$pw=$_POST["wplus"];
$mw=$_POST["wminus"];
$con=pg_connect("host=localhost dbname=example
user=postgres password=cdadadad") or die("Unable to
connect");
```

```
if($p>1000)
  {
    $req=pg_fetch_assoc(pg_query($con,"Select
quantity from cart where custid=$c and prodid=$p"));
    $qnt=$req['quantity'];
    $qnt=$qnt+1;
    $upq=pg_query($con,"Update cart set
quantity=$qnt where custid=$c and prodid=$p");
    if(!$upq)
      echo "error";
  }
  else if($m>1000)
    $req=pg_fetch_assoc(pg_query($con,"Select
quantity from cart where custid=$c and prodid=$m"));
    $qnt=$req['quantity'];
```

```
if($qnt!=1)
      $qnt=$qnt-1;
    $upq=pg_query($con,"Update cart set
quantity=$qnt where custid=$c and prodid=$m");
    if(!$upq)
      echo "error";
    }
  }
  else if($act>1000)
  {
    $remove=pg_query($con,"Delete from cart where
prodid=$act");
    if(!$remove)
    {
      echo "error";
```

```
}
  else if($pw!=3)
  {
    $res=pg_fetch_assoc(pg_query($con,"Select * from
product where pid=$pw"));
    $rw=strcmp($res['pcategory'],"Cakes");
    if(\text{$rw==0$})
      $req=pg_fetch_assoc(pg_query($con,"Select *
from cart where custid=$c and prodid=$pw"));
      $qnt=$req['weight'];
      $prc=$res['price'];
      $qnt=$qnt+0.5;
      if($qnt!=2.5)
      {
         $upq=pg_query($con,"Update cart set
weight=$qnt where custid=$c and prodid=$pw");
        if(!$upq)
```

```
die("Error");
        }
        $p=($prc*(0.4));
        $prc=$req['price']+$p;
        $upp=pg_query($con,"Update cart set
price=$prc where custid=$c and prodid=$pw");
        if(!$upp)
           die("Error");
        }
  }
  if($mw!=3)
  {
    $res=pg_fetch_assoc(pg_query($con,"Select * from
product where pid=$mw"));
    $rw=strcmp($res['pcategory'],"Cakes");
    if(\$rw==0)
```

```
{
      $req=pg_fetch_assoc(pg_query($con,"Select *
from cart where custid=$c and prodid=$mw"));
      $qnt=$req['weight'];
      $prc=$res['price'];
      if($qnt>0.5)
      {
        $qnt=$qnt-0.5;
        $p=($prc*(0.4));
        $prc=$req['price']-$p;
      $upq=pg_query($con,"Update cart set
weight=$qnt where custid=$c and prodid=$mw");
      if(!$upq)
      {
        die("Error");
      }
      $upp=pg_query($con,"Update cart set price=$prc
where custid=$c and prodid=$mw");
```

```
if(!$upp)
        die("Error");
    }
  }
include "addtocart.php";
?>
//category.html
<!DOCTYPE html>
<html>
  <head>
    <meta name="viewport" content="width=device-
width,initial-scale=2">
    <style>
      body
```

```
{
  background-color: antiquewhite;
}
ul
  height: 60px;
  background-color: rgb(24,2,2);
  overflow:hidden;
  float: left;
  list-style-type: none;
a
  text-decoration: none;
  color: white;
```

```
font-size: large;
li a,.dropbtn
{
  color: white;
  padding: 16px;
  display: inline-block;
  text-align: center;
  text-decoration:none;
}
li a:hover, .dropdown:hover .dropbtn
{
  color: rgb(245,210,158);
  border-bottom:1px solid rgb(245, 210, 158);
.dropdown-content a
  color: white;
```

```
padding-left: 16px;
  display: block;
  text-align: left;
  text-decoration: none;
.dropdown-content a:hover
  color:rgb(245,210,158);
.dropdown:hover .dropdown-content
{
  display: block;
.dropdown-content
  display: none;
  background-color: rgb(24,2,2);
  color: white;
  position: absolute;
```

```
div.gallery
{
  background-color: beige;
  margin: 30px;
  border: 2px solid rgb(24,2,2);
  float: left;
  width:150px;
div.gallery:hover
{
  border:2px solid rgb(136,30,30);
div.desc
{
  padding: 15px;
  text-align: center;
  color: rgb(24,2,2);
```

```
</style>
 </head>
 <body>
   <l
     <a href="page1.html">HOME</a>
     <a href="category.html"
class="dropbtn">CATEGORY</a>
       <div class="dropdown-content">
         <a href="bread.php">BREAD</a>
         <a href="Allcakes.php">CAKES</a>
         <a href="cupcake.php">CUPCAKES</a>
       <!--<a href="customized.php">CUSTOMIZED
CAKES</a>--->
         <a href="cookies.php">COOKIES</a>
         <a href="pastry.php">PASTRIES</a>
         <a href="snacks.php">SNACKS</a>
       </div>
```

```
<a href="aboutus.html">ABOUT US</a>
     <!--<li><a
href="contact.html">CONTACT</a>-->
     <a href="map.html">MAP</a>
     <a href="addtocart.php">CART</a>
     <a href="login.html">LOGIN</a>
     <a href="profile.php"><img</pre>
src="user.png" style="width: 25px;height:
25px;"></a>
   <br><br><br><br><
   <div class="gallery">
     <a href="bread.php">
         <img src="bread.jpg" width="150"
height="150">
     </a>
     <div class="desc"><br>BREADS</div>
   </div>
   <div class="gallery">
     <a href="Allcakes.php">
```

```
<img src="cakes.jpg" width="150"
height="150">
      </a>
      <div class="desc"><br>ALL CAKES</div>
    </div>
    <!---<div class="gallery">
      <a href="customized.php">
          <img src="cat2.jpg" width="150"
height="150">
      </a>
      <div class="desc"><br>CUSTOMIZED CAKES</div>
    </div>--->
    <div class="gallery">
      <a href="cookies.php">
          <img src="cookies.jpg" width="150"</pre>
height="150">
      </a>
      <div class="desc"><br>COOKIES</div>
```

```
</div>
    <div class="gallery">
      <a href="cupcake.php">
          <img src="cupcakes.jpg" width="150"
height="150">
      </a>
      <div class="desc"><br><CUPCAKES</div>
    </div>
    <div class="gallery">
      <a href="snacks.php">
          <img src="snack.jpg" width="150"
height="150">
      </a>
      <div class="desc"><br>SNACKS</div>
    </div>
    <div class="gallery">
      <a href="pastry.php">
```

```
<img src="pastry.jpg" width="150"
height="150">
      </a>
      <div class="desc"><br>PASTRIES</div>
    </div>
  </body>
</html>
//catnav.html
<!DOCTYPE html>
<html>
  <head>
    <meta name="viewport" content="width=device-
width,initial-scale=1">
    <link rel="stylesheet"</pre>
href="https://cdnjs.cloudflare.com/ajax/libs/font-
awesome/4.7.0/css/font-awesome.min.css">
    <style>
      ul
```

```
{
  height: 60px;
  background-color: rgb(24, 2, 2);
  overflow:hidden;
  float: left;
  list-style-type: none;
}
a
  text-decoration: none;
  color:white;
  font-size: large;
```

```
li a,.dropbtn
{
  color: white;
  padding: 16px;
  padding-bottom: 5px;
  display: inline-block;
  text-align: center;
  text-decoration:none;
  border-bottom: 5px;
}
li a:hover, .dropdown:hover .dropbtn
{
  color: rgb(245, 210, 158);
  border-bottom:1px solid rgb(245, 210, 158);
.dropdown-content a
  color: white(59, 11, 11);
```

```
padding: 16px;
  display: block;
  text-align: left;
  text-decoration: none;
.dropdown-content a:hover
  color:rgb(245, 210, 158);
.dropdown:hover .dropdown-content
{
  display: block;
.dropdown-content
  display: none;
  background-color:rgb(24, 2, 2);
  color: white;
  position: absolute;
```

```
div.gallery
{
  background-color:beige;
  margin: 30px;
  border: 2px solid rgb(24, 2, 2);
  float: left;
  width:150px;
  height:320px
div.gallery:hover
  border:2px solid rgb(136, 30, 30);
}
div.desc
  padding: 15px;
  text-align: center;
  font-size: 20px;
```

```
font-style: bold;
.button
  height: 30px;
  font-size: 15px;
  width: 120px;
  background-color:#722727;
  color:white;
  border-radius: 15px;
  border:2px solid black;
.button:hover
{
  background-color: #c03636;
}
body
```

```
background-color: antiquewhite;
     }
   </style>
 </head>
 <body>
   ul>
     <a href="page1.html">HOME</a>
     <a href="category.html"
class="dropbtn">CATEGORY</a>
       <div class="dropdown-content">
         <a href="bread.php">BREAD</a>
         <a href="Allcakes.php">CAKES</a>
         <a href="cupcake.php">CUPCAKES</a>
     <!---<a href="customized.php">CUSTOMIZED
CAKES</a>--->
         <a href="cookies.php">COOKIES</a>
         <a href="pastry.php">PASTRIES</a>
         <a href="snacks.php">SNACKS</a>
```

```
</div>
     <a href="aboutus.html">ABOUT US</a>
   <!--<li><a href="contact.html">CONTACT</a>-->
     <a href="map.html">MAP</a>
     <a href="addtocart.php">CART</a>
     <a href="profile.php"><img</pre>
src="user.png" style="width: 25px;height:
25px;"></a>
   //complete.php
<?php include "catnav.html";?>
<html>
 <style>
   p
```

```
font-size: 25px;
      text-align: center;
      color: rgb(24,2,2);
  </style>
  <br><br>>
  Thank You For Shopping With Us.<br>
    You will receive a receipt on your mail.<br>
    You can even check out our other products.<br>
    For any query contact us at
bakerybits@gmail.com<br>
  </html>
//cook.php
<?php
  error_reporting(E_ERROR | E_WARNING | E_PARSE);
```

```
$pid=$_POST["cookies"];
  $con=pg connect("host=localhost dbname=example
user=postgres password=cdadadad") or die("Unable to
connect");
  $res=pg_query($con,"Select * from product where
pid=$pid");
  $row=pg_num_rows($res);
  if($row==1)
    $rcheck=pg_query($con,"Select * from cart where
prodid='$pid'");
    if(!$rcheck)
      echo "Error";
    }
    if(pg_num_rows($rcheck)==0)
    {
      if(isset($_COOKIE["user"]))
      {
        $cid=$_COOKIE["user"];
```

```
$prf=pg_fetch_assoc($res);
        $pr=$prf['price'];
        $r=pg_query($con,"Insert into cart
values($cid,$pid,1,0,'T',$pr)");
    }
  }
  include "cookies.php";
?>
//cookies.php
<?php
  include "catnav.html";
  $con=pg_connect("host=localhost dbname=example
user=postgres password=cdadadad") or die("Unable to
connect");
  $res=pg_query($con,"Select * from product where
pcategory='Cookies'");
  if(!$res)
```

```
{
    echo "UNABLE";
  }
  while($row=pg_fetch_assoc($res))
  {
  $prid=$row['pid'];
  $prname=$row['pname'];
  $ptypei=$row['ptype'];
  $primage=$row['pimage'];
  $price=$row['price'];
?>
<form action="cook.php" method="POST">
  <div class="gallery">
      <a target=" blank" href="#">
        <div class="dropdown">
          <img src="<?php echo $primage;?>"
width="150" height="150">
          <div class="dropdown-content">
```

```
<img src="<?php echo $primage;?>"
width="200" height="200">
            <div class="desc"><?php echo
$prname;?><br><?php echo "Rs ".$price;?><br>
               <button class="button" name="cookies"</pre>
value= "<?php echo $prid;?>">Add To Cart</button>
            </div>
          </div>
        </div>
      </a>
      <div class="desc"><img src="<?php echo</pre>
$ptypei;?>" width="20" height="20"> <?php echo
$prname;?><br><?php echo "Rs ".$price;?><br><br>
        <button class="button" name="cookies" value=
"<?php echo $prid;?>">Add To Cart</button>
      </div>
  </div>
  <?php
  }
  ?>
```

```
</form>
</body>
</html>
//createAcc.html
<!DOCTYPE html>
<html>
<head>
  <meta name="viewport" content="width=device-
width,initial-scale=1">
  <title>
    Login Form Design
  </title>
  <link rel="stylesheet" type="text/css" href="style.css">
  <style>
    button
    {
      background-color: black;
```

```
color: white;
  float: right;
}
button a
  font-size: 20px;
  width: auto;
  height: auto;
  color: white;
  float: right;
  background-color: black;
  text-decoration: none;
.loginbox
      height: 750px;
      width: 350px;
    .loginbox input[type="submit"]
```

```
background-color:#722727;
}
.loginbox a
  background-color: #722727;
.loginbox input[type="submit"]:hover
{
  background: #c03636;
}
.loginbox a:hover
  background: #c03636;
body
  background-color:antiquewhite;
}
```

```
</style>
 </head>
<body>
<div class="loginbox">
 <hr><hr><hr><hr><
 <img src="ava.png" class="avatar">
 <button><a href="login.html"</pre>
style="color:white;background-color: black;width:
20px;height: 5px;" value=>X</a></button>
<h1>&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&
nbsp;       &
nbsp;  Create Account </h1>
   <form action="CreateAcc.php" method="POST">
     Username
     <input type="text" name ="username"
placeholder="Enter Username" required>
     Name
     <input type="text" name ="cname"
placeholder="FirstName LastName" required>
```

```
Phone No
      <input type="text" name="phone"
placeholder="Enter Phone Number">
      Mail Id
      <input type="text" name="mail"
placeholder="Enter Mail ID">
      Password
      <input type="password" name="password"</pre>
placeholder="Enter password" pattern="(?=.*\d)(?=.*[a-
z])(?=.*[A-Z]).{8,}"required>
      Confirm Password
      <input type="password" name="cpassword"</pre>
placeholder="Enter password" required>
      <input type="submit" value="Create Account">
    </form>
```

```
//CreateAcc.php
<?php
  $uid=0;
  error_reporting(E_ERROR | E_WARNING | E_PARSE);
  $name=$ POST["cname"];
  $username=$_POST["username"];
  $phone=$ POST["phone"];
  $mail= $_POST["mail"];
  $password=$_POST["password"];
  $cpassword=$_POST["cpassword"];
  function test input($em)
    if(!preg match("^[ a-z0-9-]+(\.[ a-z0-9-]+)*@[a-z0-
9-]+(\.[a-z0-9-]+)*(\.[a-z]{2,3})$^", $em))
    {
      return false;
    }
```

else

```
return true;
  }
  $con=pg_connect("host=localhost dbname=example
user=postgres password=cdadadad") or die("Unable to
connect");
  if((test input($mail)==false)&&($mail!=""))
  {
    include "createAcc.html";
    ?>
    <label style="color:aquamarine">INVALID EMAIL
FORMAT</label>
    </div>
    </body>
    </html>
    <?php
  }
  else if($password==$cpassword)
  {
    $chkuname=pg_query($con,"Select * from login
where username='$username'");
```

```
$cun=pg_num_rows($chkuname);
    if($cun==1)
    {
      include "createAcc.html";
      ?>
      <label style="color:aquamarine">USERNAME
ALREADY TAKEN<br/>br>TRY ANOTHER</label>
      </div>
      </body>
      </html>
      <?php
    }
    else
      $result=pg_query($con,"Insert into customers
values(nextval('customer'),'$phone','$mail','$name')");
      $getcid=pg_fetch_assoc(pg_query($con,"Select
cid from customers where email='$mail' and
phone='$phone'"));
      $cid=$getcid['cid'];
```

```
$res=pg_query($con,"Insert into login
values(nextval('log'),'$username','$password',$cid)");
      $getlid=pg_fetch_assoc(pg_query($con,"Select lid
from login where username='$username'"));
      $lid=$getlid['lid'];
      $webu=pg query($con,"Insert into webuser
values('C',$lid)");
      setcookie("user",$cid);
  }
  else
    include "createAcc.html";
    ?>
    <label style="color:aquamarine">Confirm Password
Does Not Match</label>
    </div>
    </body>
    </html>
    <?php
```

```
}
  ?>
//cup.php
<?php
  error_reporting(E_ERROR | E_WARNING | E_PARSE);
  $pid=$ POST["cupcakes"];
  $con=pg_connect("host=localhost dbname=example
user=postgres password=cdadadad") or die("Unable to
connect");
  $res=pg_query($con,"Select * from product where
pid=$pid");
  $row=pg_num_rows($res);
  if($row==1)
  {
    $rcheck=pg_query($con,"Select * from cart where
prodid='$pid'");
    if(!$rcheck)
    {
```

```
echo "Error";
    }
    if(pg_num_rows($rcheck)==0)
      if(isset($_COOKIE["user"]))
      {
        $cid=$_COOKIE["user"];
         $prf=pg_fetch_assoc($res);
        $pr=$prf['price'];
        $r=pg_query($con,"Insert into cart
values($cid,$pid,1,0,'T',$pr)");
    }
  }
  include "cupcake.php";
?>
```

```
//cupcake.php
<?php
  include "catnav.html";
  $con=pg_connect("host=localhost dbname=example
user=postgres password=cdadadad") or die("Unable to
connect");
  $res=pg_query($con,"Select * from product where
pcategory='Cupcakes'");
  if(!$res)
  {
    echo "UNABLE";
  }
  while($row=pg_fetch_assoc($res))
  $prid=$row['pid'];
  $prname=$row['pname'];
  $ptypei=$row['ptype'];
  $primage=$row['pimage'];
```

```
$price=$row['price'];
?>
<form action="cup.php" method="POST">
  <div class="gallery">
      <a target="_blank" href="#">
        <div class="dropdown">
          <img src="<?php echo $primage;?>"
width="150" height="150">
          <div class="dropdown-content">
            <img src="<?php echo $primage;?>"
width="200" height="200">
            <div class="desc"><?php echo
$prname;?><br><?php echo "Rs ".$price;?><br>
               <button class="button" name="cupcakes"</pre>
value= "<?php echo $prid;?>">Add To Cart</button>
            </div>
          </div>
        </div>
      </a>
```

```
<div class="desc"><img src="<?php echo</pre>
$ptypei;?>" width="20" height="20"> <?php echo
$prname;?><br><?php echo "Rs ".$price;?><br><br>
        <button class="button" name="cupcakes"</pre>
value= "<?php echo $prid;?>">Add To Cart</button>
      </div>
  </div>
  <?php
  ?>
</form>
</body>
</html>
//cust_login.html
<!DOCTYPE html>
<html lang="en">
<head>
```

```
<meta charset="UTF-8">
  <meta http-equiv="X-UA-Compatible"
content="IE=edge">
  <meta name="viewport" content="width=device-
width, initial-scale=1.0">
  <title>Document</title>
  k
  rel="stylesheet"
href="https://cdnjs.cloudflare.com/ajax/libs/animate.css"
/4.1.1/animate.min.css"
  />
</head>
<body>
  <style>
    body{
      margin: 0;
      padding: 0;
      background-size: cover;
```

```
background-position: center;
  background-color: #f7d8d8;
}
nav{
  margin-top: -20px;
  font-size: 40px;
  text-decoration: none;
  word-spacing: 15px;
  font-family: "Times New Roman", Times, serif;
}
.customer{
  width: 200px;
  height: 350px;
  margin-top:30px;
  margin-left: 700px;
  float: left;
.customer a{
```

```
display: block;
  margin-top: 260px;
  padding-left: 50px;
  width: 70%;
  height: 30px;
  background: #fb2525;
  color: #fff;
  padding-top: 10px;
  font-size: 18px;
  border-radius: 20px;
  text-decoration: none;
.customer a:hover
  cursor: pointer;
  background: #ffc107;
  color: #000;
```

}

{

}

```
.admin{
  width: 200px;
  height: 350px;
  margin-top:30px;
  margin-right: 100px;
  float: right;
}
.admin a{
  display: block;
  margin-top: 30px;
  width: 60%;
  padding-left: 70px;
  height: 30px;
  background: #fb2525;
  color: #fff;
  padding-top: 10px;
  font-size: 18px;
  border-radius: 20px;
  text-decoration: none;
```

```
}
.admin a:hover
{
  cursor: pointer;
  background: #ffc107;
  color: #000;
.avatar2{
  width: 200px;
  padding-top: 25px;
  padding-left: 90px;
  float: right;
}
.avatar1{
  width: 200px;
  padding-top: 25px;
  padding-left: 10px;
}
```

```
</style>
  <br><br><
    <nav>
    <div class="bakery animate___animated</pre>
animate___fadeInLeft" >
      <h1 style="font-size: 40px;">WELCOME TO
BAKERY BITS</h1>
    </div>
    </nav>
  <main>
    <div class="customer">
      <img src="cust2.png" class="avatar2">
      <a href="login.html">CUSTOMER</a>
    </div>
    <div class="admin">
      <img src="admin1.png" class="avatar1">
      <a href="admin.html">ADMIN</a>
    </div>
```

```
</main>
</body>
</html>
//login.html
<!DOCTYPE html>
<html>
<head>
  <meta name="viewport" content="width=device-
width,initial-scale=1">
  <title>
    Login Form Design
  </title>
  <link rel="stylesheet" type="text/css" href="style.css">
  <style>
    body
    {
      background-color: antiquewhite;
```

```
button
{
  background-color: black;
  color: white;
  float: right;
button a
  font-size: 20px;
  width: auto;
  height: auto;
  color: white;
  float: right;
  background-color: black;
  text-decoration: none;
}
.loginbox input[type="submit"]
{
```

```
background-color:#722727;
  .loginbox a
    background-color: #722727;
  }
  .loginbox input[type="submit"]:hover
  {
    background: #c03636;
  .loginbox a:hover
    background: #c03636;
  }
</style>
</head>
<body>
<div class="loginbox">
<img src="ava.png" class="avatar">
```

```
<button><a href="page1.html"</pre>
style="color:white;background-color: black;width:
20px;height: 5px;" value=>X</a></button>
<h1>&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&
nbsp;       &
nbsp;  Login Here </h1>
 <form action="login.php" method="GET">
 Username
 <input type="text" name="usernamel"
placeholder="Enter Username" required>
 Password
 <input type="password" name="password!"</pre>
placeholder="Enter password" required>
 <input type="submit" value="Login">
 <a href="createAcc.html">Create Account</a>
 </form>
```

```
//login.php
<?php
  $r=2;
  $uname=$_GET["usernamel"];
  $pass=$_GET["passwordl"];
  class Login
  {
    private $username,$password;
    function Login($a,$b)
    {
      $this->username=$a;
      $this->password=$b;
    }
    public function ChkLogin()
    {
      $un=$this->username;
      $pa=$this->password;
```

```
$con=pg_connect("host=localhost
dbname=example user=postgres password=cdadadad")
or die("Unable to connect");
      $result=pg_query($con,"select passwordl from
login where username='$un'");
      $row=pg_fetch_assoc($result);
      $cr=pg_num_rows($result);
      if($cr==0)
        return -1;
      }
      else
        if(!$row)
          echo "Error";
        else if($pa==$row['passwordl'])
        {
```

```
return 0;
        else
           return 1;
  }
  if(isset($_COOKIE["user"]))
    include "login.html";
    ?>
    <a href="color:aquamarine">Already Logged</a>
In.<br/>
No Need To Login</label>
    </div>
    </body>
    </html>
```

```
<?php
  }
  else
  {
    $I=new Login($uname,$pass);
    $r=$I->ChkLogin();
    if($r==-1)
    {
      include "login.html";//Create Account
      ?>
    <label style="color:aquamarine">Account Not
Found!!<br/>
Create Account To Login.</label>
    </div>
    </body>
    </html>
    <?php
    else if($r==0)
    {
```

```
$con=pg_connect("host=localhost
dbname=example user=postgres password=cdadadad")
or die("Unable to connect");
      $getcid=pg_fetch_assoc(pg_query($con,"Select
cid from login where username='$uname'"));
      $cid=$getcid['cid'];
      setcookie("user","$cid");
      include "page1.html";
    }
    else if($r==1)
    {
      include "login.html";
    ?>
    <label style="color:aquamarine">Incorrect
Password!!!<br>Try Again</label>
    </div>
    </body>
    </html>
    <?php
```

```
?>
//map.html
<!DOCTYPE html>
<html lang="en" dir="ltr">
 <head>
  <meta charset="utf-8">
  <meta name="viewport" content="width=device-
width, initial-scale=1.0">
  <link rel="stylesheet" href="page1.css">
  <script
src="https://kit.fontawesome.com/a076d05399.js"></scr
ipt>
  <link rel="stylesheet"</pre>
href="https://cdnjs.cloudflare.com/ajax/libs/animate.css"
/4.1.1/animate.min.css"/>
 </head>
```

```
<style>
  header
  {
   background-image: url(b1.jpg);
 }
  color: rgb(24, 2, 2);
  }
 </style>
  <header>
  <nav>
   <input type="checkbox" id="check">
   <label for="check" class="checkbtn"
animate__animated animate__slideInDown">
    <i class="fas fa-bars"></i>
   </label>
   animate__slideInDown">
```

```
<!-- <li><a href="#">Home</a> -->
   <a href="category.html">MENU</a>
   <a href="aboutus.html">About us</a>
   <!-- <li><a href="#">Services</a>
   <a href="contact.html">Contact</a> -->
   <a href="map.html">MAP</a>
   <a href="login.html">Login/Sign Up</a>
   <a href="profile.php"><img</pre>
src="user.png" style="width: 25px;height:
25px;"></a>
  </nav>
 <style>
   .center{
     margin-left:300px;
     margin-bottom: 10px;
     width: 610px;
     text-align: center;
```

```
}
  </style>
  <body>
    <div class="center">
      <iframe style="margin-top: 40px;border: 2px</p>
solid
black; "src="https://www.google.com/maps/embed?pb=!
1m18!1m12!1m3!1d3782.7596347821354!2d73.885155
71430707!3d18.539761087397853!2m3!1f0!2f0!3f0!3m
2!1i1024!2i768!4f13.1!3m3!1m2!1s0x3bc2c0fdea86eacb
%3A0x9f90341022aa9851!2sGerman%20Bakery!5e0!3m
2!1sen!2sin!4v1614266418156!5m2!1sen!2sin"
width="600" height="450" style="border:0;"
allowfullscreen="" loading="lazy"></iframe>
    </div>
  </header>
</body>
</html>
```

```
//order.html
<html>
  <style>
    input[type="text"]
    {
      background-color:black;
      color:white;
      width: 250px;
      height: 30px;
      border:black;
      border-bottom: 2px solid white;
    body
    {
      background-color: antiquewhite;
    .orderboxs
      background-color: black;
```

```
margin-left: 400px;
  text-align: center;
  border: 2px solid white;
  width:450px;
  height: 500px;
}
p
  font-size: 20px;
  color: white;
}
input[type="textarea"]
{
  background-color:black;
  color:white;
  width: 250px;
  height:80px;
  border: black;
  border-bottom: 2px solid white;
```

```
font-size: 15px;
input[type="text"]:hover
  color: white;
  background-color: black;
input[type="textarea"]:hover
{
  color: white;
  background-color:black;
a
  padding:4px;
  font-size: 20px;
  text-decoration: none;
  color:white;
  background-color:#722727;
```

```
border:2px solid white;
  border-radius: 5px;
  padding-left: 15px;
  padding-right: 15px;
  margin-top: 4px;
}
input[type="submit"]
{
  padding:4px;
  font-size: 19px;
  background-color: #722727;
  margin-top:4px;
  color:white;
  border:2px solid white;
  border-radius: 5px;
  margin-right:80px;
  padding-left: 10px;
  padding-right: 10px;
```

```
}
 </style>
 <body><br>
   <div class="orderboxs">
 <form action="order.php" method="POST">
 <h1 style="font-size: 30px;color: white;">Order
Details</h1>
 Name     : 
 <input type="text" name="oname"
placeholder="FirstName LastName" required>
 Phone No: <input type="text" name="pno"</p>
required> 
 Address :  <input
type="textarea" name="addr" required>
Pin      
  :  
 <input type="text" name="pn" required>&nbsp;
 Landmark: <input type="text"
name="landm" required>
```

```
Pay
Type  :<input type="radio" name="pay"
value="COD">Cash On Delivery<br>
  <input type="radio" name="pay" value="Card"
style="margin-left: 63px;">Card Payment
  <a href="bill.php" style="margin-left: 160px;
float:left;">Cancel</a>
<input type="submit" value="Continue" style="float:</pre>
right;">
</form>
</div>
</body>
</html>
//order.php
<?php
   session_start();
   $c=$_COOKIE["user"];
```

```
$con=pg_connect("host=localhost dbname=example
user=postgres password=cdadadad") or die("Unable to
connect");
    if(isset($ POST["pay"]))
      $n=$ POST["oname"];
      $phone=$_POST["pno"];
      $address=$ POST["addr"];
      $pinn=$ POST["pn"];
      $landmark=$_POST["landm"];
      $pdetail=$ POST["pay"];
      $tt=$_SESSION["total"];
      $dd=date("m/d/Y");
      $co=pg query($con,"Select prodid from cart
where custid=$c and o_status='true'");
      $num=pg num rows($co);
      $orentry=pg query($con,"Insert into orders
values(nextval('ord'),'$address',$tt,'$dd',$c,$num)");
```

```
$orid=pg_fetch_assoc(pg_query($con,"Select
ord_no from orders where address='$address' and
cid=$c"));
      $ord=$orid['ord_no'];
      while($row=pg_fetch_assoc($co))
      {
        $ppid=$row['prodid'];
        if(strstr($pdetail,"COD"))
         {
           $stat='unpaid';
         else
           $stat='paid';
        $op=pg_query($con,"Insert into order_product
values($ord,$ppid,'$stat')");
        if($op)
```

```
$upcart=pg_query($con,"Update cart set
o_status='false' where prodid=$ppid");
      $pentry=pg_query($con,"Insert into payment
values(nextval('pay'),'$dd','$pdetail',$ord,'$n','$pinn','$la
ndmark', '$phone')");
      if(strstr($pdetail,"COD"))
        include "complete.php";
      }
      else
      {
         include "payment.php";
    }
    else
      include "order.html";
```

```
echo "Pay Type Not selected";
    }
?>
//ordetail.php
<html>
<script
src='https://kit.fontawesome.com/a076d05399.js'
crossorigin='anonymous'></script>
<?php
$con=pg_connect("host=localhost user=postgres
dbname=example password=cdadadad") or die("Unable
to connect");
if(isset($_POST["cust"]))
  $ono=$_POST["cust"];
  $or=pg_fetch_assoc(pg_query($con,"Select * from
orders where ord_no=$ono"));
```

```
$pa=pg_fetch_assoc(pg_query($con,"Select * from
payment where order_no=$ono"));
  include "cad.html";
?>
<style>
body
  background-color: antiquewhite;
}
.ordered
  margin-top: -40px;
  background-color: beige;
  margin-left:30%;
  width:500px;
  height: auto;
  border:2px solid brown;
}
```

```
</style>
<body><br>
<br>
<div class="ordered">
  <h1 style="text-align:center;font-
size:30px;">Order</h1>
  <label style="font-size:22px;margin-left:20px;padding-</pre>
right:75px;">Items</label><label style="font-
size:25px;">:<label><br>
  <?php
    $custpr=pg_query($con,"Select * from cart where
custid=(select cid from orders where ord_no=$ono) and
o_status='false'");
    while($row=pg_fetch_assoc($custpr))
    {
      $pd=$row['prodid'];
      $q=$row['quantity'];
      $price=$row['price'];
      $w=$row['weight'];
```

```
$pros=pg_fetch_assoc(pg_query($con,"Select
pname from product where pid=$pd"));
      $prname=$pros['pname'];
    ?>
    <label style="margin-left:170px;font-</pre>
size:20px;padding-bottom:5px;"><?php echo
$prname;?></label>
    <?php
      if((\$w=='0.5')||(\$w=='1')||(\$w=='1.5')||(\$w=='2'))
      {
    ?>
      <label style="font-size:20px;">(<?php echo</pre>
$w;?>KG)</label>
    <?php
      ?>
      <label style="font-size:20px;">(<?php echo</pre>
$q;?>)</label>
```

```
<label style="font-size:20px;">(<?php echo</pre>
$price;?>)</label>
      <?php
    }
  ?><br><br>
  <label style="margin-left:20px;font-</pre>
size:20px;">Total</label>
  <label style="margin-left:84px;font-</pre>
size:20px;">:</label>
  <label style="font-size:20px;margin-</pre>
left:10px;">Rs.<?php echo
$or['total'];?></label><br><br>
  <label style="margin-left:20px;font-</pre>
size:20px;">Delivery
To      &n
bsp;  <?php echo
$pa['fullname'];?></label><br>
  <label style="margin-left:168px;font-size:20px;"><?php</pre>
echo $or['address'];?></label>
  <label style="font-size:20px;">-<?php echo
$pa['pin'];?></label><br>
```

```
<label style="margin-left:170px;font-size:20px;">Near
 <?php echo $pa['landmark'];?></label><br><br>
  <label style="margin-left:20px;font-size:20px;">Phone
Number  :  <?php echo
$pa['phone'];?></label><br>
  <label style="margin-left:20px;font-</pre>
size:20px;">Payment Status:   <?php
  if(strstr($pa['details'],"COD"))
  {
    echo "Cash On Delivery";
  }
  else
    echo "Paid Online";
  }
  ?></label><br>
  <label style="margin-left:20px;font-</pre>
size:20px;">Date</label>
  <label style="margin-left:84px;font-</pre>
size:20px;">:</label>
```

```
<label style="font-size:20px;margin-left:10px;"><?php</pre>
echo $or['ord_date'];?></label><br><br>
</div></body>
<?php
}
?>
</html>
//page1.html
<!DOCTYPE html>
<html lang="en" dir="ltr">
 <head>
  <meta charset="utf-8">
  <meta name="viewport" content="width=device-
width, initial-scale=1.0">
  <link rel="stylesheet" href="page1.css">
  <script
src="https://kit.fontawesome.com/a076d05399.js"></scr
ipt>
```

```
<link rel="stylesheet"</pre>
href="https://cdnjs.cloudflare.com/ajax/libs/animate.css"
/4.1.1/animate.min.css"/>
 </head>
 <style>
  header
   background-image: url(b1.jpg);
  }
   color: rgb(24, 2, 2);
  }
 </style>
 <body>
  <header>
  <nav>
```

<input type="checkbox" id="check">

```
<label for="check" class="checkbtn</pre>
animate__animated animate__slideInDown">
   <i class="fas fa-bars"></i>
   </label>
   animate slideInDown">
   <a href="cust_login.html">Home</a>
   <a href="category.html">MENU</a>
   <a href="aboutus.html">About us</a>
   <!-- <li><a href="#">Services</a>
   <a href="contact.html">Contact</a>-->
   <a href="map.html">MAP</a>
   <a href="login.html">Login/Sign Up</a>
   <a href="profile.php"><img</pre>
src="user.png" style="width: 25px;height:
25px;"></a>
  </nav>
 </header>
</body>
```

```
</html>
//past.php
<?php
  error_reporting(E_ERROR | E_WARNING | E_PARSE);
  $pid=$ POST["pastries"];
  $con=pg_connect("host=localhost dbname=example
user=postgres password=cdadadad") or die("Unable to
connect");
  $res=pg_query($con,"Select * from product where
pid=$pid");
  $row=pg num rows($res);
  if($row==1)
    $rcheck=pg query($con,"Select * from cart where
prodid='$pid'");
    if(!$rcheck)
      echo "Error";
```

```
}
    if(pg_num_rows($rcheck)==0)
    {
      if(isset($_COOKIE["user"]))
      {
         $cid=$_COOKIE["user"];
         $prf=pg_fetch_assoc($res);
         $pr=$prf['price'];
        $r=pg_query($con,"Insert into cart
values($cid,$pid,1,0,'T',$pr)");
  }
  include "pastry.php";
?>
//pastry.php
<?php
```

```
include "catnav.html";
  $con=pg connect("host=localhost dbname=example
user=postgres password=cdadadad") or die("Unable to
connect");
  $res=pg_query($con,"Select * from product where
pcategory='Pastries'");
  if(!$res)
  {
    echo "UNABLE";
  while($row=pg fetch assoc($res))
  $prid=$row['pid'];
  $prname=$row['pname'];
  $ptypei=$row['ptype'];
  $primage=$row['pimage'];
  $price=$row['price'];
?>
<form action="past.php" method="POST">
```

```
<div class="gallery">
      <a target=" blank" href="#">
        <div class="dropdown">
          <img src="<?php echo $primage;?>"
width="150" height="150">
          <div class="dropdown-content">
            <img src="<?php echo $primage;?>"
width="200" height="200">
            <div class="desc"><?php echo
$prname;?><br><?php echo "Rs ".$price;?><br>
               <button class="button" name="pastries"</pre>
value= "<?php echo $prid;?>">Add To Cart</button>
            </div>
          </div>
        </div>
      </a>
      <div class="desc"><img src="<?php echo</pre>
$ptypei;?>" width="20" height="20"> <?php echo
$prname;?><br><?php echo "Rs ".$price;?><br><br>
```

```
<button class="button" name="pastries" value=</pre>
"<?php echo $prid;?>">Add To Cart</button>
      </div>
  </div>
  <?php
  ?>
</form>
</body>
</html>
//payment.html
<!DOCTYPE html>
<html>
<head>
  <meta name="viewport" content="width=device-
width,initial-scale=1">
</head>
```

```
<body>
  <style>
    .loginbox
    {
      background: rgb(114, 112, 112);
      border: 4px solid black;
      color: white;
      top: 50%;
      left: 50%;
      position: absolute;
      transform: translate(-50%,-50%);
      box-sizing: border-box;
      padding: 70px 30px;
      height: 450px;
      width: 500px;
    }
    h1
      margin: -90px;
```

```
padding: 0 0 100px;
      text-align: center;
      font-size: 22px;
    }
    .loginbox p
    {
       margin: 0;
       padding: 0;
      font-weight: bold;
      font-size: large;
    }
    .loginbox input[type="text"],
input[type="password"]
    {
       background: transparent;
       border-top: rgb(114, 112, 112);
       border-left: rgb(114, 112, 112);
```

```
border-right: rgb(114, 112, 112);
  border-bottom: 1px solid white;
  color: black;
  font-size: 20px;
}
.loginbox select
  background:transparent;
  color: white;
  font-size: 20px;
  border: 2px solid black;
.loginbox select option
{
  background-color: black;
  color: white;
```

```
}
a
  text-decoration: none;
  color: white;
.button
{
  color: white;
  background-color: navy;
  width: 200px;
  height: 40px;
  border-radius: 15px;
  border: 2px solid black;
  font-size: 20px;
}
```

.button:hover

```
{
     background-color: red;
     border-radius: 15px;
     color: white;
     border: 2px solid white;
   }
   </style>
 <div class="loginbox">
   <br><br><br><br><
   <h1>Card Payment </h1><br>
   <form action="payment.php" method="POST">
     Card Number <font
color="red">*</font>&nbsp;:
     <input type="text" name ="cardno"
placeholder="Enter Card Number" size=20
required><br>
     Card
Type      <f
ont color="red">*</font> :&nbsp;&nbsp;
```

```
<select name="cardt">
      <option selected value="none">Select</option>
      <option value="1">Master Card</option>
      <option value="2">Rupay</option>
      <option value="3">Visa</option>
      <option value="4">Visa electron</option>
      <option value="5">Maestro</option>
     </select>
     <br><br><
     <p
>CVV       &
nbsp;       &
nbsp; <font color="red">*</font>:&nbsp;
     <input type="password" placeholder="Enter CVV</pre>
code" size="20" name="cvv" required><br>
     Expiry
Date    <font
color="red">*</font>:&nbsp; &nbsp;
      <select name="month">
      <option value="none">--</option>
```

```
<option value="1">01</option>
  <option value="2">02</option>
  <option value="3">03</option>
  <option value="4">04</option>
  <option value="5">05</option>
  <option value="6">06</option>
  <option value="7">07</option>
  <option value="8">08</option>
  <option value="9">09</option>
  <option value="10">10</option>
  <option value="11">11</option>
  <option value="12">12</option>
</select>
<select name="year">
  <option value="none"selected>--</option>
  <option value="1">21</option>
  <option value="2">22</option>
  <option value="3">23</option>
  <option value="4">24</option>
```

```
<option value="5">25</option>
        <option value="6">26</option>
        <option value="7">27</option>
        <option value="8">28</option>
        <option value="9">29</option>
        <option value="10">30</option>
        <option value="11">31</option>
        <option value="12">32</option>
        <option value="13">33</option>
        <option value="14">34</option>
        <option value="15">35</option>
      </select><br>
//payment.php
<?php
  error_reporting(0);
  $cno=$cv=$ct=$opm=$opy=0;
  $cno=$_POST["cardno"];
```

```
$cv=$_POST["cvv"];
  $ct=$ POST["cardt"];
  $opm=$_POST["month"];
  $opy=$_POST["year"];
if(($cno!=0)||($cv!=0)||($ct!=0)||($opm!=0)||($opy!=0)
  {
  if(strlen($cno)!=16)
    include "payment.html";
    include "error.html";
    echo "Card Number Invalid <br>";
  }
  else if(strlen($cv)!=3)
    include "payment.html";
```

```
include "error.html";
  echo "CVV Invalid";
}
else if($opm=="none")
{
  include "payment.html";
  include "error.html";
  echo "Invalid month";
}
else if($opy=="none")
{
  include "payment.html";
  include "error.html";
  echo "Invalid year";
}
else if($ct=="none")
{
  include "payment.html";
  include "error.html";
```

```
echo "Invalid Card type";
  }
  else
  {
    include "complete.php";
    die();
  }
  else
    include "payment.html";
  }
  ?><br><button class="button"><a
href="order.php"
>Cancel</a></button>&nbsp;&nbsp;&nbsp;&nbsp;<butt
on class="button">Pay Now</button>
    </form>
  </div>
</body>
```

```
</html>
//prof.php
<?php
  $p=$_POST["logout"];
  if($p=="Log Out")
  {
    setcookie("user", "", time() - 3600);
  }
  include "profile.php";
?>
//profile.php
<html>
  <head>
  <link rel="stylesheet"</pre>
```

```
href="https://cdnjs.cloudflare.com/ajax/libs/animate.css
/4.1.1/animate.min.css"/>
  <style>
    body{
      margin: 0;
      padding: 0;
      background-size: cover;
      background-position: center;
      background-color: antiquewhite;
    }
    .loginbox
      width:380px;
      height: 490px;
      background-color: black;
      color: white;
      top: 50%;
```

```
left: 50%;
  position: absolute;
  transform: translate(-50%,-50%);
  box-sizing: border-box;
  border:2px solid black;
}
.loginbox h1{
  text-align: center;
  font-size: 30px;
  list-style: none;
  text-decoration: underline;
  text-underline-position: under;
}
a
  text-decoration:none;
  font-size: 22px;
  color:white;
  position:relative;
```

```
margin-left:250px;
  bottom:60px;
  right:135px;
  left: 350px;
  top:-20px;
  padding-left: 60px;
  padding-top: 5px;
  padding-right:60px;
  padding-bottom: 5px;
  background: #722727;
  border-radius:10px;
.message{
  margin-left:10px;
  /* top:500px; */
  margin-top:250px;
  color:white;
  text-align:center;
```

```
font-size:23px;
  font-weight:1000;
a:hover{
  cursor: pointer;
  background: #c03636;
  color: #000;
.button:hover
{
  cursor: pointer;
  background: #c03636;
  color: #000;
.button
{
  font-size: 22px;
  color:white;
```

```
position:relative;
      margin-left:40px;
      margin-top:10px;
      background-color:#722727;
      border-radius:5px;
      width: 300px;
      height:50px;
      border: 2px solid black;
    .loginbox p
    {
      color:white;
  </style>
  <body>
<?php
  if(isset($_COOKIE["user"]))
    $cid=$_COOKIE["user"];
```

```
$con=pg_connect("host=localhost dbname=example
user=postgres password=cdadadad") or die("Unable to
connect");
  include "profile.html";
  $resn=pg_fetch_assoc(pg_query($con,"Select
username from login where cid=$cid"));
  $resp=pg fetch assoc(pg query($con,"Select * from
customers where cid=$cid"));
?>
  top:35px;">UserName:
  <?php echo $resn['username'];?>
  top:35px;">Name:
  <?php echo $resp['name'];?>
  top:35px;">Phone Number:
  <?php echo $resp['phone'];?>
  top:35px;">Email:
```

```
<?php echo $resp['email'];?>
    <form method="POST" action="prof.php">
    <button name="logout" class="button" value="Log
Out">Log Out</button>
    <br><a href="page1.html" style="border-</pre>
radius:5px;border:2px solid black;padding-
left:125px;padding-right:115px;padding-
top:9px;padding-bottom:9px;margin-left:-
310px;top:50px;font-size:25px">Home</a>
    <!--<button class="button"><input type="checkbox"
name="action" value="up">Update Profile</button>--->
    </form>
  <?php
  }
  if(!isset($ COOKIE["user"]))
  {
    // include "profile.html";
  ?>
  <div class="loginbox">
      <h1 >YOUR PROFILE</h1>
```

```
</div>
 <br>
 <div class="message">
 animate__zoomIn">Login To Check Your Profile.
 </div>
 <?php
 ?>
 <a href="login.html">Login</a><br><br><br>
 <a href="page1.html">Home</a>
 <?php
 }
 ?>
 </body>
</html>
```

```
//removepro.php
<?php
  include "removeProd.html";
  $con=pg_connect("host=localhost dbname=example
user=postgres password=cdadadad") or die("Unable to
connect");
  if(isset($_POST["protype"]))
  {
    $name=$ POST["proname"];
    $category=$ POST["procat"];
    $image=$_POST["proimage"];
    $type=$ POST["protype"];
    $price=$ POST["proprice"];
    if(strstr($category,"select"))
    {?><br>
      <label style="font-size:23px;color:white;margin-</pre>
left:90px;">
      <?php echo "Product Category Not
Selected";?></label><?php
```

```
}
    else
    {
      $chkp=pg_query($con,"Select * from product
where pname='$name' and pimage='$image'");
      if(!$chkp)
        echo "Error";
      if(pg_num_rows($chkp)!=0)
      {
        $res=pg_query($con,"Delete from product
where pname='$name' and pimage='$image'");
        if(!$res)
          echo "Error";
        }
        else
        {?><br>
```

```
<label style="font-size:23px;color:white;margin-</pre>
left:60px;">
         <?php echo "Product Deleted From Menu
Successfully";?></label><?php
       }
       else
       {;>
         <label style="font-size:23px;color:white;margin-</pre>
left:90px;">
         <?php
         echo "No Such Products Exist.<br>Please
recheck.";?></label><?php
    }
  }
  else
  {?><br>
    <label style="font-size:23px;color:white;text-</pre>
align:center;">
```

```
<?php echo "Product Type Not
Selected";?></label><?php
?>
//removeProd.html
<html>
  <script
src='https://kit.fontawesome.com/a076d05399.js'
crossorigin='anonymous'></script>
  <style>
    .opt select option
    {
      background-color: black;
      color: blanchedalmond;
      width:200px;
      height:25px;
      font-size: 18px;
```

```
}
input[type="text"]
{
  width: 200px;
  height: 25px;
}
input[type="radio"]
{
  width:15px;
  height:15px;
}
.box
  width:450px;
  height: 450px;
  background-color:rgb(24, 2, 2);
  color: white;
  margin-top: -250px;
  left: 50%;
```

```
position: absolute;
  transform: translate(-50%,-50%);
  box-sizing: border-box;
  border:2px solid rgb(24, 2, 2);
}
.box h1{
  text-align: center;
  font-size: 30px;
  list-style: none;
  text-decoration: underline;
  margin-top: 20px;
  text-underline-position: under;
  color: white;
}
.p input{
  width: 70%;
  /* margin-bottom: 20px; */
.box input[type="text"]
```

```
{
  border:none;
  border-bottom: 2px solid white;
  background: transparent;
  outline: none;
  color:black;
  font-size: 22px;
}
.opt select{
  border:none;
  border-bottom: 2px solid white;
  background: transparent;
  outline: none;
  color:white;
  font-size: 20px;
  width: 65%;
}
.prod{
```

```
margin-top: 10%;
  margin-left: 15%;
}
.box p{
  line-height: 32px;
  font-size: 23px;
  padding: 10px;
}
.select input[type="submit"],input[type="reset"]
{
  border:2px solid black;
  outline: none;
  height: 40px;
  background: #722727;
  color: #fff;
  font-size: 20px;
  width: 160px;
  border-radius: 10px;
  /* padding-bottom: 20px; */
```

```
}
    .select
input[type="submit"]:hover,input[type="reset"]:hover
    {
      cursor: pointer;
      background: #c03636;
      color: #000;
    }
    .price input{
      width: 75%;
  </style>
   <head>
    <meta charset="utf-8">
    <meta name="viewport" content="width=device-
width, initial-scale=1.0">
    <link rel="stylesheet" href="page1.css">
    <script
src="https://kit.fontawesome.com/a076d05399.js"></scr</pre>
ipt>
```

```
k rel="stylesheet"
```

```
href="https://cdnjs.cloudflare.com/ajax/libs/animate.css"
/4.1.1/animate.min.css"/>
   </head>
    <header>
     <style>
      header
    {
     background-image: url(b1.jpg);
    }
     </style>
    <nav>
     <input type="checkbox" id="check">
      <label for="check" class="checkbtn</pre>
animate__animated animate__slideInDown">
      <i class="fas fa-bars" style="color:rgb(24, 2,
2);"></i>
      </label>
```

```
animate__slideInDown">
     <a href="admin home.html">HOME</a>
     <a href="category.html">MENU</a>
     <a href="addProd.html">ADD ITEM</a>
     <a href="removeProd.html">REMOVE</a>
ITEM</a>
     <a href="showord.php">ORDER</a>
RECORD</a>
    </nav>
   </header>
 <body>
   <a href="admin_home.html" style="float:left;font-
size:30px;color:rgb(71, 8, 8);"><i class='fas fa-arrow-
left'></i></a>
 <div class="box">
 <form action="removepro.php" method="POST">
     <h1 style="font-size: 25px;">REMOVE PRODUCT
HERE</h1>
```

```
<div class="prod">
        <div class="p">
          Name : <input type="text"</p>
name="proname" required>
          Image : <input type="text"</p>
name="proimage" placeholder="Image Name with
extension" required>
        </div>
        <div class="opt">
          Category: <select name="procat">
            <option selected</pre>
value="select">Select</option>
            <option value="Breads">Breads</option>
            <option value="Cakes">Cakes</option>
            <option value="Cookies">Cookies</option>
            <option
value="Cupcakes">Cupcakes</option>
            <option value="Pastries">Pastries
            <option value="Snacks">Snacks
          </select>
```

```
</div>
       <div class="price">
        Price :<input type="text"</p>
name="proprice" required>
       </div>
       Type :  <input type="radio"
name="protype" value="veg.png">Veg
    <input type="radio"
name="protype" value="nonveg.png">Non-Veg
       <div class="select">
        <input type="submit" value="Remove
Product">   <input type="reset"
style="margin-left:30px;">
       </div>
   </form>
 </div>
 </body>
</html>
```

```
//snacks.php
<?php
  include "catnav.html";
  $con=pg_connect("host=localhost dbname=example
user=postgres password=cdadadad") or die("Unable to
connect");
  $res=pg_query($con,"Select * from product where
pcategory='Snacks'");
  if(!$res)
  {
    echo "UNABLE";
  }
  while($row=pg_fetch_assoc($res))
  $prid=$row['pid'];
  $prname=$row['pname'];
  $ptypei=$row['ptype'];
  $primage=$row['pimage'];
```

```
$price=$row['price'];
?>
<form action="sn.php" method="POST">
  <div class="gallery">
      <a target="_blank" href="#">
        <div class="dropdown">
          <img src="<?php echo $primage;?>"
width="150" height="150">
          <div class="dropdown-content">
            <img src="<?php echo $primage;?>"
width="200" height="200">
            <div class="desc"><?php echo
$prname;?><br><?php echo "Rs ".$price;?><br>
               <button class="button" name="snacks"</pre>
value= "<?php echo $prid;?>">Add To Cart</button>
            </div>
          </div>
        </div>
      </a>
```

```
<div class="desc"><img src="<?php echo</pre>
$ptypei;?>" width="20" height="20"> <?php echo
$prname;?><br><?php echo "Rs ".$price;?><br><br>
        <button class="button" name="snacks" value=
"<?php echo $prid;?>">Add To Cart</button>
      </div>
  </div>
  <?php
  }
  ?>
</form>
</body>
</html>
//sn.php
<?php
  error_reporting(E_ERROR | E_WARNING | E_PARSE);
  $pid=$_POST["snacks"];
```

```
$con=pg_connect("host=localhost dbname=example
user=postgres password=cdadadad") or die("Unable to
connect");
  $res=pg_query($con,"Select * from product where
pid=$pid");
  $row=pg_num_rows($res);
  if($row==1)
  {
    $rcheck=pg_query($con,"Select * from cart where
prodid='$pid'");
    if(!$rcheck)
    {
      echo "Error";
    if(pg_num_rows($rcheck)==0)
    {
      if(isset($_COOKIE["user"]))
      {
        $cid=$ COOKIE["user"];
        $prf=pg_fetch_assoc($res);
```

```
$pr=$prf['price'];
         $r=pg_query($con,"Insert into cart
values($cid,$pid,1,0,'T',$pr)");
    }
  include "snacks.php";
?>
//showord.php
<html>
<style>
  body
  {
    background-color: antiquewhite;
  button
  {
```

```
font-size: 20px;
    color:rgb(71, 8, 8);
    margin-top:30px;
    border:2px solid rgb(71, 8, 8);
    width: 100%;
    height:40px;
    background-color:beige;
    text-align: start;
    margin-bottom: 0px;
  button:hover
    color: white;
    background-color: rgb(71, 8, 8);
</style>
<body>
<form action="ordetail.php" method="POST">
<?php
```

```
echo "<br>";
  include "cad.html";
  $con=pg_connect("host=localhost user=postgres
password=cdadadad dbname=example")or die("Unable
to connect");
  $0=pg query($con,"Select * from orders");
  while($row=pg_fetch_assoc($o))
  {
    $ord=$row['ord no'];
    $p=pg fetch assoc(pg query($con,"Select * from
payment where order no=$ord"));
?>
<button name="cust" value="<?php echo $ord;?>"
onclick="ordetail.php"><label style="margin-
left:40px;float:center;"><?php echo
$p['fullname'];?></label>
<label style="float:right;">Rs:<?php echo</pre>
$row['total'];?></label>
<label style="float:left;padding-left:40px;">(<?php echo</pre>
$row['pno'];?>)</label>
</button>
```

```
<?php
}
?>
</form>
</body>
```