CONTENTS

Customer Network Architecture

Customer Technical Briefing

PA MediaDirect - Event Plan

Wire Formats Overview

PA MediaDirect Receiver - Installation for Windows

PA MediaDirect Receiver - Installation for UNIX

PA MediaDirect Customer SOFA Receiver Specification

PA NITF Specification

PA NewsML Specification


7901 / Data Format Specification

7901 / Data Format Specification - Election / Honours

Introduction

As part of the PA Mediadirect (PAMD) service, wire customers will be provided with a secure and resilient IP VPN connection, with managed router (MCPE) and receiver software. This document explains how this access connection should fit in with your network.

1. Customer access using a Layer 3 LAN

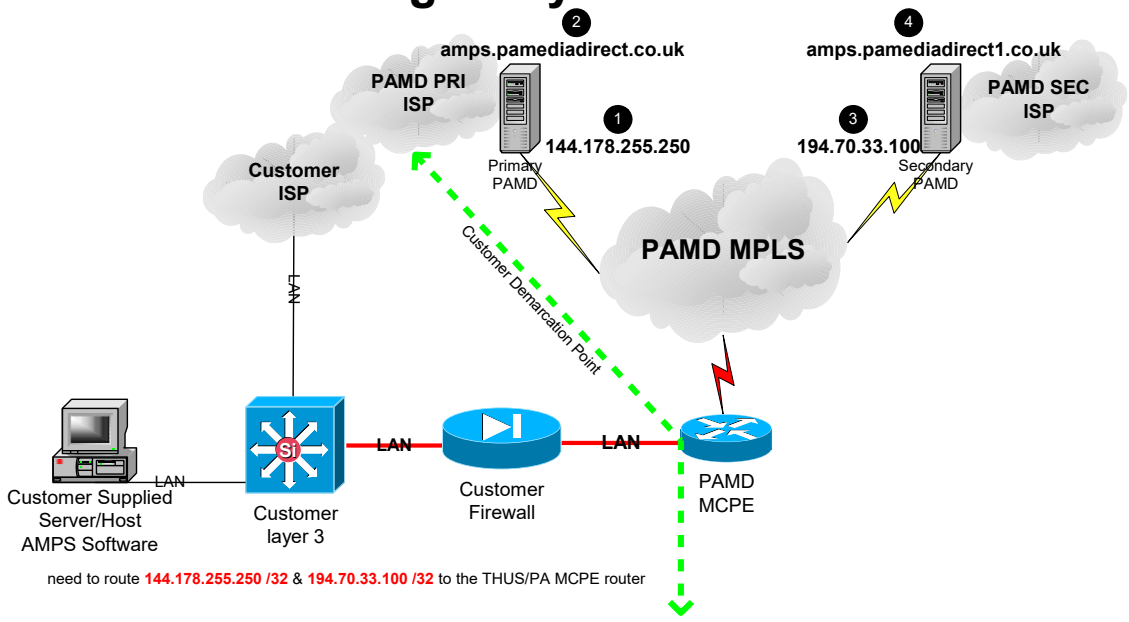

1. primary IP accessed via the MPLS network
2. primary DNS name accessed via the public Internet
3. secondary IP accessed via the MPLS network
4. secondary DNS name accessed via the public Internet

The diagram shows an example network topology. We assume that you have a layer 3 network and a firewall in place protecting your network.

The PAMD receiver client needs to access PAMD servers using particular IP's, and it also needs access to public DNS names for business continuity purposes.

PA has reserved, from PA owned IP ranges, two IP addresses (1 and 3 above) for this purpose. Although these are public IP's they are only accessible via the private MPLS network. We've chosen this design so that the PAMD IP's will not conflict with your network.

2. Customer network configuration

The only routing change we ask you to make is to add two routes; 144.178.255.20 /32 & 194.70.33.100 /32 and point them to the PAMD MCPE router that will be installed for you.

The PAMD receiver client connects to PAMD using TCP port 443, and you will need to add any necessary rules to your firewall configurations to enable this.

The DNS names (2 & 4 above) are advertised by PA on the public Internet, and no changes should be need by you to access these; they will just follow your default Internet route.

3. Customer Support

If you have questions or require further information in the first instance please contact PA Customer Services.

PA Customer Services
Tel: +44 (0)1430 455337
Email: customer.services@pa.press.net

Summary


PA Mediadirect provides customers with a fast and reliable delivery service and a choice of connectivity, interfaces and format options.
PA Mediadirect is available via both a resilient secure IP VPN service as well as the public Internet. Internet access is deployed with connectivity from multiple Internet Service Providers to ensure the reliability of this access method.
As part of PA Mediadirect, PA provides receiver software that customers can install on Microsoft Windows, Solaris and Linux hosts. Customers can optionally chose to receive content via Internet access using FTP or web services.
PA Mediadirect supports PA data formats, as well as XML wire messages.
In conjunction with the supplied receiver software and appropriate customer supplied hardware, the text serial interface is supported.

Benefits of the PA Mediadirect service for Comprehensive and PACE wire delivery include:

- Fast download speeds, providing timely delivery
- Connection monitoring and Internet back-up
- Choice of access methods, and opportunities to consolidate communication links
- Minimal PA equipment required and control over receiver software
- Increased choice of presentation interfaces
- Option to migrate to XML formats with enhanced metadata

Network topology

PA Mediadirect is implemented on THUS MPLS IP VPN service. This service is split into two areas, the C-network for THUS IP VPN customers and the Provider (THUS) network (P-network).
Sites within the customer network are linked to the provider (P-network) via a customer edge (CE) router. CE routers are connected to the P-network over standard Layer 2 access circuits. At the edge of the P-network the CE router links to a Provider Edge (PE) router. PE routers actively participate in customer routing to guarantee optimum routing. The PE routers are partitioned to provide a separate routing instance for each THUS customer to ensure complete isolation between THUS customers. At the core of the MPLS network are Provider (P) routers, which provide the transit transport across the provider backbone and do not hold or interact with any customer routes.

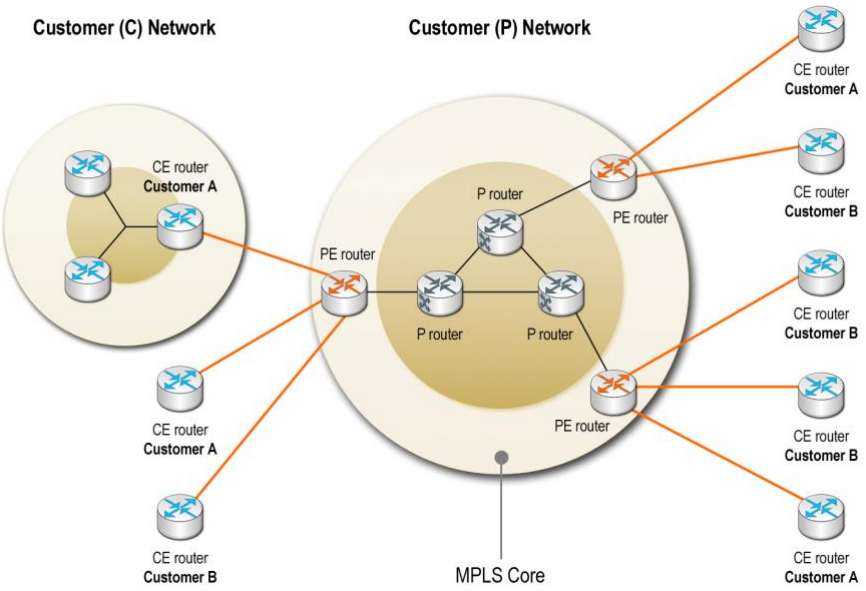

Network Security

PA Mediadirect is implemented with safeguards to ensure PA and customer data is secure over THUS MPLS service and that PA customers are isolated from one another and from PA.
The techniques employed include the use of unique identifiers, which are pre-pended to traffic, unique customer routing tables, LAN IP address filtering and half-duplex Virtual Routing Functions (VRF).
PA Mediadirect delivery servers are secured behind enterprise class firewalls, and managed routers (MCPE) feature a stateful inspection firewall.
PA recommends customers firewall PA Mediadirect access connections in line with their security policies.
The security features inherent in the THUS MPLS IP VPN are:

- Address space and routing separation.
- No visibility of core network.
- Resistance to label spoofing.

Address Space and Routing Separation

With a THUS MPLS IP VPN, two clients can use overlapping IP addresses. All THUS clients with separate MPLS IP VPNs can use the whole range of private IP addresses (RFC1918) or any other addressing they choose. Each THUS client can run their IP VPN without interference or reference to any other client, or from any traffic in the core network. For this to work, each THUS client's IP addresses must be made unique and the IP addresses used in the network core at THUS must also be separated from the addresses belonging to other customers. This address separation is achieved with different virtual routing/forwarding (VRF) instances on the Provider Edge (PE) router for each customer connected to that PE router.
At the PE router an incoming packet is passed to the appropriate VRF based on the physical port or channel that the packet was received on. The packets are then forwarded between the MPLS routers labelled with an MPLS header that includes a VPN identifier. This ensures that the packets are processed by the appropriate VRF as they pass out of the MPLS network at a PE router.
The routing table on each VRF is populated with routers to the customer edge device using standard routing protocols or static routes. The routes to other VRFs and other sites are learned from the other PE devices using multi-protocol BGP.
MP-BGP does not open a separate routing connection for each VPN, instead it flags each route with a route distinguisher (RD) – this is a unique number that appears before the IPv4 address. This ensures the correct routes are learnt by the correct VRFs.
Using this architecture it is extremely difficult to intrude into a VPN from either the Internet or another VPN in the same way that it is impossible to snoop on one customer's ATM PVC from another's. This has been independently tested and confirmed by third-party testing companies such as Miercom.

Separation of the Core

The core network is a separate IP network – it carries IP packets and MPLS packets. The IP packets are part of a separate private IP network only accessible by THUS. This network is used to carry the MP-BGP data and other management traffic. It is configured so that it is impossible to route directly from a VPN to the core network or vice versa.
When a customer VPN packet is sent to its destination, the forwarding is done by the P routers looking at the external MPLS label and not the encapsulated IP packet. As the PE router adds the MPLS header to the incoming packet for every packet arriving at its external interface, it is impossible for a customer connected to a PE router to generate an IP packet that would be seen un-encapsulated by a core router.

Label Spoofing/MPLS Injection

If a malicious person tries to insert a packet into the THUS network with an MPLS header already attached, in an attempt to send data into another customer's network, the Cisco routers used by THUS are configured to drop any MPLS packets received on a customer interface. The interfaces are configured without MPLS by default. If someone attempts to assign an interface with MPLS to a VRF, a warning message is displayed. These two controls ensure that label spoofing remains highly unlikely.


Network Management

The security of network management interfaces is critical to the security of the network and is dependent on the controls used to protect them and on the overall security of the operator. The MPLS IP VPN from THUS is

implemented with a number of key security controls that protect the management interfaces, the THUS internal network and the physical devices themselves. For example, TACACS is used to log all commands on the network and to provide authorisation, and access control functionality. Regular password changes are enforced for all THUS network administration staff.

Site Access Connections

As part of the PA Mediadirect service, customers are provided with an IP VPN site access component, managed router (MCPE) and a back up access method, with automated fail over (see receiver software below).
The Standard site access component is a private ADSL connection (PaDSL) at 512kbps downstream with a 1:1 contention ratio. The MCPE is a Cisco 1801 router.
PaDSL is a THUS service based on BT's Datastream product, that allows private virtual paths to be mapped from a particular exchange, into the THUS network via In Span Handovers. The DSL delivery is private (doesn't touch the Internet), reliable and strictly contention controlled.
The backup service will be provided via the Internet.

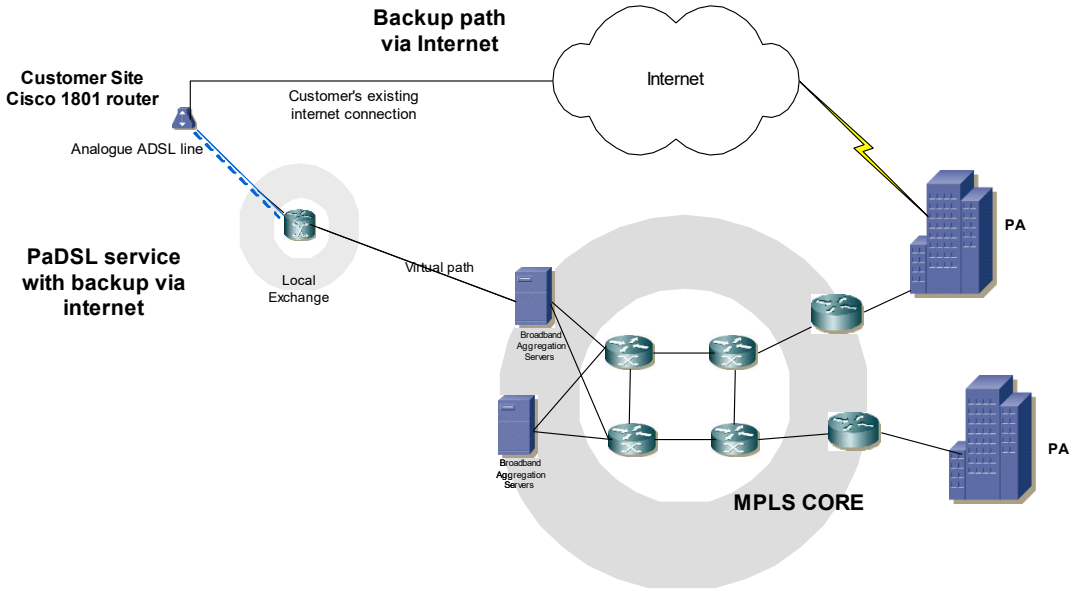

To match customer preferences, in addition to the Standard site access component PA Mediadirect support two further access methods - Standard Plus and Premium.
The Standard Plus site access component is a leased line with Internet backup. The Premium site access component will be diverse routed leased lines (subject to site survey). Further details can be found in Appendix A. Customers may also upgrade to a rack mountable router (Cisco 2801). Where an Internet back up is not available an ISDN backup service can be requested.
Bandwidths can be varied to be appropriate to the services delivered. The Standard (PaDSL) access method can be increased up to 2mbps. Leased line bandwidth has a wide range up to 10mbps and above, all uncontended.
PA Mediadirect access connections will be monitored and supported 24 hours a day, 365 days a year. Quality of service target levels for IP VPN access components will be <50ms. Access connection target availability will be 99.5% for PaDSL and 99.95% for leased lines. Target fault clearance times for PaDSL will be 20 hours, and 5 hours for leased lines.

Receiver software

As part of the PA Mediadirect service, customers are provided with receiver software, called the PA Mediadirect Receiver (PA MDR). Alternatively PA Mediadirect customers may request FTP or SMTP delivery.

The PA MDR provides a greater quality of service, superior monitoring and logging, plus enhanced receive-side functionality than FTP and HTTP protocols. The PA MDR also encrypts data in transit. PA recommends that customers use this option.


The PA MDR makes a connection to the PA Mediadirect delivery servers over the THUS MPLS IP VPN or the public Internet. PA will configure these options and automated fail over, dependent on the selected site access component. The receiver makes a secure authenticated connection to the delivery servers using TCP port 443. This is the SSL port and is typically allowed by most corporate security policies.

Once established, this connection acts as a secure, buffered, and resilient software-only virtual circuit through which PA content (articles, photos, and other formats) are streamed in real-time. Once received, the content is stored as files on disk (typically the local hard drive), ready to be loaded into an editing system, content management system or database repository. The content stream can also be converted into a serial stream configured to serial or USB ports. Multiple TCP/IP sockets are supported as well.

The receive software implements an application-level, reliable, and persistent connection. All data packets are tracked for successful reception. In the event of hardware or network problems, data that would have been sent during the outage is cached on the PA side. Moreover, the software will automatically and continuously try to re-establish its connection. Once the connection has been re-established, cached data will be re-sent immediately (no request or intervention is necessary), thereby insuring zero data loss.

PA MDR requires a Microsoft Windows (Windows 2000 Server; Windows XP/Server 2003), Linux (certified by PA on RedHat Enterpise), or Solaris machine, which is to be provided by PA Mediadirect customers. The minimum specification for the receiver software is an 800MHz Pentium, with 256MB RAM and 10 MB of free disk space. Further disk capacity may be required dependent on subscription and customer preferences.

Schematic

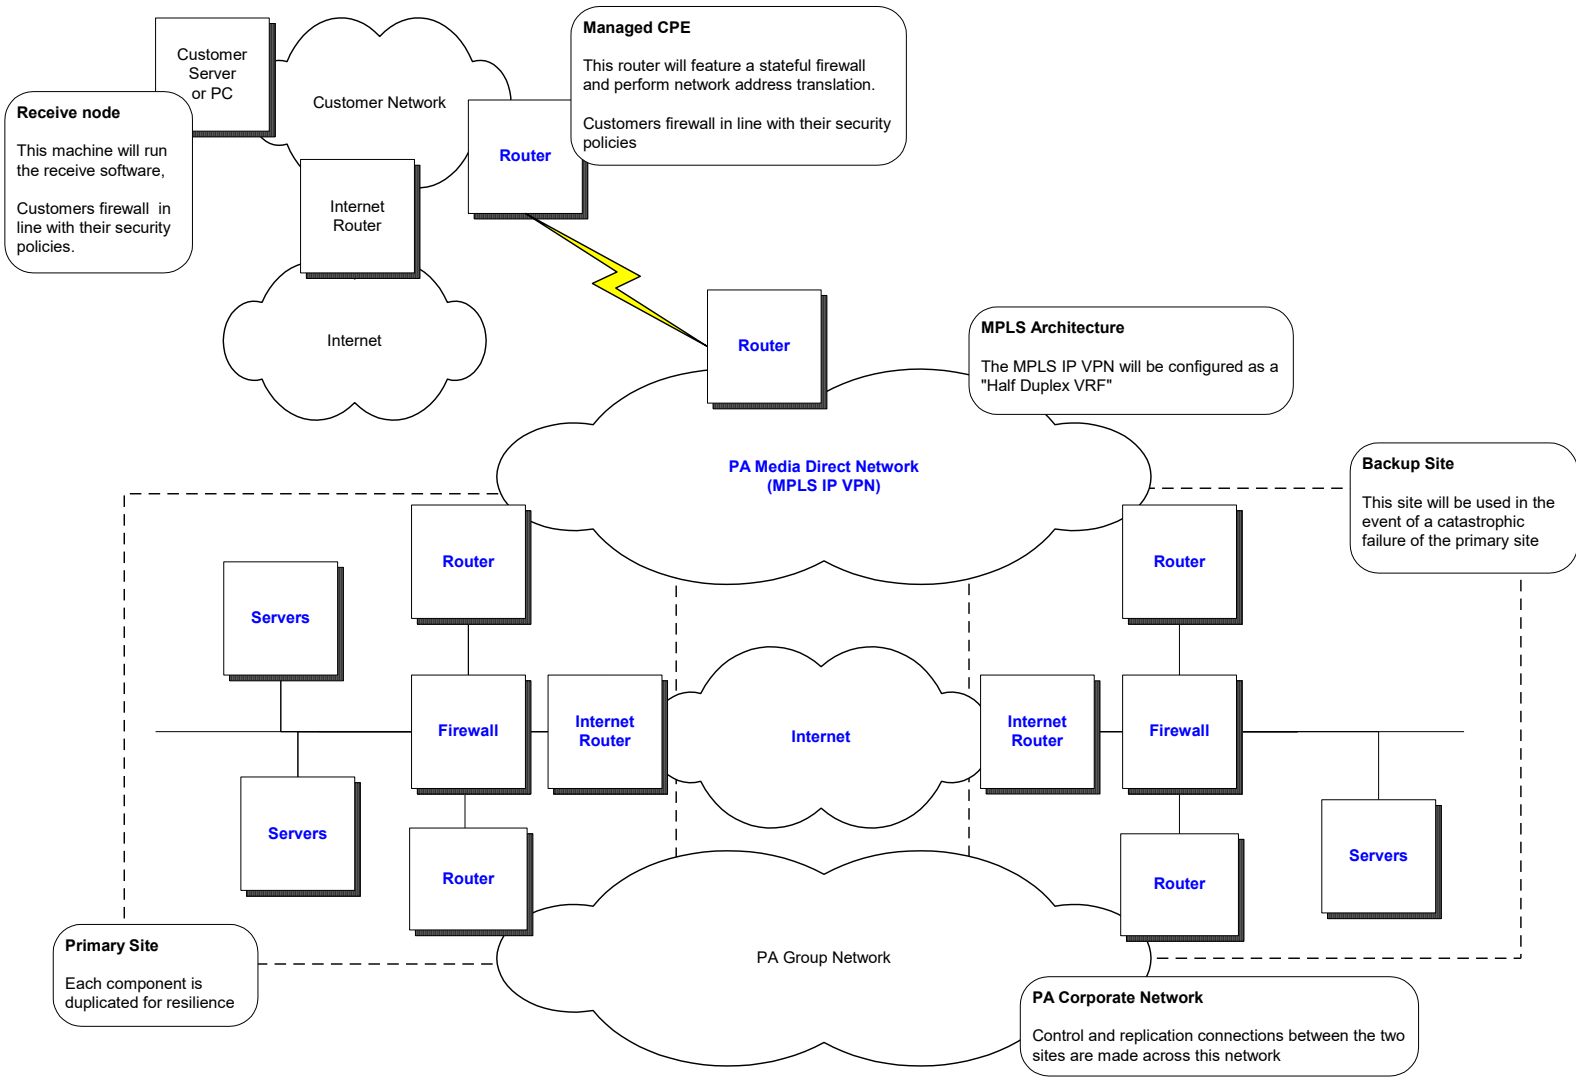

Customer Server or PC
Customer Network
Receive node
This machine will run the receive software,
Customers firewall in line with their security policies.
Router
Managed CPE
This router will feature a stateful firewall and perform network address translation.
Customers firewall in line with their security policies
Internet Router
Internet
Router
MPLS Architecture
The MPLS IP VPN will be configured as a "Half Duplex VRF"
PA Media Direct Network (MPLS IP VPN)
Backup Site
This site will be used in the event of a catastrophic failure of the primary site
Router
Router
Servers
Firewall
Internet Router
Internet
Internet Router
Firewall
Servers
Router
Router
Servers
Primary Site
Each component is duplicated for resilience
PA Group Network
PA Corporate Network
Control and replication connections between the two sites are made across this network

Appendix A

In addition to the Standard site access component (PaDSL 512kbps 1:1 contention) PA Mediadirect offer a choice of site access methods to suit customer preferences.


Standard Plus

The Standard Plus site access component is a leased line at 512kbps. The MCPE will be a Cisco 1801 router. Security is maintained by routing the leased line directly into the MPLS core. The backup service will be provided via the Internet.

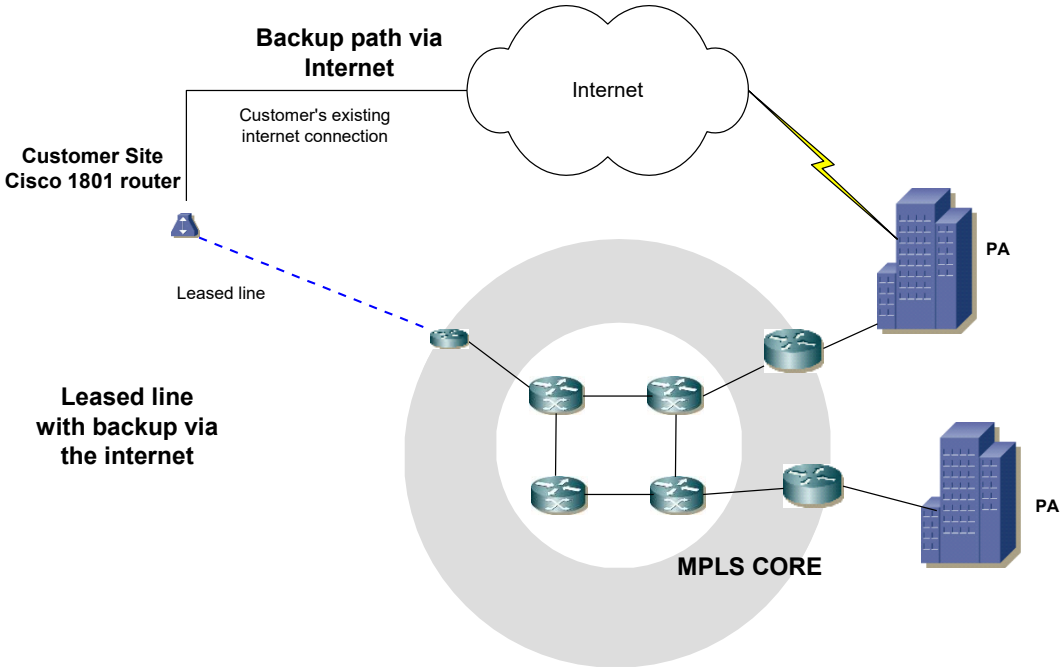

Premium

The Premium site access component is dual diverse routed (subject to survey) leased lines at 512kbps. Again, security is maintained by routing the leased lines directly into the MPLS core. The leased lines touch down at separate points on the MPLS network for resilience.

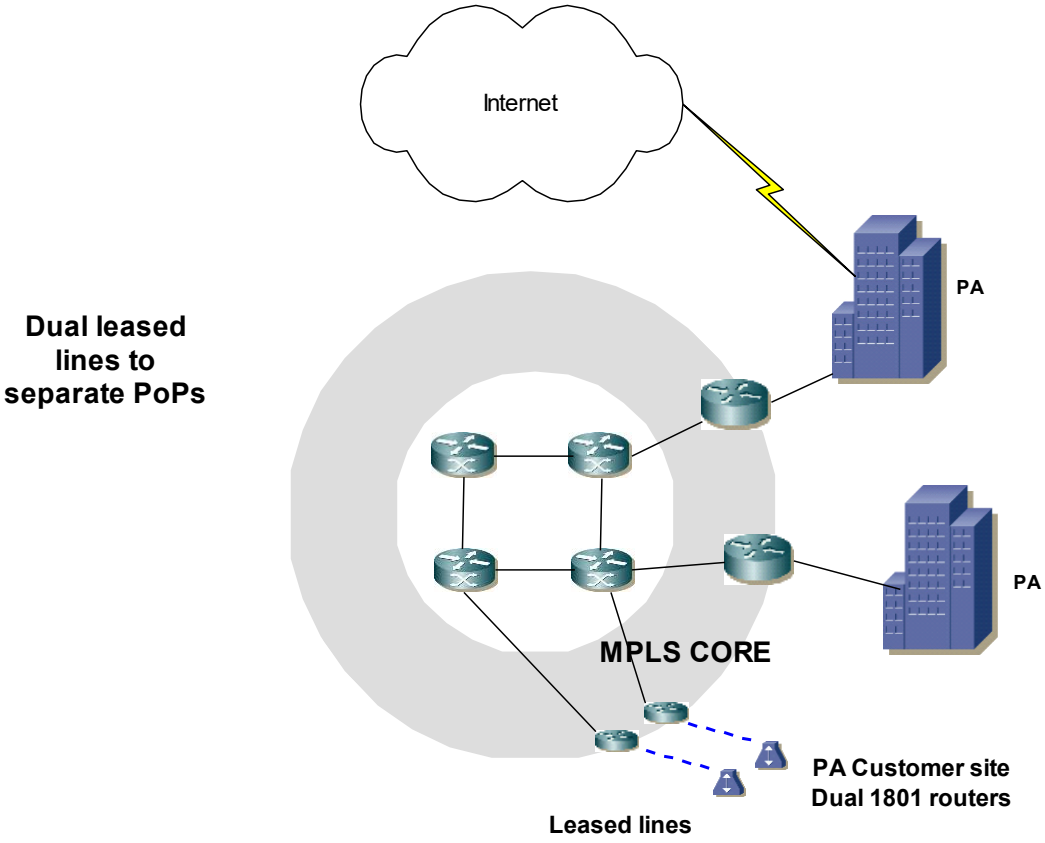

Glossary

Term	Description
ADSL	Asymmetric Digital Subscriber Line.
ATM	Asynchronous Transfer Mode is a network technology based upon transferring data in cells.
BGP	Border Gateway Protocol. An inter-domain routing protocol.
FTP	File Transfer Protocol is a commonly used protocol for exchanging files.
Half-Duplex VRF	The MPLS VPN Half-Duplex VRF feature prevents local connectivity between subscribers at the spoke provider edge (PE) router and ensures that a hub site provides subscriber connectivity.
HTTP	HyperText Transfer Protocol is a request/response protocol.
MCPE	Managed customer premise equipment.
MP-BGP	Multiprotocol BGP is an enhanced BGP that carries IP multicast routes.
MPLS	Multi-protocol Label Switching. A packet-forwarding technology, that applies data link layer labels to tell switching nodes how to forward data.
NewsML	NewsML is an XML standard for exchanging news stories and associated objects. NewsML was developed by the International Press Telecommunications Council.
NITF	News Interchange Text Format is an XML standard for exchanging text news. NITF was developed by the International Press Telecommunications Council.
PaDSL	Private Access DSL is a solution for creating secure private broadband VPNs
PVC	Permanent Virtual Circuit.
SMTP	Simple Mail Transfer Protocol.
SSL	Secure Sockets Layer.
TACACS	Terminal Access Controller Access Control System.
VPN	Virtual Private Network uses tunnelling to encrypt all information at the IP level
VRF	Virtual Routing and Forwarding.

PA MediaDirect - Event Plan

Introduction


This is an outline of the provision process for PA Mediadirect aimed at making you aware of the stages we will follow in delivering your service. You will be kept informed of the progress at key points during the delivery process. You may also contact PA Customer Services (E: customer.services@pa.press.net or T: +44 (0)1430 455337)

The PA Mediadirect VPN and Receiver installation processes will proceed in parallel. PA recommends that customers install the software and test over the internet prior to installation of the Mediadirect VPN.


PA Mediadirect VPN installation

Target lead times for the provision of access connections are subject to available capacity and wayleaves. Following receipt of Mediadirect agreements the targets for PA Mediadirect standard (secure broadband) is 30 normal business days, and for Mediadirect standard Plus (leased line) is 35 normal business days. The provisioning process for each type of connection is as below.

PA Mediadirect standard – secure broadband

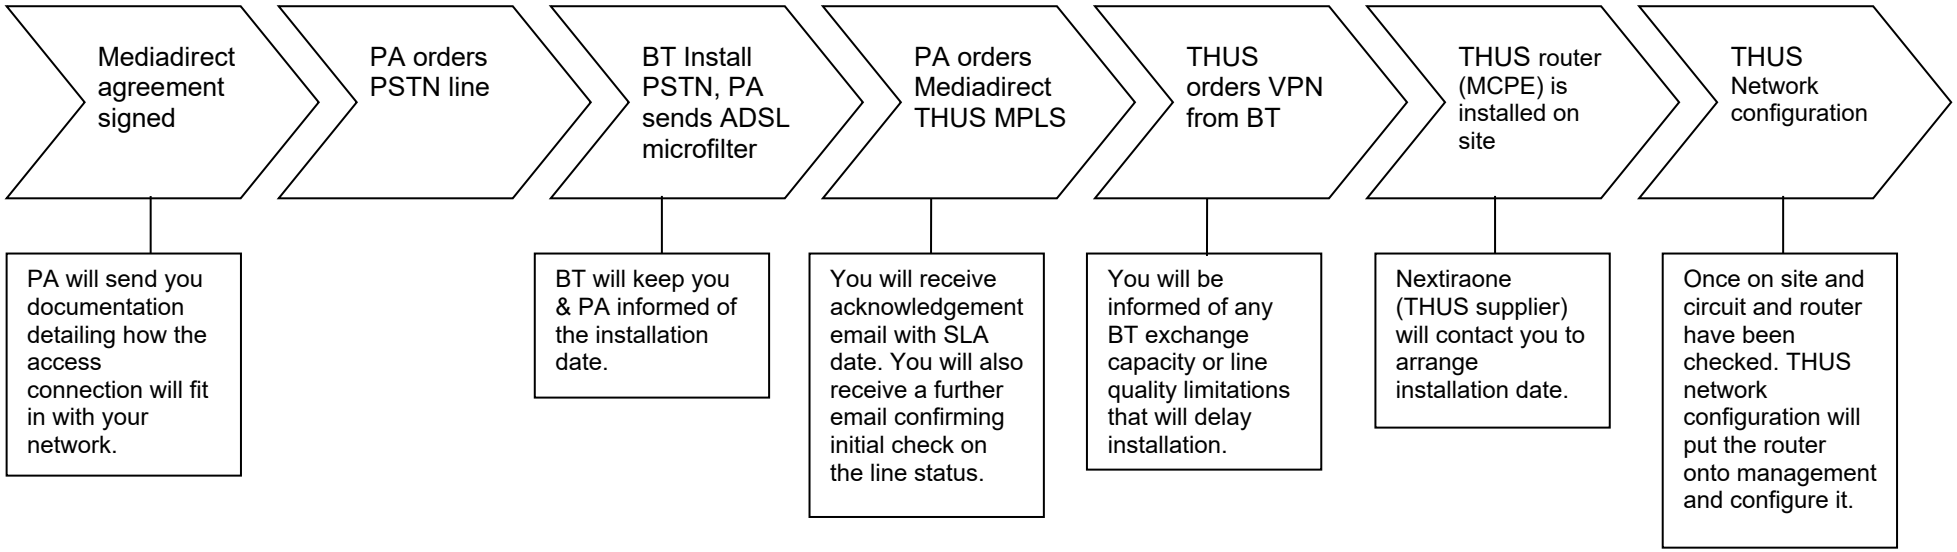


PA Mediadirect standard plus – leased line

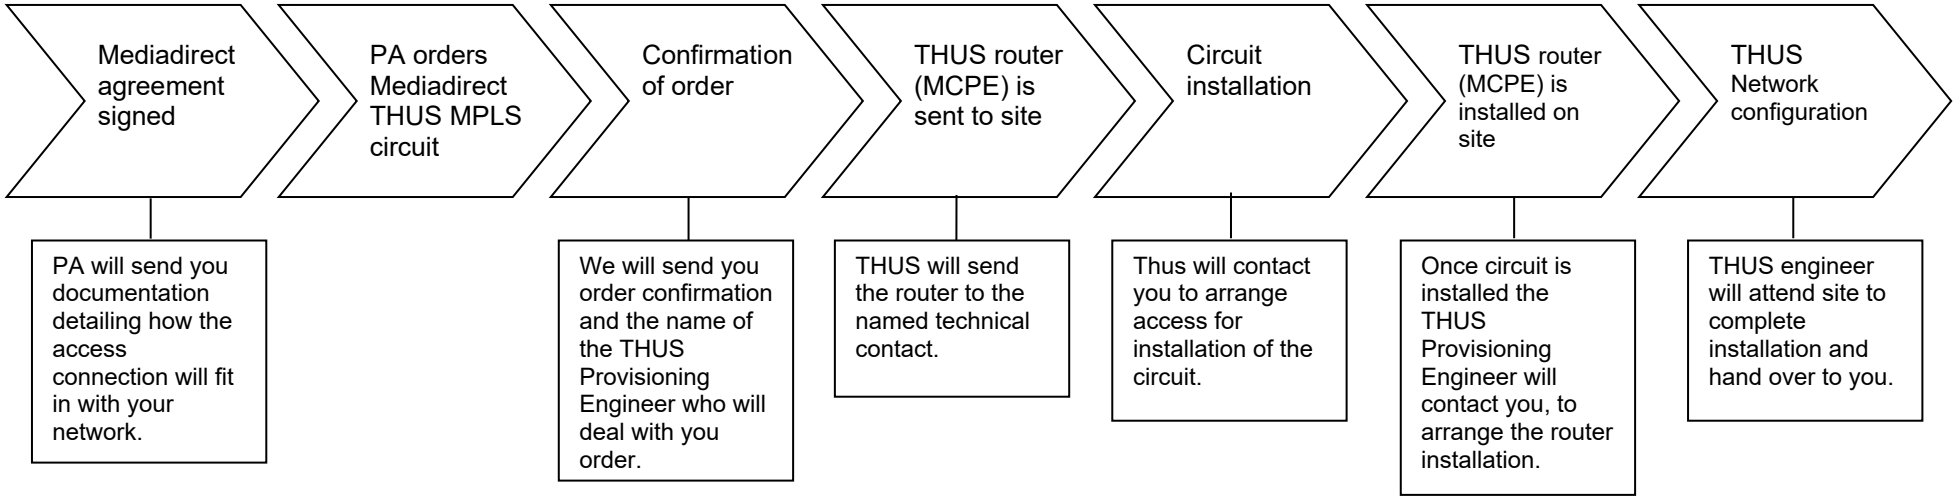

PA Mediadirect Receiver installation

As part of the PA Mediadirect service, customers will be provided with receiver software called the PA Mediadirect Receiver (PA MDR). PA recommends that customers install the software and test over the internet in tandem with installation of the PA Mediadirect VPN. The target lead time for provision of the PA MDR is 5 normal business days from receipt of application configuration form.

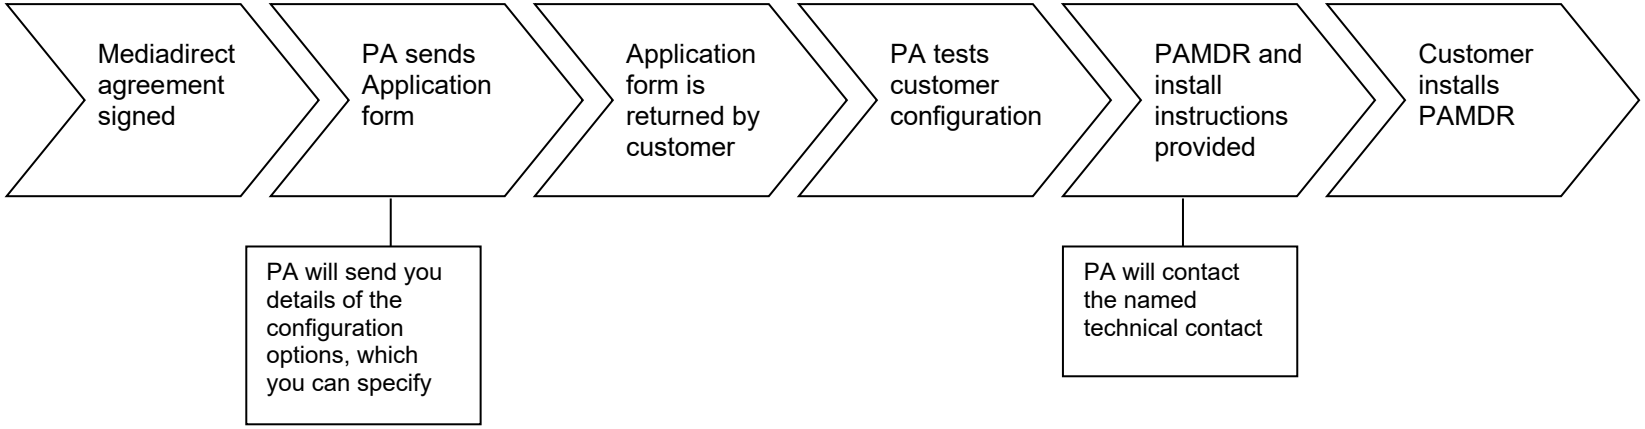

Wire Formats Overview

Message type		**Mediadirect formats**
Articles	*Rolling feed of breaking news sport and features*	PA IPTC 7901 NITF **NewsML**
Teletype	*Space aligned sports tables and results, stocks and shares, election results data*	PA TTY (IPTC 7901) NITF NewsML
Data Format	*Sports tables and results, stocks and shares, and election results* *Designed to be re-processed into page ready galleys*	PA Data Format (IPTC 7901)
Fast Results	*Sports results*	PA Fast results (IPTC 7901)
Pictures	*Rolling feed of news and sport pictures*	500k JPG (average)

Introduction

As part of the PA Mediadirect (PAMD) service, wire customers will be provided with receiver software called the PA Mediadirect Receiver (PAMDR). This document details the installation on Windows 2000 server, Windows XP and Windows Server 2003 operating systems.

1. Pre installation

Prior to installation you will be emailed a location from where you can download the installer program with a license serial number and username for your installation. You password will be emailed separately.

Please refer to PA Mediadirect customer LAN documentation for details of the routing required by PAMDR. For a typical installation this will require being able to route to both 144.178.255.20 and 194.70.33.100 and to resolve primary and secondary DNS amps.pamediadirect.co.uk and amps.pamediadirect1.co.uk. Please also note that PAMDR connects to PAMD using TCP port 443 and you may need to add any necessary rules to your firewall configurations to enable this.


Please note that **PAMDR does not purge populated directories** of text or picture files. See systems interfaces section 5.

2. Installation Steps

Please run the install shield program and follow the installation steps in the usual way.


2.1 Installation folder

After reading the license agreement, the first screen you will see asks you where you would like to install the software. For ease of use, we recommend the default location.

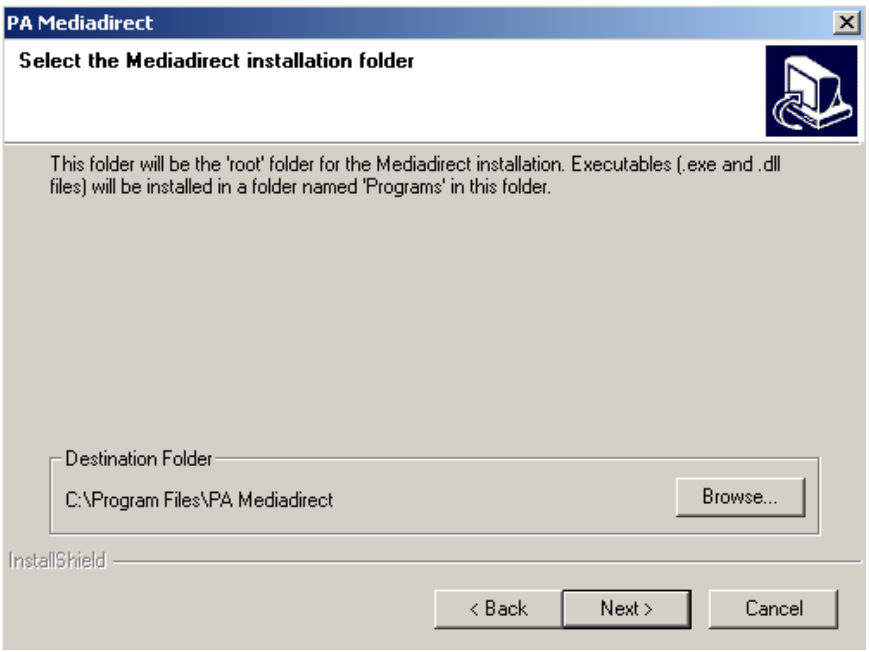


2.2 Client set up
The setup type window has four choices. Selecting the 'Mediadirect installation' option will install the typical components and connection information needed for PAMD. Unless you require serial presentation of text please select this option.

If you require serial presentation of text please choose the custom installation option and select AMPS interciever, AMPS Sofa and AMPS fanout from the available options. Please refer to section 5 below for further information on serial presentation of text.

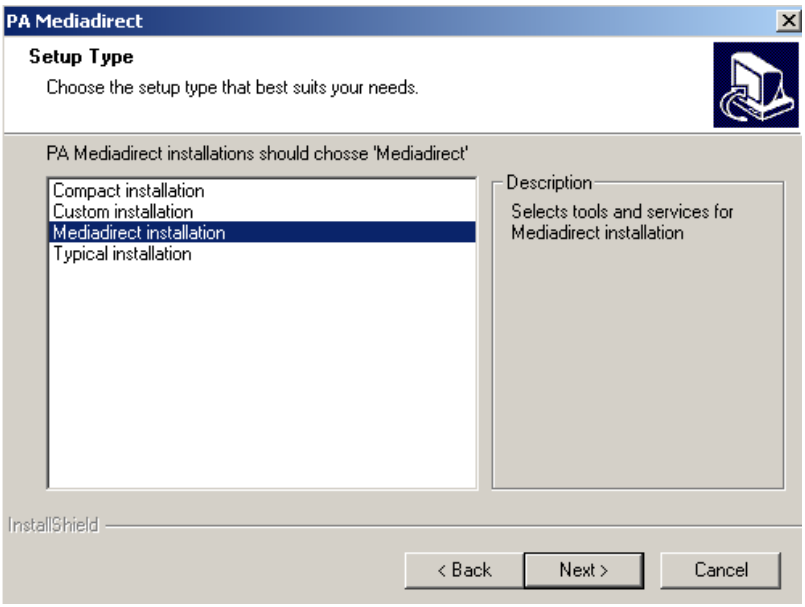

2.3 Mediadirect icons
The next window allows you to select a folder in which the Mediadirect icons will be placed. We recommend the default location.

2.4 Account information
You are now required to provide your account details. Please enter the license serial number, username and password details, which have been supplied to you.

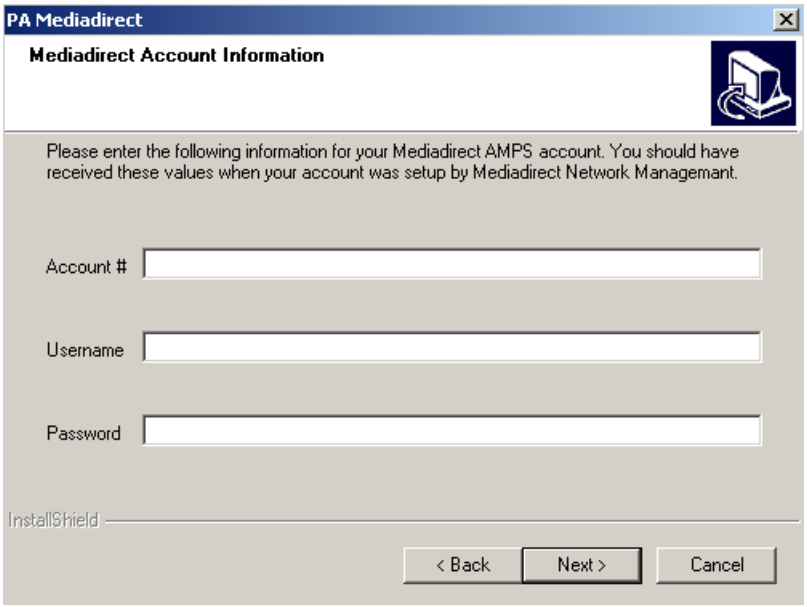


2.4 Server names
You will now be asked to enter the PAMD server names, which your PAMDR will connect to for its feed. These options will have been pre-filled for you.

Primary	144.178.255.20
Secondary	amps.pamediadirect.co.uk
Tertiary	194.70.33.100


Quaternary is amps.pamediadirect1.co.uk

Please check and accept the default options.

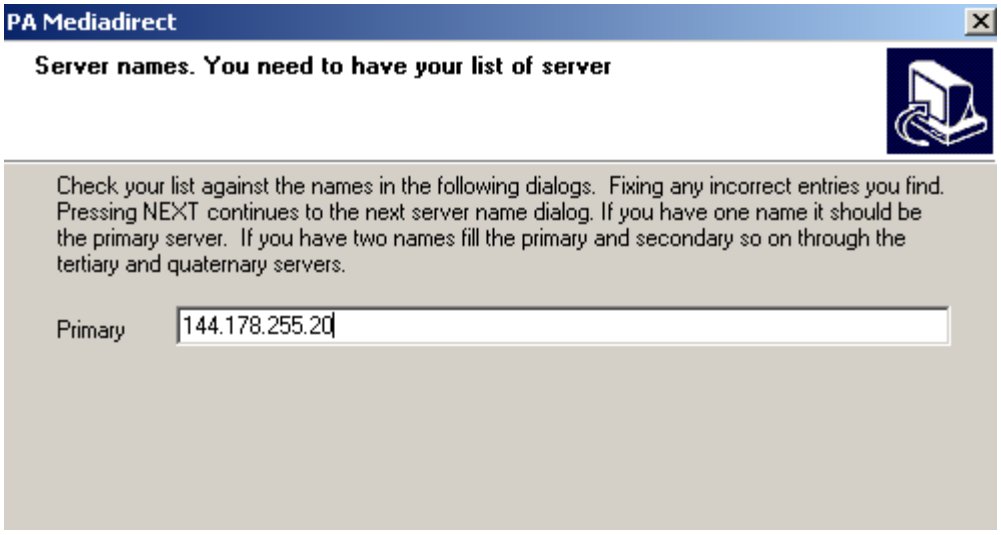


2.4 Fanout cache


The Fanout service is responsible for distributing files received by your client on the file system. The selected cache directory should be on the local file system. For ease of use and future support we recommend the default cache folder.

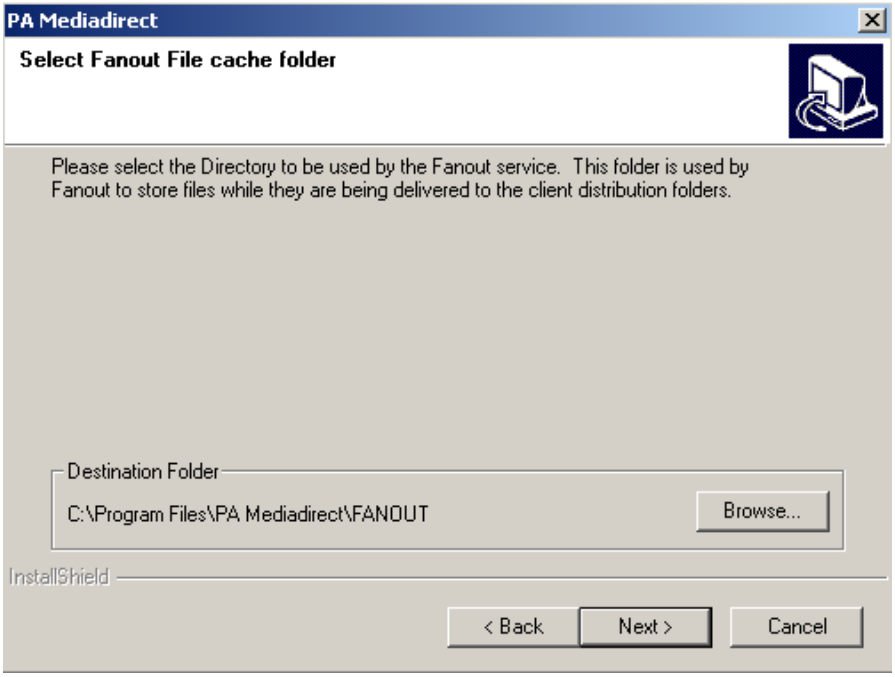

2.5 Fanout distribution
PAMDR fanout service will create directories for each content type and service that you receive within the selected distribution base folder. This directory should be on the local file system. The default destination is C:\Program Files\PA Mediadirect\PAFeed. For ease of use and future support we recommend the default folder.

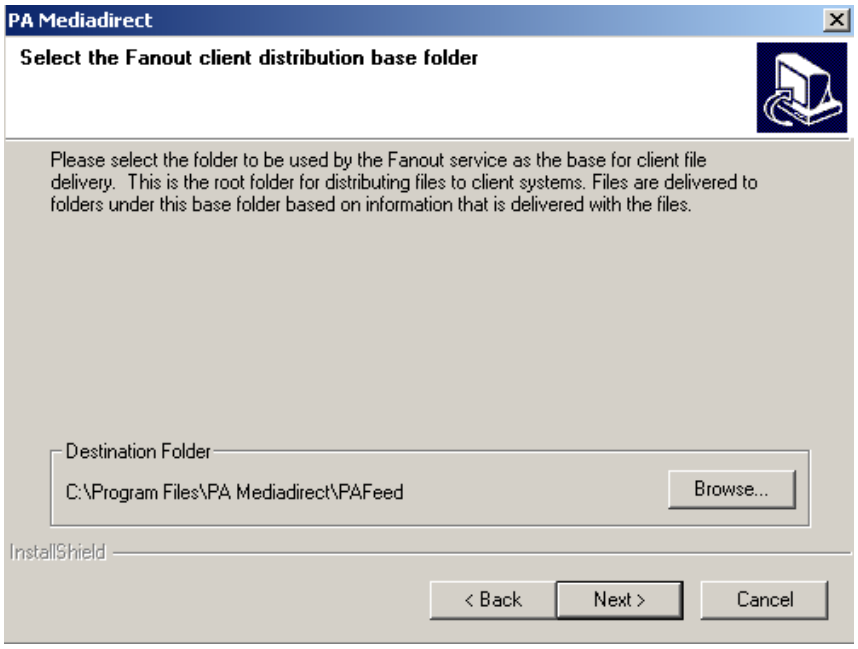

2.5 Installation complete
The Installation is now complete and you will need to restart the computer to establish a connection to PAMD.

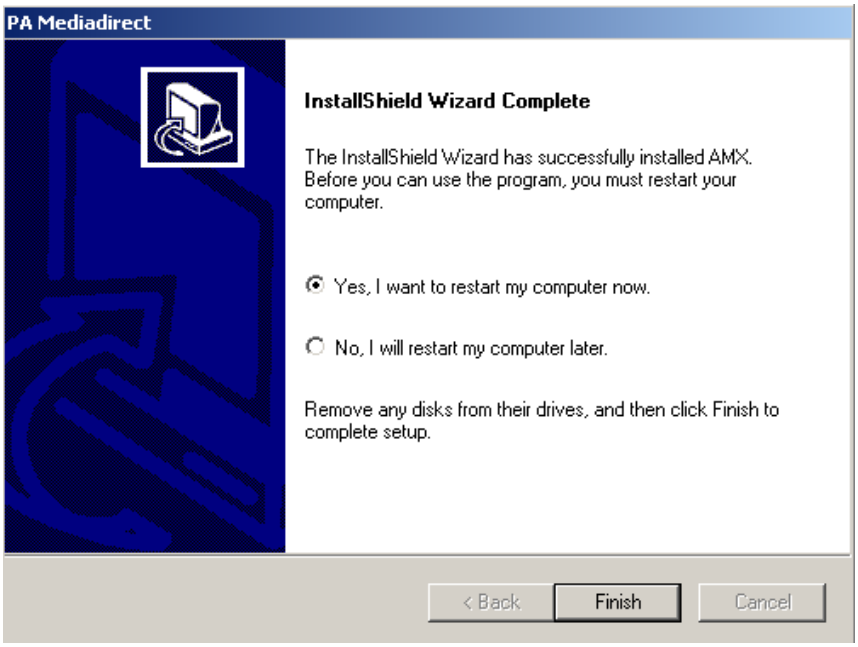


3. Connection diagnostics

When the computer has been rebooted, PAMDR services will start up automatically and PAMDR will attempt to connect to PAMD.

The status of the connection will initially be pending, and will move to online once the connection to PAMD is established. The PA feed should then start to arrive in: C:\Program Files\PA Mediadirect\PAFeed.

Running the amxdiag program from the windows menu or from the command line C:\Program Files\PA Mediadirect\Programs\amxdiag.exe, enables you to check the status of the connection.

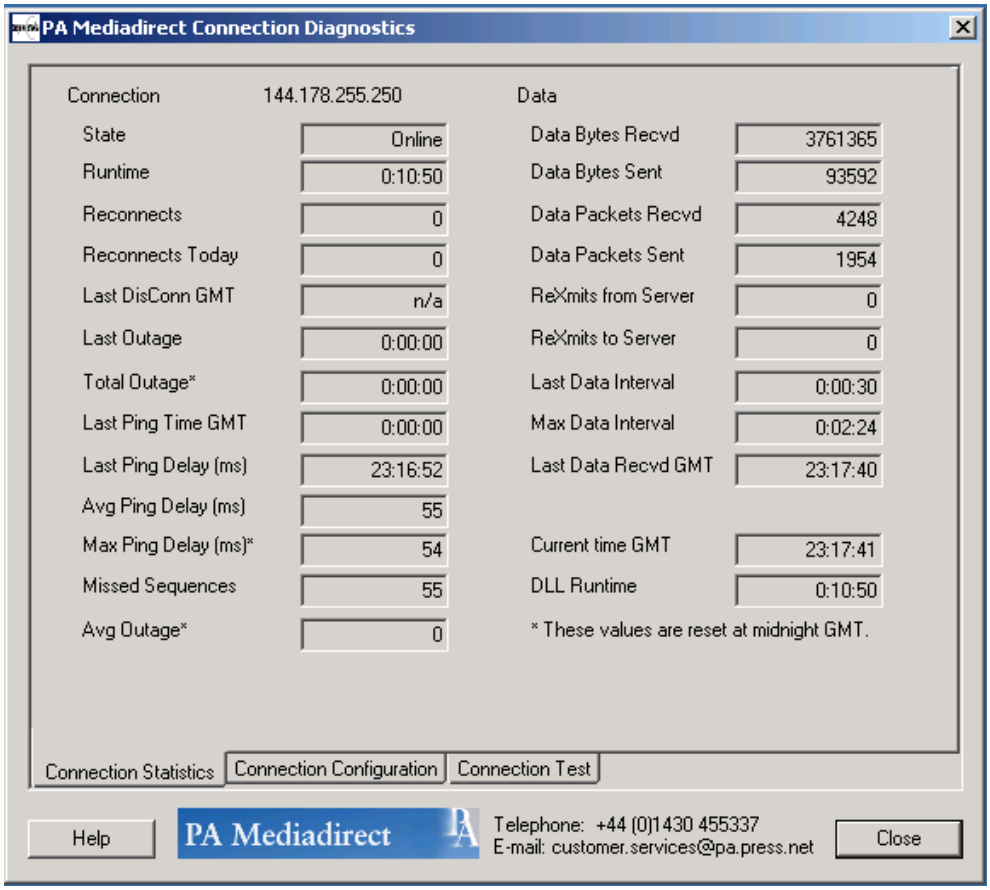


There are two further tabs in the amxdiag program. The connection configuration tab allows you to set and edit proxy server information if required.

The connection test tab in amxdiag can be used in conjunction with PA to troubleshoot connection problems.

4. PA Mediadirect statistics

During normal operation the PA Mediadirect statistics application can be used to monitor the receipt of data.

The statistics program fanoutstats can be run from the windows menu or from the command line C:\Program Files\PA Mediadirect\Programs\FOStats.exe

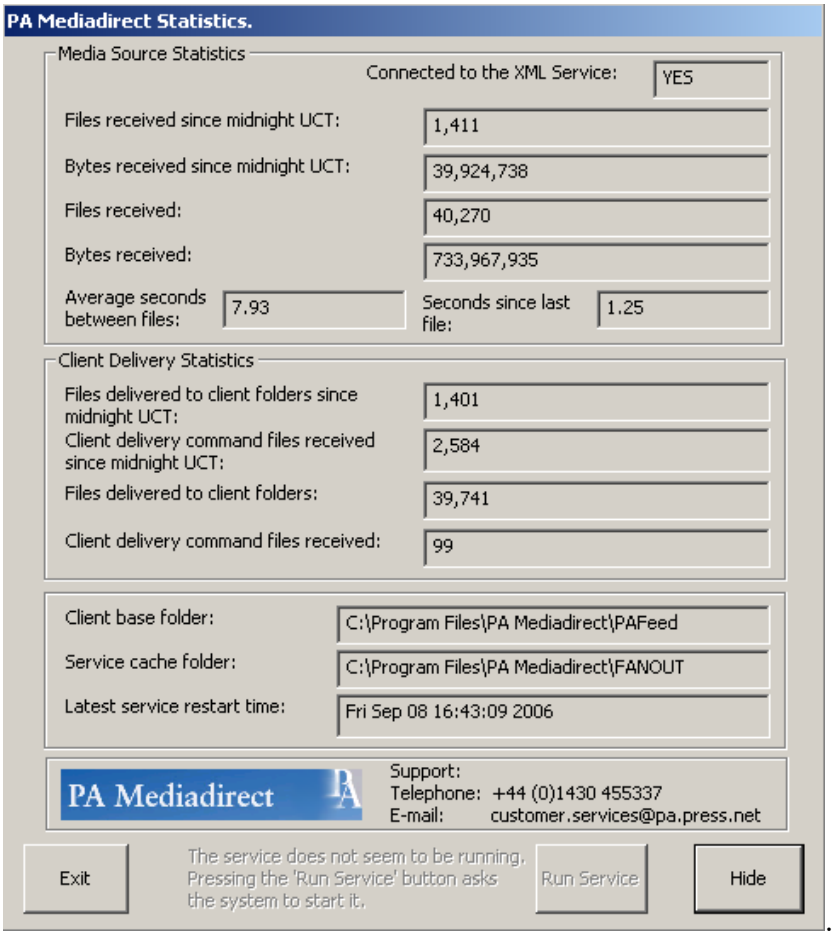

5. Systems Interface

Pictures will be delivered to the file system and can now be collected by your systems.


For text formats, the PA Mediadirect receiver supports both file system delivery as well as serial streams (configured to serial or USB ports). PA recommends file system presentation for text as serial technology has been superseded and will result in slower delivery. If you are using file system presentation, the text services can now be collected by your systems.

Please note that **PAMDR does not purge populated directories** of text or picture files.

5.1 Serial text interface
For serial presentation of text the application sofa.exe is used in conjunction with standard PAMDR software. Sofa.exe can be installed during a custom install of the PAMDR software (see 2.2 above).

PA controls the configuration of which data is written to each serial port. Up to 4 serial ports can be configured. The files for each port will be written to the file system into directories labelled for each port. Using the sofa.exe program you can then configure the output ports that each of these are streamed to.

The sofa configuration utility shown below can be run from the windows menu or the command line C:\Program Files\PA Mediadirect\Programs\sofa.exe

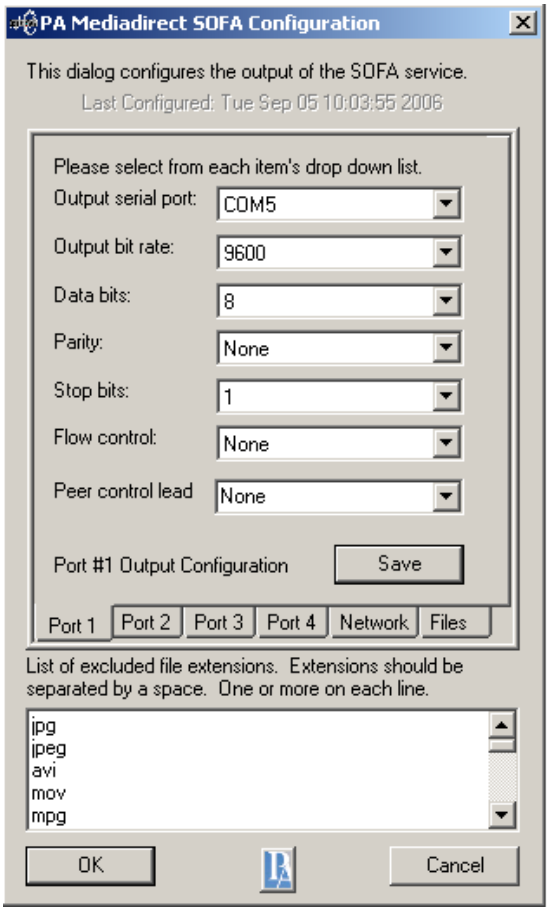

6. Customer Support
If you require further information or support please contact PA Customer Services.

PA Customer Services
Tel: +44 (0)1430 455337
Email: customer.services@pa.press.net

PA MediaDirect Receiver - Installation for UNIX

Introduction

As part of the PA Mediadirect (PAMD) service, wire customers will be provided with receiver software called the PA Mediadirect Receiver (PAMDR). This document details the installation on Red Hat Linux and Solaris operating systems.

1. Pre installation

Prior to installation you will be emailed a location from where you can download the installer program with a license serial number and username for your installation. You password will be emailed separately.

Please refer to PA Mediadirect customer LAN documentation for details of the routing required by PAMDR. For a typical installation this will require being able to route to both 144.178.255.20 and 194.70.33.100 and to resolve primary and secondary DNS amps.pamediadirect.co.uk and amps.pamediadirect1.co.uk. Please also note that PAMDR connects to PAMD using TCP port 443 and you may need to add any necessary rules to your firewall configurations to enable this.

Please note that PAMDR does not purge populated directories **of text or picture files. See section 3 Systems Interface below.**

2. Installing AMX Linux/Solaris Client

The following steps should be performed to insure a successful installation:

- Run the install script
- Verify that installed program(s) run
- Delete temporary and backup files

We now outline these steps for each AMX component.

Required components

When installing the required components of AMX, a symbolic link called /nwsys will be created to point to the user-chosen installation directory. This link must exist in order for AMX to function properly and should never be deleted or modified.

The following procedure unpacks and installs the required components of AMX. It is assumed that the AMX tar archive has already been downloaded to your server and the installation is being run under the root (superuser) account.

2.1 Verify DNS Name Resolution is operational

```
# nslookup amps.pamediadirect.co.uk
Server:  dns.server.com
Address:  x.x.x.x

Non-authoritative answer:
Name:    amps.pamediadirect.co.uk
Address:  144.178.255.20
```

Note: Sometimes the above command is successful even when DNS is not fully configured. In such a case, it is usually the /etc/nsswitch.conf file which is incorrect.

For Solaris: **/usr/sbin/ping amps.pamediadirect.co.uk**
For Linux: **/bin/ping amps.pamediadirect.co.uk**
Confirm you don't get the message: "unknown host amps.pamediadirect.co.uk". It's okay if the ping times out with "no answer from amps.pamediadirect.co.uk". If DNS is not configured properly, the ping will immediately return with the unknown host error.

2.2 Create the user account AMX daemon will be running as

Note: In the following example, AMX Client will run under user nadmin for illustration purposes only. There is no requirement that the user must be nadmin.

On Solaris:

```
# useradd -d /home/nadmin -c 'AMX User' -s /bin/bash -m nadmin
```

On Linux:

```
# useradd -d /home/nadmin -c 'AMX User' -s /bin/bash -m nadmin
```

2.3 Verify archive exists

On Solaris:

```
# ls PA*
PA-amx3.1.8-solaris2.7-sparc.tar
```

On Linux:

```
# ls PA*
PA-amx3.1.8-linuxRH-ELV3.tar
```

***2.4* Verify architecture and OS version match that of the AMX tar archive via the uname command.**

On Solaris:

```
# uname -p -r
5.6 sparc
```

Note: SunOS 5.7 is equivalent to Solaris 2.7.

2.5 Unpack the tar achive. This can be done in any directory on the server.

On Solaris:

```
# tar xvf PA-amx3.1.8-solaris2.7-sparc.tar
```

On Linux:

```
# tar xvf PA-amx3.1.8-linuxRH-ELV3.tar
```

2.6 Run the installation utility to unpack, decompress and install the software archive

Note: In the following examples, the /pool directory was chosen for illustration purposes only. There is no requirement that this directory exist in order to perform the installation. Also, if this is not the first AMX component being installed on the server, you will not be prompted for a valid user account to be the owner of the software about to be installed

```
# ./install amx


      * * * * * * * * * * * * * * * * * * * * * * * * * * * *
      *                                                       *
      *        Acquire Media Installation Utility             *
      *        ==================================             *
      *                                                       *
      *    copyright (C) 2004 Acquire Media Corporation       *
      *                                                       *
      * * * * * * * * * * * * * * * * * * * * * * * * * * * *


Would you like to view the README file? (y/n) n

            ****************************************
            *** First time installation detected. ***
            ****************************************

You must choose a valid user account to be the owner of the software
which is about to be installed.  Typically, an administration
account, such as nadmin, amxadmin etc. is used.  If at this time
there is no account to use, please create one, or contact your system
administrator.  (Control-C to exit and try again later)

Please enter valid user account now: nadmin
You have entered: 'nadmin' Is this correct? (y/n) y
```

```
You must choose a valid directory where the software will be installed. The directory
MUST reside locally on this server (i.e. not NFS mounted from any other server).  Please
consult the installation guide for disk space requirements.  INSTALLATION WILL FAIL
WITHOUT SUFFICIENT SPACE.

Please enter installation directory: /pool/amx
You have entered: '/pool/amx' Is this correct? (y/n) y
'/pool/amx' does not exist
Do you want to create /pool/amx? (y/n) y
Creating /pool/amx
Creating /pool/amx/nwsys
Creating symbolic link from /pool/amx/nwsys to /nwsys
Creating /nwsys/tmp
Creating /nwsys/tmp/xfer/amx
Creating /nwsys/release

Beginning software installation for Acquire Media Transmit

Cleaning installation work area...
Unpacking archive PA-amx3.1.8-linuxRH-ELV3.install.tar
Cleaning rollback area...
Performing installation - Thu Oct  5 12:23:36 BST 2006
Creating /nwsys/release/bin
Creating /home/nadmin/PA-amx3.1.8-linuxRH-ELV3/amx3.1.8/rollback/bin
Creating /nwsys/release/conf
Creating /home/nadmin/PA-amx3.1.8-linuxRH-ELV3/amx3.1.8/rollback/conf
Creating /nwsys/release/conf/skel
Creating /home/nadmin/PA-amx3.1.8-linuxRH-ELV3/amx3.1.8/rollback/conf/skel
Creating /nwsys/release/conf/system
Creating /home/nadmin/PA-amx3.1.8-linuxRH-ELV3/amx3.1.8/rollback/conf/system
Creating /nwsys/release/docs
Creating /home/nadmin/PA-amx3.1.8-linuxRH-ELV3/amx3.1.8/rollback/docs
Creating /nwsys/release/etc
Creating /home/nadmin/PA-amx3.1.8-linuxRH-ELV3/amx3.1.8/rollback/etc

Proceeding with installation.

SUCCESS: File installation complete

Running 'chkhost '
Local cfg OK: Server = localhost.localdomain IP Addr = 127.0.0.1

Running 'mxp_init '
Verifying crontab: remove mxpstart entries if present

Running 'setup_global_cfg -amx'
Group is set to 'nadmin'
Checking server run area
Creating /nwsys/release/api
Creating /nwsys/release/aos
Creating /nwsys/release/logs
Creating /nwsys/install
Creating /nwsys/wndp
Creating /nwsys/wndp/raw
Creating /nwsys/wndp/rls
Creating /nwsys/wndp/hld
Creating /nwsys/wndp/.tmp

Running 'setup_email_cfg '

The software about to be installed can be configured to automatically
generate an email message under certain conditions.  There are typically three conditions
that warrant an automatic email notification:
    1. daily status notification to monitor system health.
    2. fatal condition encountered - one or more processes are down.
Up to 10 email addresses can be specified to receive each of these messages.
```

```
You will be prompted to enter the appropriate information if you want
to configure this option.

Do you want to configure email notification? (y/n) y

Please enter the current domain name: my.domain.com
You have entered: 'my.domain.com' Is this correct? (y/n) y

It is recommended that a local mail server be entered
at this time.  If a mail server is not available, the
sendmail process from this server is used for all outgoing
mail.  If this server is not configured for sendmail, then
all outgoing email notification will NOT be possble.

Do you want to specify a mail server for email notification:? (y/n) y


Please enter the local mail server: mailserver@abc.com
You have entered: 'mailserver@abc.com' Is this correct? (y/n) y

Basic email configuration has been installed

Running 'setup_mxp_boot -update'
Installing /etc/rc.d/init.d/amx.init

Shutdown link /etc/rc.d/rc0.d/K90amx is installed
Startup link /etc/rc.d/rc5.d/S90amx is installed


Running 'setup_mxp_cfg '
System (process) configuration file has been updated

Configuring email notification triggers:
When more than one email address is being entered, please separate
them with semicolons (e.g. user1@abc.com;user2@abc.com etc.)

Please enter email address(es) for daily notification message: user@abc.com
You have entered: 'user@abc.com' Is this correct? (y/n) y

Please enter email address(es) for fatal condition message: user@abc.com
You have entered: 'user@abc.com' Is this correct? (y/n) y

Please enter email address(es) new software release message: user@abc.com
You have entered: 'user@abc.com' Is this correct? (y/n) y
Email notification triggers have been installed

Running 'setup_mxp_boot -update'
Installing /etc/rc.d/init.d/amx.init

Shutdown link /etc/rc.d/rc0.d/K90amx is installed
Startup link /etc/rc.d/rc5.d/S90amx is installed

Running ‘setup_mxp_cfg’
System (process) configuration file has been installed

This server does not have a valid AMX configuration file.
You will be prompted for the necessary information to create this file.
You will need the following information before proceeding:

    1. AMX Username (supplied with installation package)
    2. AMX Password (supplied with installation package)
    3. AMX Account Number (supplied with installation package)
    4. Proxy information if applicable
        a. proxy name or IP address
        b. proxy port number (default is 8080)
```

```
Please enter AMX user name: AMXUSER
```
Note: example only. Your details will be supplied by PA see pre installation above
```
You have entered: 'AMXUSER' Is this correct? (y/n) y

Please enter AMX password: AMX_passwd
```
Note: example only. Your details will be supplied by PA see pre installation above
```
You have entered: 'AMX_passwd' Is this correct? (y/n) y

Please enter AMX account number: 6512345
```
Note: example only. Your details will be supplied by PA see pre installation above
```
You have entered: '123456' Is this correct? (y/n) y

*********************************************************
PLEASE NOTE THAT USERNAME AND PASSWORD ARE CASE SENSITIVE
*********************************************************
The following information has been entered:
    AMX Username:               AMXUSER
    AMX Password:               AMXpasswd
    AMX account number:         6512345
Are all of these items correct? (y/n) y

Is a proxy going to be used? (y/n) n
System (communication) configuration files have been installed
BEGIN: wndpget configuration

All content that is received will be owned by the nadmin account

Please enter the directory for storing all received content: /pool/pafeed
You have entered: '/pool/pafeed' Is this correct? (y/n) y
COMPLETE: wndpget configuration

Running 'setup_registry_bin '
Installing mxpopt in /var/adm/amx/bin
Installing amxopt in /var/adm/amx/bin
Installing mxp.profile in /var/adm/amx/bin
Installing mxp.cshrc in /var/adm/amx/bin

Since this is the first installation of AMX you have
the option to avoid starting the system at this point in time.
If you choose this option now you can start the system later
by using the appropriate startup utilities.  Please consult
the AMX Administrators Guide for instructions.

Would you like to start AMX now? (y/n) y

installation for AMX is now complete.
Once this installation has been verified as specified in the
Installation Guide, please run ./install amx -clean

============================================================
    For a record of this installation, please refer to:
    /var/adm/amx/log/installation.log
------------------------------------------------------------
```

2.7 Now check the nlog file to confirm that the client has connected to the AMPS server successfully

```
# tail -f /nwsys/release/logs/nlog
```

2.8 Verify installation using the account specified during the install

Note: In the following example, the path variable for nadmin was modified to contain /nwsys/release/bin via the mxp.profile startup information – steps 9a and b.)

su – nadmin *(change from user root to user nadmin)*

```
Sun Microsystems Inc.   SunOS 5.7   Generic     October 1998      (Solaris only)
```

9a. Add one of the following lines to your startup file (.cshrc, .bashrc etc):

```
source /var/adm/amx/bin/mxp.cshrc          (for csh, tcsh)
. /var/adm/amx/bin/mxp.profile             (for bash)
```

9b. Update your environment with new settings:

{nadmin} > **source** *your_startup_file*

{nadmin} > **amxstatus** *(verify all processes are up and running)*

```
Release: CHECKEDOUT .../tcpquip/LATEST .../mxpagent/LATEST /main/LATEST, up since: Thu
Oct  5 14:27:03 2006

    nlogd       running         8613

    wndp        running         8627 8644
    wndpget     running         8642
    emaild      running         8691
    nifrls      running         8705

    intcvr      running         8731 8792
                                Acct: 5323  User: test
                                Server: 144.178.255.20

    **** All processes are up and running ****
```

{nadmin} > **windiag –n 2** *(check Interceiver to verify byte counts in data section growing)*

```
Connection:
      State:                                          Online
      Runtime:                                  0h  2m 35s
      * Reconnects Today:                                0
      Reconnects (0 day avg):                          n/a
      Last Disconnect GMT:                             n/a
      Last Outage Duration:                     0h  0m  0s
      * Total Outage Today:                     0h  0m  0s
      * Average Outage Today:                          n/a
      Last Ping Time GMT:                              n/a
      Last Ping Delay (ms):                              0
      Avg Ping Delay (ms):                               0
      * Max Ping Delay Today (ms):                       0
      Missed Sequences:                                  0

Data:
      * Bytes Recieved Today:                      1148317
      * Bytes Sent Today:                             3443
      * Packets Received Today:                       1343
      * Packets Sent Today:                            172
      Received Bytes per Sec (0 day avg):                0
      Sent Bytes per Sec (0 day avg):                    0
      Last Data Interval:                       0h  0m  0s
      Last Data Received GMT:             05-May-00  16:22:04
      * Max Data Interval Today:                0h  0m  8s
      ReXmits from Server:                               0
      ReXmits to Server:                                 0

Connection:
      State:                                          Online
```

```
      Runtime:                                    0h  2m 45s
      * Reconnects Today:                            0
      Reconnects (0 day avg):                      n/a
      Last Disconnect GMT:                         n/a
      Last Outage Duration:                       0h  0m  0s
      * Total Outage Today:                       0h  0m  0s
      * Average Outage Today:                      n/a
      Last Ping Time GMT:                          n/a
      Last Ping Delay (ms):                          0
      Avg Ping Delay (ms):                           0
      * Max Ping Delay Today (ms):                   0
      Missed Sequences:                              0

Data:
      * Bytes Recieved Today:                  1214403
      * Bytes Sent Today:                         3683
      * Packets Received Today:                   1439
      * Packets Sent Today:                        184
      Received Bytes per Sec (0 day avg):            0
      Sent Bytes per Sec (0 day avg):                0
      Last Data Interval:                         0h  0m  0s
      Last Data Received GMT:           05-May-00  16:22:14
      * Max Data Interval Today:                  0h  0m  8s
      ReXmits from Server:                           0
      ReXmits to Server:                             0
```

{nadmin} > **exit** *(become root again)*

2.9 Remove temporary files.

Note: if you are not currently in the same directory that you started in, please return to there now.

```
# ./install amx -clean


      * * * * * * * * * * * * * * * * * * * * * * * * * * * *
      *                                                       *
      *        Acquire Media Installation Utility             *
      *        ==================================             *
      *                                                       *
      *    copyright (C) 2002 Acquire Media Corporation       *
      *                                                       *
      * * * * * * * * * * * * * * * * * * * * * * * * * * * *


Are you sure you want to remove temporary files for Acquire Media Transmit? (y/n) y
Cleaning amx
Installation files for Acquire Media Transmit (release 3.1.8) have been removed.
#
```

2.10 To restart the AMX daemon run the follow commands as user root *(superuser)*:

```
# /etc/init.d/amx.init stop
# /etc/init.d/amx.init start
# tail -f /nwsys/release/logs/nlog
```

2.11 o remove the AMX software delete the following directories as user root (superuser):

On Solaris:

```
# rm –R /nwsys
# rm –Rf /pool/amx
# rm –Rf /var/adm/amx
```

On Linux:

```
# rm –Rf /nwsys
# rm –Rf /pool/amx
# rm –Rf /var/adm/amx
```

3. Systems Interface

Pictures will be delivered to the file system and can now be collected by your systems.

For text formats, the PA Mediadirect receiver supports both file system delivery as well as serial streams (configured to serial or USB ports). PA recommends file system presentation for text as serial technology has been superseded and will result in slower delivery. If you are using file system presentation, the text services can now be collected by your systems.

Please note that PAMDR does not purge populated directories **of text or picture files.**

3.1 Serial text interface

If you wish to enable text delivery via serial, you will need to edit:

`/nwsys/release/conf/wndpget.conf`

```
In this file you will find the SOFA (Serial Output from AMPS) section. You will need
to change the #SerialCfg lines according to the source directory (where the files you
want to output are), the serial device you want to use and the parameters of the
serial device. In the following example the client is receiving 3 different types of
feed for which we have assigned serial output devices:
```

```
# SOFA: Serial Output from AMPS
# Create a mapping from a specified directory to a serial port with
# appropriate connection parameters.  Default for hardware flow control
# (RTS) is on.
# Software flow control is enabled via the 'sfc' flag.
# NOTE: Data is written cronologically and deleted from the directory
# after written to the serial port.  The directory specified can
# be specified as a sub-dir below DataRootDir by using a relative
# path.
#SerialCfg: directory [rts|norts][sfc|nosfc] device:baud:parity:bits:stop_bits
SerialCfg: /pafeed/COMP7901 rts /dev/ttyS0:9600:n:8:1
SerialCfg: /pafeed/PACE7901 sfc /dev/ttyS1:9600:n:8:1
SerialCfg: /pafeed/FAST rts /dev/ttyS2:9600:n:8:1
```

4. Customer Support

If you require further information or support please contact PA Customer Services.

PA Customer Services
Tel: +44 (0)1430 455337
Email: customer.services@pa.press.net


Secure Device Server with PCMCIA, HelloDevice Super Series, SS100/110/400/800



Features

- Connects serial devices to 10/100Base-T Ethernet.
- Supports RS232/422/485 based serial devices, up to 230Kbps speed.
- Supports PC cards such as ATA memory, modem and wired/wireless LAN card.
- Multiple host connections/data transfer.
- Powerful security support, SSL/TLS and data encryption
- Easy-To-Use customization support
- System logging & port buffering.
- Dynamic DNS and PPPoE protocol for DSL connection to broadband Internet.
- Configuration via Web, Telnet/SSH or serial port.
- Surge protector included.
- Supports both wall and DIN-Rail style mounting.
- Supports RFC 2217, Telnet COM Port Control Protocol

Panel Layout

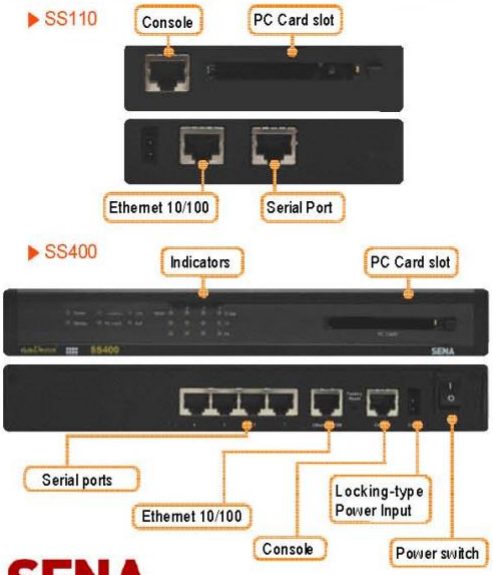

SENA
www.sena.com

The Linux-based HelloDevice Super Series, is a universal Secure Device Server that allows your legacy serial devices manageable via industry standard Ethernet network. Based on open network protocols such as TCP/IP and UDP, it gives you ultimate flexibility to your serial devices.

For secure data communication, the HelloDevice Super Series supports various data encryption protocols such as SSL/TLS and data encryption.
In addition, IP address filtering function is provided for protecting unintentional data streams to be transmitted to the HelloDevice Super Series.

Customization support features enable users to easily customize the box on-the-fly with minimal effort. The network/serial port access and serial protocol translation are provided using the free user space, Linux shell script and the library support.

Featuring PCMCIA slot for enhanced functionality, the HelloDevice Super Series supports PC cards such as Wired/Wireless LAN card to access another network for back up purpose, Phone-line modem card for out-of-band access to the Super Series with an external modem, and ATA Fixed Disk card to keep the system log and port log data safely.

With PPPoE(PPP-over-Ethernet) connection feature of the HelloDevice Super Series, the RS232/422/485 serial devices could be managed over DSL-based broadband network. With the rich broadband network connectivity protocols such as DHCP, PPPoE and Dynamic DNS, you could easily manage the legacy serial devices over broadband Internet by using DSL or cable modem connection. The built-in Dynamic DNS protocol of the HelloDevice Super Series enables you to access serial devices using custom domain names.

The HelloDevice Super Series also provides you with easy-to-use system management functionality of system status display, firmware upgrade and remote reset by using various accessibility options such as telnet/SSH, serial console port or web. The powerful system logging feature enables users to store/send the system/port log data to the NFS, SYSLOG server and the ATA Flash fixed disk PC card.

Typical application areas of the HelloDevice Super Series include:

- Industrial Automation
- Network management
- Retail/Point of Sale
- Remote metering
- Remote display
- Building automation
- Security/Access control Systems
- General data acquisition application
- Medical Automation

Secure Device Server with PCMCIA,



lloDevice Super Series, SS100/110/400/800

Specifications

Serial Interface
- Serial speeds 75bps to 230Kbps
- Connector
  DB9: SS100
  RJ45 : SS110/400/800
- Flow Control:
  Hardware, Software
- Signals:
  - RS232 Rx, Tx, RTS, CTS, DTR, DSR,DCD, GND
  - RS422 Rx+, Rx-, Tx+, Tx-
  - RS485 Data+, Data-
- Surge protector equipped for serial port

Network Interfaces
- 10/100 Base-TX Ethernet with RJ45 Ethernet connector
- Supports static and dynamic IP address

Network Protocols
- ARP, IP/ICMP, DNS, Dynamic DNS
- SMTP with/without Authentication, pop-before SMTP,
- DHCP client, NTP, PPPoE
- TCP, UDP, SSL v2 & v3, TLS v1, RFC-2217
- SSH v1 & v2,Telnet
- HTTP, HTTPS, SNMP v1 & v2
- Serial Port Access protocol : TCP, UDP, SSL v2 & v3, TLS v1, RFC-2217

PCMCIA
- SS110/400/800 only
- ATA flash memory card
- 10/100 Base-TX LAN card
- Wireless LAN card
- PSTN modem card

Ethernet modem
- Full support for AT commands

Security
- SSH, SSL/TLS
- Data Encryption
- IP address filtering
- HTTPS

Management
- Web or console or Telnet/SSH
- HelloDevice Manager software
  O/S support: Windows 98/ME/NT/2000/XP
- System log delivery:
  email or SYSLOG server or flash memory card
- Firmware

Stored in Flash memory and downloadable via console or telnet or web

Diagnostic LED
- Power
- Ready
- 10/100 Base Link, Act
- Serial InUse/Rx/Tx for each serial port
- PC Card

Power
- SS100: 5VDC, 0.5A@5VDC
- SS110: 7.5VDC, 1A @7.5VDC
- SS400/800: 5VDC, 1.5A @ 5VDC

Environmental
- Operating temperature:
  0℃ to 50℃
- Storage temperature:
  -20℃ to 66℃
- Humidity:
  90% Non-condensing

Physical properties
- SS100 100 x 72 x 25 (mm)
  3.9 x 2.8 x 1.0 (in.)
  240g
- SS110 150 x 103 x 26 (mm)
  5.9 x 4.0 x 1.0 (in.)
  455g
- SS400/800
  245 x 153 x 30 (mm)
  9.6 x 6 x 1.2 (in.)
  1.5kg

Certification
- FCC(A), CE, MIC

Warranty
5-year limited warranty

Ordering Information

SS100	HelloDevice Super single-port serial device server
SS110	HelloDevice Super single-port serial device server with PCMCIA
SS400	HelloDevice Super 4-port serial device server with PCMCIA
SS800	HelloDevice Super 8-port serial device server with PCMCIA

Includes:
Quick Start Guide * *External 110V or 230V power supply* * *Cable kit* * *CD-ROM*

Optional Accessories:
SS-SDK Software Development Kit (256MB CF card)
RJ45-DB9M X adapter bundle (4 units)
RJ45-DB25F X adapter bundle (4 units)
RJ45-DB25M X adapter bundle (4 units)
RJ45-DB25M S adapter bundle (4 units)
19? Rack mount kit for SS400/800
DIN-rail mount kit for the SS100/110

For more information, please visit us at
http://www.sena.com

U.S. / Canada / South America
Tel : +1 (408) 573-7425 Fax: +1 (408) 907-3738

EU / Africa
Tel : +33 (0) 1 53 53 16 29 Fax: +33 (0) 1 70 24 70 90

Asia / Pacific
Tel : +82-2-571-8283 Fax: +82-2-573-7710

Contact us via E-mail
General Information : info@sena.com
Sales & Distribution : sales@sena.com
Technical Support : support@sena.com

SENA
www.sena.com

PA NITF

IMPLEMENTATION DETAILS

Introduction

In July 2005, The Press Association began development of an XML-based version of its wire service, using a subset of the IPTC NITF v3.1 specification, in order to drive both web products and its next generation of wire services. The NITF service is in some ways similar to the preceding IPTC7901 text service in that it provides discrete documents for each 'page' of the wire service. The added advantages are that fields such as headlines, bylines, and embargo information are extracted into appropriate fields in the NITF rather than forming part of the body text.

This document provides an element-by-element description of the new format, comparing it to the existing PA IPTC7901 format.

The Press Associations new IP delivery network – Mediadirect – will support delivery of NITF formatted wire stories. This will include all article content. PA's data format services, and the Fast Results wire service, will continue to be provided in IPTC7901 only.

<head> element

The `<head>` element contains all of the header information – the part of the content that is not intended to be published to end viewers. It is mostly for the use of automated systems, and contains entitlements and categorisation information.

A typical `<head>` looks like the following:

```
<head>
   <title>1 POLICE Pet Kent</title>
   <meta name="service" content="Comprehensive"/>
   <meta name="category" content="NRC"/>
   <meta name="optInfo" content="PA"/>
   <docdata management-status="usable">
      <du-key key="PA-NRC-POLICE-Pet-Kent" version=""/>
      <doc-id id-string="A20208741124260366A0"/>
      <urgency ed-urg="4"/>
      <doc-scope scope="POLICE"/>
      <series series.part="1"/>
      <key-list>
         <keyword key="Pet"/>
         <keyword key="Kent"/>
      </key-list>
      <del-list>
         <from-src src-name="PA" level-number="1"/>
      </del-list>
      <date.issue norm="20070119T074101+0000"/>
      <ed-msg info="(ADVISORY: First ran yesterday under embargo)"/>
      <doc.copyright holder="Press Association" year="2007"/>
   </docdata>
</head>
```

(Note that in NITF the order of child elements of `<docdata>` is not relevant).

Element	Value	Detail	IPTC7901 equivalent
`title`		The name of this fragment of the story (a.k.a. catchline, slugline)	keyword/catchline
`meta name="service"`	`content`	A repeatable element, stating all of the PA services on which this message has run. Currently the only options are Comprehensive and PACE.	Source I/D (the 3 characters immediately after SOH [start of header]).
`meta name="category"`	`content`	The category code of the story. Category codes are currently three-letter codes and are upper case. There must be at least one valid category on a message. This element will be repeated where stories have been multiply categorised. Categories are drawn from a controlled list managed by PA.	The category field in the header section 11 characters after SOH between the priority and the word count.
`meta name="optInfo"`	`content`	Additional information about the source of the story (e.g. `PA`, `PA SPORT`, `PA IRELAND`) and sometimes about the status of the story or of this message (e.g. `PA SNAP`, `PA ADVISORY`).	Optional Info, at the end of the first line following SOH.
`docdata`	`management-status`	PA may use any of the four available values for this attribute, but the most common will be `usable` and `embargoed`. Some customers will not be entitled to `embargoed` content. Some `embargoed` content may have an embargo expiry time (see `date.release`). PA will use the `withheld` value for *holds*, and `canceled` for *kills*.	No direct equivalent. Could be inferred by the CDC codes in the pre-header section containing the string `EMB`.

du-key	**key**	A unique identifier for any given event, valid for one calendar day, providing a mechanism for joining together separate pages of a story. ***Note:*** *Customers should not attempt to parse this attribute to extract meaning from it as PA may wish to change the format of it in future: customers need only be aware that it remains unique for any given calendar day. Customers are advised to use individual metadata elements, or to use* **title** *for display purposes.*	None.
du-key	**version**	The current version of the story. Stories start off with a blank version and proceed through *Substitute*, *Lead*, *Nth_Lead*, *Nightlead* and *Mth_Nightlead* during the course of a calendar day. ***Note:*** *Underscores are used rather than spaces as this attribute needs to be a valid* ***NMTOKEN****.*	Appears at the end of the keyword/catchline field, the second line of the header after SOH.
doc-id	**id-string**	The unique reference ID of the item.	None.
urgency	**ed-urg**	The priority of the message, in the range 1 – 5, where 1 has the highest priority.	The priority field, 9 characters after SOH in the header, between the sequence number and the category code.
doc-scope	**scope**	A repeatable element, listing the topics for this message. The first topic listed is the primary topic, which may be used for story naming and collation purposes. Secondary topics are intended to apply to the collated story as a whole but may not be consistently applied to all pages.	The primary topic is the first uppercase word in the keyword/catchline field (the second line of the header, after SOH). There is no equivalent for further topics.
series	**series.part**	The page number of this item.	The digit at the start of the keyword/catchline field, the second line of the header after SOH.

keyword	key	A repeatable element, listing the keywords for the story. Note that the final keyword can be a version identifier (e.g. Substitute, Lead, Nth Lead, Nightlead, Mth Nightlead) – see the aggregation rules for more details.	The remainder of the keyword/catchline part of the header, 2nd line after SOH, after the page number and topic.
from-src	src-name	Specifies the provider of the content. Values will include PA, Government News Network , Press Release providers (e.g. BusinessWire), and other agencies (e.g. AP).	No direct equivalent, but related information is available in the Optional Info.
date.issue	norm	The date and time at which the article was published.	The date stamp in the trailer (from ETX to EOT)
date.release	norm	For embargoed content, this is the date and time at which the embargo expires. ***Note:*** *this element may not be present in the initial version of the PA NITF feeds. The editorial message will be present from the start.*	No direct equivalent. Embargo expiry information was previously typed into the body of the story, usually in the form Embargoed to HHMM Day DD Month, in a paragraph preceding the headline (see hl1). This text will still be present in the ed-msg.
ed-msg	info	Editorial commentary and advisories about the article, intended for use by editors and journalists in the news making process but not to be published to the end consumer. May also include human-readable embargo expiry information.	No direct equivalent. Notes would be written in the body text prior to the headline, sometimes (but not always) wrapped in parentheses or asterisks.
doc.copyright	holder	The name of the owner of copyright for this item. ***Note:*** *absence of a copyright notice does not imply absence of copyright.*	None
doc.copyright	year	The year of copyright of this item. ***Note:*** *absence of a copyright notice does not imply absence of copyright.*	None

The following information exists in the legacy IPTC7901 + Pre-header format (see appendix) but is not available in the NITF feed:

IPTC7901 + Pre-header field	Description	Superseded By
CDC codes	List of 3-letter acronyms, derived from the address codes for legacy transmission systems no longer in use.	None
Seq. No	A sequence number added to the story, unique for approximately 3 days	Unique identifier in `doc-id@id-string`
Word Count	The number of characters in the body text, divided by 6	None

IPTC NewsCodes

PA is considering implementing the IPTC NewsCodes – specifically, the Subject Codes – as a complimentary classification scheme to PA's own taxonomies, in the following (NITF standard) manner:

```
<?xml version="1.0" encoding="UTF-8"?>
<nitf version="-//IPTC//DTD NITF 3.1//EN">
    <head>
        <meta name="category" content="HHH"/>
        <meta name="optInfo" content="PA"/>
        <tobject>
            <tobject.subject tobject.subject.refnum="03014001"/>
            <tobject.subject tobject.subject.refnum="04015000"/>
        </tobject>
        <docdata management-status="usable">
            …
            <doc-scope scope="BLAST"/>
            <doc-scope scope="TRANSPORT"/>
            …
        </docdata>
    </head>
    …
</nitf>
```

More information on the ITPC NewsCodes can be found at http://www.newscodes.org/

Further metadata may be present in the head element of the NITF feed, particularly material sourced from 3rd party Press Release providers and from the Government News Network. Customers are advised to ignore any metadata they are not expecting.

<body.head> element

Only page 1 stories have a `<body.head>`, which includes the headline, byline and abstract of the document:

```
<body.head>
    <hedline><hl1>HEYWOOD AGREES SALE OF PLASTICS BUSINESS</hl1></hedline>
    <byline>By Louisa Nesbitt, PA City Staff</byline>
    <abstract><p>Windows and doors maker Heywood Williams today unveiled a &#163;20 million deal to sell its plastics division to the owner of Everest and Weatherseal double glazing.</p></abstract>
</body.head>
```

In the IPTC7091 feed, both the headline and byline form part of the body text. At the time of writing the headline is written in uppercase (with a few lowercase letters used occasionally for example in acronyms) – PA intends to use mixed case headlines in the future. The byline immediately follows the headline. The IPTC7901 feed does not have an abstract.

<body> element

Paragraphs and Preformatted Content

PA NITF will contain a single `<body.content>` inside `<body>` and will not use the `<block>` element.

At the time of writing, for article text the PA body element will contain just a series of `<p>` paragraph tags. TTY (teletype) material such as sports results intended for human (rather than machine) consumption will have a single encapsulating `<pre> … </pre>` element around the text, indicating that white space is significant inside this material.

Some press release providers mix the use of `<p>` and `<pre>` tags in single instances of NITF, for the inline mark-up of preformatted tables in article text. Such material will be included in the initial roll-out of Mediadirect. PA proposes to adopt this for its own content in a future version of the NITF wire.

Inline Mark-up

PA proposes to use automated processes to identify various kinds of entity in the body text, and mark them up using the most appropriate NITF tags:

Element	Usage
`a`	URLs, email addresses
`chron`	Dates and times
`location`	Places (major towns and cities)
`money`	Currencies
`org`	Companies, organisations, charities, Government departments
`person`	Names of people

PA intends to keep its inline mark-up under review and may wish to add further NITF mark-up elements in the future. Customers are advised to process the NITF as an XML document, and to ignore elements that they do not understand.

Multimedia and Content Association


PA is not considering using the `media` element to embed references to related stories, pictures or other multimedia items in the NITF. Customers interested in such relationships are referred to the companion “PA NewsML” document.

Filenames

Customers are advised against extracting metadata values from story filenames. All useful metadata is available inside the NITF document itself. Files are named to ensure uniqueness, seamless corrections and for fault-finding purposes. The filename construction begins with a date/time field and ends with a priority value (which differs from the `urgency` field in the NITF). Customers may use these values for the purposes of ordering the processing of files (older files with a smaller priority value should be processed before newer files with a higher value).

AppendiX - PA IPTC7901 + PreHeader

The internationally agreed IPTC7901 message format has been enhanced by the PA by adding a preheader (IPTC7901+PH). The structure is as follows:-

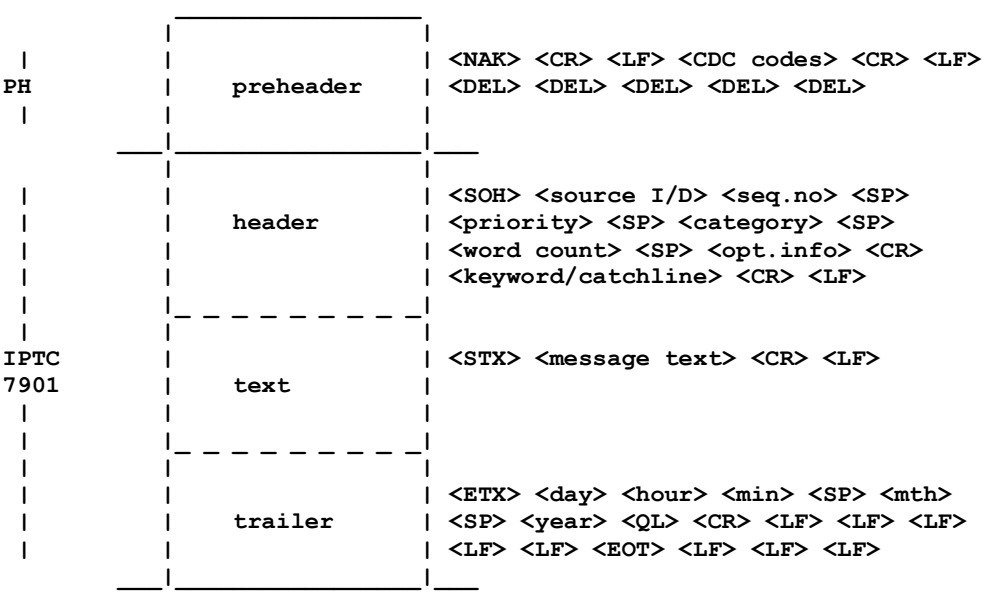

Field	Description
<CDC codes>	One or more 3 char codes each followed by a space char. Each code defines a subscriber or a group of subscribers.
<source I/D>	Three alpha chars defining the source of the message.
<seq.no>	Four numeric chars from 0001 to 9999. Each succeeding message contains the next number in numerical sequence.
<priority>	Numeric char in the range '1' to '5' defining the priority of the message.
<category>	3 alpha chars (see enclosed list of codes) defining the category of the information contained in the message.
<word count>	Up to 4 numeric chars defining the approximate number of words in the text of the message.
<opt.info>	Up to 50 alphanumeric characters.
<keyword/catchline>	One or more numeric chars (defining the page number) followed by keyword (u/c alphas) followed by up to three other words in u/c and l/c.
<message text>	any chars other than <SOH> <STX> <ETX> and <EOT>
<day>	2 chars representing day number (01 to 31)
<hour>	2 chars representing hour (00 to 23)
<min>	2 chars representing the minute (00 to 59)
<mth>	3 chars representing month (Jan to Dec)
<year>	2 chars representing 20xx year (00 to 99)

PA NEWSML IMPLEMENTATION

A DESCRIPTION OF PA'S PLANNED IMPLEMENTATION OF NEWSML WITH RESPECT TO WIRE CONTENT DISTRIBUTION

Overview

The NewsML wire service forms part of the phased implementation of PA's Mediadirect content syndication system, which commences deployment mid-2006.
The NewsML v1 standard, ratified by the IPTC in October 2000, is an extremely flexible framework that is capable of supporting a hierarchy of related multimedia content items, of describing the relationships between those items, and using metadata to describe those items (both in terms of editorial and technical matters).
This flexibility, however, leads to difficulties when attempting to implement a NewsML-based service. It is up to individual providers to decide how they will use the framework in a way that maps onto their business processes. That is what this document attempts to address.

Mandatory NewsML elements

Here is an example of a minimal legal NewsML instance:

```
<?xml version="1.0" encoding="ISO-8859-1"?>
<NewsML>
    <NewsEnvelope>
        <DateAndTime>20041207T143910</DateAndTime>
    </NewsEnvelope>
    <NewsItem>
        <Identification>
            <NewsIdentifier>
                <ProviderId>pa.press.net</ProviderId>
                <DateId>20041207</DateId>
                <NewsItemId>PRV-CAT-TOPIC-Keywords</NewsItemId>
                <RevisionId PreviousRevision="0" Update="N">1</RevisionId>
                <PublicIdentifier>
                    urn:newsml:pa.press.net:20041207:PRV-CAT-TOPIC-Keywords:1
                </PublicIdentifier>
            </NewsIdentifier>
        </Identification>
        <NewsManagement>
            <NewsItemType FormalName="News"/>
            <FirstCreated>20041207T143910</FirstCreated>
            <ThisRevisionCreated>20041207T143910</ThisRevisionCreated>
            <Status FormalName="Usable"/>
        </NewsManagement>
    </NewsItem>
</NewsML>
```

Note that this sample document does not actually contain any content – it is header information for an 'empty' document. Required fields are used to identify when the item was created (**FirstCreated**), who it is provided by (**ProviderId**), what kind of item it is (**NewsItemType**), and whether the item is ready for use or not (**Status**). Some of this information is combined to provide a globally unique URN – the **PublicIdentifier** – which is used to identify this story. Further updates to the story will increase the **RevisionId** and therefore the final number on the **PublicIdentifier** will increase.
Content added to a NewsML document will appear inside **NewsComponent** tags, coming between the closing **NewsManagement** tag and the closing **NewsItem** tag.
Just like any other XML feed, PA reserves the right to introduce valid NewsML (and NITF) elements and attributes where appropriate. Customers are expected to process the NewsML feed as XML documents[1] and therefore should simply ignore elements that they are not expecting or do not understand.

Representing the Main Story

The main story in NewsML is represented by a top-level **NewsComponent** that has a **Role** of **Main**. Other roles are available for supplementary and related items, for abstracts and previews, etc. NewsML providers have a choice of mark-up language for the document body text itself; PA proposes to adopt NITF[2].
NewsML allows content to be 'included' in two ways – either inline, or included by reference (that is, a resolvable URI). PA proposes to include the main text story inline.

[1] As opposed to treating it as a delimited feed

[2] News Industry Text Format, another XML-based standard from the IPTC. See http://www.nitf.org/ for more information

Please see the companion document “PA NITF” to understand how PA has chosen to implement the NITF standard. Note that PA proposes to promote NITF **head** and **body.head** information into the corresponding NewsML elements, enabling metadata for all media types to be handled in a consistent way throughout the NewsML framework. Therefore in the NewsML format, there will be no **head** or **body.head** in the NITF documents.
Note that the **NewsItemId** happens to be a human-readable string, and appears to be generated from several other header fields. It is in fact (for text items) copied from the **du-key** from the originating NITF document. No meaning should be read into this element, other than the fact that it will be unique for any calendar day. All of the information available in PA’s current proposed **NewsItemId** is available in a more usable form elsewhere in the NewsML document, i.e. without needing to parse the **NewsItemId**. PA may wish to change the way the **NewsItemId** is generated in the future.

Therefore, a sample main story will appear like this:

```
<NewsComponent>
    <Role FormalName="Main"/>
    <NewsLines>
        <HeadLine>MAN CHARGED IN BOY MURDER CASE</HeadLine>
        <ByLine>By A. N. Other, PA News Courts Correspondent</ByLine>
        <CopyrightLine>Press Association 2006</CopyrightLine>
        <SlugLine>COURTS Boy</SlugLine>
    </NewsLines>
    <DescriptiveMetadata>
        <Property FormalName="Category" Value="HHH"/>
        <Property FormalName="Topic" Value="COURTS"/>
        <Property FormalName="Keyword" Value="Boy"/>
    </DescriptiveMetadata>
    <NewsComponent Duid="A1234567890A">
        <ContentItem>
            <MediaType FormalName="Text"/>
            <MimeType FormalName="text/vnd.IPTC.NITF"/>
            <DataContent>
                <nitf>
                    <body>
                        <body.content>
                            <p>The key witness in the Damilola Taylor murder trial today denied getting
                            details about the case from newspaper reports.</p>
                            <p>George Carter-Stephenson QC read a report which described Damilola's blood
                            flowing like a water fountain.</p>
                            <p>The 14-year-old girl had initially used a similar phrase to police but
                            later withdrew the comments.</p>
                        </body.content>
                    </body>
                </nitf>
            </DataContent>
        </ContentItem>
    </NewsComponent>
</NewsComponent>
```

Note that this represents a story with only a single page, or take. Also note that PA intends to introduce mixed case headlines after the implementation of Mediadirect.

Paging On

A story with multiple pages will be handled by repeating the inner **NewsComponent** as often as necessary to separate out each take:

```
<NewsComponent>
    <Role FormalName="Main"/>
    <NewsLines>
        <HeadLine>MAN CHARGED IN BOY MURDER CASE</HeadLine>
        <ByLine>By A. N. Other, PA News Courts Correspondent</ByLine>
        <CopyrightLine>Copyright Press Association 2006</CopyrightLine>
        <SlugLine>COURTS Boy</SlugLine>
    </NewsLines>
    <DescriptiveMetadata>
        <Property FormalName="Category" Value="HHH"/>
        <Property FormalName="Topic" Value="COURTS"/>
        <Property Formalname="Keyword" Value="Boy"/>
    </DescriptiveMetadata>
    <NewsComponent Duid="A1234567890A">
        <ContentItem>
            <MediaType FormalName="Text"/>
            <MimeType FormalName="text/vnd.IPTC.NITF"/>
            <DataContent>
                <nitf>
                    <body>
                        <body.content>
                            <p>The key witness in the Damilola Taylor murder trial today denied getting
                            details about the case from newspaper reports.</p>
                            <p>George Carter-Stephenson QC read a report which described Damilola's blood
                            flowing like a water fountain.</p>
                            <p>The 14-year-old girl had initially used a similar phrase to police but
                            later withdrew the comments.</p>
                        </body.content>
                    </body>
                </nitf>
            </DataContent>
        </ContentItem>
    </NewsComponent>
    <NewsComponent Duid="A9876543210A">
        <ContentItem>
            <MediaType FormalName="Text"/>
            <MimeType FormalName="text/vnd.IPTC.NITF"/>
            <DataContent>
```

```
                    <nitf>
                        <body>
                            <body.content>
                                <p>Later, the girl lost her temper with Mr Carter-Stephenson when he again
                                suggested she had read details in a newspaper.</p>
                            </body.content>
                        </body>
                    </nitf>
                </DataContent>
            </ContentItem>
        </NewsComponent>
    </NewsComponent>
```

Note that PA does not propose to use the NewsML Update mechanism as it is considered to add an unnecessary level of complication. PA instead proposes to send complete replacements for individual stories, with the page breaks between takes indicated using separate **NewsComponent**s as indicated above.

Versions

The story version (Substitute, Lead, Nightlead) etc will be indicated via the use of another property, e.g.:

```
<NewsComponent>
    <Role FormalName="Main"/>
    <NewsLines>
        <SlugLine>COURTS Boy 2nd Lead</SlugLine>
    </NewsLines>
    <DescriptiveMetadata>
        <Property FormalName="Category" Value="HHH"/>
        <Property FormalName="Topic" Value="COURTS"/>
        <Property FormalName="Keyword" Value="Boy"/>
        <Property FormalName="Version" Value="2nd Lead"/>
    </DescriptiveMetadata>
</NewsComponent>
```

PA stories start without a version identifier. Usually the first complete write-through of the story is the Substitute; further write-throughs are the Lead, 2nd Lead, 3rd Lead etc. The first write-through published after evening papers will have gone to press is the Nightlead, and further write-throughs will be 2nd Nightlead, 3rd Nightlead etc.

References back to PA

PA proposes that NewsML files may carry a reference back to the story on a secure PA portal/web site. This is likely to take the form of an equivalent **NewsComponent** carrying a **ContentItem** with an **Href** attribute that is a deep link to that object.

Related Story Items

Parent-Child story relationships

Child stories (those sharing the topic and keyword of a main story, but with additional keywords) are sent as NewsML items in their own right, as outlined above. In the master story from which they were branched, however, we add a 'preview' reference over to that story. In NewsML terms, these are referred to as *Supporting* items, defined as *Additional information that amplifies the original theme*. So "HHH COURTS Milosevic" might contain a **NewsComponent** similar to the following:

```
    <NewsComponent>
        <Role FormalName="Supporting"/>
        <NewsComponent Duid="A1029384756A">
            <NewsLines>
                <HeadLine>BRITISH JUDGE PRESIDING OVER MILOSEVIC TRIAL</HeadLine>
                <SlugLine>COURTS Milosevic Judge</SlugLine>
            </NewsLines>
            <NewsComponent>
                <Role FormalName="Main"/>
                <NewsItemRef NewsItem="urn:newsml:pa.press.net:20041207:PA-HHH-COURTS-Milosevic-Judge"/>
            </NewsComponent>
            <NewsComponent>
                <Role FormalName="Abstract"/>
                <ContentItem>
                    <MediaType FormalName="Text"/>
                    <MimeType FormalName="text/plain"/>
                        <DataContent>The tough-talking British judge presiding over the war crimes trial of
                        former Yugoslav president Slobodan Milosevic, has a reputation for being firm but
                        fair.
                    </DataContent>
                </ContentItem>
            </NewsComponent>
        </NewsComponent>
    </NewsComponent>
```

Here we have a **NewsComponent** encapsulating all supplementary items relating to main item, and would appear after a **NewsComponent** with a **Role** of **Main**.

This example contains just a single supporting item – in this case, **HHH-COURTS-MilosevicJudge**. It has two **NewsComponent** elements. The first **NewsComponent** is a reference to the main NewsML file for that story. The second is referred to as an *Abstract* (defined as *A summary or synopsis featuring the most important points of a news-component*), which we are using to include the first paragraph of the branched story.
The NewsML file for the related story would itself carry a reference back to the master story, using the NewsML element **AssociatedWith**:

```
<NewsML>
    <NewsEnvelope>
        <DateAndTime>20020107T143910</DateAndTime>
    </NewsEnvelope>
    <NewsItem>
        <Identification>
            <NewsIdentifier>
                <ProviderId>pa.press.net</ProviderId>
                <DateId>20020107</DateId>
                <NewsItemId>PA-HHH-COURTS-MilosevicJudge</NewsItemId>
                <RevisionId PreviousRevision="0" Update="N">1</RevisionId>
                <PublicIdentifier>
                    urn:newsml:pa.press.net:20020107:PA-HHH-COURTS-MilosevicJudge:1
                </PublicIdentifier>
            </NewsIdentifier>
        </Identification>
        <NewsManagement>
            <NewsItemType FormalName="News"/>
            <FirstCreated>20020107T143910</FirstCreated>
            <ThisRevisionCreated>20020107T143910</ThisRevisionCreated>
            <Status FormalName="Usable"/>
            <AssociatedWith NewsItem="urn:newsml:pa.press.net:20020107:PA-HHH-COURTS-Milosevic"/>
        </NewsManagement>
        <NewsComponent>
            <Role FormalName="Main"/>
            <NewsLines>
                <HeadLine>BRITISH JUDGE PRESIDING OVER MILOSEVIC TRIAL</HeadLine>
                <CopyrightLine>Copyright Press Association 2005</CopyrightLine>
                <SlugLine>COURTS Milosevic Judge</SlugLine>
            </NewsLines>
            <DescriptiveMetadata>
                <Property FormalName="Category" Value="HHH"/>
                <Property FormalName="Topic" Value="COURTS"/>
                <Property FormalName="Keyword" Value="Milosevic"/>
                <Property FormalName="Keyword" Value="Judge"/>
            </DescriptiveMetadata>
            <NewsComponent>
                <Role FormalName="Abstract"/>
                <ContentItem>
                    <MediaType FormalName="Text"/>
                    <MimeType FormalName="text/plain"/>
                    <DataContent>
                        The tough-talking British judge presiding over the war crimes trial of former
                        Yugoslav president Slobodan Milosevic, has a reputation for being firm but fair.
                    </DataContent>
                </ContentItem>
            </NewsComponent>
        </NewsComponent>
    </NewsItem>
</NewsML>
```

Related Pictures

Related pictures are treated in almost exactly the same way as sidebar stories, for example:

```
<NewsComponent>
    <Role FormalName="Supporting"/>
    <NewsComponent Duid="A6574839201A">
        <NewsComponent>
            <Role FormalName="Main"/>
            <NewsItemRef NewsItem="urn:newsml:pa.press.net:20041207:PA-A-COURTS-Campbell"/>
        </NewsComponent>
        <NewsComponent>
            <Role FormalName=”Abstract”>
            <NewsComponent>
                <Role FormalName="Main"/>
                <ContentItem Href="COURTS Campbell.jpg">
                    <MediaType FormalName="Photo"/>
                    <MimeType FormalName="image/jpeg"/>
                </ContentItem>
            </NewsComponent>
            <NewsComponent>
                <Role FormalName="Caption"/>
                <ContentItem>
                    <MediaType FormalName="Text"/>
```

```
                    <MimeType FormalName="text/plain"/>
                    <DataContent>
                        Super model Niomi Campbell arrives at the High Court in London covered in a
                        blanket on the second day of her court action against the Daily Mirror, Tuesday 12
                        February, 2002. The 31-year-old Streatham-born model is suing The Mirror for
                        breach of confidence and/or unlawful invasion of privacy after it published a
                        photograph of her leaving a meeting in Chelsea's King's Road a year ago. It said
                        that Campbell had been receiving regular counselling in a &quot;courageous bid to
                        beat her addiction to drink and drugs.&quot; See PA story COURTS Campbell. PA
                        Photo: Peter J Jordan.
                    </DataContent>
                </ContentItem>
            </NewsComponent>
        </NewsComponent>
    </NewsComponent>
</NewsComponent>
```

The picture preview consists of two **NewsComponent**s. The first (with a **Role** of *Main*) wraps a **NewsItemRef** which refers to the master NewsML file for that picture containing all of its metadata (see *Picture NewsML files*, below). The second **NewsComponent** (with a **Role** of *Abstract*) is provided as a means of supplying a little information about the picture in the main story, so that systems don't need to open the other NewsML file just to display a quick link: it contains two further **NewsComponent**s – one (with a **Role** of *Main*) that refers to the JPEG file, and one (with a **Role** of *Caption*) containing the caption information.

Picture NewsML Files

The main **NewsComponent** used in a NewsML file describing a picture is similar to how they are referred to as Supporting items from other content:

```
<NewsComponent Duid="GIULIANI12345">
    <Role FormalName="Main"/>
    <NewsLines>
        <HeadLine>Giuliani arrives at Heathrow Airport</HeadLine>
        <ByLine>Tim Ockenden</ByLine>
        <CopyrightLine>Press Association 2005</CopyrightLine>
        <SlugLine>GIULIANI arrival</SlugLine>
    </NewsLines>
    <DescriptiveMetadata>
        <Property FormalName="Category" Value="A"/>
        <Property FormalName="Topic" Value="GIULIANI"/>
        <Property FormalName="Keyword" Value="Arrival"/>
        <Location HowPresent=”Origin”>
            <Property FormalName=”City” Value=”London”/>
            <Property FormalName=”Country” Value=”UK”/>
        </Location>
    </DescriptiveMetadata>
    <NewsComponent>
        <NewsComponent>
            <Role FormalName="Main"/>
            <ContentItem Href="GIULIANI_arrival.jpg">
                <MediaType FormalName="Photo"/>
                <MimeType FormalName="image/jpeg"/>
                <Characteristics>
                    <SizeInBytes>578264</SizeInBytes>
                </Characteristics>
            </ContentItem>
        </NewsComponent>
        <NewsComponent>
            <Role FormalName="Caption"/>
            <ContentItem>
                <MediaType FormalName="Text"/>
                <MimeType FormalName="text/plain"/>
                <DataContent>
                    Former New York Mayor Rudolph Giuliani arrives at Heathrow Airport, Tuesday 12th
                    February 2002, with his girlfriend Judith Nathan and is met at the  BA Concorde by
                    British Airways Chairman Rod Eddington. Giuliani is here to receive an Honorary
                    Knighthood from the Queen tomorrow, Wednesday at Buckingham Palace. PA Photo : Tim
                    Ockenden.
                </DataContent>
            </ContentItem>
        </NewsComponent>
    </NewsComponent>
</NewsComponent>
```

Pictures are represented by two associated **NewsComponent**s, one referencing a JPEG file and the other containing the caption information. The rest of the picture metadata is associated with the enclosing **NewsComponent**.

The NewsML represents metadata as extracted from the IIM Record 2 items embedded inside the JPEG, as explained in this table:

IIM Record	IIM Name	NewsML Element
2:5	Object Name	SlugLine
2:15	Category	Property@FormalName="Category"
2:47	Reference Date	DateId
2:55	Date Created	FirstCreated
2:80	Byline	ByLine
2:90	City	Location/Propery@FormalName="City"
2:101	Country Name	Location/Property@FormalName="Country"
2:103	Origianl transmission reference	NewsComponent@Duid
2:110	Credit	SentFrom
2:115	Source	Source/Party@FormalName
2:120	Caption	NewsComponent/DataContent (where NewsComponent/Role@FormalName="Caption")

For future expansion, other binary file types are likely to be dealt with in a similar way.
In the example, the **Href** on the **ContentItem** refers to a local file (**GIULIANI_arrival.jpg**), delivered alongside the NewsML document. PA is considering an approach where either this **Href** or an additional one refers back to a secure web site hosted by PA, from where binary files can be downloaded for a limited number of days.
The **NewsManagement** section of this NewsML file will carry an **AssociatedWith** element to declare the parent story to which the picture is related.

Other Metadata

In addition to the mandatory NewsML elements at the **NewsItem** level, PA proposes to use the following optional elements:
The **NewsEnvelope** will contain information in the **SentFrom** and **SentTo** fields. **SentFrom** will always be set to **The Press Association**.
The priority of the message will be indicated in two places: in the **Priority** element inside **NewsEnvelope**, and in the **Urgency** element inside **NewsManagement**. PA priorities run from 1 (highest) to 5 (lowest).
As well as being put into the **SlugLine**, the name of the article will also be carried in the **NameLabel** element inside **Identification**.
The service (Comprehensive or PACE) of a particular article will be noted using the **NewsService** element.

```
<NewsML>
    <NewsEnvelope>
        <SentFrom>
            <Party FormalName="Press Association"/>
        </SentFrom>
        <DateAndTime>20041207T143910</DateAndTime>
        <NewsService FormalName="Comprehensive"/>
        <Priority FormalName="4"/>
    </NewsEnvelope>
    <NewsItem>
        <Identification>
            <NewsIdentifier/>
            <NameLabel>COURTS Boy</NameLabel>
        </Identification>
        <NewsManagement>
            <NewsItemType FormalName="News"/>
            <FirstCreated>20041207T143910</FirstCreated>
            <ThisRevisionCreated>20041207T143910</ThisRevisionCreated>
            <Status FormalName="Usable"/>
            <Urgency FormalName="4"/>
        </NewsManagement>
    </NewsItem>
</NewsML>
```

Each top-level **NewsComponent** will also carry an **AdministrativeMetadata** section, reiterating that The Press Association is the provider of the content, and suggesting a filename to be used to save the NewsML document:

```
<AdministrativeMetadata>
    <FileName>200502040245_PRESSUK_COMPRE___PA-HHH-COURTS-Boy__PRI15.xml</FileName>
    <Provider>
        <Party FormalName="Press Association"/>
    </Provider>
</AdministrativeMetadata>
```

Where an article is a press release distributed on behalf of one of PA's press release contributors, this will be acknowledged by the use of additional Source elements. The first of these will be the name of the PR company. If the name of the company originating the release (or, in the case of Government releases, the government department) is known, this will be included as a preceding Source:

```
<AdministrativeMetadata>
    <FileName>200502041234_PRESSUK_COMPRE___ANOPR-GXX-TECHNOLOGY-RandomCompany.xml</FileName>
    <Provider>
        <Party FormalName="Press Association"/>
    </Provider>
    <Source>
        <Party FormalName="Random Company PLC"/>
    </Source>
    <Source>
        <Party FormalName="A N Other Press Releases"/>
    </Source>
</AdministrativeMetadata>


<AdministrativeMetadata>
    <FileName>200502040830_PRESSUK_COMPRE___GNN-GNN-LEGAL-Bankruptcies.xml</FileName>
    <Provider>
        <Party FormalName="Press Association"/>
    </Provider>
    <Source>
        <Party FormalName="Department for Constitutional Affairs"/>
    </Source>
    <Source>
        <Party FormalName="Government News Network"/>
    </Source>
</AdministrativeMetadata>
```

Categorisation

NewsML provides various mechanisms for defining controlled vocabularies for categorization. It also provides a mechanism inside **DescriptiveMetadata** – the **Subject**/**SubjectMatter**/**SubjectDetail** elements – for using the IPTC NewsCodes (previously known as the Subject Reference Scheme, or SRS). PA is investigating the feasibility of providing NewsCodes in addition to its own classification.

PA has its own categorization scheme, which has two aspects: topics and categories. This scheme does not map well into NewsML's categorization mechanisms. Therefore the PA taxonomies are being implemented using NewsML's extensibility mechanism: the general-purpose Property element, in this case as part of **DescriptiveMetadata**:

```
<NewsComponent>
    <Role FormalName="Main"/>
    <NewsLines>
        <HeadLine>MAN CHARGED IN BOY MURDER CASE</HeadLine>
        <ByLine>By A. N. Other, PA News Courts Correspondent</ByLine>
        <CopyrightLine>Copyright Press Association 2005</CopyrightLine>
        <SlugLine>COURTS Boy</SlugLine>
    </NewsLines>
    <DescriptiveMetadata>
        <Property FormalName="Category" Value="HHH"/>
        <Property FormalName="Topic" Value="COURTS"/>
        <Property FormalName="Keyword" Value="Boy"/>
    </DescriptiveMetadata>
</NewsComponent>
```

Note that as well as having multiple Keywords, a story may have multiple Topics and multiple Categories if the content is relevant to more than one topic and/or category.

Rights & Usage

In addition to the **CopyrightLine** in **NewsLines**, the top-level **NewsComponent** will contain a **RightsMetadata** section:

```
<RightsMetadata>
    <Copyright>
        <CopyrightHolder>Press Association</CopyrightHolder>
        <CopyrightDate>2005</CopyrightDate>
    </Copyright>
</RightsMetadata>
```

Status of Stories

NewsML has a set of news management facilities for handling embargoes, story kills and so on. This is handled via the **Status** element inside the **NewsManagement** of the **NewsItem**.

The default controlled vocabulary for Status has four entries:

- **Usable**: *The **NewsItem** and its content may be published without restriction*. This will be the usual status of items published by PA.

- **Embargoed**: *Neither the **NewsItem** nor its content may be published until released for publication by the provider*. This will be used for embargoed stories (see below to see how embargo release times will be handled).

- **Withheld**: *Neither the **NewsItem** nor its content may be published until further notice*. The equivalent of an indefinite embargo, this will be used by PA for the initial release of material where it is not yet known when full use will be permitted, and will also be used where permission to publish needs to be withdrawn (for example, where further information on an item requires PA to clarify a legal issue on the story that may prevent publishing). In PA's terminology, this is a **hold**.

- **Canceled**: *Neither the **NewsItem** nor its content may be used under any circumstances. If the **NewsItem** or its content has been published the publisher must take immediate action to withdraw or retract it, as may be legally necessary.* Will be used by PA to kill stories, pictures and any other item.

Embargoes

PA transmits stories to media customers that are not yet for public consumption. These are known as *embargoed* stories. PA's media customers receive this material in advance so that they can prepare it and release it when the embargo expires (for example, the story could be placed on the page of a newspaper in the customer's editorial system as the newspaper itself would not be printed until after the embargo expires).
If the status of the item is going to change at a known time, then PA proposes to use the **StatusWillChange** element set to convey this information. So, an item that is embargoed until midnight on 1st August 2005 would have the following in its **NewsManagement**:

```
<Status FormalName="Embargoed"/>[3]
<StatusWillChange>
    <FutureStatus FormalName="Usable"/>
    <DateAndTime>20050801T000000+0100</DateAndTime>
</StatusWillChange>[4]
```

Usually, this will be associated with a piece of advisory text material – see the section on advisories.
***Note:** use of the **StatusWillChange** element will be phased in during the rollout of the Mediadirect system*

HOLDs and KILLs

Holds and Kills will be treated in a similar way. A replacement NewsML document will be transmitted (incrementing the revision number), but without a **ContentItem**. Instead, the **NewsComponent** will simply carry an advisory (see below) stating the reason for the hold/kill.

Advisories

Advisory notices, which are for the attention of journalists and editorial staff and not for display to the public, may be associated with items of content. These instructions will give further information to the editorial staff at PA's customers and will include information such as the nature of an embargo, the reason for a kill or hold on a story, and expectations of further material being made available on a given event.
This will be implemented by adding a **Comment** into the **NewsComponent** that represents the relevant item. For example, editorial notes accompanying a story from the PA schedule might look like this:

```
<NewsComponent Duid="A1212121212A">
    <Comment>
        Preparing new story with reaction from fishing industry. Report is officially launched at 1100 at
        Natural History Museum.
    </Comment>
    <ContentItem>
        <MediaType FormalName="Text"/>
        <MimeType FormalName="text/vnd.IPTC.NITF"/>
        <DataContent>
            <nitf>
                <body>
                    <body.content>
                        <p>Proposals to ban fishing in almost a third of UK waters to protect threatened
                        species provoked an angry response from industry leaders today.</p>
                    </body.content>
                </body>
            </nitf>
        </DataContent>
    </ContentItem>
</NewsComponent>
```

[3] The usual value for Status will be *Usable*. Other statuses are available, for the purposes of embargoing and spiking material (see below)

[4] For embargoed stories (where the status is not initially set to *Usable*), you can specify the release date and time by using `StatusWillChange`

Mark-up of recognised entities

Inline Markup

PA proposes to add inline mark-up to news stories, to identify people, places and organizations. These will be indicated for example by the use of the NITF **person**, **location** and **org** tags respectively:

```
<body.content>
    <p>
        A Briton jailed for 14 years in <location>Japan</location> for drug offences he claims he did not
        commit is due to give evidence at his appeal hearing today.
    </p>
    <p>
        <person>Nick Baker</person>, 33, from <location>Stroud, Gloucestershire</location>, maintains he was
        duped by a travelling companion after more than 40,000 Ecstasy tablets and nearly a kilo of cocaine
        was found in a suitcase he was carrying at <location>Tokyo</location>'s Narita airport.
    </p>
    <p>
        Lawyers representing the father of one, who was also fined £25,600 in June 2003, submitted grounds
        for his appeal at <location>Tokyo</location>'s High Court in March.
    </p>
    <p>
        <person>Baroness Sarah Ludford</person>, London MEP and <org>Liberal Democrats</org> European
        justice spokeswoman, has supported Baker and flew to <location>Tokyo</location> in 2003 with a
        representative from <org>Fair Trials Abroad</org> in an attempt to get him a fair trial.
    </p>
</body.content>
```

Please see the “PA NITF” document for more details.

Enumeration of Entities in NewsML metadata

PA proposes that entities identified using inline mark-up will also be enumerated in the NewsML wrapper in the **DescriptiveMetadata** section:

```
<DescriptiveMetadata>
    <Property FormalName="Category" Value="HHH"/>
    <Property FormalName="Topic" Value="COURTS"/>
    <Property FormalName="Keyword" Value="Ecstasy"/>
    <Property FormalName="Location" Value="Japan"/>
    <Property FormalName="Person" Value="Nick Baker"/>
    <Property FormalName="Location" Value="Stroud, Gloucestershire"/>
    <Property FormalName="Location" Value="Tokyo"/>
    <Property FormalName="Person" Value="Baroness Sarah Ludford"/>
    <Property FormalName="Organisation" Value="Liberal Democrats"/>
    <Property FormalName="Organisation" Value="Fair Trials Abroad"/>
</DescriptiveMetadata>
```

7901/ Data Format Specification

(The Press Association)

IN ACCORDANCE WITH IPTC TECH7901 (UK VERSION)

	Field Title	Composition	Content/Example
3.	Preheader Information	Defined by NAK, *CR* , *LF*. One or more groups of 3 alphas, each terminated by *SPACE*. The last terminated by *SPACE*, *CR* , *LF* & 5 DEL codes.	See list below
4.1	Start of Header	One SOH code	SOH
4.2	Source Identification	Three alphas	HSA for Comprehensive Service or PAS for PACE London's
4.2	Sequence Number	Four numerics from 0001 to 9999	e.g. 1347
4.3	Field Separator	One space code	*SPACE*
4.4	Priority of Story	One numeric from 1 to 5	See list below
4.5	Field Separator	One space code	*SPACE*
4.6	Category of Story	Three alphas	See list below
4.7	Field Separator	One space code	*SPACE*
4.8	Word Count	Up to 4 numerics, leading zeroes suppressed	e.g. 201
4.9	Field Separator	One space code	*SPACE*
4.10	Optional Information	Up to 50 characters	e.g. PA PARLY
4.11	Field Separator	*CR LF* codes	*CR LF*
4.12	Keyword & Catchline	Page number, keyword in caps, and up to three other words in c&lc. Maximum 69 characters.	e.g. 2 Thatcher Letter
4.13	Field Separator	*CR LF* codes	*CR LF*
4.14	Start of Text	One STX code	STX
5.	Message Text		
5	Slug Information	Not currently used	
6.1	End of Text	*CR LF* & ETX codes	*CR LF* ETX
6.2	Date and Time	Six numerics, 2 each for day, hour & minute, followed by space. Three alphas for month, followed by space. Two numerics for year.	231438 May 88
6.3	Message Separation Pattern	Quad Left, *CR* & 5 *LF* codes	Q/L *CR LF LF LF LF LF*
6.4	End of Transmission	One EOT & 3 *LF* Codes	EOT *LF LF LF*

Examples of Content of Preheader Information Field 3 :

AAA Home News
EMB Embargo items
CCC Sports items
NNN Item also on Newswire.
Each or several individual sites 3-alpha codes.

Contents of Priority of Story Field 4.4 :

1 FLASH and RUSH (breaks into any item in transmission)
2 SNAP and RUSHFULL
3 SNAPFULL
4 Normal
5 Requested rerun. NB some low priority items will run at priority 5 (eg test messages)

Note : Items broken into by a Priority 1 message

Items will be terminated by the following code sequence:
CR LF CR LF BUST IT CAN EOT *CR LF LF LF LF LF LF*
The Priority message will then commence in the normal way.
The BUST message will be repeated in full, following completion of the Priority message.

Contents of Category of Story Field 4.6 :

See list sent on system First Tuesday of each month.

MESSAGE HEADER

Messages are transmitted by the Message Switching System using the International Press Telecommunications Council Standard Format 7901. This format is as follows:-

	Field Title	Composition
1.	**Preheader Information**	**Defined by NAK, *CR* , *LF*. One or more groups of 3 alphas each terminated by *SPACE*. The last terminated by *SPACE*, *CR* , *LF* and 5 DEL codes.**
2.1	**Start of Header**	**One SOH code.**
2.2	**Source Indentification**	**Three Alphas**
2.3	**Sequence Number**	**Four numerics from 0001 to 9999**
2.4	**Field Separator**	**One *SPACE* code**
2.5	**Priority of Story**	**One numeric from 1 to 4**
2.6	**Field Separator**	**One *SPACE* code**
2.7	**Category of Story**	**Three Alphas**
2.8	**Field Separator**	**One *SPACE* code**
2.9	**Word Count**	**Up to 4 Numerics, leading zeroes suppressed**
2.10	**Field Separator**	**One *SPACE* code**
2.11	**Optional Information**	**Up to 50 characters**
2.12	**Field Separator**	***CR LF* codes**
2.13	**Keyword and Catchline**	**Page number, keyword in caps and up to three other words in c&lc. Maximum 69 characters**
2.14	**Field Separator**	***CR LF* codes**
2.15	**Start of Text**	**One STX code**
3.	**Message Text**	
3.1	**Slug Information**	**Not currently used**
4.1	**End of Text**	***CR LF* and ETX codes**
4.2	**Date and Time**	**Six numerics, 2 each for day, hour and minutes, followed by *SPACE*. Three Alphas for month, followed by *SPACE*. Two numerics for year.**
4.3	**Message Separation Pattern**	**Quad Left, *CR* and 5 *LF* codes**
4.4	**End of Transmission**	**One EOT and 3 *LF* codes.**

MESSAGE FORMAT AND ADDRESSING (cont'd)

A message filed from SYS55 with the input header completed thus:-
INFO *PA* _____
PRI *4* CAT *HHH*_TXT(X)/TAB(T)X
PG *1* __ TOPIC *TRANSPORT* ___KEYWORD *Drink* _____- *Police* _____
…
ADDRESS *AAA* _____
would appear on transmission with the message header:-
AAA HHH
HSA1104 4 HHH 143 PA
1 TRANSPORT Drink Police
with

a) the PRI field of the SII input header as field 2.5 of the output header;
b) the SII CAT Field 1s field 2.7 of the output header;
c) the SII INFO Field 1s field 2.11 of the output header
d) the SII PG, TOPIC and KEYWORD fields combined as field 2.13 of the output header

The SII TXT(X)/TAB(T) field of the input header is used to differentiate between normal textual copy and tabular copy for transmission purposes. When an X is inserted the line endings of output copy can be changed from those input on a terminal by the Message Switching system to suit the maximum line character count set for a particular transmission channel; when a T is inserted the original line endings input on a terminal are maintained on transmission.
The contents of Field 1 of the output header - known as the *Call Directing Code* - are generated using look-up tables in the Message Switching system from whatever address is used.
The Source Identification Field 2.2 of the output header is a parameter set in the Switching system and remains the same for any particular transmission channel - for example, the high speed Provincial Service is HSA, the Fast Results Service is EXT.
The sequence Number field 2.3 is genrated by the Switching system and runs consecutively, reverting to 0001 from 9999.
Field 2.9 is also generated by the Switching system by counting the number of print characters between STX and ETX and dividing by a factor of six.

CODE CONVERSION FOR 5-UNIT TRANSMISSION

8-Unit Octal	Characters	5-Unit Octal	8-Unit Octal	Characters	5-Unit Octal
000	NUL	00	100	LR	-
001	SOH	-	101	A	03l
002	STX	-	102	B	31l
003	ETX	-	103	C	16l
004	EOT	-	104	D	11l
005	ENQ	-	105	E	01l
006	ACK	-	106	F	15l
007	BEL	13f	107	G	32l
010	BS	-	110	H	24l
011	HT	-	111	I	06l
012	*LF*	02e	112	J	13l
013	VT	-	113	K	17l
014	FF	-	114	L	22l
015	*CR*	10e	115	M	34l
016	SO	-	116	N	14l
017	SI	-	117	O	30l
020	DLE	-	120	P	26l
021	DC1	-	121	Q	27l
022	DC2	-	122	R	12l
023	DC3	-	123	S	05l
024	DC4	-	124	T	20l
025	NAK	-	125	U	07l
026	SYN	-	126	V	36l
027	ETB	-	127	W	23l
030	CAN	-	130	X	35l
031	EmSp	04e	131	Y	25l
032	SUB	-	132	Z	21l
033	ESC	-	133	1/8	Note 1
034	*FS*	-	134	¼	Note 1
035	GS	-	135	3/8	Note 1
036	*RS*	-	136	UR	-
037	US	-	137	MINUS	03f
040	Space	04e	140	‘	05f
041	!	32f	141	a	03l
042	ThSp	04e	142	b	31l
043	£	24f	143	c	16l
044	EnSp	04e	144	d	11l
045	%	Note 2	145	e	01l
046	&	Note 3	146	f	15l
047	'	05f	147	g	32l
050	(	17f	150	h	24l
051	)	2f	151	i	06l
052	EmSp	04e	152	j	13l
053	+	21f	153	k	17l
054	.	14f	154	l	22l
055	-	03f	155	m	34l
056	.	34f	156	n	14l
057	/	35f	157	o	30l
060	0	26f	160	p	26l
061	1	27f	161	q	27l
062	2	23f	162	r	12l
063	3	01f	163	s	05l
064	4	12f	164	t	20l
065	5	20f	165	u	07l
066	6	25f	166	v	36l
067	7	07f	167	w	23l

8-Unit Octal	Characters	5-Unit Octal	8-Unit Octal	Characters	5-Unit Octal
070	8	06f	170	x	35l
071	9	30f	171	y	25l
072	:	16f	172	z	21l
073	:	16f	173	½	Note 1
074	QL	-	174	5/8	Note 1
075	QC	-	175	¾	Note 1
076	QR	-	176	7/8	Note 1
077	?	31f	177	DEL	37

Note 1: One-character fractions in 8-unit should be output as three characters preceded by a hyphen, i.e. -1/8.
Note 2: One-character percentage sign should be output as ‘p.c.’
Note 3: One-character ampersand should be output as ‘and’.
Note 4: 5-unit codes with an ‘f’ should be preceded by a Figure Shift code (octal 33), with an ‘l’ by a Letter Shift code (octal 37), those with an ‘e’ can be in either shift.

CRICKET COUNTY FIXTURE LISTS SPECIFICATION

County Fixture Lists will be sent with the Story Category Code RDH

The List is divided into three Records. These are then subsequently divided into Fields.
The Records and Fields are as follows:-

Record 0	:	List Information		
Field	a	:	County Name	Preceded by *RS 00 FS*, terminated by *CR LF*
Record 1	:	Month		
Field	a	:	Month	Preceded by *RS 01 FS*
Record 2	:	Opposition and Venue		
Field	a	:	Day of Month	Preceded by *RS 02 FS*
Field	b		Opposition	Preceded by *FS SPACE FS*
Field	c	:	Venue	Preceded by *FS SPACE FS*
Field	d	:	Number of days	Preceded by *FS SPACE FS, Terminated by CR LF*

CRICKET FIXTURES LIST SPECIFICATION

Cricket Fixtures will be sent with the Story Category Code *RS*D

A list is divided into five Records, the third subsequently divided into two Fields and the fourth into four Fields.

The Records and Fields are as follows:-

Record 0	:	**List Information**		
Field	a	:	Text	Preceded by *RS 00 FS*, terminated by *CR LF*
Record 1	:	**Date and Normal Start Time**		
Field	a	:	Date	Preceded by *RS 01 FS*
Field	b	:	Time	Preceded by *FS SPACE FS,* terminated by *CR LF*

This Record is repeated for each date.

Record 2	:	**Game Type and Duration**		
Field	a	:	Game Type	Preceded by *RS 0S FS*
Field	b	:	Duration	Preceded by *FS SPACE FS*, terminated by *CR LF*

This Record is repeated within each date as required

Record 3	:	**Fixture Information**		
Field	a	:	Sunday play/reserve day indicator	Preceded by *RS 03 FS*
Field	b	:	Location	Preceded by *FS SPACE FS*
Field	c	:	Home Team	Preceded by *FS SPACE FS*
Field	d	:	Away Team	Preceded by *FS SPACE FS*
Field	e	:	Start time if not normal time	Preceded *by FS SPACE FS*, terminated by *CR LF*

This Record is repeated for each fixture.

Record 4		:	**Comments**	
Field	a	:	Text	Preceded by *RS 04 FS*, terminated by *CR LF*

CRICKET SCOREBOARD SPECIFICATION

Cricket Scoreboards will be sent with the Story Category Code RCD

A Scoreboard is divided into up to fifteen records, four of which are subsequently divided into a number of fields.
Each Record will be defined by a Record Separator code-2 numerics-Field Separator code-string and terminated by *CR LF*.
Each Field within a Record will be defined by a Field Separator-Space-Field Separator code string.
Where a Record has no data the *RS* code string will not be present.
FS code strings will always be present within a Record.
Where an entry will give a line length exceeding 80 characters, *CR LF* will be inserted after a *FS*-Space-*FS* code string, or after a word space in the case of a long text string.

The Records and Fields are as follows:

Record 0		**:**	**Team Names**	
Field	a	:	Text	Preceded by *RS 00 FS*, terminated by *CR LF*
Record 1		**:**	**Venue and Toss/Win Details**	
Field	a	:	Venue	Preceded by *RS 01 FS*
Field	b	:	Toss/Win text line	Preceded by *FS SPACE FS*, terminated by *CR LF*
Record 2		**:**	**Overnight Score, etc.**	
Field	a	:	Text	Preceded by *RS 02 FS*, terminated by *CR LF*
Record 3		**:**	**Batting Team and, for example, score to date**	
Field	a	:	Text	Preceded by *RS 03 FS*, terminated by *CR LF*
Record 4		**:**	**Individual Score Details. (This record will be repeated for each batsman)**	
Field	a	:	Batsman 1st Initial	Preceded by *RS 04 FS*
Field	b	:	Batsman 2nd Initial	Preceded by *FS SPACE FS*
Field	c	:	Batsman 3rd Initial	Preceded by *FS SPACE FS*
Field	d	:	Batsman Surname	Preceded by *FS SPACE FS*
Field	e	:	How Out	Preceded by *FS SPACE FS*
Field	f	:	Fielder	Preceded by *FS SPACE FS*
Field	g	:	Bowled	Preceded by *FS SPACE FS*
Field	h	:	Bowler	Preceded by *FS SPACE FS*
Field	I	:	Score	Preceded by *FS SPACE FS*, terminated by *CR* L.F
Record 5		**:**	**Extras Details**	
Field	a	:	'Extras'	Preceded by *RS 05 FS*
Field	b	:	Itemised Extras	Preceded by *FS SPACE FS*
Field	c	:	Total Extras	Preceded by *FS SPACE FS*, terminated by *CR LF*
Record 6		**:**	**Totals Details**	
Field	a	:	Total	Preceded by *RS 06 FS*
Field	b	:	Wickets Fallen and Overs	Preceded by *FS SPACE FS*
Field	c	:	Team Total	Preceded by *FS SPACE FS*, terminated by *CR LF*
Record 7		**:**	**Fall of Wickets**	
Field	a	:	Text	Preceded by *RS 07 FS*, terminated by *CR LF*
Record 8		**:**	**'Did Not Bat' Names**	
Field	a	:	Text	Preceded by *RS 08 FS*, terminated by *CR LF*
Record 9:			**'To Bat' Names**	
Field	a	:	Text	Preceded by *RS 09 FS*, terminated by *CR LF*
Record 10		**:**	**'100 Overs' Team and Score**	
Field	a	:	Text	Preceded by *RS 10 FS*, terminated by *CR LF*
Record 11		**:**	**'Bonus Points' Home Team Points Away Team Points**	
Field	a	:	Text	Preceded by *RS 11 FS*, terminated by *CR LF*
Record 12		**:**	**Additional Information**	
Field	a	:	Text	Preceded by *RS 12 FS*, terminated by *CR LF*
Record 13		**:**	**Bowling Analysis (This Record will be repeated for each bowler)**	
Field	a	:	Bowler	Preceded by *RS 13 FS*
Field	b	:	Overs	Preceded by *FS SPACE FS*
Field	c	:	Maidens	Preceded by *FS SPACE FS*
Field	d	:	Runs	Preceded by *FS SPACE FS*
Field	e	:	Wickets	Preceded by *FS SPACE FS*, terminated by *CR LF*
Record 14		**:**	**Umpires**	
Field	a	:	Text	Preceded by *FS SPACE FS*, terminated by *CR LF*

Note: The page number will start as '1' for each match on any particular day and be incremented for any subsequent updated scoreboards on that same day. The outputs will be in alphabetical order using the name of the home team in the fixtures.

CRICKET COLLATED SCOREBOARD SPECIFICATION

Cricket Scoreboards will be sent with the Story Category Code RDG

Cricket Scoreboards are divided up into 15 Records, 5 of which are subsequently divided into a number of Fields.

The Records and Fields are as follows:-

Record 0	**:**	**Team Names**	
Field a	:	Text	Preceded by *RS 00 FS*, terminated by *CR LF*
Record 1	**:**	**Venue and Toss/Win Details**	
Field a	:	Venue	Preceded by *RS 01 FS*
Field b	:	Toss/Win Text Line	Preceded by *FS SPACE FS*, terminated by *CR LF*
Record 2	**:**	**Overnight Score, etc.**	
Field a	:	Text	Preceded by *RS 02 FS* terminated by *CR LF*
Record 3	**:**	**Batting Team and, for example, score to date**	
Field a	:	Text	Preceded by *RS 03 FS*, terminated by *CR LF*
Record 4	**:**	**Individual Score Details. (This record will be repeated for each batsman)**	
Field a	:	Batsman 1st Initial	Preceded by *RS 04 FS*
Field b	:	Batsman 2nd Initial	Preceded by *FS SPACE FS*
Field c	:	Batsman 3rd Initial	Preceded by *FS SPACE FS*
Field d	:	Batsman Surname	Preceded by *FS SPACE FS*
Field e	:	How Out	Preceded by *FS SPACE FS*
Field f	:	Fielder	Preceded by *FS SPACE FS*
Field g	:	Bowled	Preceded by *FS SPACE FS*
Field h	:	Bowler	Preceded by *FS SPACE FS*
Field I	:	Score	Preceded by *FS SPACE FS*, terminated by *CR LF*
Record 5	**:**	**Extras Details**	
Field a	:	'Extras'	Preceded by *RS 05 FS*
Field b	:	Itemised Extras	Preceded by *FS SPACE FS*
Field c	:	Total Extras	Preceded by *FS SPACE FS*, terminated by *CR LF*
Record 6	**:**	**Totals Details**	
Field a	:	Total	Preceded by *RS 06 FS*
Field b	:	Wickets Fallen and Overs	Preceded by *FS SPACE FS*
Field c	:	Team Total	Preceded by *FS SPACE FS*, terminated by *CR LF*
Record 7	**:**	**Fall of Wickets**	
Field a	:	Text	Preceded by *RS 07 FS*, terminated by *CR LF*
Record 8	**:**	**'Did Not Bat' Names**	
Field a	:	Text	Preceded by *RS 08 FS*, terminated by *CR LF*
Record 9	**:**	**'To Bat' Names**	
Field a	:	Text	Preceded by *RS 09 FS*, terminated by *CR LF*
Record 10	**:**	**'100 Overs' Team and Score**	
Field a	:	Text	Preceded by *RS 10 FS*, terminated by *CR LF*
Record 11	**:**	**'Bonus Points' Home Team Points Away Team Points**	
Field a	:	Text	Preceded by *RS 11 FS,* terminated by *CR LF*
Record 12	**:**	**Additional Information**	
Field a	:	Text	Preceded by *RS 12 FS*, terminated by *CR LF*
Record 13	**:**	**Bowling Analysis (This Record will be repeated for each bowler)**	
Field a	:	Bowler	Preceded by *RS 13 FS*
Field b	:	Overs	Preceded by *FS SPACE FS*
Field c	:	Maidens	Preceded by *FS SPACE FS*
Field d	:	Runs	Preceded by *FS SPACE FS*
Field e	:	Wickets	Preceded by *FS SPACE FS*, terminated by *CR LF*
Record 14	**:**	**Umpires**	
Field a	:	Text	Preceded by *FS SPACE FS*, terminated by *CR LF*

Note: The page number will start as '1' for each match on any particular day and be incremented for any subsequent updated scoreboards on that same day. The outputs will be in alphabetical order using the name of the home team in the fixtures.

CRICKET SUMMARIES SPECIFICATION

Cricket Summaries will be sent with the Story Category Code RDC

Cricket Summaries are divided into up to 18 Records, 13 of which are subsequently divided into a number of Fields.
The Records and Fields are as follows:-

Record 0		**:**	**Match Type (This Record repeated for each different type)**	
Field	a	:	Text	Preceded by *RS 00 FS*, terminated by *CR LF*
Record 1		**:**	**Match Venue**	
Field	a	:	Text	Preceded by *RS 01 FS*, terminated by *CR LF*
Record 2		**:**	**First Batting Team**	
Field	a	:	Text	Preceded by *RS 02 FS*, terminated by *CR LF*
Record 3		**:**	**1st Innings Details**	
Field	a	:	Score	Preceded by *RS*03 *FS*
Field	b	:	Wickets Fallen	Preceded by *FS SPACE FS*
Field	c	:	Declared	Preceded by *FS SPACE FS*, terminated by *CR LF*
Record 4		**:**	**Individual Batting Details (over 50 Runs)**	
Field	a	:	Batsman	Preceded by *RS 04 FS*
Field	b	:	Score	Preceded by *FS SPACE FS*
Field	c	:	Not Out	Preceded by *FS SPACE FS*, terminated by *CR LF*
This Record repeated for each Batsman with over 50 Runs				
Record 5		**:**	**Individual Bowling Details (4 or more Wickets)**	
Field	a	:	Bowler	Preceded by *RS 05 FS*
Field	b	:	Wickets	Preceded by *FS SPACE FS*
Field	c	:	Runs	Preceded by *FS SPACE FS*, terminated by *CR LF*
This Record repeated for each bowler with over 3 Wickets				
Record 6		**:**	**2nd Innings Details**	
Field	a	:	Score	Preceded by *RS 06 FS*
Field	b	:	Wickets Fallen	Preceded by *FS SPACE FS*
Field	c	:	Declared	Preceded by *FS SPACE FS*, terminated by *CR LF*
Record 7		**:**	**Individual Batting Details (over 50 Runs)**	
Field	a	:	Batsman	Preceded by *RS 07 FS*
Field	b	:	Score	Preceded by *FS SPACE FS*
Field	c	:	Not Out	Preceded by *FS SPACE FS*, terminated by *CR LF*
This Record repeated for each batsman with over 50				
Record 8		**:**	**Individual Bowling Details (4 or more Wickets)**	
Field	a	:	Bowler	Preceded by *RS 08 FS*
Field	b	:	Wickets	Preceded by *FS SPACE FS*
Field	c	:	Runs	Preceded by *FS SPACE FS*, terminated by *CR LF*
This Record repeated for each Bowler with over 3 Wickets				
Record 9		**:**	**2nd Batting Team**	
Field	a	:	Text	Preceded by *FS SPACE FS*, terminated by *CR LF*
Record 10		**:**	**1st Innings Details**	
Field	a	:	Score	Preceded by *RS 10 FS*
Field	b	:	Wickets Fallen	Preceded by *FS SPACE FS*
Field	c	:	Declared	Preceded by *FS SPACE FS*, terminated by *CR LF*
Record 11		**:**	**Individual Bating Details (over 50 Runs)**	
Field	a	:	Batsman	Preceded by *RS 11 FS*
Field	b	:	Score	Preceded by *FS SPACE FS*
Field	c	:	Not Out	Preceded by *FS SPACE FS*, terminated by *CR LF*
This Record repeated for each batsman with over 50				
Record 12		**:**	**Individual Bowling Details (4 or more Wickets)**	
Field	a	:	Bowler	Preceded *by RS 12 FS*
Field	b	:	Wickets	Preceded by *FS SPACE FS*
Field	c	:	Runs	Preceded by *FS SPACE FS*, terminated by *CR LF*
This Record repeated for each Bowler with over 3 Wickets)				
Record 13		**:**	**2nd Innings Details**	
Field	a	:	Score	Preceded by *RS 13 FS*
Field	b	:	Wickets Fallen	Preceded by *FS SPACE FS*
Field	c	:	Declared	Preceded by *FS SPACE FS*, terminated by *CR LF*

Record 14		**:**	**Individual Batting Details (over 50 Runs)**	
Field	a	:	Batsman	Preceded by *RS 14 FS*
Field	b	:	Score	Preceded by *FS SPACE FS*
Field	c	:	Not Out	Preceded by *FS SPACE FS*, terminated by *CR LF*

This Record repeated for each batsman with over 50.

Record 15		**:**	**Individual Bowling Details (4 or more wickets)**	
Field	a	:	Bowler	Preceded by *RS 15 FS*
Field	b	:	Wickets	Preceded by FS SPACE FS
Field	c	:	Runs	Preceded by *FS SPACE FS*, terminated by *CR LF*

This Record repeated for each bowler with over 3 wickets.

Record 16		**:**	**Win Details**	
Field	a	:	Text	Preceded by *RS 16 FS*, terminated by *CR LF*

Record 17		**:**	**Points Details**	
Field	a	:	Win Team Points	Preceded by *RS 17 FS*
Field	b	:	Lose Team Points	Preceded by *FS SPACE FS,* terminated by *CR LF*

Record 0 will be repeated for each match type
Records 1-17 will be repeated for each match of the same type.

CRICKET LEAGUE & CUP TABLES SPECIFICATION

The League & Cup Tables will be sent with the Story Category Code SRY

The tables are divided into 3 Records, the second subsequently divided into 9 Fields.

The Records and Fields are as follows:-

Record 0 :		**League/Cup Title**	
Field	a :	Text	Preceded by *RS 00 FS*, terminated by *CR LF*
Record 1 :		**Team Details**	
Field	a:	County Name	Preceded by *RS 01 FS*
Field	b :	Previous Year's Position	Preceded by *FS SPACE FS*
Field	c :	Games Played	Preceded by *FS SPACE FS*
Field	d :	Games Won	Preceded by *FS SPACE FS*
Field	e:	Games Lost	Preceded by *FS SPACE FS*
Field	f :	Games Drawn	Preceded by *FS SPACE FS*
Field	g:	Games with no Result	Preceded by *FS SPACE FS*
Field	h:	Points	Preceded by *FS SPACE FS*
Field	I:	Run Rate	Preceded by *FS SPACE FS*, terminated by *CR LF*

This Record is repeated for each team

Record 2 :		**Comments**	
Field	a:	Text	Preceded by *RS 02 FS*, terminated by *CR LF*

CRICKET COUNTY TABLE SPECIFICATION

The County Table will be sent with the Story Category Code SRX

The table is divided into 3 Records, the second subsequently divided into 9 Fields.
Each record will be defined by a Record Separator Code-2 numerics-Field Separator code string, and terminated by *CR LF*.
Each Field within a Record will be defined by a FS-Space-FS code string.
Where a Record has no data the *RS* code string will not be present. *FS* code strings will always be present within a Record.
To ensure a printer monitoring the transmission will not contain overprinted lines, *CR LF* codes will be inserted in the data of Record 2 in place of an interword space to ensure a line length of less than 85 characters.

The Records and Fields are as follows:-

Record 0		**:**	**Championship Title**	
Field	a	:	Text	Preceded by *RS 00 FS*, terminated by CR LF
Record 1		**:**	**Team Details**	
Field	a	:	County Name	Preceded by *RS 01 FS*
Field	b	:	Previous Year's Position	Preceded by *FS SPACE FS*
Field	c	:	Games Played	Preceded by *FS SPACE FS*
Field	d		Games Won	Preceded by *FS SPACE FS*
Field	e	:	Games Lost	Preceded by *FS SPACE FS*
Field	f	:	Games Drawn	Preceded by *FS SPACE FS*
Field	g	:	Batting Bonus Points	Preceded by *FS SPACE FS*
Field	h	:	Bowling Bonus Points	Preceded by *FS SPACE FS*
Field	I	:	Total Points	Preceded by *FS SPACE FS*
Field	j	:	Run Rate	Preceded by *FS SPACE FS,* terminated by *CR LF*

This Record is repeated for each team.

Record 2		**:**	**Comments**	
Field	a	:	Text	Preceded by *RS 02 FS*, terminated by *CR LF*

CRICKET BATTING STATISTICS SPECIFICATION

Batting Statistics will be sent with the Story Category Code RDE

The statistics are divided into 4 Records. These are subsequently divided into Fields.

The Records and Fields are as follows:-

Record 0		**:**	**Information**	
Field	a	:	Batting Statistics for (year)	Preceded by *RS 00 FS*, terminated by *CR LF*
Record 1		**:**	**Name**	
Field	a	:	1st Initial	Preceded by *RS 01 FS*
Field	b	:	2nd Initial	Preceded by *FS SPACE FS*
Field	c	:	3rd Initial	Preceded by *FS SPACE FS*
Field	d	:	Surname	Preceded by *FS SPACE FS*, terminated by *CR LF*
Record 2		**:**	**Batting Details**	
Field	a	:	Number of Runs	Preceded by *RS 02 FS*
Field	b	:	Not Out Indicator	Preceded by *FS SPACE FS*
Field	c	:	Team Playing for	Preceded by *FS SPACE FS*, terminated by *CR LF*
Record 3		**:**	**Venue**	
Field	a	:	Team Playing Against	Preceded by *RS 03 FS*
Field	b	:	Type of Match	Preceded by *FS SPACE FS*
Field	c	:	Venue	Preceded by *FS SPACE FS*
Field	d	:	Date	Preceded by *FS SPACE FS*, terminated by *CR LF*

CRICKET BOWLING STATISTICS SPECIFICATION

Bowling Statistics will be sent with the Story Category Code RDE

The statistics are divided into 4 Records. These are subsequently divided into Fields.

The Records and Fields are as follows:--

Record	**0**	**:**	**Information**	
Field	a	:	Bowling Statistics for (year)	Preceded by *RS 00 FS*, terminated by *CR LF*
Record	**1**	**:**	**Type of Statistics and Name**	
Field	a	:	1st Initial	Preceded by *RS 01 FS*
Field	b	:	2nd Initial	Preceded by *FS SPACE FS*
Field	c	:	3rd Initial	Preceded by *FS SPACE FS*
Field	d	:	Surname	Preceded by *FS SPACE FS*, terminated by *CR LF*
Record	**2**	**:**	**Bowling Details**	
Field	a	:	Wickets	Preceded by *RS 02 FS*
Field	b	:	Runs	Preceded by *FS SPACE FS*
Field	c	:	Team Playing for	Preceded by *FS SPACE FS*, terminated by *CR LF*
Record	**3**	**:**	**Venue**	
Field	a	:	Team Playing Against	Preceded by *RS 03 FS*
Field	b	:	Type of Match	Preceded by *FS SPACE FS*
Field	c	:	Venue	Preceded by *FS SPACE FS*
Field	d	:	Date	Preceded by *FS SPACE FS*, terminated by *CR LF*

CRICKET FIELDING STATISTICS SPECIFICATION

Fielding Statistics will be sent with the Story Category Code SDI

The statistics are divided into 2 Records. These are subsequently divided into Fields.

The Records and Fields are as follows:-

Record	**0**	**:**	**Information**	
Field	a	:	Catching Statistics for (year)	Preceded by *RS 00 FS*, terminated by *CR LF*
Record	**1**	**:**	**Player Details**	
Field	a	:	1st Initial	Preceded by *RS 01 FS*
Field	b	:	2nd Initial	Preceded by *FS SPACE FS*
Field	c	:	3rd Initial	Preceded by *FS SPACE FS*
Field	d	:	Surname	Preceded by *FS SPACE FS*
Field	e	:	Team Playing For	Preceded by *FS SPACE FS*
Field	f	:	Total of Catches	Preceded by *FS SPACE FS*, terminated by *CR LF*

CRICKET WICKET KEEPER STATISTICS SPECIFICATION

Wicket Keeper Statistics will be sent with the Story Category Code RDF

The statistics are divided into 2 Records. These are subsequently divided into Fields.

The Records and Fields are as follows:-

Record	**0**	**:**	**Information**	
Field	a	:	Wicketkeeper Statistics for (year)	Preceded by *RS 00 FS*, terminated by *CR LF*
Record	**1**	**:**	**Name**	
Field	a	:	1st Initial	Preceded by *RS 01 FS*
Field	b	:	2nd Initial	Preceded by *FS SPACE FS*
Field	c	:	3rd Initial	Preceded by *FS SPACE FS*
Field	d	:	Surname	Preceded by *FS SPACE FS*
Field	e	:	Team Playing For	Preceded by *FS SPACE FS*
Field	f	:	Total of Catches	Preceded by *FS SPACE FS*
Field	1g	:	Number of Stumpings	Preceded by *FS SPACE FS*
Field	1h	:	Total	Preceded by *FS SPACE FS*, terminated by *CR LF*

CRICKET BATTING & BOWLING AVERAGES SPECIFICATION

Cricket Averages will be sent with the Story Category Code RDA

The Averages are divided into 6 Records, the fifth subsequently divided into 14 Fields.

The Records and Fields are as follows:-

Record 0		**:**	**Header Information**	
Field	a	:	Text	Preceded by *RS 00 FS*, terminated by CR LF
Record 1		**:**	**Tour Details**	
Field	a	:	Home Team	Preceded by *RS 01 FS*
Field	b	:	Away Team	Preceded by *FS SPACE FS*, terminated by CR LF
Record 2		**:**	**Team/Play Information**	
Field	a	:	Team Name or Player Name	Preceded by *RS 02 FS*
Record 3		**:**	**Qualification Details**	
Field	a	:	Qualification 1	Preceded by *RS 03 FS*
Field	b	:	Qualification 2	Preceded by *FS SPACE FS*, terminated by CR LF
Record 4		**:**	**Player Information (for Batting Averages)**	
Field	a	:	1st Initial	Preceded by *RS 04 FS*
Field	b	:	2nd Initial	Preceded by *FS SPACE FS*
Field	c	:	3rd Initial	Preceded by *FS SPACE FS*
Field	d	:	Surname	Preceded by *FS SPACE FS*
Field	e	:	Matches	Preceded by *FS SPACE FS*
Field	f	:	Innings	Preceded by *FS SPACE FS*
Field	g	:	Not Outs	Preceded by *FS SPACE FS*
Field	h	:	Runs	Preceded by *FS SPACE FS*
Field	i	:	Highest Score	Preceded by *FS SPACE FS*
Field	j	:	Average	Preceded by *FS SPACE FS*
Field	k	:	100's	Preceded by *FS SPACE FS*
Field	l	:	50's	Preceded by *FS SPACE FS*
Field	m	:	Caught Outs	Preceded by *FS SPACE FS*
Field	n	:	Stumped's	Preceded by *FS SPACE FS*, terminated by CR LF
Record 4		**:**	**Player Information (for Bowling Averages)**	
Field	a	:	1st Initial	Preceded by *RS 04 FS*
Field	b	:	2nd Initial	Preceded by *FS SPACE FS*
Field	c	:	3rd Initial	Preceded by *FS SPACE FS*
Field	d	:	Surname	Preceded by *FS SPACE FS*
Field	e	:	Overs	Preceded by *FS SPACE FS*
Field	f	:	Maidens	Preceded by *FS SPACE FS*
Field	g	:	Runs	Preceded by *FS SPACE FS*
Field	h	:	Wickets	Preceded by *FS SPACE FS*
Field	I	:	Average	Preceded by *FS SPACE FS*
Field	j	:	5-Wicket Innings	Preceded by *FS SPACE FS*
Field	k	:	10-Wicket Innings	Preceded by *FS SPACE FS*
Field	l	:	Best Bowling Wickets	Preceded by *FS SPACE FS*
Field	m	:	Best Bowling Runs	Preceded by *FS SPACE FS*
Field	n	:	Field Not Used	Preceded by *FS SPACE FS*, terminated by CR LF

This Record is repeated for each player.

Record 5		**:**	**Comments**	
Field	5a	:	Text	Preceded by *RS 05 FS*, terminated by CR LF

CRICKET SQUAD BATTING & BOWLING AVERAGES SPECIFICATION

Cricket Squad Batting and Bowling Averages will be sent with the Story Category Code RDK

The Averages are divided into 3 Records. The first Record is subsequently divided into 15 Fields.

The Records and Fields are as follows:-

Record 0		**:**	**Information**	
Field	a	:	Text	Preceded by *RS 00 FS*
Field	b	:	Team Name	Preceded by *FS SPACE FS*, terminated by *CR LF*
Record 1		**:**	**Player Information (for Batting Averages)**	
Field	a	:	1st Initial	Preceded by *RS 01 FS*
Field	b	:	2nd Initial	Preceded by *FS SPACE FS*
Field	c	:	3rd Initial	Preceded by *FS SPACE FS*
Field	d	:	Surname	Preceded by *FS SPACE FS*
Field	e	:	Matches	Preceded by *FS SPACE FS*
Field	f	:	Innings	Preceded by *FS SPACE FS*
Field	g	:	Not Outs	Preceded by *FS SPACE FS*
Field	h	:	Runs	Preceded by *FS SPACE FS*
Field	I	:	Highest Score	Preceded by *FS SPACE FS*
Field	j	:	Average	Preceded by *FS SPACE FS*
Field	k	:	100's	Preceded by *FS SPACE FS*
Field	l	:	50's	Preceded by *FS SPACE FS*
Field	m	:	Caught Outs	Preceded by *FS SPACE FS*
Field	n	:	Stumped's	Preceded by *FS SPACE FS*, terminated by *CR LF*
Record 1		**:**	**Player Information (for Bowling Averages)**	
Field	a	:	1st Initial	Preceded by *RS 01 FS*
Field	b	:	2nd Initial	Preceded by *FS SPACE FS*
Field	c	:	3rd Initial	Preceded by *FS SPACE FS*
Field	d	:	Surname	Preceded by *FS SPACE FS*
Field	e	:	Overs	Preceded by *FS SPACE FS*
Field	f	:	Maidens	Preceded by *FS SPACE FS*
Field	g	:	Runs	Preceded by *FS SPACE FS*
Field	h	:	Wickets	Preceded by *FS SPACE FS*
Field	i	:	Average	Preceded by *FS SPACE FS*
Field	j	:	5-Wicket Innings	Preceded by *FS SPACE FS*
Field	k	:	10-Wicket Matches	Preceded by *FS SPACE FS*
Field	l	:	Best Bowling Wickets	Preceded by *FS SPACE FS*
Field	m	:	Best Bowling Runs	Preceded by *FS SPACE FS*
Field	n	:	Field Not Used	Preceded by *FS SPACE FS*, terminated by *CR LF*

This Record is repeated for each player.

Record 2		**:**	**Comments**	
Field	a	:	Text	Preceded by *RS 02 FS*, terminated by *CR LF*

CRICKET BEST PERFORMANCES SPECIFICATION

Cricket Best Performances will be sent with the Story Category Code RDB

Best Performances are divided into 3 Records, the second subsequently divided into 7 Fields.
The contents in Record 1 change according to the type of best performance being output.

The Records and Fields are as follows:-

Record 0		**:**	**Type of Performance**	
Field	a	:	Text	Preceded by *RS 00 FS*, terminated by *CR LF*
Record 1		**:**	**Player Details (Best Batting)**	
Field	a	:	Name	Preceded by *RS 01 FS*
Field	b	:	Deliveries	Preceded by *FS SPACE FS*
Field	c	:	Location	Preceded by *FS SPACE FS*
Field	d	:	Date	Preceded by *FS SPACE FS*
Field	e	:	Field Not Used	Preceded by *FS SPACE FS*, terminated by *CR LF*
			Player Details (Best Bowling)	
Field	a	:	Name	Preceded by *RS 01 FS*
Field	b	:	Wickets	Preceded by *FS SPACE FS*
Field	c	:	Runs	Preceded by *FS SPACE FS*
Field	d	:	Location	Preceded by *FS SPACE FS*
Field	e	:	Date	Preceded by *FS SPACE FS*, terminated by *CR LF*
			Most Catches	
Field	a	:	Name	Preceded by *RS 01 FS*
Field	b	:	Number of Catches	Preceded by *FS SPACE FS*
Field	c	:	Field Not Used	Preceded by *FS SPACE FS*
Field	d	:	Field Not Used	Preceded by *FS SPACE FS*
Field	e	:	Field Not Used	Preceded by *FS SPACE FS*, terminated by *CR LF*
			Most Stumpings	
Field	a	:	Name	Preceded by *RS 01 FS*
Field	b	:	Number of Stumpings	Preceded by *FS SPACE FS*
Field	c	:	Field Not Used	Preceded by *FS SPACE FS*
Field	d	:	Field Not Used	Preceded by *FS SPACE FS*
Field	e	:	Field Not Used	Preceded by *FS SPACE FS*, terminated by *CR LF*
			Most Centuries	
Field	a	:	Name	Preceded by *RS 01 FS*
Field	b	:	Number of 100's	Preceded by *FS SPACE FS*
Field	c	:	Field Not Used	Preceded by *FS SPACE FS*
Field	d	:	Field Not Used	Preceded by *FS SPACE FS*
Field	e	:	Field Not Used	Preceded by *FS SPACE FS*, terminated by *CR LF*
			Most Fifties	
Field	a	:	Name	Preceded by *RS 01 FS*
Field	b	:	Number of 50's	Preceded by *FS SPACE FS*
Field	c	:	Field Not Used	Preceded by *FS SPACE FS*
Field	d	:	Field Not Used	Preceded by *FS SPACE FS*
Field	e	:	Field Not Used	Preceded by *FS SPACE FS*, terminated by *CR LF*
			Wicket Keeping	
Field	a	:	Name	Preceded by *RS 01 FS*
Field	b	:	Number of Stumpings	Preceded by *FS SPACE FS*
Field	c	:	Number of Catches	Preceded by *FS SPACE FS*
Field	d	:	Total	Preceded by *FS SPACE FS*
Field	e	:	Field Not Used	Preceded by *FS SPACE FS*, terminated by *CR LF*

Record 1 is repeated for each player

Record 2		**:**	**Comments**	
Field	a	:	Text	Preceded by *RS 02 FS*, terminated by *CR LF*

GOLF 'A' SCORES SPECIFICATION

The Golf 'A' Scores will be transmitted using Category Code GAA

The Golf 'A' Scores are running scores as they are confirmed during the day.
Players will be sorted by : (I) increasing running score; (ii) decreasing score this round; (iii) alphabetical order on surname.
All players are GB and Ireland unless stated.
The output will consist of two Records.

Record 00 will contain the Tournament Details, and will consist of four Fields.
The 1st Field will contain the Round
The 2nd Field will contain the tournament name.
The 3rd Field will contain the tournament venue.
The 4th Field will contain comment text.

Record 01 will contain the Players' details and will consist of six Fields.
The 1st Field will contain the Players' running score.
The 2nd Field will contain the Amateur indicator (+) - not used if professional.
The 3rd Field will contain the Player's name (including initials).
The 4th Field will contain the Player's country, if not GB or Ireland.
The 5th Field will contain the Player's home club (only used if player is GB amateur or Ireland amateur).
The 6th Field will contain the current round score.

The information will utilise Record and Field separators which are indicated as *RS* and *FS* respectively. Each Record will be preceded by *RS*-nn-*FS* where nn stands for Record Number (00-99) and will be terminated by *CR LF*. Each Field with a Record will be preceded by *FS SPACE FS*. If there is no data for a particular Record the *RS* code, numerics and *FS* code will not be present. The *FS SPACE FS* code strings will always be present within a Record whether the field contains data or not.

The Records and Fields are as follows:-

Record	**0**	**:**	**Tournament Details**	
Field	a	:	Text Round	Preceded by *RS 00 FS*
Field	b	:	Text Tournament Name	Preceded by *FS SPACE FS*
Field	c	:	Text Tournament Venue	Preceded by *FS SPACE FS*
Field	d	:	Text Comment	Preceded by *FS SPACE FS*, terminated by *CR LF*.
Record	**1**	**:**	**Players' Details and Scores**	
Field	a	:	Numeric Running Score	Preceded by *RS 01 FS*
Field	b	:	Text Amateur Indicator	Preceded by *FS SPACE FS*
Field	c	:	Text Player Name	Preceded by *FS SPACE FS*
Field	d	:	Text Player Country	Preceded by *FS SPACE FS*
Field	e	:	Text Player Club	Preceded by *FS SPACE FS*
Field	f	:	Numeric This Round Score	Preceded by *FS SPACE FS*, terminated by *CR LF*

Output Examples

Data Format

*rs00fs*Third*fs fs*Peugeot French Open*fs fs*Golf National*fs fs* All players are GB and Ireland unless stated.
*rs01fs*209*fs fsfs fs*J M Olazabal*fs fs*Spain*fs fsfs fs*67
*rs01fs*211*fs fsfs fs*K Trimble*fs fs*Aus*fs fsfs fs*69
*rs01fs*212*fs fsfs fs*S Luna*fs fs*Spain*fs fsfs fs*69
*rs01fs*213*fs fsfs fs*N Faldo*fs fsfs fsfs fs*67
*rs01fs*213*fs fsfs fs*B Lane*fs fsfs fsfs fs*68
*rs01fs*213*fs fsfs fs*S Lyle*fs fsfs fsfs fs*70
*rs01fs*213*fs fsfs fs*C Moody*fs fsfs fsfs fs*71
*rs01fs*213*fs fsfs fs*V Singh*fs fs*Fiji*fs fsfs fs*73

TTY Format

Third Round of the Peugeot French Open at Golf National
Running Scores
All players are GB and Ireland unless stated

209 J M Olazabal (Spain) 67
211 K Trimble (Aus) 69
213 S Luna (Spain) 69
213 N Faldo 67, B Lane 68, S Lyle 70, C Moody 71, V Singh (Fiji) 73

GOLF 'B' SCORES SPECIFICATION

Golf 'B' Scores will be transmitted using Category Code GAB

The Golf 'B' Scores are collated scores showing accumulative scores and the applicable player's details and individual scores for each round.
All players are GB and Ireland unless stated.
The output will consist of 3 Records.

Record 00 will contain the Tournament Details, and will consist of 4 Fields.
The 1st Field will contain the Round
The 2nd Field will contain the tournament name.
The 3rd Field will contain the tournament venue.
The 4th Field will contain comment text.

Record 01 will contain the Accumulative Score for the Record 02 list that follows.

Record 02 will contain the Players' details and will consist of ten Fields.
The 1st Field will contain the Amateur indicator (+) - not used if Professional.
The 2nd Field will contain the Player's name (including initials).
The 3rd Field will contain the Player's country, if not GB or Ireland.
The 4th Field will contain the Player's home club (only used if player is GB amateur or Ireland amateur).
The 5th Field will contain the first round score.
The 6th Field will contain the second round score.
The 7th Field will contain the third round score.
The 8th Field will contain the fourth round score.
The 9th Field will contain the prize money won.
The 10th Field will contain comment text, e.g. J Romero won after sudden death play off.

The information will utilise Record and Field separators which are indicated as *RS* and *FS* respectively. Each Record will be preceded by *RS*-nn-*FS* where nn stands for Record Number (00-99) and will be terminated by *CR LF*. Each Field with a Record will be preceded by *FS SPACE FS*. If there is no data for a particular Record the *RS* code, numerics and *FS* code will not be present. The *FS SPACE FS* code strings will always be present within a Record whether the field contains data or not.

The Records and Fields are as follows:

Record	**0**	**:**	**Tournament Details**	
Field	a	:	Text	Preceded by *RS 00 FS*
Field	b	:	Text	Preceded by *FS SPACE FS*
Field	c	:	Text	Preceded by *FS SPACE FS*
Field	d	:	Text	Preceded by *FS SPACE FS*, terminated by *CR LF*.
Record	**1**	**:**	**Accumulative Score**	
Field	a	:	Numeric	Preceded by *RS 01 FS*
Record	**2**	**:**	**Players' Details and Individual Scores**	
Field	a	:	Text	Preceded by *RS 02 FS*
Field	b	:	Text	Preceded by *FS SPACE FS*
Field	c	:	Text	Preceded by *FS SPACE FS*
Field	d	:	Text	Preceded by *FS SPACE FS*
Field	e	:	Numeric	Preceded by *FS SPACE FS*
Field	f	:	Numeric	Preceded by *FS SPACE FS*
Field	g	:	Numeric	Preceded by *FS SPACE FS*
Field	h	:	Numeric	Preceded by *FS SPACE FS*
Field	I	:	Text	Preceded by *FS SPACE FS*
Field	j	:	Text	Preceded by *FS SPACE FS*, terminated by *CR LF*

GOLF 'B' SCORES SPECIFICATION (cont'd)

The Records and Fields are as follows:

Record		Field	Content	Field Name	Example
Record 00	**Tournament Details**				
		a	Text	Round	Final
		b	Text	Tournament Name	Peugot French Open
		c	Text	Tournament Venue	Golf National
		d	Text	Comment Text	All players are GB and Ireland unless otherwise stated.
Record 01	**Accumulative Score**	a	Numeric	Accumulative Score	278
Record 02	**Player Details & Individual Scores**				
		a	Text	Amateur Indicator	
		b	Text	Player's Name	J.Romero
		c	Text	Player's Country	Arg
		d	Text	Player's Club	
		e	Numeric	Round 1 Score	69
		f	Numeric	Round 2 Score	69
		g	Numeric	Round 3 Score	67
		h	Numeric	Round 4 Score	73
		I	Text	Prize Money	£82,000
		j	Text	Comment Text	J.Romero won after sudden death play-off.

OUTPUT EXAMPLES

Data Format

*rs*00*fs*Third*fs fs*FRENCH OPEN*fs fs*Golf National*fs fs*All players are GB and Ireland unless stated.
*rs*01*fs*205
*rs*02*fsfs fs*E Romero*fs fs*Arg*fs fsfs fs*69*fs fs*69*fs fs*67*fs fsfs fsfs fs*
*rs*01*fs*209
*rs*02*fsfs fs*J M Olazabal*fs fs*Spain*fs fsfs fs*74*fs fs*67*fs fs*68*fs fsfs fsfs fs*
*rs*01*fs*211
*rs*02*fsfs fs*K Trimble*fs fs*Aus*fs fsfs fs*72*fs fs*70*fs fs*69*fs fsfs fsfs fs*
*rs*01*fs*212
*rs*02*fsfs fs*S Luna*fs fs*Spain*fs fsfs fs*71*fs fs*72*fs fs*69*fs fsfs fsfs fs*
*rs*01*fs*213
*rs*02*fsfs fs*N Faldo*fs fsfs fsfs fs*73*fs fs*73*fs fs*67*fs fsfs fsfs fs*
*rs*02*fsfs fs*B Lane*fs fsfs fsfs fs*73*fs fs*72*fs fs*68*fs fsfs fsfs fs*
*rs*02*fsfs fs*S Lyle*fs fsfs fsfs fs*71*fs fs*72*fs fs*70*fs fsfs fsfs fs*
*rs*02*fsfs fs*C Moody*fs fsfs fsfs fs*76*fs fs*66*fs fs*71*fs fsfs fsfs fs*
*rs*02*fsfs fs*V Singh*fs fs*Fiji*fs fsfs fs*70*fs fs*70*fs fs*73*fs fsfs fsfs fs*

*rs*00*fs*Final*fs fs*FRENCH OPEN*fs fs*Golf National*fs fs*All players are GB and Ireland unless stated
*rs*01*fs*278
*rs*02*fsfs fs*J M Olazabal*fs fs*Spain*fs fsfs fs*74*fs fs*67*fs fs*68*fs fs*69*fs fsfs fs*
*rs*02*fsfs fs*E Romero*fs fs*Arg*fs fsfs fs*69*fs fs*69*fs fs*67*fs fs*73*fs fs*£82,000*fs fs*E Romero won after sudden death play off
*rs*01*fs*280
*rs*02*fsfs fs*N Faldo*fs fsfs fsfs fs*73*fs fs*73*fs fs*67*fs fs*67*fs fsfs fs*
*rs*02*fsfs fs*B Lane*fs fsfs fsfs fs*73*fs fs*72*fs fs*68*fs fs*67*fs fsfs fs*
*rs*02*fsfs fs*S Lyle *fsfs fsfs fs*71*fs fs*72*fs fs*70*fs fs*67*fs fsfs fs*

TTY Format

Third Round of the FRENCH OPEN at Golf National
Collated Scores
All players are GB and Ireland unless otherwise stated
205 E Romero (Arg) 69 69 67
209 J M Olazabal (Spain) 74 67 68
211 K Trimble (Aus) 72 70 69
212 S Luna (Spain) 71 72 69
213 N Faldo 73 73 67, B Lane 73 72 68, S Lyle 71 72 70, C Moody 76 66 71, V Singh (Fiji) 70 70 73
214 P Broadhurst 72 68 74, M Mackenzie 79 65 70, S Torrance 72 70 72
215 R Drummond 73 71 71, M Farry (Fra) 78 68 69, D Feherty 73 70 72, P Mitchell 75 71 69, S Richardson 73 72 70, P Senior (Aus) 76 69 70

GOLF LEADER BOARDS SPECIFICATION

The Golf Leader board will be transmitted using Category Code GLB

The Leader board will be updated hourly through the day. It will contain at least the top eight players at that time. If there are other players in the eighth position, then these shall be included. Players will be sorted from best to worst score.
All players are GB and Ireland unless otherwise stated.
The output will consist of 2 Records.

Record 00 will contain the Tournament Details, and will consist of 4 Fields.
The 1st Field will contain the Round.
The 2nd Field will contain the Tournament name.
The 3rd Field will contain the Tournament venue.
The 4th Field will contain comment text.

Record 01 will contain the Leader Board Details, and will consist of 7 Fields.
The 1st Field will contain the Amateur indicator (+) Not used if professional.
The 2nd Field will contain the Player's name (including initials).
The 3rd Field will contain the Player's country, if not GB or Ireland.
The 4th Field will contain the Player's home club. (Only used if player is GB Amateur or Ireland amateur.
The 5th Field will contain the Off Par amount by which player is under or over par.
This Field will be blank if player is level par.
The 6th Field will contain Under, Over or Level Par Comment text.
The 7th Field will be the number of holes played.

The information will utilise Record and Field separators which are indicated as *RS* and *FS* respectively. Each Record will be preceded by *RS*-nn-*FS* where nn stands for Record Number (00—99) and will be terminated by *CR LF*. Each Field within a Record will be preceded by *FS-SPACE-FS*. If there is no data for a particular record the *RS* code, numerics and *FS* code will not be present. The *FS-SPACE-FS* code strings will always be present within a Record whether the field contains data or not.

The Records and Fields are as follows:

Record 0		**:**	**Tournament Details**	
Field	a	:	Text	Preceded by *RS 00 FS*
Field	b	:	Text	Preceded by *FS SPACE FS*
Field	c	:	Text	Preceded by *FS SPACE FS*
Field	d	:	Text	Preceded by *FS SPACE FS*, terminated by *CR LF*
Record 1		**:**	**Players' Leader Board Details**	
Field	a	:	Text	Preceded by *RS 01 FS*
Field	b	:	Text	Preceded by *FS SPACE FS*
Field	c	:	Text	Preceded by *FS SPACE FS*
Field	d	:	Text	Preceded by *FS SPACE FS*
Field	e	:	Numeric	Preceded by *FS SPACE FS*
Field	f	:	Text	Preceded by *FS SPACE FS*
Field	g	:	Numeric	Preceded by *FS SPACE FS*, terminated by *CR LF*

Cont'd ….

GOLF LEADER BOARDS SPECIFICATION (cont'd)

The Records and Fields are as follows:

Record 00 Tournament Details	Field	Content	Field Name	Example
	a	Text	Round	Third
	b	Text	Tournament Name	Peugeot French Open
	c	Text	Tournament Venue	Golf National
	d	Text	Comment Text	All players are GB and Ireland unless otherwise stated.

Record 01	Players' Leader Board Details			
		a	Text	Amateur Indicator +
		b	Text	Player's Name J Flattery
		c	Text	Player's Country
		d	Text	Player's Club Cork
		e	Numeric	Off Par 1
		f	Text	Under/Over/Level Par Under
		g	Numeric	Number
	Holds Played	54		

OUTPUT EXAMPLES

Data Format - Note : Please read *rs* as Record Separator, and *fs* as Field Separator.

*rs*00*fs*Third*fs fs*FRENCH OPEN*fs fs*Golf National*fs fs*All players are GB and Ireland unless stated
*rs*01*fsfs fs*K Trimble*fs fs*Aus*fs fsfs fs*5*fs fs*under*fs fs*54
*rs*01*fsfs fs*S Luna*fs fs*Spain*fs fsfs fs*4*fs fs*under*fs fs*54
*rs*01*fsfs fs*N Faldo*fs fsfs fsfs fs*3*fs fs*under*fs fs*54
*rs*01*fsfs fs*S Lyle*fs fs fs fs*3*fs fs*under*fs fs*54
*rs*01*fsfs fs*M Mackenzie*fs fsfs fsfs fs*2*fs fs*under*fs fs*54
*rs*01*fs+fs fs*J Flattery*fs fsfs fs*Cork*fs fs*1*fs fs*under*fs fs*54
*rs*01*fsfs fs*G Brand Jnr.*fs fsfs fsfs fsfs fs*level par*fs fs*54
*rs*01*fsfs fs*C Mason*fs fsfs fsfs fsfs fs*level par*fs fs*54
*rs*01*fsfs fs*J Bland*fs fs*SA*fs fsfs fs*1*fs fsoverfs fs*54
*rs*01*fsfs fs*M Poxon*fs fsfs fsfs fs*1*fs fs*over*fs fs*54

TTY FORMAT:

Third round of the FRENCH OPEN at Golf National.
All players are GB and Ireland unless otherwise stated

K Trimble (Aus) 5 under after 54
S Luna (Spain) 4 under after 54
N Faldo 3 under after 54
S Lyle 3 under after 54
M Mackenzie 2 under after 54
+ J Flattery Cork 1 under after 54
G Brand Jnr. level par after 54
C Mason level par after 54
J Bland (SA) 1 over after 54
M Poxon 1 over after 54

GOLF HOLE BY HOLE SPECIFICATION

The Golf Hole by Hole will be transmitted using Category Code GLH

Hole by Hole scores for leaders and players who have put together noteworthy rounds.
These will be sent at the end of the round.
The scores will be sorted in the same order as the collated scores (B Scores).

All players are GB and Ireland unless otherwise stated.
The output will consist of 2 Records.

Record 00 **will contain the Tournament Details, and will consist of 4 Fields**.
The 1st Field will contain the Round.
The 2nd Field will contain the Tournament Name
The 3rd Field will contain the Tournament Venue.
The 4th Field will contain Comment Text.

Record 01 **will contain the Players' details, individual hole scores, inward and outward half scores and an accumulative score for the round. The Record will consist of 9 Fields.**
The 1st Field will contain the Amateur Indicator (+) (not used if professional).
The 2nd field will contain the Player's Name (including initials).
The 3rd Field will contain the Player's Country (not used if GB or Ireland).
The 4th Field will contain the Player's Home Club (only used if player is GB amateur or Ireland amateur).
The 5th Field will contain the individual Outward Holes Scores. This will be presented in the form
nnn nnn nnn where *n* is a single character representing the number of strokes for the hole
The 6th Field will contain Individual Outward Half Total.
The 7th Field will contain the individual Inwards Holes Scores. This will be presented in the form
nnn nnn nnn where *n* is a single character representing the number of strokes for the hold.
The 8th Field will contain Individual Inward Half Total.
The 9th Field will contain the Total Round Score.

The information will utilise Record and Field Separators which are indicated as *RS* and *FS* respectively. Each Record will be preceded by *RS-nn-FS* where *nn* stands for Record Number (00-99) and will be terminated by *CR LF*. Each Field within a Record will be preceded by *FS-SPACE-FS*. If there is no data for a particular Record the *RS* code, numerics and *FS* code will not be present. The *FS-SPACE-FS* code strings will always be present within a Record whether the Field contains data or not.

The Records and Fields are as follows:

Record 0	**:**	**Tournament Details**	
Field a	:	Text	Preceded by *RS 00 FS*
Field b	:	Text	Preceded by *FS SPACE FS*
Field c	:	Text	Preceded by *FS SPACE FS*
Field d	:	Text	Preceded by *FS SPACE FS*, terminated by *CR LF*

Record 1	**:**	**Players' Details, Individual Hole Scores and Totals**		
Field	a	:	Text	Preceded by *RS 01 FS*
Field	b	:	Text	Preceded by *FS SPACE FS*
Field	c	:	Text	Preceded by *FS SPACE FS*
Field	d	:	Text	Preceded by *FS SPACE FS*
Field	e	:	Text	Preceded by *FS SPACE FS*
Field	f	:	Numeric	Preceded by *FS SPACE FS*
Field	g	:	Text	Preceded by *FS SPACE FS*
Field	h	:	Numeric	Preceded by *FS SPACE FS*
Field	I	:	Numeric	Preceded by *FS SPACE FS*

Cont'd

….

GOLF HOLE BY HOLE SPECIFICATION (cont'd)

The Records and Fields are as follows:

Record 00	Tournament Details	Field	Content	Field Name		Example	
				a	Text	Round	Third
				b	Text	Tournament Name	Peugeot French Open
				c	Text	Tournament Venue	Golf National
				d	Text	Comment Text	All Players are GB and Ireland

Record 01	Players' Details, Individual Hole Scores and Totals				
a	Text	Amateur Indicator	
b	Text	Player's Name	J Romero
c	Text	Player's Country	Arg
d	Text	Player's Club	
e	Text	Outward Hole Scores	434 433 425
f	Numeric	Outward Total	32
g	Text	Inward Hole Scores	434 453 354
h	Numeric	Inward Total	35
I	Numeric	Round Score	67

OUTPUT EXAMPLES

Data Format - Note: Please read *rs* as Record Separator, and *fs* as Field Separator

*rs*00*fs*Third*fs fs*FRENCH OPEN*fs fs*Golf National*fs fs*All Players are GB and Ireland unless stated otherwise.
*rs*01*fs*fs *fs*E Romero*fs fs*Arg*fs fs*fs *fs*434 433 425*fs fs*32*fs fs*434 453 354*fs fs*35*fs fs*67
*rs*01*fs*fs *fs*J M Olazabal*fs fs*Spain*fs fs*fs *fs*434 444 435*fs fs*35*fs fs*334 354 344*fs fs*33*fs fs*68
*rs*01*fs*fs *fs*K Trimble*fs fs*Aus*fs fs*fs *fs*334 445 436*fs fs*36*fs fs*424 444 245*fs fs*33*fs fs*69
*rs*01*fs*fs *fs*S Luna*fs fs*Spain*fs fs*fs *fs*434 444 544*fs fs*36*fs fs*435 433 344*fs fs*33*fs fs*69
*rs*01*fs*fs *fs*N Faldo*fs fs*fs *fs*534 434 434*fs fs*34*fs fs*334 444 344*fs fs*33*fs fs*67
*rs*01*fs*fs *fs*B Lane*fs fs*fs *fs*325 434 525*fs fs*33*fs fs*435 454 334*fs fs*35*fs fs*68

TTY Format

Third Round of the FRENCH OPEN at Golf National. Hole by Hole Scores .
All players are GB and Ireland unless stated otherwise.

E Romero (Arg) : Out:434 433 425 - 32
In: 343 453 354 - 35 - 67

J M Olazabal (Spain) : Out:434 444 435 - 35
In 334 354 344 - 33 - 68

K Trimble (Aus) : Out: 334 445 436 -36
In : 424 444 245 -33 - 69

S Luna (Spain) : Out: 434 444 544 -36
: In : 435 433 344 -33 - 69

N Faldo : Out: 534 434 434 -34
: In : 334 444 344 -33 - 67

B Lane : Out: 325 434 525 -33
: In : 435 454 334 -35 – 68

GREYHOUND RACE RETURN SPECIFICATION

Greyhounds will be transmitted using Category Code SGR

The output will consist of 5 Records, i.e. Record 00 to Record 04

Record 00 will contain the Greyhound Meeting name and date information and will consist of 7 Fields.

Field 1 will contain the Meeting name
Field 2 will contain the Meeting date in numeric form in the format YYYYMMDD.
Field 3 will contain the Meeting type, and will display either EVENING or BAGS.
Field 4 will contain the day in the week of the meeting, i.e. Tue.
Field 5 is a 2 numeric Field 1nd will contain the day of the month.
Field 6 will contain the month in the year, i.e. Dec.
Field 7 is a 2 numeric Field 1nd will contain the year in the format YY i.e. 92.

Record 01 will contain the race information and will consist of 7 Fields.

Field 1 will contain the official race time.
Field 2 will contain the race name, if applicable.
Field 3 will contain the race off time.
Field 4 will contain the class of the race, i.e. A1.
Field 5 will contain the winning time.
Field 6 will contain the winning/finishing distances, delimited by a comma.
Field 7 will contain the going.

Record 02 will contain Dog information and will consist of 9 Fields.

Field 1 will contain the finishing position.
Field 2 will contain a dead heat indicator denoted by an asterisk (*), if applicable.
Field 3 will contain the dog's name.
Field 4 will contain a Reserve Dog indicator (R) if applicable.
Field 5 will contain the trap number.
Field 6 will contain the starting price.
Field 7 will contain a Favourite indication and, if applicable, will contain either F (Favourite), J (Joint Favourite), C (Co-favourite).
Field 8 will contain the split time.
Field 9 will contain close-up information.
This Record will be repeated for all dogs in the applicable race (Record 01).

Record 03 will contain Non-Runner or Vacant Trap information, and will consist of 3 Fields.

Field 1 will contain Non-runner (N) or Vacant Trap (V) indicator.
Field 2 will contain the dog's name, if a Non-runner or text string Vacant.
Field 3 will contain the trap number.

Record 04 will contain the finishing trap order, the winning trainer and Tote details, and will consist of 7 Fields.

Field 1 will contain the winning dog trap number.
Field 2 will contain the second dog trap number.
Field 3 will contain the third dog trap number. This Field will not contain data if Tote details do not include the Tricast.
Field 4 will contain the winning dog trainer.
Field 5 will contain Tote Forecast data.

Field 6 will contain Tote CHART or CSF data.
Field 7 will contain Tote Tricast data. This Field will not contain data if less than 4 runners or an Evening meeting.

The information will utilise { (left bracket) to represent a Record Separator and } (right bracket) to represent a Field separator. Each Record will be preceded by {-nn-} where nn stands for Record Number (00-04) and will be terminated by *CR LF*. Each Field within a Record will be preceded by }. If there is no data for a particular Record the { (Record Separator) code, numerics and } (Field Separator) code will not be present. The Field Separator (}) code will always be present within a Record, if present, whether Field contains data or not.

Cont'd ….

GREYHOUND RACE RETURN SPECIFICATION (cont'd)

The Records and Fields are as follows:-

Record 0		**:**	**Meeting Details**	
Field	a	:	Text	Preceded by {00}
Field	b	:	Numeric	Preceded by }
Field	c	:	Text	Preceded by }
Field	d	:	Text	Preceded by }
Field	e	:	Numeric	Preceded by }
Field	f	:	Text	Preceded by }
Field	g	:	Numeric	Preceded by } terminated by *CR LF*
Record 1			**Race Details**	
Field	a	:	Text	Preceded by {01}
Field	b	:	Text	Preceded by }
Field	c	:	Text	Preceded by }
Field	d	:	Text	Preceded by }
Field	e	:	Text	Preceded by }
Field	f	:	Text	Preceded by }
Field	g	:	Text	Preceded by } terminated by *CR LF*
Record 2			**Individual Dog Details**	
Field	a	:	Numeric	Preceded by {02}
Field	b	:	Text	Preceded by }
Field	c	:	Text	Preceded by }
Field	d	:	Text	Preceded by }
Field	e	:	Numeric	Preceded by }
Field	f	:	Text	Preceded by }
Field	g	:	Text	Preceded by }
Field	h	:	Text	Preceded by }
Field	I	:	Text	Preceded by }, terminated by *CR LF*
Record 3		**:**	**Non-Runner or Vacant Trap Details**	
Field	a	:	Text	Preceded by {03}
Field	b	:	Text	Preceded by }
Field	c	:	Numeric	Preceded by }, terminated by *CR LF*
Record 4		**:**	**Winning Trap, Trainer and Tote Details**	
Field	a	:	Numeric	Preceded by {04}
Field	b	:	Numeric	Preceded by }
Field	c	:	Numeric	Preceded by }
Field	d	:	Text	Preceded by }
Field	e	:	Text	Preceded by }
Field	f	:	Text	Preceded by }
Field	g	:	Text	Preceded by }, terminated by *CR LF*

GREYHOUND RACE RETURN SPECIFICATION (cont'd)

The Records and Fields are as follows

Record 00	**Meeting Details**	**Field**	**Type**	**Content**	**Example**	
				a Text	Track Name	
	WALTHAMSTOW					
				b Numeric	Meeting Date	
	19911248					
				c Text	Meeting Type	EVENING
				d Text	Weekday	Tue
				e Text	Day of Month	24
				f Text	Month of Year	Dec
				g Numeric	Year	91
Record 01	**Race Details**	a	Text	Race Time	12.00	
				b Text	Race Name	
		c	Text	Off Time	12.01	
		d	Text	Race Class	A1	
		e	Text	Winning Time	20.20	
		f	Text	Winning Distances	1, 2, 1/2, 1/2	
		g	Text	Going	MINUS 10	
Record 02	**Individual Dog Details**					
				a Numeric	Finish Position	
	1					
		b	Text	Dead-Heat Ind.	*	
		c	Text	Dog's Name	Cascade Queen	
		d	Text	Reserve Indicator	R	
		e	Numeric	Trap Number	2	
		f	Text	Starting Price	3-1	
		g	Text	Favourite Indicator	F	
		h	Text	Split Time	5.15	
		I	Text	Close-up	w.rn on	
Record 03	**Non-Runner or Vacant Trap Details**					
				a Text	Non-runner/Vacant Flag	
	N					
				b Text	Dog's Name	Sandy Gate
				c Numeric	Trap Number	3
Record 04	**Winning Trap, Trainer and Tote Details**					
				a Numeric	Winning Trap	5
		b	Numeric	Second Trap	3	
		c	Numeric	Third Trap	2	
		d	Text	Trainer	Smith	
		e	Text	Forecast	12.34	
		f	Text	Chart or CSF	23.45	
		g	Text	Tricast	34.56	

OUTPUT EXAMPLE

{00}MONMORE}19920113}BAGS}Mon}13}Jan}92
{01}1.37}}1.37}A9}30.81}3, 5, sh, 2 1/2 , dis}MINUS 10
{02}1}}Early Bud}}6}5-2}F}5.15}w.m on
{02}2}}Cooladine Sal}R}4}7-1}}5.26}Crd rn up
{02}3}}Aulton Mac}}2}3-1}}5.20}e p Crd 3
{02}4}}Parting Shot}}1}3-1}}5.25}rls Crd 2 and 3
{02}5}}Tony's Lady}}5}10-1}}5.36}s aw Crd 2
{03}N}Morning Swanky}3
{04}6}4}2}Edwards}13.30}21.32}47.02

RACE RETURN SPECIFICATION FOR IRISH RACING

Race Returns are transmitted using Story Category Code IRD

An Irish Race Return Output is divided in up to 17 Records.
Record 1 - Going will only be shown on first race of the meeting.
Record 3 - Horse Details will be repeated for all horses.
Record 17 - Placepot will only be shown on the last race of the meeting.

If the finishing position in a Horse Details line does not contain data it indicates a casualty and the Casualty Field will contain data.
The information will utilise Record and Field separators which are indicates as *RS* and FS respectively. Each Record will be preceded by *RS*-nn-FS where nn stands for Record Number (00-99) and will be terminated by *CR LF*. Each Field within a Record will be preceded by FS-SPACE-FS. If there is no data for a particular record the *RS* code, numerics and FS code will not be present. The FS-SPACE-FS code strings will always be present within a Record whether the Field contains data or not.

The Records and Fields are as follows.

Record 1 : Going – defined by *RS*00

	Field	Content	Example
			RS00FS
	a	Going	GOING: Yielding to soft

Record 2 : Race Header – defined by *RS*01

			RS01FS
	a	Time	5.30*fs fs*
	b	Title	*CR*ESCENT RACE*fs fs*
	c	Prize Money	£4,000*fs fs*
	d	Horse Type	4YO +*fs fs*
	e	Distance	1m*fs fs*
	f	Penalty Value	Penalty Value £2,762.00

Record 3 : Horse Details – Defined by *RS*02

	RS02FS	
a	Finish Position	3*fs fs*
b	Distance	sh hd*fs fs*
c	Name	Coolcullen (USA)*fs fs*
d	Blinker/Visor	B*fs fs*
e	Saddle Number	5*fs fs*
f	Breeding	ch g Northern Baby (CAN) – Bird of Dawning*fs fs*
g	Owner	Mrs. U Manning*fs fs*
h	Age and Weight	10 9 10*fs fs*
i	Jockey	K J Manning*fs fs*
j	Price	8-1*fs fs*
k		Casualty

Record 4 : Number Ran – Defined by *RS*03

RS03FS

	a	Number Ran	9 ran

Record 5 : Non-Runners – Defined by *RS*04

	RS04FS	
a	Non-Runners	Non-Runner Natural Ability

Record 6 : Time Off – defined by *RS*05

	RS05FS	
a	Off Time	Off : 5.33

Record 7 : Winning Trainer - defined by *RS*06

	RS06FS	
a	Trainer	P F O'Donnell*fs fs*
b	Training Place	Kilmallock

RACE RETURN SPECIFICATION FOR IRISH RACING (cont'd)

Record 8 : Winning Time - defined by *RS*07

Field	Content	Example
	RS07FS	
a	Winning Time	Time: 5m 19.60s

Record 9 : Tote Returns - defined by *RS*08

Field	Content	Example
	RS08FS	
a	Win Payment	Tote: Win £4.30*fs fs*
b	Place 1 payment	Places : £1.70*fs fs*
c	Place 2 payment	£2.30*fs fs*
d	Place 3 payment	£2.00*fs fs*
e	Place 4 payment	

Record 10 : Straight Forecast - defined by *RS*09

Field	Content	Example
	RS09FS	
a	SF Payment	Straight Forecast: £11.92

Record 11 : Reverse Forecast - defined by *RS*10

Field	Content	Example
	RS10FS	
a	DF (? RF?) Payment	Reverse Forecast £18.70

Record 12 : CSF Forecast - defined by *RS*11

Field	Content	Example
	RS11FS	
a	CSF Payment	CSF : £40.70

Record 13 : Tricast Return - defined by *RS*12

Field	Content	Example
	RS12FS	
a	Tricast Payment	Tricast : £33.73

Record 14 : Extra Information - defined by *RS*13

Field	Content	Example
	RS13FS	
a	Text	Steward's Inquiry

Record 15 : Trio Return - defined by *RS*14

Field	Content	Example
	RS14FS	
a	Trio Payment	Trio: £25.40 to a 50p stake .. etc

Record 16 : Jackpot Return - defined by *RS*15

Field	Content	Example
	RS15FS	
a	Jackpot Payment	Jackpot: £544 to a 50p stake .. etc.

Record 17 : Placepot - defined by *RS*16

RS16FS

a Dividend Placepot:

£18.80 to a 20p stake ..etc.

IRISH JOCKEYS SPECIFICATION

Irish Jockeys will be transmitted using Category Code IDJ (TTY - ITR)

The output will carry the topic of **RACING** with the keyword and catchline of course name **JOCKEYS** (for example **Killarney Jockeys**).
The information will utilise Record and Field separators which are indicated as *RS* and FS respectively.
Each Record will be preceded by *RS*nn where nn stands for Record Number (00-99) and will be terminated by *CR LF*.
Each Field within a Record will be preceded by FS-SPACE-FS.
If there is no data for a particular Record the *RS* code, numerics and FS code will not be present.
The FS-SPACE-FS code strings will always be present within a Record whether the field contains data or not.

The Records and Fields are as follows:-

				Content	**Example**
Record 1	**:**	**Meeting Header - defined by *RS*00**			
Field	a			*RS00FS*	
				Meeting Name	Killarney*fs fs*
Field	b			Date	Tuesday, 14 May
Record 2	**:**	**Race header - defined by *RS*01**	*RS01FS*		
Field	a			Race Time	5.30
Record 3	**:**	**Horse Details - defined by *RS*02**	*RS02FS*		
Field	a			Saddle Number	1*fs fs*
Field	b			Horse Name	Gain Control*fs fs*
Field	c			Breeding	(IRE)*fs fs*
				NB: always in brackets	
Field	d			Jockey Name	P A Roche*fs fs*
Field	e	Allowance	5		

OUTPUT EXAMPLES
Data Format - Note: Please read *rs* as Record Separator, and *fs* as Field Separator

*rs*00*fs*Killarney*fs fs*Tuesday 14 May
rs01fs5.30
*rs*02*fs1*fs *fs*Gain Control*fs fs*(IRE)*fs fs*P A Roche*fs fs*5
*rs*02fs2fs *fs*Late Call*fs fs*(IRE)*fs fs*C F Swann*fs fs*
*rs*02fs3fs *fs*Lauras Pursuit*fs fs*(IRE)*fs fs*J Butler*fs fs*5
*rs*02fs4fs *fs*Lishillaun*fs fs*(IRE)*fs fs*Susan A Finn*fs fs*5
*rs*02fs5*fs fs*Nephin Far*fs fs*(IRE)*fs fs*T J Murphy*fs fs*
*rs*02fs6*fs fs*Only If*fs fs*(IRE)*fs fs*K F OBrian*fs fs*
*rs*02fs7*fs fs*Parson From Heaven*fs fs*(IRE)*fs fsfs fsfs fs*
*rs*02fs8*fs fs*Rivelle*fs fsfs fs*F J FLood*fs fsfs fs*
*rs*02fs9*fs fs*Ruby Belle*fs fs*(IRE)*fs fs*Mr W M OSullivan*fs fs*5

OLYMPICS MEDAL TABLE SPECIFICATION

The Olympic Medal Table will be sent with the Story Category Code RGD
<u>Please Note</u> TTY transmissions will be sent with Story category Code RGA

The output will consist of one list divided into two Records, the second into a number of Fields.
Record 00 will contain the text string "Olympic Medals Totals".
Record 01 will contain the medal information for an individual country and will consist of 5 Fields.

1st Field will indicate the country name.
2nd Field will contain the number of gold medals the country has won.
3rd Field will contain the number of silver medals the country has won.
4th Field will contain the number of bronze medals the country has won.
5th Field will contain the total number of medals for the country.

The output will be in numerical descending order, sorted initially by the number of gold medals, secondly by the number of silver medals, and thirdly by the number of bronze medals.
Information makes use of both the *RS* code and FS code.
Each Record is defined by an *RS* code-2 numerics-FS code string, and terminated by *CR LF*.
Each Field within a Record will be defined by a FS-SPACE-FS code string.
If there is no data for a particular Record the *RS* code and numerics will not be present.
The FS-SPACE-FS code strings will always be present within a Record whether the field contains data or not.

The Records and Fields are as follows:

Record 00 :		**Comment Text**	
Field	a	Text	Preceded by *RS* 00 *FS*, terminated by *CR LF*

Record 01 :		**Country Name and Medals**	
Field	a	Text	Preceded by *RS* 01 *FS*
Field	b	Numeric	Preceded by *FS* SPACE *FS*
Field	c	Numeric	Preceded by *FS* SPACE *FS*
Field	d	Numeric	Preceded by *FS* SPACE *FS*
Field	e	Numeric	Preceded by *FS* SPACE *FS*, terminated by *CR LF*

The Records and Fields are as follows:

Record 00 :		**League/Division Title**	**Content Field Name**	**Example**	
Field	a			Text	Comment Text
	Olympic Medals Totals				

Record 01 :		**Country Name and Medals**			
Field	a	:		Text	Country Name Spain
Field	b	:		Numeric	Gold Medals 1
Field	c	:		Numeric	Silver Medals 3
Field	d	:		Numeric	Bronze Medals 1
Field	e	:		Numeric	Medals Total 5

<u>OUTPUT EXAMPLES</u>
<u>Data Format</u> - Note: Please read *rs* as Record Separator, and *fs* as Field Separator
HSA1234 4 RGD BT 132 PA SPORT
1 OLYMPICS Medal Table
*rs*00*fs*Olympic Medals totals

*rs*01*fs*US*fs fs*4*fs fs*15*fs fs*4*fs fs*23
*rs*01*fs*CIS*fs fs*4*fs fs*15*fs fs*1*fs fs*20
rs01*fs*GB*fs fs*4*fs fs*11*fs fs*2*fs fs*17
*rs*01*fs*Denmark*fs fs*2*fs fs*4*fs fs*1*fs fs*7
*rs*01*fs*Norway*fs fs2fs fs*3*fs fs*2*fs fs*7
*rs01fsSpainfs fs*1*fs fs*3*fs fs*1*fs fs*5

RACE RETURN SPECIFICATION

Race Returns are transmitted using Story Category Code SRD

A return is divided into up to 19 Records, some of which are sub-divided into a number of Fields; a brief return only contains some of those Records and/or Fields.
Each Record will be defined by a Record Separator Code-2 Numerics-Field Separator code string, and terminated by *CR LF*.
Each Field within a Record will be defined by a Field Separator-Space-Field Separator code string.
Where a Record has no data the *RS* code string will not be present, FS code strings will always be present within a Record.
Where an entry will give a line length exceeding 85 characters, *CR* and *LF* will be inserted after a FS-SPACE-FS code string, or after a word space in the case of a long text string.

The Records and Fields are as follows:-

Record 00 : Going (On 1st race only of meeting)

Field	a	:	Text	Preceded by *RS* 00 FS, terminated by *CR LF*

Record 01 : Race Header

Field	a	:	Time	Preceded by *RS* 01 FS
Field	b	:	Title	Preceded by *FS SPACE FS*
Field	c		Prize Money	Preceded by *FS SPACE FS*
Field	d		Horse Type	Preceded by *FS SPACE FS*
Field	e		Distance	Preceded by *FS SPACE FS*
Field	f		Penalty Value	Preceded by *FS SPACE FS*, terminated by *CR LF*

Record 02 : Winning Horse

Field	a		Horse Name	Preceded by *RS* 02 FS
Field	b		Blinker/Visor	Preceded by *FS SPACE FS*
Field	c		Breeding	Preceded by *FS SPACE FS*
Field	d		Owner	Preceded by *FS SPACE FS*
Field	e		Age & Weight	Preceded by *FS SPACE FS*
Field	f		Jockey	Preceded by *FS SPACE FS*
Field	g		Price	Preceded by *FS SPACE FS*
Field	h		Finish Position	Preceded by *FS SPACE FS*, terminated by *CR LF*

Record 03 : Second Horse

Field	a		Horse Name	Preceded by *RS* 03 FS
Field	b		Blinker/Visor	Preceded by *FS SPACE FS*
Field	c		Breeding	Preceded by *FS SPACE FS*
Field	d		Owner	Preceded by *FS SPACE FS*
Field	e		Age & Weight	Preceded by *FS SPACE FS*
Field	f		Jockey	Preceded by *FS SPACE FS*
Field	g		Price	Preceded by *FS SPACE FS*
Field	h		Finish Position	Preceded by *FS SPACE FS*, terminated by *CR LF*

Record 04 : Third Horse

Field	a		Horse Name	Preceded by *RS* 04 FS
Field	b		Blinker/Visor	Preceded by *FS SPACE FS*
Field	c		Breeding	Preceded by *FS SPACE FS*
Field	d		Owner	Preceded by *FS SPACE FS*
Field	e		Age & Weight	Preceded by *FS SPACE FS*

Field	f	Jockey	Preceded by *FS SPACE FS*
Field	g	Price	Preceded by *FS SPACE FS*
Field	h	Finish Position	Preceded by *FS SPACE FS*,

terminated by *CR LF*

Record 05 : Fourth Horse

Field	a	Horse Name	Preceded by *RS* 05 FS
Field	b	Blinker/Visor	Preceded by *FS SPACE FS*
Field	c	Breeding	Preceded by *FS SPACE FS*
Field	d	Owner	Preceded by *FS SPACE FS*
Field	e	Age & Weight	Preceded by *FS SPACE FS*
Field	f	Jockey	Preceded by *FS SPACE FS*
Field	g	Price	Preceded by *FS SPACE FS*
Field	h	Finish Position	Preceded by *FS SPACE FS*,

terminated by *CR LF*

NB: This Record only appears if it is a Handicap race of 16 or more runners, otherwise the fourth horse is included in the Also Rans.

Record 6 : Also Ran Horses

Field	a	Price	Preceded by *RS* 06 FS
Field	b	Horse Name	Preceded by *FS SPACE FS*
Field	c	Blinker/Visor	Preceded by *FS SPACE FS*
Field	d	Age & Weight	Preceded by *FS SPACE FS*
Field	e	Jockey	Preceded by *FS SPACE FS*
Field	f	Finish Position	Preceded by *FS SPACE FS*,

terminated by *CR LF*

NB: This Record will be repeated for each 'Also Ran' horse.

Record 7 : Number Ran

Field	a	Number of Runners	Preceded by *RS* 07 FS,

terminated by *CR LF*

Record 8 : Time Off

Field	a	Off Time	Preceded by *RS* 08 FS, terminated by

CR LF

Record 9 : Distances

Field	a	Distance 1 & 2	Preceded by *RS* 09 FS
Field	b	Distance 2 & 3	Preceded by *FS SPACE FS*
Field	c	Distance 3 & 4	Preceded by *FS SPACE FS*
Field	d	Distance 4 & 5	Preceded by *FS SPACE FS*
Field	e	Distance 5 & 6	Preceded by *FS SPACE FS*,

terminated by *CR LF*

Record 10 : Trainer of Winner

Field	a	Trainer	Preceded by *RS* 10 FS
Field	b	Training Place	Preceded by *FS SPACE FS*,

terminated by *CR LF*

Record 11 : Tote Returns

Field	a	Win Payment	Preceded by *RS* 11 FS
Field	b	Place 1 Payment	Preceded by *FS SPACE FS*
Field	c	Place 2 Payment	Preceded by *FS SPACE FS*
Field	d	Place 3 Payment	Preceded by *FS SPACE FS*
Field	e	Place 4 Payment	Preceded by *FS SPACE FS*,

terminated by *CR LF*

Record 12 : Dual Forecast Return

Field	a	DF Payment	Preceded by *RS* 12 FS, terminated

by *CR LF*

Record 13 : CSF Return

Field	a	CSF Payment	Preceded by *RS* 13 FS, terminated

by *CR LF*

Record 14 : Tricast Return

Field	a	Tricast Payment	Preceded by *RS* 14 FS, terminated

by *CR LF*

Record 15 : Non-Runners

Field	a	Text	Preceded by *RS* 15 FS, terminated by *CR LF*

Record 16 : Time

Field	a	Time	Preceded by *RS* 16 FS, terminated by *CR LF*

Record 17 : Extra Information

Field	a	Text	Preceded by *RS* 17 FS, terminated by *CR LF*

Record 18 : Placepot (On last race only of meeting)

Field	a	Dividend	Preceded by *RS* 18 FS, terminated by *CR LF*

A-Z HORSE INDEX SPECIFICATION

The A-Z Index is transmitted using Story Category Code SRZ

The output will have two parts, the first containing the list of abbreviations used for each meeting in the Index, and the second part the horse names in alphabetical order, each followed by the race time and the abbreviated meeting name.
As the Index will contain information for all meetings on a particular day, each meeting Record will be given a unique number following the Record Separator code. This same number will also be used for each horse entry for the same meeting. This will enable recipients to delete any reference to a meeting they are not publishing.

The Records and fields will be as follows:

Record	**1 :**	**Meeting Abbreviation List**	
Field	a	Abbreviated Meeting Name	Preceded by *RS* 'nn' FS
Field	b	Hyphen	Preceded by *FS SPACE FS*
Field	c	Meeting Name	Preceded by *FS SPACE FS*, terminated by *CR LF*

This Record will be repeated as many times as there are meetings, each with a unique numeric 'nn' starting from '01' for the first.

Record	**2 :**	**Initial Letter**	
Field	a	Initial letter	Preceded by *RS* 00 FS, terminated by *CR LF*

Record 3	**: Horse List**		
Field	a	Horse Name	Preceded by *RS* 'nn' FS
Field	b	Race Time	Preceded by *FS SPACE FS*
Field	c	Abbv. Meeting Name	Preceded by *FS SPACE FS*, terminated by *CR LF*

This Record will be repeated for each horse with the same initial.

RACECARD SPECIFICATION

Racecards are transmitted using the following Story Category Codes:-

SDP Cards without owners for Evening Papers

SDQ Cards without owners for Morning Papers

SDR Cards with owners for Evening Papers

SDS Cards with owners for Morning Papers

A complete Racecard will be divided into six Records, each being defined by a Record Separator (*RS*) code, followed by a numeric to define the type of Record. If a Record has no data the *RS* code will not be present. The *RS* code and numeric for Horse Line will precede every entry, not just the first.
The first three Records - Meeting Header, Race Header and Horse Line - will be divided into a number of Fields each delimited by a Field Separator (FS) code. An FS code will always be present whether the field contains data or not. On the assumption that line ending codes will be ignored during computer processing of the data, and to ensure a printer monitoring the transmission will not contain overprinted copy, *CR* and *LF* codes will be inserted in the data after an FS code.
The last three Records - Number Declared, Last Year Details and Betting - will each consist of one string of text. If *CR* and *LF* codes are inserted to avoid overprinted copy, they will appear after a word space.

		Content	**Example**
Record 1 :			
Meeting Header - defined by RS0	RS0		
Field a		Title*fs*	Cheltenham Jackpot
Field b		Date*fs*	Wednesday 12 December
Field c		Extra Info*fs*	(Rowley Mile Course)
Field d		Draw Advantage*fs*	Draw Advantage: 5 to 8f (Straight) HIGH
Field e		Tote Details*fs*	Tote: Double 2.30 & 3.30; Treble 2.00, 3.00, 4.00
Field f		TV Times*fs*	TV: BBC1 1.30, 2.00, 2.30, 3.00
Field g		Going*fs*	Going : Good
Field h		Spare	
Record 2 : Race Header - defined by RS1	RS1		
Field a		Time*fs*	12.30
Field b		Title*fs*	The Hereford Hugh Sumner Challenge Bowl
Field c		Prize Money*fs*	£15,000 added
Field d		Horse Type*fs*	2YO Fillies
Field e		Distance*fs*	Abt. 2m 4f
Field f		Penalty Value*fs*	Penalty Value £13,149.00
Field g		Extra Info*fs*	Weights raised 1lb.
Field h		Spare	
Record 3 : Horse Line - defined by RS2	RS2		
Field a		Number*fs*	1 or 101
Field b		Form*fs*	1220/F-0

Field c		Name*fs* Burelor (FR)(D)
Field d		Owner*fs* (Mrs. C. Fairbairn)
Field e		Trainer*fs* R. Hollinshead
Field f		Age & Weight*fs* 4 10 7 (5 ex)
Field g		Jockey*fs* Gay Kelleway (5)
Field h		Draw*fs* 10
Field i		Blnkr/Hood*fs* B
Field j		Spare

Record 4 :
Number Declared - defined by RS3RS3

Field a		Text 33 Declared

Record 5 : Last Year - defined by RS4	RS4	
Field a		Text 1987: Just William ..... etc.

Record 6 : Betting - defined by RS5	RS5	
Field a		Text Betting: 2-1 Burelor ... etc.

RACING FAST RESULTS SPECIFICATION

The Result will be sent with the Story Category Code RDR

The output is divided into eleven Records, some of which are subsequently divided into a number of Fields.

Record 00 will contain Meeting and Race information and will consist of two Fields.:
Field a will contain the Meeting name.
Field b will contain the Race Time.

Record 01 will contain the Horse records, in finishing order, and will consist of 5 Fields:
Field a will indicate the Horse Finishing Position
Field b will contain the Saddle Cloth Number
Field c will contain the Horse Name
Field d will contain the Jockey Name
Field e will contain the Starting Price.

Record 02 will contain the number of Runners.

Record 03 will contain a text string indicating the non-placed Favourite, if applicable.

Record 04 will contain the Non-Runners and will contain the Saddle Cloth number(s), if applicable.

Record 05 will contain the Tote information and will consist of 5 Fields:
Field a will indicate the Tote win payment
Field b will contain the Place 1 money
Field c will contain the Place 2 money
Field d will contain the Place 3 money
Field e will contain the Place 4 money.

Record 06 will contain the Dual Forecast payment.

Record 07 will contain the Computer Straight Forecast payment.

Record 08 will contain the Tricast payment.

Record 09 will contain the Placepot payment.

Record 10 will contain a text string indicating any other information, if applicable.

Information makes use of both the *RS* code and FS code.
Each Record is defined by an *RS* code-2 numerics-FS code string, and terminated by *CR LF*.
Each Field within a Record will be defined by a FS-SPACE-FS code string.
If there is no data for a particular Record the *RS* code and numerics will not be present.
The FS-SPACE-FS code strings will always be present within a Record whether the Field contains data or not.

The Records and Fields are as follows:-

	Example	**Content**	
Record 00 : Meeting & Race Info, defined by *RS*-00FS		*RS00FS*	
Field a		Meeting Name*fs fs*	
	Bath		
Field b		Race Time	
	2.35		
Record 01 : Horse Record ,defined by *RS*-01-FS		*RS01FS*	
Field a		Horse Position*fs fs*	
	1		
Field b		Saddle Cloth Number*fs fs*	6
Field c		Horse Name*fs fs*	
	Tendresse (IRE)		

Field d		Jockey Name*fs fs*	P McCabe
Field e		Price	9-2 Jt Fav

Record 02 : Number of Runners, defined by *RS*-02-FS *RS02FS*

Field a		Number of Runners	14

Record 03 : Non-Placed Favourites, defined by *RS*-03-FS *RS03FS*

Field a		Text	Lady Lucy 5-2 Jt Fav

Record 04 : Non-Runners, defined by *RS*-04-FS *RS04FS*

Field a		Non-Runners	5, 6

Record 05 : Tote Information, defined by *RS*-05-FS *RS05FS*

Field a		Tote Win Payment*fs fs*	£4.10
Field b		Place 1 Payment*fs fs*	£2.10
Field c		Place 2 Payment*fs fs*	£1.70
Field d		Place 3 Payment*fs fs*	£1.50
Field e		Place 4 Payment	£1.11

RACING FAST RESULTS SPECIFICATION (cont'd)

Record 06 : Tote Exacta, defined by *RS*-06-*RS* *RS06FS*

Field a		Tote Exacta Payment	£7.20

Record 07 : CSF Payment, defined by *RS*-07-FS *RS07FS*

Field a		CSF Payment	£25.00

Record 08 : Tricast Payment, defined by *RS*-08-FS *RS08FS*

Field a		Tricast Payment	£82.30

Record 09 : Placepot Payment, defined by *RS*-09-FS *RS09FS*

Field a		Placepot Payment	£99.10

Record 10 : Other Information, defined by *RS*-10-FS *RS10FS*

Field a		Text	After a Stewards' Inquiry the result stands

Output Examples - Note: *rs = Record Separator, fs- Field Separator*

HSA1234 3 RDR BT 132 PA RACING
4 RACING Haydock 2.25 Result
*rs*00*fs*Haydock*fs fs*2.25
*rs*01*fs1fs fs*4*fs fs*Persuasive*fs fs*Mr M Buckley*fs fs*10-3 Co Fav
*rs*01*fs*2*fs fs2fs fs*Gallateen*fs fs*N Doughty*fs fs*10-3 Co Fav
*rs*01*fs3fs fs*1*fs fs*Signor Sassie*fs fs*M Dwyer*fs fs*4-1
*rs*02*fs6*
*rs*03*fs*Other 10-3 Co Fav Santaray
*rs*05*fs*£4.40*fs fs*£2.10*fs fs*£1.60*fs fsfs fs*
*rs*06*fs*£5.20
*rs*07*fs*£14.12
*rs*10*fs*Note Corrected winning Jockey

HSA1234 3 RDR BT 132 PA RACING
7 RACING Southwell 3.40 Result
*rs*00*fs*Southwell*fs fs*3.40
*rs*01*fs*1*fs fs6fs fs*Le Chic*fs fs*S Wood*fs fs*14-1
*rs*01*fs*2*fs fs*3*fs fs*Peerage Prince*fs fs*A Munro*fs fs*7-fav
*rs*01*fs*3*fs fs*8*fs fs*Doesyoudoes*fs fs*Kim McDonnell*fs fs*20-1
rs02fs15
*rs*04*fs*3
*rs*05*fs*£14.40*fs fs*£2.50*fs fs*£1.80*fs fs*£9.20*fs fs*
*rs*06*fs*£40.40
*rs*07*fs*£62.61
*rs*08*fs*£932.94
*rs*09*fs*£600.30

RADIO SUMMARY SPECIFICATION

Radio Summaries will be transmitted using Category Code TRD

The outputs will consist of 5 Records from Record 00 through Record 04.
Record 02 will be repeated for each programme.
Information will make use of both Record and Field Separator codes.
Each Record is defined by an *RS*-(2)Numerics-FS code, terminated by *CR LF*.
The two Fields within Record 2 will be delimited by FS-SPACE-FS code.
If there is no data for a particular Record the *RS*-(2)Numerics-FS code string will not be present.

Records are identified as follows:

Record 0 : Day & Date

Field a Date — Preceded by *RS 00 FS*, terminated by *CR LF*

Record 1 : Station

Field a Station Name — Preceded by *RS 01 FS*, terminated by *CR LF*

Record 2 : Programme Details

Field a Programme Time — Preceded by *RS 02 FS*

Field b Programme Title — Preceded by *FS SPACE FS*, terminated by *CR LF*

Record 3 : Programme Synopsis

Field a Programme Synopsis — Preceded by *RS 03 FS*, terminated by *CR LF*

Record 4 : Today or Tomorrow

Field a Tonight/Tomorrow — Preceded by *RS 04 FS*, terminated by *CR LF*

Record 1 will appear 5 times for the 5 stations.
Record 4 will only appear in two-day summaries twice for each station.
Record 2 together with Fields a & b, will be repeated as many times as necessary for each station.

SATELLITE TV SUMMARY SPECIFICATION

Satellite Television Summaries will be transmitted using Category Code TTS

The outputs will consist of 5 Records from Record 00 through to Record 04.
Information will make use of both Record and Field Separator codes.
Each Record is defined by an *RS*-(2)Numerics-FS code, terminated by *CR LF*.
The two Fields within Record 2 will be delimited by an FS-SPACE-FS code.
If there is no data for a particular Record the *RS*-(2)Numerics-FS code string will not be present.

The Records and Fields are as follows:-

Record 0 : Day & Date
Field a Date Preceded by *RS 00 FS,* terminated by *CR LF*

Record 1 : Channel
Field a Channel Name Preceded by *RS 01 FS,* terminated by *CR LF*
This Record is repeated for each channel.

Record 2 : Programme Details
Field a Programme Time Preceded by *RS 02 FS*
Field b Programme Title Preceded by *FS SPACE FS*, terminated by *CR LF*

Record 3 : Programme Synopsis
Field a Programme Synopsis Preceded by *RS 03 FS,* terminated by *CR LF*

Record 4 : Tomrrow
Field a Tomorrow Preceded by *RS 04 FS,* terminated by *CR LF*

Record 1 will appear when a channel is indicated.
Record 2 together with Fields a,b and Record 3 will be repeated as many times as necessary.
Record 3 may not always be present for any given Record 2.
Record 4 will only appear in two-day summaries for each channel.

TV SUMMARIES SPECIFICATION

The TV Summaries will be transmitted using Category Code TTD

The outputs will consist of 6 Records from Record 00 through to Record 05.
Record 02 will be repeated for each programme.

Information will make use of both Record and Field Separator codes.
Each Record is defined by an *RS*-(2)Numerics-FS code, terminated by *CR LF*.
The two Fields within Record 2 will be delimited by an FS-SPACE-FS code.
If there is no data for a particular Record the *RS*--(2)Numerics-FS code string will not be present.

The Records and Fields are as follows:-

Record 0 : Day & Date

Field a	Date	Preceded by *RS 00 FS,* terminated by *CR LF*

Record 1 : Channel

Field a	Channel Name	Preceded by *RS 01 FS,* terminated by *CR LF*

Record 2 : Programme Details

Field a	Programme Time	Preceded by *RS 02 FS*
Field b	Programme Title	Preceded by *FS SPACE FS*, terminated by *CR LF*

Record 3 : Programme Synopsis

Field a	Programme Synopsis	Preceded by *RS 03 FS,* terminated by *CR LF*

Record 4 : Regional Variations

Field a	Regional Variations	Preceded by *RS 04 FS,* terminated by *CR LF*

Record 5 : Region

Field a	Region	Preceded by *RS 05 RS*, terminated by *CR LF*

Record 1 will appear when a channel is indicated.
Record 2 together with Fields a,b and Record 3 will be repeated as many times as necessary.
Record 3 may not always be present for any given Record 2.

RUGBY LEAGUE COMPLETE SEASON FIXTURES SPECIFICATION

The Fixtures will be sent with Category Code SSD

The outputs are divided into three Records, two of which are subsequently divided into a number of Fields.
Because of the length of the entry for each team, each page will consist of up to seven dates.
The first page will have Away teams 1-7, the second teams 8-14, the third 15-21.
Information make use of both the *RS* code and FS code.
Each Record is defined bv an *RS* code followed by two numerics from 00 to 02, followed by FS code, and terminated by
CR LF.
Each Field within Records is delimited by an FS-SPACE0-FS code string. These will always be present whether the Field
contains data or not.

The Records and Fields are as follows:

Record 0 : Division Title

Field a	Text	Preceded by *RS-00-FS,* terminated by *CR LF*

Record 1 : Away Team Numbers

Field a	Team Number	Preceded by *RS 01 FS*
Field b	Team Number	Preceded by *FS SPACE FS*
Field c	Team Number	Preceded by *FS SPACE FS*
	up to	
Field g	Team Number	Preceded by *FS SPACE FS*, terminated by *CR LF*

Record 2 : Home Team & Dates

Field a	Team Number	Preceded by *RS 02 FS*
Field b	Team Name	Preceded by *FS SPACE FS*
Field c	Match Date	Preceded by *FS SPACE FS*
Field d	Match Date	Preceded by *FS SPACE FS*
Field e	Match Date	Preceded by *FS SPACE FS*
	up to	
Field i	Match Date	Preceded by *FS SPACE FS*, terminated by *CR LF*

This Record will be repeated for each team in the League.

RUGBY LEAGUE COMPLETE SEASON RESULTS SPECIFICATION

The Results will be sent with the Story Category Code SSD

The outputs are divided into three Records, two of which are subsequently divided into a number of Fields.
Because of the length of the entry for each team, each page will consist of up to seven results.
The first page will have Away teams 1-7, the second teams 8-14, the third 15-21.
Information make use of both the *RS* code and FS code.
Each Record is defined bv an *RS* code followed by two numerics from 00 to 02, followed by FS code, and terminated by
CR LF.
Each Field within Records is delimited by an FS-SPACE-FS code string. These will always be present whether the Field
contains data or not.

The Records and Fields are as follows:

Record 0 : Division Title

Field a	Text	Preceded by *RS-00-FS,* terminated by *CR LF*

Record 1 : Away Team Numbers

Field a	Team Number	Preceded by *RS 01 FS*
Field b	Team Number	Preceded by *FS SPACE FS*
Field c	Team Number	Preceded by *FS SPACE FS*
	up to	
Field g	Team Number	Preceded by *FS SPACE FS*, terminated by *CR LF*

Record 2 : Home Team & Results

Field a	Team Number	Preceded by *RS 02 FS*
Field b	Team Name	Preceded by *FS SPACE FS*
Field c	Result	Preceded by *FS SPACE FS*
Field d	Result	Preceded by *FS SPACE FS*
Field e	Result	Preceded by *FS SPACE FS*
	up to	
Field i	Result	Preceded by *FS SPACE FS*, terminated by *CR LF*

This Record will be repeated for each team in the League.

RUGBY LEAGUE WEEKLY FIXTURES SPECIFICATION

The Fixtures will be sent with the Story Category Code SSD

The outputs are divided into four Records, some of which are subsequently divided into a number of Fields. Information make use of both the *RS* code and FS code.
Each Record in a list is defined bv an *RS* code -2 numerics-FS code string, and terminated by *CR LF*.
Each Field within a Record is delimited by an FS-SPACE-FS code string. If there is no data for a particular Record the
RS code and numerics will not be present. The FS-SPACE-FS code strings will always be present within a Record
whether the field contains data or not.

The Records and Fields are as follows:

Record 0 : Date

Field a Date — Preceded by *RS-00-FS,* terminated by *CR LF*

Repeated for each day of the week on which there are matches.

Record 1 : Cup/League Name

Field a Cup/League Name — Preceded by *RS 01 FS*, terminated by *CR LF*

Repeated for each League in the list.

Record 2 : Division Name

Field a Division Name — Preceded by *RS 0S FS,* terminated by *CR LF*

Repeated for each Division in each League

Record 3 : Match Details

Field a	Kick-Off Time	Preceded by *RS 03 FS*
Field b	Match Number	Preceded by *FS SPACE FS*
Field c	Home Team	Preceded by *FS SPACE FS*
Field d	Away Team	Preceded by *FS SPACE FS*
Field e	Place of Game	Preceded by *FS SPACE FS*
Field f	All Ticket	Preceded by *FS SPACE FS*, terminated by *CR LF*

Repeated for each game in each Division.

RUGBY LEAGUE DAILY FIXTURES SPECIFICATION

The Fixtures will be sent with the Story Category Code SSD

The outputs are divided into 4 Records, some of which are subsequently divided into a number of Fields. Information makes use of both the *RS* code and FS code.
Each Record in a list is defined by an *RS* CODE-2 Numerics-FS code string, and terminated by XR *LF*.
Each Field within a Record is defined by a FS-SPACE-FS code string. If there is no data for a particular Record the *RS*
code and numerics will not be present.
The FS-SPACE-FS code strings will always be present within a Record whether the Field contains data or not.

The Records and Fields are as follows:

Record 0 : Date & Normal KO Time

Field a	Date	Preceded by *RS 00 FS*
Field b	Kick-Off Time	Preceded by *FS SPACE FS,* terminated by C*R LF*

Record 1 : Cup/League Name

Field a	Cup/League Name	Preceded by *RS 01 FS,* terminated by *CR LF*

Repeated for each Division in each League

Record 2 : Division Name

Field a	Division Name	Preceded by *RS 02 FS*, terminated by *CR LF*

Repeated for each Division in each League

Record 3 : Match Details

Field a	Home Team	Preceded by *RS 03 FS*
Field b	Away Team	Preceded by *FS SPACE FS*
Field c	Place of Game	Preceded by *FS SPACE FS*
Field d	KO Time (if different)	Preceded by *FS SPACE FS*
Field e	All Ticket	Preceded by *FS SPACE FS*, terminated by *CR LF*

Repeated for each game in each Division

RUGBY LEAGUE COLLATED SCORES SPECIFICATION

The Collated Half-Time Scores & Full-Time Results will be sent with the Story Category Code RRE

Both outputs will consist of one list divided into 2 Records, the second into a number of Fields.
Information makes use of both the *RS* code and FS code.
Each Record is defined by an *RS* CODE-2 Numerics-FS code string, and terminated by *CR LF*.
Each Field within a Record will be defined by a FS-SPACE-FS code string.

The Records and Fields are as follows:

Record 0 : League/Division Title

Field	a	Text	Preceded by *RS 00 FS*, terminated by *CR LF*

This Record is repeated for both Divisions in the list.

Record 1 : HT Score or Result

Field	a	Home Team	Preceded by *RS 01 FS*
Field	b	Home Score	Preceded by *FS SPACE FS*
Field	c	FT Score	Preceded by *FS SPACE FS*
Field	d	Away Team	Preceded by *FS SPACE FS*
Field	e	HT Score	Preceded by *FS SPACE FS*
Field	f	FT Score	Preceded by *FS SPACE FS*
Field	g	Abandoned, etc.	Preceded by *FS SPACE FS*, terminated by *CR LF*

This Record is repeated for each game within a Division.

RUGBY LEAGUE SUMMARIES SPECIFICATION

The Summaries will be sent with the Store Category Code RRF

The outputs are divided into up to 12 different Records, some of which are subsequently divided into a number of Fields.
Information make use of both the *RS* code and FS code.
Each Record in a summary is defined by an *RS* code followed by two numerics, followed by FS code, and terminated by
CR LF.
If there is no data for a particular Record the *RS* code and numerics will not be present.
Each Field within a Record is delimited by an FS-SPACE-FS code string. these will always be present whether the Field
contains data or not.
Summaries will be transmitted with several games in one item as available.
All summaries for one day will have consecutive page numbers.

The Records and Fields are as follows:

Record 0 : Division/Cup Name

Field a	Text	Preceded by *RS 00 FS,* terminated by *CR LF*

Record 1 : Venue

Field a	Text	Preceded by *RS 01 FS*, terminated by *CR LF*

Record 2 : Home Team & Score

Field a	Home Team	Preceded by *RS 02 FS*
Field b	HT Goal Pts Scored	Preceded by *FS SPACE FS*
Field c	FT Goal Pts Scored	Preceded by *FS SPACE FS*, terminated by *CR LF*

Record 3 : Home Tries Details

Field a	Try Scorer	Preceded by *RS 03 FS*
Field b	Number Scored	Preceded by *FS SPACE FS*

This Record will be repeated for each Home Team Try Scorer.

Record 4 : Home Goals Details

Field a	Goal Scorer	Preceded by *RS 04 FS*
Field b	Number Scored	Preceded by *FS SPACE FS*, terminated by *CR LF*

This Record will be repeated for each Home Team Goal Scorer

Record 5 : Home Drop Goals Details

Field a	Drop Goal Scorer	Preceded by *RS 05 FS*
Field b	Number Scored	Preceded by *FS SPACE FS*, terminated by *CR LF*

This Record will be repeated for each Home Team Drop Goal Scorer

Record 6 : Away Team & Score

Field a	Away Team	Preceded by *RS 06 FS*
Field b	HT Goal Pts Scored	Preceded by *FS SPACE FS*
Field c	FT Goal Pts Scored	Preceded by *FS SPACE FS*, terminated by *CR LF*

Record 7 : Away Tries Details

Field a	Try Scorer	Preceded by *RS 07 FS*

Field b Number Scored Preceded by *FS SPACE FS*, terminated by *CR LF*

This Record will be repeated for each Away Team Try Scorer

Record 8 : Away Goals Details

Field a Goal Scorer Preceded by *RS 08 FS*

Field b Number Scored Preceded by *FS SPACE FS*, terminated by *CR LF*

This Record will be repeated for each Away Team Goal Scorer

Record 9 : Away Drop Goals Details

Field a Drop Goal Scorer Preceded by *RS 09 FS*

Field b Number Scored Preceded by *FS SPACE FS,* terminated by *CR LF*

This Record will be repeated for each Away Team Drop Goal Scorer

Record 10 : Abandoned Reason

Field a Text Preceded by *RS 10 FS*, terminated by *CR LF*

Record 11 : Attendance

Field a Text Preceded by *RS 11 FS*, terminated by *CR LF*

Record 12 : Replay Day, Date & Time

Field a Day and Date Preceded by *RS 12 FS*

Field b Time Preceded by *FS SPACE FS*, terminated by *CR LF*

RUGBY LEAGUE TABLES SPECIFICATION

The League Tables will be sent out with the Story Category Codes :
Long Tables SDT
Short Tables SDF

The outputs are divided into 2 Records, the second subsequently into a number of Fields.
Information makes use of both the *RS* code and FS code.
Each Record is defined by an *RS* code-2 numerics-FS code string, and terminated by CR LF.
Each Field within a Record will be defined by a FS-SPACE-FS code string.

The Records and Fields are as follows:-

Record 0 : Division title

Field a	Text	Preceded by *RS 00 FS*, terminated by *CR LF*

Record 1 : (Long Tables) Team Entry

Field a	No Result Indicator	Preceded by *RS 01 FS*
Field b	Team Name	Preceded by *FS SPACE FS*
Field c	Games Played	Preceded by *FS SPACE FS*
Field d	Home Games Won	Preceded by *FS SPACE FS*
Field e	Home Games Drawn	Preceded by *FS SPACE FS*
Field f	Home Games Lost	Preceded by *FS SPACE FS*
Field g	Home Goal Points For	Preceded by *FS SPACE FS*
Field h	Home Goal Points Against	Preceded by *FS SPACE FS*
Field i	Away Games Won	Preceded by *FS SPACE FS*
Field j	Away Games Lost	Preceded by *FS SPACE FS*
Field k	Away Games Drawn	Preceded by *FS SPACE FS*
Field l	Away Goal Points For	Preceded by *FS SPACE FS*
Field m	Away Goal Points Against	Preceded by *FS SPACE FS*
Field n	Points	Preceded by *FS SPACE FS*, terminated by *CR LF*

This Record is repeated for each team in the table.

Record 1 : (Short Tables) Team Entry

Field a	No result Indicator	Preceded by *RS 01 FS*
Field b	Team Name	Preceded by *FS SPACE FS*
Field c	Games Played	Preceded by *FS SPACE FS*
Field d	Games Won	Preceded by *FS SPACE FS*
Field e	Games Drawn	Preceded by *FS SPACE FS*
Field f	Games Lost	Preceded by *FS SPACE FS*
Field g	Goal Points For	Preceded by *FS SPACE FS*
Field h	Goal Points Against	Preceded by *FS SPACE FS*
Field i	Points	Preceded by *FS SPACE FS*, terminated by *CR LF*

This Record is repeated for each team in the table.

RUGBY LEAGUE POINTS SCORERS TABLE SPECIFICATION

The Points Scorers Table will be sent with the Story Category Code RRI

The outputs are divided into 5 Records, two of which are subsequently divided into a number of fields.
Information makes use of both the *RS* code and FS code.
Each Record is defined by an *RS* code-2 numerics-FS code string and terminated by CR LF.
Each Field within a Record will be defined by a FS-SPACE-FS code string.

The Records and Fields are as follows:

Record 0 : By-Line

Field a Text Preceded by *RS 00 FS*, terminated by *CR LF*

Record 1 : Division Title

Field a Text Preceded by *RS 01 FS,* terminated by *CR LF*

This Record will be repeated for each Division.

Record 2 : Players' Details

Field a	Player's Name	Preceded by *RS 02 FS*
Field b	Team Name	Preceded by *FS SPACE FS*
Field c	Tries Scored	Preceded by *FS SPACE FS*
Field d	Goals Scored	Preceded by *FS SPACE FS*
Field e	Drop Goals Scored	Preceded by *FS SPACE FS*
Field f	Total Points Scored	Preceded by *FS SPACE FS*, terminated by *CR LF*

This Record (and, if required, Record 3) will be repeated for each player in the division.

Record 3 : Previous Team Details

Field a	Points Scored	Preceded by *RS 03 FS*
Field b	Previous Team	Preceded by *FS SPACE FS*, terminated by *CR LF*

Record 4 : Other Goals Details

Field a Text Preceded by *RS 04 FS*, terminated by *CR LF*

RUGBY LEAGUE TRANSFER FEES TABLE SPECIFICATION

The Transfer Fees Tables will be sent with the Store Category Code RRH

The outputs are divided into 2 Records, the second into a number of Fields.
Information makes use of both the *RS* code and FS code.
Each Record is defined by an *RS* code-2 numerics-FS code string, and terminated by CR LF.
Each Field within a Record will be defined by a FS-SPACE-FS code string.
The information will be output under one of three criteria : (a) by fee amount, (b) by date, or (c) by position.

The Records and Fields are as follows:

Record 0 ; Selection Criteria

Field a Text Preceded by *RS 00 FS*, terminated by *CR LF*

Record 1 : Player Information

Field a Player's Name Preceded by *RS 01 FS*
Field b Club Transferred From Preceded by *FS SPACE FS*
Field c Club Transferred To Preceded by *FS SPACE FS*
Field d Fee Preceded by *FS SPACE FS*
Field e Date Preceded by *FS SPACE FS*, terminated by *CR LF*

This Record will be repeated for each Player in the list selected.

RUGBY UNION COMPLETE SEASON FIXTURES SPECIFICATION

The Fixtures will be sent with the Story Category Code SSD

The outputs are divided into 3 Records, two of which are subsequently divided into a number of Fields.
Because of the length of the entry for each team, each page will consist of up to 7 dates : the first page will have Away
Teams 1-7, the second Teams 8-14, the third 15-21.
Information makes use of both the *RS* code and FS code.
Each Record is defined by an *RS* code followed by two numerics from 00 to 02, followed by FS code, and terminated by
CR LF.
Each Field within a Record is delimited by a FS-SPACE-FS code string. These will always be present whether the field
contains data or not.

The Records and Fields are as follows:

Record 0 : Division Title

Field	a	Text	Preceded by *RS 00 FS*, terminated by *CR LF*

Record 1 : Away Team Numbers

Field	a	Team Number	Preceded by *RS 01 FS*
Field	b	Team Number	Preceded by *FS SPACE FS*
Field	c	Team Number	Preceded by *FS SPACE FS*
	up to		
Field	g	Team Number	Preceded by *FS SPACE FS*, terminated by *CR LF*

Record 2 : Home Team & Dates

Field	a	Team Number	Preceded by *RS 02 FS*
Field	b	Team Name	Preceded by *FS SPACE FS*
Field	c	Match Date	Preceded by *FS SPACE FS*
Field	d	Match Date	Preceded by *FS SPACE FS*
Field	e	Match Date	Preceded by *FS SPACE FS*
	up to		
Field	i	Match Date	Preceded by *FS SPACE FS*, terminated by *CR LF*

This Record will be repeated for each team in the League.

RUGBY UNION COMPLETE SEASON RESULTS SPECIFICATION

The Results will be sent with the Story Category Code SSD

The outputs are divided into 3 Records, two of which are subsequently divided into a number of Fields.
Because of the length of the entry for each team, each page will consist of up to 7 results : the first page will have Away
Teams 1-7, the second Teams 8-14, the third 15-21.
Information makes use of both the *RS* code and FS code.
Each Record is defined by an *RS* code followed by two numerics from 00 to 02, followed by FS code, and terminated by
CR LF codes.
Each Field within a Record is delimited by a FS-SPACE-FS code string. These will always be present whether the Field
contains data or not.

The Records and Fields are as follows:-

Record 0 : Division Title

Field a	Text	Preceded by *RS 00 FS*, terminated by *CR LF*

Record 1 : Away Team Numbers

Field a	Team Number	Preceded by *RS 01 FS*
Field b	Team Number	Preceded by *FS SPACE FS*
Field c	Team Number	Preceded by *FS SPACE FS*
up to		
Field g	Team Number	Preceded by *FS SPACE FS*, terminated by *CR LF*

Record 2 : Home Team & Results

Field a	Team Number	Preceded by *RS 02 FS*
Field b	Team Name	Preceded by *FS SPACE FS*
Field c	Result	Preceded by *FS SPACE FS*
Field d	Result	Preceded by *FS SPACE FS*
Field e	Result	Preceded by *FS SPACE FS*
up to		
Field i	Result	Preceded by *FS SPACE FS*, terminated by *CR LF*

This Record will be repeated for each team in the League.

RUGBY UNION DAILY FIXTURES SPECIFICATION

The fixtures will be sent with the Story Category Code SSD

The outputs are divided into 4 Records, some of which are subsequently divided into a number of Fields.
Information makes use of both the *RS* code and FS code.
Each Record in a list is defined by an *RS* code-2 numerics-FS code string, and terminated by CR LF.
Each Field within a Record is defined by an FS-SPACE-FS code string.
If there is no data for a particular Record the *RS* code and numerics will not be present.
The FS-SPACE-FS code strings will always be present within a Record whether the field contains data or not.

The Records and Fields for the Daily Lists are as follows:

Record 00 : Date & Normal KO Time

Field a	Date	Preceded by *RS 00 FS*
Field b	Kick-Off Time	Preceded by *FS SPACE FS*, terminated by *CR LF*

Record 01 : Cup/League Name

Field a	League/Cup Name	Preceded by *RS 01 FS*, terminated by *CR LF*

Repeated for each league in the list

Record 02 : Division Name

Field a	Division Name	Preceded by *RS 02 FS*, terminated by *CR LF*

Repeated for each Division in each League

Record 03 : Match Details

Field a	Home Team	Preceded by *RS 03 FS*, terminated by *CR LF*
Field b	Away Team	Preceded by *FS SPACE FS*
Field c	Place of Game	Preceded by *FS SPACE FS*
Field d	KO Time (if different)	Preceded by *FS SPACE FS*
Field e	All Ticket	Preceded by *FS SPACE FS,* terminated by *CR LF*

Repeated for each game in each Division.

RUGBY UNION COLLATED SCORES SPECIFICATION

The collated half-time scores and full-time results will be sent with the Story Category Code RRE

Both outputs will consist of one list divided into 2 Records, the second into a number of Fields.
Information makes use of both the *RS* code and FS code.
Each Record is defined by an *RS* code-2 numerics-FS code string, and terminated by CR LF.
Each Field within a Record will be defined by a FS-SPACE-FS code string.

The Records and Fields are as follows-

Record 0 : League/Division Title

Field a	Text	Preceded by *RS 00 FS*, terminated by *CR LF*

This Record is repeated for both Divisions in the list.

Record 1 : HT Score or Result

Field a	Home Team	Preceded by *RS 01 FS*
Field b	HT Score	Preceded by *FS SPACE FS*
Field c	FT Score	Preceded by *FS SPACE FS*
Field d	Away Team	Preceded by *FS SPACE FS*
Field e	HT Score	Preceded by *FS SPACE FS*
Field f	FT Score	Preceded by *FS SPACE FS*
Field g	Abandoned, etc.	Preceded by *FS SPACE FS*, terminated by *CR LF*

This Record is repeated for each game within a Division

RUGBY UNION SUMMARIES SPECIFICATION

The Summaries will be sent with the Story Category Code RDJ

The outputs are divided into up to 15 different Records, some of which are subsequently divided into a number of Fields.
Information makes use of both the *RS* and FS codes.
Each Record in a summary is defined by an *RS* code followed by two numerics, followed by FS code, and terminated by
CR LF.
If there is no data for a particular Record the *RS* code and numerics will not be present.
Each Field within a Record is delimited by a FS-SPACE-FS code string. These will always be present whether the Field
contains data or not.
Summaries will be transmitted with several games in one item as available.
All summaries for one day will have consecutive page numbers.

The Records and Fields are as follows:-

Record 0 : Division/Cup Name
Field a Text Preceded by *RS 00 FS,* terminated by *CR LF*

Record 1 Venue
Field a Text Preceded by *RS 01 FS*, terminated by *CR LF*

Record 2 : Home Team & Score
Field a Home Team Preceded by *RS 02 FS*
Field b HT Goal Points Scored Preceded by *FS SPACE FS*
Field c FT Goal Points Scored Preceded by *FS SPACE FS,* terminated by *CR LF*

Record 3 : Home Tries Details
Field a Try Scorer Preceded by *RS 03 FS*
Field b Number Scored Preceded by *FS SPACE FS,* terminated by *CR LF*
This Record will be repeated for each Home team try scorer.

Record 4 : Home Conversions Details
Field a Conversion Scorer Preceded by *RS 04 FS*
Field b Number Scored Preceded by *FS SPACE FS,* terminated by *CR LF*
This Record will be repeated for each Home team goal scorer

Record 5 : Home Penalties Details
Field a Penalty Scorer Preceded by *RS 05 FS*
Field b Number Scored Preceded by *FS SPACE FS,* terminated by *CR LF*
This Record will be repeated for each Home team goal scorer

Record 6 : Home Drop Goals Details
Field a Drop Goal Scorer Preceded by *RS 06 FS*
Field b Number Scored Preceded by *FS SPACE FS,* terminated by *CR LF*
This Record will be repeated for each Home team drop goal scorer

Record 7 : Away Team & Score

Field a Away Team Preceded by *RS 07 FS*
Field b HT Goal Points Scored Preceded by *FS SPACE FS*
Field c FT Goal Points Scored Preceded by *FS SPACE FS,* terminated by *CR LF*

Record 8 : Away Tries Details
Field a Try Scorer Preceded by *RS 08 FS*
Field b Number Scored Preceded by *FS SPACE FS,* terminated by *CR LF*

This Record will be repeated for each Away team try scorer

Record 9 : Away Conversions Details
Field a Conversion Scorer Preceded by *RS 09 FS*
Field b Number Scored Preceded by *FS SPACE FS,* terminated by *CR LF*

This Record will be repeated for each Home team goal scorer

Record 10 : Away Penalties Details
Field a Penalty Scorer Preceded by *RS 10 FS*
Field b Number Scored Preceded by *FS SPACE FS,* terminated by *CR LF*

This Record will be repeated for each Home team goal scorer.

Record 11 : Away Drop Goals Details
Field a Drop Goal Scorer Preceded by *RS 11 FS*
Field b Number Scored Preceded by *FS SPACE FS,* terminated by *CR LF*

This Record will be repeated for each Away team drop goal scorer.

RUGBY UNION SUMMARIES SPECIFICATION (cont'd)

Record 12 : Abandoned Reason
Field a Text Preceded by *RS 12 FS*, terminated by *CR LF*

Record 13 : Attendance
Field a Text Preceded by *RS 13 FS,* terminated by *CR LF*

Record 14 : Replay Day, Date & Time
Field a Day and date Preceded by *RS 14 FS*
Field b Time Preceded by *FS SPACE FS,* terminated by *CR LF*

RUGBY UNION TABLES SPECIFICATION

The League Table will be sent with the Story Category Code SFU

The outputs are divided into 2 Records, the second subsequently into a number of Fields.
Information makes use of both the *RS* and FS codes.
Each Record is defined by an *RS* code-2 numerics-FS code string, and terminated by CR LF.
Each Field within a Record will be defined by a FS-SPACE-FS code string.

The Records and Fields are as follows:-

Record 1 :	**Team Entry**	
Field a	No Result Indicator	Preceded by *RS 01 FS*
Field b	Team Name	Preceded by *FS SPACE FS*
Field c	Games Played	Preceded by *FS SPACE FS*
Field d	Games Won	Preceded by *FS SPACE FS*
Field e	Games Drawn	Preceded by *FS SPACE FS*
Field f	Games Lost	Preceded by *FS SPACE FS*
Field g	Goal Points For	Preceded by *FS SPACE FS*
Field h	Goal Points Against	Preceded by *FS SPACE FS*
Field i	Points	Preceded by *FS SPACE FS,* terminated by *CR LF*

This Record is repeated for each team in the table.

RUGBY UNION POINTS SCORERS TABLE SPECIFICATION

The Points Scorers Table will be sent with the Story Category Code RRI

The outputs are divided into 5 Records, 2 of which are subsequently divided into a number of Fields.
Information makes use of both the *RS* and FS codes.
Each Record is defined by an *RS* code-2 numerics-FS code string, and terminated by CR LF.
Each Field within a Record will be defined by a FS-SPACE-FS code string.

The Records and Fields are as follows:-

Record 0 : By-Line

Field a	Text	Preceded by *RS 00 FS,* terminated by *CR LF*

Record 1 : Division Title

Field a	Text	Preceded by *RS 01 FS,* terminated by *CR LF*

This Record will be repeated for each Division.

Record 2 : Players Details

Field a	Player's Name	Preceded by *RS 02 FS*
Field b	Team Name	Preceded by *FS SPACE FS*
Field c	Tries Scored	Preceded by *FS SPACE FS*
Field d	Conversions Scored	Preceded by *FS SPACE FS*
Field e	Penalties Scored	Preceded by *FS SPACE FS*
Field f	Drop Goals Scored	Preceded by *FS SPACE FS*
Field g	Total Points Scored	Preceded by *FS SPACE FS,* terminated by *CR LF*

This Record (and, if required, Record 3) will be repeated for each Player in the Division.

Record 3 : Previous Team Details

Field a	Points Scored	Preceded by *RS 03 FS*
Field b	Previous Team	Preceded by *FS SPACE FS,* terminated by *CR LF*

Record 4 : Other Goals Details

Field a	Text	Preceded by *RS 04 FS,* terminated by *CR LF*

RUGBY UNION TRANSFER FEES TABLE SPECIFICATION

The Transfer Fees Tables will be sent with the Story Category Code RRH

The outputs are divided into 2 Records, the second into a number of fields.
Information makes use of both the *RS* and FS codes.
Each Record is defined by an *RS* code-2 numerics-FS code string, and terminated by CR LF.
Each field within a Record will be defined by a FS-SPACE-FS code string.
The information will be output under one of three criteria : (i) by fee amount, (ii) by date, or (iii) by position.

The Records and Fields are as follows:-

Record 0 : Selection Criteria

Field a Text Preceded by *RS 00 FS*, terminated by *CR LF*

Record 1 : Player Information

Field	a	Player's Name	Preceded by *RS 01 FS*
Field	b	Club Transferred From	Preceded by *FS SPACE FS*
Field	c	Club Transferred To	Preceded by *FS SPACE FS*
Field	d	Fee	Preceded by *FS SPACE FS*
Field	e	Date	Preceded by *FS SPACE FS,* terminated by *CR LF*

This Record will be repeated for each Player in the list selected.

SOCCER COMPLETE SEASON FIXTURES SPECIFICATION

The Fixtures will be sent with the Story Category Code SSD

The outputs are divided into 3 Records, two of which are subsequently divided into a number of Fields.
Because of the length of the entry for each team, each page will consist of up to 8 dates; the first page will have Away
teams 1-8, the second teams 9-16, the third 17 up to a maximum of 24.
Information makes use of both the *RS* and FS codes.
Each Record is defined by an *RS* code followed by two numerics from 00 to 02, followed by FS and terminated by CR LF.
Each Field within a Record is delimited by a FS-SPACE-FS code string. These will always be present whether the Field
contains data or not.

The Records and Fields are as follows:-

Record 0 : League Title

Field a	Text	Preceded by *RS 00 FS,* terminated by *CR LF*

Record 1 : Away Team Numbers

Field a	Team Number	Preceded by *RS 01 FS*
Field b	Team Number	Preceded by *FS SPACE FS*
Field c	Team Number	Preceded by *FS SPACE FS*
up to		
Field n	Team Number	Preceded by *FS SPACE FS,* terminated by *CR LF*

Record 2 : Home Team & Dates

Field a	Team Number	Preceded by *RS 02 FS*
Field b	Team Name	Preceded by *FS SPACE FS*
Field c	Match Date	Preceded by *FS SPACE FS*
Field d	Match Date	Preceded by *FS SPACE FS*
Field e	Match Date	Preceded by *FS SPACE FS*
up to		
Field n	Match Date	Preceded by *FS SPACE FS,* terminated by *CR LF*

This Record will be repeated for each team in the League.

SOCCER WEEKLY FIXTURES SPECIFICATION

The Weekly (Advance) Fixtures will be sent with Story Category Code SSP
Please note TTY transmissions will be sent with Story Category Code SSF

The outputs are divided into 4 Records, some of which are subsequently divided into a number of Fields.
Record 00 will contain the date and will be repeated for each day of the week on which there are matches.
Record 01 will contain the Cup or League name and will be repeated for each League in the list.
Record 02 will contain the Division name and will be repeated for each Division in each League.
Record 03 will contain the Match details and will consist of 7 Fields:--
The 1st Field will contain Kick-off time.
The 2nd Field will indicate the Pools number for the match. If no Pools number is allocated to the match, this Field will be empty.
The 3rd Field will contain the Match number.
The 4th Field will contain the Home Team name.
The 5th Field will contain the Away Team name.
The 6th Field will contain the Match venue.
The 7th Field will contain a text string indicated if the match is an all-ticket game and will be indicated by the string "All Ticket".
Record 3 will be repeated for each game in each division.

Information makes use of both *RS* and FS codes.
Each Record in a list is defined by an *RS* code-2 numerics-FS code string and terminated by CR LF.
Each Field within a Record is defined by a FS-SPACE-FS code string.
If there is no data for a particular Record the *RS* code and numerics will not be present.
The FS-SPACE-FS code strings will always be present within a Record whether the Field contains data or not.

The Records and Fields for Weekly Lists are as follows:

Record 0 : Date

Field	a	Text	Preceded by *RS 00 FS,* terminated by *CR LF*

Record 1 : Cup/League Name

Field	a	Text	Preceded by *RS 01 FS,* terminated by *CR LF*

Repeated for each League in the list

Record 2 : Division Name

Field	a	Text	Preceded by *RS 02 FS,* terminated by *CR LF*

Repeated for each Division in each League.

Record 3 : Match Details

Field	a	Text	Preceded by *RS 03 FS,* terminated by *CR LF*
Field	b	Numeric	Preceded by *FS SPACE FS*
Field	c	Numeric	Preceded by *FS SPACE FS*
Field	d	Text	Preceded by *FS SPACE FS*
Field	e	Text	Preceded by *FS SPACE FS*
Field	f	Text	Preceded by *FS SPACE FS*
Field	g	Text	Preceded by *FS SPACE FS,* terminated by *CR LF*

This Record is repeated for each game in each Division.

SOCCER WEEKLY FIXTURES SPECIFICATION (cont'd)

The Records and Fields for Weekly lists are as follows:

					Field Content	Field Name	Example
Record 00	:	Date	0a	Text	Date		Saturday 18th August 2001
Record 01	:	Cup/League Name	1a	Text	League/Cup Name		Barclays League (?)
Record 02	:	Division Name	2a	Text	Division Name		Division One
Record 03	:	Match Details	3a	Text	KO Time		3.00
					3b	Numeric	Pools Number 16
					3c	Numeric	Match Number 1
					3d	Text	Home Team Barnsley
					3e	Text	Away Team West Ham
					3f	Text	Venue
					3g	Text	All Ticket

OUTPUT EXAMPLES

Data Format – Note: *rs = record separator, fs = field separator*

HSA1234 4 SSP BT 132 PA SPORT
1 SOCCER Advance Fixtures
*rs*00*fs*Saturday 18 August 2001
*rs*01*fs*Barclays League
*rs*02*fs*Division One
*rs*03*fs*3.00*fs fs*16*fs fs*1*fs fs*Barnsley*fs fs*West Ham*fs fsfs fs*
*rs*03*fs*3.00*fs fs*17*fs fs*2*fs fs*Birmingham*fs fs*Notts City*fs fs*Wembley*fs fs*
*rs*03*fs*7.30*fs fs*18*fs fs*3*fs fs*Brentford*fs fs*Wolves*fs fsfs fs*
*rs*03*fs*3.00*fs fsfs fs*4*fs fs*Bristol City*fs fs*Portsmouth*fs fsfs fs*

In TTY

Please note the Pools number will be indicated in parenthesis prior to the Match number for the game.
If no Pools number is allocated to the match, the parentheses will contain a hyphen.

HSA1234 4 SSF BT 132 PA SPORT
1 SOCCER Advance Fixtures
Saturday 18 August 2001

KO	H-T	POOLS	Barclays League Division One	RESULT
3.00		(16)	1 Barnsley v West Ham	1 .....
3.00		(17)	2 Birmingham v Notts City (at Wembley)	2 ....
7.30		(18)	3 Brentford v Wolves	3 ....
3.00		(-)	4 Bristol City v Portsmouth	4 ....

SOCCER DAILY FIXTURES SPECIFICATION

The Fixtures will be sent with the Story Category Code SSD

The outputs are divided into 4 Records, some of which are subsequently divided into a number of fields.
Information makes use of both the *rs* and FS codes.
Each Record in a list is defined by an *rs* code-2 numerics-FS code string, and terminated by CR LF.
Each Field within a Record is defined by a FS-SPACE--FS code string.
If there is no data for a particular Record the *rs* code and numerics will not be present.
The FS-SPACE-FS code strings will always be present within a Record whether the field contains data or not.

The Records and Fields for Daily Lists are as follows:-

Record 0 : Date & Normal KO Time

Field	a	Date	Preceded by *RS 00 FS*
Field	b	Kick-Off Time	Preceded by *FS SPACE FS,* terminated by *CR LF*

Record 1 : Cup/League Name

Field	a	League/Cup Name	Preceded by *RS 01 FS,* terminated by *CR LF*.

Record 2 : Division Name

Field	a	Division Name	Preceded by *RS 02 FS,* terminated by *CR LF*

Repeated for each Division in each League

Record 3 : Match Details

Field	a	Home Team	Preceded by *RS 03 FS*
Field	b	Away Team	Preceded by *FS SPACE FS*
Field	c	Place of Game	Preceded by *FS SPACE FS*
Field	d	KO Time (if different)	Preceded by *FS SPACE FS*
Field	e	All Ticket	Preceded by *FS SPACE FS,* terminated by *CR LF*

Repeated for each game in each Division.

SOCCER COMPLETE SEASON RESULTS SPECIFICATION

The Results will be sent with the Story Category Code SSD

The outputs are divided into 3 Records, 2 of which are subsequently divided into a number of Fields.
Because of the length of the entry for each team, each page will consist of up to 8 results. The first page will have Away Teams 1-8, the second Teams 9-16, the third 17 up to a maximum of 24.
Information makes use of both the *rs* and FS codes.
Each Record is defined by an *rs* code followed by 2 numerics from 00 to 02, followed by FS and terminated by CR LF.
Each Field within a Record is delimited by a FS-SPACE-FS code string.
These will always be present whether the field contains data or not.

The Records and Fields are as follows:-

Record 0	**:**	**League Title**		
Field	a		Text	Preceded by *rs 00 FS*, terminated by *CR LF*
Record 1	**:**	**Away Team Numbers**		
Field	a		Team Number	Preceded by *rs 01 FS*
Field	b		Team Number	Preceded by *FS SPACE FS*
Field	c		Team Number	Preceded by *FS SPACE FS*
up to				
Field	n		Team Number	Preceded by *FS SPACE FS,* terminated by *CR LF*
Record 2	**:**	**Home Team & Results**		
Field	a		Team Number	Preceded by *rs 02 FS*
Field	b		Team Name	Preceded by *FS SPACE FS*
Field	c		Result	Preceded by *FS SPACE FS*
Field	d		Result	Preceded by *FS SPACE FS*
Field	e		Result	Preceded by *FS SPACE FS*
up to				
Field n			Result	Preceded by *FS SPACE FS,* terminated by *CR LF*

This Record will be repeated for each Team in the League.

SOCCER COLLATED SCORES SPECIFICATION

The Collated Half-Time Scores will be sent with the Story Category Code RRA
The Collated Full-Time Results will be sent with the Story Category Code RRB

Both outputs will consist of one List divided into 2 Records, the second into a number of Fields.
Record 00 will contain the League/Division title and will be repeated for each League/Division in the list.
Record 01 will contain the HT score or result and will consist of 8 fields.

The 1st Field will indicate the Pools number for the match. If no Pools number is allocated to the match, this Field will be empty.
The 2nd Field will contain the Home Club name.
The 3rd Field will contain the Home Club half-time score.
The 4th Field will contain the Home Club full-time score.
The 5th Field will contain the Away Club name.
The 6th Field will contain the Away Club half-time score.
The 7th Field will contain the Away Club full-time score.
The 8th Field will indicate the condition of the match, if relevant - e.g. Abandoned, etc.

Information makes use of both the *rs* and FS codes.
Each Record is defined by an *rs* code-2numerics-FS code string and terminated by CR LF.
Each Field within a Record will be defined by a FS-SPACE-FS code string.
If there is no data for a particular Record the *rs* code and numerics will not be present.
The FS-SPACE-FS code strings will always be present within a Record whether the Field contains data or not.

The Records and Fields are as follows:-

Record 0 : League/Division title

Field	a	Text	Preceded by *RS 00 FS,* terminated by *CR LF.*

This Record is repeated for each League/Division in the list.

Record 1 : HT Score or Result

Field	a	Numeric	Preceded by *RS 01 FS*
Field	b	Text	Preceded by *FS SPACE FS*
Field	c	Numeric	Preceded by *FS SPACE FS*
Field	d	Numeric	Preceded by *FS SPACE FS*
Field	e	Text	Preceded by *FS SPACE FS*
Field	f	Numeric	Preceded by *FS SPACE FS*
Field	g	Numeric	Preceded by *FS SPACE FS*
Field	h	Text	Preceded by *FS SPACE FS,* terminated by *CR LF*

This Record is repeated for each game within a League/Division.

SOCCER COLLATED SCORES SPECIFICATION (cont'd)

The Records and Fields are as follows:-

			Field	Content	Field Name	Example
Record 0	:	League/Division Title	0a	Text	League/Div. Name	Barclays League, Division One

Note: League Title will only be displayed for the leading Division.

Record 1	:	HT Score or Result	1a	Numeric	Pools Number	1
			1b	Text	Home Team	Arsenal
			1c	Numeric	HT Score	1
			1d	Numeric	FT Score	3
			1e	Text	Away Team	Coventry
			1f	Numeric	HT Score	0
			1g	Numeric	FT Score	1
			1h	Text	Abandoned, etc.	

OUTPUT EXAMPLES

Collated Half--Time Scores (in Data Format)- note: rs = record separator, fs= field separator

HSA1234 4 RRA BT 132 PA SPORT
1 SOCCER Collated Half-Times
*rs*00*fs*Barclays League Division One
*rs*01*fs*1*fs fs*Arsenal*fs fs*1*fs fsfs fs*Coventry*fs fs*0*fs fsfs fs*
*rs*00*fs*Division Two
*rs*01*fs*16*fs fs*Barnsley*fs fs*1*fs fsfs fs*West Ham*fs fs*1*fs fsfs fs*
*rs*01*fs*17*fs fs*Birmingham*fs fs*0*fs fsfs fs*Nottis City*fs fs*0*fs fsfs fs*
*rs*01*fs*18*fs fs*Brentford*fs fs*0*fs fsfs fs*Wolves*fs fs*1*fs fs*4*fs fs*
*rs*01*fsfs fs*Bristol City*fs fs*2*fs fsfs fs*Portsmouth*fs fs*2*fs fsfs fs*

Collated Full-Time Scores (in Data Format)

HSA1234 4 RRB BT 132 PA SPORT
1 SOCCER Collated Results
*rs*00*fs*Barclays League Division One
*rs*01*fs*1*fs fs*Arsenal*fs fs*1*fs fs*3*fs fs*Coventry*fs fs*0*fs fs*1*fs fs*
*rs*00*fs*Division Two
*rs*01*fs*16*fs fs*Barnsley*fs fs*1*fs fs*1*fs fs*West Ham*fs fs*1*fs fs*1*fs fs*
*rs*01*fs*17*fs fs*Birmingham*fs fs*0*fs fs*2*fs fs*Notts City*fs fs*0*fs fs*1*fs fs*
*rs*01*fs*18*fs fs*Brentford*fs fs*0*fs fs*1*fs fs*Wolves*fs fs*1*fs fs*4*fs fs*
*rs*01*fsfs fs*Bristol City*fs fs*2*fs fs*2*fs fs*Portsmouth*fs fs*2*fs fs*3*fs fs*

SOCCER SUMMARIES SPECIFICATION

The Summaries will be sent with the Story Category Code SOD

The outputs are divided into up to 12 different Records, some of which are subsequently divided into a number of Fields.
Information makes use of both the RS and FS code.
Each Record in a summary is defined by an RS code followed by two numerics, followed by FS code, and terminated by CR LF. If there is no data for a particular Record the RS code and numerics will not be present.
Each Field within a Record is delimited by a FS-SPACE-FS code string. These will always be present whether the Field contains data or not.
Cup games will contain most Records.
League matches will only contain some Records with less on Scottish than on English.
Summaries will be transmitted with several games in one item as available.
All summaries for one day will have consecutive page numbers.

The Records and Fields are as follows:-

Record 0	**:**	**Division/Cup Name**		
Field	a		Text	Preceded by *RS 00 FS,* terminated by *CR LF*
Record 1	**:**	**Venue**		
Field	a		Venue Name	Preceded by *RS 01 FS,* terminated by *CR LF*
Record 2	**:**	**Home Team & Score**		
Field	a		Home Team	Preceded by *RS 02 FS*
Field	b		HT Goals Scored	Preceded by *FS SPACE FS*
Field	c		FT Goals Scored	Preceded by *FS SPACE FS,* terminated by *CR LF*
Record 3	**:**	**Home Goals Details**		
Field	a		Goal Scorer	Preceded by *RS 03 FS*
Field	b		Time Scored	Preceded by *FS SPACE FS*
Field	c		Penalty or OG	Preceded by *FS SPACE FS*
Field	d		Time Scored	Preceded by *FS SPACE FS*
Field	e		Penalty or OG	Preceded by *FS SPACE FS*
until				
Field	n		Time Scored	Preceded by *FS SPACE FS*
Field	n+1		Penalty or OG	Preceded by *FS SPACE FS,* terminated by *CR LF*
This Record will be repeated for each Home Team Goal Scorer				
Record 4	**:**	**Away Team and Score**		
Field	a	:	Away Team	Preceded by *RS 04 FS*
Field	b	:	HT Goals Scored	Preceded by *FS SPACE FS*
Field	c	:	FT Goals Scored	Preceded by *FS SPACE FS,* terminated by *CR LF*
Record 5	**:**	**Away Goals Details**		
Field	a	:	Goal Scorer	Preceded by *RS 05 FS*
Field	b	:	Time Scored	Preceded by *FS SPACE FS*
Field	c	:	Penalty or OG	Preceded by *FS SPACE FS*
Field	d	:	Time Scored	Preceded by *FS SPACE FS*
Field	e	:	Penalty or OG	Preceded by *FS SPACE FS*
Until				
Field	n	:	Time Scored	Preceded by *FS SPACE FS*

Field n+1 : Penalty or OG Preceded by *FS SPACE FS*, terminated by *CR LF*

This Record will be repeated for each Away Team Goal Scorer

Record 6 : Abandoned Reason

Field a : Text Preceded by *RS 06 FS*, terminated by *CR LF*

Record 7 : Score at 90 Minutes

Field a : Home Team Score Preceded by *RS 07 FS*

Field b : Away Team Score Preceded by *FS SPACE FS,* terminated by *CR LF*

Record 8 : Aggregate Score

Field a : Home Team Score Preceded by *RS 08 FS*

Field b : Away Team Score Preceded by *FS SPACE FS,* terminated by *CR LF*

Record 9 : Winning Team on Penalties/Away Goals

Field a : Text Preceded by *RS 09 FS*, terminated by *CR LF*

Record 10 : Attendance

Field a : Text Preceded by *RS 10 FS*, terminated by *CR LF*

Record 11 : Replay Day, Date and Time

Field a : Day and Date Preceded by *RS 11 FS*

Field b : Time Preceded by *FS SPACE FS,* terminated by *CR LF*

SOCCER LEAGUE TABLES SPECIFICATION

The League Tables will be sent with the Story Category Codes:-

English Long Tables	**SDA**
English Short Tables	**SDB**
Scottish Long Tables	**SDC**
Scottish Short Tables	**SDD**

The outputs are divided into 2 Records, the second subsequently into a number of Fields.
Information makes use of both the *RS* and FS codes.
Each Record is defined by an *RS* code-2 numerics-FS code string, and terminated by CR LF.
Each Field within a Record will be defined by a FS-SPACE-FS code string.

The Records and Fields are as follows:

Record 0 : League/Division Title

Field a : Text Preceded by *RS 00 FS*, terminated by *CR LF*

Record 1 : (Long Tables) Team Entry

Field	a	:	No Result Indicator	Preceded by *RS 01 FS*
Field	b	:	Team Name	Preceded by *FS SPACE FS*
Field	c	:	Games Played	Preceded by *FS SPACE FS*
Field	d	:	Home Games Won	Preceded by *FS SPACE FS*
Field	e	:	Home Games Drawn	Preceded by *FS SPACE FS*
Field	f	:	Home Games Lost	Preceded by *FS SPACE FS*
Field	g	:	Home Goals For	Preceded by *FS SPACE FS*
Field	h	:	Home Goals Against	Preceded by *FS SPACE FS*
Field	i	:	Away Games Won	Preceded by *FS SPACE FS*
Field	j	:	Away Games Drawn	Preceded by *FS SPACE FS*
Field	k	:	Away Games Lost	Preceded by *FS SPACE FS*
Field	l	:	Away Goals For	Preceded by *FS SPACE FS*
Field	m	:	Away Goals Against	Preceded by *FS SPACE FS*
Field	n	:	Points	Preceded by *FS SPACE FS*
Field	o	:	Goal Difference	Preceded by *FS SPACE FS*, terminated by *CR LF*

This Record is repeated for each team in the Table.

Record 1 : (Short Tables) Team Entry

Field	a	:	No Result Indicator	Preceded by *RS 01 FS*
Field	b	:	Team Name	Preceded by *FS SPACE FS*
Field	c	:	Games Played	Preceded by *FS SPACE FS*
Field	d	:	Games Won	Preceded by *FS SPACE FS*
Field	e	:	Games Drawn	Preceded by *FS SPACE FS*
Field	f	:	Games Lost	Preceded by *FS SPACE FS*
Field	g	:	Goals For	Preceded by *FS SPACE FS*
Field	h	:	Goals Against	Preceded by *FS SPACE FS*
Field	i	:	Points	Preceded by *FS SPACE FS*, terminated by *CR LF*

This Record is repeated for each team in the Table.

SOCCER GOAL SCORERS TABLE SPECIFICATION

The Goal Scorers Table will be sent with the Story Category Code RRD

The outputs are divided into 5 Records, 2 of which are subsequently divided into a number of Fields.
Information makes use of both the RS and FS code.
Each Record is defined by an RS code-2 numerics-FS code string, and terminated by CR LF.
Each Field within a Record will be defined by FS-SPACE-FS code string.

The Records and Fields are as follows:

Record 0 : By-Line

Field	a	:	Text	Preceded by *RS 00 FS,* terminated by *CR LF*

Record 1 : Division Title

Field	a	:	Text	Preceded by *RS 01 FS*, terminated by *CR LF*

This Record will be repeated for each Division.

Record 2 : Players Details

Field	a	:	Player's Name	Preceded by *RS 02 FS*
Field	b	:	Team Name	Preceded by *FS SPACE FS*
Field	c	:	League Goals	Preceded by *FS SPACE FS*
Field	d	:	FA Cup Goals	Preceded by *FS SPACE FS*
Field	e	:	Littlewood Cup Goals	Preceded by *FS SPACE FS*
Field	f	:	European Goals	Preceded by *FS SPACE FS*
Field	g	:	Spare (Unused)	Preceded by *FS SPACE FS*
Field	h	:	Other Goals	Preceded by *FS SPACE FS*
Field	i	:	Total Goals	Preceded by *FS SPACE FS*, terminated by *CR LF*

This Record (and, if required, Record 3) will be repeated for each Player in the Division.
For Scottish Players Field 4 will be SFA Cup goals, and Field 5 will be League Cup Goals.

Record 3 : Previous Team Details

Field	a	:	Goals Scored	Preceded by *RS 03 FS*
Field	b	:	Previous Team	Preceded by *FS SPACE FS*, terminated by *CR LF*

Record 4 : Other Goals Details

Field	a	:	Text	Preceded by *RS 04 FS*, terminated by *CR LF*

SOCCER TRANSFER FEES TABLE SPECIFICATION

The Transfer Fees Tables will be sent with the Story Category Code RRC

The outputs are divided into 2 Records, the second into a number of Fields.
Information makes use of both the RS and FS codes.
Each Record is defined by an RS code-2 numerics-FS code string, and terminated by CR LF.
Each Field within a Record will be defined by a FS-SPACE-FS code string.
The information will be output under one of three criteria : (a) by fee amount (b) by date, or (c) by position.

The Records and Fields are as follows:

Record 0 : Selection Criteria

Field	a	:	Text	Preceded by *RS 00 FS*, terminated by *CR LF*

Record 1 : Player Information

Field	a	:	Player's name	Preceded by *RS 01 FS*
Field	b	:	Club Transferred From	Preceded by *FS SPACE FS*
Field	c	:	Club Transferred To	Preceded by *FS SPACE FS*
Field	d	:	Fee	Preceded by *FS SPACE FS*
Field	e	:	Date	Preceded by *FS SPACE FS*, terminated by *CR LF*

This Record will be repeated for each Player in the list selected.

SOCCER WORLD CUP GOAL SCORERS TABLE SPECIFICATION

The Goal Scorers Table will be sent with the Story Category Code RRD

The outputs are divided into 5 Records, 2 of which are subsequently divided into a number of Fields.
Information makes use of both the RS and FS codes.
Each Record is defined by an RS code-2 numerics-FS code string, and terminated by CR LF.
If there is no data for a particular Record the RS code, numerics and Fs code will not be present.
Each Field within a Record will be defined by FS-SPACE-FS code string. These will always be present whether the Field contains data or not.

The Records and Fields are as follows:

Record 0 : By-Line

Field	a	:	Text	Preceded by *RS 00 FS*, terminated by *CR LF*

Record 1 : Division Title

Field	a	:	Text	Preceded by *RS 01 FS*, terminated by *CR LF*

This Record will be repeated for each Division.

Record 2 : Players Details

Field	a	:	Player's Name	Preceded by *RS 02 FS*
Field	b	:	Team Name	Preceded by *FS SPACE FS*
Field	c	:	League Goals	Preceded by *FS SPACE FS*
Field	d	:	FA Cup Goals	Preceded by *FS SPACE FS*
Field	e	:	League Cup Goals	Preceded by *FS SPACE FS*
Field	f	:	European Goals	Preceded by *FS SPACE FS*
Field	g	:	Spare (Unused)	Preceded by *FS SPACE FS*
Field	h	:	Other Goals	Preceded by *FS SPACE FS*
Field	i	:	Total Goals	Preceded by *FS SPACE FS*, terminated by *CR LF*

This Record (and, if required, Record 3) will be repeated for each Player in the Division.
For Scottish Players Field 4 will be SFA Cup goals, and field 5 will be League Cup Goals.

Record 3 : Previous Team Details

Field	a	:	Goals Scored	Preceded by *RS 03 FS*
Field	b	:	Previous Team	Preceded by *FS SPACE FS*, terminated by *CR LF*

Record 4 : Other Goals Details

Field	a	:	Text	Preceded by *RS 04 FS*, terminated by *CR LF*

SOCCER POOLS GRID

The Soccer Pools Grid will be sent with the Story Category Code SDG

The outputs are divided into 2 Records
Record 00 will contain the Date.
Record 01 will contain the Pools information and will consist of 6 Fields.
1st Field will indicate the Pools number for the match.
2nd Field will contain the number of points for the match (at half time), and a space followed by H or A to indicate home or away, if relevant.
3rd Field will contain an alpha character indicating that the points allocated to the match have been assessed by the Pools Panel (indicated by P) if relevant.
4th Field will contain the number of points for the match (at full time), and a space followed by H or A to indicate home or away, if relevant.
5th Field The fifth field will contain an alpha character showing whether the match is running late (indicated by "L"), if relevant or an alpha character indicating that the points allocated to the match have been assessed by the Pools Panel (indicated by "P"), if relevant.
6th Field will contain HS if the number of goals scored is higher than 4 (or 5 for weekday matches). The number is decided by Littlewoods and is subject to change.
Record 01 will be displayed in descending numerical order by Pools number.

Information makes use of both the RS and FS code.
Each Record is defined by an RS code-2 numerics-FS code string, and terminated by CR LF.
Each Field within a Record will be defined by a FS-SPACE-FS code string.
If there is no data for a particular Record the RS code and numerics will not be present.
The FS-SPACE-FS code strings will always be present within a Record whether the Field contains data or not.

The Records and Fields are as follows:

Record 00 : Date

Field	a	:	Text	Preceded by *RS 00 FS*, terminated by *CR LF*.

Record 01 : Pools Number and Points

Field	a	:	Numeric	Preceded by *RS 01 FS*
Field	b	:	Text	Preceded by *FS SPACE FS*
Field	c	:	Text	Preceded by *FS SPACE FS*
Field	d	:	Text	Preceded by *FS SPACE FS*
Field	e	:	Text	Preceded by *FS SPACE FS*
Field	f	:	Text	Preceded by *FS SPACE FS,* terminated by *CR LF*

This Record is repeated for each match allocated a Pools number.

The Records and Fields are as follows:-

Record 00 : Date	**Field**	**Content**	**Field Name**		**Example**
		0a	Text	Date	
Saturday August 18					
Record 01 Pools Number & Points					
		1a	Numeric	Pools Number	1
		1b	Text	Points	1 H
		1c	Text	Late/Panel Indicator	P
		1d	Text	Points	1 H
		1e	Text	Late/Panel Indicator	P

1f	Text	High score Indicator	HS

Output Example (in Data Format)

HSA1234 4 SDG BT 132 PA SPORT
1 SOCCER Pools Grid
rs00fsSaturday September 22
rs01fs1fs fs2fs fsfs fs3fs fsfs fs
rs01fs2fs fs1 Hfs fsfs fs1 Hfs fsfs fs
rs01fs3fs fs1 Hfs fsPfs fs1 Hfs fsPfs fs
rs01fs4fs fs2fs fsfs fs2fs fsfs fs
rs01fs5fs fs2fs fsfs fs1 Hfs fsfs fs
rs01fs6fs fs1 Hfs fsfs fs1 Hfs fsfs fsHS
rs01fs7fs fs1 Afs fsfs fsfs fsLfs fs
rs01fs8fs fs1 Hfs fsfs fsfs fsLfs fs
rs01fs9fs fs1 Hfs fsfs fs1 Hfs fsfs fs
rs01fs10fs fs2fs fsfs fs1 Hfs fsfs fs

SOCCER POOLS GUIDE

(Formally SOCCER FORM GUIDE)
The Pools Guide will be sent with the Story Category Code SDH

The outputs are divided into 6 Records.
Records 02 and 03 are subsequently divided into a number of Fields.
Record 01 will be repeated for each division name.
Records 02 and 03 will be repeated for each match in the Division.
Information makes use of both the RS code and FS code.
Each Record is defined by an RS code followed by two numerics followed by an FS code, and terminated by CR LF.
Each Field within a Record is delimited by a *FS-SPACE-FS* code string.

Record 00 will contain the title and date.
Record 01 will contain the division name.
Record 02 will contain the form and prediction.
1st Field will contain the pools match number.
2nd Field will contain the home team form.
3rd Field will contain the home team name.
4th Field will contain the away team name.
5th Field will contain the away team form.
6th Field will contain the pools prediction.
Record 03 will contain the last five results between the two teams.
Record 04 will contain the top ten draws.
Record 05 will contain the top ten homes.
Record 06 will contain the top six aways.

The Records and Fields are as follows:-

Record 00	**:**	**Guide Name**		
Field	a	:	Text	Preceded by *RS 00 FS*, terminated by *CR LF*
Record 01	**:**	**Division Name**		
Field	a	:	Text/Numerics	Preceded by *RS 01 FS*, terminated by *CR LF*
Record 02	**:**	**Form and Prediction**		
Field	a	:	Numerics	Preceded by *RS 02 FS*
Field	b	:	Text	Preceded by *FS SPACE FS*
Field	c	:	Text	Preceded by *FS SPACE FS*
Field	d	:	Text	Preceded by *FS SPACE FS*
Field	e	:	Text	Preceded by *FS SPACE FS*
Field	f	:	Text	Preceded by *FS SPACE FS*, terminated by *CR LF*
Record 03	**:**	**Last Five Results**		
Field	a	:	Text	Preceded by *RS 03 FS*
Field	b	:	Text	Preceded by *FS SPACE FS*
Field	c	:	Text	Preceded by *FS SPACE FS*
Field	d	:	Text	Preceded by *FS SPACE FS*
Field	e	:	Text	Preceded by *FS SPACE FS*, terminated by *CR LF*
Record 04	**:**	**Top Ten Draws**		
Field	a	:	Text	Preceded by *RS 04 FS*, terminated by *CR LF*
Record 05	**:**	**Top Ten Homes**		
Field	a	:	Text	Preceded by *RS 05 FS*, terminated by *CR LF*
Record 06	**:**	**Top Six Aways**		

Field	a	:	Text	Preceded by *RS 06 FS*, terminated by *CR LF*

STOCK LIST SPECIFICATION

Stock Lists are transmitted using the following Story Category Codes:-

FDA 11.00 list for Evening Papers
FDB 13.00 list for Evening Papers
FDC 14.00 list for Evening Papers
FDD 15.00 list for Evening Papers
FDM List for Morning Papers

A complete list will be divided into 6 Records.
The 1st Record will be defined by a Record Separator (RS) code followed by a numeric.
All other Records will be defined by a Record Separator (RS) code, a numeric, followed by a Field Separator (FS) code.

Record 0	Morning/Evening List	-	defined by *RS0*
Record 1	Section Header		defined by *RS1FS*
Record 2	Sub Header	-	defined by *RS2FS*
Record 3	British Fund Quotations	-	defined by *RS3FS*
Record 4	All Other Quotations	-	defined by *RS4FS*
Record 5	FT Indices	-	defined by *RS5FS*

The last 3 Records will be divided into 5 Fields each delimited by a *fs* code which will always be present whether the Field contains data or not.

Field	Content	Example
	*rs*3, *rs*4 OR *rs*5	
	fs	
1	Stock Name	Cons Zinc
	fs	
2	Price	350
	fs	
3	XD, etc.	1/8
	fs	
4	+ or –	+
	fs	
5	Change	2

POPULAR SHARES LIST SPECIFICATION

Popular Shares will be sent with the Story Category Code PDJ

Note: the TTY Popular Shares stock list will be sent using category code PTJ.

The outputs are divided into two records.

Record 00 will contain a text string indicating "Popular Shares – Latest Prices".
Record 01 will contain the name of the stock and price information and will be divided into five fields.
1st Field will contain the stock name
2nd Field will contain the latest price of the stock
3rd Field will contain the price qualifier
4th Field will contain the rise or fall indicator
5th Field will contain the change in price

The information will utilise Record and Field separators which are indicated as RS and FS respectively. Each record will be preceded by RS-nn-FS where nn stands for record number (00 – 99) and will be terminated by CR LF. Each field within a record will be preceded by FS-SPACE-FS. If there is no data for a particular record the RS code, numerics and FS code will not be present. The FS-SPACE-FS code strings will always be present within a record whether the field contains data or not.

The Record and Fields are as follows:

Record 00 :	**Popular Share text indicator**		
Field a	:	Text	Preceded by *RS 00 FS*, terminated by *CR LF*

Record 01 :	**Popular Share stock information**		
Field a	:	Text	Preceded by *RS 01 FS*
Field b	:	Text	Preceded by *FS SPACE FS*
Field c	:	Text	Preceded by *FS SPACE FS*
Field d	:	Text	Preceded by *FS SPACE FS*
Field e	:	Text	Preceded by *FS SPACE FS*, terminated by *CR LF*

The Record and Fields are as follows:

Record 00 :

Field	Content	Field name	Example
0a	Text	String	Popular Shares – Latest Prices

Record 01 :

Field	Content	Field name	Example
1a	Text	Stock name	Abbey Nat
1b	Text	Latest price	395
1c	Text	Price qualifier	XD
1d	Text	Rise/fall ind	+
1e	Text	Price change	1

Note: Fields 1b and 1e can contain fractions in the form 1/16 or ¼. The single character fraction will be flush with the price (eg 345¼), the long fraction will be preceded by a space (eg 345 1/16).

Field 1c can contain one of:
XD – Ex Dividend
XR – Ex Rights
XO – Ex Others
XC – Ex Capital.

UNIT TRUST LIST SPECIFICATION

The Unit Trusts will be sent with the story Category Code FDE

The outputs are divided into 2 Records.
Record 00 will be repeated for each different type.
Record 01 is subsequently divided into 3 Fields and will be repeated for all occurrences of fund type.
Information makes use of both the RS code and FS code.
Each Record is defined by an RS code followed by two numerics **00 and 01** followed by an FS code, and terminated by CR LF.
Each Field within a Record is delimited by an *FS SPACE FS* code string. These will always be present whether any Field contains data or not.

The Records and Fields are as follows:

Record 00 : Fund Manager

Field a	Text	Preceded by *FS 00 FS,* terminated by *CR LF*

Record 01 : Type of Fund

Field a	Stock Name	Preceded by *RS 01 FS*
Field b	Numerics	Preceded by *FS SPACE FS*
Field c	Numerics	Preceded by *FS SPACE FS,* terminated by *CR LF*

WIMBLEDON ORDER OF PLAY SPECIFICATION

The Order of Play will be transmitted using Category Code RDI, (TTY – SSS)
and will carry a Topic and Keyword sequence as follows: TENNIS Wimbledon Order

The output will consist of 4 Records.
Record 00 : Will contain an Order of Play introduction string.
Record 01 : Will contain start times and seed information.
Record 02 : Will consist of 2 Fields. Field 'a' should contain alpha characters up to and including Court 9 with numerics
for the remaining courts.
Record 03 : Will consist of 34 Fields and will be repeated for each match.
If the 'v' Field of Record 3 (Field 3p) is blank, and Field 3q contains 'or', then Record 4 will be transmitted.
Record 04 : Will consist of 35 Fields

The Country Field will be an abbreviation of the country in parenthesis.
A plus sign in parenthesis in the Seed Field denotes a seeded player and the seed number will also be in parenthesis.
Information makes use of both the RS and FS codes.
Each Record is defined by an RS code, two numerics from 00 to 04 and an FS code, and terminated by *CR LF*.
Each Field within a Record will be delimited by an FS-SPACE-FS
If there is no data for a particular Record then the Record will not be transmitted.
The FS-*SPACE-FS* code strings will always be present within a Record whether the Field contains data or not.

The Records and Fields are as follows:

		Type	**Content**	**Example**
Record 00 : Introduction				
RS 00 FS				
Field	a	Text	Comment	The order of play at Wimbledon tomorrow
Record 01 : Start Time and Seed Information				
RS 01 FS				
	Field a :	Text	Comment	(2pm start on Centre Court and Court One 12.30 on others, except where otherwise stated) (+) denotes seeded players.
Record 02 : Start Time and Seed Information				
RS 02 FS				
Field	a followed by *FS SPACE FS*	Text	Court	Centre Court
Field	b	Text	Commentary	
Record 03 : Player Details				
RS 03 FS				
Field	a followed by *FS SPACE FS*	Text	Seed	(+)

Field	b followed by *FS SPACE FS*	Text	Seed Number	7
Field	c followed by *FS SPACE FS*	Text	Title	
Field	d followed by *FS SPACE FS*	Text	Initial 1	T
Field	e followed by *FS SPACE FS*	Text	Initial 2	
Field	f followed by *FS SPACE FS*	Text	Initial 3	
Field	g followed by *FS SPACE FS*	Text	Surname	Muster
Field	h followed by *FS SPACE FS*	Text	Country	(Aut)
Field	I followed by *FS SPACE FS*	Text	Text	
Field	j followed by *FS SPACE FS*	Text	Title	
Field	k followed by *FS SPACE FS*	Text	Initial 1	
Field	l followed by *FS SPACE FS*	Text	Initial 2	
Field	m followed by *FS SPACE FS*	Text	Initial 3	
Field	n followed by *FS SPACE FS*	Text	Surname	
Field	o followed by *FS SPACE FS*	Text	Country	
Field	p followed by *FS SPACE FS*	Text	Versus	v
Field	q followed by *FS SPACE FS*	Text	Text	or
Field	r followed by *FS SPACE FS*	Text	Seed	(+)
Field	s followed by *FS SPACE FS*	Text	Seed Number	(10)
Field	t followed by *FS SPACE FS*	Text	Title	
Field	u followed by *FS SPACE FS*	Text	Initial 1	M
Field	v followed by *FS SPACE FS*	Text	Initial 2	
Field	w followed by *FS SPACE FS*	Text	Initial 3	
Field	x followed by *FS SPACE FS*	Text	Surname	Jaite
Field	y followed by *FS SPACE FS*	Text	Country	Arg
Field	z followed by *FS SPACE FS*	Text	Text	

WIMBLEDON ORDER OF PLAY SPECIFICATION (cont'd)

Record 03 : Player Details (cont'd)

		Type	Content	Example
Field	A followed by *FS SPACE FS*	Text	Title	
Field	B followed by *FS SPACE FS*	Text	Initial 1	
Field	C followed by *FS SPACE FS*	Text	Initial 2	
Field	D followed by *FS SPACE FS*	Text	Initial 3	
Field	E followed by *FS SPACE FS*	Text	Surname	
Field	F followed by *FS SPACE FS*	Text	Country	
Field	G followed by *FS SPACE FS*	Text	Text	
Field	H	Text	Text	Game Comment

Record 04 : Player Details

RS 04 FS

Field	a followed by *FS SPACE FS*	Text	Seed	
Field	b followed by *FS SPACE FS*	Text	Seed	
Field	c followed by *FS SPACE FS*	Text	Seed Number	
Field	d followed by *FS SPACE FS*	Text	Title	
Field	e followed by *FS SPACE FS*	Text	Initial 1	N
Field	f followed by *FS SPACE FS*	Text	Initial 2	
Field	g followed by *FS SPACE FS*	Text	Initial 3	
Field	h followed by *FS SPACE FS*	Text	Surname	Kroon
Field	I followed by *FS SPACE FS*	Text	Country	(Swe)
Field	j followed by *FS SPACE FS*	Text	Text	
Field	k followed by *FS SPACE FS*	Text	Title	
Field	l followed by *FS SPACE FS*	Text	Initial 1	
Field	m followed by *FS SPACE FS*	Text	Initial 2	

Field	n followed by *FS SPACE FS*	Text	Initial 3	
Field	o followed by *FS SPACE FS*	Text	Surname	
Field	p followed by *FS SPACE FS*	Text	Country	
Field	q followed by *FS SPACE FS*	Text	Versus	v
Field	r followed by *FS SPACE FS*	Text	Text	or
Field	s followed by *FS SPACE FS*	Text	Seed	(+)
Field	t followed by *FS SPACE FS*	Text	Seed Number	
Field	u followed by *FS SPACE FS*	Text	Title	
Field	v followed by *FS SPACE FS*	Text	Initial 1	
Field	w followed by *FS SPACE FS*	Text	Initial 2	
Field	x followed by *FS SPACE FS*	Text	Initial 3	
Field	y followed by *FS SPACE FS*	Text	Surname	
Field	z followed by *FS SPACE FS*	Text	Country	(Yug)
Field	A followed by *FS SPACE FS*	Text	Text	
Field	B followed by *FS SPACE FS*	Text	Title	
Field	C followed by *FS SPACE FS*	Text	Initial 1	
Field	D followed by *FS SPACE FS*	Text	Initial 2	
Field	E followed by *FS SPACE FS*	Text	Initial 3	
Field	F followed by *FS SPACE FS*	Text	Surname	
Field	G followed by *FS SPACE FS*	Text	Country	
Field	H followed by *FS SPACE FS*	Text	Text	
Field	I	Text	Text	Game Comment

WIMBLEDON ORDER OF PLAY SPECIFICATION (cont'd)

Output Example – Note: *rs = record separator, fs = field separator*

*rs*00*fs*The Order of Play at Wimbledon tomorrow
*rs*01*fs*(2pm start on Centre Court and Court One: 12:30 on others, except where otherwise stated) (+) denotes seeded players
*rs*02*fs*Centre Court*fs fs*
*rs*03*fsfs fsfs fs*Miss*fs fs*C*fs fsfs fsfs fs*Tanvier*fs fs* (Fra) *fs fsfs fsfs fsfs fsfs fsfs fsfs fsfs fs*v*fs fsfs fs*(+)*fs fs*(4)*fs fs*Miss*fs fs*G*fs fsfs fsfs fs*Sabatini*fs fs*(Arg)*fs fsfs fsfs fsfs fsfs fsfs fsfs fsfs fsfs fs*
*rs*03*fsfs fsfs fsfs fs*M*fs fsfs fsfs fs*Kratzmann*fs fs*(Aus)*fs fsfs fsfs fsfs fsfs fsfs fsfs fsfs fs*v*fs fsfs fs*(+)*fs fs*(13)*fs fsfs fs*M*fs fsfs fsfs fs*Chang*fs fs*(USA)*fs fsfs fsfs fsfs fsfs fsfs fsfs fsfs fsfs fs*
*rs*03*fs*(+)*fs fs*(8)*fs fsfs fs*K*fs fsfs fsfs fs*Flach*fs fs*(USA)*fs fs*and*fs fsfs fs*R*fs fsfs fsfs fs*Seguso*fs fs*(USA) *fs fs*v*fs fsfs fs*(+)*fs fs*(10)*fs fsfs fs*J*fs fsfs fsfs fs*Grabb*fs fs*(USA)*fs fs*and*fs fsfs fs*P*fs fsfs fsfs fs*McEnroe*fs fs*(USA)*fs fsfs fs*
*rs*02*fs*Court One*fs fs*
*rs*03*fs*(+)*fs fs*(3)*fs fsfs fs*S*fs fsfs fsfs fs*Edberg*fs fs*(Swe)*fs fsfs fsfs fsfs fsfs fsfs fsfs fsfs fsfs fs*v*fs fsfs fsfs fsfs fsfs fs*A*fs fsfs fsfs fs*Mansdorf*fs fs*(lsr)*fs fsfs fsfs fsfs fsfs fsfs fsfs fsfs fsfs fs*
*rs*03*fsfs fsfs fs*Miss*fs fs*K*fs fsfs fsfs fs*Kschwendt*fs fs*(Lux)*fs fsfs fsfs fsfs fsfs fsfs fsfs fsfs fsfs fs*v*fs fsfs fs*(+)*fs fs*(2)*fs fs*Miss*fs fs*M*fs fsfs fsfs fs*Navratilova*fs fs*(USA)*fs fsfs fsfs fsfs fsfs fsfs fsfs fsfs fsfs fs*
*rs*03*fs*(+)*fs fs*(1)*fs fsfs fs*I*fs fsfs fsfs fs*Lendl)*fs fs*(Czech)*fs fsfs fsfs fsfs fsfs fsfs fsfs fsfs fsfs fs*v*fs fsfs fsfs fsfs fsfs fs*B*fs fsfs fsfs fs*Sheltob*fs fs*(USA)*fs fsfs fsfs fsfs fsfs fsfs fsfs fsfs fsfs fs*
*rs*02*fs*Court Two*fs fs*
*rs*03*fsfs fsfs fs*Mrs*fs fs*S*fs fs*W*fs fsfs fs*Magers*fs fs*(USA)*fs fsfs fsfs fsfs fsfs fsfs fsfs fsfs fsfs fs*v*fs fsfs fs*(+)*fs fs*(11)*fs fs*Miss*fs fs*N*fs fsfs fsfs fs*Zvereva*fs fs*(USSR)*fs fsfs fsfs fsfs fsfs fsfs fsfs fsfs fsfs fs*
*rs*03*fs*(+)*fs fs*(9)*fs fsfs fs*J*fs fsfs fsfs fs*Courier*fs fs*(USA)*fs fsfs fsfs fsfs fsfs fsfs fsfs fsfs fsfs fs*v*fs fsfs fsfs fsfs fsfs fs*M*fs fsfs fsfs fs*Woodforde*fs fs*(Aus)*fs fsfs fsfs fsfs fsfs fsfs fsfs fsfs fsfs fs*
*rs*03*fsfs fsfs fs*Miss*fs fs*A*fs fs*B*fs fsfs fs*Henricksson*fs fs*(USA)*fs fs*and*fs fs*Miss*fs fs*D*fs fs*S*fs fsfs fs*Van Rensburg*fs fs*(SA)*fs fs*v*fs fsfs fs*(+)*fs fs*(3)*fs fs*Miss*fs fs*L*fs fsfs fsfs fs*Savchenko*fs fs*(USSR)*fs fs*and*fs fs*Miss*fs fs*N*fs fsfs fsfs fs*Zvereva*fs fs*(USSR)*fs fsfs fs*
*rs*03*fsfs fsfs fsfs fs*H*fs fsfs fsfs fs*Leconte*fs fs*(Fra)*fs fs*and*fs fs*Miss*fs fs*B*fs fsfs fsfs fs*Nagelsen*fs fs*(USA)*fs fs*v*fs fsfs fs*(+)*fs fs*(13)*fs fsfs fs*P*fs fsfs fsfs fs*Annacone*fs fs*(USA)*fs fs*and*fs fs*Miss*fs fs*A*fs fsfs fsfs fs*Sanchez Vicario*fs fs*(Spain)*fs fsfs fs*
*rs*02*fs*Court Three*fs fs*
*rs*03*fsfs fsfs fsfs fs*M*fs fsfs fsfs fs*Srejber*fs fs*(Czech)*fs fsfs fsfs fsfs fsfs fsfs fsfs fsfs fsfs fs*v*fs fsfs fsfs fsfs fsfs fs*B*fs fsfs fsfs fs*Pearce*fs fs*(USA)*fs fsfs fsfs fsfs fsfs fsfs fsfs fsfs fsfs fs*
*rs*03*fsfs fsfs fs*Miss*fs fs*B*fs fsfs fsfs fs*Nagelsen*fs fs*(USA)*fs fsfs fsfs fsfs fsfs fsfs fsfs fsfs fsfs fs*v*fs fsfs fsfs fsfs fs*Miss*fsfs*B*fs fsfs fsfs fs*Schultz*fs fs*(Hol)*fs fsfs fsfs fsfs fsfs fsfs fsfs fsfs fsfs fs*
*rs*03*fs*(+)*fs fs*(14)*fs fsfs fs*M*fs fs*J*fs fsfs fs*Bates*fs fs*(GB)*fs fs*and*fs fsfs fs*K*fs fsfs fsfs fs*Curren*fs fs*(USA)*fs fs*v*fs fsfs fsfs fsfs fsfs fs*P*fs fsfs fsfs fs*Doohan*fs fs*(Aus)*fs fs*and*fs fsfs fs*L*fs fsfs fsfs fs*Warder*fs fs*(Aus)*fs fsfs fs*to finish
*rs*03*fsfs fsfs fsfs fs*S*fs fsfs fsfs fs*Botfield*fs fs*(GB)*fs fs*and*fs fsfs fs*J*fs fs*M*fs fsfs fs*Turner*fs fs*(GB)*fs fs*v*fs fsfs fs*(+)*fs fs*(13)*fs fsfs fs*(G)*fs fsfs fsfs fs*Luza*fs fs*(Arg)*fs fs*and*fs fsfs fs*C*fs fsfs fsfs fs*Moffat*fs fs*(Bra)*fs fsfs fs*

WIMBLEDON RESULTS SPECIFICATION

Tennis Results will be transmitted using Category Code RGD (TTY - RSR), and will carry a topic and keyword sequence as follows:
TENNIS Wimbledon Results

The Results are divided into 3 Records.

Record 1 contains an introduction string.
Record 2 contains the competition name and round
Record 3 contains the players' details and is sub-divided into 37 Fields.

Information makes use of both RS code and FS code.
Each Record in a list is defined by an RS code followed by two numerics in the range 00 to 02, followed by FS code, terminated by CR LF.
If there is no data for a particular Record then it will not be transmitted.
Each Field within a Record is delimited by FS-SPACE-FS code string. These will always be present whether the Field contains data or not.

The Records and Fields are as follows:

Record 00 :	**Introduction**		
Field	a	Text	Preceded by *RS 00 FS*, terminated by *CR LF*
Record 01 :	**Competition Name and Round**		
Field	a	Text	Preceded by RS *01 FS*, terminated by *CR LF*
Record 02 :		**Result**	
Field	a	Text	Preceded by *RS 02 FS,* terminated by *CR LF*
Field	b	Text	Preceded by *FS SPACE FS*
Field	c	Text	Preceded by *FS SPACE FS*
Field	d	Text	Preceded by *FS SPACE FS*
Field	e	Text	Preceded by *FS SPACE FS*
Field	f	Text	Preceded by *FS SPACE FS*
Field	g	Text	Preceded by *FS SPACE FS*
Field	h	Text	Preceded by *FS SPACE FS*
Field	I	Text	Preceded by *FS SPACE FS*
Field	j	Text	Preceded by *FS SPACE FS*
Field	k	Text	Preceded by *FS SPACE FS*
Field	l	Text	Preceded by *FS SPACE FS*
Field	m	Text	Preceded by *FS SPACE FS*
Field	n	Text	Preceded by *FS SPACE FS*
Field	o	Text	Preceded by *FS SPACE FS*
Field	p	Text	Preceded by *FS SPACE FS*
Field	q	Text	Preceded by *FS SPACE FS*
Field	r	Text	Preceded by *FS SPACE FS*
Field	s	Text	Preceded by *FS SPACE FS*
Field	t	Text	Preceded by *FS SPACE FS*
Field	u	Text	Preceded by *FS SPACE FS*
Field	v	Text	Preceded by *FS SPACE FS*
Field	w	Text	Preceded by *FS SPACE FS*
Field	x	Text	Preceded by *FS SPACE FS*
Field	y	Text	Preceded by *FS SPACE FS*

Field	z	Text	Preceded by *FS SPACE FS*
Field	A	Text	Preceded by *FS SPACE FS*
Field	B	Text	Preceded by *FS SPACE FS*
Field	C	Text	Preceded by *FS SPACE FS*
Field	D	Text	Preceded by *FS SPACE FS*
Field	E	Text	Preceded by *FS SPACE FS*
Field	F	Text	Preceded by *FS SPACE FS*
Field	G	Text	Preceded by *FS SPACE FS*
Field	H	Text	Preceded by *FS SPACE FS*
Field	I	Text	Preceded by *FS SPACE FS*
Field	J	Text	Preceded by *FS SPACE FS*
Field	K	Text	Preceded by *FS SPACE FS*, terminated by *CR LF*

WIMBLEDON RESULTS SPECIFICATION cont'd

The Records and Fields are as follows:-

Record 00 :	**Introduction**	**Type**	**Content**	**Example**	
Field	a		Text	Introduction	The results from Wimbledon today
Record 01 :	**Competition Name and Round**				
Field	a		Text	Competition/Round	Men's Singles, 3rd rd
Record 02 :	**Result**				
Field	a		Text	Seed Indicator	(+)
Field	b		Text	Seed Number	(4)
Field	c		Text	Player Title	
Field	d		Text	First Initial	G
Field	e		Text	Second Initial	
Field	f		Text	Third Initial	
Field	g		Text	Player's Surname	Ivanisevic
Field	h		Text	Player's Country	(Yug)
Field	i		Text	Text	
Field	j		Text	Player's Title	
Field	k		Text	First Initial	
Field	l		Text	Second Initial	
Field	m		Text	Third Initial	
Field	n		Text	Player's Surname	
Field	o		Text	Player's Country	
Field	p		Text	Text	bt
Field	q		Text	Seed Indicator	(+)
Field	r		Text	Seed Number	(2)
Field	s		Text	Player's Title	
Field	t		Text	First Initial	D
Field	u		Text	Second Initial	
Field	v		Text	Third Initial	
Field	w		Text	Player's Surname	Rostagno
Field	x		Text	Player's Country	(USA)
Field	y		Text	Text	
Field	z		Text	Player's Title	
Field	A		Text	First Initial	
Field	B		Text	Second Initial	
Field	C		Text	Third Initial	
Field	D		Text	Player's Surname	
Field	E		Text	Player's Country	
Field	F		Text	Set Score 1	6-2
Field	G		Text	Set Score 2	6-2
Field	H		Text	Set Score 3	6-4
Field	I		Text	Set Score 4	
Field	J		Text	Set Score 5	
Field	K		Text	Game Comment	

Seeded Players are indicated by a plus (+) in the Seed Field.

Record 2 is repeated for each match in collated outputs.

WIMBLEDON RESULTS SPECIFICATION (cont'd)

Output Examples

*rs*00*fs*The results from Wimbledon today
*rs*01*fs*Men's Singles, 3rd rd
*rs*02(+)*fs fs*(4)*fs fsfs fs*G*fs fsfs fsfs fs*Ivanisevic*fs fs*(Yug)*fs fsfs fsfs fsfs fsfs fsfs fsfs fsfs fsfs fs*bt*fs fs*(+)*fs fs*(4)*fs fsfs fs*D*fs fsfs fsfs fs*Rostagno*fs fs*(USA)*fs fsfs fsfs fsfs fsfs fsfs fsfs fsfs fsfs fs*6-2*fs fs*6-2*fs fs*6-4*fs fsfs fsfs fs*

*rs*01*fs*Women'sDoubles, 2nd rd
*rs*02*fs*(+)*fs fs*(2)*fs fsfs fs*G*fs fsfs fsfs fs*Fernandez*fs fs*(Pur)*fs fs*and*fs fsfs fs*M*fs fsfs fsfs fs*Navratilova*fs fs*(USA)*fs fs*bt*fs fsfs fsfs fsfs fs*P*fs fsfs fsfs fs*Paradis*fs fs*(Fra)*fs fs*and*fsfsfs fs*C*fs fsfs fsfs fs*Suire*fs fs*(Fra)*fs fs*6-3*fs fs*6-3*fs fsfs fsfs fsfs fs*
*rs*02*fsfs fsfs fsfs fs*N*fs fsfs fsfs fs*Tauziat*fs fs*(Fra)*fs fs*and*fs fsfs fs*H*fs fs*W*fs fsfs fs*Wiesnerf*fs fs*(Aut)*fs fs*bt*fs fs*(+)*fs fs*(14)*fs fsfs fs*N*fs fsfs fsfs fs*Medvedeva*fs fs*(USSR)*fs fs*and*fs fsfs fs*L*fs fsfs fsfs fs*Meskhif*fs fs*(USSR)*fs fs*6-3*fs fs*6-3*fs fsfs fsfs fsfs fs*

WIMBLEDON DRAW SPECIFICATION

The Draw will be transmitted using Category Code RDI
and will carry a topic and keyword sequence as follows: TENNIS Wimbledon Draw

The list will contain 4 Records.

Record 00 will contain the competition title.
Records 01 and 03 will be the seeded players**. Record 01** will be the first player (or pair) in the block.
Record 02 will be repeated for each unseeded player (or pair) in the block.
Record 03 will be the last player (or pair) in a block.

Records 01, 02, 03 will use identical formats, each containing 13 Fields.
1st Field will contain the numeric Seed indicator (only used for seeded players, string in the range 1 to 16).
2nd Field will contain the Player's title (only used for ladies and girls; Mrs. Miss).
3rd, 4th & 5th Fields will contain the Player's initials.
6th Field will contain the Player's surname.
7th Field will contain the Player's country.
8th Field will contain the Player's title (only used for ladies and girls; Mrs. Miss - blank if a Singles match).
9th, 10 th & 11 th Fields will contain the Player's initials (blank if a Singles match).
12th Field will contain the Player's surname (blank if a Singles match).
13th Field will contain the Player's country (blank if a Singles match).

Each Record will be defined by a Code String of RS code-two numerics-FS code, and terminated by CR LF.
Each field will be defined by an FS-SPACE-FS code string. The FS-SPACE-FS strings will always be present in each Record whether the field contains data or not.
Each Record will terminate with a carriage return and a line feed i.e. CR LF

The Records and Fields are as follows:

Record 00 : Competition Title

Field	a	:	Text	Preceded by *RS 00 FS*, terminated by *CR LF*

Records 01, 02, 03 will use identical formats

Records 01, 02, 03 : Player(s) Details

Field	1a	Numeric	Preceded by *RS 01 FS* where appropriate
Field	2a	Numeric	Preceded by *RS 02 FS*, where appropriate
Field	3a	Numeric	Preceded by *RS 03 FS*, where appropriate
Field	b	Text	Preceded by *FS SPACE FS*
Field	c	Text	Preceded by *FS SPACE FS*
Field	d	Text	Preceded by *FS SPACE FS*
Field	e	Text	Preceded by *FS SPACE FS*
Field	f	Text	Preceded by *FS SPACE FS*
Field	g	Text	Preceded by *FS SPACE FS*
Field	h	Text	Preceded by *FS SPACE FS*
Field	I	Text	Preceded by *FS SPACE FS*
Field	j	Text	Preceded by *FS SPACE FS*
Field	k	Text	Preceded by *FS SPACE FS*
Field	l	Text	Preceded by *FS SPACE FS*

Field	m	Text	Preceded by *FS SPACE FS*, terminated by *CR LF*

WIMBLEDON DRAW SPECIFICATION (cont'd)

The Records and fields are as follows

Record 00 :		**Competition Title**	**Type**	**Content**	**Example**
Field	a		Text	Competition Title	Men's Singles

Records 01, 03 : Player(s) Details

Field	a	Numeric	Seed	1
Field	b	Text	Player's Title	
Field	c	Text	1st Initial	B
Field	d	Text	2nd Initial	
Field	e	Text	3rd Initial	
Field	f	Text	Player's Surname	Becker
Field	g	Text	Player's Country	Ger
Field	h	Text	Player's Title	
Field	I	Text	1st Initial	
Field	j	Text	2nd Initial	
Field	k	Text	3rd Initial	
Field	l	Text	Player's Surname	
Field	m	Text	Player's Country	

Record 02 : Player(s) Details

Field	a	Numeric	Seed	1
Field	b	Text	Player's Title	
Field	c	Text	1st Initial	A
Field	d	Text	2nd Initial	
Field	e	Text	3rd Initial	
Field	f	Text	Player's Surname	Mansdorf
Field	g	Text	Player's Country	Isl
Field	h	Text	Player's Title	
Field	I	Text	1st Initial	
Field	j	Text	2nd Initial	
Field	k	Text	3rd Initial	
Field	l	Text	Player's Surname	
Field	m	Text	Player's Country	

Output Examples – Note: rs = record separator, fs = field separatro

*rs*00*fs*Ladies' Singles
*rs*01*fs*1*fs fs*Miss*fs fsfs fsfs fsfs fs*Graf*fs fs*Ger*fs fsfs fsfs fsfs fsfs fsfs fs*
*rs*02*fsfs fs*Miss*fs fs*C*fs fsfs fsfs fs*Porwik*fs fs*Ger*fs fsfs fsfs fsfs fsfs fsfs fs*
*rs*02*fsfs fs*Miss*fs fs*E*fs fsfs fsfs fs*Brioukhovets*fs fs*USSR*fs fsfs fsfs fsfs fsfs fsfs fs*
*rs*02*fsfs fs*Miss*fs fs*M*fs fsfs fsfs fs*McGrath*fs fs*USA*fs fsfs fsfs fsfs fsfs fsfs fs*
*rs*02*fsfs fs*Miss*fs fs*C*fs fsfs fsfs fs*Kohde-Kilsch*fs fs*Ger*fs fsfs fsfs fsfs fsfs fsfs fs*
*rs*02*fsfs fs*Miss*fs fs*M*fs fsfs fsfs fs*Paz*fs fs*Arg*fs fsfs fsfs fsfs fsfs fsfs fs*
*rs*02*fsfs fs*Miss*fs fs*R*fs fs*P*fs fsfs fs*Stubbs*fs fs*Aus*fs fsfs fsfs fsfs fsfs fsfs fs*
*rs*02*fsfs fs*Miss*fs fs*D*fs fs*L*fs fsfs fs*Faber*fs fs*USA*fs fsfs fsfs fsfs fsfs fsfs fs*
*rs*02*fsfs fs*Miss*fs fs*N*fs fsfs fsfs fs*Miyagi*fs fs*Jap*fs fsfs fsfs fsfs fsfs fsfs fs*
*rs*02*fsfs fs*Miss*fs fs*R*fs fs*M*fs fsfs fs*White*fs fs*USA*fs fsfs fsfs fsfs fsfs fsfs fs*
*rs*02*fsfs fs*Miss*fs fs*M*fs fsfs fsfs fs*Maleeva*fs fs*Bul*fs fsfs fsfs fsfs fsfs fsfs fs*
*rs*02*fsfs fs*Miss*fs fs*C*fs fsfs fsfs fs*Lindqvist*fs fs*Swe*fs fsfs fsfs fsfs fsfs fsfs fs*
*rs*02*fsfs fs*Miss*fs fs*J*fs fsfs fsfs fs*Halard*fs fs*Fra*fs fsfs fsfs fsfs fsfs fsfs fs*

*rs*02*fsfs fs*Miss*fs fs*K*fs fsfs fsfs fs*Jordan*fs fs*USA*fs fsfs fsfs fsfs fsfs fsfs fs*
*rs*02*fsfs fs*Miss*fs fs*H*fs fsfs fsfs fs*Kelesi*fs fs*Can*fs fsfs fsfs fsfs fsfs fsfs fs*
*rs*03*fs*12*fs fs*Miss*fs fs*J*fs fsfs fsfs fs*Capriati*fs fs*USA*fs fsfs fsfs fsfs fsfs fsfs fs*

Output Examples (cont'd)

*rs*00*fs*Men's Singles
*rs*01*fs*1*fs fsfs fs*B*fs fsfs fsfs fs*Becker*fs fs*Ger*fs fsfs fsfs fsfs fsfs fsfs fs*
*rs*02*fsfs fsfs fs*A*fs fsfs fsfs fs*Mansdorff*s fs*lsr*fs fsfs fsfs fsfs fsfs fsfs fs*
*rs*03*fs*16*fs fsfs fs*A*fs fs*B*fs fs*C*fs fs*SMITH*fs fs*US*fs fsfs fsfs fsfs fsfs fsfs fs*

*rs*00*fs*Ladies' Doubles
*rs*01*fs*1*fs fs*Miss*fs fs*J*fs fsfs fsfs fs*Novotna*fs fs*CZECH*fs fs*Miss*fs fs*H*fs fsfs fsfs fs*Sukova*fs fs*Czech

*rs*02*fsfs fs*Miss*fs fsfs fsfs fsfs fs*Bakkum*fs fs*Hol*fs fs*Miss*fs fs*K*fs fsfs fsfs fs*Radford*fs fs*Aus
*rs*02*fsfs fs*Miss*fs fs*J*fs fs*M*fs fsfs fs*Durie*fs fs*GB*fs fs*Miss*fs fs*J*fs fs*A*fs fsfs fs*Richardson*fs fs*NZ
*rs*02*fsfs fs*Miss*fs fs*C*fs fsfs fsfs fs*Lindqvist*fs fs*Swe*fs fs*Miss*fs fs*T*fs fsfs fsfs fs*Scheuer-Larsen*fs fs*Den

*rs*03*fs*13*fs fs*Miss*fs fs*A*fs fs*E*fs fsfs fs*Smith*fs fs*USA*fs fs*Miss*fs fs*W*fs fs*M*fs fsfs fs*Turnbull*fs fs*Aus
*rs*01*fs*15*fs fs*Mrs*fs fs*P*fs fs*F*fs fsfs fs*Daniels*fs fs*USA*fs fs*Mrs*fs fs*W*fs fs*E*fs fsfs fs*Prausa*fs fs*USA
*rs*02*fsfs fs*Miss*fs fs*S*fs fs*L*fs fsfs fs*Collins*fs fs*USA*fs fs*Miss*fs fs*J*fs fs*B*fs fsfs fs*Smoller*fs fs*USA
*rs*02*fsfs fs*Miss*fs fs*S*fs fs*J*fs fsfs fs*Loosemore*fs fs*GB*fs fs*Miss*fs fs*A*fs fsfs fsfs fs*Simpkin*fs fs*GB

*rs*03*fs*7*fs fs*Miss*fs fs*M*fs fsfs fsfs fs*Paz*fs fs*Arg*fs fs*Miss*fs fs*A*fs fsfs fsfs fs*Sanchez-Vicario*fs fs*Spain

7901/ Data Format Specification - Election / Honours

(The Press Association)

IN ACCORDANCE WITH IPTC TECH7901 (UK VERSION)

	Field Title	Composition	Content/Example
3.	Preheader Information	Defined by NAK, *CR* , *LF*. One or more groups of 3 alphas, each terminated by *SPACE*. The last terminated by *SPACE*, *CR* , *LF* & 5 DEL codes.	See list below
4.1	Start of Header	One SOH code	SOH
4.2	Source Identification	Three alphas	HSA for Comprehensive Service or PAS for PACE London's
4.2	Sequence Number	Four numerics from 0001 to 9999	e.g. 1347
4.3	Field Separator	One space code	*SPACE*
4.4	Priority of Story	One numeric from 1 to 5	See list below
4.5	Field Separator	One space code	*SPACE*
4.6	Category of Story	Three alphas	See list below
4.7	Field Separator	One space code	*SPACE*
4.8	Word Count	Up to 4 numerics, leading zeroes suppressed	e.g. 201
4.9	Field Separator	One space code	*SPACE*
4.10	Optional Information	Up to 50 characters	e.g. PA PARLY
4.11	Field Separator	*CR LF* codes	*CR LF*
4.12	Keyword & Catchline	Page number, keyword in caps, and up to three other words in c&lc. Maximum 69 characters.	e.g. 2 Thatcher Letter
4.13	Field Separator	*CR LF* codes	*CR LF*
4.14	Start of Text	One STX code	STX
5.	Message Text		
5	Slug Information	Not currently used	
6.1	End of Text	*CR LF* & ETX codes	*CR LF* ETX
6.2	Date and Time	Six numerics, 2 each for day, hour & minute, followed by space. Three alphas for month, followed by space. Two numerics for year.	231438 May 88
6.3	Message Separation Pattern	Quad Left, *CR* & 5 *LF* codes	Q/L *CR LF LF LF LF LF*
6.4	End of Transmission	One EOT & 3 *LF* Codes	EOT *LF LF LF*

Examples of Content of Preheader Information Field 3 :

AAA Home News
EMB Embargo items
CCC Sports items
NNN Item also on Newswire.
Each or several individual sites 3-alpha codes.

Contents of Priority of Story Field 4.4 :

1 FLASH and RUSH (breaks into any item in transmission)
2 SNAP and RUSHFULL
3 SNAPFULL
4 Normal
5 Requested rerun. NB some low priority items will run at priority 5 (eg test messages)

Note : Items broken into by a Priority 1 message

Items will be terminated by the following code sequence:
CR LF CR LF BUST IT CAN EOT *CR LF LF LF LF LF LF*
The Priority message will then commence in the normal way.
The BUST message will be repeated in full, following completion of the Priority message.

Contents of Category of Story Field 4.6 :

See list sent on system First Tuesday of each month.

MESSAGE HEADER

Messages are transmitted by the Message Switching System using the International Press Telecommunications Council Standard Format 7901. This format is as follows:-

	Field Title	Composition
1.	**Preheader Information**	**Defined by NAK, *CR* , *LF*. One or more groups of 3 alphas each terminated by *SPACE*. The last terminated by *SPACE*, *CR* , *LF* and 5 DEL codes.**
2.1	**Start of Header**	**One SOH code.**
2.2	**Source Indentification**	**Three Alphas**
2.3	**Sequence Number**	**Four numerics from 0001 to 9999**
2.4	**Field Separator**	**One *SPACE* code**
2.5	**Priority of Story**	**One numeric from 1 to 4**
2.6	**Field Separator**	**One *SPACE* code**
2.7	**Category of Story**	**Three Alphas**
2.8	**Field Separator**	**One *SPACE* code**
2.9	**Word Count**	**Up to 4 Numerics, leading zeroes suppressed**
2.10	**Field Separator**	**One *SPACE* code**
2.11	**Optional Information**	**Up to 50 characters**
2.12	**Field Separator**	***CR LF* codes**
2.13	**Keyword and Catchline**	**Page number, keyword in caps and up to three other words in c&lc. Maximum 69 characters**
2.14	**Field Separator**	***CR LF* codes**
2.15	**Start of Text**	**One STX code**
3.	**Message Text**	
3.1	**Slug Information**	**Not currently used**
4.1	**End of Text**	***CR LF* and ETX codes**
4.2	**Date and Time**	**Six numerics, 2 each for day, hour and minutes, followed by *SPACE*. Three Alphas for month, followed by *SPACE*. Two numerics for year.**
4.3	**Message Separation Pattern**	**Quad Left, *CR* and 5 *LF* codes**
4.4	**End of Transmission**	**One EOT and 3 *LF* codes.**

MESSAGE FORMAT AND ADDRESSING (cont'd)

A message filed from SYS55 with the input header completed thus:-
INFO *PA* _____
PRI *4* CAT *HHH*_TXT(X)/TAB(T)X
PG *1* __ TOPIC *TRANSPORT* ___KEYWORD *Drink* _____- *Police* _____
…
ADDRESS *AAA* _____
would appear on transmission with the message header:-
AAA HHH
HSA1104 4 HHH 143 PA
1 TRANSPORT Drink Police
with

a) the PRI field of the SII input header as field 2.5 of the output header;
b) the SII CAT Field 1s field 2.7 of the output header;
c) the SII INFO Field 1s field 2.11 of the output header
d) the SII PG, TOPIC and KEYWORD fields combined as field 2.13 of the output header

The SII TXT(X)/TAB(T) field of the input header is used to differentiate between normal textual copy and tabular copy for transmission purposes. When an X is inserted the line endings of output copy can be changed from those input on a terminal by the Message Switching system to suit the maximum line character count set for a particular transmission channel; when a T is inserted the original line endings input on a terminal are maintained on transmission.
The contents of Field 1 of the output header - known as the *Call Directing Code* - are generated using look-up tables in the Message Switching system from whatever address is used.
The Source Identification Field 2.2 of the output header is a parameter set in the Switching system and remains the same for any particular transmission channel - for example, the high speed Provincial Service is HSA, the Fast Results Service is EXT.
The sequence Number field 2.3 is genrated by the Switching system and runs consecutively, reverting to 0001 from 9999.
Field 2.9 is also generated by the Switching system by counting the number of print characters between STX and ETX and dividing by a factor of six.

CODE CONVERSION FOR 5-UNIT TRANSMISSION

8-Unit Octal	Characters	5-Unit Octal	8-Unit Octal	Characters	5-Unit Octal
000	NUL	00	100	LR	-
001	SOH	-	101	A	03l
002	STX	-	102	B	31l
003	ETX	-	103	C	16l
004	EOT	-	104	D	11l
005	ENQ	-	105	E	01l
006	ACK	-	106	F	15l
007	BEL	13f	107	G	32l
010	BS	-	110	H	24l
011	HT	-	111	I	06l
012	*LF*	02e	112	J	13l
013	VT	-	113	K	17l
014	FF	-	114	L	22l
015	*CR*	10e	115	M	34l
016	SO	-	116	N	14l
017	SI	-	117	O	30l
020	DLE	-	120	P	26l
021	DC1	-	121	Q	27l
022	DC2	-	122	R	12l
023	DC3	-	123	S	05l
024	DC4	-	124	T	20l
025	NAK	-	125	U	07l
026	SYN	-	126	V	36l
027	ETB	-	127	W	23l
030	CAN	-	130	X	35l
031	EmSp	04e	131	Y	25l
032	SUB	-	132	Z	21l
033	ESC	-	133	1/8	Note 1
034	*FS*	-	134	¼	Note 1
035	GS	-	135	3/8	Note 1
036	*RS*	-	136	UR	-
037	US	-	137	MINUS	03f
040	Space	04e	140	‘	05f
041	!	32f	141	a	03l
042	ThSp	04e	142	b	31l
043	£	24f	143	c	16l
044	EnSp	04e	144	d	11l
045	%	Note 2	145	e	01l
046	&	Note 3	146	f	15l
047	'	05f	147	g	32l
050	(	17f	150	h	24l
051	)	2f	151	i	06l
052	EmSp	04e	152	j	13l
053	+	21f	153	k	17l
054	.	14f	154	l	22l
055	-	03f	155	m	34l
056	.	34f	156	n	14l
057	/	35f	157	o	30l
060	0	26f	160	p	26l
061	1	27f	161	q	27l
062	2	23f	162	r	12l
063	3	01f	163	s	05l
064	4	12f	164	t	20l
065	5	20f	165	u	07l
066	6	25f	166	v	36l
067	7	07f	167	w	23l
8-Unit Octal	Characters	5-Unit Octal	8-Unit Octal	Characters	5-Unit Octal
070	8	06f	170	x	35l
071	9	30f	171	y	25l
072	:	16f	172	z	21l
073	:	16f	173	½	Note 1
074	QL	-	174	5/8	Note 1
075	QC	-	175	¾	Note 1
076	QR	-	176	7/8	Note 1
077	?	31f	177	DEL	37

Note 1: One-character fractions in 8-unit should be output as three characters preceded by a hyphen, i.e. -1/8.
Note 2: One-character percentage sign should be output as ‘p.c.’
Note 3: One-character ampersand should be output as ‘and’.

Note 4: 5-unit codes with an 'f' should be preceded by a Figure Shift code (octal 33), with an 'l' by a Letter Shift code (octal 37), those with an 'e' can be in either shift.

DATA FORMAT ELECTION NOMINATIONS AND RESULTS SPECIFICATION

The following specification is applicable to General Elections and By Elections, European Parliament Elections, Scottish, Welsh and London Assembly Elections and Northern Ireland Assembly and Northern Ireland European Parliament Elections and will cover the nominations and results of the election. The specification caters for the First Past The Post system used in General Elections and By elections, the Additional Member - First Past The Post and top-up Proportional Representation party list - system for Scottish, Welsh and London Assembly Elections, the Proportional Representation party list system used for European Parliament Elections and the Single Transferable Vote Proportional Representation system used in Northern Ireland Assembly Elections and Northern Ireland European Parliament Elections.

The information will utilise Record and Field separators which are indicated as *RS* and *FS* respectively. Each record will be preceded by *RS nn FS* where nn stands for record number (00 - 07) and will be terminated by *CR LF*. If there is no data for a particular record or the record is not applicable, it will not be present. If a record type is shown all fields, preceded by *FS SPACE FS*, are always present whether they contain data or not.

All Nominations will be transmitted using category code XDA (TTY XTA). Individual General Election and Scottish, Welsh and London Assemblies First Past The Post Results will be transmitted using category code XDB (TTY XTB). Individual Scottish, Welsh and London Assembly Proportional Representation results and individual European Parliament Proportional Representation results will be transmitted using category code XDQ (TTY XTQ). All first past the post collated results will be transmitted using category code XDC (TTY XTC). Scottish, Welsh and London Assembly Proportional Representation collated results and European Parliament Proportional Representation collated results will be category-coded XDR for data format and XTR for TTY. Individual and collated Northern Ireland Assembly and Northern Ireland European Parliament Proportional Representation Results will be transmitted using category code XDP (TTY XTP).

An individual General Election result will carry a catchline of "POLL Result" followed by the Constituency number. Individual constituency results for Scottish, Welsh, London and Northern Ireland Assembly elections will carry a catchline of "POLL Scotland, Wales, London or Ulster", followed by the constituency number. Individual constituency results for European elections will carry the catchline "POLL Europe", followed by the constituency number.

Collated constituency outputs will list a set of constituencies. Collated Nominations will carry a catchline of "ELECTION Nominations Collated" in the case of General Elections, with "ELECTION Scotland Collated", "ELECTION Wales Collated", "ELECTION London Collated" or "ELECTION Ulster Collated" for Assembly Elections and "ELECTION Europe Collated" for European Parliament Elections. Collated Results will carry catchlines of "POLL Results Collated", "POLL Scotland Collated", "POLL Wales Collated", "POLL London Collated", "POLL Ulster Collated" or "POLL Europe Collated". In the case of Scottish, Welsh and London Assembly collated results the Proportional Representation constituencies will be run separately with the first keyword including the word PR, giving catchlines of "POLL Scotland PR Collated", "POLL Wales PR Collated" and
"POLL London PR Collated"

Collated General Election Nominations/results by region are not anticipated to be transmitted. If a decision is made to transmit this material the outputs will contain results within one region, and will carry a keyword that corresponds to one of the twelve regions, as appropriate. (EAST ANGLIA, EAST MIDLANDS, GREATER LONDON, NORTH, NORTHERN IRELAND, NORTH WEST, SCOTLAND, SOUTH EAST, SOUTH WEST, WALES, WEST MIDLANDS, YORKS AND HUMBERSIDE).

In all First Past The Post collation transmissions, each page will carry a maximum of 30 constituencies and will be sequentially paged accordingly. Collated nominations for Scottish, Welsh and London Assembly Proportional Representation Elections will be included on an additional page to those for first past the post. Collated results for Scottish, Welsh and London Assembly Proportional Representation Elections will each run on one separate page. Northern Ireland Proportional Representation Constituencies will be run, for collated results, as individual pages, numbered 1 to 18 (on the number of constituencies as at January 1 2002).

Cont'd...

The outputs will consist of eight record types from Record 00 through Record 07. How many of the eight record types are present will depend on the type of output.

Where a constituency has a boundary change, the previous election results are expressed as notional figures which would have happened had those changes been in force at the last election.

Historic material will only be displayed as far back as the last General, Scottish, Welsh, London, Northern Ireland or European Parliament election.

RECORD 00 contains ten fields showing Constituency details.
Fields one through to eight are applicable to ALL transmissions (Nominations/Results).
Field 1 contains the Constituency number.
Field 2 contains the Constituency name.
Field 3 contains an indication relating to a boundary change, if applicable. This field will contain either the boundary change percentage figure or the indicator "B" where a boundary change is in force and the percentage change is not given.
Field 4 contains the Electorate (the number of people eligible to vote in the election).
Field 5 contains the turnout (the number of people who actually voted in the election).
Field 6 contains the percentage of turnout against the electorate.
Field 7 contains the percentage change in turnout between the election and the last major election. This field will be blank if a boundary change is in force.

Fields eight, nine and ten are ONLY applicable to Northern Ireland Proportional Representation Result outputs.
Field 8 contains the number of valid votes (votes which were not spoilt).
Field 9 contains the quota (the number of votes required for election).
Field 10 contains the sequence number of the current vote count.

RECORD 01 is present ONLY for Scottish and Welsh Proportional Representation nominations and results and European Parliament Proportional Represention nominations and results for the Eastern, East Midlands, North East, North West, South East, South West, West Midlands and Yorkshire and The Humber regional constituencies.
Field 1 contains the names of council areas or parliamentary constituencies included within the regional constituency.

RECORD 02 is ONLY present for all First Past The Post results and Scottish, Welsh and London Assembly Proportional Representation results and European Parliament Proportional Representation results and contains a summary of the election result. The record will consist of eight fields which contain data dependent on whether a boundary change has been indicated in field three in Record 00. Constituencies which are subject to a boundary change will contain notional data, in the fields which indicate "(Notional)", which will only apply to the previous main election.
Field 1 applies to all First Past The Post results and Scottish, Welsh and London Assembly Proportional Representation results and European Parliament Proportional Representation results.
Field 1 contains the majority party's abbreviation.
Fields two and three apply to First Past The Post results ONLY.
Field 2 contains the (Notional) Gain or Hold Indicator.
Field 3 contains the (Notional) losing party.

Fields four through to eight apply to all First Past The Post results and Scottish, Welsh and London Assembly Proportional Representation results and European Parliament Proportional Representation results.
Field 4 contains the majority.
Field 5 contains the majority shown as a percentage of the turnout.
Field 6 contains the (Notional) swing percentage for the constituency.
Field 7 contains the (Notional) Swing To party short name.
Field 8 contains the (Notional) Swing From party short name.

Cont'd...

RECORD 03 contains eleven fields indicating candidate details.
Field 1 contains the winning MP Indicator. This field will be set with an asterisk if the candidate has been elected. This field will be blank in Nomination transmissions.

Fields two through to six are applicable for ALL transmissions (Nominations/Results).
Field 2 contains the pre election MP Indicator, if applicable. This field may contain the following: * indicating a sitting MP for the Constituency. + indicating a sitting MP for another Constituency, to include a sitting MP for the constituency if a boundary change is in force.
Field 3 contains the Candidate's title, if present. e.g. Doctor, Professor Mrs etc.
Field 4 contains the Candidate's forename.
Field 5 contains the Candidate's family name.
Field 6 contains the Candidate's party.

Field seven is applicable to all First Past The Post results and Northern Ireland Assembly Proportional Representation results and Northern Ireland European Parliament Proportional Representation Results only.
Field 7 contains the number of votes cast for the candidate. In a Northern Ireland Assembly or Northern Ireland European Parliament Proportional Representation result, this field will contain the number of votes in the first round of counting.

Fields eight and nine are ONLY applicable to First Past The Post Result outputs.
Field 8 contains the percentage of the turnout figure gained by the candidate.
Field 9 contains the percentage change of the turnout gained by the candidate's party at the last main election. Data in this field, if present, will be preceded by a + (plus) or - (minus) indication. This field will be empty if there has been no measurable (two decimal points) change in this data. Field 9 Will NOT contain data when: 1. The Candidate's party did not contest the Constituency in the previous election. 2. The boundary change indication is present in Record 00.

Fields ten and eleven are ONLY applicable to Northern Ireland Proportional Representation Result outputs.
Field 10 contains an indication (S) denoting whether the surplus for an elected candidate or (D) the votes for an eliminated candidate were re-distributed to those candidates still involved in the count. If field 10 contains an indicator, **Field 11** will contain a count sequence number which will indicate which count the surplus for an elected candidate or the votes for an eliminated candidate were distributed to those candidates still involved in the count.

RECORD 04 is ONLY be present for Northern Ireland Assembly and Northern Ireland European Parliament Proportional Representation Result transmissions and contains vote sequence and votes attained by the preceding Record 03 Proportional Representation result candidate. The record consists of four fields.
Field 1 contains the sequence number of the vote count.
Field 2 contains the number of additional votes cast for the candidate in the current count.
Field 3 contains the total number of votes achieved for the candidate at the end of the current round.
Field 4 contains an indication as to whether candidate has been elected (*) or eliminated (-) in current count. This record is repeated for all counts in which the candidate is still participating.

RECORD 05 is NOT present for all First Past The Post result transmissions. It contains accumulative first or only count party votes and percentages information. The record consists of four fields.
Field 1 contains the party name.
Field 2 contains the accumulative total first or only count votes achieved by the party.
Field 3 contains the percentage of the turnout figure gained by the accumulative first or only count votes of the party.
Field 4 contains the percentage change of the turnout gained by the party at the last election, whichever is the latest. For a boundary change seat this percentage is notional against the party in the last election.
In Northern Ireland elections this record will be only be unchanged after the first count.

Cont'd...

RECORD types 06 and 07 will be repeated for all previous elections including By elections, if applicable. If a boundary change is in force for the current election, these records will only reflect the previous relevant major election in notional terms.

RECORD 06 contains the last Election details. The record will be present for the last relevant major election and will be repeated for all By elections that have been held in the constituency, if applicable. The record will displayed in the order of last relevant main election details first, followed by the By election material in date order, with the latest by election appearing last.
The record contains eight fields which contain data dependent on whether a boundary change has been indicated in field three in Record 00. Constituencies which are subject to a boundary change will contain notional data, in the fields which indicate "(Notional)", which will only apply to the previous relevant main election.

Fields one, two and three are applicable to ALL transmissions (Nominations/Results).
Field 1 contains an indicator to indicate whether the last election details were for a General Election (G), a By-Election (B), a Scottish Parliament Election (S), a Welsh Assembly Election (W), a London Assembly Election (L), a Northern Ireland Assembly Election (N), a European Election and Northern Ireland European Election (E).
Field 2 contains the previous Election month indicator. This field will be blank when a boundary change is in force.
Field 3 contains the previous Election year indicator.

Fields four, five and six are NOT applicable to Northern Ireland Assembly Proportional Representation nominations and results and Northern Ireland European Parliament Proportional Representation nominations and results.
Field 4 contains the last election (Notional) majority party short name.
Field 5 contains the last Election (Notional) majority party majority.
Field 6 contains the last Election (Notional) percentage figure of the majority against the turnout.

Fields seven and eight are applicable to ALL transmissions (Nominations/Results)
Field 7 contains the last Election turnout figure.
Field 8 contains the last Election (Notional) percentage figure of turnout against the electorate. These fields may be blank where a boundary change is in force.

RECORD 07 contains the last Election Candidates/Party details, for the previous Record 06. This record will be repeated for all Candidates/Parties, in descending vote order. Where the result is for a Northern Ireland Assembly or Northern Ireland European Parliament Proportional Representation election the record will be repeated for all Candidates/Party, in descending first count vote order. Constituencies which are subject to a boundary change will contain notional data, in the fields which indicate "(Notional)", which will only apply to the previous election. The record consists of five fields.
Fields one and two apply only to First Past The Post and Northern Ireland Assembly and Northern Ireland European Election Proportional Representation nominations.
Field 1 contains an elected MP indicator (*) if applicable.
Field 2 contains the Candidate's family name.
Field 1 and field 2 will be blank for ALL transmissions (Nominations/Results) when a boundary change is in force.

Fields three and four apply to ALL transmissions (nominations/results).
Field 3 contains the Party.
Field 4 contains the Candidate's/Party's (Notional) vote figure - first count vote figure in a Northern Ireland Assembly or Northern Ireland European Parliament Proportional Representation election.
Field 5 contains the percentage of the (Notional) turnout figure gained by the Candidate/Party. This field will be empty in a Northern Ireland Assembly or Northern Ireland European Parliament Proportional Representation result.

Cont'd...

The following list defines the data types of fields within the eight record types.

RECORD 00 : CONSTITUENCY DETAILS

Field 1	Numeric	Preceded by *RS 00 FS*
Field 2	Text	Preceded by *FS SPACE FS*
Field 3	Text	Preceded by *FS SPACE FS*
Field 4	Text	Preceded by *FS SPACE FS*
Field 5	Text	Preceded by *FS SPACE FS*
Field 6	Text	Preceded by *FS SPACE FS*
Field 7	Text	Preceded by *FS SPACE FS*
Field 8	Text	Preceded by *FS SPACE FS*
Field 9	Text	Preceded by *FS SPACE FS*
Field 10	Numeric	Preceded by *FS SPACE FS*, terminated by *CR LF*

RECORD 01 : PARLIAMENTARY CONSTITUENCIES

Field 1	Text	Preceded by *RS 01 FS*, terminated by *CR LF*

RECORD 02 : ELECTION RESULT SUMMARY

Field 1	Text	Preceded by *RS 02 FS*
Field 2	Text	Preceded by *FS SPACE FS*
Field 3	Text	Preceded by *FS SPACE FS*
Field 4	Text	Preceded by *FS SPACE FS*
Field 5	Text	Preceded by *FS SPACE FS*
Field 6	Text	Preceded by *FS SPACE FS*
Field 7	Text	Preceded by *FS SPACE FS*
Field 8	Text	Preceded by *FS SPACE FS*, terminated by *CR LF*

RECORD 03 : CANDIDATE'S DETAILS

Field 1	Text	Preceded by *RS 03 FS*
Field 2	Text	Preceded by *FS SPACE FS*
Field 3	Text	Preceded by *FS SPACE FS*
Field 4	Text	Preceded by *FS SPACE FS*
Field 5	Text	Preceded by *FS SPACE FS*
Field 6	Text	Preceded by *FS SPACE FS*
Field 7	Text	Preceded by *FS SPACE FS*
Field 8	Text	Preceded by *FS SPACE FS*
Field 9	Text	Preceded by *FS SPACE FS*
Field 10	Text	Preceded by *FS SPACE FS*
Field 11	Numeric	Preceded by *FS SPACE FS*, terminated by *CR LF*

RECORD 04 : CANDIDATE'S DETAILS COUNT (PR RECOUNT) DETAILS

Field 1	Numeric	Preceded by *RS 04 FS*
Field 2	Text	Preceded by *FS SPACE FS*
Field 3	Text	Preceded by *FS SPACE FS*
Field 4	Text	Preceded by *FS SPACE FS*, terminated by *CR LF*

RECORD 05 : PR ACCUMULATIVE PARTY VOTES AND PERCENTAGES

Field 1	Text	Preceded by *RS 05 FS*
Field 2	Text	Preceded by *FS SPACE FS*
Field 3	Text	Preceded by *FS SPACE FS*
Field 4	Text	Preceded by *FS SPACE FS*, terminated by *CR LF*

RECORD 06 : LAST ELECTION'S INFORMATION

Field 1	Text	Preceded by *RS 06 FS*
Field 2	Text	Preceded by *FS SPACE FS*
Field 3	Numeric	Preceded by *FS SPACE FS*
Field 4	Text	Preceded by *FS SPACE FS*
Field 5	Text	Preceded by *FS SPACE FS*
Field 6	Text	Preceded by *FS SPACE FS*
Field 7	Text	Preceded by *FS SPACE FS*
Field 8	Text	Preceded by *FS SPACE FS*, terminated by *CR LF*

RECORD 07 : LAST ELECTION PARTY VOTING DETAILS

Field 1	Text	Preceded by *RS 07 FS*
Field 2	Text	Preceded by *FS SPACE FS*
Field 3	Text	Preceded by *FS SPACE FS*
Field 4	Text	Preceded by *FS SPACE FS*
Field 5	Text	Preceded by *FS SPACE FS*, terminated by *CR LF*

The following list defines the logical content of fields within the eight Record types. An asterisk will indicate which field is utilised in which transmission type. Where a record is present, fields with no asterisks will be present but empty. Records with no fields used (e.g. Record 02 in nomination outputs) will not be transmitted.

Transmission type headings key : Noms - Nomination outputs, FPTP - First Past The Post result outputs, NIPR – Northern Ireland Proportional Representation result outputs, SWLEPR – Scottish/Welsh/London/Europe proportional representation results outputs.

Field	Type	Content	Noms	FPTP	NIPR	SWLEPR
Record 00: CONSTITUENCY DETAILS						
Field 1	Numeric	Constituency Number	*	*	*	*
Field 2	Text	Constituency name	*	*	*	*
Field 3	Numeric	% Boundary change	*	*	*	*
Field 4	Text	Electorate	*	*	*	*
Field 5	Text	Turnout		*	*	*
Field 6	Text	% Turnout		*	*	*
Field 7	Text	% Change Turnout		*	*	*
Field 8	Text	Valid Votes			*	
Field 9	Text	Quota			*	
Field 10	Numeric	Vote count sequence number			*	
Record 01: PARLIAMENTARY CONSTITUENCIES						
Field 1	Text	Party Constituencies	*			*
Record 02: ELECTION RESULT SUMMARY						
Field 1	Text	Majority Party		*		*
Field 2	Text	Gain/Hold Ind		*		
Field 3	Text	Losing Party		*		
Field 4	Text	Majority		*		*
Field 5	Text	% Majority		*		*
Field 6	Text	Swing		*		*
Field 7	Text	Swing To Party		*		*
Field 8	Text	Swing From Party		*		*
Record 03: CANDIDATE'S DETAILS						
Field 1	Text	Elected MP Indicator		*	*	*
Field 2	Text	Pre-elect MP Indicator	*	*	*	*
Field 3	Text	Candidate title	*	*	*	*
Field 4	Text	Candidate forename	*	*	*	*
Field 5	Text	Candidate family name	*	*	*	*
Field 6	Text	Party	*	*	*	*
Field 7	Text	Votes		*	*	
Field 8	Text	Turnout % of		*		
Field 9	Text	Gain/Loss % prev elect		*		
Field 10	Text	Redistribution indicator			*	
Field 11	Numeric	Vote count sequence number			*	
Record 04: CANDIDATE'S DETAILS COUNT (PR COUNT) DETAILS						
Field 1	Numeric	Vote court sequence number			*	
Field 2	Text	Current count votes for Candidate			*	
Field 3	Text	Total votes for Candidate			*	
Field 4	Text	Elected/Eliminated indicator			*	
Record 05: PR ACCUMULATIVE PARTY VOTES AND PERCENTAGES						
Field 1	Text	Party Name			*	*
Field 2	Text	Total votes for party			*	*
Field 3	Text	Turnout % current election			*	*
Field 4	Text	Gain/Loss % prev elect			*	*
Field	Type	Content	Noms	FPTP	NIPR	SWLEPR
Record 06: LAST ELECTION'S INFORMATION						
Field 1	Text	Election Indicator	*	*	*	*
Field 2	Text	Election Month	*	*	*	*
Field 3	Numeric	Election Year	*	*	*	*
Field 4	Text	Party Name	*	*		*
Field 5	Text	Majority	*	*		*
Field 6	Text	Majority %	*	*		*
Field 7	Text	Turnout	*	*	*	*
Field 8	Text	% Turnout	*	*	*	*
Record 07: LAST ELECTION PARTY VOTING DETAILS						
Field 1	Text	Elected MP Indicator			*	
Field 2	Text	Candidate name	*	*	*	

Field 3	Text	Party name	*	*	*	*
Field 4	Text	Votes	*	*	*	*
Field 5	Text	% of turnout	*	*		*

NOMINATIONS OUTPUT EXAMPLES

Data Format Nominations will be transmitted using category code XDA
TTY Nominations will be transmitted using category code XTA

NOTE: In TTY outputs Candidate details an asterisk displayed preceding the Candidate details will denote the previous MP for that Constituency. Where an existing MP is standing in a different Constituency or where a boundary change is in force the candidate will be indicated as "+".
NOTE: In TTY outputs last election details the month will NOT be displayed and the type of election indicator will NOT be displayed.

The following General Election examples are for test purposes only and do not reflect accurate figures. This format is applicable to all election types. The main difference for proportional representation elements is that there will often be more than one candidate for the same party.

General Election NOMINATION Data Format Output Example (as part of a collated story):
HSA1234 3 XDA 132 PA RUSHFULL
ELECTION Nominations Collated
*rs*00*fs*112*fs fs*CAMBRIDGE*fs fsfs fs*69,022*fs fsfs fsfs fsfs fsfs fsfs fs*
*rs*03*fsfs fs+fs fsfs fs*Mark*fs fs*Bishop*fs fs*C*fs fsfs fsfs fsfs fsfs fs*
*rs*03*fsfs fsfs fs*Ms*fs fs*Anne*fs fs*Campbell*fs fs*Lab*fs fsfs fsfs fsfs fsfs fs*
*rs*03*fsfs fsfs fsfs fs*David*fs fs*Howarth*fs fs*LD*fs fsfs fsfs fsfs fsfs fs*
*rs*03*fsfs fsfs fsfs fs*Tim*fs fs*Cooper*fs fs*Green*fs fsfs fsfs fsfs fsfs fs*
*rs*03*fsfs fsfs fsfs fs*Dick*fs fs*Brettell-Winnington*fs fs*Loony*fs fsfs fsfs fsfs fsfs fs*
*rs*03*fsfs fsfs fsfs fs*Roger*fs fs*Chalmers*fs fs*NLP*fs fsfs fsfs fsfs fsfs fs*
*rs*06*fs*G*fs fs*May*fs fs*1987*fs fs*C*fs fs*5,060*fs fs*9.35*fs fs*54,104*fs fs*77.87
*rs*07*fsfs fs*Rhodes James*fs fs*C*fs fs*21,624*fs fs*39.97
*rs*07*fsfs fs*Williams*fs fs*LD*fs fs*16,564*fs fs*30.62
*rs*07*fsfs fs*Howard*fs fs*Lab*fs fs*15,319*fs fs*28.31
*rs*07*fsfs fs*Wright*fs fs*Green*fs fs*597*fs fs*1.10
General Election NOMINATION TTY Output Example (as part of a collated story):
HSA1234 3 XTA 132 PA RUSHFULL
ELECTION Nominations Collated
112 CAMBRIDGE
+ Mark Bishop (C)
Ms Anne Campbell (Lab)
David Howarth (LD)
Tim Cooper (Green)
Dick Brettell Winnington (Loony)
Roger Chalmers (NLP)
Electorate 69,022
1987: C maj 5,060 (9.35%) - Turnout 54,104 (77.87%)
Rhodes James (C) 21,624 (39.97%); Williams (LD) 16,564 (30.62%); Howard (Lab) 15,319 (28.31%); Wright (Green) 597 (1.10%)
General Election NOMINATION Data Format Output Example with Boundary change (as part of a collated story):
HSA1234 3 XDA 132 PA RUSHFULL
ELECTION Nomination Collated
*rs*00*fs*112*fs fs*CAMBRIDGE*fs fs*22*fs fs*69,022*fs fsfs fsfs fsfs fsfs fsfs fs*
*rs*03*fsfs fs+fs fsfs fs*Mark*fs fs*Bishop*fs fs*C*fs fsfs fsfs fsfs fsfs fs*
*rs*03*fsfs fsfs fs*Ms*fs fs*Anne*fs fs*Campbell*fs fs*Lab*fs fsfs fsfs fsfs fsfs fs*
*rs*03*fsfs fsfs fsfs fs*David*fs fs*Howarth*fs fs*LD*fs fsfs fsfs fsfs fsfs fs*
*rs*03*fsfs fsfs fsfs fs*Tim*fs fs*Cooper*fs fs*Green*fs fsfs fsfs fsfs fsfs fs*
*rs*03*fsfs fsfs fsfs fs*Dick*fs fs*Brettell Winnington*fs fs*Loony*fs fsfs fsfs fsfs fsfs fs*
*rs*03*fsfs fsfs fsfs fs*Roger*fs fs*Chalmers*fs fs*NLP*fs fsfs fsfs fsfs fsfs fs*
*rs*06*fs*G*fs fsfs fs*1987*fs fs*C*fs fs*5,060*fs fs*9.35*fs fsfs fs*77.87
*rs*07*fsfs fsfs fs*C*fs fs*21,624*fs fs*39.97
*rs*07*fsfs fsfs fs*LD*fs fs*16,564*fs fs*30.62
*rs*07*fsfs fsfs fs*Lab*fs fs*15,319*fs fs*28.31
*rs*07*fsfs fsfs fs*Green*fs fs*597*fs fs*1.10
General Election NOMINATION TTY Output Example with Boundary change:
HSA1234 3 XTA 132 PA RUSHFULL
ELECTION Nomination Collated
112 CAMBRIDGE
+ Mark Bishop (C)
Ms Anne Campbell (Lab)
David Howarth (LD)
Tim Cooper (Green)
Dick Brettell Winnington (Loony)
Roger Chalmers (NLP)
Electorate 69,022
22% boundary change
1987 notional: C maj 5,060 (9.35%) - Turnout 77.87%.
C 21,624 (39.97%); LD 16,564 (30.62%); Lab 15,319 (28.31%); Green 597 (1.10%)

FIRST PAST THE POST RESULTS OUTPUT EXAMPLES

Individual Data Format First Past The Post Results will be transmitted using category code XDB
Individual TTY First Past The Post Results will be transmitted using category code XTB
Collated Data Format First Past The Post Results will be transmitted using category code XDC
Collated TTY First Past The Post Results will be transmitted using category code XTC

NOTE: In TTY outputs Candidate details an asterisk displayed preceding the Candidate details will denote the previous MP for that Constituency. Where an existing MP is standing in a different Constituency or where a boundary change is in force the candidate will be indicated as "+". Candidates are displayed in vote order with the winning candidate shown as the leading candidate.

NOTE: In TTY outputs last election details the month will NOT be displayed and the type of election indicator will NOT be displayed.

The following General Election examples, which have the same formats as Scottish, Welsh and London Assemblies First Past The Post results, are for test purposes only and do not reflect accurate figures. This format is applicable to all first past the post results.

General Election FPTP RESULT Data Format Output Example:

HSA1234 3 XDB 132 PA RUSHFULL
POLL Result 112
*rs*00*fs*112*fs fs*CAMBRIDGE*fs fsfs fs*69,022*fs fs*50,513*fs fs*73.18*fs fs* 4.69*fs fsfs fsfs fs*
*rs*02*fs*Lab*fs fs*gain*fs fs*C*fs fs*580*fs fs*1.15*fs fs*6.40*fs fs*Lab*fs fs*C
*rs*03*fs***fs fsfs fs*Ms*fs fs*Anne*fs fs*Cambell*fs fs*Lab*fs fs*20,039*fs fs*39.67*fs fs*+11.36*fs fsfs fs*
*rs*03*fsfs fs*+*fs fsfs fs*Mark*fs fs*Bishop*fs fs*C*fs fs*19,459*fs fs*38.52*fs fs*-1.45*fs fsfs fs*
*rs*03*fsfs fsfs fsfs fs*David*fs fs*Howarth*fs fs*LD*fs fs*10,037*fs fs*19.87*fs fs*-10.75*fs fsfs fs*
*rs*03*fsfs fsfs fsfs fs*Tim*fs fs*Cooper*fs fs*Green*fs fs*720*fs fs*1.42*fs fs*+0.32*fs fsfs fs*
*rs*03*fsfs fsfs fsfs fs*Dick*fs fs*Brettell Winnington*fs fs*Loony*fs fs*175*fs fs*0.35*fs fsfs fsfs fs*
*rs*03*fsfs fsfs fsfs fs*Roger*fs fs*Chalmers*fs fs*NLP*fs fs*83*fs fs*0.16*fs fsfs fsfs fs*
*rs*06*fs*G*fs fs*May*fs fs*1987*fs fs*C*fs fs*5.060*fs fs*9.35*fs fs*54,104*fs fs*77.87
*rs*07*fsfs fs*Rhodes James*fs fs*C*fs fs*21,624*fs fs*39.97
*rs*07*fsfs fs*Williams*fs fs*LD*fs fs*16,564*fs fs*30.62
*rs*07*fsfs fs*Howard*fs fs*Lab*fs fs*15,319*fs fs*28.31
*rs*07*fsfs fs*Wright*fs fs*Green*fs fs*597*fs fs*1.10

General Election FPTP RESULT TTY Output Example:

HSA1234 3 XTB 132 PA RUSHFULL
POLL Result 112
112 CAMBRIDGE
Lab gain from C
Ms Anne Campbell (Lab) 20,039 (39.67%, +11.36%)
+ Mark Bishop (C) 19,459 (38.52%, -1.45%)
David Howarth (LD) 10,037 (19.87%, -10.75%)
Tim Cooper (Green) 720 (1.42%, +0.32%)
Dick Brettell Winnington (Loony) 175 (0.35%)
Roger Chalmers (NLP) 83 (0.16%)
Lab maj 580 (1.15%)
6.40% swing C to Lab
Electorate 69,022; Turnout 50,513 (73.18%, -4.69%)
1987: C maj 5,060 (9.35%) - Turnout 54,104 (77.87%)
Rhodes James (C) 21,624 (39.97%); Williams (LD) 16,564 (30.62%); Howard (Lab) 15,319 (28.31%); Wright (Green) 597 (1.10%)

General Election FPTP RESULT Data Format Output Example with Boundary change:

HSA1234 3 XDB 132 PA RUSHFULL
POLL Result 112
*rs*00*fs*112*fs fs*CAMBRIDGE*fs fs22fs fs*69,022*fs fs*50,513*fs fs*73.18*fs fsfs fsfs fsfs fs*
*rs*02*fs*Lab*fs fs*gain*fs fs*C*fs fs*580*fs fs*1.15*fs fs*6.40*fs fs*Lab*fs fs*C
*rs*03*fs*fs fsfs fs*Ms*fs fs*Anne*fs fs*Campbell*fs fs*Lab*fs fs*20,039*fs fs*39.67*fs fsfs fsfs fs*
*rs*03*fsfs fs+fs fs*Mark*fs fs*Bishop*fs fs*C*fs fs*19,459*fs fs*38.52*fs fsfs fsfs fs*
*rs*03*fsfs fsfs fsfs fs*David*fs fs*Howarth*fs fs*LD*fs fs*10,037*fs fs*19.87*fs fsfs fsfs fs*
*rs*03*fsfs fsfs fsfs fs*Tim*fs fs*Cooper*fs fs*Green*fs fs*720*fs fs*l.42*fs fsfs fsfs fs*
*rs*03*fsfs fsfs fsfs fs*Dick*fs fs*Brettel Winnington*fs fs*Loony*fs fs*175*fs fs*0.35*fs fsfs fsfs fs*
*rs*03*fsfs fsfs fsfs fs*Roger*fs fs*Chalmers*fs fs*NLP*fs fs*83*fs fs*0.16*fs fsfs fsfs fs*
*rs*06*fs*G*fs fsfs fs*1987*fs fs*C*fs fs*5,060*fs fs*9.35*fs fsfs fs*77.87
*rs*07*fsfs fsfs fs*C*fs fs*21,624*fs fs*39.97
*rs*07*fsfs fsfs fs*LD*fs fs*16,564*fs fs*30.62
*rs*07*fsfs fsfs fs*Lab*fs fs*15,319*fs fs*28.31
*rs*07*fsfs fsfs fs*Green*fs fs*597*fs fs*1.10

General Election FPTP RESULT TTY Output Example with Boundary change:

HSA1234 3 XTB 132 PA RUSHFULL
POLL Result 112
112 CAMBRIDGE
Lab win - notional Lab gain from C
Ms Anne Campbell (Lab) 20,039 (39.67%)
+ Mark Bishop (C) 19,459 (38.52%)
David Howarth (LD) 10,037 (19.87%)
Tim Cooper (Green) 720 (1.42%)
Dick Brettell Winnington (Loony) 175 (0.35%)
Roger Chalmers (NLP) 83 (0.16%)
Lab maj 580 (1.15%)
22% boundary change
Notional 6.40% swing C to Lab
Electorate 69,022; Turnout 50,513 (73.18%)
1987 notional: C maj 5,060 (9.35%) - Turnout 77.87%; C 21,624 (39.97%);
LD 16,564 (30.62%); Lab 15,319 (28.31%); Green 597 (1.10%)

NORTHERN IRELAND PROPORTIONAL REPRESENTATION RESULTS OUTPUT EXAMPLES

Data Format Proportional Representation Results will be transmitted using category code XDP

TTY Proportional Representation Results will be transmitted using category code XTP

NOTE: In TTY outputs candidate details an asterisk displayed preceding the Candidate details will denote the previous MP. Where an existing MP is standing in a different Constituency or where a boundary change is in force the candidate will be indicated as "+". Candidates are displayed in vote order for each count.

NOTE: In TTY outputs last election details the month will not be displayed and the type of election indicator will NOT be displayed.

The following Northern Ireland Assembly PR examples, which have the same formats as for Northern Ireland European Parliament results, are for test purposes only and do not reflect accurate data.

Note: Following each count, a transmission of the Data Format output will be made. In all cases, details of ALL candidates and ALL counts will be repeated.

Northern Ireland Assembly PR Data Format First Count Output Example.

*rs*00*fs*17*fs fs*ULSTER MID*fs fsfs fs*61,390*fs fs*45,951*fs fs*74.85*fs fs*-10.53*fs fs*45,951*fs fs*6,565*fs fs*1
*rs*03*fs***fs fsfs fsfs fs*Oliver*fs fs*Giles*fs fs*DUP*fs fs*8,015*fs fsfs fsfs fsfs fs*
*rs*03*fs***fs fsfs fsfs fs*Pete*fs fs*Donald*fs fs*SF*fs fs*7,027*fs fsfs fsfs fsfs fs*
*rs*03*fsfs fsfs fsfs fs*John*fs fs*Barnes*fs fs*SDLP*fs fs*6,495*fs fsfs fsfs fsfs fs*
*rs*03*fsfs fsfs fsfs fs*Barney*fs fs*Macdonald*fs fs*SF*fs fs*4,963*fs fsfs fsfs fsfs fs*
*rs*03*fsfs fsfs fsfs fs*David*fs fs*Hudson*fs fs*UUP*fs fs*4,622*fs fsfs fsfs fsfs fs*
*rs*03*fsfs fsfs fsfs fs*Sam*fs fs*Dean*fs fs*SF*fs fs*3,676*fs fsfs fsfs fsfs fs*
*rs*03*fs***fs fsfs fsfs fs*Edward*fs fs*Mills*fs fs*SDLP*fs fs*3,548*fs fsfs fsfs fsfs fs*
*rs*03*fsfs fsfs fsfs fs*Andrew*fs fs*Panner*fs fs*UUP*fs fs*2,615*fs fsfs fsfs fsfs fs*
*rs*03*fsfs fsfs fsfs fs*Paul*fs fs*Donner*fs fs*SDLP*fs fs*1,772*fs fsfs fsfs fsfs fs*
*rs*03*fsfs fsfs fsfs fs*Pat*fs fs*Mowen*fs fs*Ind Comm*fs fs*1,269*fs fsfs fsfs fsfs fs*
*rs*03*fsfs fsfs fs*Mrs*fs fs*Anna*fs fs*Greening*fs fs*Alliance*fs fs*1,011*fs fsfs fsfs fsfs fs*
*rs*03*fsfs fsfs fsfs fs*James*fs fs*Miles*fs fs*Soc*fs fs*570*fs fsfs fsfs fsfs fs*
*rs*03*fsfs fsfs fsfs fs*Len*fs fs*Kames*fs fs*CECC*fs fs*171*fs fsfs fsfs fsfs fs*
*rs*03*fsfs fsfs fsfs fs*Terry*fs fs*Old*fs fs*WP*fs fs*157*fs fsfs fsfs fsfs fs*
*rs*03*fsfs fsfs fsfs fs*Ray*fs fs*Jameson*fs fs*NLP*fs fs*40*fs fsfs fsfs fsfs fs*
*rs*05*fs*SF*fs fs*15,666*fs fs*34.09*fs fs*-6.68
*rs*05*fs*SDLP*fs fs*11,815*fs fs*25.71*fs fs*+3.47
*rs*05*fs*DUP*fs fs*8,015*fs fs*17.44*fs fs*-3.94
*rs*05*fs*UUP*fs fs*7,237*fs fs*15.75*fs fs*+1.82
*rs*05*fs*Ind Comm*fs fs*1,269*fs fs*2.76*fs fs*
*rs*05*fs*Alliance*fs fs*1,011*fs fs*2.20*fs fs*+1.20
*rs*05*fs*Soc*fs fs*570*fs fs*1.24*fs fs*+1.06
*rs*05*fs*CECC*fs fs*171*fs fs*0.37*fs fs*
*rs*05*fs*WP*fs fs*157*fs fs*0.34*fs fs*-0.08
*rs*05*fs*NLP*fs fs*40*fs fs*0.09*fs fs*+0.01
*rs*06*fs*N*fs fs*June*fs fs*1998*fs fsfs fsfs fsfs fs*51,223*fs fs*85.38
*rs*07*fs***fs fs*McCrea*fs fs*DUP*fs fs*10,339*fs fs*
*rs*07*fs***fs fs*McGuinness*fs fs*SF*fs fs*8,703*fs fs*
*rs*07*fs***fs fs*Haughey*fs fs*SDLP*fs fs*6,410*fs fs*
*rs*07*fs***fs fs*Molloy*fs fs*SF*fs fs*6,008*fs fs*
*rs*07*fs***fs fs*Kelly*fs fs*SF*fs fs*5,594*fs fs*
*rs*07*fsfs fs*McGlone*fs fs*SDLP*fs fs*4,666*fs fs*
*rs*07*fs***fs fs*Armstrong*fs fs*UUP*fs fs*4,498*fs fs*
*rs*07*fsfs fs*Junkin*fs fs*UUP*fs fs*2,440*fs fs*
*rs*07*fsfs fs*Boyle*fs fs*Alliance*fs fs*497*fs fs*
*rs*07*fsfs fs*McLean*fs fs*DUP*fs fs*307*fs fs*
*rs*07*fsfs fs*Donnelly*fs fs*WP*fs fs*207*fs fs*
*rs*07*fsfs fs*Hutchinson*fs fs*Soc*fs fs*91*fs fs*
*rs*07*fsfs fs*Daly*fs fs*NLP*fs fs*38*fs fs*

Northern Ireland Assembly PR Data Format Final Count Output Example.

HSA1234 3 XDP 567 PA RUSHFULL POLL Result 17
*rs*00*fs*17*fs fs*ULSTER MID*fs fsfs fs*61,390*fs fs*45,951*fs fs*74.85*fs fs*-10.53*fs fs*45,951*fs fs*6,565*fs fs*10
*rs*03*fs***fs fsfs fsfs fs*Oliver*fs fs*Giles*fs fs*DUP*fs fs*8,015*fs fsfs fsfs fs*S*fs fs*2
*rs*03*fs***fs fsfs fsfs fs*Pete*fs fs*Donald*fs fs*SF*fs fs*7,027*fs fsfs fsfs fs*S*fs fs*3
*rs*03*fs***fs fsfs fsfs fs*John*fs fs*Barnes*fs fs*SDLP*fs fs*6,495*fs fsfs fsfs fsfs fs*

*rs*04*fs*2*fs* *fs*4*fs* *fs*6,499*fs* *fs*
*rs*04*fs*3*fs* *fs*13*fs* *fs*6,512*fs* *fs*
*rs*04*fs*4*fs* *fs*193*fs* *fs*6,705*fs* *fs**
*rs*03*fs**fs* *fsfs* *fsfs* *fs*Barney*fs* *fs*Macdonald*fs* *fs*SF*fs* *fs*4,963*fs* *fsfs* *fsfs* *fsfs* *fs*
*rs*04*fs*2*fs* *fs*1*fs* *fs*4,964*fs* *fs*
*rs*04*fs*3*fs* *fs*312*fs* *fs*5,276*fs* *fs*
*rs*04*fs*4*fs* *fs*110*fs* *fs*5,386*fs* *fs*
*rs*04*fs*5*fs* *fs*30*fs* *fs*5,416*fs* *fs*
*rs*04*fs*6*fs* *fs*249*fs* *fs*5,665*fs* *fs*
*rs*04*fs*7*fs* *fs*324*fs* *fs*5,989*fs* *fs*
*rs*04*fs*8*fs* *fs*4*fs* *fs*5,993*fs* *fs*
*rs*04*fs*9*fs* *fs*0*fs* *fs*5,993*fs* *fs**
*rs*03*fs**fs* *fsfs* *fsfs* *fs*David*fs* *fs*Hudson*fs* *fs*UUP*fs* *fs*4,622*fs* *fsfs* *fsfs* *fs*S*fs* *fs*9
*rs*04*fs*2*fs* *fs*897*fs* *fs*5,519*fs* *fs*
*rs*04*fs*3*fs* *fs*0*fs* *fs*5,519*fs* *fs*
*rs*04*fs*4*fs* *fs*34*fs* *fs*5,553*fs* *fs*
*rs*04*fs*5*fs* *fs*217*fs* *fs*5,770*fs* *fs*
*rs*04*fs*6*fs* *fs*113*fs* *fs*5,883*fs* *fs*
*rs*04*fs*7*fs* *fs*38*fs* *fs*5,921*fs* *fs*
*rs*04*fs*8*fs* *fs*2,525*fs* *fs*8,446*fs* *fs**
*rs*03*fsfs* *fsfs* *fsfs* *fs*Sam*fs* *fs*Dean*fs* *fs*SF*fs* *fs*3,676*fs* *fsfs* *fsfs* *fsfs* *fs*
*rs*04*fs*2*fs* *fs*0*fs* *fs*3,676*fs* *fs*
*rs*04*fs*3*fs* *fs*72*fs* *fs*3,748*fs* *fs*
*rs*04*fs*4*fs* *fs*58*fs* *fs*3,806*fs* *fs*
*rs*04*fs*5*fs* *fs*31*fs* *fs*3,837*fs* *fs*
*rs*04*fs*6*fs* *fs*101*fs* *fs*3,938*fs* *fs*
*rs*04*fs*7*fs* *fs*135*fs* *fs*4,073*fs* *fs*
*rs*04*fs*8*fs* *fs*5*fs* *fs*4,078*fs* *fs*
*rs*04*fs*9*fs* *fs*1*fs* *fs*4,079*fs* *fs-*
*rs*03*fs**fs* *fsfs* *fsfs* *fs*Edward*fs* *fs*Mills*fs* *fs*SDLP*fs* *fs*3,548*fs* *fsfs* *fsfs* *fsfs* *fs*
*rs*04*fs*2*fs* *fs*1*fs* *fs*3,549*fs* *fs*
*rs*04*fs*3*fs* *fs*5*fs* *fs*3,554*fs* *fs*
*rs*04*fs*4*fs* *fs*91*fs* *fs*3,645*fs* *fs*
*rs*04*fs*5*fs* *fs*99*fs* *fs*3,744*fs* *fs*
*rs*04*fs*6*fs* *fs*267*fs* *fs*4,011*fs* *fs*
*rs*04*fs*7*fs* *fs*1,612*fs* *fs*5,623*fs* *fs*
*rs*04*fs*8*fs* *fs*168*fs* *fs*5,791*fs* *fs*
*rs*04*fs*9*fs* *fs*1*fs* *fs*5,792*fs* *fs**
*rs*03*fsfs* *fsfs* *fsfs* *fs*Andrew*fs* *fs*Panner*fs* *fs*UUP*fs* *fs*2,615*fs* *fsfs* *fsfs* *fs*D*fs* *fs*8
*rs*04*fs*2*fs* *fs*440*fs* *fs*3,055*fs* *fs*
*rs*04*fs*3*fs* *fs*0*fs* *fs*3,055*fs* *fs*
*rs*04*fs*4*fs* *fs*58*fs* *fs*3,113*fs* *fs*
*rs*04*fs*5*fs* *fs*157*fs* *fs*3,270*fs* *fs*
*rs*04*fs*6*fs* *fs*87*fs* *fs*3,357*fs* *fs*
*rs*04*fs*7*fs* *fs*15*fs* *fs*3,372*fs* *fs-*
*rs*03*fsfs* *fsfs* *fsfs* *fs*Paul*fs* *fs*Donner*fs* *fs*SDLP*fs* *fs*1,772*fs* *fsfs* *fsfs* *fsfs* *fs*D*fs* *fs*7
*rs*04*fs*2*fs* *fs*2*fs* *fs*1,774*fs* *fs*
*rs*04*fs*3*fs* *fs*4*fs* *fs*1,778*fs* *fs*
*rs*04*fs*4*fs* *fs*59*fs* *fs*1,837*fs* *fs*
*rs*04*fs*5*fs* *fs*173*fs* *fs*2,010*fs* *fs*
*rs*04*fs*6*fs* *fs*452*fs* *fs*2,462*fs* *fs-*

Cont’d...

rs03fsfs fsfs fsfs fsPatfs fsMowenfs fsInd Commfs fs1,269fs fsfs fsfs fsDfs fs6
rs04fs2fs fs32fs fs1,301fs fs
rs04fs3fs fs4fs fs1,305fs fs
rs04fs4fs fs142fs fs1,447fs fs
rs04fs5fs fs271fs fs1,718fs fs-
rs03fsfs fsfs fsMrsfs fsAnnafs fsGreeningfs fsAlliancefs fs1,011fs fsfs fsfs fsDfs fs5
rs04fs2fs fs10fs fs1,021fs fs
rs04fs3fs fs2fs fs1,023fs fs
rs04fs4fs fs82fs fs1,105fs fs-
rs03fsfs fsfs fsfs fsJamesfs fsMilesfs fsSocfs fs570fs fsfs fsfs fsDfs fs4
rs04fs2fs fs13fs fs583fs fs
rs04fs3fs fs3fs fs586fs fs-
rs03fsfs fsfs fsfs fsLenfs fsKamesfs fsCECCfs fs171fs fsfs fsfs fsDfs fs4
rs04fs2fs fs2fs fs173fs fs
rs04fs3fs fs1fs fs174fs fs-
rs03fsfs fsfs fsfs fsTerryfs fsOldfs fsWPfs fs157fs fsfs fsfs fsDfs fs4
rs04fs2fs fs5fs fs162fs fs
rs04fs3fs fs0fs fs162fs fs-
rs03fsfs fsfs fsfs fsRayfs fsJamesonfs fsNLPfs fs40fs fsfs fsfs fsDfs fs4
rs04fs2fs fs11fs fs51fs fs
rs04fs3fs fs0fs fs51fs fs-
rs05fsSFfs fs15,666fs fs34.09fs fs-6.68
rs05fsSDLPfs fs11,815fs fs25.71fs fs+3.47
rs05fsDUPfs fs8,015fs fs17.44fs fs-3.94
rs05fsUUPfs fs7,237fs fs15.75fs fs+1.82
rs05fsInd Commfs fs1,269fs fs2.76fs fs
rs05fsAlliancefs fs1,011fs fs2.20fs fs+1.20
rs05fsSocfs fs570fs fs1.24fs fs+1.06
rs05fsCECCfs fs171fs fs0.37fs fs
rs05fsWPfs fs157fs fs0.34fs fs-0.08
rs05fsNLPfs fs40fs fs0.09fs fs+0.01
rs06fsNfs fsJunefs fs1998fs fsfs fsfs fsfs fs51,223fs fs85.38
rs07fs*fs fsMcCreafs fsDUPfs fs10,339fs fs
rs07fs*fs fsMcGuinnessfs fsSFfs fs8,703fs fs
rs07fs*fs fsHaugheyfs fsSDLPfs fs6,410fs fs
rs07fs*fs fsMolloyfs fsSFfs fs6,008fs fs
rs07fs*fs fsKellyfs fsSFfs fs5,594fs fs
rs07fsfs fsMcGlonefs fsSDLPfs fs4,666fs fs
rs07fs*fs fsArmstrongfs fsUUPfs fs4,498fs fs
rs07fsfs fsJunkinfs fsUUPfs fs2,440fs fs
rs07fsfs fsBoylefs fsAlliancefs fs497fs fs
rs07fsfs fsMcLeanfs fsDUPfs fs307fs fs
rs07fsfs fsDonnellyfs fsWPfs fs207fs fs
rs07fsfs fsHutchinsonfs fsSocfs fs91fs fs
rs07fsfs fsDalyfs fsNLPfs fs38fs fs

Northern Ireland Assembly PR TTY Format First Count Output Example.

HSA1234 3 XDP 567 PA RUSHFULL
POLL Result 17
17 ULSTER MID
(First Count)
Giles (DUP) 8,015
Donald (SF) 7,027
John Barnes (SDLP) 6,495
Barney Macdonald (SF) 4,963
David Hudson (UUP) 4,622
Sam Dean (SF) 3,676
Edward Mills (SDLP) 3,548
Andrew Panner (UUP) 2,615
Paul Donner (SDLP) 1,772
Pat Mowen (Ind Comm) 1,269
Mrs Anna Greening (Alliance) 1,011
James Miles (Soc) 570
Len Kames (CECC) 171
Terry Old (WP) 157
Ray Jameson (NLP) 40

Elected: Oliver Giles, Pete Donald

Party share of poll:
SF 15,666 (34.09%, -6.68%)
SDLP 11,815 (25.71%, +3.47%)
DUP 8,015 (17.44%, -3.94%)
UUP 7,237 (15.75%, +1.82%)
Ind Comm 1,269 (2.76%)
Alliance 1,011 (2.20%, +1.20%)
Soc 570 (1.24%, +1.06%)
CECC 171 (0.37%)
WP 157 (0.34%, -0.08%)
NLP 40 (0.09%, +0.01%)

Electorate 61,390; Turnout 45,951 (74.85%, -10.53%)

1998: Turnout 51,223 (85.38%)
First Count - McCrea (DUP) 10,339; McGuinness (SF) 8,703; Haughey (SDLP) 6,410; Molloy (SF) 6,008; Kelly (SF) 5,594; McGlone (SDLP) 4,666; Armstrong (UUP) 4,498; Junkin (UUP) 2,440; Boyle (Alliance) 497; McLean (DUP) 307; Donnelly (WP) 207; Hutchinson (Soc) 91; Daly (NLP) 38. Elected: McCrea, McGuinness, Haughey, Molloy, Kelly, Armstrong

Northern Ireland PR TTY Format Final Count Output Example.

HSA1234 3 XDP 567 PA RUSHFULL
POLL Result 17
17 ULSTER MID
(First Count)
Giles (DUP) 8,015
Donald (SF) 7,027
John Barnes (SDLP) 6,495
Barney Macdonald (SF) 4,963
David Hudson (UUP) 4,622
Sam Dean (SF) 3,676
Edward Mills (SDLP) 3,548
Andrew Panner (UUP) 2,615
Paul Donner (SDLP) 1,772
Pat Mowen (Ind Comm) 1,269
Mrs Anna Greening (Alliance) 1,011
James Miles (Soc) 570
Len Kames (CECC) 171
Terry Old (WP) 157
Ray Jameson (NLP) 40

Elected: Oliver Giles, Pete Donald

Party share of poll:
SF 15,666 (34.09%, -6.68%)
SDLP 11,815 (25.71%, +3.47%)
DUP 8,015 (17.44%, -3.94%)
UUP 7,237 (15.75%, +1.82%)
Ind Comm 1,269 (2.76%)
Alliance 1,011 (2.20%, +1.20%)
Soc 570 (1.24%, +1.06%)
CECC 171 (0.37%)
WP 157 (0.34%, -0.08%)
NLP 40 (0.09%, +0.01%)

(Second Count)
Distribution of Giles's surplus
John Barnes (SDLP) 6,499
Barney Macdonald (SF) 4,964
David Hudson (UUP) 5,519
Sam Dean (SF) 3,676
Edward Mills (SDLP) 3,549
Andrew Panner (UUP) 3,055
Paul Donner (SDLP) 1,774
Pat Mowen (Ind Comm) 1,301
Mrs Anna Greening (Alliance) 1,021
James Miles (Soc) 583
Len Kames (CECC) 173
Terry Old (WP) 162
Ray Jameson (NLP) 51

(Third Count)
Distribution of Donald's surplus
John Barnes (SDLP) 6,512
Barney Macdonald (SF) 5,276
David Hudson (UUP) 5,519
Sam Dean (SF) 3,748
Edward Mills (SDLP) 3,554
Andrew Panner (UUP) 3,055
Paul Donner (SDLP) 1,778
Pat Mowen (Ind Comm) 1,305
Mrs Anna Greening (Alliance) 1,023
James Miles (Soc) 586
Len Kames (CECC) 174
Terry Old (WP) 162
Ray Jameson (NLP) 51

Eliminated: James Miles, Len Kames, Terry Old, Ray Jameson

(Fourth Count)
Distribution of Miles's, Jameson's, Kames's and Old's votes
John Barnes (SDLP) 6,705

Barney Macdonald (SF) 5,386
David Hudson (UUP) 5,553
Sam Dean (SF) 3,806
Edward Mills (SDLP) 3,645
Andrew Panner (UUP) 3,113
Paul Donner (SDLP) 1,837
Pat Mowen (Ind Comm) 1,447
Mrs Anna Greening (Alliance) 1,105

Elected: John Barnes

Eliminated: Mrs Anna Greening

(Fifth Count)
Distribution of Greening's votes
Barney Macdonald (SF) 5,416
David Hudson (UUP) 5,770
Sam Dean (SF) 3,837
Edward Mills (SDLP) 3,744
Andrew Panner (UUP) 3,270
Paul Donner (SDLP) 2,010
Pat Mowen (Ind Comm) 1,718

Eliminated: Pat Mowen

(Sixth Count)
Distribution of Mowen's votes
Barney Macdonald (SF) 5,665
David Hudson (UUP) 5,883
Sam Dean (SF) 3,938
Edward Mills (SDLP) 4,011
Andrew Panner (UUP) 3,357
Paul Donner (SDLP) 2,462

Eliminated: Paul Donner

(Seventh Count)
Distribution of Donner's votes
Barney Macdonald (SF) 5,989
David Hudson (UUP) 5,921
Sam Dean (SF) 4,073
Edward Mills (SDLP) 5,623
Andrew Panner (UUP) 3,372

Eliminated: Andrew Panner

(Eighth Count)
Distribution of Panner's votes
Barney Macdonald (SF) 5,993
David Hudson (UUP) 8,446
Sam Dean (SF) 4,078
Edward Mills (SDLP) 5,791

Elected: David Hudson

(Ninth Count)
Distribution of Hudson's surplus
Barney Macdonald (SF) 5,993
Sam Dean (SF) 4,079
Edward Mills (SDLP) 5,792

Elected: Barney Macdonald, Edward Mills

Electorate 61,390; Turnout 45,951 (74.85%, -10.53%)

1998: Turnout 51,223 (85.38%)
First Count - McCrea (DUP) 10,339; McGuinness (SF) 8,703; Haughey (SDLP) 6,410; Molloy (SF) 6,008; Kelly (SF) 5,594; McGlone (SDLP) 4,666; Armstrong (UUP) 4,498; Junkin (UUP) 2,440; Boyle (Alliance) 497; McLean (DUP) 307; Donnelly (WP) 207; Hutchinson (Soc) 91; Daly (NLP) 38. Elected: McCrea, McGuinness, Haughey, Molloy, Kelly, Armstrong

SCOTTISH, WELSH AND LONDON ASSEMBLIES AND EUROPEAN PARLIAMENT PROPORTIONAL REPRESENTATION RESULTS OUTPUT EXAMPLES

Data Format Proportional Representation Results will be transmitted using category code XDQ
TTY Proportional Representation Results will be transmitted using category code XTQ
Data Format Proportional Representation Collated Results will be transmitted using category code XDR
TTY Proportional Representation Collated Results will be transmitted using category code XTR

NOTE: In TTY outputs candidate details an asterisk displayed preceding the Candidate details will denote the previous standing MP. Where an existing MP is standing in a different Constituency or where a boundary change is in force the candidate will be indicated as "+". Candidates are displayed in vote order for each count.

NOTE: In TTY outputs last election details the month will NOT be displayed and the type of election indicator will NOT be displayed.

The following Welsh Assembly PR examples, which have the same format as for Scottish and London Assemblies PR results and European Parliament PR results, are for test purposes only and do not reflect accurate data.

Welsh Assembly PR Data Format Output Example.

*rs*00*fs*103*fs fs*WALES MID & WEST*fs fsfs fs*478,252*fs fs*215,500*fs fs*45.06*fs fs*-9.15*fs fsfs fsfs fs*
*rs*01*fs*Brecon & Radnorshire; Carmarthen East & Dinefwr; Carmarthen West & Pembrokeshire South; Ceredigion; Llanelli; Meirionnydd Nant Conwy; Montgomeryshire; Preseli Pembrokeshire
*rs*02*fs*Lab*fs fsfs fsfs fs*4,155*fs fs*1.93*fs fs*7.97*fs fs*Lab*fs fs*PC
*rs*03*fs***fs fsfs fsfs fs*Peter*fs fs*Evans*fs fs*C*fs fsfs fsfs fsfs fsfs fs*
*rs*03*fs***fs fsfs fsfs fs*Ron*fs fs*Ronalds*fs fs*Lab*fs fsfs fsfs fsfs fsfs fs*
*rs*03*fs***fs fsfs fs*Ms*fs fs*Caroline*fs fs*Hart*fs fs*LD*fs fsfs fsfs fsfs fsfs fs*
*rs*03*fs***fs fsfs fs*Ms*fs fs*June*fs fs*Rhodes*fs fs*PC*fs fsfs fsfs fsfs fsfs fs*
*rs*05*fs*Lab*fs fs*73,673*fs fs*34.19*fs fs*+9.64
*rs*05*fs*PC*fs fs*69,518*fs fs*32.26*fs fs*-6.29
*rs*05*fs*C*fs fs*41,700*fs fs*19.35*fs fs*+2.65
*rs*05*fs*LD*fs fs*22,130*fs fs*10.27*fs fs*-4.17
*rs*05*fs*Green*fs fs*4,667*fs fs*2.17*fs fs*-1.35
*rs*05*fs*Ind*fs fs*1,353*fs fs*0.63*fs fs*
*rs*05*fs*NLP*fs fs*917*fs fs*0.43*fs fs*+0.11
*rs*05*fs*United Soc*fs fs*828*fs fs*0.38*fs fs*
*rs*05*fs*Comm*fs fs*714*fs fs*0.33*fs fs*
*rs*06*fs*W*fs fs*May*fs fs*1999*fs fs*PC*fs fs*30,712*fs fs*14.00*fs fs*219,357*fs fs*54.21
*rs*07*fsfs fsfs fs*PC*fs fs*84,554*fs fs*38.55
*rs*07*fsfs fsfs fs*Lab*fs fs*53,842*fs fs*24.55
*rs*07*fsfs fsfs fs*C*fs fs*36,622*fs fs*16.70
*rs*07*fsfs fsfs fs*LD*fs fs*31,683*fs fs*14.44
*rs*07*fsfs fsfs fs*Green*fs fs*7,718*fs fs*3.52
*rs*07*fsfs fsfs fs*Soc Lab*fs fs*3,019*fs fs*1.38
*rs*07*fsfs fsfs fs*Ind*fs fs*1,214*fs fs*0.55
*rs*07*fsfs fsfs fs*NLP*fs fs*705*fs fs*0.32

Welsh Assembly PR TTY Output Example.

103 WALES MID & WEST
(Brecon & Radnorshire; Carmarthen East & Dinefwr; Carmarthen West & Pembrokeshire South; Ceredigion; Llanelli; Meirionnydd Nant Conwy; Montgomeryshire; Preseli Pembrokeshire)
Elected: Peter Evans (C), Ron Ronalds (Lab), Ms Caroline Hart (LD), Ms June Rhodes (PC)
Lab 73,673 (34.19%, +9.64%)
PC 69,518 (32.26%, -6.29%)
C 41,700 (19.35%, +2.65%)
LD 22,130 (10.27%, -4.17%)
Green 4,667 (2.17%, -1.35%)
Ind 1,353 (0.63%)
NLP 917 (0.43%, +0.11%)
United Soc 828 (0.38%)
Comm 714 (0.33%)
Lab maj 4,155 (1.93%)
7.97% swing PC to Lab
Electorate 478,252; Turnout 215,500 (45.06%, -9.15%)
1999 PC maj 30,712 (14.00%) - Turnout 219,357 (54.21%)
PC 84,554 (38.55%); Lab 53,842 (24.55%); C 36,622 (16.70%); LD 31,683 (14.44%); Green 7,718 (3.52%); Soc Lab 3,019 (1.38%); Ind Turner 1,214 (0.55%); NLP 705 (0.32%)

REFERENDUMS SPECIFICATION

Data Format Referendum results will be category code XRA

TTY Referendum results will be category code XRB
Data Format Referendum Collated results will be category code XRC
TTY Referendum Collated results will be category code XRD

The following specification is applicable to all Referendums results. It uses the same Records and Fields as elections, leaving unapplicable fields blank. Please note that in the event of there not being a previous comparable Referendum further fields will be blank.

The information will utilise Record and Field separators which are indicated as *RS* and *FS* respectively. Each record will be preceded by *RS nn FS* where nn stands for record number (00 - 07) and will be terminated by *CR LF*. If there is no data for a particular record or the record is not applicable, it will not be present. If a record type is shown, all fields, preceded by *FS SPACE FS*, are always present whether they contain data or not.

An individual Referendum result will carry a Topic of "REFERENDUM" followed by a selected Keyword - for example "Euro" in the case of a Referendum on the European single currency, followed by the Voting area number.

Collated Results will carry catchlines of "REFERENDUM, (keyword) Collated".

Referendum collated results by region are not anticipated to be transmitted. If a decision is made to transmit this material the outputs will contain results within one region, and will carry a keyword that corresponds to one of the twelve regions, as appropriate. (EAST ANGLIA, EAST MIDLANDS, GREATER LONDON, NORTH, NORTHERN IRELAND, NORTH WEST, SCOTLAND, SOUTH EAST, SOUTH WEST, WALES, WEST MIDLANDS, YORKSHIRE AND HUMBERSIDE).

In all Collated Referendum transmissions, each page will carry a maximum of 30 Voting areas and will be sequentially paged accordingly.

The outputs will consist of eight record types from Record 00 through Record 07. How many of the eight record types are present will depend on the type of output.

Historic material will only be displayed as far back as the last comparable Referendum.

RECORD 00 contains ten fields showing Voting area details, three of which are not applicable and are left blank.
Field 1 contains the Voting area number.
Field 2 contains the Voting area name.
Field 3 contains an indication relating to a boundary change, if applicable. This field will contain either the boundary change percentage figure or the indicator "B" where a boundary change is in force and the percentage change is not given. It will rarely be used.
Field 4 contains the Electorate (the number of people eligible to vote in the Referendum).
Field 5 contains the turnout (the number of people who actually voted in the Referendum).
Field 6 contains the percentage of turnout against the electorate.
Field 7 contains the percentage change in turnout between the election and the last comparable Referendum. This field will be blank if a boundary change is in force or there is no comparable previous Referendum.
Fields 8, 9 and 10 are not applicable.

RECORD 01.
Field 1 contains the names of council areas or parliamentary constituencies included within Voting areas.

RECORD 02 consists of eight fields, five of which are not applicable and left blank.
Field 1 contains the winning proposition or answer.
Fields 2 and 3 are blank.
Field 4 contains the winning majority.
Field 5 contains the winning majority shown as a percentage of the turnout.
Fields 6, 7 and 8 are blank.

RECORD 03 contains eleven fields, of which six are blank and the remainder indicate Proposition or Answer details and votes.
Field 1 contains the winning Proposition/Answer indicator. This field will be set with an asterisk if the Proposition/Answer is the winning one.
Fields 2 to 5 are blank.
Field 6 contains the Proposition/Answer.
Field 7 contains the number of votes cast for the Proposition/Answer.
Field 8 contains the percentage of the turnout figure gained by the Proposition/Answer.
Field 9 contains the percentage change of the turnout gained by the Proposition/Answer compared with the last comparable Referendum. Data in this field, if present, will be preceded by a + (plus) or - (minus) indication. This field will be empty if there has been no measurable (two decimal points) change in this data or if there is no previous comparable Referendum.
Fields 10 and 11 are blank.

RECORDS 04 and 05 are not applicable and will not appear.

RECORD types 06 and 07 will be repeated for previous comparable Referendums. If there is no previous comparable referendum they will not appear.

RECORD 06 contains the last comparable Referendum details. The record has eight fields.
Field 1 contains an indicator of a Referendum result (R).
Field 2 contains the previous Referendum month indicator.
Field 3 contains the previous Referendum year indicator.
Field 4 contains the last Referendum winning Proposition/Answer short name.
Field 5 contains the last Referendum winning majority.
Field 6 contains the last Referendum percentage figure of the majority against the turnout.
Field 7 contains the last Referendum turnout figure.
Field 8 contains the last Referendum percentage figure of turnout against the electorate.

RECORD 07 contains five fields, one of which will be blank. It contains the last Referendum Propositions/Answers details, for the previous Record 06. This record will be repeated for each Proposition/Answer in descending vote order.
Field 1 contains a previous winning Proposition/Answer indicator (*) if applicable.
Field 2 is blank.
Field 3 contains the Proposition/Answer.
Field 4 contains the Proposition/Answer vote figure.
Field 5 contains the percentage of the turnout figure gained by the Proposition/Answer.

REFERENDUM RESULTS OUTPUT EXAMPLES

Data Format Referendum results will be category code XRA

TTY Referendum results will be category code XRB
Data Format Referendum Collated results will be category code XRC
TTY Referendum Collated results will be category code XRD

NOTE: In TTY outputs last Referendum details the month will NOT be displayed and the Referendum indicator will NOT be displayed.

Referendum result for one proposition and two answers with no previous result Data Format example:
*rs*00*fs*116*fs fs*NORFOLK*fs fsfs fs*630,412*fs fs*455,433*fs fs*72.24*fs fsfs fsfs fsfs fs*
*rs*02*fs*Keep the pound*fs fsfs fsfs fs*47,191*fs fs*10.36*fs fsfs fsfs fs*
*rs*03*fsfs fsfs fsfs fsfs fsfs fs*Scrap the pound*fs fs*204,121*fs fs*44.82*fs fsfs fsfs fs*
*rs*03*fs***fs fsfs fsfs fsfs fsfs fs*Keep the pound*fs fs*251,312*fs fs*55.18*fs fsfs fsfs fs*

Referendum result for one proposition and two answers with no previous result TTY example:
116 NORFOLK
Scrap the pound 204,121 (44.82%)
Keep the pound 251,312 (55.18%)
Keep the pound maj 47,191 (10.36%)
Electorate 630,412; Turnout 455,433 (72.24%)

Referendum result for one proposition and two answers with councils or constituencies included within the voting area and no previous result Data Format example:
*rs*00*fs*116*fs fs*NORFOLK*fs fsfs fs*630,412*fs fs*455,433*fs fs*72.24*fs fsfs fsfs fsfs fs*
*rs*01*fs*Breckland; Broadland; Great Yarmouth; King's Lynn and West Norfolk; North Norfolk; Norwich; South Norfolk
*rs*02*fs*Keep the pound*fs fsfs fsfs fs*47,191*fs fs*10.36*fs fsfs fsfs fs*
*rs*03*fsfs fsfs fsfs fsfs fsfs fs*Scrap the pound*fs fs*204,121*fs fs*44.82*fs fsfs fsfs fs*
*rs*03*fs***fs fsfs fsfs fsfs fsfs fs*Keep the pound*fs fs*251,312*fs fs*55.18*fs fsfs fsfs fs*

Referendum result for one proposition and two answers with councils or constituencies included within the voting area and no previous result TTY
116 NORFOLK
(Breckland; Broadland; Great Yarmouth; King's Lynn and West Norfolk; North
Norfolk; Norwich; South Norfolk)
Scrap the pound 204,121 (44.82%)
Keep the pound 251,312 (55.18%)
Keep the pound maj 47,191 (10.36%)
Electorate 630,412; Turnout 455,433 (72.24%)

Referendum result for one proposition and two answers with previous result Data Format example:
*rs*00*fs*116*fs fs*NORFOLK*fs fsfs fs*630,412*fs fs*455,433*fs fs*72.24*fs fs*+8.07*fs fsfs fsfs fs*
*rs*02*fs*Keep the pound*fs fsfs fsfs fs*47,191*fs fs*10.36*fs fsfs fsfs fs*
*rs*03*fsfs fsfs fsfs fsfs fsfs fs*Scrap the pound*fs fs*204,121*fs fs*44.82*fs fs*-4.83*fs fsfs fs*
*rs*03*fs***fs fsfs fsfs fsfs fsfs fs*Keep the pound*fs fs*251,312*fs fs*55.18*fs fs*+4.83*fs fsfs fs*
*rs*06*fs*R*fs fs*August*fs fs*2002*fs fs*Keep the pound*fs fs*2,809*fs fs*0.69*fs fs*404,303*fs fs*64.17
*rs*07*fsfs fsfs fs*Scrap the pound*fs fs*200,747*fs fs*49.65
*rs*07*fs***fs fsfs fs*Keep the pound*fs fs*203,556*fs fs*50.35

Referendum result for one proposition and two answers with previous result TTY example
116 NORFOLK
Scrap the pound 204,121 (44.82%, -4.83%)
Keep the pound 251,312 (55.18%, +4.83%)
Keep the pound maj 47,191 (10.36%)
Electorate 630,412; Turnout 455,433 (72.24%, +8.07%)
2002:Keep the pound maj 2,809 (0.69%) - Turnout 404,303 (64.17%)
Scrap the pound 200,747 (49.65%); Keep the pound 203,556 (50.35%)

Referendum result for two propositions with two answers each with no previous result Data Format example:
*rs*00*fs*3*fs fs*GATESHEAD*fs fsfs fs*151,305*fs fs*81,098*fs fs*53.60*fs fsfs fsfs fsfs fs*
*rs*02*fs*Scrap assembly*fs fsfs fsfs fs*18,676*fs fs*23.03*fs fsfs fsfs fs*
*rs*03*fs*fs fsfs fsfs fsfs fsfs fs*Scrap assembly*fs fs*49,887*fs fs*61.51*fs fsfs fsfs fs*
*rs*03*fsfs fsfs fsfs fsfs fsfs fs*Keep assembly*fs fs*31,211*fs fs*38.49*fs fsfs fsfs fs*
*rs*00*fs*3*fs fs*GATESHEAD*fs fsfs fs*151,305*fs fs*79,861*fs fs*52.78*fs fsfs fsfs fsfs fs*
*rs*02*fs*Keep tax power*fs fsfs fsfs fs*127*fs fs*0.16*fs fsfs fsfs fs*
*rs*03*fsfs fsfs fsfs fsfs fsfs fs*Scrap tax power*fs fs*39,867*fs fs*49.92*fs fsfs fsfs fs*
*rs*03*fs*fs fsfs fsfs fsfs fsfs fs*Keep tax power*fs fs*39,994*fs fs*50.08*fs fsfs fsfs fs*

Referendum result for two propositions with two answers each with no previous result TTY example:
3 GATESHEAD
Scrap assembly 49,887 (61.51%)
Keep assembly 31,211 (38.49%)
Scrap assembly maj 18,676 (23.03%)
Electorate 151,305; Turnout 81,098 (53.60%)
3 GATESHEAD
Scrap tax power 39,867 (49.92%)
Keep tax power 39,994 (50.08%)
Keep tax power maj 127 (0.16%)
Electorate 151,305; Turnout 79,861 (52.78%)

Referendum result for two propositions with two answers each with previous result Data Format example:
*rs*00*fs*3*fs fs*GATESHEAD*fs fsfs fs*151,305*fs fs*81,098*fs fs*53.60*fs fs*-1.81*fs fsfs fsfs fs*
*rs*02*fs*Scrap assembly*fs fsfs fsfs fs*18,676*fs fs*23.03*fs fsfs fsfs fs*
*rs*03*fs*fs fsfs fsfs fsfs fsfs fs*Scrap assembly*fs fs*49,887*fs fs*61.51*fs fs*+18.54*fs fsfs fs*
*rs*03*fsfs fsfs fsfs fsfs fsfs fs*Keep assembly*fs fs*31,211*fs fs*38.49*fs fs*-18.54*fs fsfs fs*
*rs*06*fs*R*fs fs*August*fs fs*2002*fs fs*Keep assembly*fs fs*11,659*fs fs*14.05*fs fs*82,983*fs fs*55.41
*rs*07*fsfs fsfs fs*Scrap assembly*fs fs*35,662*fs fs*42.98
*rs*07*fs*fs fsfs fs*Keep assembly*fs fs*47,321*fs fs*57.02
*rs*00*fs*3*fs fs*GATESHEAD*fs fsfs fs*151,305*fs fs*79,861*fs fs*52.78*fs fs*-2.12*fs fsfs fsfs fs*
*rs*02*fs*Keep tax power*fs fsfs fsfs fs*127*fs fs*0.16*fs fsfs fsfs fs*
*rs*03*fsfs fsfs fsfs fsfs fsfs fs*Scrap tax power*fs fs*39,867*fs fs*49.92*fs fs*+2.49*fs fsfs fs*
*rs*03*fs*fs fsfs fsfs fsfs fsfs fs*Keep tax power*fs fs*39,994*fs fs*50.08*fs fs*-2.49*fs fsfs fs*
*rs*06*fs*R*fs fs*August*fs fs*2002*fs fs*Keep tax power*fs fs*4,224*fs fs*5.14*fs fs*82,218*fs fs*54.90
*rs*07*fsfs fsfs fs*Scrap tax power*fs fs*38,997*fs fs*47.43
*rs*07*fs*fs fsfs fs*Keep tax power*fs fs*43,221*fs fs*52.57

Referendum result for two propositions with two answers each with previous result TTY example:
3 GATESHEAD
Scrap assembly 49,887 (61.51%, +18.54%)
Keep assembly 31,211 (38.49%, -18.54%)
Scrap assembly maj 18,676 (23.03%)
Electorate 151,305; Turnout 81,098 (53.60%, -1.81%)
2002:Keep assembly maj 11,659 (14.05%) - Turnout 82,983 (55.41%)
Scrap assembly 35,662 (42.98%); Keep assembly 47,321 (57.02%)
3 GATESHEAD
Scrap tax power 39,867 (49.92%, +2.49%)
Keep tax power 39,994 (50.08%, -2.49%)
Keep tax power maj 127 (0.16%)
Electorate 151,305; Turnout 79,861 (52.78%, -2.12%)
2002:Keep tax power maj 4,224 (5.14%) - Turnout 82,218 (54.90%)
Scrap tax power 38,997 (47.43%); Keep tax power 43,221 (52.57%)

Referendum result for three propositions with one answer each with no previous result Data Format example:
*rs*00*fs*1*fs fs*DARLINGTON*fs fsfs fs*76,274*fs fs*72,296*fs fs*94.78*fs fsfs fsfs fsfs fs*
*rs*02*fs*Elected mayor*fs fsfs fsfs fs*8,167*fs fs*11.30*fs fsfs fsfs fs*
*rs*03*fs*fs fsfs fsfs fsfs fsfs fs*Elected mayor*fs fs*35,778*fs fs*49.49*fs fsfs fsfs fs*
*rs*03*fsfs fsfs fsfs fsfs fsfs fs*Elected mayor and manager*fs fs*8,907*fs fs*12.32*fs fsfs fsfs fs*
*rs*03*fsfs fsfs fsfs fsfs fsfs fs*Status quo*fs fs*27,611*fs fs*38.19*fs fsfs fsfs fs*

Referendum result for three propositions with one answer each with no previous result TTY example:
1 DARLINGTON
Elected mayor 35,778 (49.49%%)
Elected mayor and manager 8,907 (12.32%%)
Status quo 27,611 (38.19%)
Elected mayor maj 8,167 (11.30%)
Electorate 76,274; Turnout 72,296 (94.78%)

Referendum result for three propositions with one answer each with a previous result Data Format example:
*rs*00*fs*1*fs fs*DARLINGTON*fs fsfs fs*76,274*fs fs*72,296*fs fs*94.78*fs fs*+47.31*fs fsfs fsfs fs*
*rs*02*fs*Elected mayor*fs fsfs fsfs fs*8,167*fs fs*11.30*fs fsfs fsfs fs*
*rs*03*fs***fs fsfs fsfs fsfs fsfs fs*Elected mayor*fs fs*35,778*fs fs*49.49*fs fs*+17.43*fs fsfs fs*
*rs*03*fsfs fsfs fsfs fsfs fsfs fs*Elected mayor and manager*fs fs*8,907*fs fs*12.32*fs fs*-23.16*fs fsfs fs*
*rs*03*fsfs fsfs fsfs fsfs fsfs fs*Status quo*fs fs*27,611*fs fs*38.19*fs fs*+5.73*fs fsfs fs*
*rs*06*fs*R*fs fs*July*fs fs*2002*fs fs*Elected mayor and manager*fs fs*1,079*fs fs*3.02*fs fs*35,732*fs fs*47.48
*rs*07*fsfs fsfs fs*Elected mayor*fs fs*11,455*fs fs*32.06
*rs*07*fs***fs fsfs fs*Elected mayor and manager*fs fs*12,678*fs fs*35.48
*rs*07*fsfs fsfs fs*Status quo*fs fs*11,599*fs fs*32.46

Referendum result for three propositions with one answer each with no previous result TTY example:
1 DARLINGTON
Elected mayor 35,778 (49.49%, +17.43%)
Elected mayor and manager 8,907 (12.32%, -23.16%)
Status quo 27,611 (38.19%, +5.73%)
Elected mayor maj 8,167 (11.30%)
Electorate 76,274; Turnout 72,296 (94.78%, +47.31%)
2002:Elected mayor and manager maj 1,079 (3.02%) - Turnout 35,732 (47.48%)
Elected mayor 11,455 (32.06%); Elected mayor and manager 12,678 (35.48%);
Status quo 11,599 (32.46%)

ELECTION CATEGORY CODES

The following list itemises the category codes and what they will apply to.

XDA Data Format Nominations output.

XTA TTY nominations output.

XDB Data Format Individual first past the post results output.

XTB TTY Individual first past the post results output.

XDC Data Format Collated first past the post results output.

XTC TTY Collated first past the post results output.

XDP Northern Ireland Data Format proportional representation results.

XTP Northern Ireland TTY Proportional representation results.

XDQ Data Format Scottish, Welsh and London Assembly and European Parliament proportional representation results

XTQ TTY Scottish, Welsh and London Assembly and European Parliament proportional representation results

XDR Data Format Scottish and Welsh Assembly and European Parliament collated proportional representation results

XTR TTY Scottish and Welsh Assembly and European Parliament collated proportional representation results

XDG Data Format State of parties output

XTH General statistical TTY outputs.

XTJ Election rushes (TTY).

XRA Data Format Referendum Results.

XRB TTY Referendum Results.

XRC Data Format Referendum Collated Results.

XRD TTY Referendum Collated Results.

XLD Local Election Data Format results and collated Data Format results.

XLR Local election TTY results and collated TTY results.

XLE Local election TTY statistics.

HHH Local election TTY snaps.

DATA FORMAT ELECTION STATE OF PARTIES SPECIFICATION

The State of Parties will be transmitted using category code XDG
TTY State of Parties, which contains additional information, will be transmitted using category code XTH

The output contains two records, Record 00 and Record 01, and contains the catchline "POLL State of Parties".

RECORD 00 contains one field showing the specified number of results.

RECORD 01 contains four fields and will be repeated for all major parties, and "Others".
Field 1 contains the party abbreviation.
Field 2 contains the total number of seats won by the party.
Field 3 contains the number of seats gained by the party.
Field 4 contains the number of seats lost by the party.

The information will utilise Record and Field separators which are indicated as *RS* and *FS* respectively. Each record will be preceded by *RS nn FS* where nn stands for record number (00 - 01) and will be terminated by *CR LF*. Each Field within a record will be preceded by *FS SPACE FS*. If there is no data for a particular record the RS code, numerics and FS code will not be present. The *FS SPACE FS* code strings will always be present within a record whether the field contains data or not.

The Records and Fields are as follows:

RECORD 00	**:**	**NUMBER OF RESULTS**
Field 1	Numeric	Preceded by *RS 00 FS*

RECORD 01	**:**	**PARTY SEATS DETAILS**
Field 1	Text	Preceded by *RS 01 FS*
Field 2	Numeric	Preceded by *FS SPACE FS*
Field 3	Numeric	Preceded by *FS SPACE FS*
Field 4	Numeric	Preceded by *FS SPACE FS*, terminated by *CR LF*

The Records and fields are as follows:

Field	Type	Content	Example
Record 00: NUMBER OF RESULTS			
Field 1	Numeric	No. of Results	659
Record 01: PARTY SEATS			
Field 1	Text	Party Name	Lab
Field 2	Numeric	Total Seats	412
Field 3	Numeric	Seats Gained	4
Field 4	Numeric	Seats Lost	10

OUTPUT EXAMPLE

HSA1234 4 XDG 132 PA 1 POLL State of Parties

*rs*00*fs*659

*rs*01*fs*Lab*fs* *fs*412*fs* *fs*4*fs* *fs*10

*rs*01*fs*C*fs* *fs*166*fs* *fs*11*fs* *fs*7

*rs*01*fs*LD*fs* *fs*52*fs* *fs*7*fs* *fs*2

*rs*01*fs*SNP*fs* *fs*5*fs* *fsfs* *fs*1

*rs*01*fs*UUP*fs* *fs*6*fs* *fs*2*fs* *fs*5

*rs*01*fs*PC*fs* *fs*4*fs* *fs*1*fs* *fs*1

*rs*01*fs*DUP*fs* *fs*5*fs* *fs*3*fs* *fs*1

*rs*01*fs*SF*fs* *fs*4*fs* *fs*2*fs* *fs*

*rs*01*fs*SDLP*fs* *fs*3*fs* *fsfs* *fs*

*rs*01*fs*Green*fs* *fsfs* *fsfs* *fs*

*rs*01*fs*Alliance*fs* *fsfs* *fsfs* *fs*

*rs*01*fs*KHHC*fs* *fs*1*fs* *fs*1*fs* *fs*

*rs*01*fs*Speaker*fs* *fs*1*fs* *fsfs* *fs*

*rs*01*fs*WP*fs* *fsfs* *fsfs* *fs*

*rs*01*fs*UKU*fs* *fsfs* *fsfs* *fs*1

*rs*01*fs*Others*fs* *fsfs* *fsfs* *fs*3

OUTPUT EXAMPLE (in TTY):

HSA1234 4 XTH 132 PA

1 POLL State of Parties

After 659 results out of 659 for the General Election the state of parties is:

Party	Total seats	Gains	Losses	Total votes	Share %	Change %	Forecast
Lab	412	4	10	10,724,593	40.67	-2.53	412
C	166	11	7	8,357,588	31.70	+1.01	166
LD	52	7	2	4,814,322	18.26	+1.50	52
SNP	5		1	464,314	1.76	-0.23	5
UUP	6	2	5	216,839	0.82	-0.00	6
PC	4	1	1	195,893	0.74	+0.23	4
DUP	5	3	1	181,999	0.69	+0.35	5
SF	4	2		175,933	0.67	+0.26	4
SDLP	3			169,865	0.64	+0.03	3
Green				166,477	0.63	+0.42	
Alliance				28,999	0.11	-0.09	
KHHC	1	1		28,487	0.11		1
Speaker	1			16,053	0.06		1
WP				2,352	0.01		
UKU			1				
Others			3	823,283	3.12		
TOTALS				26,366,997		Lab Majority 165	

DATA FORMAT LOCAL ELECTION RESULTS SPECIFICATION

Local Election Results (Full Council and One Third Council) will be transmitted using category code XLD
The TTY version will be transmitted using category code XLR

Two different types of Results will be transmitted: Result Details and Regional Results (Collated) Details. Topic will be POLL in all cases. Result Details will contain only one council. In the keyword the first word will indicate the region or council type (England, Scotland, Wales, London, Metro, Non Met, Unitary). This will be followed in the same keyword field by the Council name, This will always start 10 characters from the start of the keyword field in order to enable searching by council name. Regional Results (Collated) Details will contain results within one region or council type. The first keyword will be the name of the Region or council type (England, Scotland, Wales, London, Metro, Non Met, Unitary). The second keyword will be the word “Collated”.

The outputs will consist of five records from Record 00 through Record 04.

Record 00 will consist of two fields and will indicate the Council name and textual information.
Field 1 will contain the Council name.
Field 2 will contain a Council "Boundary change" text string (if applicable).

Record 01 will hold the Council Status after the Election, and will consist of three fields.
Field 1 will contain the winning party.
Field 2 will contain the losing party.
Field 3 will contain (if applicable) a text string to indicate:
1) "No change", if no change in controlling party.
2) "gains from NOC" (No Overall Control), with the gaining party included in the first field.
3) "loses to NOC" (No Overall Control), with the losing party included in the second field.
4) NOC No change, if no party in overall control, with no party included in first or second fields.

Record 02 will hold the seats won by each party, and will consist of two fields.
Field 1 will contain the Party name.
Field 2 will contain the seats won by that party from those up for election.
This record is only present in PART COUNCIL (normally one third) results, and will NOT be present in Full Council Elections. It will be repeated for all parties who have won seats out of those up for election in a PART COUNCIL election.

Record 03 will indicate the seat gains and losses for each party, and will consist of three fields.
Field 1 will contain the Party name.
Field 2 will contain a text string indicating either "gain" or 'lose' ("up" or "down" in boundary change results).
Field 3 will contain number of Seats gained or lost (up or down in boundary change results).

Record 04 will indicate the seats status for each party after the Election, and will consist of two fields.
Field 1 will contain the Party name.
Field 2 will contain the total seats it now has on the council.

The information will utilise Record and Field separators which are indicated as *RS* and *FS* respectively. Each record will be preceded by *RS nn FS* where nn stands for record number (00 - 04) and will be terminated by *CR LF*. Each Field within a record will be preceded by *FS SPACE FS*. If there is no data for a particular record the RS code, numerics and FS code will not be present.
The records and fields are as follows:

Field	Content		Example
Record 0	**:**	**COUNCIL NAME/BOUNDARY CHANGE INDICATION**	
Field 1	Council Name	Preceded by *RS 00 FS*	Sunderland
Field 2	Text	Preceded by *FS SPACE FS*, terminated by *CR LF*	Boundary change
Record 1	**:**	**COUNCIL STATUS AFTER ELECTION**	
Field 1	Winning Party	Preceded by *RS 01 FS*	Lab
Field 2	Losing Party	Preceded by *FS SPACE FS*	C
Field 3	Text	Preceded by *FS SPACE FS*, terminated by *CR LF*	NOC No change
Record 2	**:**	**PARTY SEATS WON**	
Field 1	Party Name	Preceded by *RS 02 FS*	C
Field 2	Seats won	Preceded by *FS SPACE FS*, terminated by *CR LF*	8
Record 3	**:**	**PARTY GAINS AND LOSSES**	
Field 1	Party Name	Preceded by *RS 03 FS*	C
Field 2	Text	Preceded by *FS SPACE FS*	lose (or down)
Field 3	Seats gained/lost	Preceded by *FS SPACE FS*, terminated by *CR LF*	6
Record 3 will be repeated for all parties that gain or lose seats.			
Record 4	**:**	**NEW COUNCIL**	
Field 1	Party Name	Preceded by RS 04 FS	Lab
Field 2	Seats	Preceded by *FS SPACE FS*, terminated by *CR LF*	20
Record 4 will be repeated for all parties with seats on the council after the election.			

OUTPUT EXAMPLE (ONE THIRD COUNCIL)
HSA1234 4 XLD BT 132 PA
1 POLL Non Met Amber Valley
*rs*00*fs*Amber Valley*fs fs*
*rs*01*fs*Lab*fs fs*C*fs fs*
*rs*02*fs*C*fs fs*7
*rs*02*fs*Lab*fs fs*5
*rs*02*fs*Ind*fs fs*1
*rs*02*fs*LD*fs fs*1
*rs*03*fs*C*fs fs*lose*fs fs*5
*rs*03*fs*Lab*fs fs*gain*fs fs*5
*rs*04*fs*Lab*fs fs*22
*rs*04*fs*C*fs fs*17
*rs*04*fs*Ind*fs fs*2
*rs*04*fs*LD*fs fs*1
*rs*04*fs*Green*fs fs*1

OUTPUT EXAMPLE (ONE THIRD COUNCIL) (in TTY)
HSA1234 4 XLR BT 110 PA
1 POLL Non Met Amber Valley
Amber Valley
Lab gain from C
C 7, Lab 5, Ind 1, LD 1.
C lost 5, Lab gain 5.
New council: Lab 22, C 17, Ind 2, LD 1, Green 1

OUTPUT EXAMPLE (FULL COUNCIL)
HSA1234 4 XLD BT 132 PA
1 POLL Wales Colwyn
*rs*00*fs*Colwyn*fs fs*
*rs*01*fs fs fs fs*NOC No change
*rs*03*fs*Lab*fs fs*gain*fs fs*3
*rs*03*fs*LD*fs fs*gain*fs fs*1
*rs*03*fs*C*fs fs*lose*fs fs*1
*rs*03*fs*Ind*fs fs*lose*fs fs*3
*rs*04*fs*LD*fs fs*14
*rs*04*fs*Ind*fs fs*12
*rs*04*fs*Lab*fs fs*5
*rs*04*fs*C*fs fs*3
*rs*04*fs*Vacant*fs fs*1

OUTPUT EXAMPLE (FULL COUNCIL) (in TTY)
HSA1234 4 XLR BT 100 PA
1 POLL Wales Colwyn
Colwyn
NOC No change
Lab gain 3, LD gain 1, C lose 1, Ind lose 3.
New council: LD 14, Ind 12, Lab 5, C 3, Vacant 1

OUTPUT EXAMPLE (FULL COUNCIL WITH BOUNDARY CHANGE)
HSA1234 4 XLD BY 100 PA
1 POLL Non Met Basingstoke
*rs*00*fs*Basingstoke*fs fs*Boundary change
*rs*01*fs*C*fs fs fs fs*No change
*rs*03*fs*Lab*fs fs*up*fs fs*3
*rs*03*fs*LD*fs fs*up*fs fs*1
*rs*03*fs*C*fs fs*down*fs fs*1
*rs*03*fs*Ind*fs fs*down*fs fs*3
*rs*04*fs*C*fs fs*22
*rs*04*fs*Lab*fs fs*11
*rs*04*fs*LD*fs fs*4
*rs*04*fs*Ind*fs fs*2
*rs*04*fs*R*fs fs*1

OUTPUT EXAMPLE (FULL COUNCIL WITH BOUNDARY CHANGE) (in TTY)
HSA1234 4 XLR BT 76 PA
1 POLL Non Met Basingstoke
Basingstoke (Boundary change)
C No change
Lab up 3, LD up 1, C down 1, Ind down 3.

New council: C 22, Lab 11, LD 4, Ind 2, R 1

Council election statistics, in TTY only, give details by party of total councils won, control changes, total seats won by party and total net seat changes by party.

The topic is POLL and keyword Parties. Category code is XLE.

OUTPUT EXAMPLE
With results available from 15 councils, PA News calculates the state of parties as follows;

Party	Total Councils	Change in control	Seats won	Net Change in seats
Lab	4		297	+11
LD	3	+1	161	+4
C	1		201	-15
Ind			30	+1
Others			5	-1
NOC	7	-1		

DATA FORMAT HONOURS LIST SPECIFICATION

The Honours list will be sent with the Story Category Code HDA
TTY transmissions will be sent with Story Category Code HTA
Individual County transmissions will be sent with Story Category Code HTA

The list will be transmitted in approx 15 pages which will contain the following awards:

1 HONOURS List -- Life Peers, Knights Bachelor, etc.
2 HONOURS List -- GBE, KBE, CBE civil.
3 HONOURS List -- OBE civil.
4 HONOURS List -- OBE (contd).
5 HONOURS List -- MBE civil.
6 HONOURS List -- MBE (contd).
7 HONOURS List -- MBE (contd).
8 HONOURS List -- MBE (contd).
9 HONOURS List -- MBE (contd).
10 HONOURS List -- Diplomatic and Overseas List.
11 HONOURS List -- Commonwealth.
12 HONOURS List Royal Navy.
13 HONOURS List Army.
14 HONOURS List Royal Air Force.
15 HONOURS List Police, Fire. Red Cross, Ambulance, etc.

The outputs are divided into six records, some of which are subsequently divided into a number of fields.

Record 00 will contain the Award Main Title.

Record 01 will contain the Award Sub Title, Military indicator, Commonwealth country or Page cross header.

Record 02 will contain the Award Initials.

Record 03 will contain the recipient details and will consist of 4 fields.
Field 1 will contain the recipients title and forename.
Field 2 will contain the recipients surname.
Field 3 will contain the recipients past decorations and awards.
Field 4 will contain the recipients details or short biography.
Field 5 will contain the recipients place of residence.

To cater for the variants found in Chinese (or similar) names, the following records will be utilised.

Record 04 will contain the recipient details of Chinese (or similar) names where the surname should be displayed in the first field. It will consist of 4 fields.
Field 1 will contain the recipients surname.
Field 2 will contain the recipients title and forename.
Field 3 will contain the recipients past decorations and awards.
Field 4 will contain the recipients details or short biography.

Record 05 will contain the recipient details of Chinese (or similar) names where the fields name is indicated in three It will consist of 5 fields.
Field 1 will contain the recipient title and forename.
Field 2 will contain the recipients surname.
Field 3 will contain the recipients family name.
Field 4 will contain the recipients past decorations and awards.
Field 5 will contain the recipients details or short biography.

Information makes use of both the RS code and FS code. Each record in a list is defined by an *RS code-2 numerics-FS code* string, and terminated by *CR LF*. Each field within a record is defined by a *FS-space-FS* code string. If there is no data for a particular record the RS code and numerics will not be present. The *FS-space-FS* code strings will always be present within a record whether the field contains data or not.

The records and fields for Weekly lists are as follows:

RECORD 0: AWARD MAIN TITLE

Field 1 Text Preceded by *RS 00 FS,* terminated by *CR LF*

RECORD 1: AWARD SUB TITLE, MILITARY INDICATOR

COMMONWEALTH COUNTRY or PAGE HEADER

Field 1 Text Preceded by *RS 01 FS*, terminated by *CR LF*

RECORD 2: AWARD INITIALS

Field 1 Text Preceded by *RS 02 FS*, terminated by *CR LF*

RECORD 3: NON-CHINESE RECIPIENTS

Field 1 Text Preceded by *RS 03 FS*
Field 2 Text Preceded by *FS SPACE FS*
Field 3 Text Preceded by *FS SPACE FS*
Field 4 Text Preceded by *FS SPACE FS*
Field 5 Text Preceded by *FS SPACE FS*, terminated by *CR LF*

RECORD 4: CHINESE (or similar) RECIPIENTS

Field 1 Text Preceded by *RS 04 FS*
Field 2 Text Preceded by *FS SPACE FS*
Field 3 Text Preceded by *FS SPACE FS*
Field 4 Text Preceded by *FS SPACE FS*, terminated by *CR LF*

RECORD 5: CHINESE (or similar) RECIPIENTS

Field 1 Text Preceded *RS 05 FS*
Field 2 Text Preceded by *FS SPACE FS*
Field 3 Text Preceded by *FS SPACE FS*
Field 4 Text Preceded by *FS SPACE FS*
Field 5 Text Preceded by *FS SPACE FS*, terminated by *CR LF*

The records and fields for the Honours lists are as follows:

Field	*Content*	*Field name*	*Example*
RECORD 0: AWARD MAIN TITLE			
0a	Text	Award main title	ORDER OF THE BATH
RECORD 1: AWARD SUB TITLE, MILITARY INDICATOR COMMONWEALTH COUNTRY or PAGE HEADER			
1a	Text	Award sub title	Companion
1a	Text	Military Indicator	ARMY
1a	Text	Commonwealth Country	NEW ZEALAND
1a	Text	Page Header	DIPLOMATIC AND OVERSEAS LIST
RECORD 2: AWARD INITIALS			
2a	Text	Award Initials	CB

RECORD 3: NON-CHINESE RECIPIENTS

3a	Text	Title & Forename	Henry
3b	Text	Surname	Smith
3c	Text	Decorations and Awards	OBE
3d	Text	Details/biog	Department of Energy.
3e	Text	Place of residence	

RECORD 4: CHINESE (or similar) RECIPIENTS

4a	Text	Surname	Chung
4b	Text	Title & Forename	Woon-ming
4c	Text	Decorations and Awards	
4d	Text	Details/biog	Senior transport supervisor.

RECORD 5: CHINESE (or similar) RECIPIENTS

5a	Text	Title & Forename	Harold
5b	Text	Surname	Wong
5c	Text	Family name	Ho-ching
5d	Text	Decorations and Awards	
5e	Text	Details/biog	Senior clerical officer.

OUTPUT EXAMPLE
HSA1234 2 HDA BT 957 PA
1 HONOURS List See Embargo
*rs*00*fs*ORDER OF THE BATH
*rs*02*fs*GCB
*rs*03*fs*Sir Terence Michael*fs fs*Heiser,*fs fs*CBE*fs fs*Permanent Secretary, Department of the Environment.*fs fs*
*rs*02*fs*KCB
*rs*03*fs*James*fs fs*Nursaw,*fs fsfs fs*Her Majesty's Procurator General and Treasury Solicitor. *fs fs*
*rs*03*fs*Douglas Boucher*fs fs*Smith,*fs fsfs fs*chairman, Advisory, Conciliation and Arbitration Service. *fs fs*
*rs*03*fs*Nigel Leonard*fs fs*Wicks,*fs fsfs fs*Second Permanent Secretary (Finance), Her Majesty's Treasury. *fs fs*
*rs*02*fs*CB
*rs*03*fs*Michael Ellis*fs fs*Abrams,*fs fsfs fs*Deputy Chief Medical Officer, Department of Health. *fs fs*
*rs*03*fs*Hugh Maben*fs fs*Barclay,*fs fs*OBE*fs fs*lately Clerk of Public Bills. House of Commons. *fs fs*
*rs*03*fs*John Wilson*fs fs*Lloyd,*fs fsfs fs*deputy secretary. Welsh Office. *fs fs*
*rs*03*fs*William Ian*fs fs*Macintyre,*fs fsfs fs*Department of Energy. *fs fs*
*rs*03*fs*Peter*fs fs*Jefferson-Smith,*fs fsfs fs*deputy chairman, Her Majesty's Customs and Excise. *fs fs*
*rs*03*fs*John Michael Medlicott*fs fs*Vereker,*fs fsfs fs*deputy secretary. Department of Education and Science. *fs fs*
*rs*03*fs*Christopher Roy*fs fs*Walker,*fs fs*MBE*fs fs*Cabinet Office. *fs fs*

OUTPUT EXAMPLE - (to include Chinese names)
HSA1234 2 HDA BT 957 PA
10 HONOURS List See Embargo
*rs*01*fs*DIPLOMATIC AND OVERSEAS LIST
*rs*00*fs*ORDER OF THE BRITISH EMPIRE
*rs*02*fs*OBE
*rs*05*fs*Dr Edward*fs fs*Leong*fs fs*Che-Hung*fs fsfs fs*for public services in Hong Kong.
*rs*05*fs*Laurence*fs fs*Leung*fs fs*Ming-yin*fs fs*Director of Immigration, Hong Kong.
*rs*05*fs*Professor*fs fs*Tam*fs fs*Sheung-wai*fs fs*Pro-Vice Chancellor. Chinese University of Hong Kong.
*rs*03*fs*David John*fs fs*Theobald,*fs fsfs fs*Field Manager. British Council Primary Education Project, India. *fs fs*
*rs*03*fs*Clive Howard*fs fs*Woodland,*fs fs*First Secretary and Consul General, H.M. Embassy, Riyadh. *fs fs*
*rs*02*fs*MBE
*rs*04*fs*Lam*fs fs*Sui-fan*fs fs*Senior Assistant Commissioner. Civil Aid Services. Hong Kong.
*rs*03*fs*Maj Philemon Graham Marshall*fs fs*Lee,*fs fs*for services to the British community in Johore, Malaysia. *fs fs*
*rs*05*fs*Mrs Margaret*fs fs*Li Wong*fs fs*Man-wan*fs fs*Principal Nursing Officer. Department of Health, Hong Kong.
*rs*04*fs*Lo*fs fs*Chi-yuen*fs fs*Assistant Director, Housing Department Hong Kong.