




Thapa Technical JavaScript Complete Course

Kodyfier.com – Online Classes

THAPA TECHNICAL

COURSE TOPICS



BASICS

- How Website Works?
- What is JavaScript?
- History of JavaScript
- Values & Variables
- Data Types in JavaScript
- Concat & Type Coercion
- Operators & Expression
- If Statements & Loops
- Functions in JavaScript
- Arrays in JavaScript
- Strings in JavaScript
- Math Object
- Date & Time in JavaScript

ADVANCED

- EcmaScript 2015 - 2024
- Window Objects –
BOM vs DOM
- Events Objects in JavaScript
- localStorage in JavaScript
- Timing Based Events
- Objects in JavaScript
- OOPs in JavaScript
- Event Propagation
- Advanced Functions
- JSON & FETCH API & other APIs
- Promises, Async-Await
- Error Handling in JavaScript

PRO LEVEL

- How JavaScript Works ?
- 100+ Interview Questions
- 50+ Tips & Tricks
- Notes + List of
Deprecated properties
- 150+ Animated Slides

PROJECT -
**ECOM WEBSITE WITH
HTML, CSS &
JAVASCRIPT** ❤️

Subscribe: ThapaTechnical

How to get Most from Our JavaScript Course?

Code Along: Avoid passively watching the videos. You'll learn **zero JavaScript skills** by just observing.

Code along with me! Get your hands dirty and practice coding yourself.

Use the Timeline: Utilize YouTube's **timeline** feature to skip sections or revisit topics as needed.

Problem-Solving Practice: Attempt coding **challenges independently before watching** the solutions.

Play and Learn: Don't be afraid to mess around with code to understand it better.

Find Help: If you're stuck, look up explanations or ask for help online (**Comment Section / Discord**).

Think Back and Practice: Look back on what you've learned and practice it again (**After 5days**).

Set Targets: Decide what you want to achieve and take small steps to get there. Don't rush.



My recommendation - JavaScript Course

Make a Plan: Consider how much time you can dedicate each day. For instance, watching 1 hour daily will finish the course in 12 days, while 3 hours daily will complete it in 4 days. Adjust your schedule to fit your learning pace.

What I want: You could aim to watch 2 hours of videos and practice for 1 hour each day.

In just 6 days, you'll have a basic understanding of JavaScript.


Bonus: I added JS quizzes in my website, you can go there and see how much you learned.

Kodyfier.com - Online Classes

THAPA TECHNICAL


01

HOW WEBSITE WORKS?

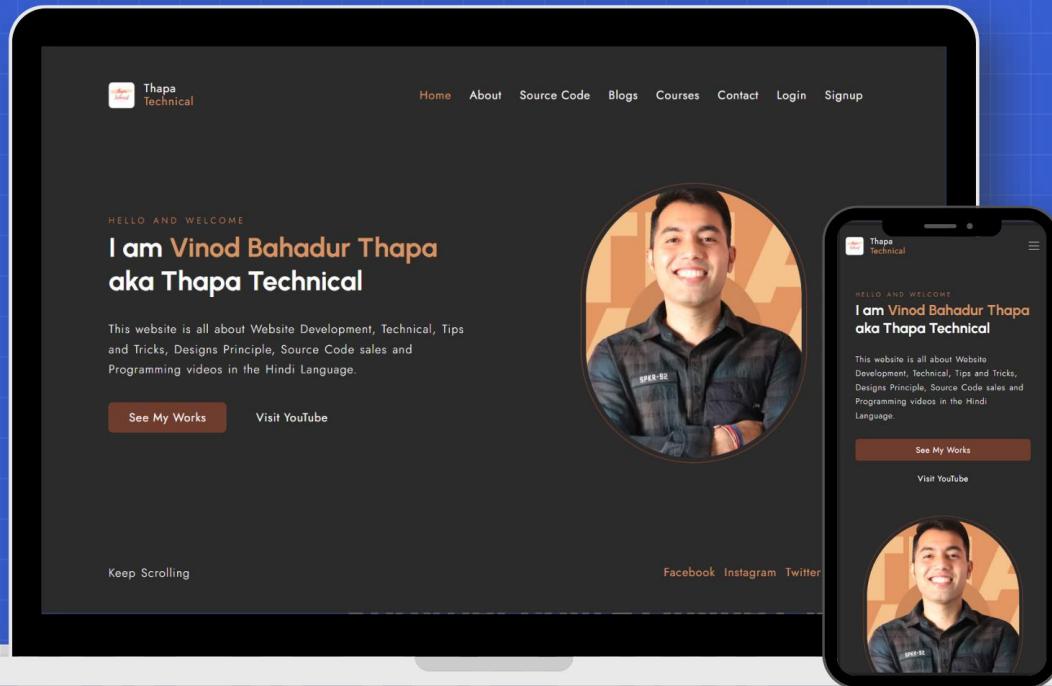


THAPA TECHNICAL

CLIENT VS SERVER

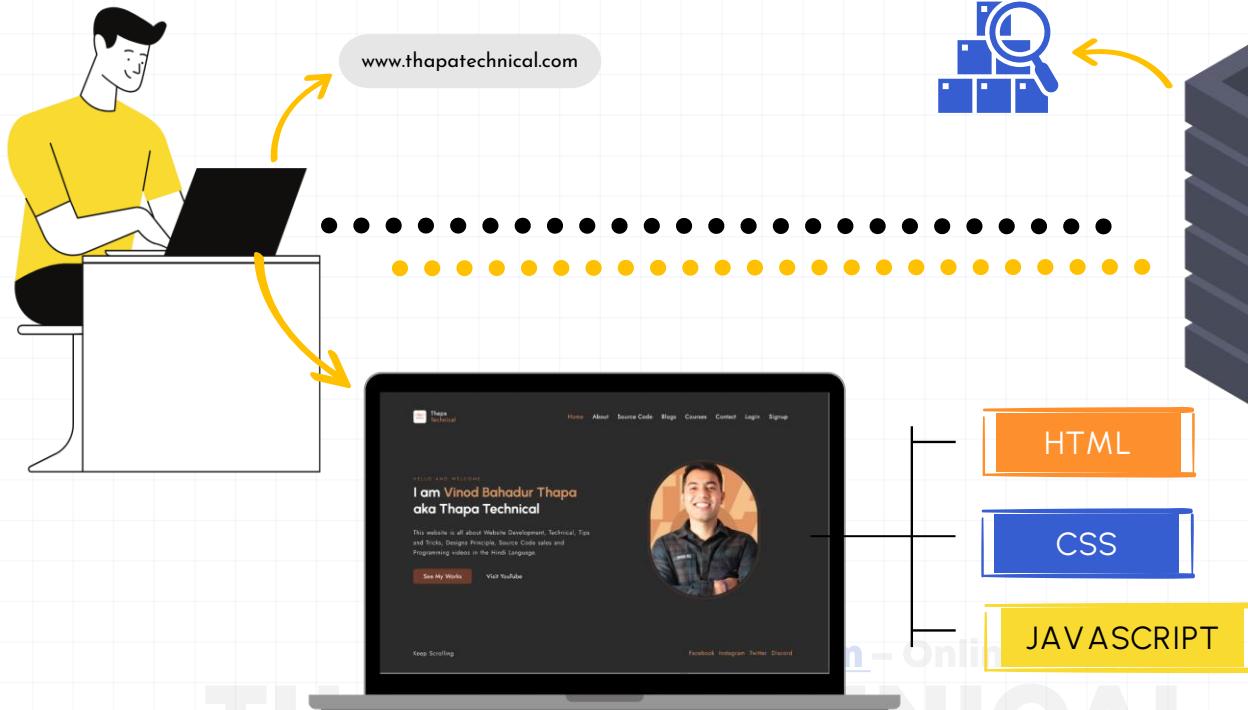

THAPA TECHNICAL

BUILDING BLOCK OF WEBSITE

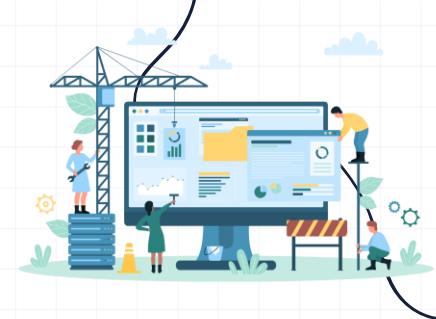

HTML

Provides the structure and content of a webpage.

CSS

Styles and designs the appearance of the webpage

JS

Adds interactivity and dynamic behavior to the webpage.



REAL LIVE EXAMPLE



Kodyfier.com – Online Classes
DATA TECHNICAL

What is **JavaScript**?

JavaScript improves the user experience of the **web page** by converting it from a static page into an **interactive** one.

OR

JavaScript is used to update and change both HTML and CSS. It adds **behavior** to web pages.


Kodyfier.com – Online Classes

THAPA TECHNICAL

[Subscribe: ThapaTechnical](#)

Why JavaScript?

Most used programming languages among developers worldwide as of 2023

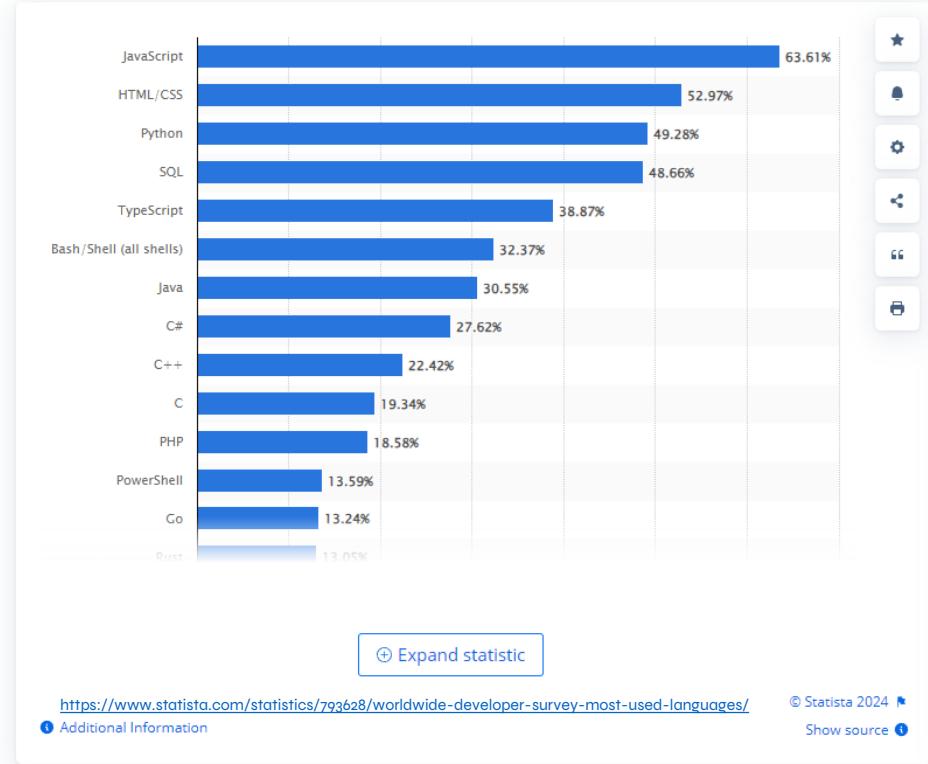



Subscribe: ThapaTechnical

History of JavaScript


In 1995 - Created by **Brendan Eich** at **Netscape** in just **10** days.



Switching from **LiveScript** to **JavaScript** was a smart move to make it sound cooler and piggyback on **Java's** fame, while also cozying up to Sun Microsystems.

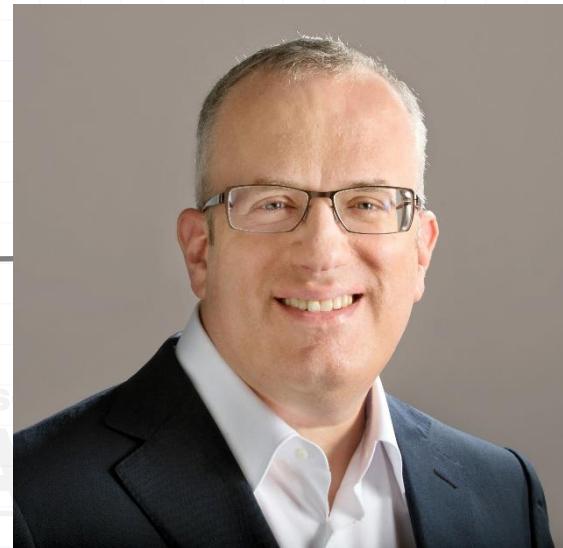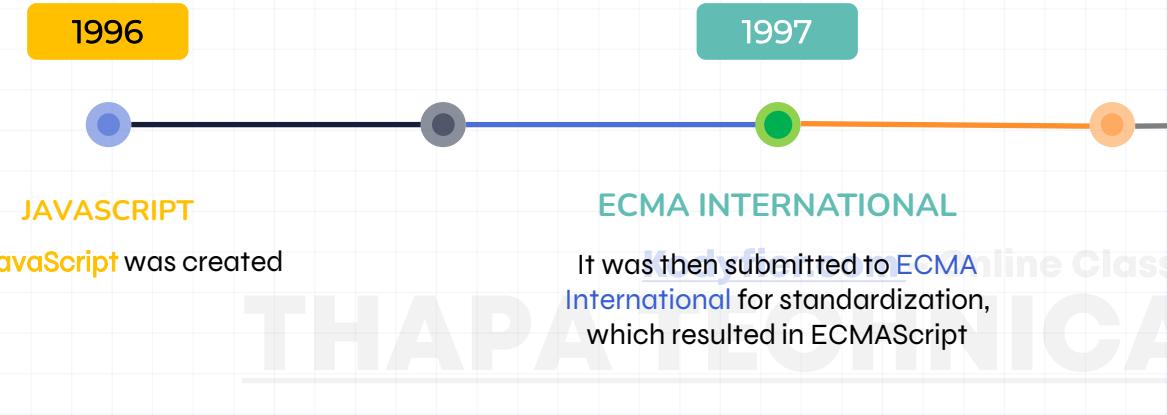


Let's write Our First JavaScript Code in Console

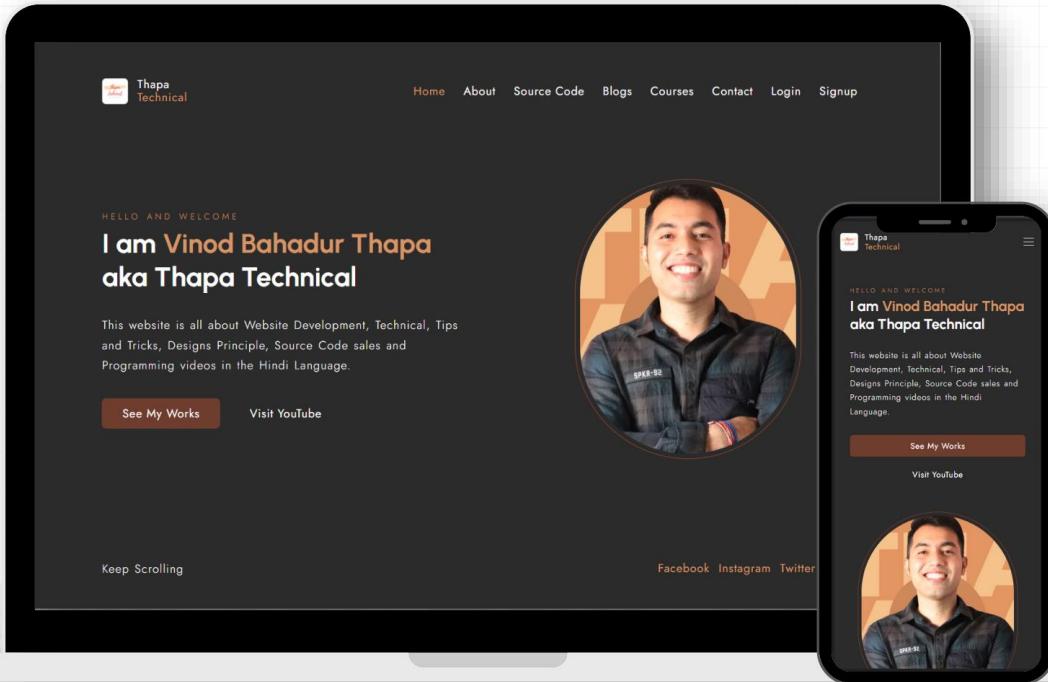

Subscribe. [ThapaTechnical](#)

WAYS TO WRITE JAVASCRIPT

03

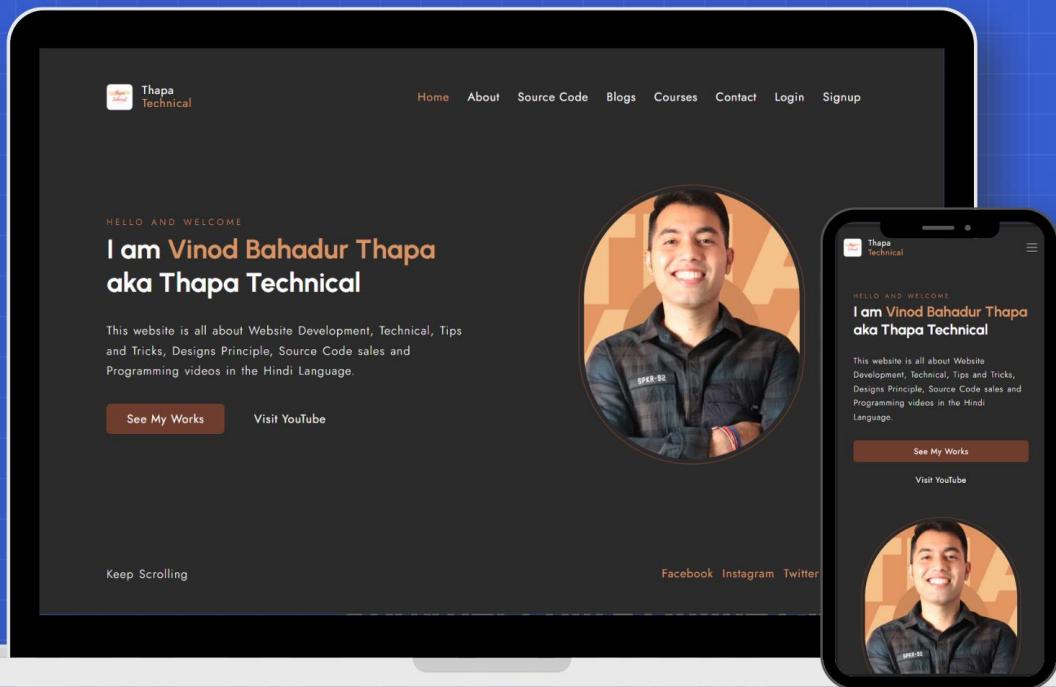

THAPA TECHNICAL

We need a Code Editor



The screenshot shows the Visual Studio Code interface. On the left, the Extensions sidebar lists various extensions: Python, C/C++, Jupyter, ESLint, Prettier, Pylance, and Live Server. The main code editor window displays a JavaScript file named 'serviceWorker.js' with some code. The status bar at the bottom right shows 'Import ext'.


```
src > JS serviceWorker.js > registerValidSW > then() callback > S
57 function registerValidSW(swUrl, config) {
58   navigator.serviceWorker
59     .register(swUrl)
60     .then(registration => {
61       registration.onupdatefound = () => {
62         const installingWorker = registration.installing;
63         if (installingWorker === null) {
64           return;
65         }
66         installingWorker.onstatechange = () => {
67           if (installingWorker.state === 'installed') {
68             if (navigator.serviceWorker.controller) {
69               navigator.serviceWorker
70                 .setInterval()
71                 .setTimeout()
72                 .share()
73                 .state
74                 .mediaSession
75                 .storage
76                 .checkValidServiceWorker
77                 .onSuccess
78                 .importStatement
79                 .requestMediaKeySystemAccess
80             }
81           }
82         }
83       }
84     }
85   }
86 }

JS serviceWorker.js X JS App.js # App.css
```

Kodyfier.com - Online Classes
HAPA TECHNICAL

Inline JavaScript

```
<button onclick="alert('Hello')">Click me</button>
```

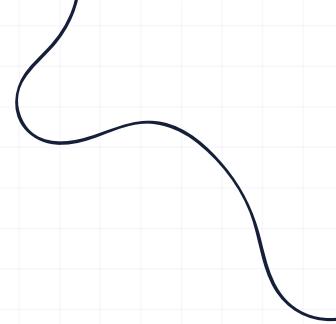

Internal JavaScript

```
<script> console.log('Hello, world!'); </script>
```



External JavaScript

```
<script src="script.js"></script>
```

Kodyfier.com - Online Classes

THAPA TECHNICAL

JAVASCRIPT

* Values &
Variables

Kodyfier.com – Online Classes

THAPA TECHNICAL

Variable Name


A variable is a container(box) that holds a value.

```
var myName = "vinod"
```

The diagram illustrates the components of the JavaScript code `var myName = "vinod";`. A vertical arrow points upwards from the word `myName` to the text **Variable Name**. Another vertical arrow points downwards from `myName` to the text **Variable (key)**. A third vertical arrow points downwards from the assignment operator `=` to the text **Value**, which is positioned next to the string `"vinod"`.

Naming Variables: Rules and Best Practices

- * Variable names must start with a letter, an **underscore** (_) or a **dollar sign** (\$).
- * Variable names cannot contain spaces.
- * By convention, JavaScript variable names are written in **camelCase**.
- * Variables cannot be the same as **reserved keywords** such as if or const.
- * Variable names are **case sensitive**.
- * Variable names can be as long as you need

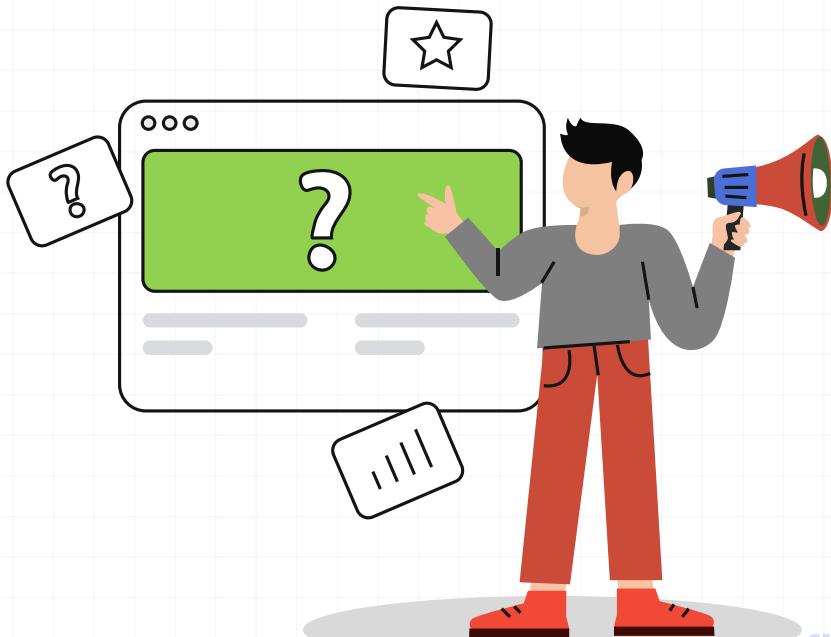

Challenge Time?

Are you ready for the challenge.



THAPA TECHNICAL

[Subscribe: ThapaTechnical](#)

Pause the video & try yourself

Questions



```
var my(firstName = "John";
```

```
var _myLastName$ = "Doe";
```

```
var 123myAge = 25;
```

```
var $cityName = "New York";
```

```
var my@Email = “Thapa@me.com”;
```

Answers



Pause the video & try yourself

Questions



```
var my(firstName = "John";
```

```
var _myLastName$ = "Doe";
```

```
var 123myAge = 25;
```

```
var $cityName = "New York";
```

```
var my@Email = "Thapa@me.com";
```

Answers

* This is a valid variable name.

* This is a valid variable name.

* This is not a valid variable name.

* This is a valid variable name.

* This is not a valid variable name.

JAVASCRIPT

* Data Types

Kodyfier.com – Online Classes

THAPA TECHNICAL

Data Types

Data Types

Primitive Data Types

String

1

Number

2

Boolean

3

Undefined

4

Null

5

Bigint

6

Symbol

7

Object Data Types

An Object

1

An Array

2

A Date

3


Kodytier.com - Online Classes

THAPA TECHNICAL

Subscribe: ThapaTechnical

Interview Questions – Data Types

- 1: What is the difference between **null** and **undefined** in JavaScript ?
- 2: What is the purpose of **typeof** operator in JavaScript ?
- 3: What is the result of `typeof null` in JavaScript ?
- 4: What are **primitive data types** in JavaScript ?
- 5: Explain the concept of **truthy and falsy** values in JavaScript. Provide examples ?

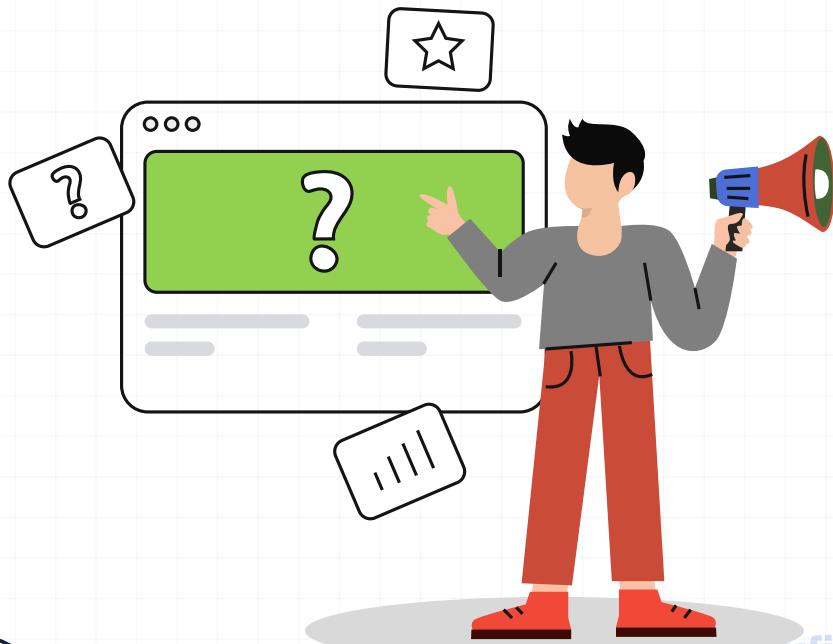

Challenge Time?

Are you ready for the challenge.



THAPA TECHNICAL

Subscribe: ThapaTechnical

Wait!!!



Explore more
for a solid
understanding

I want you to understand it thoroughly.



kodyfier.com - Online Cr

THAPA TECHNICAL

Subscribe: ThapaTechnical

More on Data Types

- a. 10 + "20"
- b. 9 - "5"
- c. "Java" + "Script"
- d. " " + " "
- e. " " + 0
- f. "vinod" - "thapa"
- g. true + true
- h. true + false
- i. false + true


JAVASCRIPT

* Expressions & operators

Kodyfier.com – Online Classes

THAPA TECHNICAL

Expression

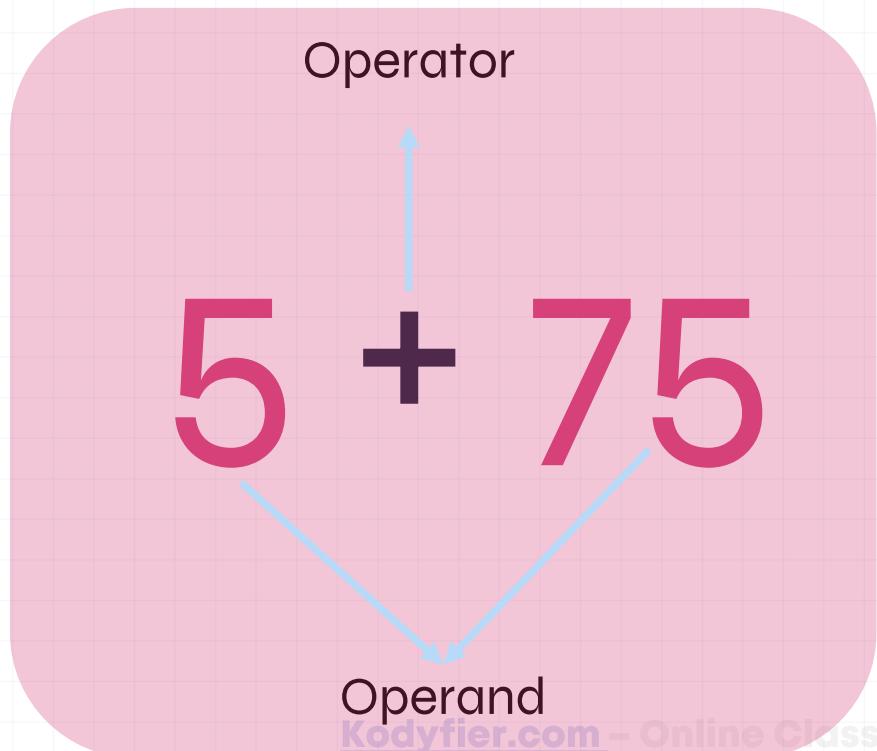

Operator

Kodyfier.com - Online Classes

Operand

THAPA TECHNICAL

Subscribe: ThapaTechnical

Types of Operators




Kodyfied.com - Online Classes


THAPA TECHNICAL

Subscribe: ThapaTechnical

How Logical OR Operator Works?

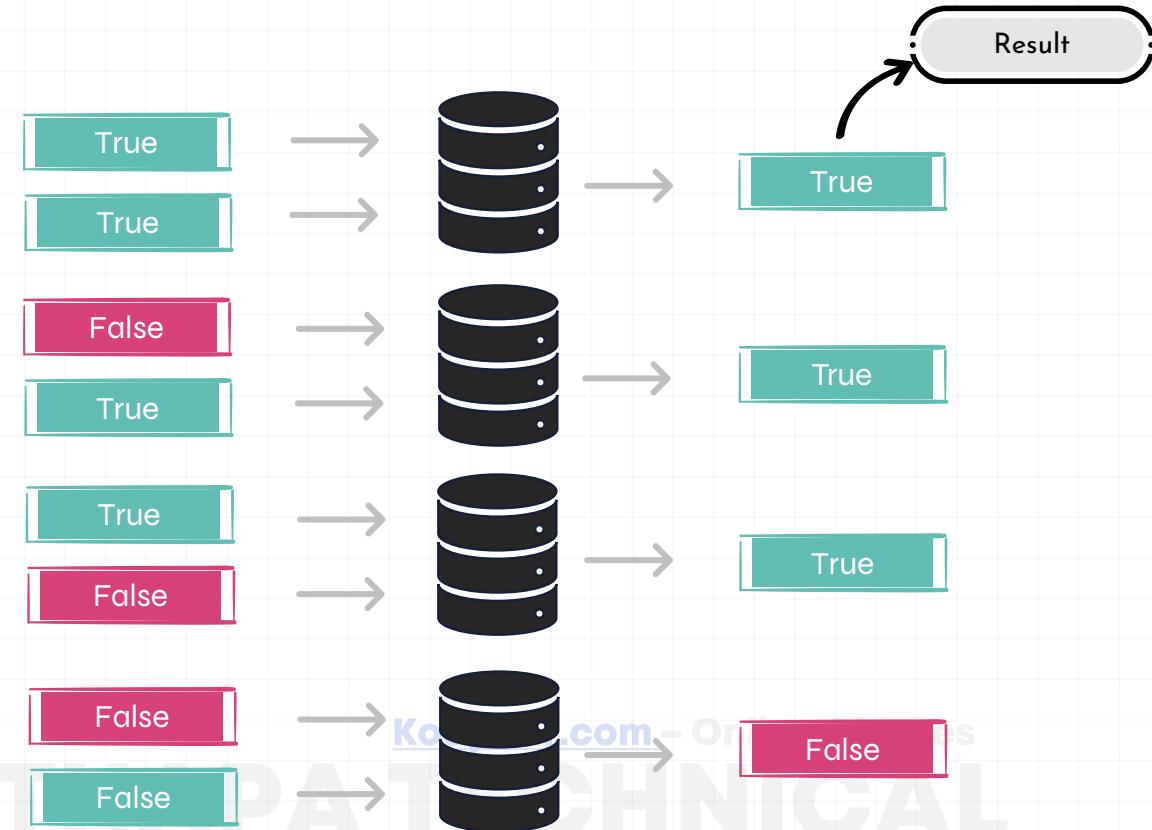

How Logical AND Operator Works?

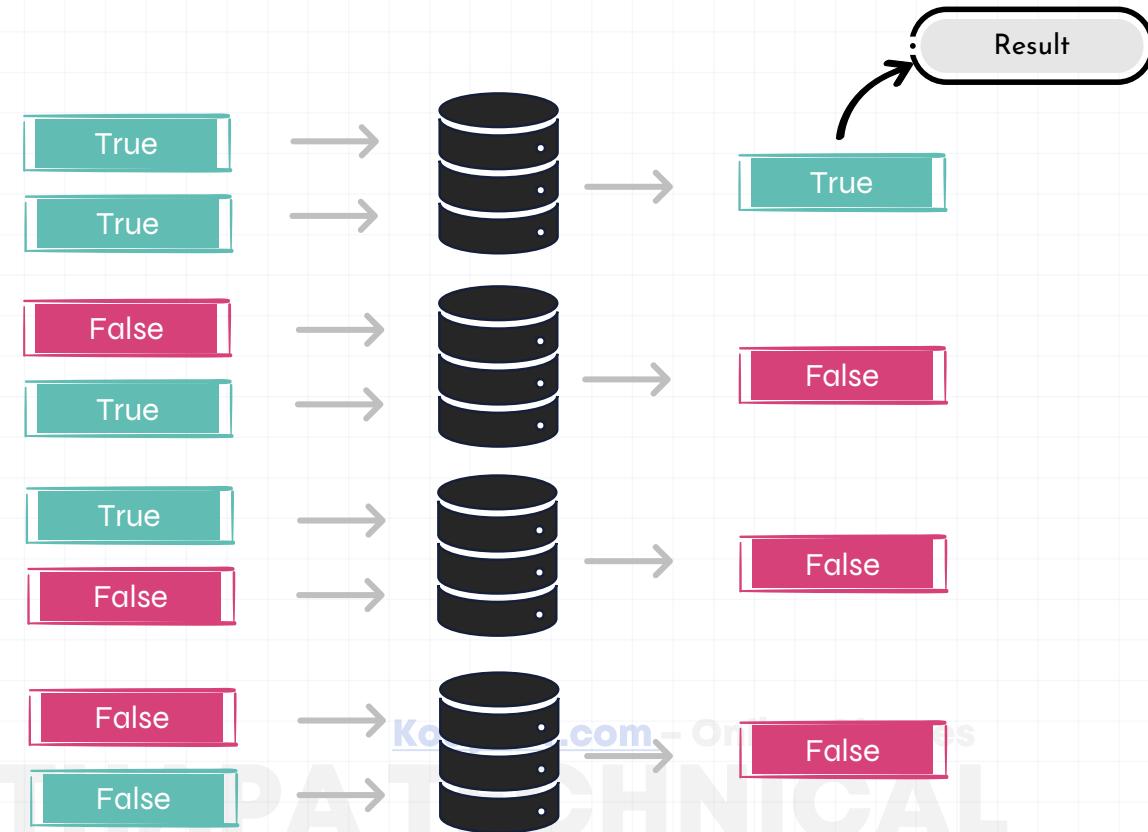

Ternary Operator

Syntax:

condition ? expressionIfTrue : expressionIfFalse;

We get the output, If
condition is true

We get the output, If
condition is false



Kodyfier.com - Online Classes

THAPA TECHNICAL

Subscribe: ThapaTechnical

Wait!!!



Interview Questions

I want you to understand it thoroughly.



kodyfier.com - Online Cr

THAPA TECHNICAL

Subscribe: ThapaTechnical

```
console.log("5" - 3);
```

2 (Type Coercion)

True (Exp. evaluates from
Left to Right)

```
console.log(2 < 12 < 5);
```

```
console.log("20" + 10 + 10);
```

'201010' (same as 2nd)

JAVASCRIPT

* Control Statement

& loops

Kodyfier.com – Online Classes

THAPA TECHNICAL

Control Statements & Loops

1 If.. Else Statement

2 Switch Statement

3 While Loop

4 Do While Loop

5 For Loop

6 For In / For Of Loop
(Later in Arrays)

Kodyfier.com - Online Classes

THAPA TECHNICAL

Subscribe: ThapaTechnical

Syntax – If Else

```
if (condition) {  
    // Code to be executed if the condition is true  
} else {  
    // Code to be executed if the condition is false  
}
```

Kodyfier.com - Online Classes

THAPA TECHNICAL

[Subscribe: ThapaTechnical](https://ThapaTechnical.com)

Example – If Statement


```
var temp = 40;
```

```
if (temp > 30) {  
    console.log("Let's go to Beach 🏊♂️")  
} else {  
    console.log("Watch TV at Home 😊")  
}
```



If Else Statement

- 1: Write a program to check if a number is even or odd.
- 2: Write a program to check if a number is prime.
- 3: Write a program to check if a number is positive, negative, or zero.

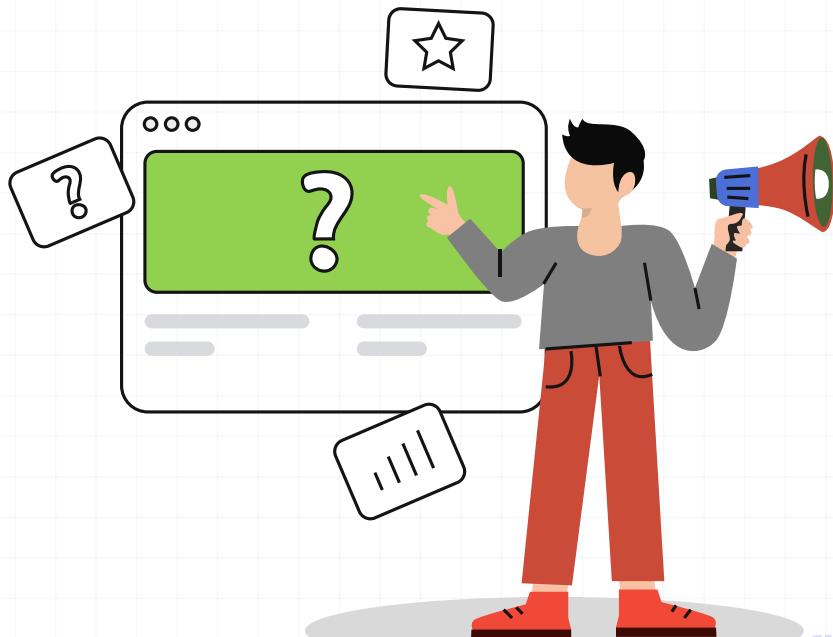

Challenge Time?

Are you ready for the challenge.



THAPA TECHNICAL

[Subscribe: ThapaTechnical](http://ThapaTechnical.com)

Challenge No:

Switch Statement

Q: Write a JavaScript **switch statement** that takes a variable `areaOfShapes` representing different shapes, and based on its value, calculates and logs the area of the corresponding shape. Consider three shapes: '`Rectangle`,' '`Circle`,' and '`Square`.' For '`Rectangle`,' use variables `a` and `b` as the sides; for '`Circle`,' use a variable `r` as the radius; and for '`Square`,' use variable `a` as the side length. If the provided shape is not recognized, log a message saying, '`Sorry the shape is not available.`' Test your switch statement with `areaOfShapes` set to '`Square`' and sides `a` and `b` set to `5` and `10`, respectively. Ensure that the correct area (`25` in this case) is logged to the console.

Syntax - While Loop

```
while (condition) {  
    // Code to be executed as long as the  
    condition is true  
}
```

Kodyfier.com - Online Classes

THAPA TECHNICAL

[Subscribe: ThapaTechnical](https://ThapaTechnical.com)

Syntax – Do-While Loop

```
do {  
    // Code to be executed at least once  
} while (condition);
```

Kodyfier.com - Online Classes

THAPA TECHNICAL

[Subscribe: ThapaTechnical](https://ThapaTechnical.com)

Syntax - For Loop

```
var num = 10;           num < 10           num++  
↑                 ↑                 ↑  
for(initializer; condition; iteration)  
{  
    // Code to be executed  
}
```

Syntax – While Loop

```
let i=1;  
while (i <= 10) {  
    console.log(i);  
    i++;  
}
```

Initialization: *i=1*

Condition: *(i <= 10)*

Iteration: *i++*

Kodyfier.com - Online Classes

THAPA TECHNICAL


Subscribe: ThapaTechnical

Syntax – Do-While Loop

```
let i=1;           Initialization  
do{  
    console.log(i);  
    i++;           Iteration  
} while (i<=10) Condition
```

Syntax – For Loop

```
initializer    condition    iteration  
↑             ↑             ↑  
for (let i=1; i <= 10; i++){  
    console.log(i);  
}
```

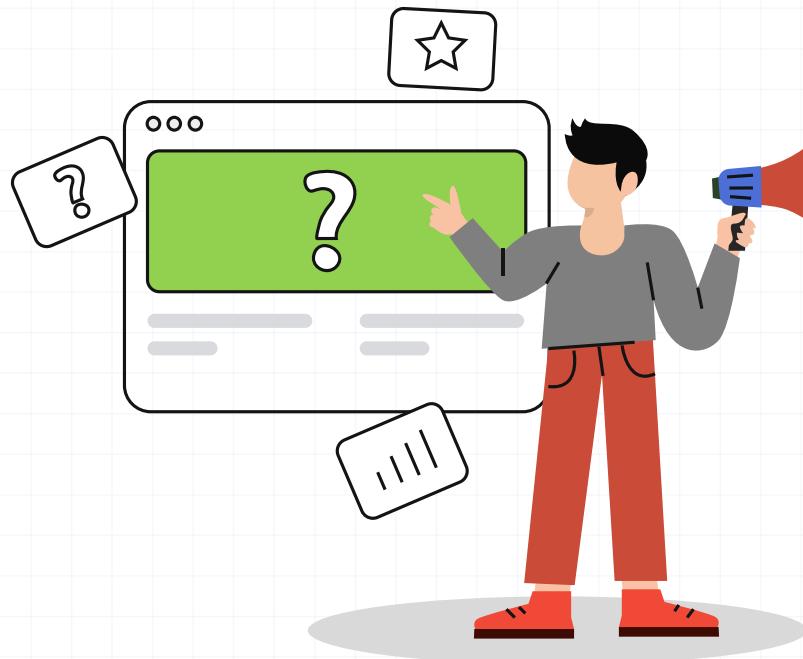

Challenge Time?

Are you ready for the challenge.



Kodyfier.com - Online Class

THAPA TECHNICAL

Subscribe: ThapaTechnical


For Loop

Program To check if a year is
a **leap year**, 

If a year is **divisible by 4** and
not **divisible by 100**, or

If a year is **divisible by 400**,
then it is a leap year.


Otherwise, it is not a leap year.

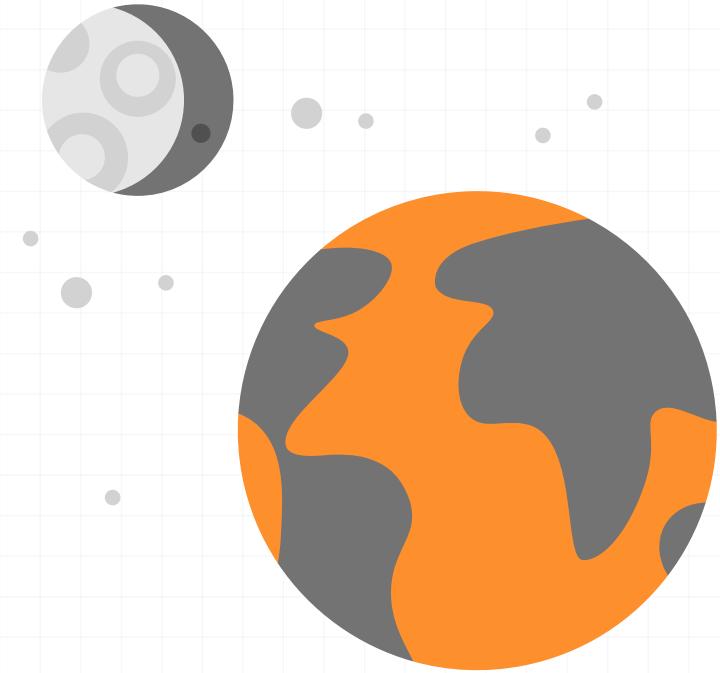

Kodyfier.com - Online Classes

THAPA TECHNICAL

Subscribe: ThapaTechnical

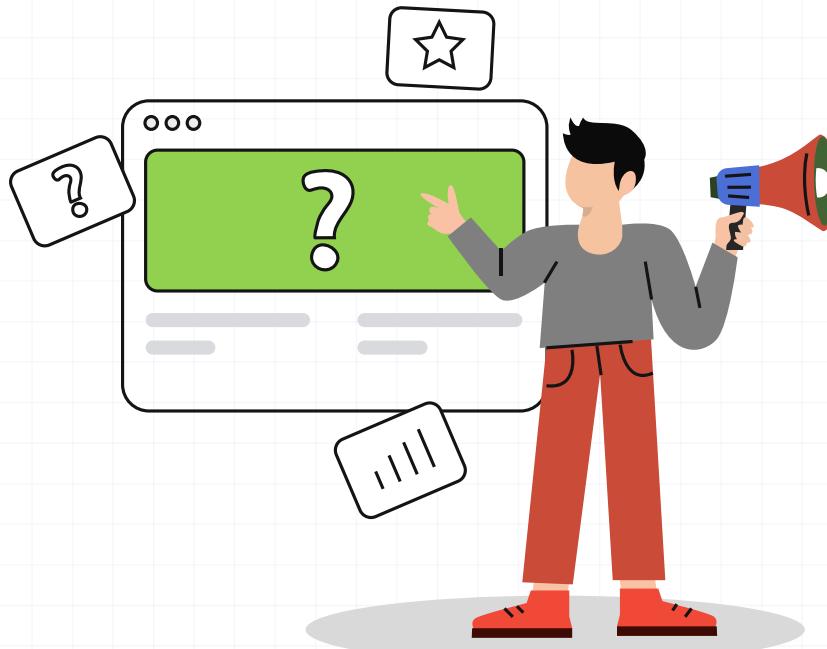

Challenge Time?

Are you ready for the challenge.



Kodyfier.com - Online Class

THAPA TECHNICAL

Subscribe: ThapaTechnical

For Loop

	J=1	J=2	J=3	J=4	J=5
I=1	*				
I=2	*	*			
I=3	*	*	*		
I=4	*	*	*	*	
I=5	*	*	*	*	*

logic I == J => print *

THAPA TECHNICAL

Subscribe: ThapaTechnical

For Loop

	J=1	J=2	J=3	J=4	J=5
I=1	*				
I=2					
I=3					
I=4					
I=5					

logic I == J => print *

THAPA TECHNICAL

Subscribe: ThapaTechnical

For Loop

	J=1	J=2	J=3	J=4	J=5
I=1	*				
I=2	*	*			
I=3					
I=4					
I=5					

logic I == J => print *

THAPA TECHNICAL

Subscribe: ThapaTechnical

For Loop

	J=1	J=2	J=3	J=4	J=5
I=1	*				
I=2	*	*			
I=3	*	*	*		
I=4					
I=5					

logic I == J => print *

THAPA TECHNICAL

Subscribe: ThapaTechnical

For Loop

	J=1	J=2	J=3	J=4	J=5
I=1	*				
I=2	*	*			
I=3	*	*	*		
I=4	*	*	*	*	
I=5					

logic I == J => print *

THAPA TECHNICAL

Subscribe: ThapaTechnical

For Loop

	J=1	J=2	J=3	J=4	J=5
I=1	*				
I=2	*	*			
I=3	*	*	*		
I=4	*	*	*	*	
I=5	*	*	*	*	*

logic I == J => print *

THAPA TECHNICAL

Subscribe: ThapaTechnical

JAVASCRIPT * Functions

Kodyfier.com – Online Classes

THAPA TECHNICAL

JavaScript Function

In JavaScript, a **function** is a block of reusable code that performs a specific task or set of tasks. Functions are used to **organize code into modular** and manageable pieces, promote **code reuse**, and make programs **more readable**.

```
function functionName(parameters) {  
    // code to be executed  
    return result; // optional return statement  
}
```

Kodyfier.com - Online Classes

THAPA TECHNICAL

Subscribe: ThapaTechnical

JavaScript Function

In JavaScript, a **function** is a block of reusable code that performs a specific task or set of tasks. Functions are used to **organize code into modular** and manageable pieces, promote **code reuse**, and make programs **more readable**.

```
function functionName(parameters) {  
    // code to be executed  
    return result; // optional return statement  
}
```

Kodyfier.com - Online Classes

THAPA TECHNICAL

Subscribe: ThapaTechnical

What we will cover

1 Function Declaration

4 Function Argument

7 Return Keyword

2 Function Invocation

5 Function expressions

8 IIFE (Immediately Invoked Function expression)

3 Function Parameter

6 Anonymous Function

9 More we will see in advanced

Syntax – Function Declaration

```
function  
Keyword      function Name  
function greet() {  
    console.log("Welcome to Thapa Technical JS  
    Course ");  
}  
                                function Body
```

Kodyfier.com - Online Classes


THAPA TECHNICAL

Subscribe: ThapaTechnical

Syntax – Function Invocation

```
function greet() {  
    console.log(" Welcome to Thapa Technical JS Course ");  
}  
  
greet()
```

We need to call the function name

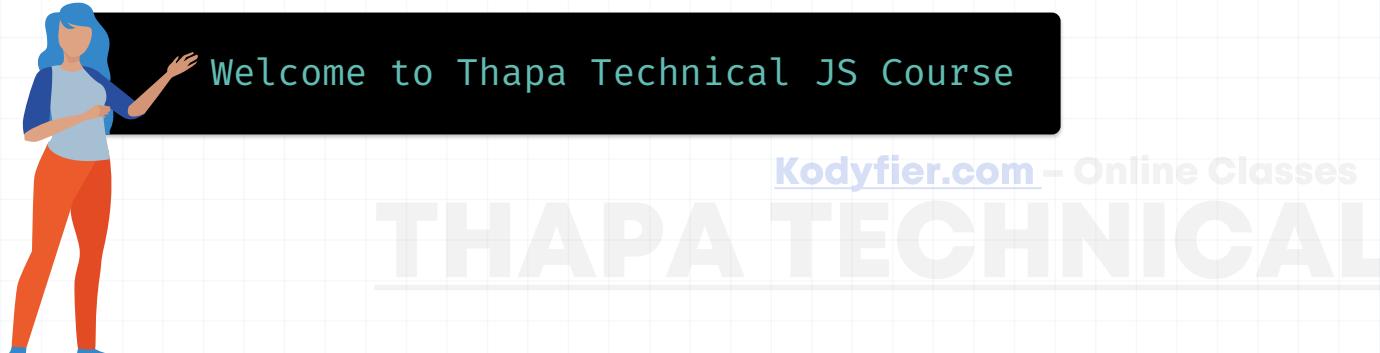

Syntax – Function Parameter

```
function greet(parameter1) {  
    console.log(" Best JS Course ");  
}
```

We need to add values here (parameter)

We need to call the function name

```
greet()
```

Syntax – Function Parameter

```
function greet(parameter1, parameter2) {  
    console.log(" Best JS Course ");  
}
```

We need to call the function name
greet()


Syntax – Function Parameter

```
function greet(parameter1, parameter2, ...)  
{  
    console.log(" Best JS Course ");  
}
```

We need to call the function name
greet()

Syntax – Function Argument


```
function greet(parameter1, parameter2, ...)  
{  
    console.log(" Best JS Course ");  
}
```

 We need to call the function name

greet(argument1)

Syntax – Function Argument

```
function greet(parameter1, parameter2, ...)  
{  
    console.log(" Best JS Course ");  
}
```

 We need to call the function name

greet(argument1, argument2)

Syntax – Function Argument

```
function greet(parameter1, parameter2, ...)  
{  
    console.log(" Best JS Course ");  
}
```

 We need to call the function name

```
greet(argument1, argument2, ...)
```

Interview Questions – Function

- 1: **Reverse a String:** Write a function to reverse a given string **without** using built-in reverse methods.

- 2: **Palindrome Check:** Create a function to determine if a given string is a **palindrome** (reads the same backward as forward).

- 3: **Calculator Function:** Write a JavaScript function calculator that takes two numbers and an operator as parameters and returns the result of the operation. The function should support addition, subtraction, multiplication, and division.

World Best JavaScript

JAVASCRIPT

* ECMAScript

Kodyfier.com – Online Classes

THAPA TECHNICAL

EcmaScript Timeline



JAVASCRIPT

JavaScript was created

1997

ECMA INTERNATIONAL

It was then submitted to [ECMA International](#) for standardization, which resulted in EcmaScript

2015

ES6 / EcmaScript 2015


Decided to switch to [annual](#) releases of EcmaScript

[Kodyfier.com](#) - Online Classes

THAPA TECHNICAL

Subscribe: ThapaTechnical

Timeline

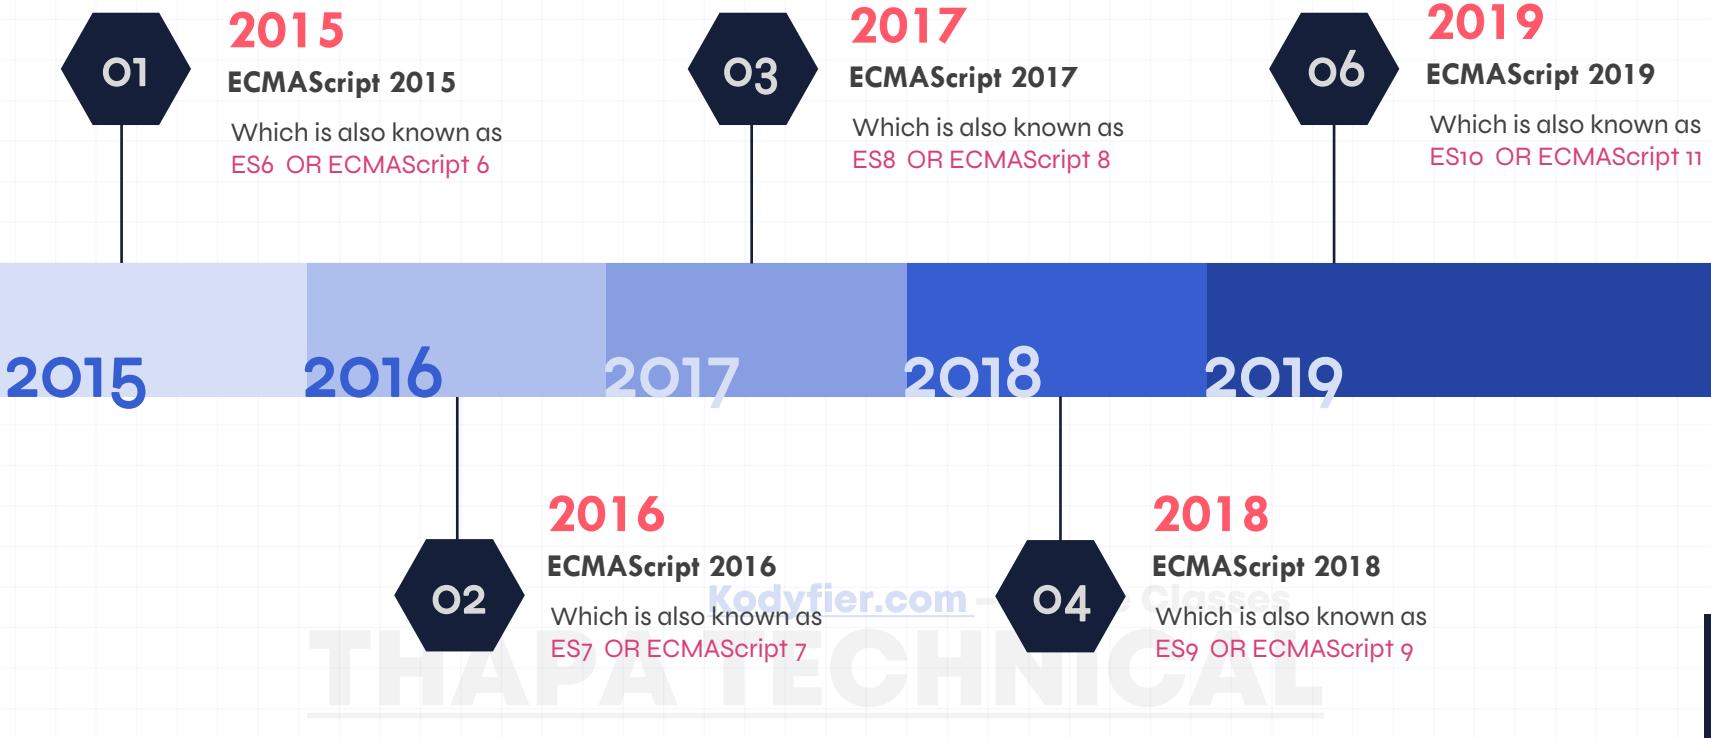

Timeline



2020

2021

2022

2023

2024

08

2021

ECMAScript 2021

Which is also known as
ES13 OR ECMAScript 13

10

2023

ECMAScript 2023

Which is also known as
ES15 OR ECMAScript 15

01

ECMAScript 2015 / ES6



LET AND CONST



TEMPLATE STRINGS



DEFAULT ARGUMENTS



ARROW FUNCTION



DESTRUCTURING



OBJECT PROPERTIES



REST OPERATORS



SPREAD OPERATORS

Kodyfier.com - Online Classes

THAPA TECHNICAL

Subscribe: ThapaTechnical

Interview Questions – Function

- 1: **Reverse a String:** Write a function to reverse a given string **without** using built-in reverse methods.

- 2: **Palindrome Check:** Create a function to determine if a given string is a **palindrome** (reads the same backward as forward).

- 3: **Calculator Function:** Write a JavaScript function calculator that takes two numbers and an operator as parameters and returns the result of the operation. The function should support addition, subtraction, multiplication, and division.

World Best JavaScript

JAVASCRIPT * ARRAYS

Kodyfier.com – Online Classes

THAPA TECHNICAL

JavaScript Array



Ram




Hari



Sita



Bishal



Gita

Imagine you want to store collection of people names.

Kodyfier.com - Online Classes

THAPA TECHNICAL

const person1 = Ram 

const person2 = Hari 

const person3 = Sita 

const person4 = Bishal 

const person5 = Gita 

You will think of doing something like this.

Kodyfier.com - Online Classes

THAPA TECHNICAL


```
const person1 = Ram
```

```
const person2 = Hari
```

```
const person3 = Sita
```

```
const person4 = Bishal
```


```
const person5 = Gita
```

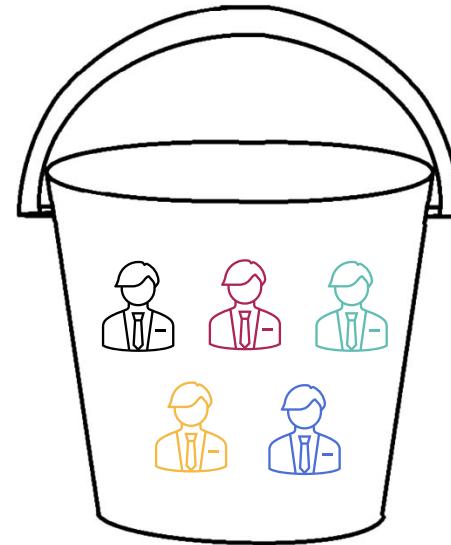

What if we could store all of these into a bucket?

Kodyfier.com - Online Classes

THAPA TECHNICAL

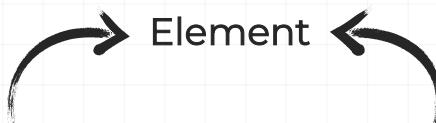

```
const persons = [ "Ram", "Hari", "Sita", "Bishal", "Gita" ];
```




That's what array is for.

JavaScript array is an object that represents a collection of similar type of elements.

Each value(name) will be called as an Element.

THAPA TECHNICAL

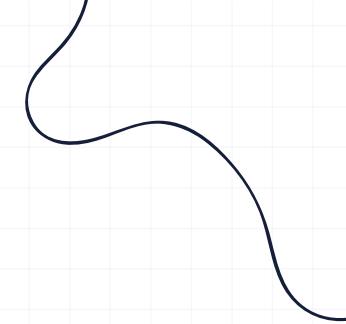

Index Number	0	1	2	3	4
--------------	----------	----------	----------	----------	----------

```
const persons = [ "Ram", "Hari", "Sita", "Bishal", "Gita" ];
```



In arrays, each element is represented by an index which starts with zero.

Kodyfier.com - Online Classes

THAPA TECHNICAL

Index Number

0

1

2

3

4

```
const persons = [ "Ram", "Hari", "Sita", "Bishal", "Gita" ];
```




```
persons[0]; // Ram
```

```
persons[1]; // Hari
```

And we can access each element by using indexes

[Kodifyer.com](https://www.kodifyer.com) - Online Classes

THAPA TECHNICAL

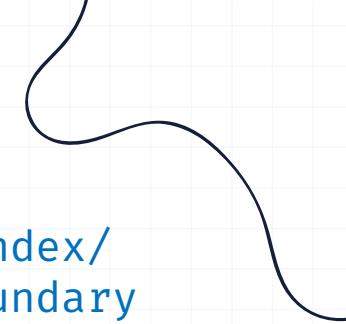

Lower Index/
Lower Boundary

```
const persons = [ "Ram", "Hari", "Sita", "Bishal", "Gita" ];
```




Upper Index/
Upper Boundary

First element or head: Refers to the element at index 0.

Last element or tail: Refers to the element at the last index,
which can be obtained using `array.length - 1`.

Lower Index/
Lower Boundary

```
const persons = [ "Ram", "Hari", "Sita", "Bishal", "Gita" ];
```

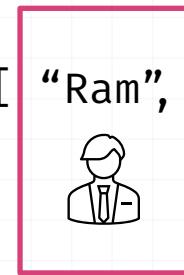

Upper Index/
Upper Boundary


```
persons[-1] // ERROR  
persons.at(-1) // Gita  
persons.at(-2) // Bishal
```

ECMAScript 2022 also introduces new `.at()` method in arrays which helps to index from last elements too easily.

Kodyfier.com Online Classes
THAPATECHNICAL

What we will cover

- * Creating Arrays / Accessing Elements / Modifying Elements
- * Array Traversal / Iterating Over Arrays
- * How to Insert, Add, Replace and Delete Elements in Array(CRUD)
- * Searching in an Array
- * Filter in an Array
- * How to Sort and Compare an Array
- * Very Very Important Array Methods

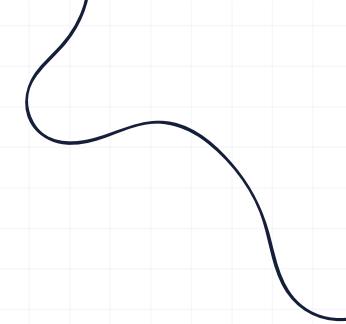

Index Number

0

1

2

3

4

```
const persons = [ "Ram", "Hari", "Sita", "Bishal", "Gita" ];
```



In arrays, each element is represented by an index which starts with zero.

Kodyfier.com - Online Classes

THAPA TECHNICAL

Push()

Push Method: The Push Method that adds one or more elements to the end of an array.

Syntax: `push(Element)`

```
persons.push('Gita')
```

Index Number	=	0	1	2	3
--------------	---	---	---	---	---

```
const persons = ["Ram", "Hari", "Sita", "Bishal"];
```



Kodyfier.com - Online Classes

THAPA TECHNICAL

Subscribe: ThapaTechnical

Push()

Push Method: The Push Method that adds one or more elements to the end of an array.

Syntax: `push(Element)`

Index Number

0

1

2

3

4

```
const persons = ["Ram", "Hari", "Sita", "Bishal", "Gita"];
```



Gita added at the end of the array

`persons.push('Gita')`

Kodyfier.com - Online Classes

THAPA TECHNICAL

Subscribe: ThapaTechnical

Pop()

Pop Method: Method that removes the last element from an array.

Syntax: `pop(Element)`

Index Number

0

1

2

3

4

```
const persons = ["Ram", "Hari", "Sita", "Bishal", "Gita"];
```



Gita will be removed
`persons.pop('Gita')`

Kodyfier.com - Online Classes

THAPA TECHNICAL

Subscribe: ThapaTechnical

Pop()

Pop Method: Method that removes the last element from an array.

Syntax: `pop(Element)`

Index Number = 0 1 2 3

```
const persons = [ "Ram", "Hari", "Sita", "Bishal" ];
```



Kodyfier.com - Online Classes


THAPA TECHNICAL

Subscribe: ThapaTechnical

indexOf()

indexOf Method: The `indexOf` method returns the first index at which a given element can be found in the array, or `-1` if it is not present.

Syntax: `indexOf(searchElement, fromIndex)`

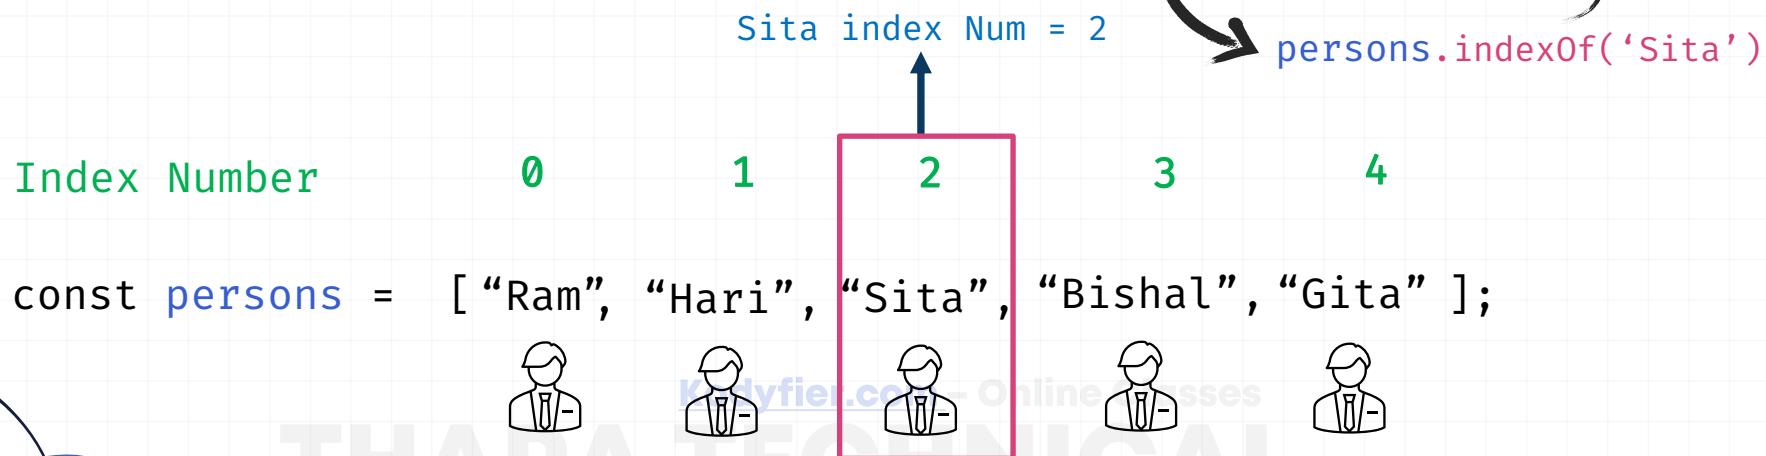


Subscribe: ThapaTechnical

Includes()

Includes Method: The includes method checks whether an array includes a certain element, returning true or false.

Syntax: `Includes(searchElement, fromIndex)`

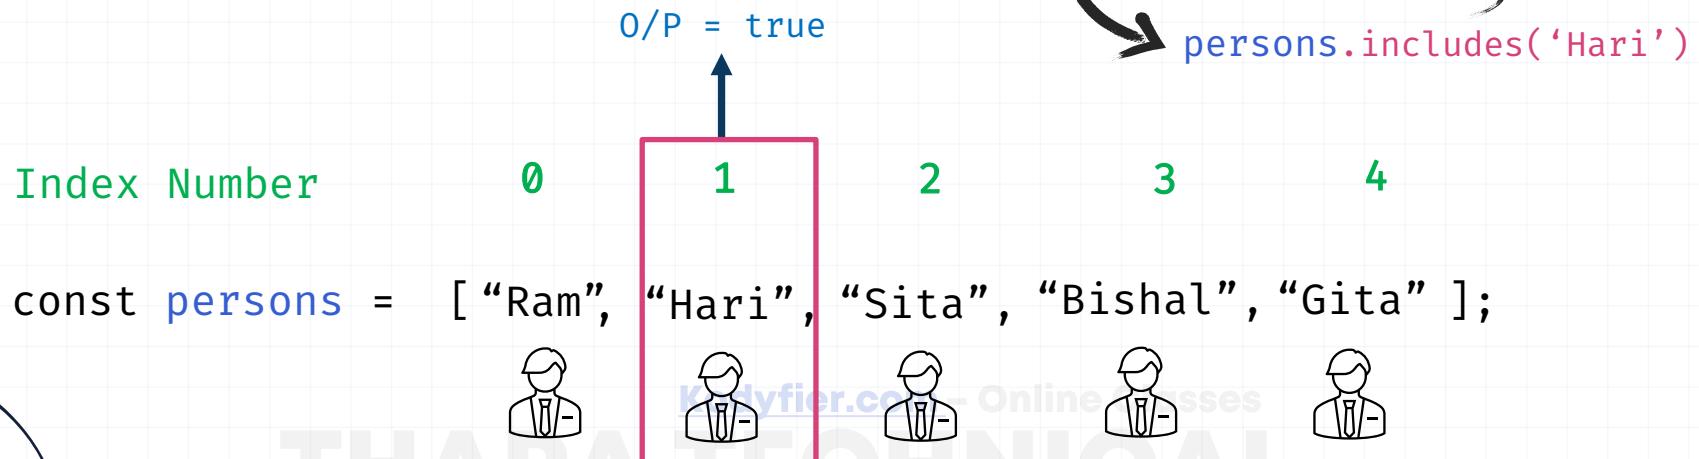


indexOf()

indexOf Method: The `indexOf` method returns the first index at which a given element can be found in the array, or `-1` if it is not present.

Syntax: `indexOf(searchElement, fromIndex)`

Look only the 1st letter

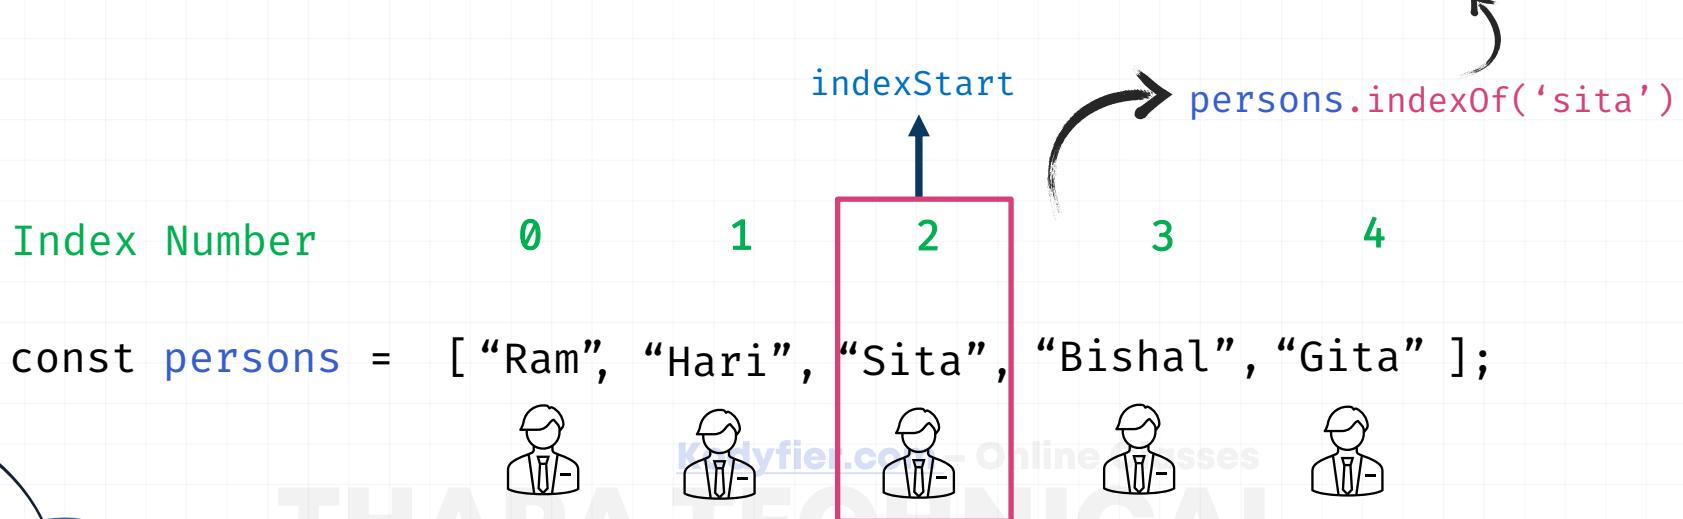



indexOf()

indexOf Method: The `indexOf` method returns the first index at which a given element can be found in the array, or `-1` if it is not present.

Syntax: `indexOf(searchElement, fromIndex)`

Look only the 1st letter

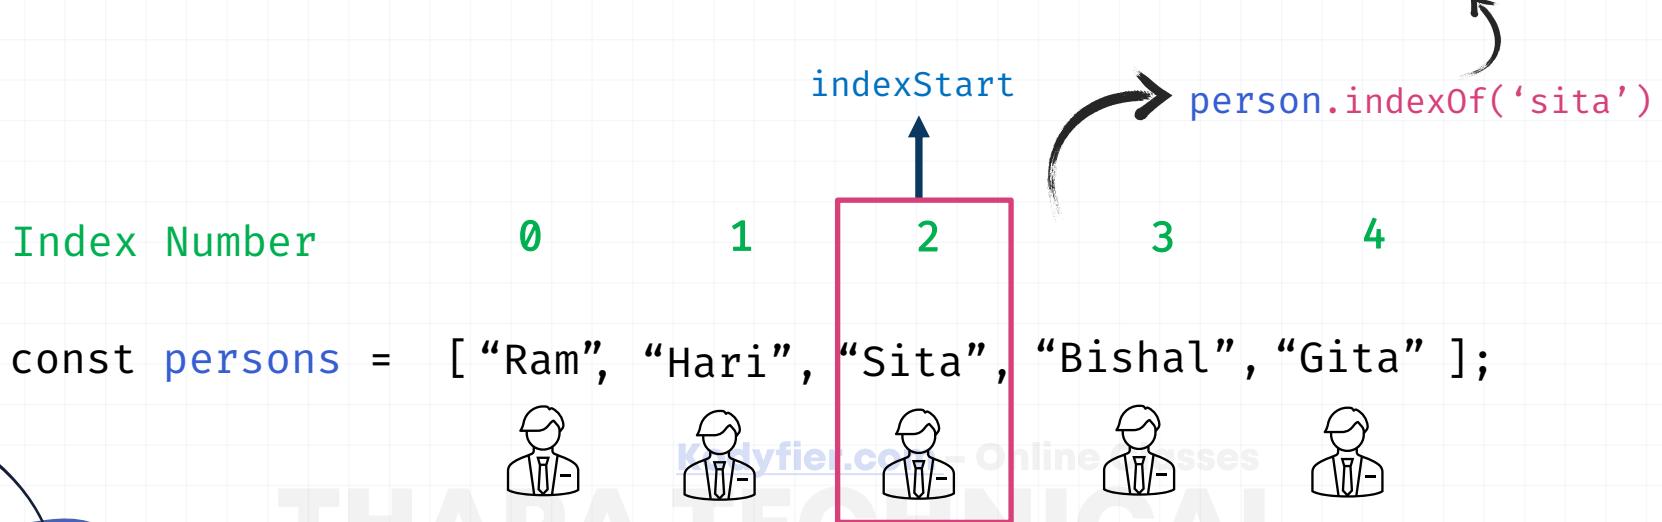

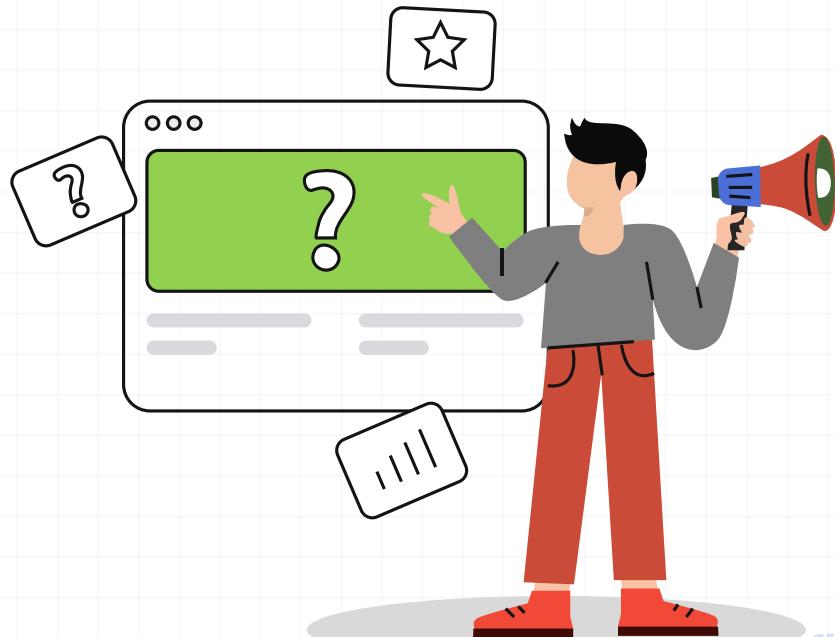

Interview Question

forEach vs Map in JavaScript?



THAPA TECHNICAL

Subscribe: ThapaTechnical

Syntax – forEach

```
array.forEach(function  
callback(currentValue, index, array) {  
    // Your logic here  
}, thisValue);
```

Here's a breakdown of each part:

`array`: The array on which the `foreach` method is called.

`callback`: A function that will be called once for each element in the array.

`currentValue`: The `current element` being processed in the array.

`index` (optional): The index of the `current element` being processed.

`array` (optional): The array `foreach` was called upon.

`thisValue` (optional): A value to use as `this` when executing the callback function.

Syntax – forEach

```
array.forEach((currentValue, index, array)  
=> { // Your logic here }, thisValue);
```

Syntax – Map()

```
array.map(function callback(currentValue,  
index, array) {  
    // Your logic here  
}, thisValue);
```

Syntax – Map()

```
array.map((currentValue, index, array) =>  
{  
    // Your logic here  
}, thisValue);
```

Here's a breakdown of each part:

`array`: The array on which the `map` method is called.


`callback`: A function that will be called once for each element in the array.

`currentValue`: The `current element` being processed in the array.

`index` (optional): The index of the `current element` being processed.

`array` (optional): The array `map` was called upon.

`thisValue` (optional): A value to use as `this` when executing the callback function.

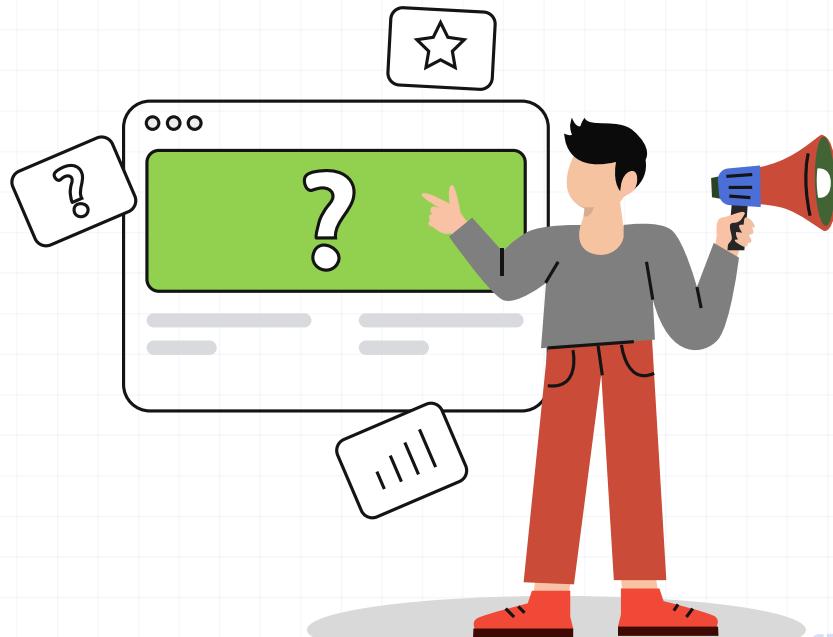

Interview Question

Let's test our knowledge.



THAPA TECHNICAL

Subscribe: ThapaTechnical

Interview Questions – Array CRUD

- 1: Add Dec at the `end` of an array?
- 2: What is the `return` value of splice method?
- 3: `Update` march to March (update)?
- 4: `Delete` June from an array?

```
const months = ['Jan', 'march', 'April', 'June', 'July'];
```

Kodyfier.com - Online Classes

THAPA TECHNICAL

[Subscribe: ThapaTechnical](https://ThapaTechnical.com)

Interview Questions – Array Filter

Q: Given an array of products where each product has a **name** and a **price**, write a function that uses the **filter method** to return an array containing only the products with a **price less than or equal to 500**.

```
const products = [  
    { name: "Laptop", price: 1200 },  
    { name: "Phone", price: 800 },  
    { name: "Tablet", price: 300 },  
    { name: "Smartwatch", price: 150 },  
];
```

Interview Questions – Array Filter

1: Using the `map` method, write a function that takes an array of strings and returns a new array where each `string is capitalized`.

2: Using the `map` method, write a function that takes an array of numbers and returns a new array where each `number is squared`, but only if it's an even number.

3: Using the `map` method, write a function that takes an array of names and returns a new array where each name is prefixed with "Mr".

Kodifier.com - Online Classes

THAPA TECHNICAL

Subscribe: ThapaTechnical

Interview Questions – Array Reduce

Write a JavaScript function that **calculates the total price** of items in a shopping cart. The function should take an array of item prices as input and **return the total price**.

Kodyfier.com - Online Classes

THAPA TECHNICAL

Subscribe: ThapaTechnical

JAVASCRIPT
* **STRINGS**

Kodyfier.com – Online Classes

THAPA TECHNICAL

What we will cover

* String & its properties

* String Search Methods

* Extracting String Characters

* Other Useful Methods

* Escape Character

* Extracting String Parts


* Replacing String Content

indexOf()

The `indexOf()` method returns the index (position) of the first occurrence of a string in a string, or it returns -1 if the string is not found:

Syntax: `indexOf(searchString, position)`

Look only the 1st letter

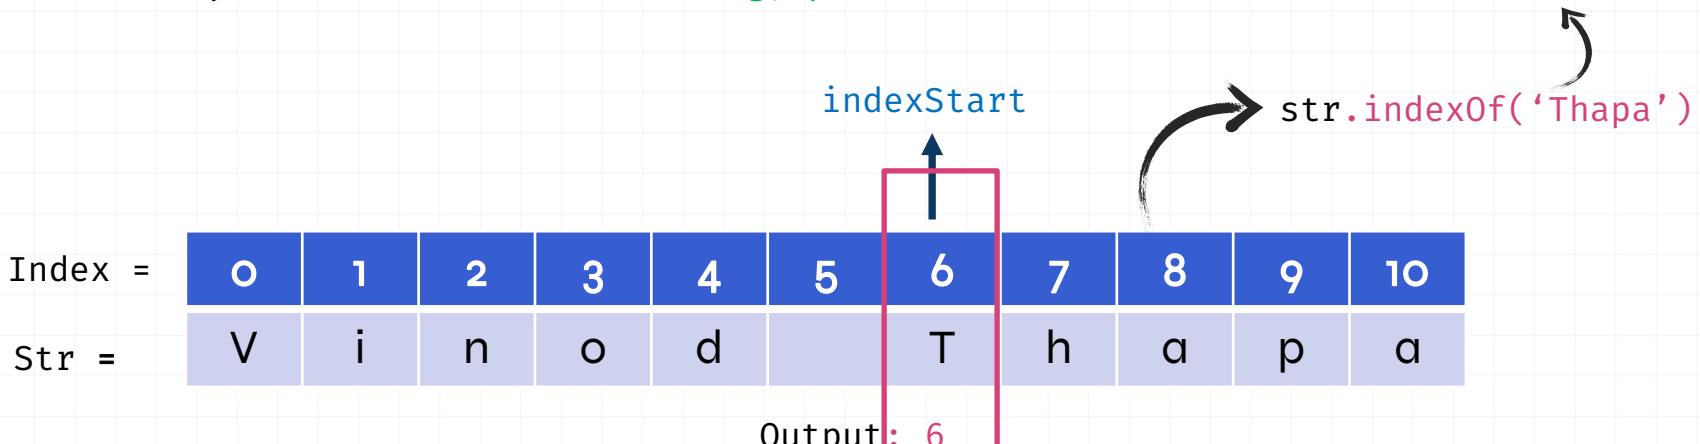


slice()

`slice()` extracts a part of a string and returns the extracted part in a new string.

1: JavaScript counts **positions from zero**.

2: `slice()` extracts up to but **not including indexEnd**.

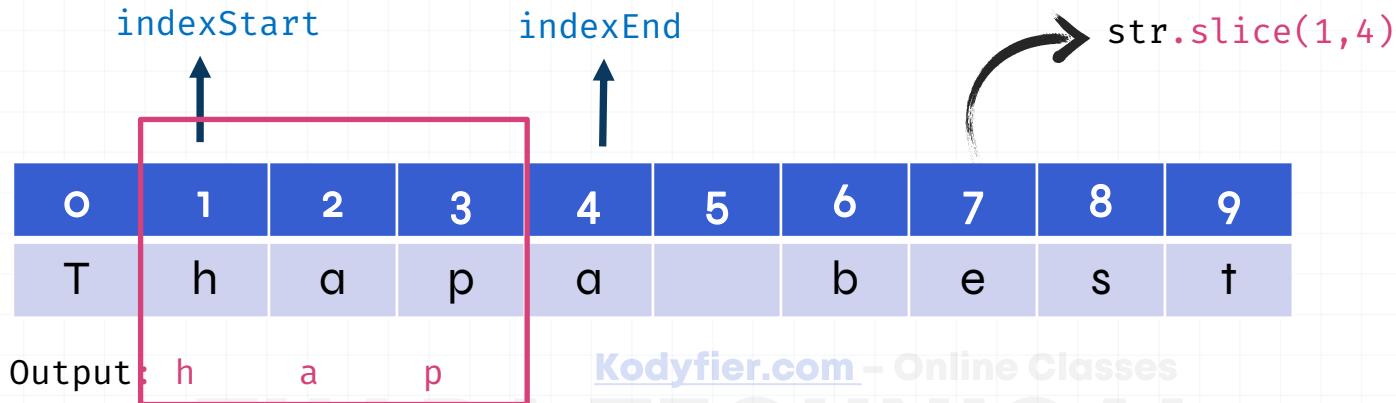


substring()

`substring()` extracts a part of a string and returns the extracted part in a new string.

1: JavaScript counts **positions from zero**.


2: `substring()` extracts up to but **not including indexEnd**.

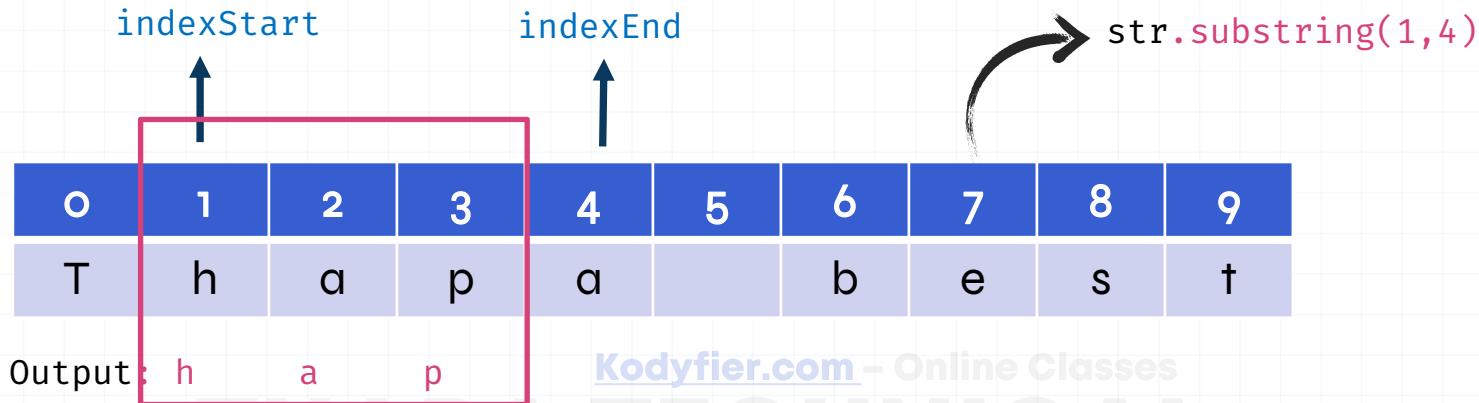

charAt()

The `charAt()` method returns the character at a specified index (position) in a string


1: JavaScript counts **positions from zero**.

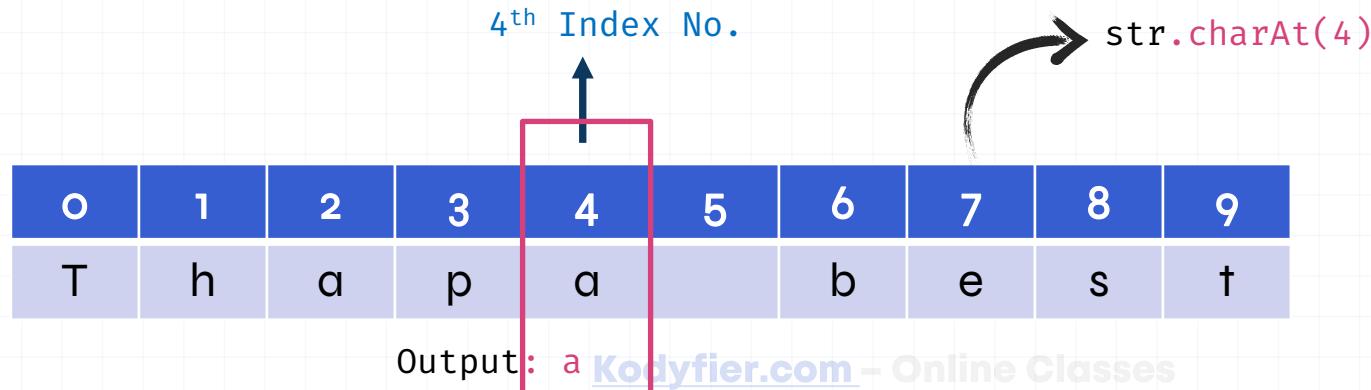

at()

The `at()` method returns the character at a specified index (position) in a string

- 1: It allows the use of negative indexes while `charAt()` do not.

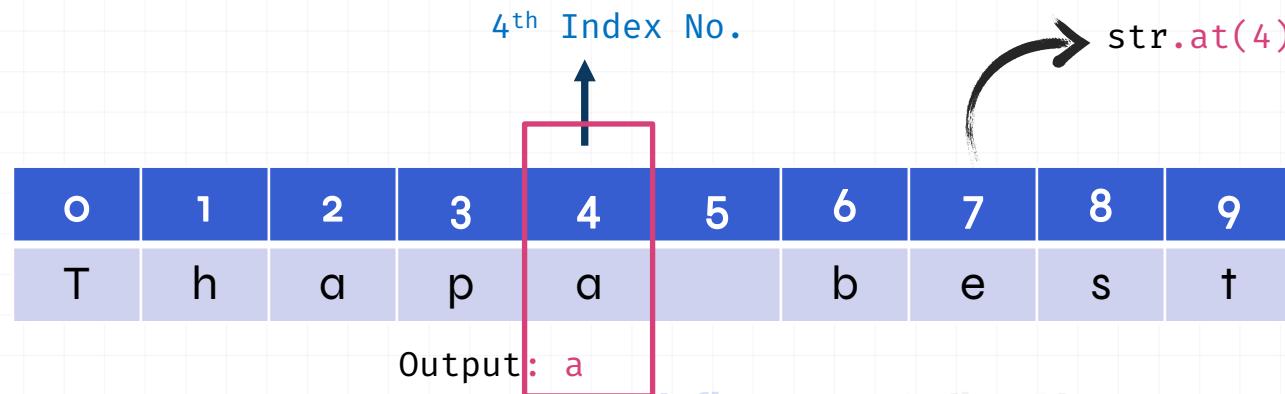

at()

The `at()` method returns the character at a specified index (position) in a string

- 1: It allows the use of negative indexes while `charAt()` do not.

o	1	2	3	4	5	6	7	8	9
T	h	a	p	a		b	e	s	t
-10	-9	-8	-7	-6	-5	-4	-3	-2	-1

4th Index No.  str.at(-4)

KodOutput: b - Online Classes

THAPA TECHNICAL

Subscribe: ThapaTechnical

Interview Questions – Strings

- 1: Write a JavaScript function that prints the letters 'a' through 'z' in the console. You should use a loop to iterate through the letters and print each one on a new line.

- 2: Write a function to count the number of vowels in a string?

- 3: Write a function to check if all the vowels presents in a string or not?

Interview Questions – Strings

Write a JavaScript function `isPangram` that takes a string as input and returns true if the string is a pangram (`contains all letters of the alphabet`) and false otherwise. The function should be case-insensitive and ignore spaces.

Constraints:

- 1: The input string will consist of alphabetic characters and spaces.
- 2: The function should handle both uppercase and lowercase letters.
- 3: Consider the English alphabet with 26 letters.

JAVASCRIPT

* MATH OBJECT

Kodyfier.com – Online Classes

THAPA TECHNICAL

Difference Between Round, Floor & Ceil

Math.round()

Rounds to the nearest integer.

Ex:

```
console.log(Math.round(4.5));  
// Output: 5  
console.log(Math.round(4.1));  
// Output: 4
```




Math.floor()

Always rounds down to the nearest integer.

Ex:

```
console.log(Math.floor(4.9));  
// Output: 4  
console.log(Math.floor(4.1));  
// Output: 4
```



Math.ceil()

Always rounds up to the nearest integer.

Ex:

```
console.log(Math.ceil(4.2));  
// Output: 5  
console.log(Math.ceil(4.9));  
// Output: 5
```



Interview Questions – Strings & Functions

- 1: Write a JavaScript function that prints the letters 'a' through 'z' in the console. You should use a loop to iterate through the letters and print each one on a new line.

- 2: Write a JavaScript function `isPangram` that takes a string as input and returns true if the string is a pangram (contains all letters of the alphabet) and false otherwise. The function should be case-insensitive and ignore spaces.

Constraints:

- 1: The input string will consist of alphabetic characters and spaces.
- 2: The function should handle both uppercase and lowercase letters.
- 3: Consider the English alphabet with 26 letters.

JAVASCRIPT

* **Window in JS
DOM & BOM**

Kodyfier.com – Online Classes

THAPA TECHNICAL


Window

- 1: Window is the main container, or we can say the **global Object** and any operations related to entire browser window can be a part of window object.
- 2: All the members like objects, methods or properties. If they are the part of window object, then **we do not refer the window object.**
- 3: Window has methods, properties and object. ex `setTimeout()` or `setInterval()` are the methods, where as Document is the object of the Window and It also has a screen object with properties describing the physical display.

Document

- 1: Whereas the **DOM** is the child of window object
- 2: Where in the DOM **we need to refer the document**, if we want to use the document object, methods or properties
- 3: Document is just the **object of the global object** that is Window, which deals with the document, the HTML elements themselves.

Window Global Object

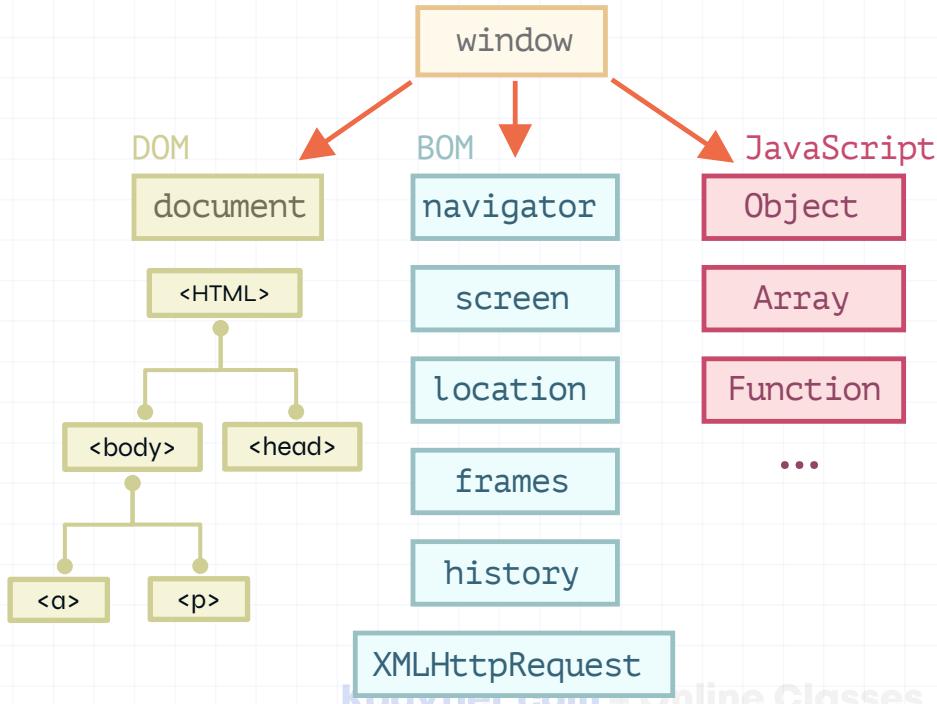

<https://javascript.info/dom-nodes#:text=An%20example%20of%20the%20DOM&text=Every%20tree%20node%20is%20an%3E%20are%20its%20children%C20etc.>

Window Global Object

The screenshot shows a web browser window with the URL kodyfier.com in the address bar. The page content is as follows:

KodyFier

Home About Courses Contact

IT TRAINING INSTITUTE IN PUNE

Kodyfier – Top IT Training Institute in Pune is an ideal place for individuals looking to upgrade their skills and advance their careers in the fast-growing tech industry. Offering a plethora of IT courses, including popular courses such as Web Development courses and Software classes in Pune, the Institute provides hands-on training and practical experience to help students stay ahead of the curve.

[Get Started](#)


Live Classes

Modern Projects

Industry Level

A large, semi-transparent circular graphic features a smiling young man with glasses and a beard, holding an open blue book. The background of the entire slide has a faint grid pattern.

The BOM



The DOM

The screenshot shows the homepage of 'KodyFier IT TRAINING INSTITUTE IN PUNE'. The page features a green header with the logo 'KodyFier' and navigation links for 'Home', 'About', 'Courses ▾', and 'Contact'. The main title 'IT TRAINING INSTITUTE IN PUNE' is centered with decorative green leaf-like icons on either side. Below the title is a large circular graphic containing a smiling man with glasses holding a book. To the left of the graphic, there's a section with text about the institute and four call-to-action buttons: 'Get Started', 'Live Classes', 'Modern Projects', and 'Industry Level'. A green arrow points from the text 'The DOM' down towards the website content.

Window Object:

The window object represents the global window in a browser.

Both the [Browser Object Model \(BOM\)](#) and the [Document Object Model \(DOM\)](#) are part of the window object.

Window Object:

The window object represents the global window in a browser. Both the **Browser Object Model (BOM)** and the **Document Object Model (DOM)** are part of the window object.

Browser Object Model (BOM):

The BOM represents the browser as an object and provides methods and properties for interacting with the browser itself (not directly related to the content of a web page).

Examples of BOM features include `window.navigator` for browser information, `window.location` for URL manipulation, and `window.alert` for displaying alerts.

Window Object:

The window object represents the global window in a browser.

Both the **Browser Object Model (BOM)** and the **Document Object Model (DOM)** are part of the window object.


Document Object Model (DOM):

The DOM represents the structured document as a tree of objects, where each object corresponds to a part of the document (**such as elements, attributes, and text**).

The DOM is primarily concerned with the content of the web page and allows JavaScript to interact with and manipulate the HTML elements.

So, while the DOM is focused on the content of the page, the BOM is focused on the browser environment. The window object serves as the global object that encompasses both the BOM and the DOM when working in a browser environment.


The Window Object

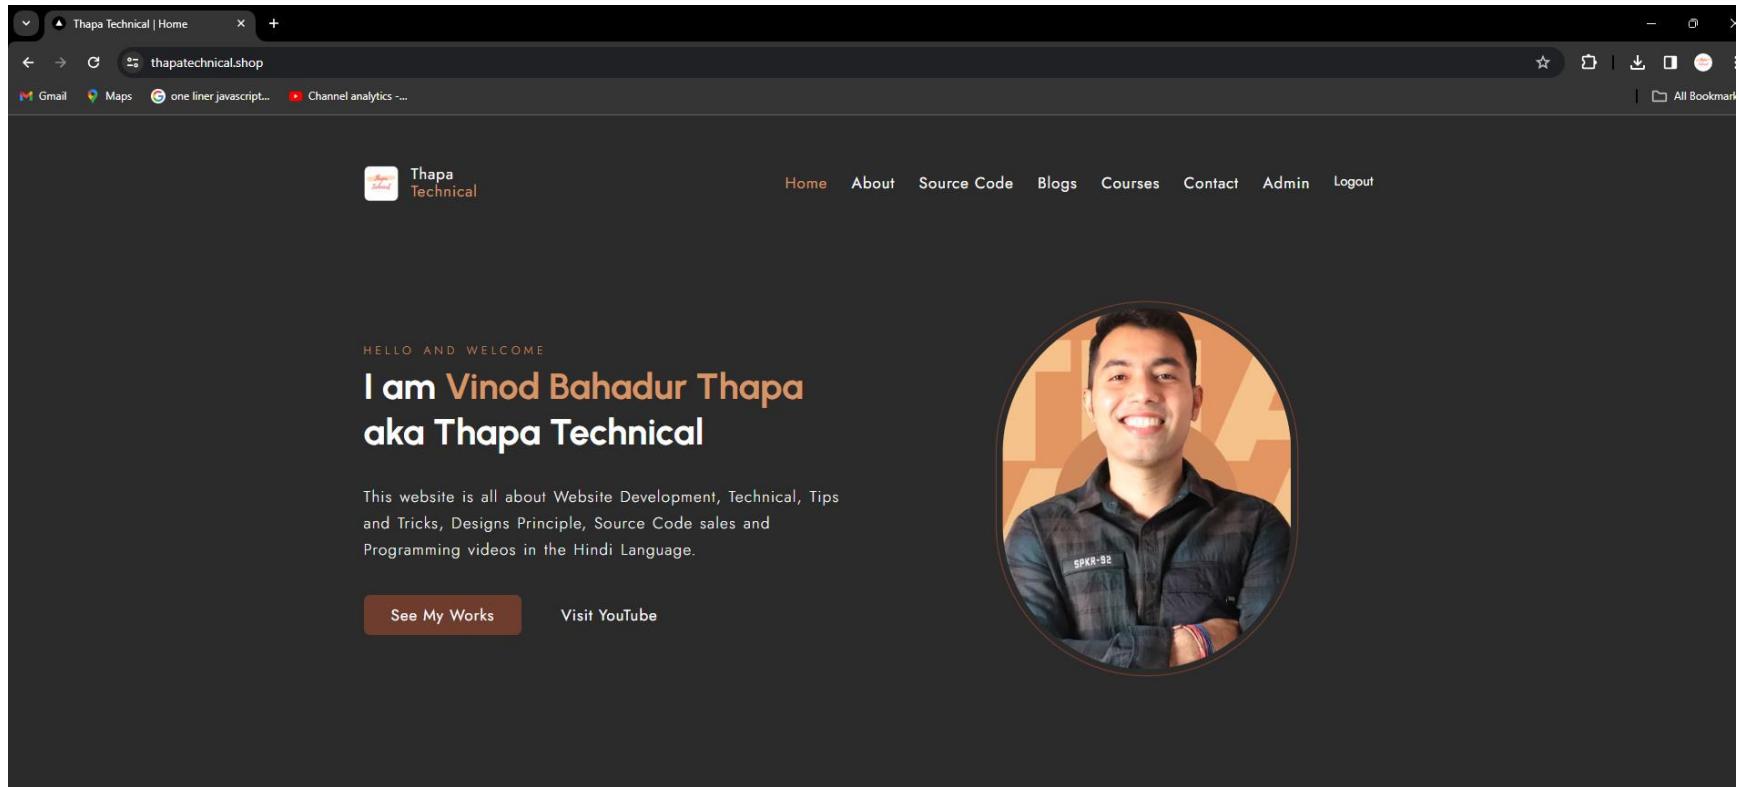

A screenshot of a web browser displaying the homepage of the website "Thapa Technical". The page has a dark background. At the top left is the logo "Thapa Technical" with a small icon. The top right features a navigation bar with links: Home, About, Source Code, Blogs, Courses, Contact, Admin, and Logout. Below the navigation, a large circular portrait of a smiling man (Vinod Bahadur Thapa) is centered. To the left of the portrait, the text "HELLO AND WELCOME" is written in small capital letters. Below this, a larger text block introduces the author: "I am Vinod Bahadur Thapa aka Thapa Technical". A descriptive paragraph follows, stating: "This website is all about Website Development, Technical, Tips and Tricks, Designs Principle, Source Code sales and Programming videos in the Hindi Language." At the bottom left, there are two buttons: "See My Works" and "Visit YouTube". The overall design is clean and professional.


Subscribe: [ThapaTechnical](https://www.youtube.com/c/ThapaTechnical)

The BOM

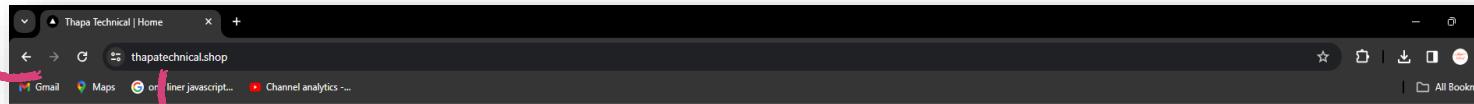

window.location.href

The DOM

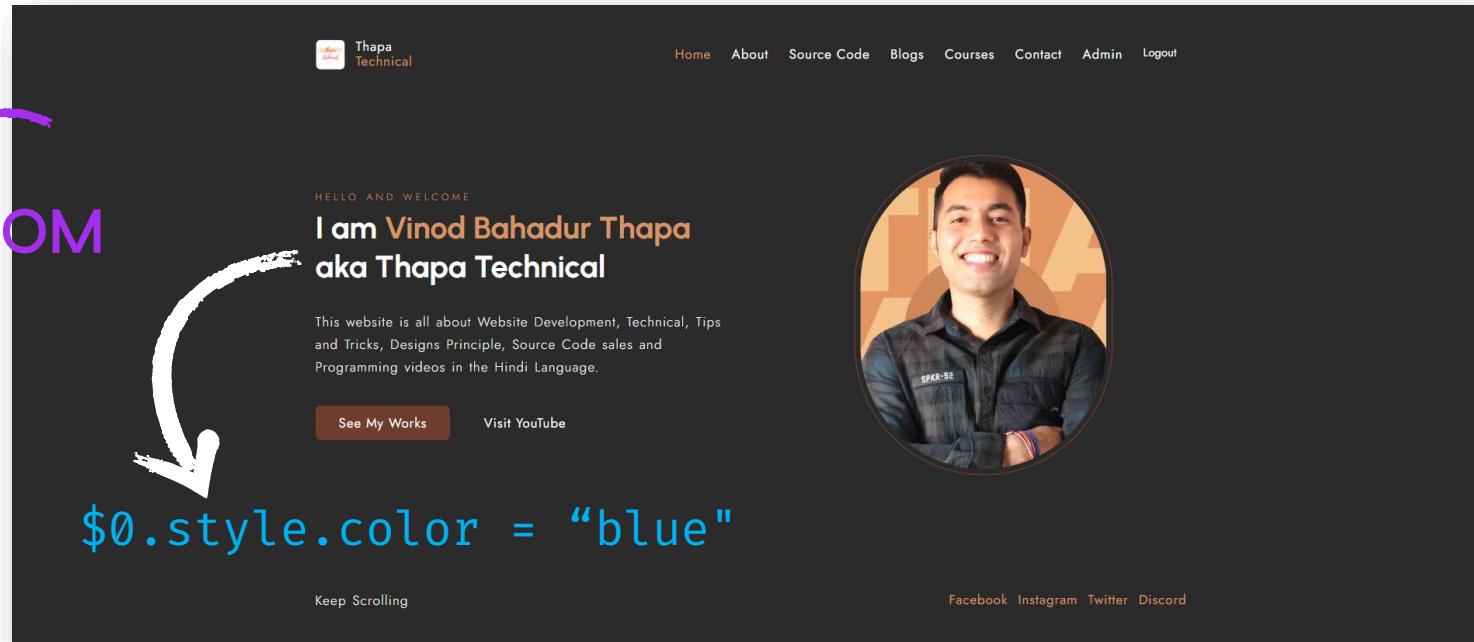

\$0.style.color = "blue"

Subscribe: [ThapaTechnical](#)

```
8 <body>
9     <!-- /comment -->
10    <div>
11        Hello
12        <span>World</span>
13    </div>
14    <script></script>
15 </body>
```

```
> document.body.childNodes
< ▼ NodeList(7) [text, comment, text, div, text, script, text] ⓘ
```


```
innerHTML: "\n      Hello\n      <span>World</span>\n      "
innerText: "Hello World"
```

```
textContent: null
```

Kodyfier.com - Online Classes

Subscribe: [ThapaTechnical](https://ThapaTechnical.com)


Window Global Object

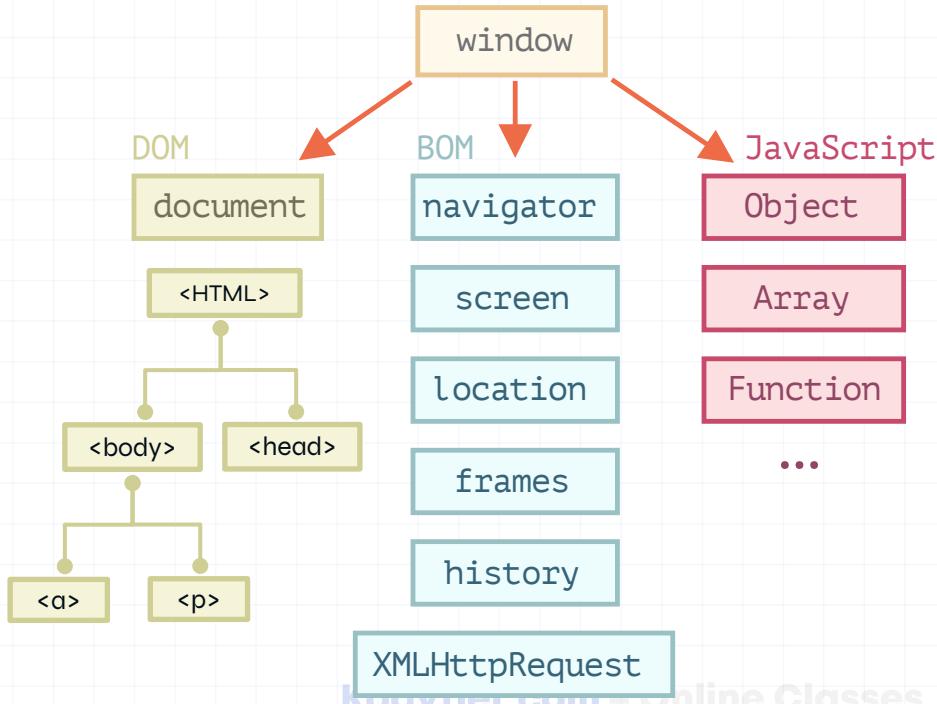

<https://javascript.info/dom-nodes#:text=An%20example%20of%20the%20DOM&text=Every%20tree%20node%20is%20an%3E%20are%20its%20children%C20etc.>

BROWSER - DOM TREE

```
<!DOCTYPE HTML>
<html>
<head>
  <title>JavaScript</title>
</head>
<body>
  <h1>Best JS Course</h1>
  <p> DOM Tree Structure</p>
  <script> </script>
</body>
</html>
```

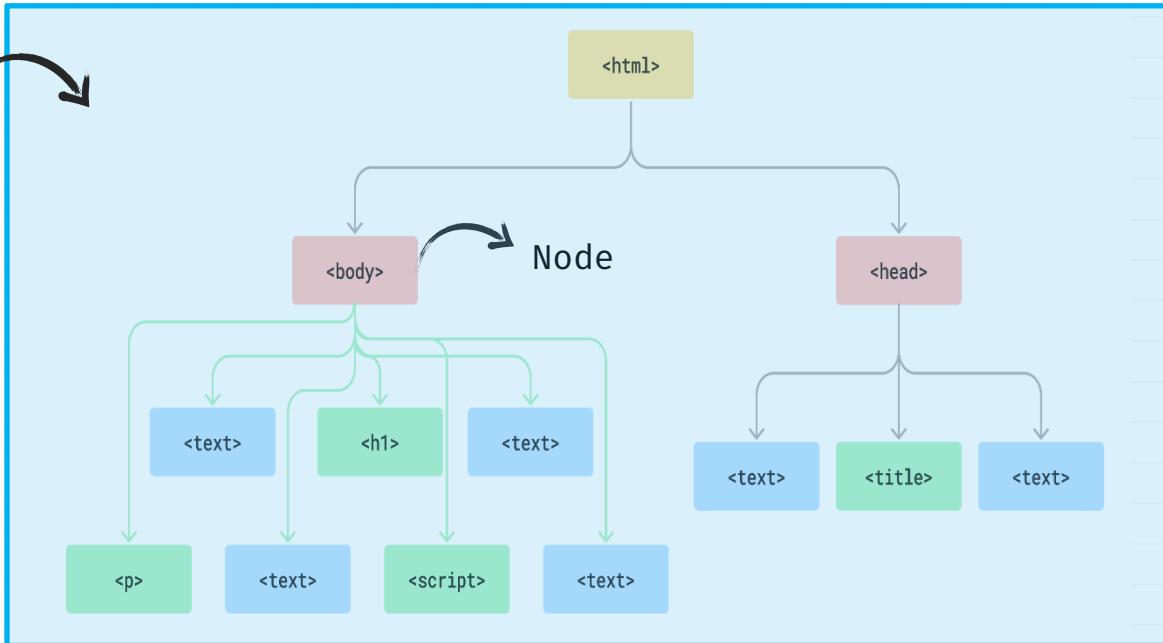

This entire DOM tree is then accessible to JavaScript as an object.

<https://javascript.info/dom-nodes#:text=An%20example%20of%20the%20DOM&text=Every%20tree%20node%20is%20an%3E%20are%20its%20children%2C%20etc.>

Window Global Object



```
<!DOCTYPE HTML>
<html>
<head>
  <title>JavaScript</title>
</head>
<body>
  <h1>Best JS Course</h1>
  <p> DOM Tree Structure</p>
</body>
</html>
```


```
>   document.body.childNodes
<‐ ▼ NodeList(5) [text, h1, text, p, text] ⓘ
  ► 0: text
  ► 1: h1
  ► 2: text
  ► 3: p
  ► 4: text
    length: 5
  ► [[Prototype]]: NodeList
>   document.head.childNodes
<‐ ▼ NodeList(3) [text, title, text] ⓘ
  ► 0: text
  ► 1: title
  ► 2: text
    length: 3
  ► [[Prototype]]: NodeList
```



This entire DOM tree is then accessible to JavaScript as an object.

The Document Object Model (DOM) is a **tree-like representation** of the HTML document. It provides a way **to interact with the HTML document using JavaScript**. The DOM provides **multiple properties** and **methods** to dynamically change the content of the HTML document using JavaScript

```
<!DOCTYPE HTML>
<html>
<head>
  <title>Javascript</title>
</head>
<body>
  <h1>Best JS Course</h1>
  <p> DOM Tree Sturcture</p>
</body>
</html>
```

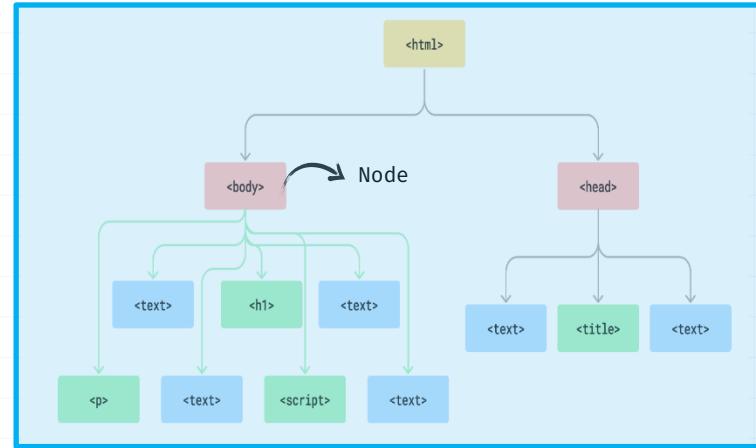

DOM Properties

document

getElementById(id)

getElementsByClassName(className)

getElementsByTagName(tagName)

querySelector(selector)

querySelectorAll(selector)

innerHTML

textContent

style

DOM Methods

createElement(tagName)

appendChild(node)

removeChild(node)

addEventListener(event, function)

removeEventListener(event, function)

setAttribute(name, value)

getAttribute(name)

parentNode / parentElement

childNodes / children

firstChild / firstElementChild

lastChild / lastElementChild

nextSibling / nextElementSibling

previousSibling / previousElementSibling

closest(selector)

forEach (Array.from)

JAVASCRIPT

* Local Storage

Kodyfier.com – Online Classes

THAPA TECHNICAL

The `localStorage` object allows you to save **key/value pairs** in the browser.

The `localStorage` object stores data with **no expiration date**.

The **data is not deleted** when the browser is closed and are available for future sessions.

What we will cover

- * How to add / store data in `localStorage`.
- * How to get / retrieve data from `localStorage`.
- * How to remove data from `localStorage`.

JAVASCRIPT



EVENTS

Kodyfier.com – Online Classes

THAPA TECHNICAL

What we will cover

- * 3 ways of writing Events in JavaScript
- * What is Event Object?
- * MouseEvent in JavaScript
- * KeyboardEvent in JavaScript
- * InputEvents in JavaScript

Kodyfier.com - Online Classes

THAPA TECHNICAL

Subscribe: ThapaTechnical

Mouse Events

Event	Occurs When
onclick	The user clicks on an element
oncontextmenu	The user right-clicks on an element
ondblclick	The user double-clicks on an element
onmousedown	A mouse button is pressed over an element
onmouseenter	The pointer is moved onto an element
onmouseleave	The pointer is moved out of an element
onmousemove	The pointer is moving over an element
onmouseout	The mouse pointer moves out of an element
onmouseover	The mouse pointer is moved over an element
onmouseup	The mouse button is released over an element

JAVASCRIPT

* DATE & TIME

Kodyfier.com – Online Classes

THAPA TECHNICAL

Date Objects

The `Date()` constructor creates `Date objects`. When called as a function, it returns a string representing the current time.

Syntax

`new Date()`

`new Date(date string)`

[Kodyfier.com](https://kodyfier.com) - Online Classes

THAPA TECHNICAL

[Subscribe: ThapaTechnical](https://www.youtube.com/channel/UCtPjyfzXWVgOOGJLcIwvQSw)

9 ways to create a new Date Objects

`new Date()`

Kodyfier.com - Online Classes

THAPA TECHNICAL

9 ways to create a new Date Objects

`new Date()`

`new Date(date string)`

Kodyfier.com - Online Classes

THAPA TECHNICAL

9 ways to create a new Date Objects

`new Date()`

`new Date(date string)`

`new Date(year,month)`

[Kodyfier.com](https://kodyfier.com) - Online Classes

THAPA TECHNICAL

9 ways to create a new Date Objects

`new Date()`

`new Date(date string)`

`new Date(year,month)`

`new Date(year,month,day)`

Kodyfier.com - Online Classes

THAPA TECHNICAL

9 ways to create a new Date Objects

`new Date()`

`new Date(date string)`

`new Date(year,month)`

`new Date(year,month,day)`

`new Date(year,month,day,hours)`

[Kodyfier.com](https://kodyfier.com) - Online Classes

THAPA TECHNICAL

9 ways to create a new Date Objects

`new Date()`

`new Date(date string)`

`new Date(year,month)`

`new Date(year,month,day)`

`new Date(year,month,day,hours)`

`new Date(year,month,day,hours,minutes)`

Kodyfier.com - Online Classes

THAPA TECHNICAL

9 ways to create a new Date Objects

`new Date()`

`new Date(date string)`

`new Date(year,month)`

`new Date(year,month,day)`

`new Date(year,month,day,hours)`

`new Date(year,month,day,hours,minutes)`

`new Date(year,month,day,hours,minutes,seconds)`

[Kodyfier.com](https://kodyfier.com) - Online Classes

THAPA TECHNICAL

9 ways to create a new Date Objects

`new Date()`

`new Date(date string)`

`new Date(year,month)`

`new Date(year,month,day)`

`new Date(year,month,day,hours)`

`new Date(year,month,day,hours,minutes)`

`new Date(year,month,day,hours,minutes,seconds)`

`new Date(year,month,day,hours,minutes,seconds,milliseconds)`

[Kodyfier.com](https://kodyfier.com) - Online Classes

THAPA TECHNICAL

9 ways to create a new Date Objects

`new Date()`

`new Date(date string)`

`new Date(year,month)`

`new Date(year,month,day)`

`new Date(year,month,day,hours)`

`new Date(year,month,day,hours,minutes)`

`new Date(year,month,day,hours,minutes,seconds)`

`new Date(year,month,day,hours,minutes,seconds,ms)`

`new Date(milliseconds)`

Kodyfier.com - Online Classes

THAPA TECHNICAL

JAVASCRIPT

* **Timing Based Events**

Kodyfier.com – Online Classes

THAPA TECHNICAL

Lists of Timing Based Events

1 setTimeout()

2 clearTimeout()

4 setInterval()

5 clearInterval()

Kodyfier.com - Online Classes

THAPA TECHNICAL

Subscribe: ThapaTechnical

Definition - Timing Based Events

- 1 `setTimeout()` - The `setTimeout` function is used to execute a function or code block after a specified delay in milliseconds.

- 2 `setInterval()` - The `setInterval` function is used to repeatedly execute a function or code block at a specified interval in milliseconds.

Syntax – setTimeout()

```
function myCallback() {  
    console.log(" It schedule the callback function  
    after a delay of 2000 milliseconds (2sec)");  
}
```

The diagram illustrates the arguments for the `setTimeout` function. It shows two curved arrows pointing from the text "Function calling" to the argument `myCallback` and from the text "Time in milliseconds" to the argument `2000` in the code.

```
setTimeout(myCallback, 2000);
```

Syntax – setInterval()

```
function repeatedFunction() {  
    console.log("This function will be repeated every  
    1000 milliseconds (1 second)." );  
}
```

setInterval(repeatedFunction, 1000);

Function calling Time in milliseconds

THAPA TECHNICAL

JAVASCRIPT * OBJECTS

Kodyfier.com – Online Classes

THAPA TECHNICAL

What is an Objects?

Objects are a fundamental part of JavaScript, providing a way to group related data and functions together. In JavaScript, an object is a collection of key-value pairs, where each key is a string (or a symbol) and each value can be any data type, including other objects. Objects can have properties and methods, making them versatile for various use cases.

Syntax - obj = {}

Kodyfier.com - Online Classes

THAPA TECHNICAL

[Subscribe: ThapaTechnical](https://ThapaTechnical.com)

Pass by Value vs Reference



Kodyfier.com - Online Classes

THAPA TECHNICAL

Subscribe: ThapaTechnical

The “**this**” keyword refers to different objects depending on how it is used:

- * In an object method, this refers to the object.
- * Alone, this refers to the global object.
- * In a function, this refers to the global object.
- * In a function, in strict mode, this is undefined.
- * In an event, this refers to the element that received the event.
- * Methods like call(), apply(), and bind() can refer this to any object.

Interview Questions – Objects & Functions

1: Given an object representing a student, write a **function** to add a new **subject** with its corresponding grade to the student's record.

Also check **if the grades property is present or not?**

2: Write a function that **compares two objects** to determine if they have the **same properties and values**.

3: Write a function that **transforms an array of objects** into an object where the **keys are the objects' ids**.

World Best JavaScript

JAVASCRIPT

* ECMAScript

Kodyfier.com – Online Classes

THAPA TECHNICAL

We'll explore all of
ECMAScript in our VS Code.

Kodyfier.com - Online Classes

THAPA TECHNICAL

[Subscribe: ThapaTechnical](https://www.youtube.com/ThapaTechnical)


JAVASCRIPT

* **How JS Works**

Kodyfier.com – Online Classes

THAPA TECHNICAL

How JavaScript Works (Runs)

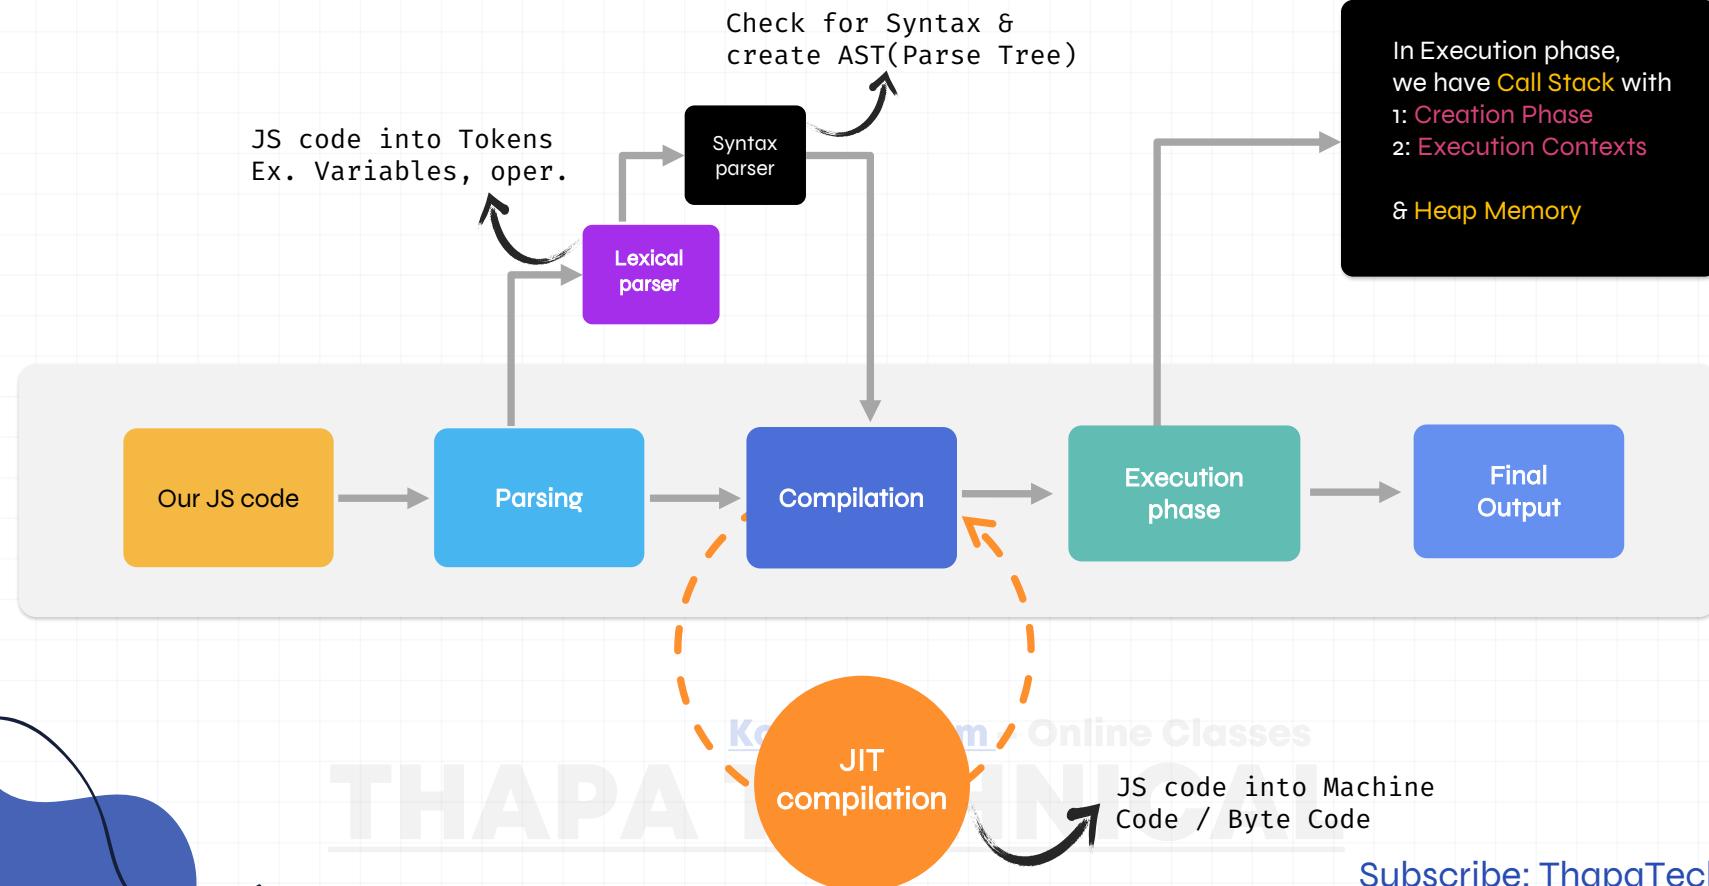

Khan Academy Online Classes
THAPA

JS code into Machine
Code / Byte Code

Subscribe: ThapaTechnical

CREATION PHASE (GLOBAL EXECUTION CONTEXT)

GLOBAL
OBJECT

“this”

OUTER
SCOPE

Memory Space for Variables &
Functions also called **HOISTING**.

CREATION PHASE (GLOBAL EXECUTION CONTEXT)

GLOBAL
OBJECT

Final
Output

JIT
optimization

JS code into Machine
Code / Byte Code

Subscribe: ThapaTechnical

What's Execution Phase?

Kodyfier.com – Online Classes


THAPA TECHNICAL

Synchronous vs Asynchronous

Kodyfier.com – Online Classes

THAPA TECHNICAL

What's the difference?

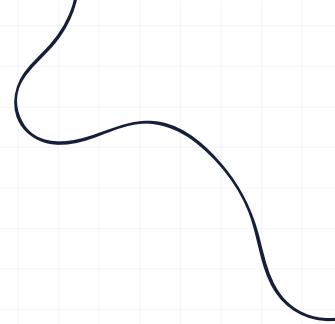


Synchronous code executes line by line, blocking further execution until each line is completed, while asynchronous code allows other code to continue executing while it waits for an asynchronous operation to complete.

Kodyfier.com - Online Classes


THAPA TECHNICAL

JAVASCRIPT RUNTIME / THE EVENT LOOP

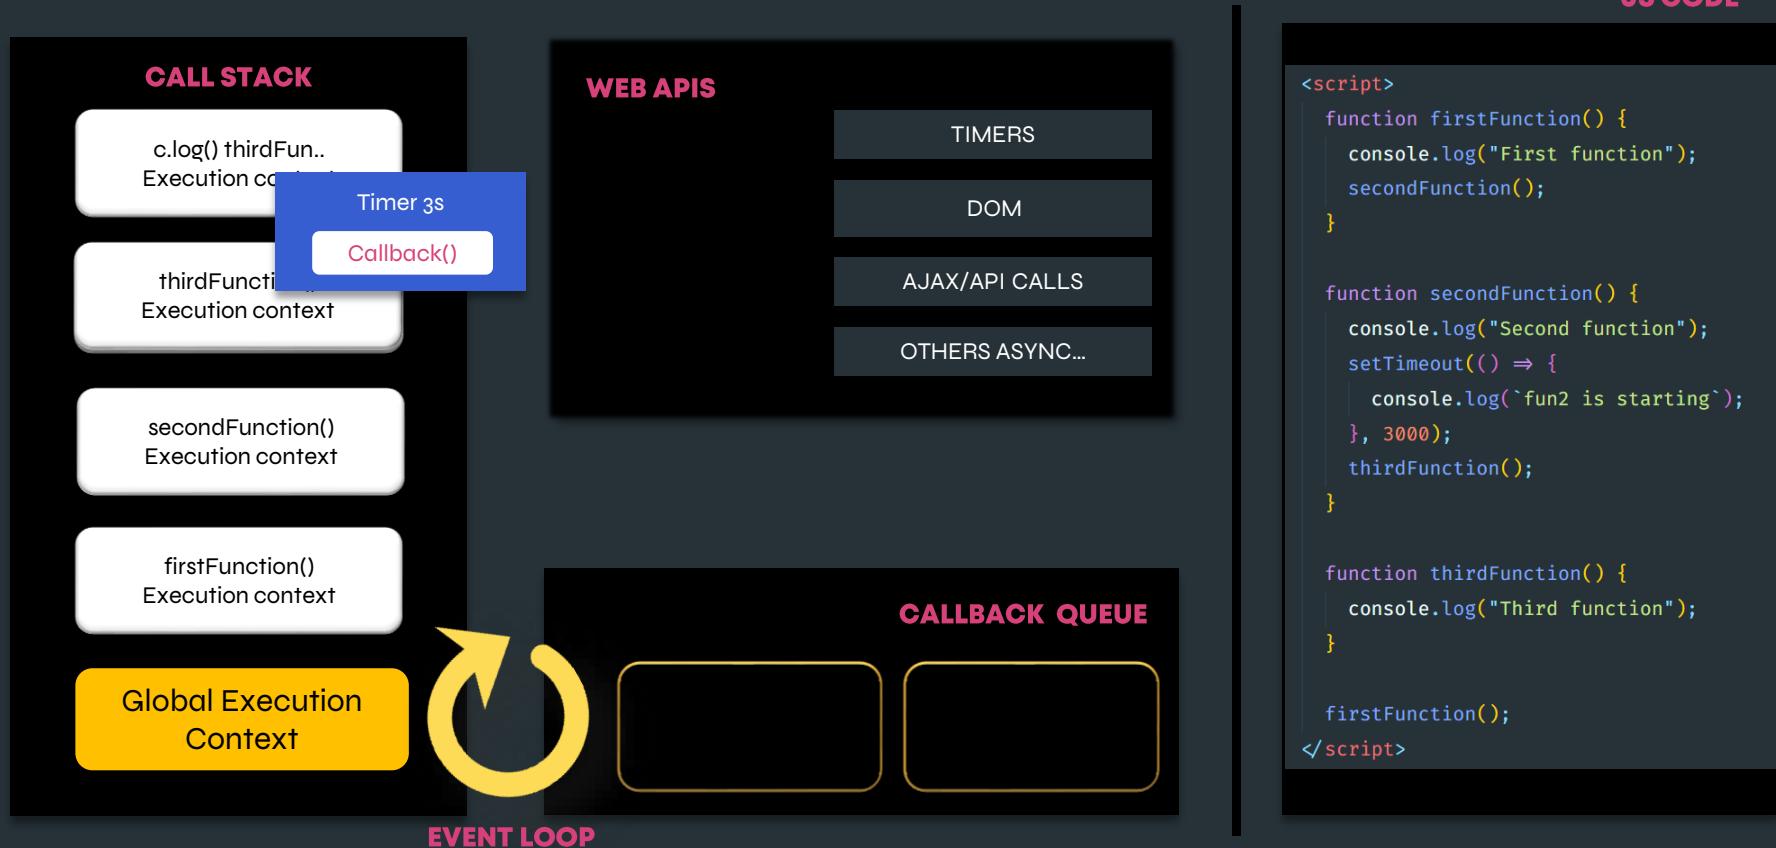


JAVASCRIPT ENGINE

CALL STACK

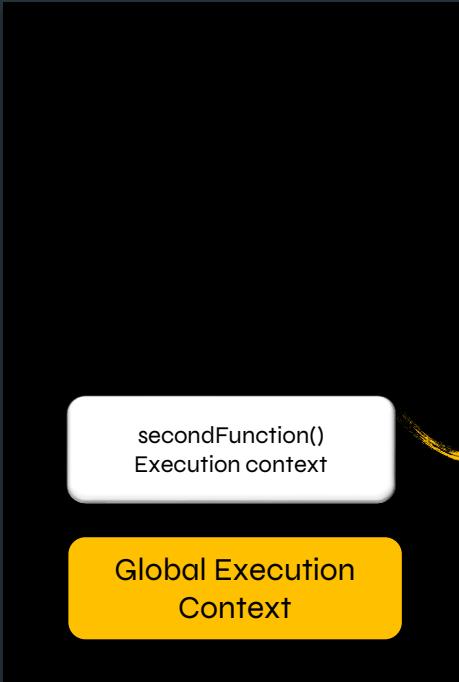

HEAP

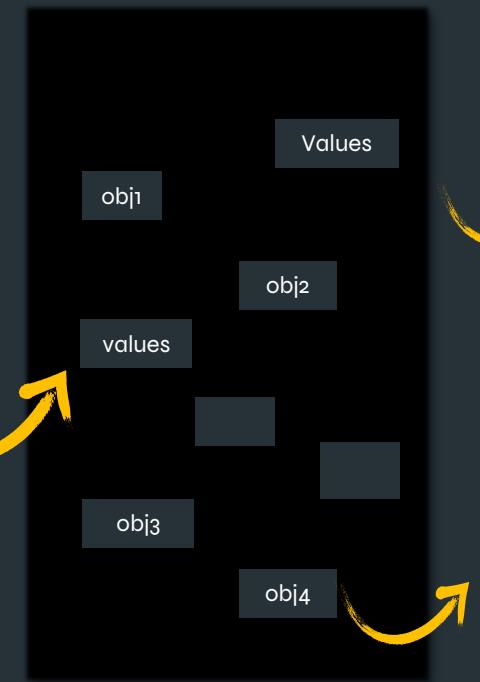

```
function outerFunction() {  
    var outerVariable = "I'm from outer";  
  
    function innerFunction() {  
        console.log(outerVariable);  
    }  
    return innerFunction;  
}  
  
var closureFunction = outerFunction();  
closureFunction();
```

* Advanced JavaScript

Kodyfier.com – Online Classes

THAPA TECHNICAL

Topics in our Advanced JavaScript

Event Propagation (Event Bubbling and Event Capturing)

Higher Order Function

Callback Function

Closures & Function Currying (We will see after Async JS section)

CallBack Hell

Fetch API


Promises

Async-Await

Error Handling in JS

Kodyfier.com - Online Classes

THAPA TECHNICAL

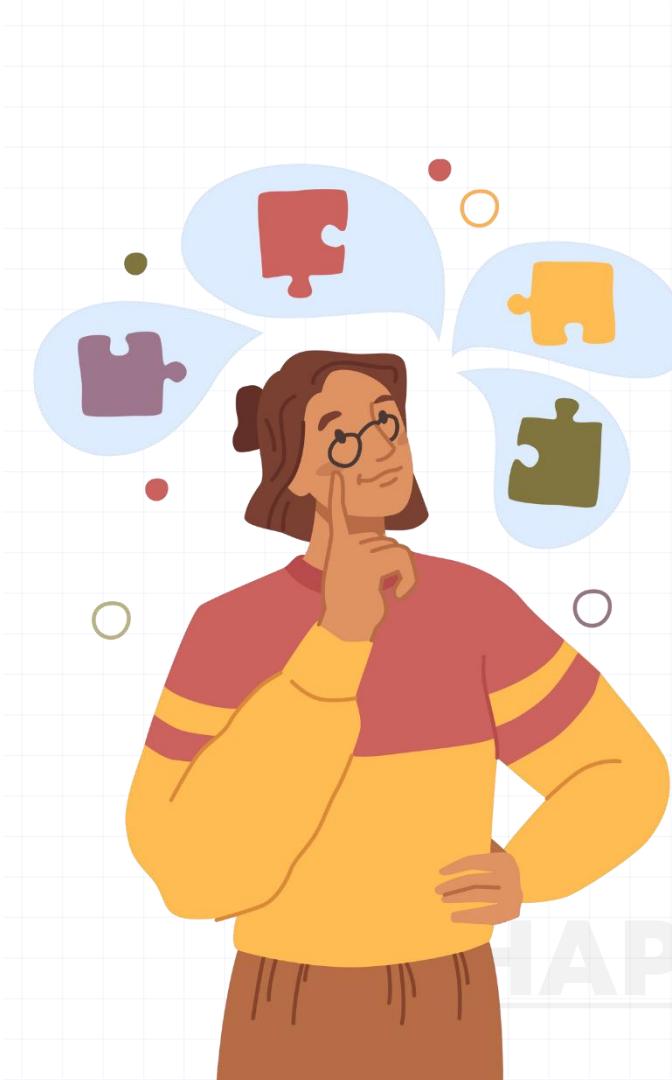
A cartoon illustration of a person with short brown hair and glasses, wearing a yellow and red striped sweater, looking thoughtful with a hand on their chin. Four thought bubbles around their head contain four interlocking puzzle pieces in red, orange, purple, and green.

Event Propagation

Event propagation refers to the process of how events propagate or travel through the **DOM** (Document Object Model) hierarchy.


In JavaScript, there are **two phases** of event propagation: **capturing phase** and **bubbling phase**.

Event Propagation

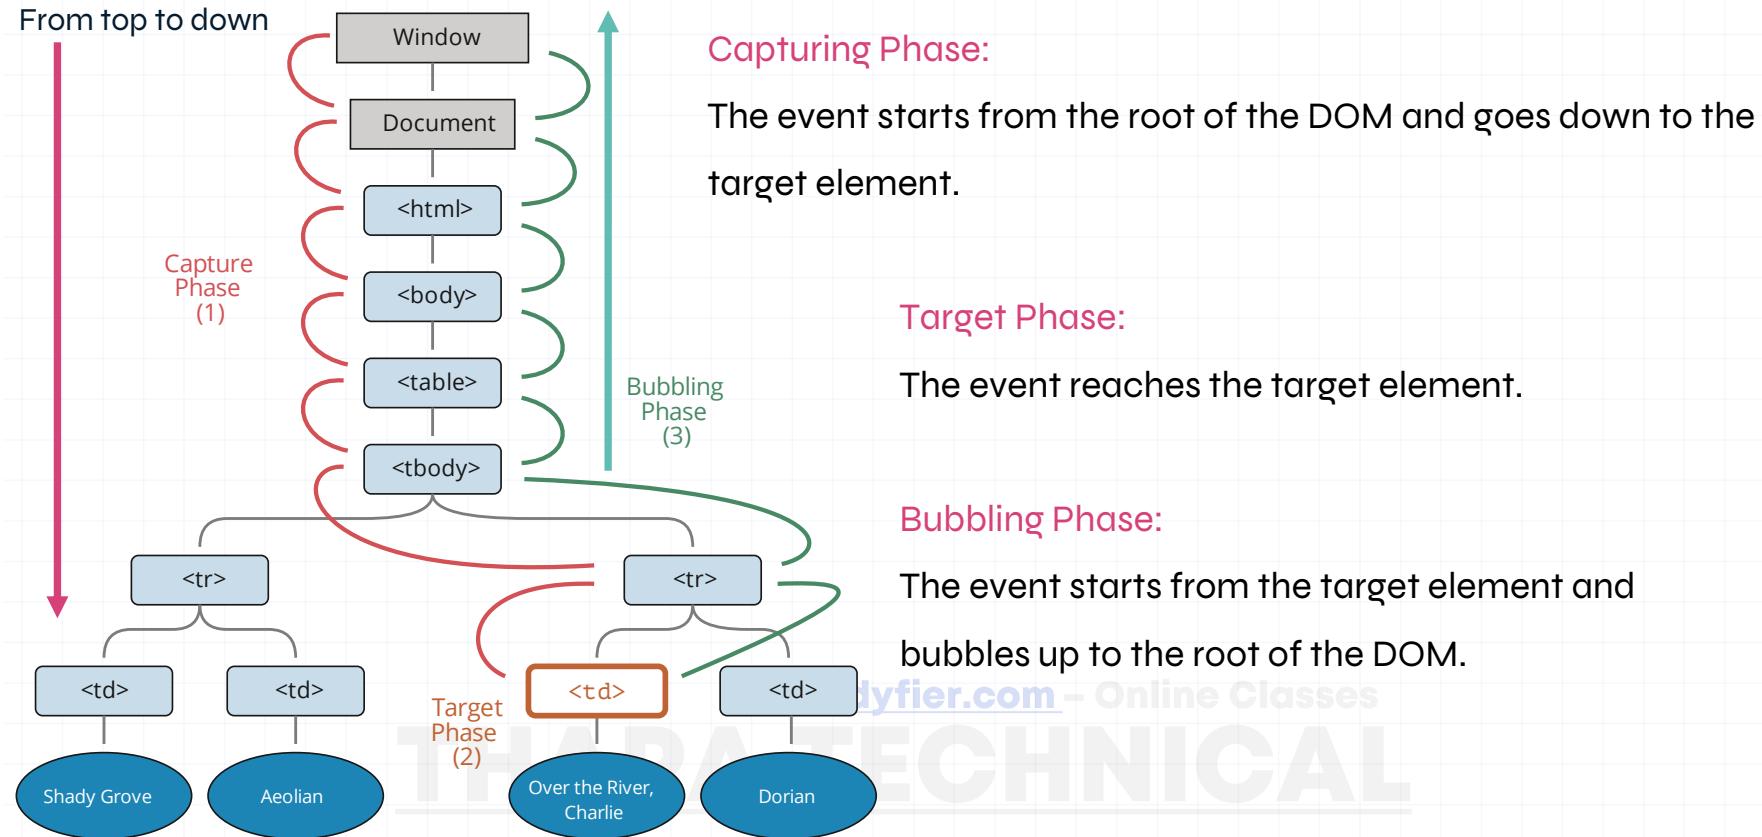

Promises in JavaScript

A **promise** is like a **placeholder** for the **result** of an **asynchronous** operation.

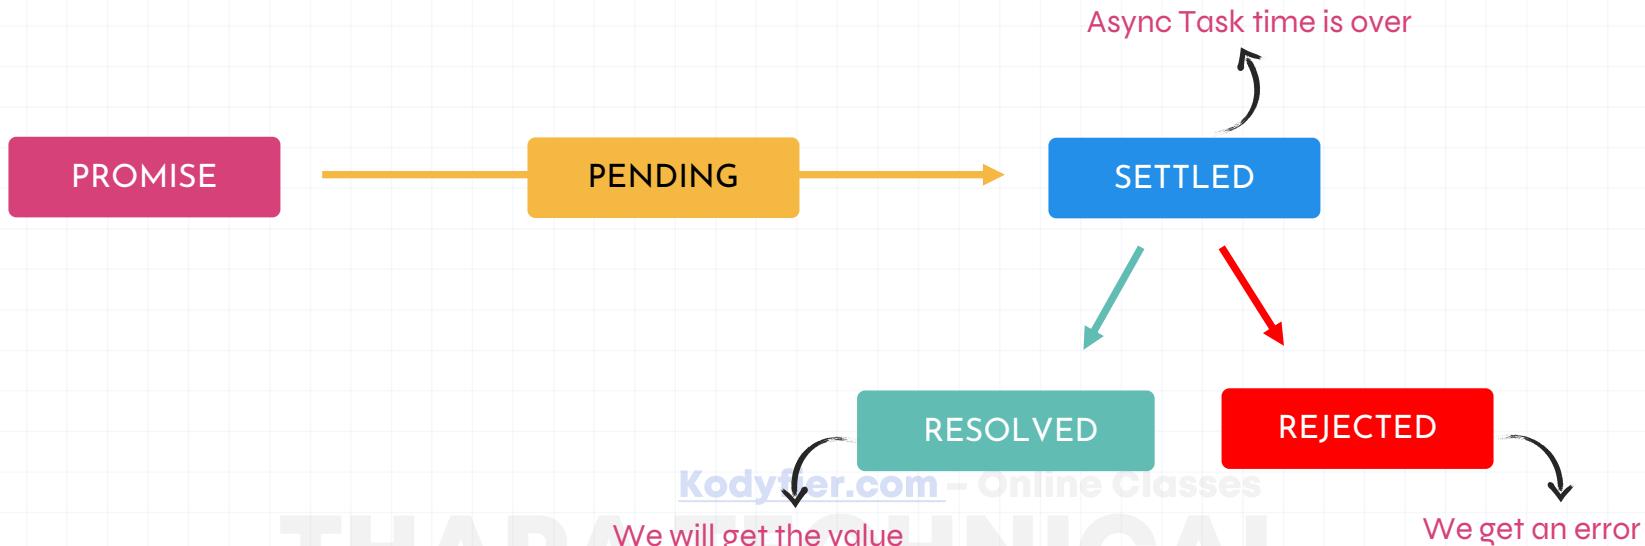

Project **Weather Application JS**

Kodyfier.com – Online Classes

THAPA TECHNICAL

Thank you for your love and support! 😊 We hope you enjoy our world-class JavaScript course by Thapa Technical. If you find it helpful, could you please share the video with your friends too? Your support means the world to us! ✅

Here is the link: <https://youtu.be/13gLB6hDHR8>

Kodyfier.com - Online Classes

THAPA TECHNICAL

Subscribe: ThapaTechnical