

1. Page structure

index.html

```
<!DOCTYPE html>
<html lang="en">
  <head>
    <meta charset="UTF-8">
    <title>Student Page</title>
  </head>
  <body>
    <h1>Hello Students!</h1>
  </body>
</html>
```

- **head** = page info (not shown). **body** = what you see.

2. Tag, element, attribute

attribute
 |
<p class="name">Riya</p>
 opening tag content closing tag

- **Tag** is the label in < >. **Element** = opening tag + content + closing tag.
- Empty tags have no closing tag: br, hr, img, input.

3. Text tags

Tag	Use
<h1>...<h6>	Headings, h1 is biggest
<p>	Paragraph
 	Line break
<hr>	Horizontal line
	Bold (important)
	Italic (stress)
<div>	Block box, takes full line
	Inline part inside a line

4. Links and images

links.html

```
<a href="https://react.dev">React</a>
<a href="page2.html">Next page</a>

```

- **href** = where the link goes. **src** = picture file. **alt** = text if picture fails.

5. Lists

list.html

```
<ul>           <ol>
  <li>Riya</li>  <li>Riya</li>
  <li>Aman</li> <li>Aman</li>
</ul>          </ol>
```

- **ul** = bullets, **ol** = numbers, **li** = one item.

6. Tables

table.html

```
<table>
  <tr>
    <th>Name</th> <th>Marks</th>
  </tr>
  <tr>
    <td>Riya</td> <td>85</td>
  </tr>
</table>
```

- **tr** = row, **th** = heading cell, **td** = data cell.


7. Forms

form.html

```
<form>
  <label>Name:</label>
  <input type="text" name="name">
  <input type="number" name="marks">
  <button>Submit</button>
</form>
```

input type	Use
text	One line of text
number	Numbers only
email	Email address
password	Hidden characters
checkbox	Tick box
radio	Pick one option
date	Date picker

8. Page layout tags

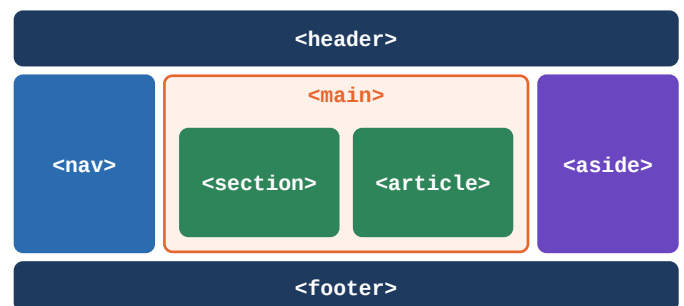

9. Common attributes

Attribute	Use
id	Unique name: id="top"
class	Group name: class="card"
style	Quick CSS: style="color:red"
title	Tooltip on hover
href / src	Link address / file name

10. Connect CSS and JS

index.html

```
<head>
  <link rel="stylesheet" href="style.css">
</head>
<body>
  ...
  <script src="app.js"></script>
</body>
```

- CSS goes in **head**. The script goes at the end of **body**.

11. Student card page

student.html

```
<body>
  <h1>Student List</h1>
  <div class="card">
    <h2>Riya</h2>
    <p>Age: 20</p>
    <p>Course: React</p>
    <p>Marks: 85</p>
  </div>
  <a href="more.html">See more</a>
</body>
```

12. HTML vs React (JSX)

App.jsx

```
const student = { name: "Riya", marks: 85 };

function App() {
  return (
    <div className="card">
      <h2>{student.name}</h2>
      <p>Marks: {student.marks}</p>
    </div>
  );
}
```

- **class** becomes **className**. Use **{ }** for JS values.
- Every JSX tag must be closed, even **** and **<input />**.

13. Media tags

media.html

```
<video src="intro.mp4" controls></video>
<audio src="song.mp3" controls></audio>
<iframe src="https://react.dev"></iframe>
```

- **controls** shows play and pause buttons.
- **iframe** shows another web page inside your page.


14. Useful head tags

index.html

```
<head>
  <meta name="viewport"
    content="width=device-width, initial-scale=1">
  <link rel="icon" href="logo.png">
  <title>Student Page</title>
</head>
```

- **viewport** makes the page fit phone screens.
- **icon** is the small picture on the browser tab.

15. Browser tree (DOM)

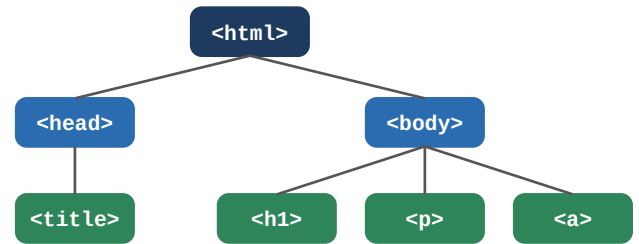

- The browser reads tags top to bottom and builds this tree. Parent on top, children below.

16. Block vs inline

<div> block: starts a new line

<div> block: takes the full width

Marks: 85 out of 100 (span stays in the line)

17. Comments and symbols

notes.html

```
<!-- This is a comment -->
<p>5 &lt; 10 &amp; 20 &gt; 10</p>
```

Symbol code	Result
<	shows <
>	shows >
&	shows &
 	a blank space
©	shows ©

18. Common mistakes

Wrong	Right
<p>Hi	Hi
<i>Hi</i>	<i>Hi</i>
<h1>Name<h1>	Name
href=page.html	href="page.html"

Good habits: close every tag, use small letters, indent children, give every img an alt.