

enumext

ENUMERATE EXERCISE SHEETS

V1.0 2024-11-10^{*}

©2024 by Pablo González[†]

CTAN: <https://www.ctan.org/pkg/enumext>

 <https://github.com/pablgonz/enumext>

Abstract

This package provides enumerated list environments compatible with *tagging* PDF for creating “*simple exercise sheets*” along with “*multiple choice questions*”, storing the “*answers*” to these in memory using `multicol` and `scontents` packages.

Contents

1	Introduction	1	6	The storage system	11
1.1	Description and usage	2	6.1	Keys for storage system	11
1.2	The concept of left margin	3	6.1.1	Keys for label and ref	12
1.3	User interface	3	6.1.2	Keys for wrap and marks	12
1.3.1	Internal counters	3	6.1.3	Keys for debug and checking	13
1.3.2	Public dimension	3	6.2	The command <code>\anskey</code>	13
1.3.3	Support for <code>multicol</code>	4	6.2.1	Keys for <code>\anskey</code>	14
1.3.4	Support for <code>minipage</code>	4	6.3	The environment <code>anskey*</code>	14
1.3.5	The <code>\label</code> and <code>\ref</code> system	4	6.3.1	Keys for <code>anskey*</code>	14
1.3.6	Support for <code>\footnote</code>	4	6.4	The environment <code>keyans</code>	15
2	The environments provided	5	6.4.1	The <code>\item*</code> in <code>keyans</code>	16
2.1	The environment <code>enumext</code>	5	6.5	The environment <code>keyanspic</code>	16
2.2	The environment <code>enumext*</code>	5	6.5.1	Keys for <code>keyanspic</code>	17
2.3	The command <code>\item*</code>	5	6.5.2	The command <code>\anspic</code>	17
2.3.1	Keys for <code>\item*</code>	6	6.6	Printing stored content	18
2.4	The command <code>\item</code> in <code>enumext*</code>	6	6.6.1	The command <code>\getkeyans</code>	18
3	The command <code>\setenumext</code>	6	6.6.2	The command <code>\foreachkeyans</code>	18
4	The command <code>\setenumextmeta</code>	6	6.6.3	The command <code>\printkeyans</code>	19
5	The <code>keyval</code> system	7	7	Full examples	20
5.1	Keys for label and ref	7	8	Tagged PDF examples	22
5.2	Keys for spaces	8	9	The way of non-enumerated lists	23
5.2.1	Vertical spaces	8	10	References	25
5.2.2	Horizontal spaces	9	11	Change history	25
5.3	Keys for add code	9	12	Index of Documentation	26
5.4	Keys for start, series and resume	10	13	Implementation	28
5.5	Keys for <code>multicols</code>	10	14	Index of Implementation	147
5.6	Keys for <code>minipage</code>	11			
5.6.1	The command <code>\miniright</code>	11			
5.6.2	The key <code>mini-right</code>	11			

Motivation and acknowledgments

Usually it is enough to use the classic `enumerate` environment to generate “*simple exercise sheets*” or “*multiple choice questions*”, the basic idea behind `enumext` is to cover three points:

1. To have a simple interface to be able to write “*lists of exercises*” with “*answers*”.
2. To have a simple interface for writing “*multiple choice questions*”.
3. To have a simple interface for placing “*columns*” and “*drawings*” or “*tables*”.

This package would not be possible without Phelype Oleinik who has collaborated and adapted a large part of the code and all \LaTeX team for their great work and to the different members of the `TeX-SX` community who have provided great answers and ideas. Here a note of the main ones:

1. Answer given by Alan Munn in `\topsep`, `\itemsep`, `\partopsep`, `\parsep` - what do they each mean (and what about the bottom)?
2. Answer given by Enrico Gregorio in `Understanding minipages` - aligning at top
3. Answer given by Ulrich Diez in `Different mechanics of hyperlink vs. hyperref`
4. Answer given by Enrico Gregorio in `Minipage and multicols`, vertical alignment

^{*}This file describes a documentation for v1.0, last revised 2024-11-10.

[†]E-mail: pablgonz@educarchile.cl.

License and Requirements

Permission is granted to copy, distribute and/or modify this software under the terms of the LaTeX Project Public License (lpp), version 1.3 or later (<https://www.latex-project.org/lppl.txt>). The software has the status “maintained”.
The enumext package loads and requires multicol[3] and contents[4] packages, need to have a modern T_EX distribution such as T_EX Live or MiK_TE_X. It has been tested with the standard classes provided by L^AT_EX: book, report, article and letter on 10pt, 11pt and 12pt.

The minimum requirement is L^AT_EX release 2024-11-01.

1 Introduction

In the L^AT_EX world there are many useful packages and classes for creating “lists of exercises”, “worksheets” or “multiple choice questions”, classes like exam[1] and packages like xsim[2] do the job perfectly, but they don’t always fit the basic day to day needs.

In my work (and in the work of many teachers) it is common to use “simple exercise sheets” also known as “informal lists of exercises”, as an example:

1. Factor $x^2 - 2x + 1$

2. Factor $3x + 3y + 3z$

3. True False

(a) $\alpha > \delta$

(b) L^AT_EX is cool?

4. Related to Linux
- (a) You use linux?

(b) Usually uses the package manager?

(c) Rate the following package and class

i. xsim-exam

ii. xsim

iii. exsheets

Sometimes we are also interested in showing the “answers” along with the questions:

1. Factor $x^2 - 2x + 1$

*

$(x - 1)^2$

2. Factor $3x + 3y + 3z$

*

$3(x + y + z)$

3. True False

(a) $\alpha > \delta$

*

False

(b) L^AT_EX is cool?

*

Very True!

4. Related to Linux
- (a) You use linux?

*

Yes

(b) Usually uses the package manager?

*

Yes, dnf

(c) Rate the following package and class

i. xsim-exam

*

doesn’t exist for now :(

ii. xsim

*

very good

iii. exsheets

*

obsolete
- Or we are interested in referring to a specific question and its “answer”, for example:
- The answer to 3.(b) is “Very True!” and the answer to 4.(c).ii is “very good”.
- Or we are interested in printing all the “answers”:
1. $(x - 1)^2$

2. $3(x + y + z)$

3. (a) False

(b) Very True!

4. (a) Yes

⌘

(b) Yes, dnf

⌘

(c) i. doesn’t exist for now :(

⌘

ii. very good

⌘

iii. obsolete

⌘
- Another very common thing to use in my work is “multiple choice questions”, for example:
1. First type of questions

A) value

B) correct

C) value

D) value

2. Second type of questions

I. $2\alpha + 2\delta = 90^\circ$

II. $\alpha = \delta$

III. $\angle EDF = 45^\circ$

A) I only

B) II only

C) I and II only

D) I and III only

E) I, II, and III

★ 3. Third type of questions

(1) $2\alpha + 2\delta = 90^\circ$

(2) $\angle EDF = 45^\circ$

A) value

B) value

C) value

D) value

E) value

4. Question with image and label below:

A

A)

B


B)

A

C)

A

D)



E)

5. Question with image on right side:

A) value

B) value

C) value

D) correct

E) value

B

©2024 by Pablo González L

2 / 163

Where what we are interested in the $\langle label \rangle$ and a “short note” that we leave as an explanation, and then print them:

1. B) $x = 5$

2. D)

3. C) some note
- ⌘ 4. E) A duck

⌘ 5. D) “other note”

⌘

The `enumext` package was created and designed to meet these small requirements in the creation of “simple worksheets” and “multiple choice questions”.

- These “simple worksheets” or “multiple choice questions” appear to be easy to obtain using a combination of the `enumerate`, `minipage` and `multicols` environments, but like many things, what “looks simple” is not so simple.

1.1 Description and usage

The `enumext` package defines enumerated environments using the `list` environment provided by \TeX , but “does not redefine” any internal commands associated with it such as `\list`, `\endlist` or `\item` outside of the “scope” in which they are defined.

- This package is NOT intend to replace the `enumerate` environment nor replace the powerful `enumitem`[6], the approach is intended to work without hindering either of them.

This package can be used with `xelatex`, `lualatex`, `pdflatex` and the classical `latex`»`dvips`»`ps2pdf` and is present in \TeX Live and $\text{MiK}\text{\TeX}$, use the package manager to install. For manual installation, download `enumext.zip` and unzip it, run `luatex enumext.ins` and move all files to appropriate locations, then run `mktexlsr`. To produce the documentation run `arara enumext.dtx`.

<code>enumext.sty</code>	»	<code>TDS:tex/latex/enumext/</code>
<code>enumext.pdf</code>	»	<code>TDS:doc/latex/enumext/</code>
<code>README.md</code>	»	<code>TDS:doc/latex/enumext/</code>
<code>enumext.dtx</code>	»	<code>TDS:source/latex/enumext/</code>
<code>enumext.ins</code>	»	<code>TDS:source/latex/enumext/</code>

The package is loaded in the usual way:

```
\usepackage{enumext}
```

1.2 The concept of left margin

There is a direct relationship between the parameters `\leftmargin`, `\itemindent`, `\labelwidth` and `\labelsep` plus an “extra space” that makes it difficult to obtain the desired *horizontal spaces* in a `list` environment. Usually we don’t want the `list` to go beyond the left margin of the page, but since these four values are related, that causes a problem.

The `enumitem`[6] package adds the `\labelindent` parameter to solve some of these problems. A simplified representation of this in the figure 1.



Figure 1: Representation of horizontal lengths in `enumitem`.

The `enumext` package does NOT provide a user interface to set the values for `\leftmargin` and `\itemindent`, instead it provides the keys `list-offset` and `list-indent` which internally set the values for `\leftmargin` and `\itemindent`. The concepts of `\leftmargin` and `\itemindent` are different in `enumext`. The figure 2 shows the visual representation of idea.



Figure 2: Representation of horizontal lengths concept in `enumext`.

In this way we reduce a *little* the amount of parameters we have to pass. With the default values of keys `list-offset`, `list-indent`, `labelwidth` and `labelsep` the lists will have the (usually) expected output for “simple worksheets”. The figure 3 shows the visual representation.



Figure 3: Default horizontal lengths `list-offset=0pt`, `list-indent=\labelwidth+\labelsep` in `enumext`.

1.3 User interface

The user interface consists of two main list environments `enumext` (vertical) and `enumext*` (horizontal), the environment `anskey*` and the command `\anskey` to “store content” and the environments `keyans`, `keyans*` and `keyanspic` for multiple choice. It also provides the commands `\getkeyans` to print individual *stored content*, `\printkeyans` and `\foreachkeyans` to print all *stored content*, `\miniright` for `minipage`, `\setenumext` and `\setenumextmeta` to config [*key* = *val*] options.

1.3.1 Internal counters

The package `enumext` uses internally the `enumXi`, `enumXii`, `enumXiii`, `enumXiv` counters for the four nesting levels of the `enumext` environment, the `enumXv` counter for the `keyans` environment, the `enumXvi` counter for the `keyanspic` environment, the counter `enumXvii` for `enumext*` environment and the counter `enumXviii` for `keyans*` environment.

- If any package defines these counters or they are user-defined in the document, the package will return a fatal error and abort the load.

1.3.2 Public dimension

The package `enumext` only provides a single public dimension `\itemwidth` and is intended for user convenience only and is not for internal use as such. The dimension `\itemwidth` is *rigid length* and contains the “width of the content” of each `\item` regardless of `labelwidth` and `labelsep`.

- If any package defines `\itemwidth` or they are user-defined `\itemwidth` in the document, the package will overwrite it without warning.

1.3.3 Support for multicol

The package provides direct support for using the `multicol`[3] package. This allows to obtain directly a two-column output as shown in the figure 4.



Figure 4: Representation of the two column output for a nested level in `enumext` environment.

The “non starred” version of the `multicols` environment is always used together with the `\raggedcolumns` command and is controlled by `columns` and `columns-sep` keys. It can be used in all nesting levels of the environment `enumext` and the environment `keyans` and can together with the `mini-env` key. If you need to force a start a new column `\columnbreak` must be used (see §5.5).

- The `\columnseprule` command is not available as a key and is set to “zero” for the inner levels and the `keyans` environment. If the value of this is set inside the document, it will affect “all environments” that use the `columns` key.

1.3.4 Support for minipage

The package provides direct support for `minipage` environment, this allows you to obtain an output like the one shown in figure 5.



Figure 5: Representation of the `mini-env` output for a nested level `enumext` environment.

The `minipage` environments on “left side” and “right side” is always used with “aligned on top” [t]. It can be used in all nesting levels of the environment `enumext` and the environment `keyans` and is controlled by `mini-env` and `mini-sep` keys. In order to switch from the “left” side `minipage` environment to the “right” side one must use the command `\miniright` (see §5.6).

1.3.5 The \label and \ref system

This package provides a user interface like the `enumitem`[6] package to customize the references which is activated by the `ref` key (§5.1), the standard \LaTeX `\label` and `\ref` commands work as usual. It also provides an “internal reference” system for the “stored content” by means of the key `save-ref` (§6.1.1) when the key `save-ans` (§6.1) is active.

1.3.6 Support for \footnote

The `enumext*` and `keyans*` environments and the `mini-env` key use the `minipage` environment in their implementation but in a transparent way for the user, i.e. it is only used for typesetting and not directly. The `enumext` package provides an *internal implementation* for the command `\footnote` compatible with the `hyperref` package to work in the same way as if it were used anywhere in the document.

Unfortunately, if *tagging* PDF is not enabled, it will not produce the expected “links” because the internal implementation uses `\footnotetext[⟨number⟩]` and `\footnotemark[⟨number⟩]{⟨text⟩}` and support for these is limited by the `hyperref` package.

The best way to solve this if *tagged* PDF is NOT active is to use Jean-François Burnol `footnotehyper`[9] package, it will support keeping the “links” if `hyperref` is loaded with the `hyperfootnotes=true` option (default). Load it is as follows:

```
\IfDocumentMetadataTF{ }
{
  \usepackage{footnotehyper}
  \makesavenoteenv{enumext}
  \makesavenoteenv{enumext*}
}
```

At the moment the `footnotehyper` package is not compatible with *tagged* PDF.

2 The environments provided

The package `enumext` provides two main list environments, the *vertical* environment `enumext` and the *horizontal* environment `enumext*`.

<code>enumext</code>	<code>\begin{enumext}[⟨keyval list⟩]</code>	<code>\begin{enumext*}[⟨keyval list⟩]</code>
<code>enumext*</code>	<code>\item ⟨item content⟩</code>	<code>\item ⟨item content⟩</code>
	<code>\item [⟨custom⟩] ⟨item content⟩</code>	<code>\item [⟨custom⟩] ⟨item content⟩</code>
	<code>\item* [⟨symbol⟩] [⟨offset⟩] ⟨item content⟩</code>	<code>\item* [⟨symbol⟩] [⟨offset⟩] ⟨item content⟩</code>
	<code>\end{enumext}</code>	<code>\end{enumext*}</code>

2.1 The environment `enumext`

The `enumext` is an environment that works in the same way as the standard `enumerate` environment provided by \LaTeX , `\item` and `\item[⟨custom⟩]` commands work in the usual way. The environment can be nested with at most “four levels” and the options can be configured globally using `\setenumext` command and locally using `[⟨key = val⟩]` in the environment.

Example with `columns=2`

1. This text is in the first level.
- A. This text is in the fourth level.
- (a) This text is in the second level.
- X This text is in the first level.
- i. This text is in the third level.
- ★ 2. This text is in the first level.

2.2 The environment `enumext*`

The `enumext*` is a *horizontal list environment* similar to the `shortenumerate` or `tasks` environments provided by the `shortlst`[15] and `tasks`[16] packages, `\item` and `\item[⟨custom⟩]` work as usual. The options can be configured globally using `\setenumext` command and locally using `[⟨key = val⟩]` in the environment.

Some considerations to take into account for this environment:

- The environment cannot be nested within itself or in the environment `keyans*`, but it can be nested within `enumext` and vice versa.
- Each “item content” in the environment is placed within a `minipage` environment whose *width* is stored in the dimension `\itemwidth` that NOT includes `labelwidth`, `labelsep`, only the *width of the content*.
- You cannot have floating environments like `figure` or `table` but `\footnote` with `hyperref` support is supported if the `footnotehyper` package is loaded (see §1.3.6 for full support).
- You cannot have any standard list environments like `itemize`, `enumerate`, `description`, `quote`, `quotation`, `verse`, `center`, `flushleft`, `flushright`, `verbatim`, `tabbing`, `trivlist`, `list` and all environments created with `\newtheorem`.

Example with `columns=2`

1. This text is in the first level.
2. This text is in the first level.
- X This text is in the first level.
- ★ 4. This text is in the first level.

2.3 The command `\item*`

```
\item* \item* [⟨symbol⟩] [⟨offset⟩]
```

The `\item*`, `\item*[⟨symbol⟩]` and `\item*[⟨symbol⟩][⟨offset⟩]` works like the numbered `\item`, but placing a `⟨symbol⟩` to the “left” of the `⟨label⟩` separated from it by the `⟨offset⟩` set by the the *second optional argument*. The *starred argument* “*” cannot be separated by spaces ‘`␣`’ from the command, i.e. `\item*` and the *first optional argument* does “NOT” support *verbatim content*. Can be configure with the keys `item-sym*` and `item-pos*` locally in the environment or globally using `\setenumext` command (§3).

The behavior of `\item*` in the `enumext` and `enumext*` environments is NOT the same as in the `keyans` and `keyans*` environments.

2.3.1 Keys for \item*

`item-sym*` = {<symbol>} default: \textborn
Sets the *symbol* to be displayed in the “left” of the box containing the current <label> set by `labelwidth` key for `\item*` in `enumext` and `enumext*`. The *symbol* can be in *text* or *math* mode, for example `item-sym*={\star}`.

`item-pos*` = {<rigid length>} default: by levels
Sets the *offset* between the box containing the current <label> defined by `labelwidth` key and the <symbol> set by `item-sym*` key. The default values are set by `labelsep` key at each level. If positive values are passed it will *offset to the left* and if negative values are passed it will *offset to the right*.

2.4 The command \item in enumext*

The `\item` command for the `enumext*` environment provides an “first optional argument” `\item(<columns>)` which “joins items” between columns. Let’s consider the following examples adapted directly from the `task` package:

```
\begin{enumext*}[widest=10,columns=4]
  \item The first
  \item* The second
  \item The third
  \item The fourth
  \item(3)* The fifth item is way too long for this and needs three columns
  \item The sixth
  \item The seventh
  \item(2)[X] The eighth item is way too long for this and needs two columns
    (\the\itemwidth)
  \item The ninth
  \item[Z] The tenth (\the\itemwidth)
\end{enumext*}
```

1. The first
- ★ 2. The second
3. The third
4. The fourth
- ★ 5. The fifth item is way too long for this and needs three columns
6. The sixth
7. The seventh
- X 8. The eighth item is way too long for this and needs two columns (196.17749pt)
9. The ninth
- Z 10. The tenth (89.28171pt)

3 The command \setenumext

<code>\setenumext</code>	<code>\setenumext{<key = val>}</code>	<code>\setenumext[<keyans*>]{<key = val>}</code>
	<code>\setenumext[<enumext, level>]{<key = val>}</code>	<code>\setenumext[<print, level>]{<key = val>}</code>
	<code>\setenumext[<enumext*>]{<key = val>}</code>	<code>\setenumext[<print, *>]{<key = val>}</code>
	<code>\setenumext[<keyans>]{<key = val>}</code>	<code>\setenumext[<print*>]{<key = val>}</code>

The command `\setenumext` sets the <keys> on a global basis for environments `enumext`, `enumext*`, `keyans`, `keyans*` and the `\printkeyans` command. It can be used both in the preamble and in the body of the document as many times as desired.

The <keys> set in the *optional argument* of environments and commands have the *highest precedence*, overriding both options passed by `\setenumext`. If the *optional argument* is not passed, the first level of the environment `enumext` will be taken by default.

- 🔴 The key `save-ans` that activate the “storage system” must NOT be passed through this command and must be passed directly in the *optional argument* of the “first level” of the environment in which they are executed.

4 The command \setenumextmeta

<code>\setenumextmeta</code>	<code>\setenumextmeta {<key name>}{<key-one = val, key-two = val, ...>}</code>
	<code>\setenumextmeta*{<key name>}{<key-one = val, key-two = val, ...>}</code>
	<code>\setenumextmeta [<enumext*>]{<key name>}{<key-one = val, key-two = val, ...>}</code>
	<code>\setenumextmeta [<enumext, level>]{<key name>}{<key-one = val, key-two = val, ...>}</code>

The command `\setenumextmeta` adds a new “meta-key” for the environments `enumext` and `enumext*`, the {<key name>} must be different from those defined by the package. If the *optional argument* is not passed, the new “meta-key” will be created for the “first level” of the environment `enumext`.

The *starred argument* ‘*’ will create the new “meta-key” for the environment `enumext*` and for all levels of the environment `enumext`. For example: `\setenumextmeta*{midsep}{topsep=3pt, partopsep=0pt}` will create a new key `midsep` available for all levels of the `enumext` environment and the `enumext*` environment and we can use it like any other key so `\begin{enumext}[midsep]` and `\begin{enumext*}[midsep]` will be valid.

5 The keyval system

The $\langle key = val \rangle$ system used by the `enumext` package is implemented using `l3keys` so it must be taken into consideration that those keys marked as “*value forbidden*”, that is $\langle key \rangle$ is different from $\langle key = \rangle$.

All $\langle keys \rangle$ described in this section are available for the `enumext`, `enumext*`, `keyans` and `keyans*` environments with the exception of the keys `series`, `resume`, `resume*` which are only available for the “*first level*” of the environments `enumext` and `enumext*`; and the keys `mini-right`, `mini-right*` which are only available for the `enumext*` and `keyans*` environments.

All $\langle keys \rangle$ related to vertical or horizontal spacing accept a “*skip*” or “*dim*” expression if passed between braces, i.e. you do not need to use `\dimeval` or `\dimexpr` to perform calculations.

- It should be kept in mind that using any $\langle key \rangle$ that sets a *rubber lengths* or *rigid lengths* for vertical or horizontal space on a level will influence the vertical and horizontal space for *inners levels* and `keyans`, `keyans*` and `keyanspic` environments.

5.1 Keys for label and ref

`mode-box` $\langle value forbidden \rangle$ default: *not used*

This is a “*switch-key*” that does not receive an argument and is “*only*” available for the “*first level*” of the `enumext` environment and the `enumext*` environment. When this is set the `label`, `font`, `wrap-label` and `wrap-label*` keys are executed within `\makebox` for the `enumext` and `keyans` environments.

- This key is intended for compatibility with *tagged* PDF and is forcibly “*enabled*” when `\DocumentMetadata` is present. If you want to get the same document output whether `\DocumentMetadata` is active or not, you must enable this key.
- In the `enumext*` and `keyans*` environments `\makebox` are redefined using `\makebox` by default. If `enumext` or `keyans` is used in the `enumext*` environment the key must be activated manually.

`label` = { $\langle \backslash alph* | \backslash Alph* | \backslash arabic* | \backslash roman* | \backslash Roman* \rangle$ } default: *by levels*

Sets the $\langle label \rangle$ that will be printed at the *current level* and default value for `labelwidth` key. The default value for the first level of the environments `enumext` and `enumext*` are `\arabic*`, for second level are $\langle \backslash alph* \rangle$, for third level are `\roman*`, and for fourth level are `\Alph*`. For `keyans` and `keyans*` environments the default value is `\Alph*`.

- This key is intended to give the basic structure with which the $\langle label \rangle$ will be displayed, and the form in which it is used by standard “*label and ref*” and the “*internal label and ref*” system with the `save-ref` key. You cannot use commands with $\langle label \rangle$ as an argument, for example `\emph{\langle \backslash alph* \rangle}` will return an error. For full customization of how $\langle label \rangle$ is displayed use the `font`, `wrap-label` and/or `wrap-label*` keys.

`labelsep` = { $\langle rigid length \rangle$ } default: `0.3333em`

Sets the *horizontal space* between the box containing the current $\langle label \rangle$ defined by `label` key and the text of an item on the first line. Internally sets the value of `\labelsep` for the current level.

`labelwidth` = { $\langle rigid length \rangle$ } default: *by label*

Sets the *width* of the box containing the current $\langle label \rangle$ set by the `label` key. Internally sets the value of `\labelwidth` for the current level. The default values are calculated by means of the *width* of a box by setting a *value* to the current counter set by `label` key using ‘0’ for `\arabic*`, ‘M’ for `\Alph*`, ‘m’ for `\alph*`, ‘VIII’ for `\Roman*` and ‘viii’ for `\roman*`.

`widest` = { $\langle integer | string \rangle$ } default: *empty*

Sets the `labelwidth` key pass the $\langle integer \rangle$ or converting the $\langle string \rangle$ of the form `\Alph`, `\alph`, `\Roman` or `\roman` to a *value* for the current counter defined by `label` key, then calculating the *width* by means of a box. For example `widest={XXIII}` or `widest={23}` are equivalent. This key is useful when the default values of the `labelwidth` key are smaller than those actually used.

`font` = { $\langle font commands \rangle$ } default: *empty*

Sets the *font style* for the current $\langle label \rangle$ defined by `label` key. For example `font={\bfseries\small}`.

`align` = { $\langle left | right | center \rangle$ } default: *left*

Sets the *aligned* of $\langle label \rangle$ defined by `label` key on the current level in the label box.

`wrap-label` = { $\langle code \{ \#1 \} more code \rangle$ } default: *empty*

Wraps the *current* $\langle label \rangle$ defined by `label` key referenced by `\{ \#1 \}` after executing the `align` and `font` keys. The `\{ \langle code \rangle \}` must be passed between braces and this does not modify the value set by the `labelwidth` key and is applied *only* on `\item` and `\item*`. When using it in the `\setenumext` command it is necessary to use the *double* ‘`\{ \#1 \}`’. For example `wrap-label={\fbox{\#1}}` or you can create a command:

```
\NewDocumentCommand \mywrap { s m }
{
  \IfBooleanTF{\#1}
  {
    {\textcolor{red}{\textbf{Q}}\textcolor{blue}{\textbf{.}}\textcolor{gray}{\#2}}
    {\textcolor{blue}{\textbf{Q}}\textcolor{red}{\textbf{.}}\textcolor{gray}{\#2}}
  }
}
```

and then pass it through the key `wrap-label={\mywrap{\#1}}` or `wrap-label={\mywrap*{\#1}}`.

`wrap-label*` = { $\langle code \{ \#1 \} more code \rangle$ } default: *empty*

The same as the `wrap-label` key but also applies on `\item[custom]`.

`ref = {⟨code⟩ {⟨\alph*⟩⟨\Alph*⟩⟨\arabic*⟩⟨\roman*⟩⟨\Roman*⟩ more code⟩}` default: *empty*

Modifies the way *cross references* are displayed. The `label` key sets the default form of the *cross references*, by using this key you can define a different format, for example: `ref=\emph{⟨\alph*⟩}` is valid.

Internally it renews the command associated with each counter when it is executed, i.e., in the environment `enumext` the command `\theenumxi` is modified when the key is executed at the first level, `\theenumxii` when it is executed at the second level and `\theenumxiii` together with `\theenumxiv` when it is executed at the third and fourth levels.

- This must be kept in mind, since the values set by the `label` and `ref` keys are not cumulative by levels, so if you have used the `ref` key in the first level and then want to associate the counter with `label` or `ref` in the second level you must use the direct commands, i.e. `\arabic{enumxi}` to indicate the count of the first level instead of using `\theenumxi`.

5.2 Keys for spaces

`show-length = {⟨true⟩|⟨false⟩}` default: *false*

Displays on the terminal the values for *all list parameters* at the current level. For *vertical spaces* show the values of `\topsep`, `\itemsep`, `\parsep` and `\partopsep`. For *horizontal spaces* show the values of `\labelwidth`, `\labelsep`, `\itemindent`, `\listparindent` and `\leftmargin`.

5.2.1 Vertical spaces

`topsep = {⟨rubber length⟩|⟨rigid length⟩}` default: *by levels*

Set the *vertical space* added to both the top and bottom of the list. Internally sets the value of `\topsep` for the current level. The default value for the first level of the environments `enumext` and `enumext*` are `8.0pt` plus `2.0pt` minus `4.0pt`, for second level are `4.0pt` plus `2.0pt` minus `1.0pt`, for third and fourth level are `2.0pt` plus `1.0pt` minus `1.0pt`. For `keyans` and `keyans*` environments the default value is `4.0pt` plus `2.0pt` minus `1.0pt`.

`parsep = {⟨rubber length⟩|⟨rigid length⟩}` default: *by levels*

Set the *vertical space* between paragraphs within an item. Internally sets the value of `\parsep` for the current level. The default value for the first level of the environments `enumext` and `enumext*` are `4.0pt` plus `2.0pt` minus `1.0pt`, for second level are `2.0pt` plus `1.0pt` minus `1.0pt`, for third and fourth level are `0pt`. For `keyans` and `keyans*` environments the default value is `2.0pt` plus `1.0pt` minus `1.0pt`.

- In the `enumext*` and `keyans*` environments this value is passed to `\parskip` within the `minipage` environment where “item content” is placed.

`partopsep = {⟨rubber length⟩|⟨rigid length⟩}` default: *by levels*

Set the *vertical space* added, beyond `topsep`, to the “top” and “bottom” of the entire environment if the environment instance is preceded by a “blank line” or `\par` command. Internally sets the value of `\partopsep` for the current level. The default values for first and second level in environment `enumext` are `2.0pt` plus `1.0pt` minus `1.0pt`, for third and fourth level are `1.0pt` minus `1.0pt`. For the `keyans` environment the default value is `2.0pt` plus `1.0pt` minus `1.0pt`, and for the `keyans*` and `enumext*` environments it is available but *without* effect.

- The value of this parameter also affects the *inner levels* and the environments `keyans`, `keyanspic` and `keyans*`. Caution should be taken with “blank lines” or `\par` command “before” each environment or nested level when formatting the source code of document. T_EX will enter *vertical mode* and apply this value to the “top” and “bottom” the environment or nested level.

`itemsep = {⟨rubber length⟩|⟨rigid length⟩}` default: *by levels*

Set the *vertical space* between items, beyond the `parsep`. Internally sets the value of `\itemsep` for the current level. The default value for the first level of the environments `enumext` and `enumext*` are `4.0pt` plus `2.0pt` minus `1.0pt`, for the rest of the levels are `2.0pt` plus `1.0pt` minus `1.0pt`. For `keyans` and `keyans*` environments the default value is `4.0pt` plus `2.0pt` minus `1.0pt`.

- In the `enumext*` and `keyans*` environments this value corresponds to the separation between rows.

`noitemsep` *⟨value forbidden⟩* default: *not used*

This is a “meta-key” that does not receive an argument. Set `itemsep` and `parsep` equal to `0pt` the entire level of environment.

`nosep` *⟨value forbidden⟩* default: *not used*

This is a “meta-key” that does not receive an argument. Sets all keys for vertical spacing equal to `0pt` the entire level of environment.

`base-fix` *⟨value forbidden⟩* default: *not used*

This is a “switch-key” that does not receive an argument available *only* for the “first level” of environment `enumext`. Fix the *baseline* when an environment `enumext` is nested in `enumext*` and there is no material between the `\item` and the start of the environment for example `\item \begin{enumext}` within the environment `enumext*`. Internally sets the keys `topsep`, `above` and `above*` at `0pt`.

- This key is provided as a way to work around this minor issue, but you should be aware that if for some reason you have the `itemindent` key set in the `enumext*` environment it will be lost and you will need to adjust it using the `list-offset` key in the `enumext` environment.

- The following $\langle keys \rangle$ should be used with “caution”, they are intended to be used at the “top” and “bottom” of the environment when the `columns` or `mini-env` keys do not provide adequate *vertical spaces*. The values passed can be *rubber* or *rigid* lengths, the way they are applied is the way you differ, using the star ‘*’ $\langle keys \rangle$ applies `\vspace*` so that \LaTeX does *not discard* this space at page break.

`above = { $\langle rubber length \mid rigid length \rangle$ }` default: *not used*

Set the *extra vertical space* added, beyond `topsep`, to the top of the entire level of environment. This key is intended to give a “fine adjustment” of the vertical space “above” the environment without hindering the value of the `topsep` key. The space is added with `\vspace` so is “discardable”.

`above* = { $\langle rubber length \mid rigid length \rangle$ }` default: *not used*

Set the *extra vertical space* added, beyond `topsep`, to the top of the entire level of environment. This key is intended to give a “fine adjustment” of the vertical space “above” the environment without hindering the value of the `topsep` key. The space is added with `\vspace*` so is “not discardable”.

`below = { $\langle rubber length \mid rigid length \rangle$ }` default: *not used*

Set the *extra vertical space* space added, beyond `topsep`, to the bottom of the entire level of environment. This key is intended to give a “fine adjustment” of the vertical space on the “below” the environment without hindering the value of the `topsep` key. The space is added with `\vspace` so is “discardable”.

`below* = { $\langle rubber length \mid rigid length \rangle$ }` default: *not used*

Set the *extra vertical space* space added, beyond `topsep`, to the bottom of the entire level of environment. This key is intended to give a “fine adjustment” of the vertical space on the “below” the environment without hindering the value of the `topsep` key. The space is added with `\vspace*` so is “not discardable”.

5.2.2 Horizontal spaces

`list-offset = { $\langle rigid length \rangle$ }` default: `0pt`

Sets the *horizontal translation* of the entire environment level from the left edge of the box defined by the `labelwidth` key. Internally sets the values of `\leftmargin` and `\itemindent` for the current level.

`list-indent = { $\langle rigid length \rangle$ }` default: `labelwidth + labelsep`

Sets the *indentation* of the whole environment under the box defined by `labelwidth` and `labelsep` keys. Internally sets the value of `\leftmargin` and `\itemindent` for the current level. If `list-indent=0pt` is set in the environments `enumext` and `keyans` the $\langle label \rangle$ will be part of the text, separated by the value of the `labelsep` key and the *first word*, in simple terms it will look like a “common paragraph”.

- The `enumext*` and `keyans*` environments are implemented using `\makebox` and `minipage` which causes “list indent” to always be equal to the value passed to `labelwidth` plus `labelsep`. Passing a value to this key is equivalent to setting the value for the `list-offset` key.

`itemindent = { $\langle rigid length \rangle$ }` default: `0pt`

Sets the extra *horizontal indentation*, beyond `labelsep`, of the “first line” off each `\item` that is not followed by a “blank line” or the `\par` command. This value must be greater than or equal to `0pt` and is applied internally using `\hspace` without modifying the value of `\itemindent`.

- This key is intended for the `enumext*` and `keyans*` environments where, by their implementation, it is not possible to adjust `labelwidth` and `list-indent` without modifying the output. If you use `enumext` or `keyans` and want to get around the *blank line* limitation or the `\par` command followed by `\item` you can modify `labelwidth` and `list-indent` and get the same effect.

`rightmargin = { $\langle rigid length \rangle$ }` default: `0pt`

Set the *horizontal space* between the right margin of the environment and the right margin of the enclosing environment, the value it takes must be greater than or equal to `0pt`. Internally sets the value of `\rightmargin` for the current level.

`listparindent = { $\langle rigid length \rangle$ }` default: `0pt`

Sets the *horizontal space* indentation, beyond `list-indent`, for second and subsequent paragraphs within a list item. Internally sets the value of `\listparindent` for the current level.

- In the `enumext*` and `keyans*` environments this value is passed to `\parindent` within the `minipage` environment where “item content” is placed.

5.3 Keys for add code

The following $\langle keys \rangle$ should be used with “caution”, they are intended to inject $\{ \langle code \rangle \}$ into different parts of the defined environments. We must keep in mind that the defined environments are based on the `list` base environment provided by \LaTeX which is defined (simplified) as plain form `\list{ $\langle arg one \rangle$ }{ $\langle arg two \rangle$ }`. Using the `before*` key does not allow access to the `list` parameters defined by $[\langle key = val \rangle]$.

`before = { $\langle code \rangle$ }` default: *not used*

Execute $\{ \langle code \rangle \}$ “before” the environment starts. The $\{ \langle code \rangle \}$ must be passed between braces, is executed “after” performing all calculations related to the *list parameters* in the environment and the parameters sets by $[\langle key = val \rangle]$ that is, in the second argument of the list after setting all the parameters `\begin{list}{ $\langle arg one \rangle$ }{ $\langle arg two \rangle$ }{ $\langle code \rangle$ }`.

`before* = {⟨code⟩}` default: *not used*
 Execute {⟨code⟩} “before” the environment starts. The {⟨code⟩} must be passed between braces, is executed “before” performing all calculations related to the *list parameters* and [*key = val*] sets in the environment that is, before the arguments defining the environment are executed: {⟨code⟩}\begin{list}{⟨arg one⟩}{⟨arg two⟩}.

`first = {⟨code⟩}` default: *not used*
 Executes {⟨code⟩} when “starting” the environment. The {⟨code⟩} must be passed between braces, is executed right “after” all *list parameters* are done, after the second argument of list, just before the first occurrence of \item: \begin{list}{⟨arg one⟩}{⟨arg two⟩}{⟨code⟩}\item.

- 🔹 Keep in mind that the code set in this key will affect the entire “body” of the environment and therefore the inner levels of the list and the *keyans* environment. It is recommended to set this key per level.
- 🔹 In the *enumext** and *keyans** environments this key is executed after the *listparindent*, *parsep* and *itemindent* keys within the *minipage* environment in which the “item content” is placed.

`after = {⟨code⟩}` default: *not used*
 Execute {⟨code⟩} “after” finishing the environment. The {⟨code⟩} must be passed between braces.

5.4 Keys for start, series and resume

`start = {⟨integer | integer expression⟩}` default: *1*
 Sets the *start value* of the numbering on the current level. The {⟨integer expression⟩} must be passed between braces, internally is evaluated and pass to the counter defined by *label* key on the current level, i.e. it is equivalent to enter `start={\dimeval{100*⟨value⟩}{chapter}}` or `start={100*⟨value⟩{chapter}}`.

`start* = {⟨integer | string⟩}` default: *not used*
 Sets the *start value* of the numbering on the current level. Internally ⟨string⟩ is converted and passed as value to the counter defined by *label* key on the current level, i.e. it is equivalent to enter `start=5`, `start=E` or `start=v`.

The following ⟨keys⟩ are “only” available for the *enumext** environment and the “first level” of the *enumext* environment and are ignored if set when nested within each other.

`series = {⟨series name⟩}` default: *not used*
 Stores the *keys* of the *optional argument* of the “first level” of the environment in which it is executed in {⟨series name⟩} which is used as an argument in the key *resume*. The ⟨keys⟩ stored in {⟨series name⟩} are not cumulative and are overwritten if the same {⟨series name⟩} is used again.

`resume = {⟨series name⟩}` default: *not used*
 Sets the *start value* and *options* for the “first level” continuing the numbering of the environment in which the `series={⟨series name⟩}` key was executed. If passed *without value* this will only set *start value* continue the numbering from the last environment in which `series={⟨series name⟩}` or `resume={⟨series name⟩}` is not present and if the *save-ans* key is active it will continue the numbering from the last environment in which it was executed. The *start value* can be overwritten using *start* or *start** keys.

`resume* ⟨value forbidden⟩` default: *not used*
 Sets the *start value* and *options* for the “first level” continuing the numbering of the environment in which the `series={⟨series name⟩}` or `resume={⟨series name⟩}` keys are NOT present, if the *save-ans* key is active it will continue the numbering from the last environment in which it was executed. The *start value* can be overwritten using *start* or *start** keys.

- 🔹 For security reasons the *series* key will never save in {⟨series name⟩} the keys *series*, *resume*, *resume**, *save-ans*, *save-key*, *start** and *start*. When using the key `resume={⟨series name⟩}` it will have hierarchy in the ⟨keys⟩ that are saved in {⟨series name⟩}, in order to establish the value of a ⟨key⟩ already saved in {⟨series name⟩} it must be placed to the “right” of `resume={⟨series name⟩}`, the same thing happens with the *resume** key, the exception is the *save-ans* key that must be placed on the “left” if you want to start the numbering with its value. The *resume* key passed “without value” must be exactly “without value”, i.e. `resume=` cannot be used and if executed before *resume** it will affect the *start value*.

5.5 Keys for multicol

`columns = {⟨integer⟩}` default: *1*
 Set the *number of columns* to be used by the *multicol* environment within the environments *enumext* and *keyans*. The value must be a positive integer less than or equal to 10. In the *enumext** and *keyans** environments they correspond to the default number of columns (without joining) and internally adjust the value of \itemwidth.

`columns-sep = {⟨rigid length⟩}` default: *by level*
 Set the *space between columns* used by the *multicol* environment within the environments *enumext* and *keyans*. Internally sets the value of \columnsep, by default its value is equal to the sum of the values set in the keys *labelwidth* and *labelsep* of the current level. In the *enumext** and *keyans** environments they correspond to the *space between columns* (without joining) and internally adjust the value of \itemwidth.

5.6 Keys for minipage

`mini-env = {⟨rigid length⟩}`

default: *not used*

Sets the *width* of the `minipage` environment on the “right side”. This value added to the value set by the `mini-sep` key to determines the *width* of the `minipage` environment on the “left side”, taking `\linewidth` as the maximum reference value.

`mini-sep = {⟨rigid length⟩}`

default: `0.3333em`

Sets the *space between* the `minipage` environment on the “left side” and the `minipage` environment on the “right side”. This separation is applied together with `\hfill`.

5.6.1 The command `\miniright`

```
\miniright \begin{enumext}[mini-env={⟨rigid length⟩}] ⟨item's before⟩ \item \miniright ⟨content⟩ \end{enumext}
\begin{enumext}[mini-env={⟨rigid length⟩}] ⟨item's before⟩ \item \miniright*⟨content⟩ \end{enumext}
```

The `\miniright` command close the `minipage` environment on the “left side” and opens the `minipage` environment on the “right side” by starting it with the `\centering` command. It must be placed “after” the last `\item` of the current environment and “before” starting the material to be placed on the “right side”.

The *starred argument* “*” inhibits the use of `\centering` command i.e. the usual L^AT_EX justification is maintained in the `minipage` on the “right side”.

5.6.2 The key `mini-right`

In the *horizontal list environments* `enumext*` and `keyans*` it is not possible to use the `\miniright` command and the `mini-right` key must be used instead.

`mini-right = {⟨content⟩}`

default: *not used*

Set the *content* for the drawing or tabular to be placed in the `minipage` environment on the “right side” by starting it with `\centering`. The `{⟨content⟩}` must be passed between braces.

`mini-right* = {⟨content⟩}`

default: *not used*

Same as above, but *without* starting with `\centering`.

6 The storage system

The entire mechanism for “*storing content*” it is activated according to `save-ans` key on the “*first level*” of `enumext` or `enumext*` environments and it is ignored if they are established when they are nested inside each other. Only when this `⟨key⟩` is “*active*” the `\anskey` command and the environments `anskey*`, `keyans`, `keyans*` and `keyanspic` are available.

<pre>\begin{enumext}[save-ans={⟨store name⟩}] \item Text \anskey{answer} \item Text \begin{keyans} ... \end{keyans} \end{enumext}</pre>	<pre>\begin{enumext}[save-ans={⟨store name⟩}] \item Text \anskey{answer} \item Text \begin{keyanspic} ... \end{keyanspic} \end{enumext}</pre>
-----------------------------------------------------------------------------------------------------------------------------------------------------------	-----------------------------------------------------------------------------------------------------------------------------------------------------------------

By executing the key `save-ans={⟨store name⟩}` the entire “*structure*” of the environment (excluding the *first level*) including the *optional argument* passed to the inner levels or the environment nested in it, along with the `⟨content⟩` passed to `\anskey` or `anskey*`, the current `⟨labels⟩` for `\item*` and `\anspic*` in the environments `keyans`, `keyans*` and `keyanspic` will be “*stored*” in a *sequence* `{⟨store name⟩}` and at the same time will be “*stored*” (without the “*structure*” or *optional argument*) in a *prop list* `{⟨store name⟩}`.

For security reasons the *optional argument* of the inner levels or the nested environment are *filtered* by excluding all `⟨keys⟩` related to the “*storage system*” (§6.1) along with the keys `mini-env`, `mini-sep`, `mini-right`, `mini-right*`, `series`, `resume` and `resume*` when storing in *sequence* `{⟨store name⟩}` set by `save-ans` key.

6.1 Keys for storage system

The only `⟨keys⟩` available for all levels of the `enumext` environment and the `enumext*` environment are `no-store` and `save-key`, the rest of the `⟨keys⟩` described in this section must be passed directly in the *optional argument* of the “*first level*” of the environment in which the key `save-ans` is executed. The key `save-ans` should NOT be passed with the command `\setenumext`.

`save-ans = {⟨store name⟩}`

default: *not set*

Sets the *name* of the *sequence* and *prop list* in which the `{⟨contents⟩}` will be “*stored*” by `\anskey` and `anskey*` in `enumext` and `enumext*` environments and the current `⟨labels⟩` for `\item*` and `\anspic*` in the environments `keyans`, `keyans*` and `keyanspic`. If the *sequence* or *prop list* `{⟨store name⟩}` does not exist, it will be created globally and will not be *overwritten* if the key is used again.

`save-key = {⟨key list⟩}`

default: *not set*

This key *overrides* the default “*stored keys*” of the *optional argument* of the inner levels or nested environment that will be passed to the *sequence*. The `⟨key list⟩` passed to this key ignores any `⟨keys⟩` in the “*stored structure*” and must be passed between braces. For example, if we execute at a second level:

```

\begin{enumext}[save-ans={\langle store name \rangle}]
  \item Text \anskey{answer}
  \item Text
  \begin{enumext}[nosep, columns=2, save-key={columns=3}]
    ...
  \end{enumext}
\end{enumext}

```

The “stored keys” by default in the *sequence* $\{\langle store name \rangle\}$ would be `nosep`, `columns=2`, but using the key `save-key={columns=3}` will overwrite and the “stored key” in the *sequence* $\{\langle store name \rangle\}$ are only `columns=3` ignoring all the others.

`save-sep = {\langle text symbol \rangle}` default: {,}

Sets the *text symbol* that will separate the current $\langle label \rangle$ to the *optional argument* passed to the `\item*` and `\anspic*` in the environments `keyans`, `keyans*` and `keyanspic` and storing them in the *sequence* and *prop list* $\{\langle store name \rangle\}$ set by `save-ans` key. The $\{\langle text symbol \rangle\}$ must always be passed between braces, whitespace ‘`␣`’ is preserved within the braces and only affects the “stored content” and not what is displayed when using the `show-ans` or `show-pos` keys.

`no-store` $\langle value forbidden \rangle$ default: not used

This is a “switch-key” that does not receive an argument and disables the “storing content” in the *sequence* and *prop list* $\{\langle store name \rangle\}$ set by `save-ans` key at the entire level or a nested environment in which it runs. This key is intended for use in internal levels or nested `enumext` or `enumext*` environments in which you want to use `enumext` or `enumext*` but “without” using the `\anskey` command or use `anskey*` environment and “without” interfering with the `check-ans` key.

6.1.1 Keys for label and ref

`save-ref = {\langle true | false \rangle}` default: false

Activates the “internal label and ref” mechanism for referencing “stored content” in *prop list* $\{\langle store name \rangle\}$ set by `save-ans` key. To reference the location of the “stored content” within the environment you must use `\ref{\langle store name : position \rangle}`, where $\langle position \rangle$ corresponds to the position occupied by the “stored content” in the *prop list* $\{\langle store name \rangle\}$ returned by the `show-pos` key. For example `\ref{test:4}` will return `3`. (b) which corresponds to the location of the “stored content” at position `4` in *prop list* `test` within the environment in which the key `save-ans=test` was set.

`mark-ref = {\langle symbol \rangle}` default: \textreferencemark

Sets the *symbol* that will be displayed by the `\printkeyans` command only if the `hyperref` package is detected and the `save-ref` key are active. This “symbol” is used as a “link” between the environment in which the `save-ans` key was used and the place where the command is executed.

6.1.2 Keys for wrap and marks

The `enumext` package provides a set of $\langle keys \rangle$ to set and manipulate “symbol marks” associated with “answers” and how they are displayed and stored in the *sequence* and *prop list*.

The $\langle keys \rangle$ available for the `\anskey` command and the `anskey*` environment can be passed locally in the *optional argument* or at the “first level” of the `enumext` or `enumext*` environment.

The $\langle keys \rangle$ available for the `keyans` and `keyans*` environments can be passed locally in the *optional argument*, at the “first level” of the `enumext` or `enumext*` environment or via the `\setenumext` command with one minor difference, when $\langle keys \rangle$ are passed through the “first level” of the `enumext` or `enumext*` environment they are set in “both” environments, but when they are passed using the `\setenumext` command they are set “individually” in each environment.

`show-ans = {\langle true | false \rangle}` default: false

Display the *symbol* set by the `mark-ans` key to the left of the *mandatory argument* $\langle content \rangle$ passed to the `\anskey` command and $\langle body \rangle$ for the `anskey*` environment using the `wrap-ans` key if set.

For `\item*` and `\anspic*` the `keyans`, `keyans*` and `keyanspic` environments it will display the *symbol* set by the `mark-ans*` key to the left of the current $\langle label \rangle$ and *optional argument*. If the *optional argument* is present in `\item*` or `\anspic*` it will be shown using `wrap-opt` key.

Keys for \anskey and anskey*

`mark-ans = {\langle symbol \rangle}` default: \textasteriskcentered

Sets the *symbol* to be displayed in the left margin for `\anskey` command and `anskey*` environment when using the key `show-ans`. The “symbol” is placed in a box of width equal to the value of `labelwidth` at the current level, separated by the value of the key `mark-sep` and aligned by the value of the key `mark-pos`. This key is not affected by the keys `font` or `wrap-label` so if you want to apply *styling* you have to do it directly, for example: `mark-ans={\textcolor{red}{\textbf{\textasteriskcentered}}}`

`mark-pos = {\langle left | right | center \rangle}` default: left

Sets the *aligned* of the “symbol” defined by `mark-ans` key for `\anskey` command and `anskey*` environment. The “symbol” is aligned in a box with the same dimensions of the label box defined by `labelwidth` key on the current level and separated by the value of the `mark-sep` key.

`mark-sep = {⟨rigid length⟩}` default: `labelsep`
 Sets the *horizontal space* between the box containing the “symbol” defined by `mark-ans` key and the *mandatory argument* ⟨*content*⟩ passed to the `\anskey` command and the *body* in `anskey*` environment.

`wrap-ans = {⟨code {#1} more code⟩}` default: `\fbox+\parbox{#1}`
 Wraps the *mandatory argument* ⟨*content*⟩ passed to the `\anskey` and the ⟨*body*⟩ in `anskey*` environment referenced by {#1} when using the `show-ans` or `show-pos` keys. The {⟨*code*⟩} must be passed between braces and only affects how the *argument* or *body* is displayed and NOT the “stored content” in the *sequence* and *prop list* {⟨*store name*⟩} set by `save-ans` key. If this key is passed using `\setenumext` it is necessary to use double ‘{#1}’.

Keys for `keyans`, `keyans*` and `keyanspic`

`mark-ans* = {⟨symbol⟩}` default: `\textasteriskcentered`
 Sets the *symbol* to be displayed in the left margin for `\item*` and `\anspic*` for the `keyans`, `keyans*` and `keyanspic` environments when using the key `show-ans`. The “symbol” is placed in a box of width equal to the value of `labelwidth` of the environment in which it is executed, separated by the value of the key `mark-sep*` and aligned by the value of the key `mark-pos*`. This key is not affected by the keys `font` or `wrap-label` so if you want to apply *styling* you have to do it directly, for example:
`mark-ans*={\textcolor{red}{\textbf{\textasteriskcentered}}}`

`mark-pos* = {⟨left | right | center⟩}` default: `left`
 Sets the *aligned* of the “symbol” defined by `mark-ans*` key for the `keyans`, `keyans*` and `keyanspic` environments. The “symbol” is aligned in a box with the same dimensions of the label box defined by `labelwidth` key of the environment in which it is executed and separated by the value of the `mark-sep*` key.

`mark-sep* = {⟨rigid length⟩}` default: `labelsep`
 Sets the *horizontal space* between the box containing the “symbol” defined by `mark-ans*` key and the current ⟨*label*⟩ for `\item*` and `\anspic*` in the `keyans`, `keyans*` and `keyanspic` environments.

`wrap-ans* = {⟨code {#1} more code⟩}` default: `not used`
 Wraps the *current* ⟨*label*⟩ when using the `show-ans` key for `\item*` and `\anspic*` referenced by {#1} in the `keyans`, `keyans*` and `keyanspic` environments after executing the `align` and `font` keys. The {⟨*code*⟩} must be passed between braces and *only* affects how the ⟨*label*⟩ is displayed and NOT the “stored label” in the *sequence* and *prop list* {⟨*store name*⟩} set by `save-ans` key. This key overwrites the key `wrap-label` and if is passed using `\setenumext` it is necessary to use double ‘{#1}’. For example, if you want the ⟨*label*⟩ to be displayed in red when using `show-ans` you just set `wrap-ans*={\textcolor{red}{#1}}`.

`wrap-opt = {⟨code {#1} more code⟩}` default: `[{#1}]`
 Wraps the *optional argument* passed to the `\item*` and `\anspic*` referenced by {#1} in the `keyans`, `keyans*` and `keyanspic` environments when using the `show-ans` or `show-pos` keys. The {⟨*code*⟩} must be passed between braces and only affects the current *optional argument* and NOT the “stored content” in the *sequence* and *prop list* {⟨*store name*⟩} set by `save-ans` key. If this key is passed using `\setenumext` it is necessary to use double ‘{#1}’.

6.1.3 Keys for debug and checking

`show-pos = {⟨true | false⟩}` default: `false`
 Displays the *position* occupied by the “stored content” by `\anskey`, `anskey*`, `\item*` and `\anspic*` in the *prop list* {⟨*store name*⟩} set by `save-ans` key. This position is used by the `\getkeyans` command and by the `\ref` command if the `save-ref` key is active.

`check-ans = {⟨true | false⟩}` default: `false`
 Enables the *checking answer* mechanism displaying an appropriate message on the terminal. This key works under the logic that each `\item` or `\item*` that does not open an inner level or nested environment contains “only one answer” or “only one execution” of the `\anskey` or `anskey*`. It is intended to be used in conjunction with the `no-store` key.

6.2 The command `\anskey`

`\anskey` `\anskey[⟨keys⟩]{⟨content⟩}`

The command `\anskey` takes a mandatory non empty argument {⟨*content*⟩} and “stores” it in the *sequence* and *prop list* {⟨*store name*⟩} set by `save-ans` key. By design the command cannot be nested or passed *verbatim material* in the argument and it is assumed that each *numbered* `\item` or `\item*` within the environment in which it is active it has a “single execution” of `\anskey` unless `\item` or `\item*` open a nested level or use the `no-store` key.

If `save-ref` key are active and the `hyperref`[8] package is detected, `\hyperlink` and `\hypertarget` will be used, otherwise the usual “label and ref” system provided by \LaTeX will be used.

The `\anskey` command is available for all levels of the `enumext` environment and the `enumext*` environment, but is disabled for the `keyans`, `keyans*` and `keyanspic` environments.

6.2.1 Keys for \anskey

The keys `mark-ans`, `mark-pos`, `mark-sep`, `wrap-ans`, `show-ans` and `show-pos` are available. By default the $\langle content \rangle$ passed to `\anskey` when “storing” in the sequence $\{ \langle store name \rangle \}$ has the form `\item \langle content \rangle`, the following $\langle keys \rangle$ allow modifying the way in which it is “stored” in the sequence.

- `break-col` $\langle value forbidden \rangle$ default: not used
- Stores $\{ \langle content \rangle \}$ in the sequence $\{ \langle store name \rangle \}$ of the form `\columnbreak \item \langle content \rangle`.
- `item-join` = $\{ \langle columns \rangle \}$ default: not set
- Set the number of columns to be used for `\item \langle columns \rangle` and stores $\{ \langle content \rangle \}$ in the sequence $\{ \langle store name \rangle \}$ of the form `\item \langle columns \rangle \langle content \rangle`.
- `item-star` $\langle value forbidden \rangle$ default: not used
- Stores $\{ \langle content \rangle \}$ in the sequence $\{ \langle store name \rangle \}$ of the form `\item* \langle content \rangle`.
- `item-sym*` = $\{ \langle symbol \rangle \}$ default: not set
- Sets the symbol for `\item*` when using the key `item-star` and stores $\{ \langle content \rangle \}$ in the sequence $\{ \langle store name \rangle \}$ of the form `\item* \langle symbol \rangle \langle content \rangle`. The symbol can be in text or math mode, for example `item-sym*={\ast}` stores `\item*{\ast} \langle content \rangle`.
- `item-pos*` = $\langle rigid length \rangle$ default: not set
- Sets the offset for `\item*` when using the keys `item-star` and `item-sym*` and stores $\{ \langle content \rangle \}$ in the sequence $\{ \langle store name \rangle \}$ of the form `\item* \langle symbol \rangle \langle offset \rangle \langle content \rangle`.

Example

```
\begin{enumext}[save-ans=test,show-ans=true]
  \item* Text containing our instructions or questions. \anskey{\first answer}
  \item Text containing our instructions or questions.
    \begin{enumext}
      \item Question.\anskey{\second answer}
    \end{enumext}
  \item Text containing our instructions or questions. \anskey{\third answer}
  \item Text containing our instructions or questions. \anskey{\fourth answer}
\end{enumext}
```

- ★ 1. Text containing our instructions or questions.

*

first answer
2. Text containing our instructions or questions.

(a) Question.

*

second answer
3. Text containing our instructions or questions.

*

third answer
4. Text containing our instructions or questions.

*

fourth answer

6.3 The environment anskey*

`anskey*` `\begin{anskey*}[\langle key = val \rangle] \langle body content \rangle \end{anskey*}`

The environment `anskey*` takes a mandatory $\{ \langle body content \rangle \}$ and “stores it” in the sequence and *prop list* $\{ \langle store name \rangle \}$ set by `save-ans` key. If `save-ref` key are active and the `hyperref`[8] package is detected `\hyperLink` and `\hypertarget` will be used, otherwise the usual “label and ref” system provided by \LaTeX will be used.

By design the environment cannot be nested but full supports “verbatim material” in the $\langle body \rangle$ and it is assumed that “each numbered” `\item` or `\item*` within the environment in which it is active it has a “single execution” unless `\item` or `\item*` open a nested level or use the `no-store` key.

The `anskey*` environment is implemented using the `scontents` package, `\begin{anskey*}` and `\end{anskey*}` must be in different lines, all $\langle keys \rangle$ must be passed separated by commas and “without separation” of the start of the environment.

Comments “%” or “any character” after `\begin{anskey*}` or `[\langle key = val \rangle]` on the same line are NOT supported, the package `scontents` will return an “error” message if this happens. In a similar way comments “%” or “any character” after `\end{anskey*}` on the same line the package `scontents` will return a “warning” message.

6.3.1 Keys for anskey*

The `anskey*` environment uses the same $\langle keys \rangle$ as the `\anskey` command next to the $\langle keys \rangle$ inherited from package `scontents`. The environment is available for all levels of the `enumext` environment and the `enumext*` environment, but it is disabled for the `keyans`, `keyans*` and `keyanspic` environments.

- `write-env` = $\{ \langle file.ext \rangle \}$ default: not used
- Sets the name of the $\langle external file \rangle$ in which the $\langle contents \rangle$ of the environment will be written. The $\langle file.ext \rangle$ will be created in the working directory, relative or absolute paths are not supported. If $\langle file.ext \rangle$ does not exist, it will be created or overwritten if the `overwrite` key is used.
- `overwrite` = $\{ \langle true | false \rangle \}$ default: false
- Sets whether the $\langle file.ext \rangle$ generated by `write-env` from the `anskey*` environment will be rewritten.

force-eol = { $\langle true \mid false \rangle$ }

default: *false*

Sets if the *end of line* for the $\langle stored\ content \rangle$ is hidden or not. This key is necessary only if the last line is the closing of some environment defined by the `fancyvrb` package as `\end{Verbatim}` or another environment that does not support a comments “%” after closing `\end{Verbatim}`%.

- For security reasons the keys `store-env`, `print-env` and `write-out` they have been left disabled. It is recommended that you review the `scontents`[4] documentation to understand how the keys described here work.

Example

```
\begin{enumext}[save-ans=test,show-pos=true,start=5]
  \item* Text containing our instructions or questions.

  \begin{anskey*}[item-star]
    \first answer
  \end{anskey*}

  \item Text containing our instructions or questions.

  \begin{enumext}
    \item Question.
    \begin{anskey*}
      \second answer
    \end{anskey*}
  \end{enumext}

  \item Text containing our instructions or questions.

  \begin{anskey*}
    \third answer
  \end{anskey*}

  \item Text containing our instructions or questions.

  \begin{anskey*}
    \fourth answer
  \end{anskey*}
\end{enumext}
```

- ★ 5. Text containing our instructions or questions.
 - 6. Text containing our instructions or questions.
 - 7. Text containing our instructions or questions.
 - 8. Text containing our instructions or questions.
- (a) Question.

6.4 The environments `keyans` and `keyans*`

```
keyans \begin{keyans}[\langle key = val \rangle] \item \item[\langle custom \rangle] \item* \item*[\langle content \rangle] \end{keyans}
keyans* \begin{keyans*}[\langle key = val \rangle] \item \item[\langle custom \rangle] \item* \item*[\langle content \rangle] \end{keyans*}
```

The `keyans` and `keyans*` environments are “*enumerated list*” environments designed for “*multiple choice*” questions activated by the `save-ans` key. This environments can NOT be nested and must always be at the “*first level*” of the `enumext` environment, the commands `\item` and `\item[\langle custom \rangle]` work in the usual and the command `\item(\langle columns \rangle)` is available for the `keyans*` environment.

- The behavior of `\item*` in `keyans` and `keyans*` environments is NOT the same as in the `enumext` or `enumext*` environments.

```
\begin{enumext}[save-ans=test]
  \item \langle item content \rangle
  \begin{keyans}[\langle key = val \rangle]
    \item \langle item content \rangle
    \item [\langle custom \rangle] \langle item content \rangle
    \item* \langle item content \rangle
    \item*[\langle content \rangle] \langle item content \rangle
  \end{keyans}
\end{enumext}
```

```
\begin{enumext}[save-ans=test]
  \item \langle item content \rangle
  \begin{keyans*}[\langle key = val \rangle]
    \item \langle item content \rangle
    \item [\langle custom \rangle] \langle item content \rangle
    \item* \langle item content \rangle
    \item*[\langle content \rangle] \langle item content \rangle
  \end{keyans*}
\end{enumext}
```

The $\langle keys \rangle$ set in the *optional argument* of the environment are the same (almost) as those of the `enumext` and `enumext*` environments and have *higher precedence* than those set by `\setenumext[\langle keyans \rangle]{\langle key = val \rangle}` or `\setenumext[\langle keyans* \rangle]{\langle key = val \rangle}`. If the *optional argument* is not passed or the $\langle keys \rangle$ are not set by `\setenumext`, the default values will be the same as the “*second level*” of the `enumext` environment with the difference in the $\langle label \rangle$ which will be set to `label=\Alph*`.

The keys `mark-ans*`, `mark-pos*`, `mark-sep*`, `save-sep`, `wrap-opt`, `wrap-ans*`, `show-ans` and `show-pos` are available for both environments.

6.4.1 The \item* in keyans and keyans*

`\item*` `\item*`
`\item*[\langle content \rangle]`

The `\item*` and `\item*[\langle content \rangle]` command “store” the current `\label` set by `label` key next to the *optional argument* `\langle content \rangle` in *sequence* and *prop list* `\{ \langle store name \rangle \}` set by `save-ans` key in the “first level” of the `enumext` or `enumext*` environments.

The *starred argument* ‘*’ cannot be separated by spaces ‘ ’ from the command, i.e. `\item*` and the *optional argument* does “NOT” support *verbatim content*. By design it is assumed that the `\item*` will only appear “once” within the environment.


Example

```
\begin{enumext}[save-ans=test,columns=2,show-ans=true]
  \item Text containing a question.

  \begin{keyans*}[nosep,columns=2]
    \item Choice
    \item* Correct choice
    \item Choice
    \item Choice
    \item Choice
  \end{keyans*}

  \item Text containing a question and image.

  \begin{keyans}[nosep,mini-env={0.4\linewidth}]
    \item Choice
    \item Choice
    \item Choice
    \item Choice
    \item*[\note] Correct choice
    \miniright
    \includegraphics[scale=0.25]{example-image-a}
    Some text
  \end{keyans}
\end{enumext}
```

1. Text containing a question.
A) Choice * B) Correct choice
C) Choice D) Choice
E) Choice
2. Text containing a question and image.
A) Choice
B) Choice
C) Choice
D) Choice
* E) [note] Correct choice
- 
Some text

6.5 The environment keyanspic

`keyanspic` `\begin{keyanspic}[\langle key = val \rangle] \anspic*[\langle content \rangle]{\langle drawing or tabular \rangle} \end{keyanspic}`

The `keyanspic` environment is an “enumerated list” environment activated by the `save-ans` key that has the same configuration for “spacing” and `\label` as the `keyans` environment that uses the `\anspic` command instead of `\item`. It is intended for placing *drawings or tabular* with `\label` centered *above* or *below* in a *single line* or *upper and lower* layout style.

When the `keyanspic` environment is used *without keys* the `\label`s are centered *below* the *drawings or tabular* in a *single line* layout style.

A representation of the output can be seen in the figure 6.

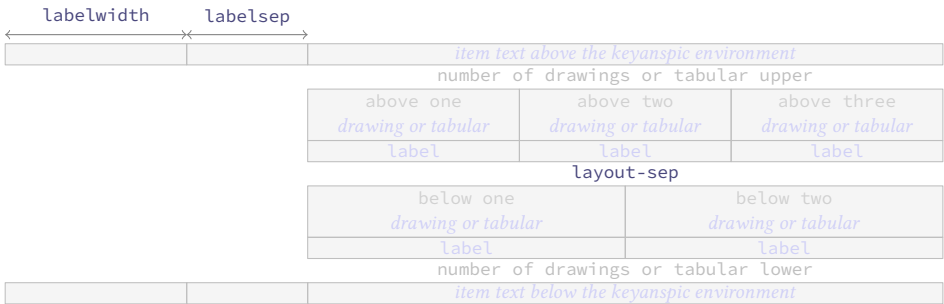


Figure 6: Representation of the `keyanspic` environment with `layout-sty={\langle 3, 2 \rangle}` in `enumext`.

This environment cannot be nested and must *always* be at the “first level” of the `enumext` environment, the `\item` command is disabled and `\keys` cannot be set using `\setenumext`.

6.5.1 Keys for keyanspic

`label-pos = {⟨above | below⟩}`

default: *below*

Set the *position* of ⟨*label*⟩ to be centered “above” or “below” *drawings* or *tabular* when the `\anspic` command is executed.

`label-sep = {⟨rubber length | rigid length⟩}`

default: *internal adjustment*

Set the *vertical spacing* between the ⟨*label*⟩ centered “above” or “below” and *drawings* or *tabular* when running the `\anspic` command.

`layout-sty = {⟨n° upper , n° lower⟩}`

default: *not set*

Set the *number of drawings* or *tabular* that will be distributed “upper” and “lower” within the environment when executing the `\anspic` command. The value must be passed in braces and if not set or the ⟨*n*° lower⟩ is omitted the *drawings* or *tabular* will be put on a *single line*.

`layout-sep = {⟨rubber length | rigid length⟩}`

default: *adjusted parsep from keyans*

Set the *vertical separation* between the number of *drawings* or *tabular* placed at the “upper” and “lower” within the environment when executing the `\anspic` command. Internally adjusts the `parsep` value taken from the `keyans` environment.

`layout-top = {⟨rubber length | rigid length⟩}`

default: *adjusted topsep from keyans*

Set the *vertical space* added to both the top and bottom of the environment. Internally adjust the value of `topsep` taken from `keyans` environment.

The keys `mark-ans*`, `mark-pos*`, `mark-sep*`, `save-sep`, `wrap-opt`, `wrap-ans*`, `show-ans` and `show-pos` are available for this environment.

6.5.2 The command `\anspic`

`\anspic` `\anspic{⟨drawing or tabular⟩}`
`\anspic*` `\anspic*[⟨content⟩]{⟨drawing or tabular⟩}`

The `\anspic` command take three arguments, the *starred argument* ‘`*`’ store the current ⟨*label*⟩ next to the *optional argument* ⟨*content*⟩ in *sequence* and *prop list* {⟨*store name*⟩} set by `save-ans` key.

The *starred argument* ‘`*`’ cannot be separated by spaces ‘`␣`’ from the command, i.e. `\anspic*` and the *optional argument* does “NOT” support *verbatim content*. By design it is assumed that the *starred argument* ‘`*`’ will only appear “once” within the environment.

Example

```
\begin{enumext}[save-ans=test,show-ans=true,nosep]
  \item Question with images and labels below.

  \begin{keyanspic}[layout-sty={3,2}]
    \anspic{\includegraphics[scale=0.15]{example-image-a}}
    \anspic{\includegraphics[scale=0.15]{example-image-b}}
    \anspic{\includegraphics[scale=0.15]{example-image-a}}
    \anspic{\includegraphics[scale=0.15]{example-image-a}}
    \anspic*[note]{\includegraphics[scale=0.15]{example-image-a}}
  \end{keyanspic}

  \item Question with images and labels above.

  \begin{keyanspic}[label-pos=above, layout-sty={3,2},layout-sep=0.25cm]
    \anspic{\includegraphics[scale=0.15]{example-image-a}}
    \anspic{\includegraphics[scale=0.15]{example-image-b}}
    \anspic{\includegraphics[scale=0.15]{example-image-a}}
    \anspic{\includegraphics[scale=0.15]{example-image-a}}
    \anspic*[note]{\includegraphics[scale=0.15]{example-image-a}}
  \end{keyanspic}

  \item Question with images and labels below on a single line.

  \begin{keyanspic}
    \anspic{\includegraphics[scale=0.15]{example-image-a}}
    \anspic{\includegraphics[scale=0.15]{example-image-b}}
    \anspic{\includegraphics[scale=0.15]{example-image-a}}
    \anspic{\includegraphics[scale=0.15]{example-image-a}}
    \anspic*[note]{\includegraphics[scale=0.15]{example-image-a}}
  \end{keyanspic}

\end{enumext}
```

1. Question with images and labels below.




A)



B)



C)




D)




* E) [note]


2. Question with images and labels above.



A)




B)



C)



D)



* E) [note]

3. Question with images and labels below on a single line.



A)



B)



C)



D)



* E) [note]

◆ Remember to pass the `alt={⟨description⟩}` key to the `\includegraphics` command when creating a *tagged* PDF.

6.6 Printing stored content

6.6.1 The command `\getkeyans`

```
\getkeyans <⟨store name : position⟩>
```

The command `\getkeyans` prints the “*stored content*” in *prop list* `{⟨store name⟩}` defined by `save-ans` key in the `⟨position⟩` returned by the `show-pos` key.

The “*stored content*” can only be accessed *after* it is stored, if `{⟨store name⟩}` does not exist the command will return an error.

The form taken by the argument `{⟨store name : position⟩}` is the same as that used to generate the “*internal label and ref*” system when `save-ref` key are active, so to refer to a “*stored content*”. For example `\getkeyans{test:4}` will return the “*stored content*” at position 4 of the environment in which the key `save-ans=test` was set.

6.6.2 The command `\foreachkeyans`

```
\foreachkeyans <⟨key = val⟩> {⟨store name⟩}
```

The command `\foreachkeyans` goes through and executes the command `\getkeyans` on the contents in *prop list* `{⟨store name⟩}`. If you pass without options run `\getkeyans` on all contents in *prop list* `{⟨store name⟩}`.

Options for command

`sep = {⟨code⟩}` default: {;}

Establishes the *separation* between “*each*” `{⟨content⟩}` stored in *prop list* `{⟨store name⟩}`. For example, you can use `sep={\\[10pt]}` for vertical separation of stored contents.

`step = {⟨integer⟩}` default: 1

Sets the *step* (increment) applied to the value set by key `start` for “*each*” `{⟨content⟩}` stored in *prop list* `{⟨store name⟩}`. The value must be a *positive integer*.

`start = {⟨integer⟩}` default: 1

Sets the *position* of the *prop list* `{⟨store name⟩}` from which execution will start. The value must be a *positive integer*.

`stop = {⟨integer⟩}` default: 0

Sets the *position* of the *prop list* `{⟨store name⟩}` from which execution will finish. The value must be a *positive integer*.

`before = {⟨code⟩}` default: *empty*
 Sets the {⟨code⟩} that will be executed ⟨before⟩ each {⟨content⟩} stored in *prop list* {⟨store name⟩}. The {⟨code⟩} must be passed between braces.

`after = {⟨code⟩}` default: *empty*
 Sets the {⟨code⟩} that will be executed ⟨after⟩ each {⟨content⟩} stored in *prop list* {⟨store name⟩}. The {⟨code⟩} must be passed between braces.

`wrapper = {⟨code #1⟩ more code}` default: *empty*
 Wraps the {⟨content⟩} stored in *prop list* {⟨store name⟩} referenced by {#1}. The {⟨code⟩} must be passed between braces. For example `\foreachkeyans[wrapper={\makebox[1em][l]{#1}}]{⟨store name⟩}`.

6.6.3 The command `\printkeyans`

```
\printkeyans {⟨store name⟩}
\printkeyans [⟨keys⟩]{⟨store name⟩}
\printkeyans * [⟨keys⟩]{⟨store name⟩}
```

The command `\printkeyans` prints “all stored content” in *sequence* {⟨store name⟩} defined by `save-ans` key placing this inside the `enumext` or `enumext*` environment if the *starred argument* ‘*’ is used.

The “stored content” can only be accessed *after* it is stored in the *sequence*, if {⟨store name⟩} does not exist the command will return an error.

The *optional argument* allows managing the ⟨keys⟩ in the “first level” of the environment in which the “stored content” of the *sequence* {⟨store name⟩} will be printed, if the *starred argument* ‘*’ is used it will be `enumext*` otherwise `enumext`.

The default values for the “first level” are the same as the default values for the `enumext` and `enumext*` environments along with the keys `nosep`, `first=\small`, `font=\small` and `columns=2`. For the inner levels of the environment `enumext` saved in the *sequence* {⟨store name⟩} the default values are the same as those established for the second, third and fourth levels plus the keys `nosep`, `first=\small`, `font=\small`. If the environment `enumext*` is saved within the *sequence* {⟨store name⟩} it will have the same default values plus the keys `nosep`, `first=\small`, `font=\small`.

Since the command encapsulates by default the `enumext` environment or the `enumext*` environment, we must take some considerations:

- If we execute `\printkeyans*{⟨store name⟩}` and the *sequence* {⟨store name⟩} already contains any `enumext*` environment an error will be returned as we cannot nest.
- If we execute `\printkeyans*{⟨store name⟩}` and the *sequence* {⟨store name⟩} contains any `enumext` environments, they will start with the ⟨keys⟩ set for the first level unless they are set in the *optional argument* or `save-key` is used to modify it.
- If we execute `\printkeyans{⟨store name⟩}` and the *sequence* {⟨store name⟩} contains any environment `enumext*`, they will start with the ⟨keys⟩ set by default unless they are set in the *optional argument* or `save-key` is used to modify it.

The default values for the “first level” of `\printkeyans` commands and `\printkeyans*` are established using `\setenumext[⟨print , 1⟩]{⟨keys⟩}` and `\setenumext[⟨print*⟩]{⟨keys⟩}`.

If we need to set the ⟨keys⟩ for the environment `enumext` “saved” in the *sequence* {⟨store name⟩} we will use `\setenumext[⟨print , level⟩]{⟨keys⟩}` and if we need to set the ⟨keys⟩ for the environment `enumext*` “saved” in the *sequence* {⟨store name⟩} we will use `\setenumext[⟨print , *⟩]{⟨keys⟩}`.

Example

```
\begin{enumext}[save-ans=sample,columns=1,show-pos=true,nosep,save-ref=true]
  \item Factor $3x+3y+3z$. \anskey{$3(x+y+z)}$
  \item True False

  \begin{enumext}[nosep]
    \item \LaTeX2e\ is cool? \anskey{Very True!}
  \end{enumext}

  \item Related to Linux

  \begin{enumext}[nosep]
    \item You use linux? \anskey{Yes}
    \item Rate the following package and class
      \begin{enumext}[nosep]
        \item \texttt{xsim} \anskey{very good}
        \item \texttt{exsheets} \anskey{obsolete}
      \end{enumext}
    \end{enumext}
\end{enumext}
```

```
The answer to \ref{sample:4} is \getkeyans{sample:4} and the answers to
all the worksheets are as follows:

\printkeyans{sample}
```

1. Factor $3x + 3y + 3z$.
- [1]
2. True False
- (a) ~~TeX~~ze is cool?
- [2]
3. Related to Linux
- (a) You use linux?
- [3]
- (b) Rate the following package and class
- i. `xsim`
- [4]
- ii. `exsheets`
- [5]

The answer to 3.(b).i is very good and the answers to all the worksheets are as follows:

1. $3(x + y + z)$ ✖
2. (a) Very True! ✖
3. (a) Yes ✖
- (b) i. very good ✖
- ii. obsolete ✖


7 Full examples

Here I will leave as an example some adaptations questions taken from TeX-SX. The examples are attached to this documentation and can be extracted from your PDF viewer or from the command line by running:

```
$ pdfdetach -saveall enumext.pdf
```

and then you can use the excellent arara¹ tool to compile them.


Example 1

Adapted from the response given by Enrico Gregorio in Squares for answer choice options and perfect alignment to mathematical answers .

1. La velocità di $1,00 \times 10^2$ m/s espressa in km/h è:
- ☐ A 36 km/h.
- ☐ B 360 km/h.
- ☐ C 27,8 km/h.
- ☐ D $3,60 \times 10^8$ km/h.
3. La velocità di $1,00 \times 10^2$ m/s espressa in km/h è:
- ☐ A 36 km/h.
- ☐ B 360 km/h.
- ☐ C 27,8 km/h.
- ☐ D $3,60 \times 10^8$ km/h.
2. In fisica nucleare si usa l'angstrom (simbolo: $1 \text{ \AA} = 1 \times 10^{-10}$ m) e il fermi o femtometro ($1 \text{ fm} = 1 \times 10^{-15}$ m). Qual è la relazione tra queste due unità di misura?
- ☐ A $1 \text{ \AA} = 1 \times 10^5 \text{ fm}$.
- ☐ B $1 \text{ \AA} = 1 \times 10^{-5} \text{ fm}$.
- ☐ C $1 \text{ \AA} = 1 \times 10^{-15} \text{ fm}$.
- ☐ D $1 \text{ \AA} = 1 \times 10^3 \text{ fm}$.
4. In fisica nucleare si usa l'angstrom (simbolo: $1 \text{ \AA} = 1 \times 10^{-10}$ m) e il fermi o femtometro ($1 \text{ fm} = 1 \times 10^{-15}$ m). Qual è la relazione tra queste due unità di misura?
- ☐ A $1 \text{ \AA} = 1 \times 10^5 \text{ fm}$.
- ☐ B $1 \text{ \AA} = 1 \times 10^{-5} \text{ fm}$.
- ☐ C $1 \text{ \AA} = 1 \times 10^{-15} \text{ fm}$.
- ☐ D $1 \text{ \AA} = 1 \times 10^3 \text{ fm}$.

1. B
2. A
3. B
4. A

Example 2

Adapted from the response given by Florent Rougon in Multiple choice questions with proposed answers in random order — addition of automatic correction (cross mark) .

¹The cool TeX automation tool: <https://www.ctan.org/pkg/arara>

©2024 by Pablo González L

20 / 163

1. La velocità di $1,00 \times 10^2$ m/s espressa in km/h è:

A 36 km/h.

✓ B 360 km/h.

C 27,8 km/h.

D $3,60 \times 10^8$ km/h.
2. In fisica nucleare si usa l'angstrom (simbolo: $1 \text{ \AA} = 1 \times 10^{-10}$ m) e il fermi o femtometro ($1 \text{ fm} = 1 \times 10^{-15}$ m). Qual è la relazione tra queste due unità di misura?

✓ A $1 \text{ \AA} = 1 \times 10^5 \text{ fm}$.

B $1 \text{ \AA} = 1 \times 10^{-5} \text{ fm}$.

C $1 \text{ \AA} = 1 \times 10^{-15} \text{ fm}$.

D $1 \text{ \AA} = 1 \times 10^3 \text{ fm}$.
3. La velocità di $1,00 \times 10^2$ m/s espressa in km/h è:

A 36 km/h.

✓ B 360 km/h.

C 27,8 km/h.

D $3,60 \times 10^8$ km/h.
4. In fisica nucleare si usa l'angstrom (simbolo: $1 \text{ \AA} = 1 \times 10^{-10}$ m) e il fermi o femtometro ($1 \text{ fm} = 1 \times 10^{-15}$ m). Qual è la relazione tra queste due unità di misura?

✓ A $1 \text{ \AA} = 1 \times 10^5 \text{ fm}$.

B $1 \text{ \AA} = 1 \times 10^{-5} \text{ fm}$.

C $1 \text{ \AA} = 1 \times 10^{-15} \text{ fm}$.

D $1 \text{ \AA} = 1 \times 10^3 \text{ fm}$.
1. B

2. A

3. B

4. A
- Example 3
- A “simple multiple choice” test 📄
1. First type of questions

A value

B correct

C value

D value

2. Second type of questions

I. $2\alpha + 2\delta = 90^\circ$

II. $\alpha = \delta$

III. $\angle EDF = 45^\circ$

A I only

B II only

C I and II only

D I and III only

E I, II, and III

3. Third type of questions

(1) $2\alpha + 2\delta = 90^\circ$

(2) $\angle EDF = 45^\circ$

A value

B value

C value

D value

E value

4. Question with image and label below:

A

A

B

C

D

E

5. Question with image on right side:

A value

B value

C value

D correct

E value

Test keys

1. B, $x = 5$

2. D

3. C, some note

4. E, A duck

5. D, other note

Example 4

A “simple worksheet” using ducks :) 📄

Factor $x^2 - 2x + 1$

Factor $3x + 3y + 3z$

The following questions need to be cuaqtified :)

True False

(a) $\alpha > \delta$

(b) \LaTeX ze is cool?

Related to Linux

(a) You use linux?

(b) Usually uses the package manager?

©2024 by Pablo González L

21 / 163

- (c) Rate the following package and class
- i. xsim-exam
 - ii. xsim
 - iii. exsheets

The answer to 1 is $(x - 1)^2$ and the answer to 3.(a) is False.

- | | | | |
|-------------------|---|---------------------------------|---|
| 1. $(x - 1)^2$ | ⌘ | (b) Yes, dnf | ⌘ |
| 2. $3(x + y + z)$ | ⌘ | (c) i. doesn't exist for now :(| ⌘ |
| 3. (a) False | ⌘ | ii. very good | ⌘ |
| (b) Very True! | ⌘ | iii. obsolete | ⌘ |
| 4. (a) Yes | ⌘ | | |

Example 5

Adapted from the response given by Stephen in SAT like question format .

<div>1</div> <p>Which choice best describes what happens in the passage?</p> <p>A) One character argues with another character who intrudes on her home.</p> <p>B) One character receives a surprising request from another character.</p> <p>C) One character reminisces about choices she has made over the years.</p> <p>D) One character criticizes another character for pursuing an unexpected course of action.</p>	<div>3</div> <p>Which choice best describes what happens in the passage?</p> <p>A) One character argues with another character who intrudes on her home.</p> <p>B) One character receives a surprising request from another character.</p> <p>C) One character reminisces about choices she has made over the years.</p> <p>D) One character criticizes another character for pursuing an unexpected course of action.</p>
<div>2</div> <p>Which choice best describes what happens in the passage?</p> <p>A) One character argues with another character who intrudes on her home.</p> <p>B) One character receives a surprising request from another character.</p> <p>C) One character reminisces about choices she has made over the years.</p> <p>D) One character criticizes another character for pursuing an unexpected course of action.</p>	<div>4</div> <p>Which choice best describes what happens in the passage?</p> <p>A) One character argues with another character who intrudes on her home.</p> <p>B) One character receives a surprising request from another character.</p> <p>C) One character reminisces about choices she has made over the years.</p> <p>D) One character criticizes another character for pursuing an unexpected course of action.</p>









1. A) 2. C) 3. B) 4. D)





8 Tagged PDF examples

This section is just to show the compatibility of enumext with tagged PDF using lualatex. The attached files here are just for testing and are intended as examples and, in a way, to simplify the time of Matthew Bertucci (@mbertucci) when he sees this excellent package and adds it to The LaTeX Tagged PDF repository.

To compile the tests with lualatex-dev the packages multicol, scontents, unicode-math, geometry, graphicx, luamml and hyperref are required along with the line:

```
\DocumentMetadata
{
  lang = en-US, pdfversion = 2.0, pdfstandard = ua-2,
  testphase = {phase-III, math, title, table, firstaid},
}
```

- ◆ All examples have been checked using veraPDF together with ngpdf.
- The file enumext-01.tex contains the basic tests for the enumext and enumext* environments and the nesting between them plus the use of the label, labelwidth, labelsep, ref, align and wrap-label keys. Source file  and tagged PDF .
 - The file enumext-02.tex contains the tests for the enumext and enumext* environments and the support for minipage and multicol environments using the keys columns, columns-sep, mini-env, mini-right and \miniright command. Source file  and tagged PDF .
 - The file enumext-03.tex contains the tests for the enumext and keyanspic environments activated by the save-ans key together with the save-sep and save-ref keys and the \printkeyans command. Source file  and tagged PDF .
 - The file enumext-04.tex contains the tests for the \anskey command and the anskey* environment activated by the save-ans key along with the \getkeyans and \printkeyans commands. Source file  and tagged PDF .

- The file `enumext-05.tex` contains the tests for the environments `keyans`, `keyans*` and `keyanspic` activated by the key `save-ans` together with the keys `no-store` and `show-ans` and the commands `\setenumext`, `\setenumextmeta`, `\printkeyans` and `\foreachkeyans`. Source file  and tagged PDF .
- The file `enumext-06.tex` contains the tests for the environments `enumext` and `enumext*` for *fake itemize* and *description*. Source file  and tagged PDF .

9 The way of non-enumerated lists

It is possible to use (or abuse) the `enumext` and `enumext*` environments to mimic *non-enumerated* list environments such as `itemize` and `description`, clearly the `\keys` to “store answers”, the `keyans`, `keyans*` and `keyanspic` environments lose their sense and it is not the focus of `enumext` package, but, why not to do it?.

Here I leave as an example other uses of the `enumext` environment that can be helpful for specific purposes. The *trick* to generate these “fake environments” is set `label={}` or `label={\some}` and play with the `list-indent`, `list-offset`, `font` and `wrap-label` keys.

Fake itemize environment

Here we set the `label` key using the default settings in \TeX for the four levels `\textbullet`, `\textendash`, `\textasteriskcentered` and `\textperiodcentered` together with the `nosep` key to reduce the vertical spaces in the left side example and set the `label` key in *mathematical mode* for the right side as `\ast`, `\diamond`, `\circ` and `\star` for the four levels together with the `nosep` key

- | | |
|---------------------|---------------------|
| • First level item | * First level item |
| – Second level item | ◇ Second level item |
| • Third level item | ◦ Third level item |
| · Fourth level item | ★ Fourth level item |
| • First level item | * First level item |

Fake description environment

Here we set `label={}` and `list-indent=2.5em`, `font=\bfseries`.

Something A short one-line description.

This is an entry *without* a label.

Something A short *one-line* description text.

Something long A much *longer* description text may take more than one line or more than one paragraph.

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua.

If we add `list-indent=0pt` you get *widest style*:

Something A short one-line description.

This is an entry *without* a label.

Something A short *one-line* description text.

Something long A much *longer* description text may take more than one line or more than one paragraph.

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua.

🔗 The small space at the beginning of the “unlabeled entry” corresponds to `\labelsep` and can be removed using `\hspace{-\labelsep}` at the beginning of the line.

🔗 When *tagged PDF* is active the default `description` style is NOT available due to the redefinition of `\makelabel` for the `align` key which uses `\makebox` in this case, meaning that `\item[\langle content \rangle]` will not extend beyond `\labelwidth` which causes overlaps,

Description indented by label

Here we set `label={}` and we will give a convenient value to `labelsep` and `labelwidth`, for example we can take as reference our *longest label* and pass it as value using:

```
\newlength{\descitemwd}
\settowidth{\descitemwd}{\textbf{Something long}}
```

and then use `labelsep=4pt`, `labelwidth=\descitemwd`, `font=\bfseries`.

Something A short one-line description.

This is an entry *without* a label.

Something A short one-line description.

Something long A much longer description. Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris.

The environment can be translated so that the `\labels` are on the left margin calculating the value passed to the `list-offset` key, in this case it will be equal to the sum of the values set by the `labelwidth` and `labelsep` keys finally resulting as `list-offset={-\descitemwd - 4pt}`.

Something

A short one-line description.

	This is an entry <i>without</i> a label.
Something	A short one-line description.
Something long	A much longer description. Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris.
	If we add <code>align=right</code> it will look like this:
Something	A short one-line description.
	This is an entry <i>without</i> a label.
Something	A short one-line description.
Something long	A much longer description. Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris.

At this point we have used `list-offset={-\descitemwd - 4pt}` instead of `list-offset={-\labelwidth - \labelsep}`, this is because the parameters `\labelwidth` and `\labelsep` take the default values, as if we had not set `label`.

Description with multi-line labels

The `label` key does not accept *multiline material*, this is where the `wrap-label` and `wrap-label*` keys comes into play. Unlike the `enumitem` package, the `align` key only supports three options, so what we will do is create a command in the style `\parleft` of `enumitem` that allows us to place *multiline labels* using `\parbox`.

```
\NewDocumentCommand \labelbx { s +m }
{%
  \SuspendTagging{\parbox}%
  \IfBooleanTF{#1}
  {%\strut\smash{\parbox[t]{\labelwidth}{\raggedright{#2}}}}%
  {%\strut\smash{\parbox[t]{\labelwidth}{\raggedleft{#2}}}}%
  \ResumeTagging{\parbox}%
}
```

Now we just need to set `wrap-label*={\labelbx{#1}}`.

Something	A short one-line description.
	This is an entry <i>without</i> a label.
Something	A short one-line description.
Something	A much longer description. Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum
long	ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris.
	Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris.
SoMeThInG	A much longer description. Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum
LoNg	ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris.

Final notes

The original implementation (if you can call it that) of the ideas that led to the creation of `enumext` were some macros using the `enumerate[5]` package for personal use created in early 2003, the code was quite questionable, but functional for these simple requirements.

With the great answers given by Christian Hupfer in [Create a fake label ref using list](#) and the answer given by David Carlisle in [Change the use of label ref by data save in an array \(list\)](#) I managed to create a more solid code than the original version, now using the `l3prop[11]` and `l3seq[11]` modules together with the `hyperref[8]` and `enumitem[6]` packages, which did the job, but with some limitations.

As time went by I took these limitations as a personal challenge which I called “*reinventing the wheel*”, since there were packages and classes that did more or less what I was looking for, but did not fit my simple requirements. This “*reinventing the wheel*” finally ended up becoming `enumext`.

Why list environments?

The answer is simple, first I love the beauty of its syntax and many of what I had already written used the `enumerate` environment or lists created using the `enumitem` package. In my mind I thought: how complicated could it be to write a package that looked like `enumitem`? It seemed simple enough, of course I didn’t have in mind the mess I was getting into working with `list` environments, `minipage` and adding support for the `multicol` and `hyperref` packages.

Of course, seeing the final result of the experiment “*reinventing the wheel*” I am quite satisfied.

Why not random questions and other utilities

The “*random*” type questions I love and hate them at the same time, although they simplify a lot the work when creating a multiple choice test, but you lose the beauty of typesetting a document with \LaTeX , that is to say the output does not always look as nice as it should, even if they are only alternatives these must follow a certain order when presented either numerical or presentation, that said handling that using *nested lists* is quite complicated so I do not classify to be implemented.

Why has it taken so long?

One of the setbacks, beyond my laziness, was including compatibility with *tagged* PDF. To be honest, it's something I never considered at any point, but I firmly believe that being able to create *accessible documents* provides a great opportunity in the world of mathematics education. From my perspective as a *high school* teacher, beyond theorems and deep mathematics, the use of exercise lists is one of the most common things. Being able to open the way to work in parallel with those who have different abilities is really important and I regret not having looked into this in the past. I hope that `enumext` serves this purpose and inspires more users and authors to follow this path.

10 References

- [1] HIRSCHHORN, PHILIP. “Using the exam document class”. Available from CTAN, <https://www.ctan.org/pkg/exam>, 2023.
- [2] NIEDERBERGER, CLEMENS. “xsim – eXercise Sheets IMproved”. Available from CTAN, <https://www.ctan.org/pkg/xsim>, 2023.
- [3] MITTELBAACH, FRANK. “An environment for multicolumn output”. Available from CTAN, <https://www.ctan.org/pkg/multicol>, 2024.
- [4] GONZÁLEZ, PABLO. “scontents - Stores \LaTeX contents in memory or files”. Available from CTAN, <https://www.ctan.org/pkg/scontents>, 2024.
- [5] The \LaTeX Project. “enumerate – Enumerate with redefinable labels”. Available from CTAN, <https://www.ctan.org/pkg/enumerate>, 2024.
- [6] BEZOS, JAVIER. “Customizing lists with the enumitem package”. Available from CTAN, <https://www.ctan.org/pkg/enumitem>, 2019.
- [7] BERRY, KARL. “ \LaTeX 2_ε: An Unofficial Reference Manual”. Available from CTAN, <https://ctan.org/pkg/latex2e-help-texinfo>, 2024.
- [8] The \LaTeX Project. “Extensive support for hypertext in \LaTeX ”. Available from CTAN, <https://www.ctan.org/pkg/hyperref>, 2024.
- [9] BURNOL, JEAN-FRANÇOIS. “The footnotehyper package”. Available from CTAN, <https://www.ctan.org/pkg/footnotehyper>, 2021.
- [10] The \LaTeX Project. “The expl3 package”. Available from CTAN, <https://www.ctan.org/pkg/l3kernel>, 2024.
- [11] The \LaTeX Project. “The \LaTeX 3 Interfaces”. Available from CTAN, <https://www.ctan.org/pkg/l3kernel>, 2024.
- [12] The \LaTeX Project. “The \LaTeX 2_ε sources”. Available from CTAN, <https://ctan.org/tex-archive/macros/latex/base>, 2024.
- [13] The \LaTeX Project. “ \LaTeX for authors current version”. Available from CTAN, <https://ctan.org/pkg/latex-base>, 2024.
- [14] GUNDLACH, PATRICK. “The lua-visual-debug package”. Available from CTAN, <https://www.ctan.org/pkg/lua-visual-debug>, 2023.
- [15] LEMVIG, MOGENS. “The shortlst package”. Available from CTAN, <https://www.ctan.org/pkg/shortlst>, 1998.
- [16] NIEDERBERGER, CLEMENS. “tasks – Horizontally columned lists”. Available from CTAN, <https://www.ctan.org/pkg/tasks>, 2022.
- [17] FISCHER, ULRIKE. “tagpdf – \LaTeX kernel code for PDF tagging”. Available from CTAN, <https://www.ctan.org/pkg/tagpdf>, 2024.
- [18] The \LaTeX Project. “latex-lab – \LaTeX laboratory”. Available from CTAN, <https://www.ctan.org/pkg/latex-lab>, 2024.
- [19] MITTELBAACH, FRANK. “ \LaTeX ’s socket management”. Available from CTAN, <https://ctan.org/tex-archive/macros/latex/base>, 2024.

11 Change history

- | | |
|--------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| v1.0 (ctan), 2024-11-10 | <ul style="list-style-type: none"> – Fixed implementation for <code>font</code> and <code>base-fix</code> keys. – Added new keys for symbol marks. – Update and improvements in the internal code. – Adjustments in the documentation. |
| v1.0 (ctan), 2024-11-01 | <ul style="list-style-type: none"> – First public release. |

12 Index of Documentation

The italic numbers denote the pages where the corresponding entry is described.

C		F	
Document class:		\footnote	5
article	2	I	
book	2	\itemsep	8
exam	2	K	
letter	2	Keys for \anskey provide by enumext:	
report	2	break-col	14
\columnbreak	4, 14	item-join	14
\columnsep	10	item-pos*	14
Commands provide by enumext:		item-star	14
\anskey	11-14	item-sym*	14
\anspic	11-13, 16, 17	Keys for \foreachkeyans provide by enumext:	
\foreachkeyans	18	after	19
\getkeyans	13, 18	before	19
\item*	5-7, 11-13, 15, 16	sep	18
\item	5-7, 10, 11, 13, 15, 16	start	18
\miniright	11	step	18
\printkeyans	6, 12, 19	stop	18
\setenumextmeta	6	wrapper	19
\setenumext	5-7, 11, 13, 15, 19	Keys for anskey* provide by enumext:	
Counters defined by enumext:		break-col	14
enumXiii	4	force-eol	15
enumXii	4	item-join	14
enumXiv	4	item-pos*	14
enumXi	4	item-star	14
enumXviii	4	item-sym*	14
enumXvii	4	overwrite	14
enumXvi	4	write-env	14
enumXv	4	Keys for environments provide by enumext:	
E		above*	9
Environments provide by enumext:		above	8, 9
anskey*	11-14, 22	after	10
enumext*	4-16, 19, 22, 23	align	7, 13, 22-24
enumext	4-16, 19, 22, 23	base-fix	8
keyans*	4-15, 23	before*	9, 10
keyanspic	4, 7, 8, 11-14, 16, 22, 23	before	9
keyans	4-17, 23	below*	9
Environments:		below	9
Verbatim	15	check-ans	12, 13
center	5	columns-sep	4, 10, 22
description	5, 23	columns	4, 9, 10, 22
enumerate	1, 3, 5, 24	first	10
figure	5	font	7, 12, 13
flushleft	5	item-pos*	5, 6
flushright	5	item-sym*	5, 6
itemize	5, 23	itemindent	8-10
list	3, 5, 9, 24	itemsep	8
minipage	3-5, 8-11, 22, 24	label-pos	17
multicols	3, 4, 10, 22	label-sep	17
quotation	5	labelsep	3-7, 9, 10, 22, 23
quote	5	labelwidth	3, 4, 6, 7, 9, 10, 12, 13, 22, 23
shortenenumerate	5	labelwith	5
tabbing	5	label	7, 8, 10, 15, 16, 22-24
table	5	labewdith	9
tasks	5	layout-sep	17
trivlist	5	layout-sty	16, 17
verbatim	5	layout-top	17
verse	5	list-indent	3, 9
		list-offset	3, 8, 9, 23, 24

listparindent 9, 10

mark-ans* 12, 13, 15, 17

mark-ans 12-14

mark-pos* 13, 15, 17

mark-pos 12, 14

mark-ref 12

mark-sep* 13, 15, 17

mark-sep 12-14

mini-env 4, 9, 11, 22

mini-right* 7, 11

mini-right 7, 11, 22

mini-sep 4, 11

mode-box 7

no-store 11-14, 23

noitemsep 8

nosep 8, 23

overwrite 14

parsep 8, 10, 17

partopsep 8

ref 4, 8, 22

resume* 7, 10, 11

resume 7, 10, 11

rightmargin 9

save-ans 4, 6, 10-19, 22, 23

save-key 10-12, 19

save-ref 4, 7, 12-14, 18, 22

save-sep 12, 15, 17, 22

series 7, 10, 11

show-ans 12-15, 17, 23

show-length 8

show-pos 12-15, 17, 18

start* 10

start 10

topsep 8, 9, 17

widest 7

wrap-ans* 13, 15, 17

wrap-ans 12-14

wrap-label* 7, 24

wrap-label 7, 12, 13, 22, 24

wrap-opt 12, 13, 15, 17

write-env 14

L

\label 4

Labels provide by enumext:

 \Alph* 7, 8, 15

 \Roman* 7, 8

 \alph* 7, 8

 \arabic* 7, 8

 \roman* 7, 8

\labelsep 3, 7

\labelwidth 3, 7

\linewidth 11

\listparindent 9

P

Packages:

 enumerate 24

 enumext 1-5, 7, 12, 16, 22-25

 enumitem 3, 4, 24

 fancyvrb 15

 footnotehyper 5

 geometry 22

 graphicx 22

 hyperref 4, 5, 12-14, 22, 24

 l3keys 7

 l3prop 24

 l3seq 24

 luamml 22

 multicol 1, 2, 4, 22, 24

 scontents 1, 2, 14, 15, 22

 shortlst 5

 tasks 5

 task 6

 unicode-math 22

 xsim 2

\parsep 8

\partopsep 8

R

\raggedcolumns 4

\ref 4

\rightmargin 9

T

\topsep 8

13 Implementation

The most recent publicly released version of `enumext` is available at CTAN: <https://www.ctan.org/pkg/enumext>. While general feedback via email is welcomed, specific bugs or feature requests should be reported through the issue tracker: <https://github.com/pablgonz/enumext/issues>.

- The documentation presented here is far from professional, it contains a lot of obvious information that to the eye of a TeXpert are superfluous, but, after so many years developing this project is the only way to remember what does what.

13.1 General conventions

Variables containing `i`, `ii`, `iii` and `iv` are associated by level with the `enumext` environment, variables containing `v` are associated with the `keyans` environment, variables containing `vi` are associated with the `keyanspic` environment, variables containing `vii` are associated with the `enumext*` environment and variables containing `viii` are associated with the `keyans*` environment.

To simplify writing and documentation some variables and functions that are common to the different levels of the environments are described using a capital “X”.

The temporary function `__enumext_tmp:n` is used in different parts of the package code for variable creation or execution of other functions that are grouped into this one.

All variables and functions defined in this package are private and are NOT intended to work or be used by another package or module.

13.2 Initial set up

Start the DocStrip guards.

```
1 <{*package>
```

Identify the internal prefix (L^AT_EX3 DocStrip convention) for l3doc class.

```
2 <@@=enumext>
```

13.3 Declaration of the package

First we will make sure we have a minimum (super updated) version of L^AT_EX to work correctly.

```
3 \NeedsTeXFormat{LaTeX2e}[2024-11-01]
```

Now declare the `enumext` package.

```
4 \ProvidesExplPackage {enumext} {2024-11-10} {1.0} {Enumerate exercise sheets}
```

Finally check if the `multicol` and `scontents` packages are loaded, if not we load it.

```
5 \hook_gput_code:nnn {begindocument} {enumext}
6 {
7   \IfPackageLoadedTF { multicol }
8   {
9     \msg_info:nnn { enumext } { package-load } { multicol }
10  }
11  {
12    \msg_info:nnn { enumext } { package-not-load } { multicol }
13    \RequirePackage{multicol}[2024-05-23]
14  }
15  \IfPackageLoadedTF { scontents }
16  {
17    \msg_info:nnn { enumext } { package-load } { scontents }
18  }
19  {
20    \msg_info:nnn { enumext } { package-not-load } { scontents }
21    \RequirePackage{scontents}
22  }
23 }
```

13.4 Definition of variables

Variables that do not appear in this section are created by means of `\keys_define:nn` or some function described below.

```
\__enumext_level_int
\__enumext_level_h_int
\__enumext_anskey_level_int
\__enumext_keyans_level_int
\__enumext_keyans_level_h_int
\__enumext_keyans_pic_level_int
```

Integer variables will control the nesting levels of the environments and `\anskey` command.

```
24 \int_new:N \__enumext_level_int
25 \int_new:N \__enumext_level_h_int
26 \int_new:N \__enumext_anskey_level_int
27 \int_new:N \__enumext_keyans_level_int
28 \int_new:N \__enumext_keyans_level_h_int
29 \int_new:N \__enumext_keyans_pic_level_int
```

(End of definition for `__enumext_level_int` and others.)


```

\l__enumext_starred_bool
\g__enumext_starred_bool
\l__enumext_starred_first_bool
\l__enumext_standar_bool
\g__enumext_standar_bool
\l__enumext_standar_first_bool
\l__enumext_anskey_env_bool
\l__enumext_keyans_env_bool
\g__enumext_start_line_tl
\g__enumext_envir_name_tl
\l__enumext_envir_name_tl

```

Internal variables used by functions `__enumext_is_not_nested:`, `__enumext_is_on_first_level:` and `__enumext_keyans_name_and_start:` (§13.5.1).

```

30 \bool_new:N \l__enumext_starred_bool
31 \bool_new:N \g__enumext_starred_bool
32 \bool_new:N \l__enumext_starred_first_bool
33 \bool_new:N \l__enumext_standar_bool
34 \bool_new:N \g__enumext_standar_bool
35 \bool_new:N \l__enumext_standar_first_bool
36 \bool_new:N \l__enumext_anskey_env_bool
37 \bool_new:N \l__enumext_keyans_env_bool
38 \tl_new:N \g__enumext_start_line_tl
39 \tl_new:N \g__enumext_envir_name_tl
40 \tl_new:N \l__enumext_envir_name_tl

```

(End of definition for `\l__enumext_starred_bool` and others.)

```

\l__enumext_counter_i_tl
\l__enumext_counter_ii_tl
\l__enumext_counter_iii_tl
\l__enumext_counter_iv_tl
\l__enumext_counter_v_tl
\l__enumext_counter_vi_tl
\l__enumext_counter_vii_tl
\l__enumext_counter_viii_tl

```

Variables to store the “*name of the counters*” `enumXi`, `enumXii`, `enumXiii` and `enumXiv` for `enumext` environment, `enumXv` for `keyans` environment and `enumXvi` for the `keyanspic` environment. The counters `enumXvii` and `enumXviii` are used by `enumext*` and `keyans*` environments.

The initial values of these variables are set by the function `__enumext_define_counters:Nn` (§13.11) and then modified by the function `__enumext_label_style:Nnn` used by `label` key (§13.14).

```

41 \cs_set_protected:Npn \__enumext_tmp:n #1
42 {
43   \tl_new:c { l__enumext_counter_#1_tl }
44 }
45 \clist_map_inline:nn { i, ii, iii, iv, v, vi, vii, viii } { \__enumext_tmp:n {#1} }

```

(End of definition for `\l__enumext_counter_i_tl` and others.)

```

\c__enumext_counter_style_tl
\l__enumext_ref_key_arg_tl
\l__enumext_ref_the_count_tl
\l__enumext_the_counter_X_tl
\l__enumext_renew_the_count_X_tl

```

Internal variables used by `ref` key (§13.14).

```

46 \tl_const:Nn \c__enumext_counter_style_tl
47 { { { arabic } { roman } { Roman } { alph } { Alph } } }
48 \tl_new:N \l__enumext_ref_key_arg_tl
49 \tl_new:N \l__enumext_ref_the_count_tl
50 \cs_set_protected:Npn \__enumext_tmp:n #1
51 {
52   \tl_new:c { l__enumext_renew_the_count_#1_tl }
53   \tl_new:c { l__enumext_the_counter_#1_tl }
54   \tl_set:ce { l__enumext_the_counter_#1_tl } { \exp_not:c { theenumX#1 } }
55 }
56 \clist_map_inline:nn { i, ii, iii, iv, v, vi, vii, viii } { \__enumext_tmp:n {#1} }

```

(End of definition for `\c__enumext_counter_style_tl` and others.)

```

\g__enumext_resume_int
\g__enumext_resume_vii_int
\l__enumext_resume_name_tl
\l__enumext_resume_active_bool
\g__enumext_starred_series_tl
\g__enumext_standar_series_tl

```

Internal variables used by `resume`, `resume*` and `series` keys (§13.25).

```

57 \int_new:N \g__enumext_resume_int
58 \int_new:N \g__enumext_resume_vii_int
59 \tl_new:N \l__enumext_resume_name_tl
60 \bool_new:N \l__enumext_resume_active_bool
61 \tl_new:N \g__enumext_standar_series_tl
62 \tl_new:N \g__enumext_starred_series_tl

```

(End of definition for `\g__enumext_resume_int` and others.)

```

\l__enumext_current_widest_dim
\g__enumext_counter_styles_tl
\g__enumext_widest_label_tl
\l__enumext_label_width_by_box

```

The variable `\l__enumext_current_widest_dim` stores the current label width, the variable `\g__enumext_counter_styles_tl` stores the default *label style* and the variable `\g__enumext_widest_label_tl` the label width. These variables are used by `widest` (§13.15) and `label` (§13.13) keys.

```

63 \dim_new:N \l__enumext_current_widest_dim
64 \tl_new:N \g__enumext_counter_styles_tl
65 \tl_new:N \g__enumext_widest_label_tl
66 \box_new:N \l__enumext_label_width_by_box

```

(End of definition for `\l__enumext_current_widest_dim` and others.)

```
\l__enumext_leftmargin_tmp_X_bool
\l__enumext_leftmargin_tmp_X_dim
\l__enumext_leftmargin_X_dim
\l__enumext_itemindent_X_dim
```

The boolean variable `\l__enumext_leftmargin_tmp_X_bool` and the dimensional variable `\l__enumext_leftmargin_tmp_X_dim` are used by the `list-indent` key (§13.18). The variables `\l__enumext_leftmargin_X_dim` and `\l__enumext_itemindent_X_dim` are used and set by the function `__enumext_calc_hspace:NNNNNNNNNN` (§13.38.1).

```
67 \cs_set_protected:Npn \__enumext_tmp:n #1
68 {
69   \bool_new:c { \l__enumext_leftmargin_tmp_#1_bool }
70   \dim_new:c { \l__enumext_leftmargin_tmp_#1_dim }
71   \dim_new:c { \l__enumext_leftmargin_#1_dim }
72   \dim_new:c { \l__enumext_itemindent_#1_dim }
73 }
74 \clist_map_inline:nn { i, ii, iii, iv, v, vi, vii, viii } { \__enumext_tmp:n {#1} }
```

(End of definition for `\l__enumext_leftmargin_tmp_X_bool` and others.)

```
\l__enumext_multicols_above_X_skip
\l__enumext_multicols_below_X_skip
\g__enumext_multicols_right_X_skip
\l__enumext_align_label_pos_X_str
```

Internal variables used by `columns` key (§13.22) and `align` key (§13.13).

```
75 \cs_set_protected:Npn \__enumext_tmp:n #1
76 {
77   \skip_new:c { \l__enumext_multicols_above_#1_skip }
78   \skip_new:c { \l__enumext_multicols_below_#1_skip }
79   \skip_new:c { \g__enumext_multicols_right_#1_skip }
80   \str_new:c { \l__enumext_align_label_pos_#1_str }
81 }
82 \clist_map_inline:nn { i, ii, iii, iv, v } { \__enumext_tmp:n {#1} }
```

(End of definition for `\l__enumext_multicols_above_X_skip` and others.)

```
\g__enumext_minipage_stat_int
\l__enumext_minipage_temp_skip
\l__enumext_minipage_left_skip
\l__enumext_minipage_right_skip
\l__enumext_minipage_after_skip
\g__enumext_minipage_right_skip
\g__enumext_minipage_after_skip
\l__enumext_minipage_left_X_dim
\l__enumext_minipage_active_X_bool
```

Internal variables used by `\miniright` command (§13.23.4) and the keys `mini-right`, `mini-right*`, `mini-env` and `mini-sep` (§13.21, §13.23).

```
83 \int_new:N \g__enumext_minipage_stat_int
84 \skip_new:N \l__enumext_minipage_temp_skip
85 \skip_new:N \l__enumext_minipage_left_skip
86 \skip_new:N \l__enumext_minipage_right_skip
87 \skip_new:N \l__enumext_minipage_after_skip
88 \skip_new:N \g__enumext_minipage_right_skip
89 \skip_new:N \g__enumext_minipage_after_skip
90 \cs_set_protected:Npn \__enumext_tmp:n #1
91 {
92   \dim_new:c { \l__enumext_minipage_left_#1_dim }
93   \bool_new:c { \l__enumext_minipage_active_#1_bool }
94 }
95 \clist_map_inline:nn { i, ii, iii, iv, v, vii, viii } { \__enumext_tmp:n {#1} }
```

(End of definition for `\g__enumext_minipage_stat_int` and others.)

```
\l__enumext_wrap_label_X_bool
\l__enumext_wrap_label_opt_X_bool
\l__enumext_start_X_int
\l__enumext_fake_item_indent_X_tl
\l__enumext_label_fill_left_X_tl
\l__enumext_label_fill_right_X_tl
\l__enumext_vspace_a_star_X_bool
\l__enumext_vspace_b_star_X_bool
```

The bool vars `\l__enumext_wrap_label_X_bool` and `\l__enumext_wrap_label_opt_X_bool` are used by `wrap-label` and `wrap-label*` keys (§13.13), the integer `\l__enumext_start_X_int` are used by the `start` and `start*` keys (§13.15), the token list `\l__enumext_fake_item_indent_X_tl` is used by `itemindent` key (§13.18.1), the variables `\l__enumext_label_fill_left_X_tl` and `\l__enumext_label_fill_right_X_tl` are used by the `align` key (§13.13). The boolean vars `\l__enumext_vspace_a_star_X_bool`, `\l__enumext_vspace_b_star_X_bool` are used by `above`, `above*`, `below` and `below*` keys (§13.20).

```
96 \cs_set_protected:Npn \__enumext_tmp:n #1
97 {
98   \bool_new:c { \l__enumext_wrap_label_#1_bool }
99   \bool_new:c { \l__enumext_wrap_label_opt_#1_bool }
100   \int_new:c { \l__enumext_start_#1_int }
101   \tl_new:c { \l__enumext_fake_item_indent_#1_tl }
102   \tl_new:c { \l__enumext_label_fill_left_#1_tl }
103   \tl_new:c { \l__enumext_label_fill_right_#1_tl }
104   \bool_new:c { \l__enumext_vspace_a_star_#1_bool }
105   \bool_new:c { \l__enumext_vspace_b_star_#1_bool }
106 }
107 \clist_map_inline:nn { i, ii, iii, iv, v, vii, viii } { \__enumext_tmp:n {#1} }
```

(End of definition for `\l__enumext_wrap_label_X_bool` and others.)

```

\l__enumext_store_active_bool
\l__enumext_store_name_tl
\g__enumext_store_name_tl
\l__enumext_store_anskey_arg_tl
\l__enumext_store_anskey_env_tl
\l__enumext_store_anskey_opt_tl
\l__enumext_store_current_label_tl
\l__enumext_store_current_opt_arg_tl
\l__enumext_store_current_label_tmp_tl

```

The variable `\l__enumext_store_active_bool` setting by `save-ans` key (§13.26.1) activates all the mechanism related to `\anskey`, `anskey*`, `keyans`, `keyans*` and `keyanspic` environments.

The variable `\l__enumext_store_name_tl` saves the $\{\langle store\ name \rangle\}$ set by the `save-ans` key of the *sequence* and *prop list* in which we will store, the variable `\g__enumext_store_name_tl` it's just a global copy of $\{\langle store\ name \rangle\}$ used by different functions.

The variable `\l__enumext_store_anskey_arg_tl` save the *argument* of `\anskey` (§13.30) and the variables `\l__enumext_store_anskey_env_tl` and `\l__enumext_store_anskey_opt_tl` save the $\langle body \rangle$ and the $\langle keys \rangle$ of the environment `anskey*` (§13.31).

The variables `\l__enumext_store_current_label_tl` and `\l__enumext_store_current_opt_arg_tl` save the *current label* and *optional argument* of `\item*` (§13.37) and `\anspic*` (§13.42.2) for the `keyans`, `keyans*` and `keyanspic` environments.

The variable `\l__enumext_store_current_label_tmp_tl` is a temporary variable used by `keyans`, `keyans*` and `keyanspic` at various points.

```

108 \bool_new:N \l__enumext_store_active_bool
109 \tl_new:N \l__enumext_store_name_tl
110 \tl_new:N \g__enumext_store_name_tl
111 \tl_new:N \l__enumext_store_anskey_arg_tl
112 \tl_new:N \l__enumext_store_anskey_env_tl
113 \tl_new:N \l__enumext_store_anskey_opt_tl
114 \tl_new:N \l__enumext_store_current_label_tl
115 \tl_new:N \l__enumext_store_current_opt_arg_tl
116 \tl_new:N \l__enumext_store_current_label_tmp_tl

```

(End of definition for `\l__enumext_store_active_bool` and others.)

```

\l__enumext_setkey_tmpa_tl
\l__enumext_setkey_tmpb_tl
\l__enumext_setkey_tmpa_int
\l__enumext_setkey_tmpa_seq
\l__enumext_setkey_tmpb_seq

```

Internal variables used by the command `\setenumext` (§13.48).

```

117 \tl_new:N \l__enumext_setkey_tmpa_tl
118 \tl_new:N \l__enumext_setkey_tmpb_tl
119 \int_new:N \l__enumext_setkey_tmpa_int
120 \seq_new:N \l__enumext_setkey_tmpa_seq
121 \seq_new:N \l__enumext_setkey_tmpb_seq

```

(End of definition for `\l__enumext_setkey_tmpa_tl` and others.)

```

\l__enumext_meta_path_tl
\l__enumext_foreach_print_seq
\l__enumext_foreach_name_prop_tl
\g__enumext_foreach_default_keys_tl

```

Internal variables used by the `\printkeyans` command (§13.47) and `\foreachkeyans` command (§13.50).

```

122 \tl_new:N \l__enumext_meta_path_tl
123 \seq_new:N \l__enumext_foreach_print_seq
124 \tl_new:N \l__enumext_foreach_name_prop_tl
125 \tl_new:N \g__enumext_foreach_default_keys_tl

```

(End of definition for `\l__enumext_meta_path_tl` and others.)

```

\l__enumext_print_keyans_starred_tl
\l__enumext_print_keyans_star_bool
\l__enumext_mark_position_str
\l__enumext_mark_position_v_str
\l__enumext_mark_position_viii_str
\l__enumext_mark_sep_tmpa_dim
\l__enumext_mark_sep_tmpb_dim
\l__enumext_show_pos_tmp_int
\g__enumext_item_symbol_aux_tl
\l__enumext_print_keyans_X_tl
\l__enumext_store_save_key_X_tl
\l__enumext_store_save_key_X_bool
\l__enumext_store_upper_level_X_bool

```

Internal variables used by command `\printkeyans` (§13.47), `show-pos`, `show-ans`, `mark-pos`, `mark-sep` keys (§13.27), `item-sym*` key (§13.35), `save-key` key (§13.27.3) and “*storing structure*”.

```

126 \tl_new:N \l__enumext_print_keyans_starred_tl
127 \bool_new:N \l__enumext_print_keyans_star_bool
128 \str_new:N \l__enumext_mark_position_str
129 \str_new:N \l__enumext_mark_position_v_str
130 \str_new:N \l__enumext_mark_position_viii_str
131 \dim_new:N \l__enumext_mark_sep_tmpa_dim
132 \dim_new:N \l__enumext_mark_sep_tmpb_dim
133 \int_new:N \l__enumext_show_pos_tmp_int
134 \tl_new:N \g__enumext_item_symbol_aux_tl
135 \cs_set_protected:Npn \l__enumext_tmp:n #1
136 {
137   \tl_new:c { \l__enumext_print_keyans_#1_tl }
138   \tl_new:c { \l__enumext_store_save_key_#1_tl }
139   \bool_new:c { \l__enumext_store_save_key_#1_bool }
140   \bool_new:c { \l__enumext_store_upper_level_#1_bool }
141 }
142 \clist_map_inline:nn { i, ii, iii, iv, vii } { \l__enumext_tmp:n {#1} }

```

(End of definition for `\l__enumext_print_keyans_starred_tl` and others.)

```
\l__enumext_anspic_args_seq
  \l__enumext_anspic_mini_width_dim
\l__enumext_anspic_above_int
\l__enumext_anspic_below_int
  \l__enumext_anspic_label_above_bool
    \l__enumext_anspic_mini_pos_str
\l__enumext_anspic_label_box
\l__enumext_anspic_body_box
  \l__enumext_anspic_label_htdp_dim
  \l__enumext_anspic_body_htdp_dim
```

Internal variables used by `keyanspic` environment and `\anspic` command (§13.42.1).

```
143 \seq_new:N \l__enumext_anspic_args_seq
144 \dim_new:N \l__enumext_anspic_mini_width_dim
145 \int_new:N \l__enumext_anspic_above_int
146 \int_new:N \l__enumext_anspic_below_int
147 \bool_new:N \l__enumext_anspic_label_above_bool
148 \str_new:N \l__enumext_anspic_mini_pos_str
149 \box_new:N \l__enumext_anspic_label_box
150 \box_new:N \l__enumext_anspic_body_box
151 \dim_new:N \l__enumext_anspic_label_htdp_dim
152 \dim_new:N \l__enumext_anspic_body_htdp_dim
```

(End of definition for `\l__enumext_anspic_args_seq` and others.)

```
\l__enumext_check_answers_bool
\g__enumext_check_ans_key_bool
\l__enumext_check_start_line_env_tl
  \l__enumext_item_wrap_key_bool
\g__enumext_check_starred_cmd_int
\g__enumext_item_anskey_int
\g__enumext_item_number_int
\g__enumext_item_number_bool
  \g__enumext_item_answer_diff_int
```

Internal variables used by “*internal check answer*” mechanism (§13.26.3) used by the `check-ans`, `no-store`, `wrap-ans*` keys and check for starred commands `\item*` in `keyans` and `keyans*` environments and `\anspic*` in `keyanspic` environment.

```
153 \bool_new:N \l__enumext_check_answers_bool
154 \bool_new:N \g__enumext_check_ans_key_bool
155 \tl_new:N \l__enumext_check_start_line_env_tl
156 \bool_new:N \l__enumext_item_wrap_key_bool
157 \int_new:N \g__enumext_check_starred_cmd_int
158 \int_new:N \g__enumext_item_anskey_int
159 \int_new:N \g__enumext_item_number_int
160 \bool_new:N \l__enumext_item_number_bool
161 \int_new:N \g__enumext_item_answer_diff_int
```

(End of definition for `\l__enumext_check_answers_bool` and others.)

```
\l__enumext_hyperref_bool
  \l__enumext_footnotes_key_bool
```

The boolean variable `\l__enumext_hyperref_bool` will determine if the `hyperref` package is present or load in memory (§13.7). The boolean variable `\l__enumext_footnotes_key_bool` determine if `hyperref` is load with key `hyperfootnotes=true`.

```
162 \bool_new:N \l__enumext_hyperref_bool
163 \bool_new:N \l__enumext_footnotes_key_bool
```

(End of definition for `\l__enumext_hyperref_bool` and `\l__enumext_footnotes_key_bool`.)

```
\l__enumext_newlabel_arg_one_tl
\l__enumext_newlabel_arg_two_tl
  \l__enumext_write_aux_file_tl
\l__enumext_label_copy_X_tl
```

Internal variables used by `save-ref` key (§13.27). The variables `\l__enumext_label_copy_X_tl` correspond to temporary copies of the *labels* defined by level on which operations will be performed.

The variables `\l__enumext_newlabel_arg_one_tl` and `\l__enumext_newlabel_arg_two_tl` will be used to form the arguments passed to the function `__enumext_newlabel:nn` (§13.7) and the variable `\l__enumext_write_aux_file_tl` will be in charge of executing the writing code in the `.aux` file.

```
164 \tl_new:N \l__enumext_newlabel_arg_one_tl
165 \tl_new:N \l__enumext_newlabel_arg_two_tl
166 \tl_new:N \l__enumext_write_aux_file_tl
167 \cs_set_protected:Npn \__enumext_tmp:n #1
168 {
169   \tl_new:c { \l__enumext_label_copy_#1_tl }
170 }
171 \clist_map_inline:nn { i, ii, iii, iv, v, vi, vii, viii } { \__enumext_tmp:n {#1} }
```

(End of definition for `\l__enumext_newlabel_arg_one_tl` and others.)

```
\g__enumext_footnote_standar_int
\g__enumext_footnote_starred_int
\g__enumext_footnote_standar_arg_seq
\g__enumext_footnote_starred_arg_seq
\g__enumext_footnote_standar_int_seq
\g__enumext_footnote_starred_int_seq
```

Internal variables used for redefinition of `\footnote` (§13.8).

```
172 \int_new:N \g__enumext_footnote_standar_int
173 \int_new:N \g__enumext_footnote_starred_int
174 \seq_new:N \g__enumext_footnote_standar_arg_seq
175 \seq_new:N \g__enumext_footnote_starred_arg_seq
176 \seq_new:N \g__enumext_footnote_standar_int_seq
177 \seq_new:N \g__enumext_footnote_starred_int_seq
```

(End of definition for `\g__enumext_footnote_standar_int` and others.)

```
\l__enumext_item_starred_X_bool
\l__enumext_item_column_pos_X_int
\g__enumext_item_count_all_X_int
  \l__enumext_joined_item_X_int
\l__enumext_joined_item_aux_X_int
  \l__enumext_tmpa_X_int
  \l__enumext_tmpa_X_dim
\l__enumext_item_text_X_box
```

Internal variables used by `enumext*` and `keyans*` environments.

```
178 \cs_set_protected:Npn \__enumext_tmp:n #1
179 {
180   \bool_new:c { \l__enumext_item_starred_#1_bool }
181   \int_new:c { \l__enumext_item_column_pos_#1_int }
182   \int_new:c { \g__enumext_item_count_all_#1_int }
183   \int_new:c { \l__enumext_joined_item_#1_int }
```

```

184 \int_new:c { \__enumext_joined_item_aux_#1_int }
185 \int_new:c { \__enumext_tmpa_#1_int }
186 \dim_new:c { \__enumext_tmpa_#1_dim }
187 \box_new:c { \__enumext_item_text_#1_box }
188 \dim_new:c { \__enumext_joined_width_#1_dim }
189 \dim_new:c { \__enumext_item_width_#1_dim }
190 \tl_new:c { g__enumext_item_symbol_aux_#1_tl }
191 \str_new:c { \__enumext_align_label_#1_str }
192 \bool_new:c { g__enumext_minipage_active_#1_bool }
193 \box_new:c { \__enumext_miniright_code_#1_box }
194 \bool_new:c { g__enumext_minipage_center_#1_bool }
195 \dim_new:c { g__enumext_minipage_right_#1_dim }
196 \skip_new:c { g__enumext_minipage_right_#1_skip }
197 }
198 \clist_map_inline:nn { vii, viii } { \__enumext_tmp:n {#1} }

```

(End of definition for `__enumext_item_starred_X_bool` and others.)

`\c__enumext_all_envs_clist` An internal `clist-var` variable to run with `__enumext_tmp:n`.

```

199 \clist_const:Nn \c__enumext_all_envs_clist
200 {
201   {level-1}{i}, {level-2}{ii}, {level-3}{iii}, {level-4}{iv},
202   {keyans}{v}, {enumext*}{vii}, {keyans*}{viii}
203 }

```

(End of definition for `\c__enumext_all_envs_clist`.)

13.5 Some utility functions

`\keys_precompile:neN` Non-standard kernel variants used by the `\printkeyans` command (§13.47) and `\foreachkeyans` command (§13.50).

`\seq_use:NV`

```

204 \cs_generate_variant:Nn \keys_precompile:nnN { neN }
205 \cs_generate_variant:Nn \seq_use:Nn { NV }

```

(End of definition for `\keys_precompile:neN` and `\seq_use:NV`.)

`__enumext_at_begin_document:n` A internal “hook” function used for copying plain `list` and `minipage` environments definition and `hyperref` detection.

```

206 \cs_new_protected:Npn \__enumext_at_begin_document:n #1
207 {
208   \hook_gput_code:nnn {begindocument} {enumext} { #1 }
209 }

```

(End of definition for `__enumext_at_begin_document:n`.)

`__enumext_after_env:nn` A internal “hook” functions for execute code `mini-right` and `mini-right*` keys outside the `enumext*` and `keyans*` environments and print check-ans outside the `enumext` and `enumext*` environments.

`__enumext_before_env:nn`

```

210 \cs_new_protected:Npn \__enumext_after_env:nn #1 #2
211 {
212   \hook_gput_code:nnn {env/#1/after} {enumext} {#2}
213 }
214 \cs_new_protected:Npn \__enumext_before_env:nn #1 #2
215 {
216   \hook_gput_code:nnn {env/#1/before} {enumext} {#2}
217 }

```

(End of definition for `__enumext_after_env:nn` and `__enumext_before_env:nn`.)

`__enumext_level:` Function for check current level in `enumext`.

```

218 \cs_new:Nn \__enumext_level:
219 {
220   \int_to_roman:n { \__enumext_level_int }
221 }

```

(End of definition for `__enumext_level:`.)

```

\__enumext_if_is_int:nT
\__enumext_if_is_int:nF
\__enumext_if_is_int:nTF

```

A conditional function to know if the variable we are passing is an integer used by `start` and `widest` keys. This function is taken directly from the answer given by Henri Menke in [How to test if an expl3 function argument is an integer expression?](#).

```

222 \prg_new_protected_conditional:Npnn \__enumext_if_is_int:n #1 { T, F, TF }
223 {
224   \regex_match:nnTF { ^[\+|-]?[\d]+$ } {#1} % $
225   { \prg_return_true: }
226   { \prg_return_false: }
227 }

```

(End of definition for `__enumext_if_is_int:nT`, `__enumext_if_is_int:nF`, and `__enumext_if_is_int:nTF`.)

```
\__enumext_regex_counter_style:
```

The internal function `__enumext_regex_counter_style:` replace the ‘*’ with the actual counter of the running level and is used by the `ref` key. It loops through the defined counter styles in `\c__enumext_counter_style_tl` and replace ‘*’ by real command, for example, looking for `\arabic*` and replacing that by `\arabic{<counter>}` defined on the current level.

```

228 \cs_new_protected:Nn \__enumext_regex_counter_style:
229 {
230   \tl_map_inline:Nn \c__enumext_counter_style_tl
231   {
232     \regex_replace_once:nnN { \c{##1}\* }
233     { \c{##1}\cB{\u{\l__enumext_ref_the_count_tl}\cE} } \l__enumext_ref_key_arg_tl
234   }
235 }

```

(End of definition for `__enumext_regex_counter_style:.`)

```
\__enumext_show_length:nnn
```

Internal function used by `show-length` key to show “all lengths” calculated and use in `enumext`, `enumext*`, `keyans` and `keyans*` environments.

```

236 \cs_new:Npn \__enumext_show_length:nnn #1 #2 #3
237 {
238   * ~ #2
239   \prg_replicate:nn { 14 - \str_count:n {#2} } { ~ }
240   = ~ \use:c { #1_use:c } { \l__enumext_#2_#3_#1 } \\
241 }

```

(End of definition for `__enumext_show_length:nnn`.)

```
\__enumext_unskip_unkern:
```

The function `__enumext_unskip_unkern:` will remove the last `<skip>` or `<kern>` at execution time using the values `11` and `12` of `\lastnodetype` to apply `\unskip` or `\unkern` according to the case.

```

242 \cs_new_protected:Nn \__enumext_unskip_unkern:
243 {
244   \int_case:nnT { \lastnodetype }
245   {
246     { 11 }{ \unskip }
247     { 12 }{ \unkern }
248   }
249 }

```

(End of definition for `__enumext_unskip_unkern:.`)

13.5.1 Utilities for environments and levels

```

\__enumext_is_not_nested:
\__enumext_is_on_first_level:

```

The function `__enumext_is_not_nested:` set the variables `\g__enumext_standar_bool` and `\g__enumext_starred_bool` to “true” only if the environments `enumext` and `enumext*` are NOT nested in each other and save the environment name in `\l__enumext_envir_name_tl`.

```

250 \cs_new_protected:Nn \__enumext_is_not_nested:
251 {
252   \str_case:en { \@currenvir }
253   {
254     {enumext}
255     {
256       \tl_set:Nn \l__enumext_envir_name_tl { enumext }
257       \bool_lazy_and:nnT
258       { \bool_not_p:n { \g__enumext_standar_bool } }
259       { \int_compare_p:nNn { \l__enumext_level_h_int } = { 0 } }
260       {
261         \bool_gset_true:N \g__enumext_standar_bool
262       }
263     }
264     {enumext*}

```



```

265     {
266       \tl_set:Nn \l__enumext_envir_name_tl { enumext* }
267       \bool_lazy_and:nnT
268         { \bool_not_p:n { \g__enumext_starred_bool } }
269         { \int_compare_p:nNn { \l__enumext_level_int } = { 0 } }
270       {
271         \bool_gset_true:N \g__enumext_starred_bool
272       }
273     }
274   }
275 }

```

The function `__enumext_is_on_first_level:` will set the variables `\l__enumext_standar_first_bool` (§13.26.1), `\l__enumext_starred_first_bool` (§13.26.1) and `\l__enumext_anskey_env_bool` (§13.31) to “true” only if the environment is not nested and we are in the “first level” of it . We will also save the *start line number* of each environment in the variable `\g__enumext_start_line_tl` and the *name* of each environment in the variable `\g__enumext_envir_name_tl` to use in messages related to the `check-ans` key and `.log` file.

```

276 \cs_new_protected:Nn \__enumext_is_on_first_level:
277 {
278   \bool_lazy_all:nT
279     {
280       { \bool_if_p:N \g__enumext_standar_bool }
281       { \int_compare_p:nNn { \l__enumext_level_int } = { 1 } }
282       { \int_compare_p:nNn { \l__enumext_level_h_int } = { 0 } }
283     }
284     {
285       \bool_set_true:N \l__enumext_standar_first_bool
286       \bool_set_true:N \l__enumext_anskey_env_bool
287       \tl_gset:Nn \g__enumext_envir_name_tl { enumext }
288       \tl_gset:Nn \g__enumext_start_line_tl
289         {
290           on ~ line ~ \exp_not:V \inputlineno
291         }
292     }
293   \bool_lazy_all:nT
294     {
295       { \bool_if_p:N \g__enumext_starred_bool }
296       { \int_compare_p:nNn { \l__enumext_level_h_int } = { 1 } }
297       { \int_compare_p:nNn { \l__enumext_level_int } = { 0 } }
298     }
299     {
300       \bool_set_true:N \l__enumext_starred_first_bool
301       \bool_set_true:N \l__enumext_anskey_env_bool
302       \tl_gset:Nn \g__enumext_envir_name_tl { enumext* }
303       \tl_gset:Nn \g__enumext_start_line_tl
304         {
305           on ~ line ~ \exp_not:V \inputlineno
306         }
307     }
308 }

```

(End of definition for `__enumext_is_not_nested:` and `__enumext_is_on_first_level:`)

`__enumext_keyans_name_and_start:`

The function `__enumext_keyans_name_and_start:` will save the start line number and name of the environments `keyans`, `keyans*` and `keyanspic` in the variables `\l__enumext_check_start_line_env_tl` and `\l__enumext_envir_name_tl` to use in the `__enumext_check_starred_cmd:n` function.

```

309 \cs_new_protected:Nn \__enumext_keyans_name_and_start:
310 {
311   \str_case:en { \@currenvir }
312     {
313       {keyans}
314       {
315         \tl_set:Nn \l__enumext_envir_name_tl { keyans }
316         \tl_set:Nn \l__enumext_check_start_line_env_tl
317           {
318             in ~ 'keyans' ~ start ~ on ~ line ~ \exp_not:V \inputlineno
319           }
320       }
321     } {keyans*}
322     {

```

```

323         \tl_set:Nn \l__enumext_envir_name_tl { keyans* }
324         \tl_set:Ne \l__enumext_check_start_line_env_tl
325         {
326             in ~ 'keyans*' ~ start ~ on ~ line ~ \exp_not:V \inputlineno
327         }
328     }
329     {keyanspic}
330     {
331         \tl_set:Nn \l__enumext_envir_name_tl { keyanspic }
332         \tl_set:Ne \l__enumext_check_start_line_env_tl
333         {
334             in ~ 'keyanspic' ~ start ~ on ~ line ~ \exp_not:V \inputlineno
335         }
336     }
337 }
338 }

```

(End of definition for `__enumext_keyans_name_and_start:`)

13.5.2 Utilities for log and terminal

The function `__enumext_reset_global_vars:` will be passed to the function `__enumext_execute_after_env:` and will return the global variables to their default values after being used.

```

\__enumext_reset_global_vars:
\__enumext_reset_global_int:
\__enumext_reset_global_bool:
\__enumext_reset_global_tl:
339 \cs_new_protected:Nn \__enumext_reset_global_vars:
340 {
341     \__enumext_reset_global_int:
342     \__enumext_reset_global_bool:
343     \__enumext_reset_global_tl:
344 }
345 \cs_new_protected:Nn \__enumext_reset_global_int:
346 {
347     \int_gzero:N \g__enumext_item_number_int
348     \int_gzero:N \g__enumext_item_anskey_int
349     \int_gzero:N \g__enumext_item_answer_diff_int
350 }
351 \cs_new_protected:Nn \__enumext_reset_global_bool:
352 {
353     \bool_gset_false:N \g__enumext_check_ans_key_bool
354     \bool_gset_false:N \g__enumext_standar_bool
355     \bool_gset_false:N \g__enumext_starred_bool
356 }
357 \cs_new_protected:Nn \__enumext_reset_global_tl:
358 {
359     \tl_gclear:N \g__enumext_store_name_tl
360     \tl_gclear:N \g__enumext_start_line_tl
361     \tl_gclear:N \g__enumext_envir_name_tl
362 }

```

(End of definition for `__enumext_reset_global_vars:` and others.)

The function `__enumext_log_global_vars:` will be passed to the function `__enumext_execute_after_env:` and write to the `.log` file the number of elements saved in the *prop list* and *sequence* created by the *save-ans* key along with the value of the integer variable created for the *resume* key.

```

363 \cs_new_protected:Nn \__enumext_log_global_vars:
364 {
365     \msg_log:nneeee { enumext } { prop-seq-int-hook }
366     { \g__enumext_store_name_tl }
367     { \prop_count:c { g__enumext_ \g__enumext_store_name_tl _prop } }
368     { \seq_count:c { g__enumext_ \g__enumext_store_name_tl _seq } }
369     { \int_use:c { g__enumext_resume_ \g__enumext_store_name_tl _int } }
370 }

```

The function `__enumext_log_answer_vars:` will be passed to the function `__enumext_execute_after_env:` and write to the `.log` file the number of items and answers along with the difference between them.

```

371 \cs_new_protected:Nn \__enumext_log_answer_vars:
372 {
373     \msg_log:nneeee { enumext } { item-answer-hook }
374     { \int_use:N \g__enumext_item_number_int }
375     { \int_use:N \g__enumext_item_anskey_int }
376     { \int_eval:n { \g__enumext_item_number_int - \g__enumext_item_anskey_int } }
377 }

```

(End of definition for `__enumext_log_global_vars:` and `__enumext_log_answer_vars:`)

13.6 Copying list and minipage environments

The `list` environment provided by \LaTeX has the following plain form:

```
\list{⟨arg one⟩}{⟨arg two⟩}
  \item[⟨opt⟩]
\endlist
```

And `minipage` environment provided by \LaTeX has the following (simplified) plain form:

```
\minipage[⟨pos⟩][⟨height⟩][⟨inner-pos⟩]{⟨width⟩}
  ⟨internal implement⟩
\endminipage
```

As a precaution we copy them using `__enumext_at_begin_document:n` in case any package redefines the `list` environment or a related command.

🔍 For compatibility with *tagged* PDF we should use `\NewCommandCopy` and not `\cs_new_eq:NN` for `\item`. When *tagged* PDF is active `\item` is redefined using `ltxcmd` (see `latex-lab-block`[18]).

```
\__enumext_start_list:nn
  \__enumext_stop_list:
  \__enumext_item_std:w
  \__enumext_minipage:w
  \__enumext_endminipage:
```

The functions `__enumext_start_list:nn` and `__enumext_stop_list:` correspond to copies of `\list` and `\endlist` from plain definition of `list` environment, the function `__enumext_item_std:w` is a copy of the `\item` command.

```
378 \__enumext_at_begin_document:n
379 {
380   \cs_new_eq:NN \__enumext_start_list:nn \list
381   \cs_new_eq:NN \__enumext_stop_list: \endlist
382   \NewCommandCopy \__enumext_item_std:w \item
383 }
```

The functions `__enumext_minipage:w` and `__enumext_endminipage:` correspond to copies of `\minipage` and `\endminipage` from plain definition of `minipage` environment.

```
384 \__enumext_at_begin_document:n
385 {
386   \cs_new_eq:NN \__enumext_minipage:w \minipage
387   \cs_new_eq:NN \__enumext_endminipage: \endminipage
388 }
```

(End of definition for `__enumext_start_list:nn` and others.)

13.7 Compatibility with hyperref and footnotehyper

First we define the necessary rules using “hooks” to determine if the `hyperref` package is loaded.

```
\__enumext_after_hyperref:
  \__enumext_hypertarget:nn
  \__enumext_phantomsection:
```

```
389 \hook_gput_code:nnn { begindocument } { enumext } { \__enumext_after_hyperref: }
390 \hook_gset_rule:nnnn { begindocument } { enumext } { after } { hyperref }
```

The function `__enumext_after_hyperref:` sets the state of the boolean variable `\l__enumext_hyperref_bool` to “true” if the package is loaded. At this point we will use the public macro `\IfHyperBoolean` to determine if the `hyperfootnotes=true` key is present, if so, we set the state of the boolean variable `__enumext_footnotes_key_bool` to “true”.

```
391 \cs_new_protected:Nn \__enumext_after_hyperref:
392 {
393   \IfPackageLoadedTF { hyperref }
394   {
395     \msg_info:nnn { enumext } { package-load } { hyperref }
396     \bool_set_true:N \l__enumext_hyperref_bool
397     \IfHyperBoolean{hyperfootnotes}
398     {
399       \bool_set_true:N \l__enumext_footnotes_key_bool
400     }
401     { }
402   }
403 }
```

If the state of the variable `\l__enumext_footnotes_key_bool` is true we will check if the package `footnotehyper` is loaded, in case it is not present, we will set the value of `\l__enumext_footnotes_key_bool` to false and we will redefine `\footnote`.

```
404 \bool_if:NT \l__enumext_footnotes_key_bool
405 {
406   \IfPackageLoadedTF { footnotehyper }
407   {
408     \msg_info:nnn { enumext } { package-load } { footnotehyper }
409   }
410 }
```

```

411         \bool_set_false:N \l__enumext_footnotes_key_bool
412     }
413 }

```

The functions `__enumext_hypertarget:nn` and `__enumext_phantomsection:` correspond to the internal copies of `\hypertarget` and `\phantomsection`. If the boolean variable `\l__enumext_hyperref_bool` is false the functions `__enumext_hypertarget:nn` and `__enumext_phantomsection:` will be disabled.

```

414 \bool_if:NTF \l__enumext_hyperref_bool
415 {
416     \cs_new_eq:NN \__enumext_hypertarget:nn \hypertarget
417     \cs_new_eq:NN \__enumext_phantomsection: \phantomsection
418 }
419 {
420     \cs_new_eq:NN \__enumext_hypertarget:nn \use_none:nn
421     \cs_new_eq:NN \__enumext_phantomsection: \prg_do_nothing:
422 }
423 }

```

(End of definition for `__enumext_after_hyperref:`, `__enumext_hypertarget:nn`, and `__enumext_phantomsection:`.)

`__enumext_newlabel:nn`

The function `__enumext_newlabel:nn` write the information to the `.aux` file when using the `save-ref` key. The arguments taken by the function are:

#1: `\l__enumext_newlabel_arg_one_tl`

#2: `\l__enumext_newlabel_arg_two_tl`

- The trick here is to manage the number of arguments passed to `\newlabel{#1}{#2}` according to the presence of the `hyperref` package.

```

424 \cs_new_protected:Npn \__enumext_newlabel:nn #1 #2
425 {
426     \protected@write \@auxout { }
427     {
428         \token_to_str:N \newlabel {#1}
429         {
430             {#2}
431             \bool_if:NT \l__enumext_hyperref_bool
432             { { \thepage } {#2} {#1} }
433             { }
434         }
435     }
436     \__enumext_hypertarget:nn {#1} { }
437     \__enumext_phantomsection:
438 }

```

(End of definition for `__enumext_newlabel:nn`.)

13.8 Internal redefining `\footnote` command

To keep the correct numbering of `\footnote` and to make it work correctly in the `enumext*` and `keyans*` environments and `mini-env` key it is necessary to redefine the `\footnote` command. This implementation is adapted from the answer given by Clea F. Rees (@cfr) in `footnotes in boxes compatible with hyperref`.

`__enumext_footnotetext:nn`

`__enumext_renew_footnote:`

`__enumext_print_footnote:`

`__enumext_renew_footnote_mini:`

`__enumext_print_footnote_mini:`

Redefinition of the `\footnote` command using `\footnotetext` and `\footnotemark` for the `mini-env` key in the `enumext` and `keyans` environments.

```

439 \cs_new_protected:Nn \__enumext_footnotetext:nn
440 {
441     \footnotetext[#1]{#2}
442 }
443 \cs_new_protected:Nn \__enumext_renew_footnote:
444 {
445     \RenewDocumentCommand \footnote { o +m }
446     {
447         \tl_if_novalue:nTF {##1}
448         {
449             \stepcounter{footnote}
450             \int_gset_eq:Nc \g__enumext_footnote_standar_int { c@footnote }
451         }
452         {
453             \int_gset:Nn \g__enumext_footnote_standar_int { ##1 }
454         }
455         \footnotemark [ \g__enumext_footnote_standar_int ]
456         \seq_gput_right:Nn \g__enumext_footnote_standar_arg_seq { ##2 }
457         \seq_gput_right:NV

```

```

458         \g__enumext_footnote_standar_int_seq \g__enumext_footnote_standar_int
459     }
460 }
461 \cs_new_protected:Nn \__enumext_print_footnote:
462 {
463     \seq_if_empty:NF \g__enumext_footnote_standar_int_seq
464     {
465         \seq_map_pairwise_function:NNN
466         \g__enumext_footnote_standar_int_seq
467         \g__enumext_footnote_standar_arg_seq
468         \__enumext_footnotetext:nn
469     }
470     \seq_gclear:N \g__enumext_footnote_standar_arg_seq
471     \seq_gclear:N \g__enumext_footnote_standar_int_seq
472 }

```

The `enumext*` and `keyans*` environments are implemented using `minipage` so we must also redefine `\footnote` to keep these numbering as if it were part of the document.

```

473 \cs_new_protected:Nn \__enumext_renew_footnote_mini:
474 {
475     \RenewDocumentCommand \footnote { o +m }
476     {
477         \tl_if_novalue:nTF {##1}
478         {
479             \stepcounter{footnote}
480             \int_gset_eq:Nc \g__enumext_footnote_starred_int { c@footnote }
481         }
482         {
483             \int_gset:Nn \g__enumext_footnote_starred_int { ##1 }
484         }
485         \footnotemark [ \g__enumext_footnote_starred_int ]
486         \seq_gput_right:Nn \g__enumext_footnote_starred_arg_seq { ##2 }
487         \seq_gput_right:NV
488         \g__enumext_footnote_starred_int_seq \g__enumext_footnote_starred_int
489     }
490 }
491 \cs_new_protected:Nn \__enumext_print_footnote_mini:
492 {
493     \seq_if_empty:NF \g__enumext_footnote_starred_int_seq
494     {
495         \seq_map_pairwise_function:NNN
496         \g__enumext_footnote_starred_int_seq
497         \g__enumext_footnote_starred_arg_seq
498         \__enumext_footnotetext:nn
499     }
500     \seq_gclear:N \g__enumext_footnote_starred_arg_seq
501     \seq_gclear:N \g__enumext_footnote_starred_int_seq
502 }

```

(End of definition for `__enumext_footnotetext:nn` and others.)

```

\__enumext_renew_footnote_standar:
\__enumext_print_footnote_standar:
\__enumext_renew_footnote_starred:
\__enumext_print_footnote_starred:

```

We encapsulate the redefinition of `\footnote` to pass it to internal `__enumext_mini_page` environment used by the `mini-env` key in the `enumext` and `keyans` environments. We will run the redefinition when *tagged* PDF is active or when the `footnotehyper` package is not loaded.

```

503 \cs_new_protected:Nn \__enumext_renew_footnote_standar:
504 {
505     \bool_if:NT \g__enumext_standar_bool
506     {
507         \IfDocumentMetadataTF
508         {
509             \__enumext_renew_footnote:
510         }
511         {
512             \bool_if:NF \l__enumext_footnotes_key_bool
513             {
514                 \__enumext_renew_footnote:
515             }
516         }
517     }
518 }
519 \cs_new_protected:Nn \__enumext_print_footnote_standar:

```

```

520 {
521   \bool_if:NT \g__enumext_standar_bool
522   {
523     \IfDocumentMetadataTF
524     {
525       \__enumext_print_footnote:
526     }
527     {
528       \bool_if:NF \l__enumext_footnotes_key_bool
529       {
530         \__enumext_print_footnote:
531       }
532     }
533   }
534 }

```

We encapsulate the redefinition of `\footnote` to pass it to the `enumext*` and `keyans*` environments. We will run the redefinition when *tagged* PDF is active or when the `footnotehyper` package is not loaded.

```

535 \cs_new_protected:Nn \__enumext_renew_footnote_starred:
536 {
537   \IfDocumentMetadataTF
538   {
539     \__enumext_renew_footnote_mini:
540   }
541   {
542     \bool_if:NF \l__enumext_footnotes_key_bool
543     {
544       \__enumext_renew_footnote_mini:
545     }
546   }
547 }
548 \cs_new_protected:Nn \__enumext_print_footnote_starred:
549 {
550   \IfDocumentMetadataTF
551   {
552     \__enumext_print_footnote_mini:
553   }
554   {
555     \bool_if:NF \l__enumext_footnotes_key_bool
556     {
557       \__enumext_print_footnote_mini:
558     }
559   }
560 }

```

In `enumext*` and `keyans*` environments we need to use “hooks” to print `\footnote` with support for *tagged* PDF.

```

561 \__enumext_after_env:nn { enumext* }
562 {
563   \__enumext_print_footnote_starred:
564 }
565 \__enumext_after_env:nn { keyans* }
566 {
567   \__enumext_print_footnote_starred:
568 }

```

(End of definition for `__enumext_renew_footnote_standar:` and others.)

13.9 The internal minipage environment

```

\__enumext_internal_mini_page:
  __enumext_mini_env*

```

The function `__enumext_internal_mini_page:` creates a internal `__enumext_mini_page` environment (*custom version* of `minipage`) setting the `\if@minipage` switch to “false” to allow spaces at the “above” of the environment, plus we will add `\skip_vertical:N \c_zero_skip` to maintain alignment on “top” in the first part and `\skip_vertical:N \c_zero_skip` in the second part to allow spaces “below”. This environment will be used internally by the `mini-env` key, it is NOT documented in the user interface and is for internal use only. Within this environment we redefine `\footnote` to make them look the same as if they were elsewhere in the document. This function is passed to the function `__enumext_safe_exec:` in the `enumext` environment definition (§13.39) and `__enumext_safe_exec_vii:` in the `enumext*` environment definition (§13.44)

```

569 \cs_new_protected:Nn \__enumext_internal_mini_page:
570 {
571   \int_compare:nNt { \l__enumext_level_int } = { 0 }

```



```

572     {
573       \DeclareDocumentEnvironment{__enumext_mini_page}{ m }
574       {
575         \__enumext_renew_footnote_standar:
576         \__enumext_minipage:w [ t ] { ##1 }
577         \legacy_if_gset_false:n { @minipage }
578         \skip_vertical:N \c_zero_skip
579       }
580       {
581         \skip_vertical:N \c_zero_skip
582         \__enumext_endminipage:
583         \__enumext_print_footnote_standar:
584       }
585     }
586   }

```

(End of definition for `__enumext_internal_mini_page:` and `__enumext_mini_env*`.)

13.10 Definition of public dimension

The package `enumext` only provides a single public dimension `\itemwidth` and is intended for user convenience only and is not for internal use as such. This dimension is set in all environments and is only used by the `wrap-ans` key at its default value.

```

587 \dim_zero_new:N \itemwidth

```

13.11 Definition of counters

```

\__enumext_define_counters:Nn
enumXi
enumXii
enumXiii
enumXiv
enumXv
enumXvi
enumXvii
enumXviii

```

To create the necessary “*counters*” we must first make sure that they are not already defined by the user or a package such as `enumitem`, otherwise a error will be returned and the package loading will be aborted. The arguments taken by the function are:

- #1:** A token list `__enumext_counter_X_tl` for “*store*” the counter’s name.
#2: The counter’s name.

```

588 \cs_new_protected:Npn \__enumext_define_counters:Nn #1 #2
589 {
590   \cs_if_exist:cTF { c@ #2 }
591   { \msg_fatal:nnn { enumext } { counters }{ #2 } }
592   {
593     \tl_set:Nn #1 { #2 }
594     \newcounter { #2 }
595   }
596 }

```

The counters created here are `enumXi`, `enumXii`, `enumXiii` and `enumXiv` for `enumext` environment, `enumXv` for `keyans` environment, `enumXvi` for `keyanspic` environment, `enumXvii` for `enumext*` and `enumXviii` for the `keyans*` environments.

```

597 \__enumext_define_counters:Nn \__enumext_counter_i_tl { enumXi }
598 \__enumext_define_counters:Nn \__enumext_counter_ii_tl { enumXii }
599 \__enumext_define_counters:Nn \__enumext_counter_iii_tl { enumXiii }
600 \__enumext_define_counters:Nn \__enumext_counter_iv_tl { enumXiv }
601 \__enumext_define_counters:Nn \__enumext_counter_v_tl { enumXv }
602 \__enumext_define_counters:Nn \__enumext_counter_vi_tl { enumXvi }
603 \__enumext_define_counters:Nn \__enumext_counter_vii_tl { enumXvii }
604 \__enumext_define_counters:Nn \__enumext_counter_viii_tl { enumXviii }

```

(End of definition for `__enumext_define_counters:Nn` and others.)

13.12 Definition of labels

This part of the code is inspired by the `enumitem` package. The idea is to be able to access the counters using `\arabic*`, `\Alph*`, `\alph*`, `\Roman*` and `\roman*` to use them in the `label` key.

```

\__enumext_register_counter_style:Nn

```

These `⟨counters⟩` will be used as default `⟨labels⟩` if the `label` key is not used for the different levels of the `enumext`, `enumext*`, `keyans` and `keyans*` environments, so it is necessary to get a default value for `labelwidth` from these `⟨labels⟩` at the same time.

```

605 \cs_new_protected:Npn \__enumext_register_counter_style:Nn #1 #2
606 {
607   \tl_const:cn { c__enumext_widest_ \cs_to_str:N #1 _tl } {#2}
608   \tl_gput_right:Nn \g__enumext_counter_styles_tl {#1}
609 }
610 \__enumext_register_counter_style:Nn \arabic { 0 }
611 \__enumext_register_counter_style:Nn \Alph { M }
612 \__enumext_register_counter_style:Nn \alph { m }

```

```

613 \__enumext_register_counter_style:Nn \Roman { VIII }
614 \__enumext_register_counter_style:Nn \roman { viii }

```

(End of definition for __enumext_register_counter_style:Nn.)

```

\__enumext_label_width_by_box:Nn
\__enumext_label_width_by_box:cv

```

The function __enumext_label_width_by_box:Nn set the default \labelwidth using a box width if no \labelwidth key is passed.

```

615 \cs_new_protected:Npn \__enumext_label_width_by_box:Nn #1 #2
616 {
617   \hbox_set:Nn \l__enumext_label_width_by_box {#2}
618   \dim_set:Nn #1 { \box_wd:N \l__enumext_label_width_by_box }
619 }
620 \cs_generate_variant:Nn \__enumext_label_width_by_box:Nn { cv }

```

(End of definition for __enumext_label_width_by_box:Nn.)

```

\__enumext_label_style:Nnn
\__enumext_label_style:cvn

```

The function __enumext_label_style:Nnn is used by the \label key to creates the variables containing the *label style* and will allow to use \arabic*, \Alph*, \alph*, \Roman* and \roman* as arguments. It loops through the defined counter styles in \g__enumext_counter_styles_tl (\arabic, \alph, \Alph, \roman, and \Roman) for example, looking for \roman* and replacing that by \roman{<counter>}, and doing the same for the \g__enumext_widest_label_tl to keep both in sync.

```

621 \cs_new_protected:Npn \__enumext_label_style:Nnn #1 #2 #3
622 {
623   \tl_clear_new:N #1
624   \tl_put_right:Ne #1 { \tl_trim_spaces:n {#3} }
625   \tl_gset_eq:NN \g__enumext_widest_label_tl #1
626   \tl_map_inline:Nn \g__enumext_counter_styles_tl
627   {
628     \tl_replace_all:Nne #1 { ##1* } { \exp_not:N ##1 {#2} }
629     \tl_greplace_all:Nne \g__enumext_widest_label_tl { ##1* }
630     { \tl_use:c { c__enumext_widest_ \cs_to_str:N ##1 _tl } }
631   }
632   \__enumext_label_width_by_box:Nn \l__enumext_current_widest_dim
633   { \tl_use:N \g__enumext_widest_label_tl }
634   \tl_set_eq:cN { the #2 } #1
635 }
636 \cs_generate_variant:Nn \__enumext_label_style:Nnn { cvn }

```

(End of definition for __enumext_label_style:Nnn.)

13.13 Setting keys associated with label

When *tagged* PDF is active \makelabel is redefined using \makebox to work correctly (§13.34). From the user side it is convenient to have a key that allows using this redefinition with \makebox without having \IfDocumentMetadataTF active.

mode-box

We define the key *mode-box* only for the “first level” of enumext and enumext* environments.

```

637 \cs_set_protected:Npn \__enumext_tmp:n #1
638 {
639   \keys_define:nn { enumext / #1 }
640   {
641     mode-box .bool_set:N = \l__enumext_mode_box_bool,
642     mode-box .initial:n = false,
643     mode-box .value_forbidden:n = true,
644   }
645 }
646 \clist_map_inline:nn { level-1, enumext* } { \__enumext_tmp:n {#1} }

```

(End of definition for mode-box.)

font
labelsep
labelwidth
wrap-label
wrap-label*

Definition of keys font, labelsep, labelwidth, wrap-label and wrap-label* keys for enumext and keyans environments.

```

647 \cs_set_protected:Npn \__enumext_tmp:nn #1 #2
648 {
649   \keys_define:nn { enumext / #1 }
650   {
651     font .tl_set:c = { l__enumext_label_font_style_#2_tl },
652     font .value_required:n = true,
653     labelsep .dim_set:c = { l__enumext_labelsep_#2_dim },
654     labelsep .initial:n = {0.3333em},
655     labelsep .value_required:n = true,

```

```

656     labelwidth .dim_set:c = { l__enumext_labelwidth_#2_dim },
657     labelwidth .value_required:n = true,
658     wrap-label .cs_set_protected:cp = { __enumext_wrapper_label_#2:n } ##1,
659     wrap-label .initial:n = {##1},
660     wrap-label .value_required:n = true,
661     wrap-label* .code:n = {
662         \bool_set_true:c { l__enumext_wrap_label_opt_#2_bool }
663         \keys_set:nn { enumext / #1 } { wrap-label = {##1} }
664     },
665     wrap-label* .value_required:n = true,
666 }
667 }
668 \clist_map_inline:Nn \c__enumext_all_envs_clist { \__enumext_tmp:nn #1 }

```

(End of definition for font and others.)

align The align key is implemented differently for “starred” and “non starred” environments. For compatibility with tagged PDF we must set \l__enumext_align_label_pos_X_str.

```

669 \cs_set_protected:Npn \__enumext_tmp:nn #1 #2
670 {
671     \keys_define:nn { enumext / #1 }
672     {
673         align .choice:,
674         align / left .code:n =
675             {
676                 \tl_clear:c { l__enumext_label_fill_left_#2_tl }
677                 \tl_set:cn { l__enumext_label_fill_right_#2_tl } { \hfill }
678                 \str_set:cn { l__enumext_align_label_pos_#2_str } { l }
679             },
680         align / right .code:n =
681             {
682                 \tl_set:cn { l__enumext_label_fill_left_#2_tl } { \hfill }
683                 \tl_clear:c { l__enumext_label_fill_right_#2_tl }
684                 \str_set:cn { l__enumext_align_label_pos_#2_str } { r }
685             },
686         align / center .code:n =
687             {
688                 \tl_set:cn { l__enumext_label_fill_left_#2_tl } { \hfill }
689                 \tl_set:cn { l__enumext_label_fill_right_#2_tl } { \hfill }
690                 \str_set:cn { l__enumext_align_label_pos_#2_str } { c }
691             },
692         align / unknown .code:n =
693             \msg_error:nneee { enumext } { unknown-choice }
694             { align } { left, ~ right, ~ center } { \exp_not:n {##1} },
695         align .initial:n = left,
696         align .value_required:n = true,
697     }
698 }
699 \clist_map_inline:nn
700 {
701     {level-1}{i}, {level-2}{ii}, {level-3}{iii}, {level-4}{iv}, {keyans}{v}
702 }
703 { \__enumext_tmp:nn #1 }
704 \cs_set_protected:Npn \__enumext_tmp:nn #1 #2
705 {
706     \keys_define:nn { enumext / #1 }
707     {
708         align .choice:,
709         align / left .code:n = \str_set:cn { l__enumext_align_label_#2_str } { l },
710         align / right .code:n = \str_set:cn { l__enumext_align_label_#2_str } { r },
711         align / center .code:n = \str_set:cn { l__enumext_align_label_#2_str } { c },
712         align / unknown .code:n =
713             \msg_error:nneee { enumext } { unknown-choice }
714             { align } { left, ~ right, ~ center } { \exp_not:n {##1} },
715         align .initial:n = left,
716         align .value_required:n = true,
717     }
718 }
719 \clist_map_inline:nn { {enumext*}{vii}, {keyans*}{viii} } { \__enumext_tmp:nn #1 }

```

(End of definition for align.)

13.14 Setting label and ref keys

The implementation of the keys `label` and `ref` are part of the core of the package `enumext`, here the default values for `\label`, the value of the variables `\l__enumext_label_X_tl`, the default values for `\labelwidth` and the “*label and ref*” system.

13.14.1 Define and set label and ref keys for enumext environment

Here we set the default `\labels` of the *four levels* of `enumext` environment, along with the default value for `labelwidth` key and `ref` key.

```

label
ref
\l__enumext_label_i_tl 720 \cs_set_protected:Npn \l__enumext_tmp:nnn #1 #2 #3
\l__enumext_label_ii_tl 721 {
\l__enumext_label_iii_tl 722   \keys_define:nn { enumext / #1 }
\l__enumext_label_iv_tl 723   {
724     label .code:n = {
725       \l__enumext_label_style:cnv { \l__enumext_label_#2_tl }
726       { \l__enumext_counter_#2_tl } {##1}
727       \dim_set_eq:cn { \l__enumext_labelwidth_#2_dim }
728       \l__enumext_current_widest_dim
729     },
730     label .initial:n = #3,
731     label .value_required:n = true,
732     ref .code:n = \l__enumext_standar_ref:n {##1},
733     ref .value_required:n = true,
734   }
735 }
736 \l__enumext_tmp:nnn { level-1 } { i } { \arabic*. }
737 \l__enumext_tmp:nnn { level-2 } { ii } { (\alph*. ) }
738 \l__enumext_tmp:nnn { level-3 } { iii } { \roman*. }
739 \l__enumext_tmp:nnn { level-4 } { iv } { \Alph*. }
```

(End of definition for `label` and others.)

```

\l__enumext_standar_ref:n
\l__enumext_standar_ref:
```

The `\l__enumext_standar_ref:n` first we will pass the key argument to `\l__enumext_ref_key_arg_tl` and we will analyze its state, if it is not *empty* we will make a copy of the current counter in `\l__enumext_ref_the_count_tl` and we will execute the function `\l__enumext_regex_counter_style:` which will return the modified `\l__enumext_ref_key_arg_tl` and we make the value of `\l__enumext_ref_the_count_tl` the same as that `\l__enumext_the_counter_X_tl` which contains `\theenumX` and finally we set `\l__enumext_renew_the_count_X_tl` with the renewed command.

```

740 \cs_new_protected:Npn \l__enumext_standar_ref:n #1
741 {
742   \tl_set:Nn \l__enumext_ref_key_arg_tl {#1}
743   \tl_if_empty:NTF \l__enumext_ref_key_arg_tl
744   {
745     \msg_error:nnn { enumext } { key-ref-empty } { enumext }
746   }
747   {
748     \tl_set_eq:Nc
749     \l__enumext_ref_the_count_tl { \l__enumext_counter_ \l__enumext_level: _tl }
750     \l__enumext_regex_counter_style:
751     \tl_set_eq:Nc
752     \l__enumext_ref_the_count_tl { \l__enumext_the_counter_ \l__enumext_level: _tl }
753     \tl_put_right:ce { \l__enumext_renew_the_count_ \l__enumext_level: _tl }
754     {
755       \exp_not:N \renewcommand { \exp_not:V \l__enumext_ref_the_count_tl } { \exp_not:V \l__
756     }
757   }
758 }
```

Finally the function `\l__enumext_standar_ref:` will execute the modification for the reference system in the second argument of the environment definition `enumext`.

```

759 \cs_new_protected:Npn \l__enumext_standar_ref:
760 {
761   \tl_if_empty:cF { \l__enumext_renew_the_count_ \l__enumext_level: _tl }
762   {
763     \tl_use:c { \l__enumext_renew_the_count_ \l__enumext_level: _tl }
764   }
765 }
```

(End of definition for `\l__enumext_standar_ref:n` and `\l__enumext_standar_ref:`.)

13.14.2 Define and set label and ref keys for enumext* and keyans* environments

label Here we set the default $\langle labels \rangle$ for `enumext*` and `keyans*` environments, along with the default value for
ref `labelwidth` key and `ref` key.

```

\l__enumext_label_vii_tl 766 \cs_set_protected:Npn \l__enumext_tmp:nnn #1 #2 #3
\l__enumext_label_viii_tl 767 {
768   \keys_define:nn { enumext / #1 }
769   {
770     label .code:n = {
771       \__enumext_label_style:cvn { l__enumext_label_#2_tl }
772       { l__enumext_counter_#2_tl } {##1}
773       \dim_set_eq:cN { l__enumext_labelwidth_#2_dim }
774       \l__enumext_current_widest_dim
775     },
776     label .initial:n = #3,
777     label .value_required:n = true,
778     ref .code:n = \l__enumext_starred_ref:n {##1},
779     ref .value_required:n = true,
780   }
781 }
782 \l__enumext_tmp:nnn { enumext* } { vii } { \arabic*.}
783 \l__enumext_tmp:nnn { keyans* } { viii } { \Alph*.}

```

(End of definition for label and others.)

__enumext_starred_ref:n The implementation of `__enumext_starred_ref:n` is the same as that used for the environment `enumext`.
__enumext_starred_ref:

```

784 \cs_new_protected:Npn \l__enumext_starred_ref:n #1
785 {
786   \tl_set:Nn \l__enumext_ref_key_arg_tl {#1}
787   \int_compare:nNnT { \l__enumext_level_h_int } = { 1 }
788   {
789     \tl_if_empty:NTF \l__enumext_ref_key_arg_tl
790     {
791       \msg_error:nnn { enumext } { key-ref-empty } { enumext* }
792     }
793     {
794       \tl_set_eq:NN \l__enumext_ref_the_count_tl \l__enumext_counter_vii_tl
795       \__enumext_regex_counter_style:
796       \tl_set_eq:NN \l__enumext_ref_the_count_tl \l__enumext_the_counter_vii_tl
797       \tl_put_right:Ne \l__enumext_renew_the_count_vii_tl
798       {
799         \exp_not:N \renewcommand { \exp_not:V \l__enumext_ref_the_count_tl } { \exp_not:V
800       }
801     }
802   }
803   \int_compare:nNnT { \l__enumext_keyans_level_h_int } = { 1 }
804   {
805     \tl_if_empty:NTF \l__enumext_ref_key_arg_tl
806     {
807       \msg_error:nnn { enumext } { key-ref-empty } { keyans* }
808     }
809     {
810       \tl_set_eq:NN \l__enumext_ref_the_count_tl \l__enumext_counter_viii_tl
811       \__enumext_regex_counter_style:
812       \tl_set_eq:NN \l__enumext_ref_the_count_tl \l__enumext_the_counter_viii_tl
813       \tl_put_right:Ne \l__enumext_renew_the_count_viii_tl
814       {
815         \exp_not:N \renewcommand { \exp_not:V \l__enumext_ref_the_count_tl } { \exp_not:V
816       }
817     }
818   }
819 }

```

Finally the function `__enumext_starred_ref:` will execute the modification for the reference system in the second argument of the `enumext*` and `keyans*` environment definition.

```

820 \cs_new_protected:Nn \l__enumext_starred_ref:
821 {
822   \int_compare:nNnT { \l__enumext_level_h_int } = { 1 }
823   {
824     \tl_if_empty:NF \l__enumext_renew_the_count_vii_tl
825     {
826       \tl_use:N \l__enumext_renew_the_count_vii_tl

```

```

827     }
828   }
829   \int_compare:nNt { \l__enumext_keyans_level_h_int } = { 1 }
830   {
831     \tl_if_empty:NF \l__enumext_renew_the_count_viii_tl
832     {
833       \tl_use:N \l__enumext_renew_the_count_viii_tl
834     }
835   }
836 }

```

(End of definition for `__enumext_starred_ref:n` and `__enumext_starred_ref:.`)

13.14.3 Define and set label and ref keys for keyans and keyanspic environments

Here we set the default `<label>` for `keyans` and `keyanspic` environment, along with the default value for `labelwidth` if it has not been established and `ref` key. The `keyanspic` environment use the same `<label>` as the `keyans` environment.

```

\l__enumext_label_v_tl
\l__enumext_label_vi_tl
837 \keys_define:nn { enumext / keyans }
838 {
839   label .code:n = {
840     \__enumext_label_style:cvn { \l__enumext_label_v_tl }
841     { \l__enumext_counter_v_tl } {#1}
842     \__enumext_label_style:cvn { \l__enumext_label_vi_tl }
843     { \l__enumext_counter_vi_tl } {#1}
844     \dim_set_eq:NN
845     \l__enumext_labelwidth_v_dim \l__enumext_current_widest_dim
846   },
847   label .initial:n = \Alph*,
848   label .value_required:n = true,
849   ref .code:n = \__enumext_keyans_ref:n {#1},
850   ref .value_required:n = true,
851 }

```

(End of definition for `label` and others.)

The implementation of `__enumext_keyans_ref:n` is the same as that used for the environment `enumext`.

```

\__enumext_keyans_ref:n
\__enumext_keyans_ref:
852 \cs_new_protected:Npn \__enumext_keyans_ref:n #1
853 {
854   \tl_set:Nn \l__enumext_ref_key_arg_tl {#1}
855   \tl_if_empty:NTF \l__enumext_ref_key_arg_tl
856   {
857     \msg_error:nnn { enumext } { key-ref-empty } { keyans }
858   }
859   {
860     \tl_set_eq:NN \l__enumext_ref_the_count_tl \l__enumext_counter_v_tl
861     \__enumext_regex_counter_style:
862     \tl_set_eq:NN \l__enumext_ref_the_count_tl \l__enumext_the_counter_v_tl
863     \tl_put_right:Ne \l__enumext_renew_the_count_v_tl
864     {
865       \exp_not:N \renewcommand { \exp_not:V \l__enumext_ref_the_count_tl } { \exp_not:V \l__enumext_ref_key_arg_tl }
866     }
867   }
868 }

```

Finally the function `__enumext_keyans_ref:` will execute the modification for the reference system in the second argument of the `keyans*` environment definition.

```

869 \cs_new_protected:Nn \__enumext_keyans_ref:
870 {
871   \tl_if_empty:NF \l__enumext_renew_the_count_v_tl
872   {
873     \tl_use:N \l__enumext_renew_the_count_v_tl
874   }
875 }

```

(End of definition for `__enumext_keyans_ref:n` and `__enumext_keyans_ref:.`)

13.15 Setting start, start* and widest keys

```
\__enumext_start_from:NNn
\__enumext_start_from:ccn
\__enumext_start_from:cce
```

The function `__enumext_start_from:NNn` used by `start` and `start*` keys take three arguments:

```
#1: \l__enumext_label_X_tl
#2: \l__enumext_start_X_int
#3: ⟨integer or string⟩
```

The first argument of this function are the “counter style” set by `label` key, the second argument is returned by the function, the third argument can be an ⟨integer⟩ or ⟨string⟩ of the form `\Alph`, `\alph`, `\Roman` or `\roman`. This effectively allows `start=A` or `start=1` to be used.

```
876 \cs_new_protected:Npn \__enumext_start_from:NNn #1 #2 #3
877 {
878   \__enumext_if_is_int:nTF { #3 }
879   {
880     \int_set:Nn #2 {#3}
881   }
882   {
883     \regex_match:nVT { \c{Alph} | \c{alph} } {#1}
884     { \int_set:Nn #2 { \int_from_alph:n {#3} } }
885     \regex_match:nVT { \c{Roman} | \c{roman} } {#1}
886     { \int_set:Nn #2 { \int_from_roman:n {#3} } }
887   }
888 }
889 \cs_generate_variant:Nn \__enumext_start_from:NNn { ccn, cce }
```

(End of definition for `__enumext_start_from:NNn`.)

```
\__enumext_widest_from:nNNn
\__enumext_widest_from:nccn
```

The function `__enumext_widest_from:nNNn` used by the `widest` key take four arguments:

```
#1: The counter associated with the environment level
#2: \l__enumext_label_X_tl
#3: \l__enumext_labelwidth_X_dim
#4: ⟨integer or string⟩
```

The second and third arguments of this function are the values set by `label` and `labelwidth` keys, the four argument can be an ⟨integer⟩ or ⟨string⟩ of the form `\Alph`, `\alph`, `\Roman` or `\roman`. The value of the four argument is set temporarily for the identified counter in this point (level), then the value is expanded into a “box” and the “width” of the “box” is returned.

```
890 \cs_new_protected:Npn \__enumext_widest_from:nNNn #1 #2 #3 #4
891 {
892   \__enumext_if_is_int:nTF {#4}
893   {
894     \setcounter{enumX#1} { #4 }
895   }
896   {
897     \regex_match:nVT { \c{Alph} | \c{alph} } {#2}
898     { \setcounter{enumX#1} { \int_from_alph:n {#4} } }
899     \regex_match:nVT { \c{Roman} | \c{roman} } {#2}
900     { \setcounter{enumX#1} { \int_from_roman:n {#4} } }
901   }
902   \__enumext_label_width_by_box:cv
903   { \l__enumext_labelwidth_#1_dim } { \l__enumext_label_#1_tl }
904 }
905 \cs_generate_variant:Nn \__enumext_widest_from:nNNn { nccn }
```

(End of definition for `__enumext_widest_from:nNNn`.)

Now define and set `start*`, `start` and `widest` keys for `enumext`, `enumext*`, `keyans` and `keyans*` environments.

```
start
start*
widest
```

```
906 \cs_set_protected:Npn \__enumext_tmp:nn #1 #2
907 {
908   \keys_define:nn { enumext / #1 }
909   {
910     start* .code:n = {
911       \__enumext_start_from:ccn
912       { \l__enumext_label_#2_tl }
913       { \l__enumext_start_#2_int } {##1}
914     },
915     start* .value_required:n = true,
916     start .code:n = {
917       \__enumext_start_from:cce
918       { \l__enumext_label_#2_tl }
919       { \l__enumext_start_#2_int } { \int_eval:n {##1} }
```

```

920         },
921         start .initial:n = 1,
922         start .value_required:n = true,
923         widest .code:n = {
924             \__enumext_widest_from:nccn {#2}
925             { l__enumext_label_#2_tl }
926             { l__enumext_labelwidth_#2_dim } {##1}
927         },
928         widest .value_required:n = true,
929     }
930 }
931 \clist_map_inline:Nn \c__enumext_all_envs_clist { \__enumext_tmp:nn #1 }

```

(End of definition for `start`, `start*`, and `widest`.)

13.16 Setting keys for vertical spaces

Define and set `topsep`, `partopsep`, `parsep`, `itemsep`, `noitemsep` and `nosep` keys for `enumext`, `enumext*`, `keyans` and `keyans*` environments.

```

932 \cs_set_protected:Npn \__enumext_tmp:nnnnnn #1 #2 #3 #4 #5 #6
933 {
934     \keys_define:nn { enumext / #1 }
935     {
936         topsep .skip_set:c = { l__enumext_topsep_#2_skip },
937         topsep .initial:n = {#3},
938         topsep .value_required:n = true,
939         partopsep .skip_set:c = { l__enumext_partopsep_#2_skip },
940         partopsep .initial:n = {#4},
941         partopsep .value_required:n = true,
942         parsep .skip_set:c = { l__enumext_parsep_#2_skip },
943         parsep .initial:n = {#5},
944         parsep .value_required:n = true,
945         itemsep .skip_set:c = { l__enumext_itemsep_#2_skip },
946         itemsep .initial:n = {#6},
947         itemsep .value_required:n = true,
948         noitemsep .meta:n = { itemsep = 0pt, parsep = 0pt },
949         noitemsep .value_forbidden:n = true,
950         nosep .meta:n = {
951             itemsep = 0pt, parsep = 0pt,
952             topsep = 0pt, partopsep = 0pt,
953         },
954         nosep .value_forbidden:n = true,
955     }
956 }

```

Now we set the values based on standard `article` class in `10pt`.

```

957 \__enumext_tmp:nnnnnn { level-1 } { i } { 8.0pt plus 2.0pt minus 4.0pt }
958 { 2.0pt plus 1.0pt minus 1.0pt } { 4.0pt plus 2.0pt minus 1.0pt }
959 { 4.0pt plus 2.0pt minus 1.0pt }
960 \__enumext_tmp:nnnnnn { level-2 } { ii } { 4.0pt plus 2.0pt minus 1.0pt }
961 { 2.0pt plus 1.0pt minus 1.0pt } { 2.0pt plus 1.0pt minus 1.0pt }
962 { 2.0pt plus 1.0pt minus 1.0pt }
963 \__enumext_tmp:nnnnnn { level-3 } { iii } { 2.0pt plus 1.0pt minus 1.0pt }
964 { 1.0pt minus 1.0pt } { 0pt } { 2.0pt plus 1.0pt minus 1.0pt }
965 \__enumext_tmp:nnnnnn { level-4 } { iv } { 2.0pt plus 1.0pt minus 1.0pt }
966 { 1.0pt minus 1.0pt } { 0pt } { 2.0pt plus 1.0pt minus 1.0pt }
967 \__enumext_tmp:nnnnnn { keyans } { v } { 4.0pt plus 2.0pt minus 1.0pt }
968 { 2.0pt plus 1.0pt minus 1.0pt } { 2.0pt plus 1.0pt minus 1.0pt }
969 { 2.0pt plus 1.0pt minus 1.0pt }
970 \__enumext_tmp:nnnnnn { enumext* } { vii } { 8.0pt plus 2.0pt minus 4.0pt }
971 { 2.0pt plus 1.0pt minus 1.0pt } { 4.0pt plus 2.0pt minus 1.0pt }
972 { 4.0pt plus 2.0pt minus 1.0pt }
973 \__enumext_tmp:nnnnnn { keyans* } { viii } { 4.0pt plus 2.0pt minus 1.0pt }
974 { 2.0pt plus 1.0pt minus 1.0pt } { 2.0pt plus 1.0pt minus 1.0pt }
975 { 2.0pt plus 1.0pt minus 1.0pt }

```

(End of definition for `topsep` and others.)

13.17 Setting base-fix key

When nesting starting right after `\item` (without material between them) there is a problem with the alignment of the *baseline* between the two environments. One way to get around this problem is to place

`\mode_leave_vertical:` apply `\vspace{-\baselineskip}` and set `\topsep=0pt` for the “first level” of the nested `enumext` environment.

`base-fix`
`__enumext_nested_base_line_fix:`

We define the key `base-fix` only for the “first level” of `enumext` environment.

```

976 \keys_define:nn { enumext / level-1 }
977 {
978   base-fix .bool_set:N = \__enumext_base_line_fix_bool,
979   base-fix .initial:n = false,
980   base-fix .value_forbidden:n = true,
981 }

```

The function `__enumext_nested_base_line_fix:` passed to the `__enumext_parse_keys:n` function in the definition of the `enumext` environment (§13.39) will be responsible for applying the *baseline correction* and adjusting the `\keys` for the `enumext` environment and the `\printkeyans` with *starred argument* “*” (§13.47).

We will first implement the function code from the user side of the `base-fix` key, that is, only the user knows when it is necessary to apply it within the document in which case the variable `__enumext_print_keyans_star_bool` set by the `\printkeyans` command is false and the variable `__enumext_base_line_fix_bool` is true.

We set the values of the keys `topsep`, `above` and `above*` for the “first level” of `enumext` environment equal to `0pt` and finally set the variable `__enumext_base_line_fix_bool` to false.

```

982 \cs_new_protected:Nn \__enumext_nested_base_line_fix:
983 {
984   \bool_lazy_all:nT
985   {
986     { \bool_if_p:N \__enumext_starred_first_bool }
987     { \bool_if_p:N \__enumext_base_line_fix_bool }
988     { \bool_not_p:n { \__enumext_print_keyans_star_bool } }
989   }
990   {
991     \mode_leave_vertical:
992     \vspace { -\dim_eval:n { \baselineskip + \parsep } }
993     \keys_set:nn { enumext / level-1 }
994     {
995       topsep = 0pt, above = 0pt, above* = 0pt,
996     }
997   }

```

When we are running the `\printkeyans` command with the *starred argument* “*” the variable `__enumext_print_keyans_star_bool` is true and we can run a simplified version of `\vspace` using `\skip_vertical:n`.

```

998   \bool_lazy_and:nnT
999   { \bool_if_p:N \__enumext_starred_first_bool }
1000   { \bool_if_p:N \__enumext_print_keyans_star_bool }
1001   {
1002     \mode_leave_vertical:
1003     \skip_vertical:n { -\baselineskip }
1004     \skip_vertical:N \c_zero_skip
1005   }
1006   \keys_set:nn { enumext / level-1 }
1007   {
1008     topsep = 0pt, above = 0pt, above* = 0pt,
1009   }
1010   \bool_set_false:N \__enumext_base_line_fix_bool
1011 }

```

(End of definition for `base-fix` and `__enumext_nested_base_line_fix:`)

13.18 Setting keys for horizontal spaces

`itemindent`
`rightmargin`
`listparindent`
`list-offset`
`list-indent`

Define and set `itemindent`, `rightmargin`, `listparindent`, `list-offset` and `list-indent` keys for `enumext`, `enumext*`, `keyans` and `keyans*` environments.

```

1012 \cs_set_protected:Npn \__enumext_tmp:nn #1 #2
1013 {
1014   \keys_define:nn { enumext / #1 }
1015   {
1016     itemindent .dim_set:c = { \__enumext_fake_item_indent_#2_dim },
1017     itemindent .value_required:n = true,
1018     rightmargin .dim_set:c = { \__enumext_rightmargin_#2_dim },
1019     rightmargin .value_required:n = true,
1020     listparindent .dim_set:c = { \__enumext_listparindent_#2_dim },

```

```

1021     listparindent .value_required:n = true,
1022     list-offset   .dim_set:c = { l__enumext_listoffset_#2_dim },
1023     list-offset   .value_required:n = true,
1024     list-indent   .code:n      =
1025                     \bool_set_true:c { l__enumext_leftmargin_tmp_#2_bool }
1026                     \dim_set:cn { l__enumext_leftmargin_tmp_#2_dim } {##1},
1027     list-indent   .value_required:n = true,
1028   }
1029 }
1030 \clist_map_inline:nn
1031 {
1032   {level-1}{i}, {level-2}{ii}, {level-3}{iii}, {level-4}{iv}, {keyans}{v}
1033 }
1034 { \__enumext_tmp:nn #1 }

```

(End of definition for `itemindent` and others.)

For `enumext*` and `keyans*` environments the situation is a bit different, the `list-indent` key behaves like the `list-offset` key.

```

1035 \cs_set_protected:Npn \__enumext_tmp:nn #1 #2
1036 {
1037   \keys_define:nn { enumext / #1 }
1038   {
1039     itemindent .dim_set:c = { l__enumext_fake_item_indent_#2_dim },
1040     itemindent .value_required:n = true,
1041     rightmargin .dim_set:c = { l__enumext_rightmargin_#2_dim },
1042     rightmargin .value_required:n = true,
1043     listparindent .dim_set:c = { l__enumext_listparindent_#2_dim },
1044     listparindent .value_required:n = true,
1045     list-offset .dim_set:c = { l__enumext_listoffset_#2_dim },
1046     list-offset .value_required:n = true,
1047     list-indent .meta:n      = { list-offset = ##1 },
1048     list-indent .value_required:n = true,
1049   }
1050 }
1051 \clist_map_inline:nn
1052 {
1053   {enumext*}{vii}, {keyans*}{viii}
1054 }
1055 { \__enumext_tmp:nn #1 }

```

13.18.1 Functions for setting the fake `itemindent`

The `itemindent` key does not set the value of `\itemindent`, it only sets the value of the *horizontal space* applied using `\skip_horizontal:N`. We will store this value in the variable and only apply it when it is greater than `\opt`. Here I will need to place `\mode_leave_vertical:` and the plain TeX macro `\ignorespaces` to avoid unwanted extra space when using the `itemindent` key.

```

1056 \cs_set_protected:Nn \__enumext_fake_item_indent:
1057 {
1058   \dim_compare:nNnT
1059   { \dim_use:c { l__enumext_fake_item_indent_ \__enumext_level: _dim } }
1060   >
1061   { \c_zero_dim }
1062   {
1063     \tl_set:ce { l__enumext_fake_item_indent_ \__enumext_level: _tl }
1064     {
1065       \exp_not:N \mode_leave_vertical:
1066       \exp_not:n { \skip_horizontal:n }
1067       { \dim_use:c { l__enumext_fake_item_indent_ \__enumext_level: _dim } }
1068       \exp_not:N \ignorespaces
1069     }
1070   }
1071 }
1072 \cs_set_protected:Nn \__enumext_keyans_fake_item_indent:
1073 {
1074   \dim_compare:nNnT
1075   { \l__enumext_fake_item_indent_v_dim } > { \c_zero_dim }
1076   {
1077     \tl_set:Ne \l__enumext_fake_item_indent_v_tl
1078     {
1079       \exp_not:N \mode_leave_vertical:
1080       \exp_not:N \skip_horizontal:N \l__enumext_fake_item_indent_v_dim

```

```

1081         \exp_not:N \ignorespaces
1082     }
1083 }
1084 }
1085 \cs_set_protected:Nn \__enumext_fake_item_indent_vii:
1086 {
1087     \dim_compare:nNnT
1088     { \l__enumext_fake_item_indent_vii_dim } > { \c_zero_dim }
1089     {
1090         \tl_set:Nc \l__enumext_fake_item_indent_vii_tl
1091         {
1092             \exp_not:N \skip_horizontal:N \l__enumext_fake_item_indent_vii_dim
1093             \exp_not:N \ignorespaces
1094         }
1095     }
1096 }
1097 \cs_set_protected:Nn \__enumext_fake_item_indent_viii:
1098 {
1099     \dim_compare:nNnT
1100     { \l__enumext_fake_item_indent_viii_dim } > { \c_zero_dim }
1101     {
1102         \tl_set:Nc \l__enumext_fake_item_indent_viii_tl
1103         {
1104             \exp_not:N \skip_horizontal:N \l__enumext_fake_item_indent_viii_dim
1105             \exp_not:N \ignorespaces
1106         }
1107     }
1108 }

```

(End of definition for `__enumext_fake_item_indent:` and others.)

13.19 Setting show-length key

show-length

Define and set `show-length` key for `enumext`, `enumext*`, `keyans` and `keyans*` environments. The function sets the boolean variable `\l__enumext_show_length_X_bool` used in the definition of all environments to “true” and calls the function `__enumext_show_length:nnn` which prints all the values of the “vertical” and “horizontal” parameters calculated and used.

```

1109 \cs_set_protected:Npn \__enumext_tmp:nn #1 #2
1110 {
1111     \keys_define:nn { enumext / #1 }
1112     {
1113         show-length .bool_set:c = { \l__enumext_show_length_#2_bool },
1114         show-length .initial:n = false,
1115     }
1116 }
1117 \clist_map_inline:Nn \c__enumext_all_envs_clist { \__enumext_tmp:nn #1 }

```

(End of definition for `show-length`.)

13.20 Setting before, after and first keys

before

before*

after

first

Define and set `before`, `before*`, `after` and `first` keys for `enumext`, `enumext*`, `keyans` and `keyans*` environments.

```

1118 \cs_set_protected:Npn \__enumext_tmp:nn #1 #2
1119 {
1120     \keys_define:nn { enumext / #1 }
1121     {
1122         before .tl_set:c = { \l__enumext_before_no_starred_key_#2_tl },
1123         before .value_required:n = true,
1124         before* .tl_set:c = { \l__enumext_before_starred_key_#2_tl },
1125         before* .value_required:n = true,
1126         after .tl_set:c = { \l__enumext_after_stop_list_#2_tl },
1127         after .value_required:n = true,
1128         first .tl_set:c = { \l__enumext_after_list_args_#2_tl },
1129         first .value_required:n = true,
1130     }
1131 }
1132 \clist_map_inline:Nn \c__enumext_all_envs_clist { \__enumext_tmp:nn #1 }

```

(End of definition for `before` and others.)

13.20.1 Functions for before, after and first keys in enumext

The function `__enumext_before_args_exec:` executes the $\{\langle code \rangle\}$ set by the `before*` key “before” the `enumext` environment is started. The $\{\langle code \rangle\}$ is executed “without” knowing any definition of the $\{\langle arg two \rangle\}$ of the list: $\{\langle code \rangle\} \backslash list \{\langle arg one \rangle\} \{\langle arg two \rangle\}$.

```
1133 \cs_new_protected:Nn \__enumext_before_args_exec:
1134 {
1135   \tl_use:c { l__enumext_before_starred_key_ \__enumext_level: _tl }
1136 }
```

The function `__enumext_before_keys_exec:` executes the $\{\langle code \rangle\}$ set by the `before` key “before” the `enumext` environment is started in *second argument* of the list. The $\{\langle code \rangle\}$ is executed “knowing” all definition and values provides by $\langle keys \rangle$: $\backslash list \{\langle arg one \rangle\} \{\langle arg two \rangle\} \{\langle code \rangle\}$

```
1137 \cs_new_protected:Nn \__enumext_before_keys_exec:
1138 {
1139   \tl_use:c { l__enumext_before_no_starred_key_ \__enumext_level: _tl }
1140 }
```

The function `__enumext_after_stop_list:` executes the $\{\langle code \rangle\}$ set by the `after` key “after” the `enumext` environment has finished: $\backslash endlist \{\langle code \rangle\}$.

```
1141 \cs_new_protected:Nn \__enumext_after_stop_list:
1142 {
1143   \tl_use:c { l__enumext_after_stop_list_ \__enumext_level: _tl }
1144 }
```

The function `__enumext_after_args_exec:` executes the $\{\langle code \rangle\}$ set by the `first` key after the end of the second argument of the list defining the `enumext` environment, just before the first occurrence of `\item:` $\backslash list \{\langle arg one \rangle\} \{\langle arg two \rangle\} \{\langle code \rangle\} \backslash item.$

```
1145 \cs_new_protected:Nn \__enumext_after_args_exec:
1146 {
1147   \tl_use:c { l__enumext_after_list_args_ \__enumext_level: _tl }
1148 }
```

(End of definition for `__enumext_before_args_exec:` and others.)

13.20.2 Functions for before, after and first keys in keyans

Same implementation as the one used in the `enumext` environment.

```
\__enumext_before_args_exec_v:
\__enumext_before_keys_exec_v:
\__enumext_after_stop_list_v:
\__enumext_after_args_exec_v:

1149 \cs_new_protected:Nn \__enumext_before_args_exec_v:
1150 {
1151   \tl_use:N \l__enumext_before_starred_key_v_tl
1152 }
1153 \cs_new_protected:Nn \__enumext_before_keys_exec_v:
1154 {
1155   \tl_use:N \l__enumext_before_no_starred_key_v_tl
1156 }
1157 \cs_new_protected:Nn \__enumext_after_stop_list_v:
1158 {
1159   \tl_use:N \l__enumext_after_stop_list_v_tl
1160 }
1161 \cs_new_protected:Nn \__enumext_after_args_exec_v:
1162 {
1163   \tl_use:N \l__enumext_after_list_args_v_tl
1164 }
```

(End of definition for `__enumext_before_args_exec_v:` and others.)

13.20.3 Functions for before, after and first keys in enumext* and keyans*

Same implementation as the one used in the `enumext` environment.

```
\__enumext_before_args_exec_vii:
\__enumext_before_keys_exec_vii:
\__enumext_after_stop_list_vii:
\__enumext_after_args_exec_vii:

1165 \cs_new_protected:Nn \__enumext_before_args_exec_vii:
1166 {
1167   \tl_use:N \l__enumext_before_starred_key_vii_tl
1168 }
1169 \cs_new_protected:Nn \__enumext_before_args_exec_viii:
1170 {
1171   \tl_use:N \l__enumext_before_starred_key_viii_tl
1172 }
1173 \cs_new_protected:Nn \__enumext_before_keys_exec_vii:
1174 {
1175   \tl_use:N \l__enumext_before_no_starred_key_vii_tl
1176 }
1177 \cs_new_protected:Nn \__enumext_before_keys_exec_viii:
1178 {
```



```

1179     \tl_use:N \l__enumext_before_no_starred_key_viii_tl
1180   }
1181   \cs_new_protected:Nn \__enumext_after_stop_list_vii:
1182   {
1183     \tl_use:N \l__enumext_after_stop_list_vii_tl
1184   }
1185   \cs_new_protected:Nn \__enumext_after_stop_list_viii:
1186   {
1187     \tl_use:N \l__enumext_after_stop_list_viii_tl
1188   }
1189   \cs_new_protected:Nn \__enumext_after_args_exec_vii:
1190   {
1191     \tl_use:N \l__enumext_after_list_args_vii_tl
1192   }
1193   \cs_new_protected:Nn \__enumext_after_args_exec_viii:
1194   {
1195     \tl_use:N \l__enumext_after_list_args_viii_tl
1196   }

```

(End of definition for __enumext_before_args_exec_vii: and others.)

13.21 Setting keys for multicols and minipage

The default value of the `columns-sep` key is handled by the state of the boolean variable `\l__enumext_columns_sep_X_bool` which is handled in the internal definition of the `enumext` and `keyans` environments. Define and set `mini-env`, `mini-sep`, `columns-sep` and `columns` keys for `enumext`, `enumext*`, `keyans` and `keyans*` environments.

```

1197 \cs_set_protected:Npn \__enumext_tmp:nn #1 #2
1198 {
1199   \keys_define:nn { enumext / #1 }
1200   {
1201     mini-env .dim_set:c = { l__enumext_minipage_right_#2_dim },
1202     mini-env .value_required:n = true,
1203     mini-sep .dim_set:c = { l__enumext_minipage_hsep_#2_dim },
1204     mini-sep .initial:n = 0.3333em,
1205     mini-sep .value_required:n = true,
1206     columns-sep .dim_set:c = { l__enumext_columns_sep_#2_dim },
1207     columns-sep .value_required:n = true,
1208     columns .int_set:c = { l__enumext_columns_#2_int },
1209     columns .initial:n = 1,
1210     columns .value_required:n = true,
1211   }
1212 }
1213 \clist_map_inline:Nn \c__enumext_all_envs_clist { \__enumext_tmp:nn #1 }

```

For `enumext*` and `keyans*` environments the situation is a bit different, the command `\miniright` is not available, so we will add the keys `mini-right` and `mini-right*` to implement support for `minipage` environment.

```

1214 \cs_set_protected:Npn \__enumext_tmp:nn #1 #2
1215 {
1216   \keys_define:nn { enumext / #1 }
1217   {
1218     mini-right .tl_gset:c = { g__enumext_miniright_code_#2_tl },
1219     mini-right .value_required:n = true,
1220     mini-right* .code:n = {
1221       \bool_gset_true:c { g__enumext_minipage_center_#2_bool }
1222       \keys_set:nn { enumext / #1 } { mini-right = {##1} }
1223     },
1224     mini-right* .value_required:n = true,
1225   }
1226 }
1227 \clist_map_inline:nn { {enumext*}{vii}, {keyans*}{viii} } { \__enumext_tmp:nn #1 }


```

(End of definition for `mini-env` and others.)

13.22 Adjustment of vertical spaces for multicols

When nesting a “*list environment*” inside the `multicols` environment, the values of the “*vertical spaces*” are lost, basically the `multicols` environment takes control over them. Graphically it can be seen like in the figure 7.

To keep the desired spaces *above* and *below* in the “*list environment*” (`\topsep` + `[\partopsep]`) it is necessary to “*adjust*” the spaces added by the `multicols` environment. The most appropriate option in this case is to use a “*context sensitive*” vertical space with `\addvspace`.

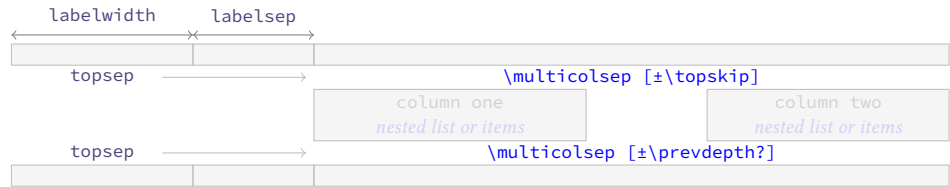Figure 7: Representation of the vertical space in `multicols` for a nested level.

I should make it clear that the implementation here is a “*bit questionable*”. At first glance doing `\multicolsep=\topsep` seemed right, but the results were not always as expected. An almost *imperceptible* detail is that in some cases the `\itemsep` values are “*stretched*”, possibly due to the use of `\raggedcolumns` and this affects the lower space when closing the environment, which is “*smaller*” than expected. My attempts to find the correct values using `\showoutput` and `\showboxdepth` absolutely failed.

13.22.1 Adjustment of vertical spaces for multicols in enumext

`__enumext_multi_set_vskip:` The function `__enumext_multi_set_vskip:` will take care of determining the “*adjusted spaces*” that we will apply “*above*” and “*below*” the `multicols` environment in `enumext`.

We will set the default values taking into account that \TeX is in *horizontal mode*, then we will make the settings for the *vertical mode* in which `\partopsep` comes into play.

Set the values of `\l__enumext_multicols_above_X_skip` and `\l__enumext_multicols_below_X_skip` equal to the value of `\topsep` in the *current level*.

```

1228 \cs_new_protected:Nn \__enumext_multi_set_vskip:
1229 {
1230   \skip_set:cn { \l__enumext_multicols_above_ \__enumext_level: _skip }
1231   {
1232     \skip_use:c { \l__enumext_topsep_ \__enumext_level: _skip }
1233   }
1234   \skip_set:cn { \l__enumext_multicols_below_ \__enumext_level: _skip }
1235   {
1236     \skip_use:c { \l__enumext_topsep_ \__enumext_level: _skip }
1237   }
1238   \__enumext_add_pre_parsep:
1239 }

```

(End of definition for `__enumext_multi_set_vskip:`)

`__enumext_add_pre_parsep:` The function `__enumext_add_pre_parsep:` “*adjusted*” the value of `\l__enumext_multicols_above_X_skip` detecting the value of `\parsep` from the previous level. This is necessary since `\parsep` from the previous level affects the *vertical spaces*.

```

1240 \cs_new_protected:Nn \__enumext_add_pre_parsep:
1241 {
1242   \int_case:nn { \l__enumext_level_int }
1243   {
1244     { 2 }{
1245       \skip_if_eq:nnF { \l__enumext_parsep_i_skip } { \c_zero_skip }
1246       {
1247         \skip_add:Nn \l__enumext_multicols_above_ii_skip
1248         {
1249           \l__enumext_parsep_i_skip
1250         }
1251       }
1252     }
1253     { 3 }{
1254       \skip_if_eq:nnF { \l__enumext_parsep_ii_skip } { \c_zero_skip }
1255       {
1256         \skip_add:Nn \l__enumext_multicols_above_iii_skip
1257         {
1258           \l__enumext_parsep_ii_skip
1259         }
1260       }
1261     }
1262     { 4 }{
1263       \skip_if_eq:nnF { \l__enumext_parsep_iii_skip } { \c_zero_skip }
1264       {
1265         \skip_add:Nn \l__enumext_multicols_above_iv_skip
1266         {
1267           \l__enumext_parsep_iii_skip
1268         }
1269       }
1270     }
1271   }

```

```

1269         }
1270     }
1271 }
1272 }

```

(End of definition for `__enumext_add_pre_parse:`)

`__enumext_multi_addvspace:` The function `__enumext_multi_addvspace:` will apply the spaces set using `\addvspace` “above” the `multicols` environment in `enumext`, taking into account whether \TeX is in $\langle horizontal\ mode \rangle$ or $\langle vertical\ mode \rangle$.

```

1273 \cs_new_protected:Nn \__enumext_multi_addvspace:
1274 {
1275     \__enumext_multi_set_vskip:
1276     \mode_if_vertical:T
1277     {
1278         \skip_add:cn { l__enumext_multicols_above_ \__enumext_level: _skip }
1279         {
1280             \skip_use:c { l__enumext_partopsep_ \__enumext_level: _skip }
1281         }
1282         \skip_add:cn { l__enumext_multicols_below_ \__enumext_level: _skip }
1283         {
1284             \skip_use:c { l__enumext_partopsep_ \__enumext_level: _skip }
1285         }
1286     }
1287     \par\nopagebreak
1288     \addvspace{ \skip_use:c { l__enumext_multicols_above_ \__enumext_level: _skip } }
1289 }

```

(End of definition for `__enumext_multi_addvspace:`)

13.22.2 Adjustment of vertical spaces for multicols in keyans

`__enumext_keyans_multi_set_vskip:` The function `__enumext_keyans_multi_set_vskip:` will take care of determining the “adjusted spaces” that we will apply “above” and “below” the `multicols` environment in `keyans`. The implementation of this function is the same as the one used in `enumext`.

`__enumext_keyans_multi_addvspace:`

```

1290 \cs_new_protected:Nn \__enumext_keyans_multi_set_vskip:
1291 {
1292     \skip_set:Nn \l__enumext_multicols_above_v_skip
1293     {
1294         \l__enumext_topsep_v_skip
1295     }
1296     \skip_set:Nn \l__enumext_multicols_below_v_skip
1297     {
1298         \l__enumext_topsep_v_skip
1299     }
1300 }
1301 \cs_new_protected:Nn \__enumext_keyans_multi_addvspace:
1302 {
1303     \__enumext_keyans_multi_set_vskip:
1304     \mode_if_vertical:T
1305     {
1306         \skip_add:Nn \l__enumext_multicols_above_v_skip
1307         {
1308             \skip_use:N \l__enumext_partopsep_v_skip
1309         }
1310         \skip_add:Nn \l__enumext_multicols_below_v_skip
1311         {
1312             \skip_use:N \l__enumext_partopsep_v_skip
1313         }
1314     }
1315     \par\nopagebreak
1316     \addvspace{ \l__enumext_multicols_above_v_skip }
1317 }

```

(End of definition for `__enumext_keyans_multi_set_vskip:` and `__enumext_keyans_multi_addvspace:`)

13.23 Adjustment of vertical spaces for minipage

When nesting a “list environment” within the `minipage` environment, the values of the “vertical spaces” are lost. Graphically it can be seen like in the figure 8.

Since we want to keep the “left” and “right” environments “aligned on top”, preserving the `\baselineskip` and keep the desired “spaces” (`\topsep` + `[\partopsep]`) it is necessary to “adjust” the “vertical spaces” for `minipage` environments.

Figure 8: Representation of the `minipage` spacing adjustment for a nested level.

Here there are several complications that we must circumvent, the `minipage` environment eliminates the “top” spaces, the `multicols` environment can be nested in the `minipage` environment, the “top” and “bottom” spaces are affected when `topsep=0pt` and to this is added the `\partopsep` parameter that comes into action according to whether \TeX is in $\langle horizontal\ mode \rangle$ or $\langle vertical\ mode \rangle$. Depending on these cases, small adjustments must be made using `\vspace` and `\addvspace` to obtain the “desired vertical spacing”.

Again I must make clear that the implementation here is a “bit questionable”, but hunting the spaces (`glue`) produced by the `minipage` environment is quite complicated, even more if `multicols` is nested. The setting of the values was more “trial and error” (aprox to `\strutbox`), using the help of the `lua-visual-debug`[14] package, again my attempts to find the correct values using `\showoutput` and `\showboxdepth` absolutely failed.

13.23.1 Adjustment of vertical spaces for minipage in enumext

The function `__enumext_minipage_set_skip:` will take care of determining the “adjust” spaces that we will apply “above” and “below” the `__enumext_mini_page` environment in `enumext`.

First we will set the value of `\l__enumext_minipage_right_skip` equal to `\topsep`, then we will see if \TeX is in $\langle vertical\ mode \rangle$ and we will add `\partopsep`, followed by that we set the value of `\l__enumext_minipage_after_skip`.

```

1318 \cs_new_protected:Nn \__enumext_minipage_set_skip:
1319 {
1320   \skip_set:Nn \l__enumext_minipage_right_skip
1321   {
1322     \skip_use:c { \l__enumext_topsep_ \__enumext_level: _skip }
1323   }
1324   \mode_if_vertical:T
1325   {
1326     \skip_add:Nn \l__enumext_minipage_right_skip
1327     {
1328       \skip_use:c { \l__enumext_partopsep_ \__enumext_level: _skip }
1329     }
1330   }
1331   \skip_set_eq:NN \l__enumext_minipage_after_skip \l__enumext_minipage_right_skip

```

We will adjust the values `\l__enumext_multicols_above_X_skip` and `\l__enumext_multicols_below_X_skip` and call the function `__enumext_pre_itemsep_skip:`.

```

1332   \skip_set_eq:cN
1333   { \l__enumext_multicols_above_ \__enumext_level: _skip } \l__enumext_minipage_right_skip
1334   \skip_set_eq:cN
1335   { \l__enumext_multicols_below_ \__enumext_level: _skip } \l__enumext_minipage_right_skip
1336   \__enumext_pre_itemsep_skip:

```

If the environment `multicols` is active, we set `\topskip=0pt` and then we make `\multicolsep` have the same value as `\l__enumext_multicols_above_X_skip`.

```

1337   \int_compare:nNnT
1338   { \int_use:c { \l__enumext_columns_ \__enumext_level: _int } } > { 1 }
1339   {
1340     \skip_zero:N \topskip
1341     \skip_set_eq:Nc \multicolsep { \l__enumext_multicols_above_ \__enumext_level: _skip }
1342   }
1343 }

```

The function `__enumext_minipage_add_space:` will apply the spaces on the “left side” using `\addvspace` “above” the `__enumext_mini_page` environment, taking into account whether \TeX is in $\langle horizontal\ mode \rangle$ or $\langle vertical\ mode \rangle$. Here we use the plain \TeX macro `\nointerlineskip` to prevent baseline “glue” being added between the next pair of boxes in a *vertical list*. For the latter we will make some adjustments since the `\partopsep` parameter comes into play and this affects the *vertical spacing*.

```

1344 \cs_new_protected:Nn \__enumext_minipage_add_space:
1345 {
1346   \__enumext_minipage_set_skip:
1347   \__enumext_unskip_unkern:
1348   \mode_if_vertical:TF
1349   {
1350     \nopagebreak\nointerlineskip

```

```

1351     }
1352     {
1353         \par\nopagebreak\nointerlineskip
1354         \skip_zero:c { \l__enumext_partopsep_ \l__enumext_level: \_skip }
1355     }
1356     \int_compare:nNnTF
1357     { \int_use:c { \l__enumext_columns_ \l__enumext_level: \_int } } > { 1 }
1358     {
1359         \addvspace{ 0.445\box_ht:N \strutbox }
1360     }
1361     {
1362         \addvspace{ 0.250\box_ht:N \strutbox }
1363     }
1364 }

```

(End of definition for \l__enumext_minipage_set_skip: and \l__enumext_minipage_add_space:.)

\l__enumext_pre_itemsep_skip: The function \l__enumext_pre_itemsep_skip: will adjust the spaces below the environment `minipage` and the environment `multicols` if it is nested in it, taking into account the value of `\itemsep` from the previous level.

```

1365 \cs_new_protected:Nn \l__enumext_pre_itemsep_skip:
1366 {
1367     \int_case:nn { \l__enumext_level_int }
1368     {
1369         { 2 }{
1370             \skip_if_eq:nnTF
1371             { \l__enumext_itemsep_i_skip } { \l__enumext_minipage_after_skip }
1372             {
1373                 \skip_set:Nn \l__enumext_minipage_after_skip { 0.150\box_ht:N \strutbox }
1374                 \skip_set:Nn \l__enumext_multicols_below_ii_skip { 0.350\box_ht:N \strutbox }
1375             }
1376             {
1377                 \dim_compare:nNnT
1378                 { \l__enumext_itemsep_i_skip } < { \l__enumext_minipage_after_skip }
1379                 {
1380                     \skip_sub:Nn
1381                     \l__enumext_minipage_after_skip { \l__enumext_itemsep_i_skip }
1382                     \skip_sub:Nn
1383                     \l__enumext_multicols_below_ii_skip { \l__enumext_itemsep_i_skip }
1384                     \skip_add:Nn
1385                     \l__enumext_minipage_after_skip { 0.150\box_ht:N \strutbox }
1386                     \skip_add:Nn
1387                     \l__enumext_multicols_below_ii_skip { 0.350\box_ht:N \strutbox }
1388                 }
1389                 \dim_compare:nNnT
1390                 { \l__enumext_itemsep_i_skip } > { \l__enumext_minipage_after_skip }
1391                 {
1392                     \skip_set:Nn \l__enumext_minipage_temp_skip
1393                     {
1394                         \l__enumext_itemsep_i_skip - \l__enumext_minipage_after_skip
1395                     }
1396                     \skip_sub:Nn
1397                     \l__enumext_minipage_after_skip { \l__enumext_itemsep_i_skip }
1398                     \skip_sub:Nn
1399                     \l__enumext_multicols_below_ii_skip { \l__enumext_itemsep_i_skip }
1400                     \skip_add:Nn
1401                     \l__enumext_minipage_after_skip
1402                     { 0.150\box_ht:N \strutbox + \l__enumext_minipage_temp_skip }
1403                     \skip_add:Nn
1404                     \l__enumext_multicols_below_ii_skip
1405                     { 0.350\box_ht:N \strutbox + \l__enumext_minipage_temp_skip }
1406                 }
1407             }
1408         }
1409         { 3 }{
1410             \skip_if_eq:nnTF
1411             { \l__enumext_itemsep_ii_skip } { \c_zero_skip }
1412             {
1413                 \skip_set:Nn \l__enumext_minipage_after_skip { 0.150\box_ht:N \strutbox }
1414                 \skip_set:Nn \l__enumext_multicols_below_iii_skip { 0.350\box_ht:N \strutbox }
1415             }

```

```

1416 {
1417     \dim_compare:nNnT
1418     { \l__enumext_itemsep_ii_skip } < { \l__enumext_minipage_after_skip }
1419     {
1420         \skip_sub:Nn
1421         \l__enumext_minipage_after_skip { \l__enumext_itemsep_ii_skip }
1422         \skip_sub:Nn
1423         \l__enumext_multicols_below_iii_skip { \l__enumext_itemsep_ii_skip }
1424         \skip_add:Nn
1425         \l__enumext_minipage_after_skip { 0.150\box_ht:N \strutbox }
1426         \skip_add:Nn
1427         \l__enumext_multicols_below_iii_skip { 0.350\box_ht:N \strutbox }
1428     }
1429     \dim_compare:nNnT
1430     { \l__enumext_itemsep_ii_skip } > { \l__enumext_minipage_after_skip }
1431     {
1432         \skip_set:Nn \l__enumext_minipage_temp_skip
1433         {
1434             \l__enumext_itemsep_ii_skip - \l__enumext_minipage_after_skip
1435         }
1436         \skip_sub:Nn
1437         \l__enumext_minipage_after_skip { \l__enumext_itemsep_ii_skip }
1438         \skip_sub:Nn
1439         \l__enumext_multicols_below_iii_skip { \l__enumext_itemsep_ii_skip }
1440         \skip_add:Nn
1441         \l__enumext_minipage_after_skip
1442         { 0.150\box_ht:N \strutbox + \l__enumext_minipage_temp_skip }
1443         \skip_add:Nn
1444         \l__enumext_multicols_below_iii_skip
1445         { 0.350\box_ht:N \strutbox + \l__enumext_minipage_temp_skip }
1446     }
1447 }
1448 }
1449 { 4 }{
1450     \skip_if_eq:nnTF { \l__enumext_itemsep_iii_skip } { \c_zero_skip }
1451     {
1452         \skip_set:Nn \l__enumext_minipage_after_skip { 0.150\box_ht:N \strutbox }
1453         \skip_set:Nn \l__enumext_multicols_below_iv_skip { 0.350\box_ht:N \strutbox }
1454     }
1455     {
1456         \dim_compare:nNnT
1457         { \l__enumext_itemsep_iii_skip } < { \l__enumext_minipage_after_skip }
1458         {
1459             \skip_sub:Nn
1460             \l__enumext_minipage_after_skip { \l__enumext_itemsep_iii_skip }
1461             \skip_sub:Nn
1462             \l__enumext_multicols_below_iv_skip { \l__enumext_itemsep_iii_skip }
1463             \skip_add:Nn
1464             \l__enumext_minipage_after_skip { 0.150\box_ht:N \strutbox }
1465             \skip_add:Nn
1466             \l__enumext_multicols_below_iv_skip { 0.350\box_ht:N \strutbox }
1467         }
1468         \dim_compare:nNnT
1469         { \l__enumext_itemsep_iii_skip } > { \l__enumext_minipage_after_skip }
1470         {
1471             \skip_set:Nn \l__enumext_minipage_temp_skip
1472             {
1473                 \l__enumext_itemsep_iii_skip - \l__enumext_minipage_after_skip
1474             }
1475             \skip_sub:Nn
1476             \l__enumext_minipage_after_skip { \l__enumext_itemsep_iii_skip }
1477             \skip_sub:Nn
1478             \l__enumext_multicols_below_iv_skip { \l__enumext_itemsep_iii_skip }
1479             \skip_add:Nn
1480             \l__enumext_minipage_after_skip
1481             { 0.150\box_ht:N \strutbox + \l__enumext_minipage_temp_skip }
1482             \skip_add:Nn
1483             \l__enumext_multicols_below_iv_skip
1484             { 0.350\box_ht:N \strutbox + \l__enumext_minipage_temp_skip }
1485         }
1486     }

```



```

1487         }
1488     }
1489 }

```

(End of definition for `__enumext_pre_itemsep_skip:`)

13.23.2 Adjustment of vertical spaces for minipage in keyans

The function `__enumext_keyans_mini_set_vskip:` will take care of determining the “adjusted” spaces that we will apply “above” and “below” the `__enumext_mini_page` environment in [keyans](#). The implementation of this function is the same as the one used in [enumext](#).

```

1490 \cs_new_protected:Nn \__enumext_keyans_minipage_set_skip:
1491 {
1492     \skip_zero:N \l__enumext_minipage_after_skip
1493     \skip_zero:N \l__enumext_minipage_left_skip
1494     \skip_zero:N \l__enumext_minipage_right_skip
1495     \skip_set:Nn \l__enumext_minipage_right_skip
1496     {
1497         \l__enumext_topsep_v_skip
1498     }
1499     \mode_if_vertical:T
1500     {
1501         \skip_add:Nn \l__enumext_minipage_right_skip
1502         {
1503             \l__enumext_partopsep_v_skip
1504         }
1505     }
1506     \skip_set_eq:NN \l__enumext_minipage_after_skip \l__enumext_minipage_right_skip
1507     \skip_set_eq:NN \l__enumext_multicols_above_v_skip \l__enumext_minipage_right_skip
1508     \skip_set_eq:NN \l__enumext_multicols_below_v_skip \l__enumext_minipage_right_skip
1509     \__enumext_keyans_pre_itemsep_skip:
1510     \int_compare:nNnT { \l__enumext_columns_v_int } > { 1 }
1511     {
1512         \skip_zero:N \topskip
1513         \skip_set_eq:NN \multicolsep \l__enumext_minipage_right_skip
1514     }
1515 }
1516 \cs_new_protected:Nn \__enumext_keyans_minipage_add_space:
1517 {
1518     \__enumext_keyans_minipage_set_skip:
1519     \__enumext_unskip_unkern:
1520     \mode_if_vertical:TF
1521     {
1522         \nopagebreak\nointerlineskip
1523     }
1524     {
1525         \par\nopagebreak\nointerlineskip
1526         \skip_zero:N \l__enumext_partopsep_v_skip
1527     }
1528     \int_compare:nNnTF { \l__enumext_columns_v_int } > { 1 }
1529     {
1530         \addvspace{ 0.445\box_ht:N \strutbox }
1531     }
1532     {
1533         \addvspace{ 0.250\box_ht:N \strutbox }
1534     }
1535 }
1536 \cs_new_protected:Nn \__enumext_keyans_pre_itemsep_skip:
1537 {
1538     \skip_if_eq:nnTF
1539     { \l__enumext_itemsep_i_skip } { \l__enumext_minipage_after_skip }
1540     {
1541         \skip_set:Nn \l__enumext_minipage_after_skip { 0.150\box_ht:N \strutbox }
1542         \skip_set:Nn \l__enumext_multicols_below_v_skip { 0.350\box_ht:N \strutbox }
1543     }
1544     {
1545         \dim_compare:nNnT
1546         { \l__enumext_itemsep_i_skip } < { \l__enumext_minipage_after_skip }
1547         {
1548             \skip_sub:Nn \l__enumext_minipage_after_skip { \l__enumext_itemsep_i_skip }
1549             \skip_sub:Nn \l__enumext_multicols_below_v_skip { \l__enumext_itemsep_i_skip }
1550             \skip_add:Nn \l__enumext_minipage_after_skip { 0.150\box_ht:N \strutbox }

```

```

1551         \skip_add:Nn \l__enumext_multicols_below_v_skip { 0.350\box_ht:N \strutbox }
1552     }
1553 \dim_compare:nNnT
1554 { \l__enumext_itemsep_i_skip } > { \l__enumext_minipage_after_skip }
1555 {
1556     \skip_set:Nn \l__enumext_minipage_temp_skip
1557     {
1558         \l__enumext_itemsep_i_skip - \l__enumext_minipage_after_skip
1559     }
1560     \skip_sub:Nn \l__enumext_minipage_after_skip { \l__enumext_itemsep_i_skip }
1561     \skip_sub:Nn \l__enumext_multicols_below_v_skip { \l__enumext_itemsep_i_skip }
1562     \skip_add:Nn \l__enumext_minipage_after_skip
1563     { 0.150\box_ht:N \strutbox + \l__enumext_minipage_temp_skip }
1564     \skip_add:Nn \l__enumext_multicols_below_v_skip
1565     { 0.350\box_ht:N \strutbox + \l__enumext_minipage_temp_skip }
1566 }
1567 }
1568 }

```

(End of definition for `__enumext_keyans_minipage_set_skip:`, `__enumext_keyans_minipage_add_space:`, and `__enumext_keyans_pre_itemsep_skip:`.)

13.23.3 Adjustment of vertical spaces for minipage in enumext* and keyans*

`__enumext_mini_set_vskip_vii:`
`__enumext_mini_set_vskip_viii:`

The functions `__enumext_mini_set_vskip_vii:` and `__enumext_mini_set_vskip_viii:` will take care of determining the “adjusted” spaces that we will apply “above” and “below” the `__enumext_mini_page` environment in `enumext*` and `keyans*`.

```

1569 \cs_new_protected:Nn \__enumext_mini_set_vskip_vii:
1570 {
1571     \skip_zero_new:N \l__enumext_minipage_left_skip
1572     \skip_gzero_new:N \g__enumext_minipage_right_skip
1573     \skip_gzero_new:N \g__enumext_minipage_after_skip
1574     \skip_if_eq:nnTF { \l__enumext_topsep_vii_skip } { \c_zero_skip }
1575     {
1576         \skip_set:Nn \l__enumext_minipage_left_skip { 0.5\box_dp:N \strutbox }
1577         \skip_gset:Nn \g__enumext_minipage_right_skip { 0.325\box_dp:N \strutbox }
1578     }
1579     {
1580         \skip_set:Nn \l__enumext_minipage_left_skip { 0.5875\box_dp:N \strutbox }
1581         \skip_gset:Nn \g__enumext_minipage_right_skip
1582         {
1583             \l__enumext_topsep_vii_skip
1584         }
1585         \skip_gset:Nn \g__enumext_minipage_after_skip
1586         {
1587             0.325\box_dp:N \strutbox + \l__enumext_topsep_vii_skip
1588         }
1589     }
1590 }
1591 \cs_new_protected:Nn \__enumext_mini_set_vskip_viii:
1592 {
1593     \skip_zero_new:N \l__enumext_minipage_after_skip
1594     \skip_zero_new:N \l__enumext_minipage_left_skip
1595     \skip_zero_new:N \l__enumext_minipage_right_skip
1596     \skip_if_eq:nnTF { \l__enumext_topsep_viii_skip } { \c_zero_skip }
1597     {
1598         \skip_set:Nn \l__enumext_minipage_left_skip
1599         {
1600             0.5\box_dp:N \strutbox
1601         }
1602         \skip_set:Nn \l__enumext_minipage_right_skip
1603         {
1604             \l__enumext_partopsep_viii_skip
1605         }
1606         \skip_set:Nn \l__enumext_minipage_after_skip
1607         {
1608             1.6\box_dp:N \strutbox
1609         }
1610     }
1611     {
1612         \skip_set:Nn \l__enumext_minipage_left_skip
1613         {

```

```

1614         0.5875\box_dp:N \strutbox
1615     }
1616     \skip_set:Nn \l__enumext_minipage_right_skip
1617     {
1618         \l__enumext_topsep_viii_skip
1619     }
1620     \skip_set:Nn \l__enumext_minipage_after_skip
1621     {
1622         0.325\box_dp:N \strutbox + \l__enumext_topsep_viii_skip
1623     }
1624 }
1625 }

```

(End of definition for `__enumext_mini_set_vskip_vii:` and `__enumext_mini_set_vskip_viii:`.)

`__enumext_mini_addvspace_vii:`
`__enumext_mini_addvspace_viii:`

The functions `__enumext_mini_addvspace_vii:` and `__enumext_mini_addvspace_viii:` will apply the vertical space “only above” the `__enumext_mini_page` environment on the *left side* when the `mini-right` key is active in the `enumext*` and `keyans*` environments.

Here we will NOT take into account whether T_EX is in *(horizontal mode)* or *(vertical mode)*, since `\partopsep` is equal to `0pt` in both environments.

```

1626 \cs_new_protected:Nn \__enumext_mini_addvspace_vii:
1627 {
1628     \__enumext_mini_set_vskip_vii:
1629     \par\nopagebreak
1630     \addvspace { \l__enumext_minipage_left_skip }
1631 }
1632 \cs_new_protected:Nn \__enumext_mini_addvspace_viii:
1633 {
1634     \__enumext_mini_set_vskip_viii:
1635     \par\nopagebreak
1636     \addvspace { \l__enumext_minipage_left_skip }
1637 }

```

(End of definition for `__enumext_mini_addvspace_vii:` and `__enumext_mini_addvspace_viii:`.)

13.23.4 The command `\miniright`

The command `\miniright` will close the `__enumext_mini_page` environment on the “left side”, open the `__enumext_mini_page` environment on the “right side” adding the *adjusted vertical space*. By default we will add `\centering` when starting the “right side” environment. The *starred argument* ‘*’ inhibits the use of `\centering` command i.e. the usual L^AT_EX justification is maintained in the `__enumext_mini_page` on the “right side”.

`\miniright`

First we will perform some checks to prevent the command from being executed outside the `enumext` environment or somewhere inappropriate then we will call the internal functions to execute it in the `enumext` and `keyans` environments.

```

1638 \NewDocumentCommand \miniright { s }
1639 {
1640     \int_compare:nNt { \l__enumext_keyans_pic_level_int } = { 1 }
1641     {
1642         \msg_error:nnn { enumext } { wrong-miniright-place }
1643     }
1644     % outside
1645     \bool_lazy_and:nnT
1646     { \int_compare_p:nNn { \l__enumext_level_int } = { 0 } }
1647     { \int_compare_p:nNn { \l__enumext_level_h_int } = { 0 } }
1648     {
1649         \msg_error:nnn { enumext } { wrong-miniright-place }
1650     }
1651     % starred env
1652     \bool_lazy_and:nnT
1653     { \bool_if_p:N \g__enumext_starred_bool }
1654     { \bool_not_p:n { \l__enumext_standar_bool } }
1655     {
1656         \msg_error:nnn { enumext } { wrong-miniright-starred }
1657     }
1658     % exec
1659     \int_compare:nNtF { \l__enumext_keyans_level_int } = { 1 }
1660     {
1661         \__enumext_keyans_mini_right_cmd:n {#1}
1662     }

```

```

1663     { \__enumext_mini_right_cmd:n {#1} }
1664 }

```

(End of definition for `\miniright`. This function is documented on page 11.)

`__enumext_mini_right_cmd:n`

The function `__enumext_mini_right_cmd:n` takes as argument the *starred* ‘`*`’ of the `\miniright` command in the `enumext` environment. We check if the `mini-env` key is active via the variable `\l__enumext_minipage_right_X_dim`, if so we close the `multicols` environment with the `__enumext_mini_page` environment on the “left side”, then we open the `__enumext_mini_page` environment on the “right side”, apply our adjusted “vertical spaces”, followed by adding the `\centering` command when the *starred argument* ‘`*`’ is not present and set zero `\g__enumext_minipage_stat_int`, otherwise we return an error.

```

1665 \cs_new_protected:Npn \__enumext_mini_right_cmd:n #1
1666 {
1667     \dim_compare:nNnTF
1668     { \dim_use:c { \l__enumext_minipage_right_ \__enumext_level: _dim } } > { \c_zero_dim }
1669     {
1670         \__enumext_multicols_stop:
1671         \int_compare:nNnT
1672         { \int_use:c { \l__enumext_columns_ \__enumext_level: _int } } = { 1 }
1673         {
1674             \par\addvspace{ \l__enumext_minipage_after_skip }
1675         }
1676         \end__enumext_mini_page
1677         \hfill
1678         \__enumext_mini_page{ \dim_use:c { \l__enumext_minipage_right_ \__enumext_level: _dim } }
1679         \par\nointerlineskip
1680         \addvspace { \l__enumext_minipage_right_skip }
1681         \bool_if:nF {#1}
1682         {
1683             \centering
1684         }
1685         \int_gzero:N \g__enumext_minipage_stat_int
1686     }
1687     { \msg_error:nnn { enumext } { wrong-miniright-use } }
1688     % paranoia
1689     \RenewDocumentCommand \miniright { s }
1690     {
1691         \msg_error:nn { enumext } { many-miniright-used }
1692     }
1693 }

```

(End of definition for `__enumext_mini_right_cmd:n`.)

`__enumext_keyans_mini_right_cmd:n`

The function `__enumext_keyans_mini_right_cmd:n` takes as argument the *starred* ‘`*`’ of the `\miniright` command in the `keyans` environment. The implementation of this function is the same as that of the `__enumext_mini_right_cmd:n` function of the `enumext` environment.

```

1694 \cs_new_protected:Npn \__enumext_keyans_mini_right_cmd:n #1
1695 {
1696     \dim_compare:nNnTF { \l__enumext_minipage_right_v_dim } > { \c_zero_dim }
1697     {
1698         \__enumext_keyans_multicols_stop:
1699         \int_compare:nNnT { \l__enumext_columns_v_int } = { 1 }
1700         {
1701             \par\addvspace{ \l__enumext_minipage_after_skip }
1702         }
1703         \end__enumext_mini_page
1704         \hfill
1705         \__enumext_mini_page{ \l__enumext_minipage_right_v_dim }
1706         \par\nointerlineskip
1707         \addvspace { \l__enumext_minipage_right_skip }
1708         \bool_if:nF {#1}
1709         {
1710             \centering
1711         }
1712         \int_gzero:N \g__enumext_minipage_stat_int
1713     }
1714     { \msg_error:nnn { enumext } { wrong-miniright-use } }
1715     % paranoia
1716     \RenewDocumentCommand \miniright { s }
1717     {
1718         \msg_error:nn { enumext } { many-miniright-used }
1719     }

```

```

1719     }
1720 }

```

(End of definition for `__enumext_keyans_mini_right_cmd:n`.)

13.24 Setting above and below keys

While having controlled the *vertical spaces* within the `enumext` and `keyans` environments when using the `columns` or `mini-env` keys, sometimes the “vertical spaces above” or “vertical spaces below” the environments are not as expected and it is necessary to be able to apply a “fine correction” to these. As I have not been able to correct these *glitches*, the best option is to leave a couple of `(keys)` dedicated to this purpose, in this case it is best to use `\vspace` or `\vspace*` when convenient.

Define `above`, `above*`, `below` and `below*` keys for `enumext` and `keyans` environments.

```

above* 1721 \cs_set_protected:Npn \__enumext_tmp:nn #1 #2
below 1722 {
below* 1723 \keys_define:nn { enumext / #1 }
1724 {
1725     above .skip_set:c = { \__enumext_vspace_above_#2_skip },
1726     above .value_required:n = true,
1727     above* .code:n = \bool_set_true:c { \__enumext_vspace_a_star_#2_bool }
1728             \keys_set:nn { enumext / #1 } { above = {##1} },
1729     above* .value_required:n = true,
1730     below .skip_set:c = { \__enumext_vspace_below_#2_skip },
1731     below .value_required:n = true,
1732     below* .code:n = \bool_set_true:c { \__enumext_vspace_b_star_#2_bool }
1733             \keys_set:nn { enumext / #1 } { below = {##1} },
1734     below* .value_required:n = true,
1735 }
1736 }
1737 \clist_map_inline:Nn \c__enumext_all_envs_clist { \__enumext_tmp:nn #1 }

```

(End of definition for `above` and others.)

13.24.1 Functions for above and below keys in enumext

`__enumext_vspace_above:` The function `__enumext_vspace_above:` apply the *vertical space above* the `enumext` environment set by the `above*` and `above` keys.

```

1738 \cs_new_protected:Nn \__enumext_vspace_above:
1739 {
1740     \skip_if_eq:nnF
1741     { \skip_use:c { \__enumext_vspace_above_ \__enumext_level: _skip } } { \c_zero_skip }
1742     {
1743         \bool_if:cTF { \__enumext_vspace_a_star_ \__enumext_level: _bool }
1744         {
1745             \vspace*{ \skip_use:c { \__enumext_vspace_above_ \__enumext_level: _skip } }
1746         }
1747         {
1748             \vspace { \skip_use:c { \__enumext_vspace_above_ \__enumext_level: _skip } }
1749         }
1750     }
1751 }

```

(End of definition for `__enumext_vspace_above:`.)

`__enumext_vspace_below:` The function `__enumext_vspace_below:` apply the *vertical space below* the `enumext` environment set by the `below*` and `below` keys.

```

1752 \cs_new_protected:Nn \__enumext_vspace_below:
1753 {
1754     \skip_if_eq:nnF
1755     { \skip_use:c { \__enumext_vspace_below_ \__enumext_level: _skip } } { \c_zero_skip }
1756     {
1757         \bool_if:cTF { \__enumext_vspace_b_star_ \__enumext_level: _bool }
1758         {
1759             \vspace*{ \skip_use:c { \__enumext_vspace_below_ \__enumext_level: _skip } }
1760         }
1761         {
1762             \vspace { \skip_use:c { \__enumext_vspace_below_ \__enumext_level: _skip } }
1763         }
1764     }
1765 }

```

(End of definition for `__enumext_vspace_below:`.)

13.24.2 Functions for above and below keys in keyans

`__enumext_vspace_above_v:`

The function `__enumext_vspace_above_v:` apply the *vertical space above* the **keyans** environment set by the **above*** and **above*** keys.

```

1766 \cs_new_protected:Nn \__enumext_vspace_above_v:
1767 {
1768   \skip_if_eq:nnF { \l__enumext_vspace_above_v_skip } { \c_zero_skip }
1769   {
1770     \bool_if:NTF \l__enumext_vspace_a_star_v_bool
1771     {
1772       \vspace*{ \l__enumext_vspace_above_v_skip }
1773     }
1774     { \vspace { \l__enumext_vspace_above_v_skip } }
1775   }
1776 }

```

(End of definition for `__enumext_vspace_above_v:`.)

`__enumext_vspace_below_v:`

The function `__enumext_vspace_below_v:` apply the *vertical space below* the **keyans** environment set by the **below*** and **below** keys.

```

1777 \cs_new_protected:Nn \__enumext_vspace_below_v:
1778 {
1779   \skip_if_eq:nnF { \l__enumext_vspace_below_v_skip } { \c_zero_skip }
1780   {
1781     \bool_if:NTF \l__enumext_vspace_b_star_v_bool
1782     {
1783       \vspace*{ \l__enumext_vspace_below_v_skip }
1784     }
1785     { \vspace { \l__enumext_vspace_below_v_skip } }
1786   }
1787 }

```

(End of definition for `__enumext_vspace_below_v:`.)

13.24.3 Functions for above and below keys in enumext* keyans*

`__enumext_vspace_above_vii:`

The functions `__enumext_vspace_above_vii:` and `__enumext_vspace_above_viii:` apply the *vertical space above* the **enumext*** and **keyans*** environments set by the **above** and **above*** keys.

`__enumext_vspace_above_viii:`

```

1788 \cs_new_protected:Nn \__enumext_vspace_above_vii:
1789 {
1790   \skip_if_eq:nnF { \l__enumext_vspace_above_vii_skip } { \c_zero_skip }
1791   {
1792     \bool_if:NTF \l__enumext_vspace_a_star_vii_bool
1793     {
1794       \vspace*{ \l__enumext_vspace_above_vii_skip }
1795     }
1796     { \vspace { \l__enumext_vspace_above_vii_skip } }
1797   }
1798 }
1799 \cs_new_protected:Nn \__enumext_vspace_above_viii:
1800 {
1801   \skip_if_eq:nnF { \l__enumext_vspace_above_viii_skip } { \c_zero_skip }
1802   {
1803     \bool_if:NTF \l__enumext_vspace_a_star_viii_bool
1804     {
1805       \vspace*{ \l__enumext_vspace_above_viii_skip }
1806     }
1807     { \vspace { \l__enumext_vspace_above_viii_skip } }
1808   }
1809 }

```

(End of definition for `__enumext_vspace_above_vii:` and `__enumext_vspace_above_viii:`.)

`__enumext_vspace_below_vii:`

The functions `__enumext_vspace_below_vii:` and `__enumext_vspace_below_viii:` apply the *vertical space below* the **enumext*** and **keyans*** environments set by the **below*** and **below** keys.

`__enumext_vspace_below_viii:`

```

1810 \cs_new_protected:Nn \__enumext_vspace_below_vii:
1811 {
1812   \skip_if_eq:nnF { \l__enumext_vspace_below_vii_skip } { \c_zero_skip }
1813   {
1814     \bool_if:NTF \l__enumext_vspace_b_star_vii_bool
1815     {
1816       \vspace*{ \l__enumext_vspace_below_vii_skip }

```

```

1817     }
1818     { \vspace { \l__enumext_vspace_below_vii_skip } }
1819   }
1820 }
1821 \cs_new_protected:Nn \__enumext_vspace_below_viii:
1822 {
1823   \skip_if_eq:nnF { \l__enumext_vspace_below_viii_skip } { \c_zero_skip }
1824   {
1825     \bool_if:NTF \l__enumext_vspace_b_star_viii_bool
1826     {
1827       \vspace*{ \l__enumext_vspace_below_viii_skip }
1828     }
1829     { \vspace { \l__enumext_vspace_below_viii_skip } }
1830   }
1831 }

```

(End of definition for `__enumext_vspace_below_vii:` and `__enumext_vspace_below_viii:`)

13.25 Setting series, resume and resume* keys

The `series` key is responsible for the whole process of the `resume` and `resume*` keys. The idea behind this is to be able to absorb the $\langle keys \rangle$ passed to the *optional argument* of the “first level” of the environments `enumext` and `enumext*`, but, discarding some specific $\langle keys \rangle$. This implementation is adapted directly from the code provided by Jonathan P. Spratte (@Skillmon) in [chat-Tex-SX](#)

We define the keys `series`, `resume` and `resume*` only for the “first level” of `enumext` and `enumext*`.

```

series
resume
resume*
1832 \cs_set_protected:Npn \__enumext_tmp:n #1
1833 {
1834   \keys_define:nn { enumext / #1 }
1835   {
1836     series .str_set:N = \l__enumext_series_str,
1837     series .value_required:n = true,
1838     resume .code:n = \__enumext_resume_series:n {##1},
1839     resume* .code:n = \__enumext_resume_starred:,
1840     resume* .value_forbidden:n = true,
1841   }
1842 }
1843 \clist_map_inline:nn { level-1, enumext* } { \__enumext_tmp:n {#1} }

```

(End of definition for `series`, `resume`, and `resume*`.)

13.25.1 Internal functions for series key

The function `__enumext_filter_series:n` will be in charge of filtering the $\langle keys \rangle$ we want to store where `{#1}` represents the *optional argument* passed to the environment.

```

1844 \cs_new:Npn \__enumext_filter_series:n #1
1845 {
1846   \use:e
1847   {
1848     \keyval_parse:NNn
1849     \__enumext_filter_series_key:n
1850     \__enumext_filter_series_pair:nn {#1}
1851   }
1852 }

```

The function `__enumext_filter_series_key:n` will be responsible for filtering the $\langle keys \rangle$ that are passed “without value” by excluding the `resume`, `resume*` and `base-fix` keys.

```

1853 \cs_new:Npn \__enumext_filter_series_key:n #1
1854 {
1855   \str_case:nnF {#1}
1856   {
1857     { resume } {} { resume* } {} { base-fix } {}
1858   }
1859   { , { \exp_not:n {#1} } }
1860 }

```

The function `__enumext_filter_series_pair:nn` will be responsible for filtering the $\langle keys \rangle$ that are passed “with value” by excluding the `series`, `resume`, `start`, `start*`, `save-ans` and `save-key` keys.

```

1861 \cs_new:Npn \__enumext_filter_series_pair:nn #1#2
1862 {
1863   \str_case:nnF {#1}
1864   {
1865     { series } {} { resume } {} { start } {}

```



```

1866         { start* } {} { save-ans } {} { save-key } {}
1867     }
1868     { , { \exp_not:n {#1} } = { \exp_not:n {#2} } }
1869 }

```

(End of definition for `__enumext_filter_series:n`, `__enumext_filter_series_key:n`, and `__enumext_filter_series_pair:nn`.)

```

\__enumext_parse_series:n
\__enumext_resume_last:n

```

The function `__enumext_parse_series:n` will be responsible for storing the filtered *keys* in the global variable `\g__enumext_series_⟨series name⟩_tl` along with the creation of the integer variable `\g__enumext_series_⟨series name⟩_int` when the key is passed as an argument; otherwise, it will check the state of the boolean variable `\l__enumext_resume_active_bool` set by the keys `resume` and `resume*` and will call the function `__enumext_resume_last:n`.

- The value of boolean variable `\l__enumext_resume_active_bool` is set to true by the function `__enumext_resume_counter:n` which is used by the keys `resume` and `resume*`, in this case we must Make sure it is set to false so that it does not overwrite the default filtered *keys*. This function is passed to the function `__enumext_parse_keys:n` in the `enumext` environment definition (§13.39) and to the function `__enumext_parse_keys_vii:n` in the `enumext*` environment definition (§13.44).

```

1870 \cs_new_protected:Npn \__enumext_parse_series:n #1
1871 {
1872     \str_if_empty:NTF \l__enumext_series_str
1873     {
1874         \bool_if:NF \l__enumext_resume_active_bool
1875         {
1876             \__enumext_resume_last:n {#1}
1877         }
1878     }
1879     {
1880         \tl_gclear_new:c { g__enumext_series_ \l__enumext_series_str_tl }
1881         \tl_gset:ce { g__enumext_series_ \l__enumext_series_str_tl }
1882             { \__enumext_filter_series:n {#1} }
1883         \int_if_exist:cF { g__enumext_series_ \l__enumext_series_str_int }
1884         {
1885             \int_new:c { g__enumext_series_ \l__enumext_series_str_int }
1886         }
1887     }
1888 }

```

The function `__enumext_resume_last:n` will be in charge of saving the filtering *keys* when the `series` key is *not used* and will save them in the variable `\g__enumext_standar_series_tl` for the `enumext` environment and in the variable `\g__enumext_starred_series_tl` for the `enumext*` environment.

```

1889 \cs_new_protected:Npn \__enumext_resume_last:n #1
1890 {
1891     \bool_if:NT \l__enumext_standar_first_bool
1892     {
1893         \tl_gclear:N \g__enumext_standar_series_tl
1894         \tl_gset:Ne \g__enumext_standar_series_tl { \__enumext_filter_series:n {#1} }
1895     }
1896     \bool_if:NT \l__enumext_starred_first_bool
1897     {
1898         \tl_gclear:N \g__enumext_starred_series_tl
1899         \tl_gset:Ne \g__enumext_starred_series_tl { \__enumext_filter_series:n {#1} }
1900     }
1901 }

```

(End of definition for `__enumext_parse_series:n` and `__enumext_resume_last:n`.)

13.25.2 Internal function to save counter value

```
\__enumext_resume_save_counter:
```

The `__enumext_resume_save_counter:` function will save the last counter value to `\g__enumext_series_⟨series name⟩_int` if the `series={⟨series name⟩}` key has been passed, to `\g__enumext_resume_int` if it has passed the key `resume without value` and the key `series` is not active, in `\g__enumext_series_⟨series name⟩_int` if the key `resume={⟨series name⟩}` has been passed and in `\g__enumext_series_⟨store name⟩_int` if the key has been passed `save-ans={⟨store name⟩}`.

- The variables `\l__enumext_series_str` and `\l__enumext__resume_name_tl` contain the same `{⟨series name⟩}` but are executed at different moments, the integer variable with `\l__enumext_series_str` sets the value when execute `series={⟨series name⟩}` and the integer variable with `\l__enumext__resume_name_tl` sets the subsequent values when use `resume={⟨series name⟩}`. This function is passed to the `enumext` environment definition (§13.39) and the `enumext*` environment definition (§13.44).

```

1902 \cs_new_protected:Nn \__enumext_resume_save_counter:
1903 {

```

```

1904 \bool_if:NT \g__enumext_standar_bool
1905 {
1906   \tl_if_empty:NF \l__enumext_series_str
1907   {
1908     \int_gset_eq:cN
1909     { g__enumext_series_ \l__enumext_series_str_int } \value{enumXi}
1910   }
1911   \tl_if_empty:NTF \l__enumext_resume_name_tl
1912   {
1913     \str_if_empty:NT \l__enumext_series_str
1914     {
1915       \int_gset_eq:NN \g__enumext_resume_int \value{enumXi}
1916     }
1917   }
1918   {
1919     \int_if_exist:cT { g__enumext_series_ \l__enumext_resume_name_tl_int }
1920     {
1921       \int_gset_eq:cN
1922       { g__enumext_series_ \l__enumext_resume_name_tl_int } \value{enumXi}
1923     }
1924   }
1925   \int_if_exist:cT { g__enumext_resume_ \l__enumext_store_name_tl_int }
1926   {
1927     \int_gset_eq:cN
1928     { g__enumext_resume_ \l__enumext_store_name_tl_int } \value{enumXi}
1929   }
1930 }
1931 \bool_if:NT \g__enumext_starred_bool
1932 {
1933   \tl_if_empty:NF \l__enumext_series_str
1934   {
1935     \int_gset_eq:cN
1936     { g__enumext_series_ \l__enumext_series_str_int } \value{enumXvii}
1937   }
1938   \tl_if_empty:NTF \l__enumext_resume_name_tl
1939   {
1940     \str_if_empty:NT \l__enumext_series_str
1941     {
1942       \int_gset_eq:NN \g__enumext_resume_vii_int \value{enumXvii}
1943     }
1944   }
1945   {
1946     \int_if_exist:cT { g__enumext_series_ \l__enumext_resume_name_tl_int }
1947     {
1948       \int_gset_eq:cN
1949       { g__enumext_series_ \l__enumext_resume_name_tl_int } \value{enumXvii}
1950     }
1951   }
1952   \int_if_exist:cT { g__enumext_resume_ \l__enumext_store_name_tl_int }
1953   {
1954     \int_gset_eq:cN
1955     { g__enumext_resume_ \l__enumext_store_name_tl_int } \value{enumXvii}
1956   }
1957 }
1958 }

```

(End of definition for `__enumext_resume_save_counter:`.)

13.25.3 Internal functions for resume key

`__enumext_resume_series:n`

The function `__enumext_resume_series:n` will handle the argument passed to the `resume` key in `enumext` and `enumext*` environments. If the key is passed *without value* the function `__enumext_resume_counter:` is executed which will set the counter according to the numbering of the last `enumext` or `enumext*` environments in which `series={⟨series name⟩}` key is not present, if the `save-ans` key is active it will set the counter according to the value of the integer variable created by that key, otherwise it will verify that the `\g__enumext_series_⟨series name⟩_tl` variable set by the `series` key exists, if so it will pass these keys to the *first level* of the environment, otherwise it will return an error.

```

1959 \cs_new_protected:Npn \__enumext_resume_series:n #1
1960 {
1961   \tl_if_empty:NTF {#1}
1962   {
1963     \__enumext_resume_counter:n { }

```

```

1964     }
1965     {
1966         \tl_if_exist:cTF { g__enumext_series_ \tl_to_str:n {#1} _tl }
1967         {
1968             \__enumext_resume_counter:n {#1}
1969             \bool_if:NT \g__enumext_standar_bool
1970             {
1971                 \keys_set:nv { enumext / level-1 }
1972                 { g__enumext_series_ \tl_to_str:n {#1} _tl }
1973             }
1974             \bool_if:NT \g__enumext_starred_bool
1975             {
1976                 \keys_set:nv { enumext / enumext* }
1977                 { g__enumext_series_ \tl_to_str:n {#1} _tl }
1978             }
1979         }
1980     }
1981     \bool_if:NT \g__enumext_standar_bool
1982     {
1983         \msg_error:nnn { enumext } { unknown-series } {#1}
1984     }
1985     \bool_if:NT \g__enumext_starred_bool
1986     {
1987         \msg_error:nnn { enumext } { unknown-series } {#1}
1988     }
1989 }
1990 }
1991 }

```

(End of definition for __enumext_resume_series:n.)

```

\__enumext_resume_counter:n
\__enumext_resume_counter:
  \__enumext_resume_counter_series:
  \__enumext_resume_counter_save_ans:

```

The function `__enumext_resume_counter:n` will set the variable `\l__enumext_resume_active_bool` to true and pass the value of the key `resume` to the variable `\l__enumext_series_name_tl` which will contain the `{\series name}`. If the variable `\l__enumext_series_name_tl` is empty, that is, we are passing the key `resume` *without value*, we will execute the function `__enumext_resume_counter:`; otherwise, when we pass `resume={\series name}` we will execute the function `__enumext_resume_counter_series:`, finally we will execute the function `__enumext_resume_counter_save_ans:` which is associated with the key `save-ans`.

```

1992 \cs_new_protected:Npn \__enumext_resume_counter:n #1
1993 {
1994     \bool_set_true:N \l__enumext_resume_active_bool
1995     \tl_set:Nn \l__enumext_resume_name_tl {#1}
1996     \tl_if_empty:NTF \l__enumext_resume_name_tl
1997     {
1998         \__enumext_resume_counter:
1999     }
2000     {
2001         \__enumext_resume_counter_series:
2002     }
2003     \__enumext_resume_counter_save_ans:
2004 }

```

The `__enumext_resume_counter:` function is executed when the `resume` key is used *without value*, only the counters for the “*first level*” of the environments will be set.

```

2005 \cs_new_protected:Nn \__enumext_resume_counter:
2006 {
2007     \bool_if:NT \g__enumext_standar_bool
2008     {
2009         \int_gincr:N \g__enumext_resume_int
2010         \int_set_eq:NN \l__enumext_start_i_int \g__enumext_resume_int
2011     }
2012     \bool_if:NT \g__enumext_starred_bool
2013     {
2014         \int_gincr:N \g__enumext_resume_vii_int
2015         \int_set_eq:NN \l__enumext_start_vii_int \g__enumext_resume_vii_int
2016     }
2017 }

```

The function `__enumext_resume_counter_series:` will be executed when the `resume={\series name}` key is active, setting the counters for the “*first level*” of the environments according to the value of the integer variables created by the `series` key.

```

2018 \cs_new_protected:Nn \__enumext_resume_counter_series:
2019 {
2020   \bool_if:NT \g__enumext_standar_bool
2021   {
2022     \int_set:Nn \l__enumext_start_i_int
2023     {
2024       \int_use:c { g__enumext_series_ \l__enumext_resume_name_tl _int } + 1
2025     }
2026   }
2027   \bool_if:NT \g__enumext_starred_bool
2028   {
2029     \int_set:Nn \l__enumext_start_vii_int
2030     {
2031       \int_use:c { g__enumext_series_ \l__enumext_resume_name_tl _int } + 1
2032     }
2033   }
2034 }

```

The function `__enumext_resume_counter_save_ans:` will be executed when the `save-ans` key is active along with the `resume` key, setting the counters for the “first level” of the environments according to the value of the integer variables created by the `save-ans` key.

```

2035 \cs_new_protected:Nn \__enumext_resume_counter_save_ans:
2036 {
2037   \bool_lazy_and:nnT
2038   { \bool_if_p:N \l__enumext_standar_first_bool }
2039   { \bool_if_p:N \l__enumext_store_active_bool }
2040   {
2041     \int_set:Nn \l__enumext_start_i_int
2042     {
2043       \int_use:c { g__enumext_resume_ \l__enumext_store_name_tl _int } + 1
2044     }
2045   }
2046   \bool_lazy_and:nnT
2047   { \bool_if_p:N \l__enumext_starred_first_bool }
2048   { \bool_if_p:N \l__enumext_store_active_bool }
2049   {
2050     \int_set:Nn \l__enumext_start_vii_int
2051     {
2052       \int_use:c { g__enumext_resume_ \l__enumext_store_name_tl _int } + 1
2053     }
2054   }
2055 }

```

(End of definition for `__enumext_resume_counter:n` and others.)

13.25.4 Internal function for `resume*` key

`__enumext_resume_starred:`

The function `__enumext_resume_starred:` will handle the `resume*` key in the `enumext` and `enumext*` environments. This function will execute the filtered `(keys)` in the last one and will continue with the numbering according to the last execution of the environment `enumext` or `enumext*` in which the keys `resume={series name}` or `series={series name}` were not active.

```

2056 \cs_new_protected:Nn \__enumext_resume_starred:
2057 {
2058   \bool_if:NT \g__enumext_standar_bool
2059   {
2060     \tl_if_empty:NF \g__enumext_standar_series_tl
2061     {
2062       \__enumext_resume_counter:n { }
2063       \keys_set:nV { enumext / level-1 } \g__enumext_standar_series_tl
2064     }
2065   }
2066   \bool_if:NT \g__enumext_starred_bool
2067   {
2068     \tl_if_empty:NF \g__enumext_starred_series_tl
2069     {
2070       \__enumext_resume_counter:n { }
2071       \keys_set:nV { enumext / enumext* } \g__enumext_starred_series_tl
2072     }
2073   }
2074 }

```

(End of definition for `__enumext_resume_starred:`.)

13.26 Setting save-ans, check-ans and no-store keys

The key `save-ans` is directly associated with the keys `check-ans`, `no-store`, `resume` and `resume*`, this will activate the entire “storage system” in the `enumext` package.

13.26.1 Setting save-ans key

`save-ans` We define the keys `save-ans` only for the “first level” of `enumext` and `enumext*`.

```

2075 \cs_set_protected:Npn \__enumext_tmp:n #1
2076 {
2077   \keys_define:nn { enumext / #1 }
2078   {
2079     save-ans .code:n = \__enumext_storing_set:n {##1},
2080     save-ans .value_required:n = true,
2081   }
2082 }
2083 \clist_map_inline:nn { level-1, enumext* } { \__enumext_tmp:n {#1} }

```

(End of definition for `save-ans`.)

13.26.2 Internal functions for save-ans key

`__enumext_start_save_ans_msg:` and `__enumext_stop_save_ans_msg:` will display in the terminal and .log file the environment in which the `save-ans` key was executed along with the line at the beginning and end of it. The function `__enumext_start_save_ans_msg:` will be passed to `__enumext_storing_set:n` and the function `__enumext_stop_save_ans_msg:` will be passed to the function `__enumext_execute_after_env:`.

```

2084 \cs_new_protected:Nn \__enumext_start_save_ans_msg:
2085 {
2086   \msg_term:nnVV { enumext } { save-ans-log }
2087   \g__enumext_envir_name_tl \l__enumext_store_name_tl
2088 }
2089 \cs_new_protected:Nn \__enumext_stop_save_ans_msg:
2090 {
2091   \msg_term:nnVV { enumext } { save-ans-log-hook }
2092   \g__enumext_envir_name_tl \g__enumext_store_name_tl
2093 }

```

(End of definition for `__enumext_start_save_ans_msg:` and `__enumext_stop_save_ans_msg:`.)

`__enumext_storing_set:n` The function `__enumext_storing_set:n` first pass the value of the `save-ans` key to the variable `\l__enumext_store_name_tl` which will contain the `{⟨store name⟩}` of the *sequence* and *prop list* we will use. If `\l__enumext_store_name_tl` is *empty* we return an error message, otherwise will return the appropriate message `__enumext_start_save_ans_msg:` and proceed to execute the function `__enumext_storing_exec:` for `enumext` and `enumext*` environments.

```

2094 \cs_new_protected:Npn \__enumext_storing_set:n #1
2095 {
2096   \tl_set:Nx \l__enumext_store_name_tl {#1}
2097   \tl_if_empty:NTF \l__enumext_store_name_tl
2098   {
2099     \bool_lazy_or:nnT
2100     { \l__enumext_standar_first_bool } { \l__enumext_starred_first_bool }
2101     {
2102       \msg_error:nnV { enumext } { save-ans-empty } \g__enumext_envir_name_tl
2103     }
2104   }
2105   {
2106     \bool_lazy_or:nnT
2107     { \l__enumext_standar_first_bool } { \l__enumext_starred_first_bool }
2108     {
2109       \__enumext_start_save_ans_msg:
2110       \__enumext_storing_exec:
2111     }
2112   }
2113 }

```

The function `__enumext_storing_exec:` will set to true the variable `\l__enumext_store_active_bool` which activates the use of the `\anskey` command and the `anskey*`, `keyans`, `keyans*` and `keyanspic` environments and will set to “true” the variable `\l__enumext_check_answers_bool` used for internal checking answers mechanism set by the `check-ans` and `no-store` keys, copy `{⟨store name⟩}` into the variable `\g__enumext_store_name_tl` and execute the function `__enumext_anskey_env_make:V` creating the environment `anskey*` (§13.31).

```

2114 \cs_new_protected:Nn \__enumext_storing_exec:

```

```

2115 {
2116   \bool_set_true:N \l__enumext_store_active_bool
2117   \bool_set_true:N \l__enumext_check_answers_bool
2118   \tl_gset:NV \g__enumext_store_name_tl \l__enumext_store_name_tl
2119   \__enumext_anskey_env_make:V \l__enumext_store_name_tl

```

The *prop list* `\g__enumext_series_⟨store name⟩_prop` and the *sequence* `\g__enumext_series_⟨store name⟩_seq` will be created globally to “*store content*” in case they do not exist together with the integer variable `\g__enumext_series_⟨store name⟩_int` used by the keys `resume` and `resume*`.

```

2120   \prop_if_exist:cF { g__enumext_ \l__enumext_store_name_tl _prop }
2121   {
2122     \msg_log:nnV { enumext } { store-prop } \l__enumext_store_name_tl
2123     \prop_new:c { g__enumext_ \l__enumext_store_name_tl _prop }
2124   }
2125   \seq_if_exist:cF { g__enumext_ \l__enumext_store_name_tl _seq }
2126   {
2127     \msg_log:nnV { enumext } { store-seq } \l__enumext_store_name_tl
2128     \seq_new:c { g__enumext_ \l__enumext_store_name_tl _seq }
2129   }
2130   \int_if_exist:cF { g__enumext_resume_ \l__enumext_store_name_tl _int }
2131   {
2132     \msg_log:nnV { enumext } { store-int } \l__enumext_store_name_tl
2133     \int_new:c { g__enumext_resume_ \l__enumext_store_name_tl _int }
2134   }
2135 }

```

(End of definition for `__enumext_storing_set:n` and `__enumext_storing_exec:.`)

13.26.3 The check answer mechanism

The internal mechanism for “*checking answers*” follows this logic:

If the line begins with `\item` or `\item*` and does NOT *open a nested environment*, each `\item` or `\item*` must contain a *single* execution of the `\anskey` command, i.e. the counter of the executions of the `\anskey` command must be equal to the counter associated with the sum of executions of `\item` and `\item*`.

If the line begins with `\item` or `\item*` and *opens a nested environment* each `\item` or `\item*` in the nested environment must have a *single* execution of the `\anskey` command and the counter associated to the sum of `\item` and `\item*` executions must decrementing by “*one*” to maintain equality.

In order for the mechanism for the check-answer to work (not counting `keyans`, `keyans*` and `keyanspic`) we need:

1. We must keep track of the total number of `\item` and `\item*` (enumerated) that appear within the environment including the nested levels.
2. We must keep track of the total number of `\item` and `\item*` (enumerated) that appear per level of nesting.
3. Keeping track of the number of times the environment nests.

The integer variable associated to the sum of each `\item` and `\item*` in the environment `\g__enumext_item_number_int` must match the integer variable `\g__enumext_item_anskey_int` associated to the execution of the command `\anskey`. We analyze the cases:

- a) If the list only has one level the number of `\item` + `\item*` = `\anskey`
- b) If the list has *nested levels*, for each level of nesting we need to decrementing by one (for the `\item` or `\item*` that opens the nest) so that the account remains the same.

With `keyans`, `keyans*` and `keyanspic` it is enough to increase in one the integer of `\anskey`. The integers created must be global if they are not lost in the interior levels of nesting and to execute the test we will use a “*hook*” function after closing the *first level* of the environment.

13.26.4 Setting check-ans and no-store keys

Now we define the keys `check-ans` and `no-store` for all levels of `enumext` and `enumext*` environments.

```

check-ans no-store
2136 \cs_set_protected:Npn \__enumext_tmp:n #1
2137 {
2138   \keys_define:nn { enumext / #1 }
2139   {
2140     check-ans .bool_set:N = \l__enumext_check_ans_key_bool,
2141     check-ans .initial:n = false,
2142     check-ans .value_required:n = true,
2143     no-store .code:n = {
2144       \bool_set_false:N \l__enumext_check_answers_bool

```

```

2145         \bool_set_false:N \l__enumext_check_ans_key_bool
2146     },
2147     no-store .value_forbidden:n = true,
2148 }
2149 }
2150 \clist_map_inline:nn
2151 {
2152     level-1, level-2, level-3, level-4, enumext*
2153 }
2154 { \l__enumext_tmp:n {#1} }

```

(End of definition for *check-ans* and *no-store*.)

13.26.5 Set-up check answer mechanism

`\l__enumext_check_ans_active:` The function `\l__enumext_check_ans_active:` will first check the state of the variable `\l__enumext_store_name_tl`, that is, the *save-ans* key is active, if so it will check the state of the variable `\l__enumext_check_answers_bool` handled by the key *no-store* and will execute the function `\l__enumext_check_ans_level:` only if “*true*”, i.e. the key *no-store* is not active.

```

2155 \cs_new_protected:Nn \l__enumext_check_ans_active:
2156 {
2157     \tl_if_empty:NF \l__enumext_store_name_tl
2158     {
2159         \bool_if:NT \l__enumext_check_answers_bool
2160         {
2161             \l__enumext_check_ans_level:
2162         }
2163     }
2164 }

```

The function `\l__enumext_check_ans_level:` will decrement by “*one*” the value of the variable `\g__enumext_item_number_int` which keeps track of the executions of `\item` and `\item*` for each level of nesting of the environment *enumext*, taking into account whether it is nested within *enumext** or the opposite and set `\l__enumext_item_number_bool` to “*false*”.

```

2165 \cs_new_protected:Nn \l__enumext_check_ans_level:
2166 {
2167     \int_case:nn { \l__enumext_level_int }
2168     {
2169         { 1 }{
2170             \bool_lazy_all:nT
2171             {
2172                 { \bool_if_p:N \g__enumext_starred_bool }
2173                 { \int_compare_p:nNn { \l__enumext_level_h_int } = { 1 } }
2174             }
2175             {
2176                 \int_gdecr:N \g__enumext_item_number_int
2177                 \bool_set_false:N \l__enumext_item_number_bool
2178             }
2179         }
2180         { 2 }{
2181             \int_gdecr:N \g__enumext_item_number_int
2182             \bool_set_false:N \l__enumext_item_number_bool
2183         }
2184         { 3 }{
2185             \int_gdecr:N \g__enumext_item_number_int
2186             \bool_set_false:N \l__enumext_item_number_bool
2187         }
2188         { 4 }{
2189             \int_gdecr:N \g__enumext_item_number_int
2190             \bool_set_false:N \l__enumext_item_number_bool
2191         }
2192     }

```

We should only execute this if *enumext** is nested in the “*first level*” of *enumext*, for the rest of the cases the value of `\g__enumext_item_number_int` is already decreased.

```

2193     \int_case:nn { \l__enumext_level_h_int }
2194     {
2195         { 1 }{
2196             \bool_lazy_all:nT
2197             {
2198                 { \bool_if_p:N \g__enumext_standar_bool }
2199                 { \int_compare_p:nNn { \l__enumext_level_int } = { 1 } }

```



```

2200         }
2201     {
2202         \int_gdecr:N \g__enumext_item_number_int
2203         \bool_set_false:N \l__enumext_item_number_bool
2204     }
2205 }
2206 }
2207 }

```

(End of definition for __enumext_check_ans_active: and __enumext_check_ans_level:.)

__enumext_check_ans_key_hook:

The function __enumext_check_ans_key_hook: will *export* the status of the local variable \l__enumext_check_ans_key_bool to the global variable \g__enumext_check_ans_key_bool only if the key `check-ans` is active.

```

2208 \cs_new_protected:Nn \__enumext_check_ans_key_hook:
2209 {
2210     \bool_lazy_and:nnT
2211     { \bool_if_p:N \l__enumext_check_ans_key_bool }
2212     { \bool_if_p:N \g__enumext_standar_bool }
2213     {
2214         \bool_gset_true:N \g__enumext_check_ans_key_bool
2215     }
2216     \bool_lazy_and:nnT
2217     { \bool_if_p:N \l__enumext_check_ans_key_bool }
2218     { \bool_if_p:N \g__enumext_starred_bool }
2219     {
2220         \bool_gset_true:N \g__enumext_check_ans_key_bool
2221     }
2222 }

```

(End of definition for __enumext_check_ans_key_hook:.)

__enumext_item_answer_diff:

The function __enumext_item_answer_diff: will set the value of the variable \g__enumext_item_answer_diff_int which is used by the functions __enumext_check_ans_show: for the key `save-ans` and by the function __enumext_check_ans_log: by the internal “*check answer*” mechanism. This function will be passed to the function __enumext_execute_after_env:.

```

2223 \cs_new_protected:Nn \__enumext_item_answer_diff:
2224 {
2225     \int_gset:Nn \g__enumext_item_answer_diff_int
2226     {
2227         \int_sign:n { \g__enumext_item_number_int - \g__enumext_item_anskey_int }
2228     }
2229 }

```

(End of definition for __enumext_item_answer_diff:.)

__enumext_check_ans_show:

__enumext_check_ans_msg_less:

__enumext_check_ans_msg_same_ok:

__enumext_check_ans_msg_greater:

The function __enumext_check_ans_show: will be executed within the function __enumext_execute_after_env: when the key `check-ans` is active, that is, when \g__enumext_check_ans_key_bool is “*true*” and will return the appropriate message according to the value of \g__enumext_item_answer_diff_int set by the function __enumext_item_answer_diff:.

```

2230 \cs_new_protected:Nn \__enumext_check_ans_show:
2231 {
2232     \int_case:nn { \g__enumext_item_answer_diff_int }
2233     {
2234         { -1 } { \__enumext_check_ans_msg_less: }
2235         { 0 } { \__enumext_check_ans_msg_same_ok: }
2236         { 1 } { \__enumext_check_ans_msg_greater: }
2237     }
2238 }
2239 \cs_new_protected:Nn \__enumext_check_ans_msg_less:
2240 {
2241     \msg_warning:nneee { enumext } { item-less-answer } { \g__enumext_store_name_tl }
2242     { \g__enumext_envir_name_tl } { \g__enumext_start_line_tl }
2243 }
2244 \cs_new_protected:Nn \__enumext_check_ans_msg_same_ok:
2245 {
2246     \msg_term:nneee { enumext } { items-same-answer } { \g__enumext_store_name_tl }
2247     { \g__enumext_envir_name_tl } { \g__enumext_start_line_tl }
2248 }
2249 \cs_new_protected:Nn \__enumext_check_ans_msg_greater:

```

```

2250 {
2251     \msg_warning:nneee { enumext } { item-greater-answer } { \g__enumext_store_name_tl }
2252     { \g__enumext_envir_name_tl } { \g__enumext_start_line_tl }
2253 }

```

(End of definition for `__enumext_check_ans_show:` and others.)

`__enumext_check_ans_log:` The function `__enumext_check_ans_log:` will be executed within the function `__enumext_execute_after_env:` when the key `check-ans` is not active, that is, when `\g__enumext_check_ans_key_bool` is “false” and write in the log the appropriate message according to the value of `\g__enumext_item_answer_diff_int` set by the function `__enumext_item_answer_diff:`.

```

2254 \cs_new_protected:Nn \__enumext_check_ans_log:
2255 {
2256     \int_case:nn { \g__enumext_item_answer_diff_int }
2257     {
2258         { -1 } { \__enumext_check_ans_log_msg_less: }
2259         { 0 } { \__enumext_check_ans_log_msg_same_ok: }
2260         { 1 } { \__enumext_check_ans_log_msg_greater: }
2261     }
2262 }
2263 \cs_new_protected:Nn \__enumext_check_ans_log_msg_less:
2264 {
2265     \msg_log:nneee { enumext } { item-less-answer } { \g__enumext_store_name_tl }
2266     { \g__enumext_envir_name_tl } { \g__enumext_start_line_tl }
2267 }
2268 \cs_new_protected:Nn \__enumext_check_ans_log_msg_same_ok:
2269 {
2270     \msg_log:nneee { enumext } { items-same-answer } { \g__enumext_store_name_tl }
2271     { \g__enumext_envir_name_tl } { \g__enumext_start_line_tl }
2272 }
2273 \cs_new_protected:Nn \__enumext_check_ans_log_msg_greater:
2274 {
2275     \msg_log:nneee { enumext } { item-greater-answer } { \g__enumext_store_name_tl }
2276     { \g__enumext_envir_name_tl } { \g__enumext_start_line_tl }
2277 }

```

(End of definition for `__enumext_check_ans_log:` and others.)

13.26.6 Check for `\item*` and `\anspic*` commands

`__enumext_check_starred_cmd:n` The function `__enumext_check_starred_cmd:n` performs an *extra check* for the `keyans`, `keyans*` and `keyanspic` environments. Unlike the *check* executed by `check-ans` key this one is not controlled by any key, it is intended to prevent the forgetting of `\item*` or `\anspic*` in these environments.

```

2278 \cs_new_protected:Npn \__enumext_check_starred_cmd:n #1
2279 {
2280     \int_compare:nNt
2281     { \g__enumext_check_starred_cmd_int } = { 0 }
2282     {
2283         \msg_warning:nnnV
2284         { enumext } { missing-starred } { #1 } \l__enumext_check_start_line_env_tl
2285     }
2286     \int_compare:nNt
2287     { \g__enumext_check_starred_cmd_int } > { 1 }
2288     {
2289         \msg_warning:nnnV
2290         { enumext } { many-starred } { #1 } \l__enumext_check_start_line_env_tl
2291     }
2292     \int_gzero:N \g__enumext_check_starred_cmd_int
2293     \tl_clear:N \l__enumext_check_start_line_env_tl
2294 }

```

(End of definition for `__enumext_check_starred_cmd:n`.)

13.27 Keys and functions associated with storage

13.27.1 Keys for marks, wrap and show

The `enumext` package provides a set of *keys* for manipulating “symbol marks” associated with “answers” and how they are displayed and stored in the *sequence* and *prop list* as well as an internal “label and ref” system.

mark-ans For the command `\anskey` and the environment `anskey*` we will add the keys mark-ans, mark-pos, mark-sep, wrap-ans, show-ans and show-pos.

```

2295 \keys_define:nn { enumext / anskey }
2296 {
2297   mark-ans .tl_set:N = \l__enumext_mark_answer_sym_tl,
2298   mark-ans .initial:n = \textasteriskcentered,
2299   mark-ans .value_required:n = true,
2300   mark-pos .choice:,
2301   mark-pos / left .code:n = \str_set:Nn \l__enumext_mark_position_str { l },
2302   mark-pos / right .code:n = \str_set:Nn \l__enumext_mark_position_str { r },
2303   mark-pos / center .code:n = \str_set:Nn \l__enumext_mark_position_str { c },
2304   mark-pos / unknown .code:n =
2305     \msg_error:nnee { enumext } { unknown-choice }
2306     { mark-pos } { left, ~ right, ~ center } { \exp_not:n {#1} },
2307   mark-pos .initial:n = right,
2308   mark-pos .value_required:n = true,
2309   mark-sep .dim_set:N = \l__enumext_mark_sym_sep_dim,
2310   mark-sep .value_required:n = true,
2311   wrap-ans .cs_set_protected:Np = \__enumext_anskey_wrapper:n #1,
2312   wrap-ans .initial:n =
2313     {
2314       \fbox{\parbox[t]{\dimeval{\itemwidth -2\fboxsep -2\fboxrule}}{#1}}
2315     },
2316   wrap-ans .value_required:n = true,
2317   show-ans .bool_set:N = \l__enumext_show_answer_bool,
2318   show-ans .initial:n = false,
2319   show-ans .value_required:n = true,
2320   show-pos .bool_set:N = \l__enumext_show_position_bool,
2321   show-pos .initial:n = false,
2322   show-pos .value_required:n = true,
2323 }

```

(End of definition for mark-ans and others.)

mark-ans* For the `keyans` and `keyans*` environments we will only add the keys mark-ans*, mark-pos*, mark-sep*, wrap-ans*, wrap-opt, save-sep, show-ans and show-pos.

```

2324 \cs_set_protected:Npn \__enumext_tmp:nn #1 #2
2325 {
2326   \keys_define:nn { enumext / #1 }
2327   {
2328     mark-ans* .tl_set:c = { l__enumext_mark_answer_sym_#2_tl },
2329     mark-ans* .initial:n = \textasteriskcentered,
2330     mark-ans* .value_required:n = true,
2331     mark-pos* .choice:,
2332     mark-pos* / left .code:n = \str_set:cn { l__enumext_mark_position_#2_str } { l },
2333     mark-pos* / right .code:n = \str_set:cn { l__enumext_mark_position_#2_str } { r },
2334     mark-pos* / center .code:n = \str_set:cn { l__enumext_mark_position_#2_str } { c },
2335     mark-pos* / unknown .code:n =
2336       \msg_error:nnee { enumext } { unknown-choice }
2337       { mark-pos } { left, ~ right, ~ center } { \exp_not:n {##1} },
2338     mark-pos* .initial:n = right,
2339     mark-pos* .value_required:n = true,
2340     mark-sep* .dim_set:c = { l__enumext_mark_sym_sep_#2_dim },
2341     mark-sep* .value_required:n = true,
2342     wrap-ans* .cs_set_protected:cp = { __enumext_keyans_wrapper_item_#2:n } ##1,
2343     wrap-ans* .value_required:n = true,
2344     wrap-opt .cs_set_protected:cp = { __enumext_keyans_wrapper_opt_#2:n } ##1,
2345     wrap-opt .initial:n = [{##1}],
2346     wrap-opt .value_required:n = true,
2347     save-sep .tl_set:c = { l__enumext_store_keyans_item_opt_sep_#2_tl },
2348     save-sep .initial:n = {, ~ },
2349     save-sep .value_required:n = true,
2350     show-ans .bool_set:N = \l__enumext_show_answer_bool,
2351     show-ans .initial:n = false,
2352     show-ans .value_required:n = true,
2353     show-pos .bool_set:N = \l__enumext_show_position_bool,
2354     show-pos .initial:n = false,
2355     show-pos .value_required:n = true,
2356   }
2357 }
2358 \clist_map_inline:nn { {keyans}{v}, {keyans*}{viii} } { \__enumext_tmp:nn #1 }

```

(End of definition for mark-ans* and others.)

mark-ref We add the keys mark-ref and save-ref related to the “storage system” and internal mechanism of “label and
 save-ref ref” along with the keys created for the command \anskey, the environment anskey* and the environments
 mark-ans keyans and keyans* only at the first level of enumext and enumext*.

```

2359 \cs_set_protected:Npn \__enumext_tmp:n #1
mark-pos {
mark-pos* \keys_define:nn { enumext / #1 }
mark-sep {
mark-sep*   mark-ref .tl_set:N = \__enumext_mark_ref_sym_tl,
wrap-ans    mark-ref .initial:n = \textreferencemark,
wrap-ans*   mark-ref .value_required:n = true,
wrap-opt    save-ref .bool_set:N = \__enumext_store_ref_key_bool,
save-sep    save-ref .initial:n = false,
show-ans    save-ref .value_required:n = true,
show-pos    mark-ans .code:n = {
2370               \keys_set:nn { enumext / anskey } { mark-ans = {##1} }
2371             },
2372   mark-ans .value_required:n = true,
2373   mark-ans* .code:n = {
2374               \keys_set:nn { enumext / keyans } { mark-ans* = {##1} }
2375               \keys_set:nn { enumext / keyans* } { mark-ans* = {##1} }
2376             },
2377   mark-ans* .value_required:n = true,
2378   mark-pos .code:n = {
2379               \keys_set:nn { enumext / anskey } { mark-pos = {##1} }
2380             },
2381   mark-pos .value_required:n = true,
2382   mark-pos* .code:n = {
2383               \keys_set:nn { enumext / keyans } { mark-pos* = {##1} }
2384               \keys_set:nn { enumext / keyans* } { mark-pos* = {##1} }
2385             },
2386   mark-pos* .value_required:n = true,
2387   mark-sep .code:n = {
2388               \keys_set:nn { enumext / anskey } { mark-sep = {##1} }
2389             },
2390   mark-sep .value_required:n = true,
2391   mark-sep* .code:n = {
2392               \keys_set:nn { enumext / keyans } { mark-sep* = {##1} }
2393               \keys_set:nn { enumext / keyans* } { mark-sep* = {##1} }
2394             },
2395   mark-sep* .value_required:n = true,
2396   wrap-ans .code:n = {
2397               \keys_set:nn { enumext / anskey } { wrap-ans = {##1} }
2398             },
2399   wrap-ans .value_required:n = true,
2400   wrap-ans* .code:n = {
2401               \keys_set:nn { enumext / keyans } { wrap-ans* = {##1} }
2402               \keys_set:nn { enumext / keyans* } { wrap-ans* = {##1} }
2403             },
2404   wrap-ans* .value_required:n = true,
2405   wrap-opt .code:n = {
2406               \keys_set:nn { enumext / keyans } { wrap-opt = {##1} }
2407               \keys_set:nn { enumext / keyans* } { wrap-opt = {##1} }
2408             },
2409   wrap-opt .value_required:n = true,
2410   save-sep .code:n = {
2411               \keys_set:nn { enumext / keyans } { save-sep = {##1} }
2412               \keys_set:nn { enumext / keyans* } { save-sep = {##1} }
2413             },
2414   save-sep .value_required:n = true,
2415   show-ans .bool_set:N = \__enumext_show_answer_bool,
2416   show-ans .initial:n = false,
2417   show-ans .value_required:n = true,
2418   show-pos .bool_set:N = \__enumext_show_position_bool,
2419   show-pos .initial:n = false,
2420   show-pos .value_required:n = true,
2421   }
2422 }
2423 \clist_map_inline:nn { level-1, enumext* } { { \__enumext_tmp:n {#1} }

```

(End of definition for mark-ref and others.)

13.27.2 Storing structure of the environments

The idea behind “*storing structure*” in the *sequence* is to have a copy of the *structure of the environment* in which the key `save-ans` is being executed so we must capture the *optional argument* passed to the levels of the environment in which it is executed and “*storing*” this in the *sequence*.

```

__enumext_store_active_keys:n
__enumext_store_active_keys_vii:n

```

The functions `__enumext_store_active_keys:n` and `__enumext_store_active_keys_vii:n` will be responsible for the “*storing keys*” filtered from the *optional argument* of the environment in which the key `save-ans` is executed and the levels within this for the `enumext` and `enumext*` environments. We will execute this function only if the variable `__enumext_store_save_key_X_bool` is false, that is, the key `store-key` is not active, establishing the variable `__enumext_store_save_key_X_tl` with the filtered *keys*.

```

2424 \cs_new_protected:Npn __enumext_store_active_keys:n #1
2425 {
2426   \bool_if:cF { __enumext_store_save_key_ __enumext_level: _bool }
2427   {
2428     \tl_clear:c { __enumext_save_key_ __enumext_level: _tl }
2429     \tl_set:ce
2430       { __enumext_store_save_key_ __enumext_level: _tl }
2431       { __enumext_filter_save_key:n {#1} }
2432   }
2433 }
2434 \cs_new_protected:Npn __enumext_store_active_keys_vii:n #1
2435 {
2436   \bool_if:NF \__enumext_store_save_key_vii_bool
2437   {
2438     \tl_clear:N \__enumext_store_save_key_vii_tl
2439     \tl_set:Ne \__enumext_store_save_key_vii_tl { __enumext_filter_save_key:n {#1} }
2440   }
2441 }

```

(End of definition for `__enumext_store_active_keys:n` and `__enumext_store_active_keys_vii:n`.)

13.27.3 Setting save-key key

Since this “*storing structure*” in the *sequence* established by the `save-ans` key when executing `\anskey` or `anskey*`, we will not be able to modify it. The best thing here is to have a key that allows you to modify the *optional argument* of the “*storing structure*” in the *sequence*.

`save-key`

The values set by this key passed in the *optional argument* of the `enumext` and `enumext*` environments will override the values of the `__enumext_store_save_key_X_tl` variable set by the functions `__enumext_store_active_keys:n` and `__enumext_store_active_keys_vii:n`. Now define the key `save-key` for all levels of `enumext` and `enumext*` environments.

```

2442 \cs_set_protected:Npn __enumext_tmp:n #1
2443 {
2444   \keys_define:nn { enumext / enumext* }
2445   {
2446     save-key .code:n = __enumext_parse_save_key_vii:n {##1},
2447     save-key .value_required:n = true,
2448   }
2449   \keys_define:nn { enumext / #1 }
2450   {
2451     save-key .code:n = __enumext_parse_save_key:n {##1},
2452     save-key .value_required:n = true,
2453   }
2454 }
2455 \clist_map_inline:nn { level-1, level-2, level-3, level-4 } { __enumext_tmp:n {#1} }

```

(End of definition for `save-key`.)

```

__enumext_parse_save_key:n
__enumext_parse_save_key_vii:n

```

The functions `__enumext_parse_save_key:n` and `__enumext_parse_save_key_vii:n` will be responsible for “*storing keys*” in the variable `__enumext_store_save_key_X_tl` for `enumext` and `enumext*`.

```

2456 \cs_new_protected:Npn __enumext_parse_save_key:n #1
2457 {
2458   \bool_set_true:c { __enumext_store_save_key_ __enumext_level: _bool }
2459   \tl_clear:c { __enumext_save_key_ __enumext_level: _tl }
2460   \tl_set:ce
2461     { __enumext_store_save_key_ __enumext_level: _tl }
2462     { __enumext_filter_save_key:n {#1} }
2463 }
2464 \cs_new_protected:Npn __enumext_parse_save_key_vii:n #1

```

```

2465 {
2466   \bool_set_true:N \__enumext_store_save_key_vii_bool
2467   \tl_clear:N \__enumext_store_save_key_vii_tl
2468   \tl_set:Nx \__enumext_store_save_key_vii_tl { \__enumext_filter_save_key:n {#1} }
2469 }

```

(End of definition for __enumext_parse_save_key:n and __enumext_parse_save_key_vii:n.)

13.27.4 Internal functions to store optional arguments

The function __enumext_filter_save_key:n will be in charge of “filtering keys” we want to stored in sequence where {#1} represents the *optional argument* passed to the environment.

```

\__enumext_filter_save_key:n
  \__enumext_filter_save_key_key:n
  \__enumext_filter_save_key_pair:nn
2470 \cs_new:Npn \__enumext_filter_save_key:n #1
2471 {
2472   \use:e
2473   {
2474     \keyval_parse:NNn
2475     \__enumext_filter_save_key_key:n
2476     \__enumext_filter_save_key_pair:nn {#1}
2477   }
2478 }

```

The function __enumext_filter_save_key_key:n will be responsible for “filtering keys” that are passed “without value” by excluding the resume, resume*, no-store and base-fix keys.

```

2479 \cs_new:Npn \__enumext_filter_save_key_key:n #1
2480 {
2481   \str_case:nnF {#1}
2482   {
2483     { resume } {} { resume* } {} { no-store } {} { base-fix } {}
2484   }
2485   { , { \exp_not:n {#1} } }
2486 }

```

The function __enumext_filter_save_key_pair:nn will be responsible for “filtering keys” that are passed “with value” by excluding the series, resume, save-ans, save-ref, save-key, check-ans, show-ans, save-pos, wrap-ans, mark-ans, wrap-opt, wrap-ans*, save-sep, mark-sep, mark-ref, save-sep, mini-env, mini-sep, mini-right and mini-right* keys.

```

2487 \cs_new:Npn \__enumext_filter_save_key_pair:nn #1#2
2488 {
2489   \str_case:nnF {#1}
2490   {
2491     { series } {} { resume } {} { save-ans } {} { save-ref } {}
2492     { save-key } {} { check-ans } {} { show-ans } {} { show-pos } {}
2493     { wrap-ans } {} { mark-ans } {} { wrap-opt } {} { wrap-ans* } {}
2494     { save-sep } {} { mark-sep } {} { mark-ref } {} { mini-env } {}
2495     { mini-sep } {} { mini-right } {} { mini-right* } {}
2496   }
2497   { , { \exp_not:n {#1} } = { \exp_not:n {#2} } }
2498 }

```

(End of definition for __enumext_filter_save_key:n, __enumext_filter_save_key_key:n, and __enumext_filter_save_key_pair:nn.)

13.27.5 Function for storing content in prop list

The function __enumext_store_addto_prop:n stores the {<content>} in *prop list* defined by save-ans key. The “stored content” is retrieved by means of the \getkeyans command.

The form in which the {<content>} is “stored” in the *prop list* is {<position>}{<content>}. This function is used by \anskey in enumext and enumext* environments, \item* in keyans and keyans* environments and \anspic* in keyanspic environment.

```

\__enumext_store_addto_prop:n
\__enumext_store_addto_prop:V
2499 \cs_new_protected:Npn \__enumext_store_addto_prop:n #1
2500 {
2501   \prop_gput_if_not_in:cen { g__enumext_ \__enumext_store_name_tl _prop }
2502   {
2503     \int_eval:n { \prop_count:c { g__enumext_ \__enumext_store_name_tl _prop } + 1 }
2504   }
2505   { #1 }
2506 }
2507 \cs_generate_variant:Nn \__enumext_store_addto_prop:n { V }

```

(End of definition for __enumext_store_addto_prop:n.)

13.27.6 Function for storing content in sequence

The function `__enumext_store_addto_seq:n` stores the $\{\langle content \rangle\}$ in *sequence* defined by `save-ans` key. This function is used by `\anskey` in `enumext`, `\item*` in `keyans` and `\anspic` in `keyanspic`.

The form in which the $\{\langle content \rangle\}$ is stored in *sequence* is in a internal `enumext` or `enumext*` environments with the “*same structure*” in which the command was executed.

The “*stored content*” is retrieved by means of the `\printkeyans` command.

```
2508 \cs_new_protected:Npn \__enumext_store_addto_seq:n #1
2509 {
2510     \seq_gput_right:cn { g__enumext_ \__enumext_store_name_tl _seq } { #1 }
2511 }
2512 \cs_generate_variant:Nn \__enumext_store_addto_seq:n { v, V }
```

(End of definition for `__enumext_store_addto_seq:n`.)

13.27.7 Functions for storing structure in the sequence

The “*storing structure*” is handled by the functions `__enumext_store_level_open:` and `__enumext_store_level_close:` which are executed per level within the `enumext` environment.

```
2513 \cs_new_protected:Nn \__enumext_store_level_open:
2514 {
2515     \bool_if:NT \__enumext_check_answers_bool
2516     {
2517         \tl_if_empty:cTF { l__enumext_store_save_key_ \__enumext_level: _tl }
2518         {
2519             \__enumext_store_addto_seq:n
2520             {
2521                 \item \begin{enumext}
2522             }
2523         }
2524         {
2525             \tl_put_left:cn { l__enumext_store_save_key_ \__enumext_level: _tl }
2526             {
2527                 \item \begin{enumext} [
2528             }
2529             \tl_put_right:cn { l__enumext_store_save_key_ \__enumext_level: _tl }
2530             {
2531                 ]
2532             }
2533             \__enumext_store_addto_seq:v { l__enumext_store_save_key_ \__enumext_level: _tl }
2534         }
2535     }
2536 }
2537 \cs_new_protected:Nn \__enumext_store_level_close:
2538 {
2539     \bool_if:NT \__enumext_check_answers_bool
2540     {
2541         \__enumext_store_addto_seq:n { \end{enumext} }
2542     }
2543 }
```

(End of definition for `__enumext_store_level_open:` and `__enumext_store_level_close:.`)

The “*storing structure*” is handled by the functions `__enumext_store_level_open_vii:` and `__enumext_store_level_close_vii:` which are executed in the `enumext*` environment.

```
2544 \cs_new_protected:Nn \__enumext_store_level_open_vii:
2545 {
2546     \bool_if:NT \__enumext_check_answers_bool
2547     {
2548         \tl_if_empty:NTF \__enumext_store_save_key_vii_tl
2549         {
2550             \__enumext_store_addto_seq:n
2551             {
2552                 \item \begin{enumext*}
2553             }
2554         }
2555         {
2556             \tl_put_left:Nn \__enumext_store_save_key_vii_tl
2557             {
2558                 \item \begin{enumext*}[
2559             }
2559         }
2559 }
```



```

2560         \tl_put_right:Nn \l__enumext_store_save_key_vii_tl
2561         {
2562             ]
2563         }
2564         \__enumext_store_addto_seq:V \l__enumext_store_save_key_vii_tl
2565     }
2566 }
2567 }
2568 \cs_new_protected:Nn \__enumext_store_level_close_vii:
2569 {
2570     \bool_if:NT \l__enumext_check_answers_bool
2571     {
2572         \__enumext_store_addto_seq:n { \end{enumext*} }
2573     }
2574 }

```

(End of definition for __enumext_store_level_open_vii: and __enumext_store_level_close_vii:.)

13.27.8 Function for show marks and position

__enumext_print_keyans_box:NN
 __enumext_print_keyans_box:cc

The function __enumext_print_keyans_box:NN print a box in the left margin with \l__enumext_mark_answer_sym_tl used by the `wrap-ans`, `show-ans` and `show-pos` keys. The function takes two arguments:

#1: \l__enumext_labelwidth_X_dim
 #2: \l__enumext_labelsep_X_dim

```

2575 \cs_new_protected:Nn \__enumext_print_keyans_box:NN
2576 {
2577     \mode_leave_vertical:
2578     \skip_horizontal:n { -\dim_use:N #2 }
2579     \hbox_overlap_left:n
2580     {
2581         \makebox[ \dim_use:N #1 ][ \l__enumext_mark_position_str ]
2582         {
2583             \tl_use:N \l__enumext_mark_answer_sym_tl
2584         }
2585     }
2586     \skip_horizontal:n { \dim_use:N #2 }
2587 }
2588 \cs_generate_variant:Nn \__enumext_print_keyans_box:NN { cc }

```

(End of definition for __enumext_print_keyans_box:NN.)

13.28 The internal label and ref

The function __enumext_store_internal_ref: handles the “*internal label and ref*” system used by the `save-ref` and `mark-ref` keys for \anskey will allow to execute \ref{<store name : position>} and will return 1.(a).i.A.

__enumext_store_internal_ref:

First we will remove the dots “.” from the current <labels>, we do not want to get double dots in our references, then we will place this in the variable \l__enumext_newlabel_arg_two_tl.

```

2589 \cs_new_protected:Nn \__enumext_store_internal_ref:
2590 {
2591     \cs_set_protected:Npn \__enumext_tmp:n ##1
2592     {
2593         \tl_set_eq:cc { \l__enumext_label_copy_##1_tl } { \l__enumext_label_##1_tl }
2594         \tl_reverse:c { \l__enumext_label_copy_##1_tl }
2595         \tl_remove_once:cn { \l__enumext_label_copy_##1_tl } { . }
2596         \tl_reverse:c { \l__enumext_label_copy_##1_tl }
2597     }
2598     \clist_map_inline:nn { i, ii, iii, iv, vii } { \__enumext_tmp:n {##1} }
2599     \cs_set:Npn \__enumext_tmp:n ##1
2600     { . \tl_use:c { \l__enumext_label_copy_ \int_to_roman:n {##1} _tl } }

```

Here we need to analyse the cases where the environment is started with `enumext*` and if \anskey or `anskey*` is running alone in it or if it is running in a nested `enumext` environment within the starting environment.

```

2601     \bool_lazy_all:nT
2602     {
2603         { \bool_if_p:N \g__enumext_starred_bool }
2604         { \int_compare_p:nNn { \l__enumext_level_int } = { 0 } }
2605     }
2606     {
2607         \tl_put_right:Ne \l__enumext_newlabel_arg_two_tl
2608         { \tl_use:N \l__enumext_label_copy_vii_tl }

```

```

2609     }
2610     \bool_lazy_all:nT
2611     {
2612         { \bool_not_p:n { \g__enumext_standar_bool } }
2613         { \bool_if_p:N \l__enumext_standar_bool }
2614         { \int_compare_p:nNn { \l__enumext_level_int } > { 0 } } }
2615     }
2616     {
2617         \tl_put_right:Ne \l__enumext_newlabel_arg_two_tl
2618         {
2619             \tl_use:N \l__enumext_label_copy_vii_tl
2620             \int_step_function:nnN { 1 } { \l__enumext_level_int } \__enumext_tmp:n
2621         }
2622     }

```

If started with `enumext` and if `\anskey` or `anskey*` is running alone in it or if it is running in a nested `enumext*` environment within the starting environment.

```

2623     \bool_lazy_all:nT
2624     {
2625         { \bool_if_p:N \g__enumext_standar_bool }
2626         { \int_compare_p:nNn { \l__enumext_level_int } > { 0 } }
2627         { \int_compare_p:nNn { \l__enumext_level_h_int } = { 0 } } }
2628     }
2629     {
2630         \tl_put_right:Ne \l__enumext_newlabel_arg_two_tl
2631         {
2632             \tl_use:N \l__enumext_label_copy_i_tl
2633             \int_step_function:nnN { 2 } { \l__enumext_level_int } \__enumext_tmp:n
2634         }
2635     }
2636     \cs_set:Npn \__enumext_tmp:n ##1
2637     { \tl_use:c { l__enumext_label_copy_ \int_to_roman:n {##1} _tl } . }
2638     \bool_lazy_all:nT
2639     {
2640         { \bool_if_p:N \g__enumext_standar_bool }
2641         { \bool_if_p:N \l__enumext_starred_bool }
2642         { \int_compare_p:nNn { \l__enumext_level_int } > { 0 } } }
2643     }
2644     {
2645         \tl_put_right:Ne \l__enumext_newlabel_arg_two_tl
2646         {
2647             \int_step_function:nnN { 1 } { \l__enumext_level_int } \__enumext_tmp:n
2648             \tl_use:N \l__enumext_label_copy_vii_tl
2649         }
2650     }

```

Now we set the variable `\l__enumext_newlabel_arg_one_tl` which will contain $\langle \textit{store name} : \textit{position} \rangle$.

```

2651     \tl_put_right:Ne \l__enumext_newlabel_arg_one_tl
2652     {
2653         \l__enumext_store_name_tl \c_colon_str
2654         \int_eval:n { \prop_count:c { g__enumext_ \l__enumext_store_name_tl _prop } }
2655     }

```

Now execute the function `__enumext_newlabel:nn` and save the result in the variable `\l__enumext_write_aux_file_tl` and finally we write in the `.aux` file.

```

2656     \tl_put_right:Ne \l__enumext_write_aux_file_tl
2657     {
2658         \__enumext_newlabel:nn
2659         { \exp_not:V \l__enumext_newlabel_arg_one_tl }
2660         { \l__enumext_newlabel_arg_two_tl }
2661     }
2662     \l__enumext_write_aux_file_tl
2663 }

```

(End of definition for `__enumext_store_internal_ref:.`)

13.29 Common functions for `\anskey` and `anskey*` environment

`__enumext_store_anskey_code:n`

The internal function `__enumext_store_anskey_code:n` first we pass the $\langle \textit{argument} \rangle$ to the *prop list*, then checks the state of the variable `\l__enumext_store_ref_key_bool` handled by the *save-ref* key and will call the function `__enumext_store_internal_ref:` for the “*internal label and ref*” system. Followed by this if the *show-ans* or *show-pos* keys are active we will show the “*wrapped*” $\langle \textit{argument} \rangle$.

```

2664 \cs_new_protected:Npn \__enumext_store_anskey_code:n #1
2665 {
2666   \int_gincr:N \g__enumext_item_anskey_int
2667   \__enumext_store_addto_prop:n {#1}
2668   \bool_if:NT \l__enumext_store_ref_key_bool
2669   {
2670     \__enumext_store_internal_ref:
2671   }
2672   \__enumext_anskey_show_wrap_left:n { #1 }

```

Now we start processing the $\langle key = val \rangle$ passed to the command to build our $\backslash item$ in the variable $\backslash l_enumext_store_anskey_arg_tl$ which we will “store” in the *sequence*. First we clear the variable $\backslash l_enumext_store_anskey_arg_tl$ and process the $\langle keys \rangle$, if the `break-col` key is present and the command is running under `enumext` (not in `enumext*`) we will add $\backslash columnbreak$ and then $\backslash item$.

```

2673   \tl_clear:N \l__enumext_store_anskey_arg_tl
2674   \bool_lazy_and:nnT
2675   { \bool_if_p:N \l__enumext_store_columns_break_bool }
2676   { \bool_not_p:n { \l__enumext_starred_bool } }
2677   {
2678     \tl_put_left:Nn \l__enumext_store_anskey_arg_tl { \columnbreak }
2679   }
2680   \tl_put_right:Nn \l__enumext_store_anskey_arg_tl { \item }

```

If the `item-join` key is present and the command is running under `enumext*` we will add $\langle number \rangle$ to $\backslash l_enumext_store_anskey_arg_tl$.

```

2681   \bool_lazy_and:nnT
2682   { \bool_not_p:n { \l__enumext_starred_bool } }
2683   { \int_compare_p:nNn { \l__enumext_store_item_join_int } > { 1 } }
2684   {
2685     \tl_put_right:Ne \l__enumext_store_anskey_arg_tl
2686     {
2687       ( \exp_not:V \l__enumext_store_item_join_int )
2688     }
2689   }

```

And now we will review the keys `item-star`, `item-sym*` and `item-pos*` and pass them to $\backslash l_enumext_store_anskey_arg_tl$ along with the $\langle argument \rangle$ for $\backslash anskey$ or $\langle body \rangle$ for `anskey*`.

```

2690   \bool_if:NTF \l__enumext_store_item_star_bool
2691   {
2692     \tl_put_right:Nn \l__enumext_store_anskey_arg_tl { * }
2693     \tl_if_empty:NF \l__enumext_store_item_symbol_tl
2694     {
2695       \tl_put_right:Ne \l__enumext_store_anskey_arg_tl
2696       {
2697         [ \exp_not:V \l__enumext_store_item_symbol_tl ]
2698       }
2699     }
2700     \dim_compare:nT
2701     {
2702       \l__enumext_store_item_symbol_sep_dim != \c_zero_dim
2703     }
2704     {
2705       \tl_put_right:Ne \l__enumext_store_anskey_arg_tl
2706       {
2707         [ \exp_not:V \l__enumext_store_item_symbol_sep_dim ]
2708       }
2709     }
2710     \tl_put_right:Nn \l__enumext_store_anskey_arg_tl {#1}
2711   }
2712   {
2713     \tl_put_right:Nn \l__enumext_store_anskey_arg_tl {#1}
2714   }

```

Finally we check if the `save-ref` key are active along with the `hyperref` package load, if both conditions are met, it will create the $\backslash hyperlink$ with “symbol” set by `mark-ref` key and then store in *sequence*.

```

2715   \bool_lazy_and:nnT
2716   { \bool_if_p:N \l__enumext_store_ref_key_bool }
2717   { \bool_if_p:N \l__enumext_hyperref_bool }
2718   {
2719     \tl_put_right:Ne \l__enumext_store_anskey_arg_tl
2720     {
2721       \hfill \exp_not:N \hyperlink { \exp_not:V \l__enumext_newlabel_arg_one_tl }

```

```

2722             { \exp_not:V \l__enumext_mark_ref_sym_tl }
2723         }
2724     }
2725     \__enumext_store_addto_seq:V \l__enumext_store_anskey_arg_tl
2726 }

```

(End of definition for __enumext_store_anskey_code:n.)

__enumext_anskey_show_wrap_arg:n

The function __enumext_anskey_show_wrap_arg:n “wraps” the $\{\langle argument \rangle\}$ passed to \anskey and the $\langle body \rangle$ for anskey* when using the wrap-ans key.

```

2727 \cs_new_protected:Npn \__enumext_anskey_show_wrap_arg:n #1
2728 {
2729     \par
2730     \bool_if:NTF \l__enumext_starred_bool
2731     {
2732         \__enumext_print_keyans_box:NN
2733         \l__enumext_labelwidth_vii_dim \l__enumext_labelsep_vii_dim
2734     }
2735     {
2736         \__enumext_print_keyans_box:cc
2737         { \l__enumext_labelwidth_ \l__enumext_level: _dim }
2738         { \l__enumext_labelsep_ \l__enumext_level: _dim }
2739     }
2740     \__enumext_anskey_wrapper:n { #1 }
2741 }

```

(End of definition for __enumext_anskey_show_wrap_arg:n.)

__enumext_anskey_show_wrap_left:n

The function __enumext_anskey_show_wrap_left:n will show the “mark” defined by the mark-ans key or the “position” of the $\{\langle content \rangle\}$ stored in the prop list when using the show-pos key on the left margin next to the “wraps” $\{\langle argument \rangle\}$ passed to \anskey and the $\langle body \rangle$ in anskey* on the right side when using the show-ans key.

```

2742 \cs_new_protected:Npn \__enumext_anskey_show_wrap_left:n #1
2743 {
2744     \bool_if:NT \l__enumext_show_answer_bool
2745     {
2746         \__enumext_anskey_show_wrap_arg:n { #1 }
2747     }
2748     \bool_if:NT \l__enumext_show_position_bool
2749     {
2750         \tl_set:Nx \l__enumext_mark_answer_sym_tl
2751         {
2752             \group_begin:
2753             \exp_not:N \normalfont
2754             \exp_not:N \footnotesize [ \int_eval:n
2755                 {
2756                     \prop_count:c { g__enumext_ \l__enumext_store_name_tl _prop }
2757                 }
2758             ]
2759             \group_end:
2760         }
2761         \__enumext_anskey_show_wrap_arg:n { #1 }
2762     }
2763 }

```

(End of definition for __enumext_anskey_show_wrap_left:n.)

13.30 The command \anskey

Since we will be “storing content” in a list environment within sequences and can (more or less) manage the options passed to each level, it is necessary that we have a little more control over \item when storing.

The \anskey command will cover this point and give it similar behaviour to that of \item in the enumext and enumext* environments executed as follows \anskey[$\langle key = val \rangle$]{ $\langle content \rangle$ }.

```

break-col
item-join
item-star
item-sym*
item-pos*
unknown

```

First we’ll add the keys break-col, item-join, item-star, item-sym* and item-pos*.

```

2764 \keys_define:nn { enumext / anskey }
2765 {
2766     break-col .bool_set:N = \l__enumext_store_columns_break_bool,
2767     break-col .default:n = true,
2768     break-col .value_forbidden:n = true,
2769     item-join .int_set:N = \l__enumext_store_item_join_int,

```

```

\__enumext_anskey_unknown:n
\__enumext_anskey_unknown:n

```

```

2770     item-join .value_required:n = true,
2771     item-star .bool_set:N = \l__enumext_store_item_star_bool,
2772     item-star .default:n = true,
2773     item-star .value_forbidden:n = true,
2774     item-sym* .tl_set:N = \l__enumext_store_item_symbol_tl,
2775     item-sym* .value_required:n = true,
2776     item-pos* .dim_set:N = \l__enumext_store_item_symbol_sep_dim,
2777     item-pos* .value_required:n = true,
2778     unknown .code:n = { \l__enumext_anskey_unknown:n {#1} },
2779 }

```

The *⟨keys⟩* are stored in `\l_keys_key_str` and the value (if any) is passed as an argument to the function `\l__enumext_anskey_unknown:n`.

```

2780 \cs_new_protected:Npn \l__enumext_anskey_unknown:n #1
2781 {
2782   \exp_args:NV \l__enumext_anskey_unknown:nn \l_keys_key_str {#1}
2783 }
2784 \cs_new_protected:Npn \l__enumext_anskey_unknown:nn #1 #2
2785 {
2786   \tl_if_blank:nTF {#2}
2787   {
2788     \msg_error:nnn { enumext } { anskey-cmd-key-unknown } {#1}
2789   }
2790   {
2791     \msg_error:nnnn { enumext } { anskey-cmd-key-value-unknown } {#1} {#2}
2792   }
2793 }

```

(End of definition for `break-col` and others.)

- The `\anskey` command will only be present when using the `save-ans` key in `enumext` and `enumext*` environments, otherwise it will return an error.

\anskey We will first call the function `\l__enumext_anskey_safe_outer:` to be sure where we execute the command, then we will check the state of the variable `\l__enumext_check_answers_bool` set by the key `no-store`, if is true we will increment `\g__enumext_item_anskey_int` for the internal “*check answer*” system and execute the function `\l__enumext_anskey_safe_inner:n` to ensure that the command is not nested and that the argument is not empty, finally search the `[⟨key = val⟩]` and call the function `\l__enumext_store_anskey_code:n`.

```

2794 \NewDocumentCommand \anskey { o +m }
2795 {
2796   \l__enumext_anskey_safe_outer:
2797   \group_begin:
2798     \bool_if:NT \l__enumext_check_answers_bool
2799     {
2800       \tl_if_novalue:nF {#1}
2801       {
2802         \keys_set:nn { enumext / anskey } {#1}
2803       }
2804       \tl_if_blank:nTF {#2}
2805       {
2806         \msg_error:nn { enumext } { anskey-empty-arg }
2807       }
2808       {
2809         \l__enumext_anskey_safe_inner:
2810         \l__enumext_store_anskey_code:n {#2}
2811       }
2812     }
2813   \group_end:
2814 }

```

(End of definition for `\anskey`. This function is documented on page 13.)

13.30.1 Internal functions for the command

`\l__enumext_anskey_safe_outer:` The `\l__enumext_store_anskey_safe_outer:` function will return the appropriate messages when the command is executed outside the environment in which the `save-ans` key was activated.

`\l__enumext_anskey_safe_inner:`

```

2815 \cs_new_protected:Nn \l__enumext_anskey_safe_outer:
2816 {
2817   \bool_if:NF \l__enumext_store_active_bool
2818   {
2819     \msg_error:nnnn { enumext } { anskey-wrong-place } { anskey } { enumext }
2820   }

```

```

2821 \int_compare:nNt { \l__enumext_keyans_level_int } = { 1 }
2822 {
2823   \msg_error:nnnn { enumext } { command-wrong-place }{ anskey }{ keyans }
2824 }
2825 \int_compare:nNt { \l__enumext_keyans_level_h_int } = { 1 }
2826 {
2827   \msg_error:nnnn { enumext } { command-wrong-place }{ anskey }{ keyans* }
2828 }
2829 \int_compare:nNt { \l__enumext_keyans_pic_level_int } = { 1 }
2830 {
2831   \msg_error:nnnn { enumext } { command-wrong-place }{ anskey }{ keyanspic }
2832 }
2833 }

```

The `__enumext_anskey_safe_inner:` function will first check if the command is nested, if preceded by a not numbered `\item` or if it is in *math mode* returning the appropriate messages.

```

2834 \cs_new_protected:Nn \__enumext_anskey_safe_inner:
2835 {
2836   \int_incr:N \l__enumext_anskey_level_int
2837   \int_compare:nNt { \l__enumext_anskey_level_int } > { 1 }
2838   {
2839     \msg_error:nn { enumext } { anskey-nested }
2840   }
2841   \bool_if:NF \l__enumext_item_number_bool
2842   {
2843     \msg_error:nn { enumext } { anskey-unnumber-item }
2844   }
2845   \mode_if_math:T
2846   {
2847     \msg_error:nne { enumext } { anskey-math-mode } { \c_backslash_str anskey }
2848   }
2849 }

```

(End of definition for `__enumext_anskey_safe_outer:` and `__enumext_anskey_safe_inner:`.)

13.31 The environment `anskey*`

Managing *verbatim content* in an environment is quite complicated, I learned that when creating the `scontents` package, so to be able to have support at this point it is best to play a little with the internal code of `scontents` and *hooks*. Some considerations I should have here before implementing this:

- If some package, class or user has defined the environment with the same name somewhere in the document it would be a problem, you would not know what argument has been passed to `store-env`, if you are using the key `print-env` or the `write-out` key, sure, I can detect and modify it within the `enumext` and `enumext*` environments, but it would look strange not to have some keys available when running within these environments.
- A better (perhaps a bit paranoid) option is to define it within the environment in which the `save-ans` key is executed. and have it available only when that key is executed, here I would have absolute control of the *⟨keys⟩* and I make sure that `write-out` is not used, then using *hooks after* I undefine it and using *hook before* I check if it has been created by any package, class or user and I return a error, then the user will have to see how to solve the problem.

`__enumext_undefine_anskey_env:`

The function `__enumext_undefine_anskey_env:` will undefine the environment `anskey*` and will be passed to the function `__enumext_execute_after_env:` (§13.32) which is executed after the environment in which the key `save-ans` is active.

```

2850 \cs_new_protected:Nn \__enumext_undefine_anskey_env:
2851 {
2852   \cs_undefine:c { anskey* }
2853   \cs_undefine:c { endanskey* }
2854   \cs_undefine:c { __scontents_anskey*_env_begin: }
2855   \cs_undefine:c { __scontents_anskey*_env_end: }
2856 }

```

Detection of the `anskey*` environment outside the `enumext` and `enumext*` environments.

```

2857 \__enumext_before_env:nn { enumext }
2858 {
2859   \bool_lazy_and:nnT
2860   { \int_compare_p:nNn { \l__enumext_level_int } = { 0 } }
2861   { \int_compare_p:nNn { \l__enumext_level_h_int } = { 0 } }
2862   {
2863     \cs_if_free:cf { __scontents_anskey*_env_begin: }
2864     {

```

```

2865         \msg_error:nnn { enumext } { anskey-env-error } { anskey* }
2866     }
2867 }
2868 }
2869 \__enumext_before_env:nn { enumext* }
2870 {
2871     \bool_lazy_and:nnT
2872     { \int_compare_p:nNn { \l__enumext_level_int } = { 0 } }
2873     { \int_compare_p:nNn { \l__enumext_level_h_int } = { 0 } }
2874     {
2875         \cs_if_free:cF { __scontents_anskey*_env_begin: }
2876         {
2877             \msg_error:nnn { enumext } { anskey-env-error } { anskey* }
2878         }
2879     }
2880 }

```

Detection of the `anskey*` environment inside the `keyans`, `keyans*` and `keyanspic` environments, if preceded by a not numbered `\item` or if it is in *math mode* returning the appropriate messages.

```

2881 \__enumext_before_env:nn { anskey* }
2882 {
2883     \int_compare:nNnT { \l__enumext_keyans_level_int } = { 1 }
2884     {
2885         \msg_error:nnn { enumext } { anskey-env-wrong } { keyans }
2886     }
2887     \int_compare:nNnT { \l__enumext_keyans_level_h_int } = { 1 }
2888     {
2889         \msg_error:nnn { enumext } { anskey-env-wrong } { keyans* }
2890     }
2891     \int_compare:nNnT { \l__enumext_keyans_pic_level_int } = { 1 }
2892     {
2893         \msg_error:nnn { enumext } { anskey-env-wrong } { keyanspic }
2894     }
2895     \bool_if:NF \l__enumext_item_number_bool
2896     {
2897         \msg_error:nn { enumext } { anskey-unnumber-item }
2898     }
2899     \mode_if_math:T
2900     {
2901         \msg_error:nnn { enumext } { anskey-math-mode } { anskey* }
2902     }
2903 }

```

(End of definition for `__enumext_undefine_anskey_env:`.)

`anskey*`

The function `__enumext_anskey_env_make:n` creates the environment `anskey*` (custom version of `scontents` environment) by setting the initial keys `store-env={⟨store name⟩}` and `print-env=false`.

To maintain the *scope* of the environment and that it is only active when the key `save-ans` is active we will pass this function to the function `__enumext_storing_exec:($13.26.1)` and we will execute it only if the variable `\l__enumext_anskey_env_bool` is true, with this we prevent it from being executed again when the environment is nested and the key `save-ans` is active, which returns an error for part of the package `scontents`.

```

2904 \cs_new_protected:Npn \__enumext_anskey_env_make:n #1
2905 {
2906     \bool_if:NT \l__enumext_anskey_env_bool
2907     {
2908         \newenvsc{anskey*}[store-env=#1,print-env=false]
2909         \__enumext_anskey_env_exec:
2910     }
2911 }
2912 \cs_generate_variant:Nn \__enumext_anskey_env_make:n { V }

```

The function `__enumext_anskey_env_define_keys:` will add the keys `break-col`, `item-join`, `item-join`, `item-star`, `item-sym*` and `item-pos*` and will leave the keys `print-env`, `store-env` and `write-out` undefined. We will apply this function using the *hook* function `__enumext_before_env:nn`.

```

2913 \cs_new_protected:Nn \__enumext_anskey_env_define_keys:
2914 {
2915     \keys_define:nn { scontents / scontents }
2916     {
2917         break-col .bool_gset:N = \g__enumext_store_columns_break_bool,
2918         break-col .default:n = true,

```



```

2919     break-col .value_forbidden:n = true,
2920     item-join .int_gset:N = \g__enumext_store_item_join_int,
2921     item-join .value_required:n = true,
2922     item-star .bool_gset:N = \g__enumext_store_item_star_bool,
2923     item-star .default:n = true,
2924     item-star .value_forbidden:n = true,
2925     item-sym* .tl_gset:N = \g__enumext_store_item_symbol_tl,
2926     item-sym* .value_required:n = true,
2927     item-pos* .dim_gset:N = \g__enumext_store_item_symbol_sep_dim,
2928     item-pos* .value_required:n = true,
2929     wrap-ans .cs_set_protected:Np = \__enumext_anskey_wrapper:n ##1,
2930     wrap-ans .initial:n =
2931         {
2932             \fbox{\parbox[t]{\dimeval{\itemwidth -2\fbxsep -2\fbxrule}}{##1}}
2933         },
2934     wrap-ans .value_required:n = true,
2935     mark-ans .tl_set:N = \l__enumext_mark_answer_sym_tl,
2936     mark-ans .initial:n = \textasteriskcentered,
2937     mark-ans .value_required:n = true,
2938     mark-pos .choice:,
2939     mark-pos / left .code:n = \str_set:Nn \l__enumext_mark_position_str { l },
2940     mark-pos / right .code:n = \str_set:Nn \l__enumext_mark_position_str { r },
2941     mark-pos / center .code:n = \str_set:Nn \l__enumext_mark_position_str { c },
2942     mark-pos / unknown .code:n =
2943         \msg_error:nneee { enumext } { unknown-choice }
2944         { mark-pos } { left, ~ right, ~ center } { \exp_not:n {##1} },
2945     mark-pos .initial:n = right,
2946     mark-pos .value_required:n = true,
2947     mark-sep .dim_set:N = \l__enumext_mark_sym_sep_dim,
2948     mark-sep .value_required:n = true,
2949     show-ans .bool_set:N = \l__enumext_show_answer_bool,
2950     show-ans .initial:n = false,
2951     show-ans .value_required:n = true,
2952     show-pos .bool_set:N = \l__enumext_show_position_bool,
2953     show-pos .initial:n = false,
2954     show-pos .value_required:n = true,
2955     print-env .undefine:,
2956     store-env .undefine:,
2957     write-out .undefine:,
2958     unknown .code:n = { \__enumext_anskey_env_unknown:n {##1} },
2959 }
2960 }

```

The `<keys>` are stored in `\l_keys_key_str` and the value (if any) is passed as an argument to the function `__enumext_anskey_env_unknown:n`.

```

2961 \cs_new_protected:Npn \__enumext_anskey_env_unknown:n #1
2962 {
2963     \exp_args:NV \__enumext_anskey_env_unknown:nn \l_keys_key_str {#1}
2964 }
2965 \cs_new_protected:Npn \__enumext_anskey_env_unknown:nn #1#2
2966 {
2967     \tl_if_blank:nTF {#2}
2968     {
2969         \msg_error:nnn { enumext } { anskey-env-key-unknown } {#1}
2970     }
2971     {
2972         \msg_error:nnnn { enumext } { anskey-env-key-value-unknown } {#1} {#2}
2973     }
2974 }

```

The function `__enumext_anskey_env_reset_keys:` will leave the keys `break-col`, `item-join`, `item-join`, `item-star`, `item-sym*` and `item-pos*` undefined. We will apply this function using the *hook* function `__enumext_after_env:nn`.

```

2975 \cs_new_protected:Nn \__enumext_anskey_env_reset_keys:
2976 {
2977     \keys_define:nn { scontents / scontents }
2978     {
2979         break-col .undefine:,
2980         item-join .undefine:,
2981         item-star .undefine:,
2982         item-sym* .undefine:,
2983         item-pos* .undefine:,

```

```

2984     wrap-ans .undefine:,
2985     mark-ans .undefine:,
2986     mark-pos .undefine:,
2987     mark-sep .undefine:,
2988     show-ans .undefine:,
2989     show-pos .undefine:,
2990     write-out .code:n = {
2991         \bool_set_false:N \l__scontents_storing_bool
2992         \bool_set_true:N \l__scontents_writing_bool
2993         \tl_set:Nn \l__scontents_fname_out_tl {##1}
2994     },
2995     write-out .value_required:n = true,
2996     print-env .meta:nn = { scontents } { print-env = ##1 },
2997     print-env .default:n = true,
2998     store-env .meta:nn = { scontents } { store-env = ##1 },
2999     unknown .code:n = { \l__scontents_parse_environment_keys:n {##1} },
3000 }
3001 }

```

The function `__enumext_rescan_anskey_env:n` will be responsible for bringing the *body* of the environment saved in the sequence `\g__scontents_name_{store name}_seq` to pass it to our *sequence* and *prop list*.

```

3002 \cs_new_protected:Npn \__enumext_rescan_anskey_env:n #1
3003 {
3004     \group_begin:
3005     \int_set:Nn \tex_newlinechar:D { `^^J }
3006     \__scontents_rescan_tokens:x
3007     {
3008         \endgroup % This assumes \catcode`\=0... Things might go off otherwise.
3009         #1
3010     }
3011 }

```

(End of definition for *anskey** and others. This function is documented on page 14.)

`__enumext_anskey_env_exec:` The function `__enumext_anskey_env_exec:` will be responsible for processing all the code necessary for the execution of the environment. The first thing will be to add our *keys*.

```

3012 \cs_new_protected:Nn \__enumext_anskey_env_exec:
3013 {
3014     \__enumext_before_env:nn { anskey* }
3015     {
3016         \__enumext_anskey_env_define_keys:
3017     }

```

Now we will execute our actions after the *anskey** environment is closed. We'll fetch the contents of the *environment body* that is now saved in `\g__scontents_name_{store name}_seq` and store it in the variable `\l__enumext_store_anskey_env_tl` then we execute the rest of the functions.

```

3018     \hook_if_empty:nF {env/anskey*/after}
3019     {
3020         \hook_gremove_code:nn {env/anskey*/after} { * }
3021     }
3022     \__enumext_after_env:nn { anskey* }
3023     {
3024         \__enumext_anskey_env_save_keys:
3025         \tl_clear:N \l__enumext_store_anskey_env_tl
3026         \tl_clear:N \l__enumext_store_anskey_opt_tl
3027         \bool_if:NT \l__enumext_check_answers_bool
3028         {
3029             \tl_gset:Ne \l__enumext_store_anskey_env_tl
3030             {
3031                 \seq_item:ce { g__scontents_name_ \l__enumext_store_name_tl _seq } { -1 }
3032             }
3033             \regex_match:nVTF
3034             { ^\s* \z | ^\s* \u{c__scontents_hidden_space_str} \z }
3035             \l__enumext_store_anskey_env_tl
3036             {
3037                 \msg_error:nn { enumext } { anskey-empty-arg }
3038             }
3039             {
3040                 \__enumext_anskey_env_store:
3041             }
3042         }

```

```

3043     \__enumext_anskey_env_clean_vars:
3044     \__enumext_anskey_env_reset_keys:
3045   }
3046 }

```

- The use of `\hook_gremove_code:nn` is necessary here, otherwise the `{\code}` passed to `__enumext_after_env:nn{anskey*}` will be accumulated for each execution. The last function `__enumext_anskey_env_reset_keys:` is necessary so as not to hinder any `scontents` environment running within `enumext` or `enumext*`.

(End of definition for `__enumext_anskey_env_exec:`.)

```

\__enumext_anskey_env_save_keys:
\__enumext_anskey_env_store:
\__enumext_anskey_env_clean_vars:

```

The function `__enumext_anskey_env_save_keys:` processing the `[key = val]` passed to the environment and save this in the variable `\l__enumext_store_anskey_opt_tl`. If the `break-col` key is present and the environment is running under `enumext` (not in `enumext*`) we will add the key `break-col`.

```

3047 \cs_new_protected:Nn \__enumext_anskey_env_save_keys:
3048 {
3049   \bool_lazy_and:nnT
3050   { \bool_if_p:N \g__enumext_store_columns_break_bool }
3051   { \bool_not_p:n { \l__enumext_starred_bool } }
3052   {
3053     \tl_put_left:Ne \l__enumext_store_anskey_opt_tl { ,break-col, }
3054   }

```

If the `item-join` key is present and the command is running under `enumext*` we will add to `\l__enumext_store_anskey_opt_tl`.

```

3055   \bool_lazy_and:nnT
3056   { \bool_not_p:n { \l__enumext_starred_bool } }
3057   { \int_compare_p:nNn { \g__enumext_store_item_join_int } > { 1 } }
3058   {
3059     \tl_put_left::Ne \l__enumext_store_anskey_opt_tl
3060     {
3061       ,item-join = \exp_not:V \g__enumext_store_item_join_int,
3062     }
3063   }

```

And now we will review the keys `item-star`, `item-sym*` and `item-pos*` and pass them to `\l__enumext_store_anskey_opt_tl`.

```

3064   \bool_if:NT \g__enumext_store_item_star_bool
3065   {
3066     \tl_put_left:Ne \l__enumext_store_anskey_opt_tl
3067     {
3068       ,item-star,
3069     }
3070     \tl_if_empty:NF \g__enumext_store_item_symbol_tl
3071     {
3072       \tl_put_left:Ne \l__enumext_store_anskey_opt_tl
3073       {
3074         ,item-sym* = \exp_not:V \g__enumext_store_item_symbol_tl,
3075       }
3076     }
3077     \dim_compare:nT
3078     {
3079       \g__enumext_store_item_symbol_sep_dim != \c_zero_dim
3080     }
3081     {
3082       \tl_put_left:Ne \l__enumext_store_anskey_opt_tl
3083       {
3084         ,item-pos* = \exp_not:V \g__enumext_store_item_symbol_sep_dim,
3085       }
3086     }
3087   }
3088 }

```

The function `__enumext_anskey_env_store:` will be responsible for storing the content of the environment using the functions `__enumext_store_anskey_code:n` and `__enumext_rescan_anskey_env:n`.

```

3089 \cs_new_protected:Nn \__enumext_anskey_env_store:
3090 {
3091   \group_begin:
3092   \tl_if_empty:NTF \l__enumext_store_anskey_opt_tl
3093   {
3094     \exp_args:Ne
3095     \__enumext_store_anskey_code:n
3096     {

```

```

3097         \__enumext_rescan_anskey_env:n { \__enumext_store_anskey_env_tl }
3098     }
3099 }
3100 {
3101     \keys_set_known:nV { enumext / anskey } \__enumext_store_anskey_opt_tl
3102     \exp_args:Ne
3103     \__enumext_store_anskey_code:n
3104     {
3105         \__enumext_rescan_anskey_env:n { \__enumext_store_anskey_env_tl }
3106     }
3107 }
3108 \group_end:
3109 }

```

The function `__enumext_anskey_env_clean_vars:` will return the global variables used by the `⟨keys⟩` to their initial state.

```

3110 \cs_new_protected:Nn \__enumext_anskey_env_clean_vars:
3111 {
3112     \bool_gset_false:N \g__enumext_store_columns_break_bool
3113     \int_gzero:N       \g__enumext_store_item_join_int
3114     \bool_gset_false:N \g__enumext_store_item_star_bool
3115     \tl_gclear:N       \g__enumext_store_item_symbol_tl
3116     \dim_gzero:N       \g__enumext_store_item_symbol_sep_dim
3117 }

```

(End of definition for `__enumext_anskey_env_save_keys:`, `__enumext_anskey_env_store:`, and `__enumext_anskey_env_clean_vars:`.)

13.32 Executing anskey*, check-ans and write .log

`__enumext_execute_after_env:`

The `__enumext_execute_after_env:` function will first return the appropriate message for the end of the environment in which the `save-ans` key is being executed, then call the `__enumext_item_answer_diff:` function and then will write the values of the global variables used to the `.log` file. If the key `check-ans` is active it will execute the function `__enumext_check_ans_show:` and show the result in the terminal, otherwise it will execute the function `__enumext_check_ans_log:` and write the results in the `.log` file, undefine the environment `anskey*` (§13.31) through the function `__enumext_undefine_anskey_env:` and finally we execute the function `__enumext_reset_global_vars:` returning the used variables to their original state.

```

3118 \cs_new_protected:Nn \__enumext_execute_after_env:
3119 {
3120     \int_compare:nNnT { \__enumext_level_int } = { 0 }
3121     {
3122         \tl_if_empty:NF \g__enumext_store_name_tl
3123         {
3124             \__enumext_stop_save_ans_msg:
3125             \__enumext_item_answer_diff:
3126             \__enumext_log_global_vars:
3127             \__enumext_log_answer_vars:
3128             \bool_if:NTF \g__enumext_check_ans_key_bool
3129             {
3130                 \__enumext_check_ans_show:
3131             }
3132             { \__enumext_check_ans_log: }
3133             \__enumext_undefine_anskey_env:
3134         }
3135         \__enumext_reset_global_vars:
3136     }
3137 }

```

(End of definition for `__enumext_execute_after_env:`.)

- This function is passed to the function `__enumext_after_env:nn` for the environments `enumext` (§13.39) and `enumext*` (§13.44) and it is executed only when the environments are not nested or at some level of these..

13.33 Common functions for keyans, keyans* and keyanspic

13.33.1 Storing content in prop list

`__enumext_keyans_addto_prop:n`

The function `__enumext_keyans_addto_prop:n` will pass the the current `⟨label⟩` for `\item*` in `keyans` environment and the current `⟨label⟩` for `\anspic*` in `keyanspic` environment followed by the `⟨contents⟩` of the *optional argument* of both commands to the `__enumext_store_current_label_tl` variable, which will be stored to the *prop list* defined by the `save-ans` key using the function `__enumext_store_addto_prop:V`.

```

3138 \cs_new_protected:Npn \__enumext_keyans_addto_prop:n #1
3139 {
3140   \tl_clear:N \l__enumext_store_current_label_tl
3141   \int_compare:nNnTF { \l__enumext_keyans_pic_level_int } = { 1 }
3142   {
3143     \tl_put_right:Ne \l__enumext_store_current_label_tl { \l__enumext_label_vi_tl }
3144   }
3145   {
3146     \tl_put_right:Ne \l__enumext_store_current_label_tl { \l__enumext_label_v_tl }
3147   }

```

If the *optional argument* is present and the `save-sep` key is not empty, we save it.

```

3148   \tl_if_novalue:nF { #1 }
3149   {
3150     \tl_if_empty:NF \l__enumext_store_keyans_item_opt_sep_v_tl
3151     {
3152       \tl_put_right:Ne \l__enumext_store_current_label_tl
3153       {
3154         \l__enumext_store_keyans_item_opt_sep_v_tl
3155       }
3156     }
3157     \tl_put_right:Ne \l__enumext_store_current_label_tl { #1 }
3158   }
3159   \__enumext_store_addto_prop:V \l__enumext_store_current_label_tl
3160 }

```

(End of definition for `__enumext_keyans_addto_prop:n`.)

13.33.2 The `save-ref` key for `keyans`, `keyans*` and `keyanspic`

The “*internal label and ref*” system for the `keyans`, `keyans*` and `keyanspic` environments has *slight differences* with the one implemented for `\anskey` basically because in this environments the interest is in the current *⟨label⟩* for `\item*` and `\anspic*` with the *⟨contents⟩* of the *optional argument*. The mechanism defined here will allow to execute `\ref{⟨store name : position⟩}` and will return `1`. (A).

The function `__enumext_keyans_store_ref:` handles the “*internal label and ref*” system used by the `save-ref` key for `\item*` and `\anspic*` commands. First we will create copies of the current *⟨labels⟩* and remove the dots “.” from them, we do not want to get double dots in references.

```

3161 \cs_new_protected:Npn \__enumext_keyans_store_ref:
3162 {
3163   \bool_if:NT \l__enumext_store_ref_key_bool
3164   {
3165     \cs_set_protected:Npn \__enumext_tmp:n ##1
3166     {
3167       \tl_set_eq:cc { l__enumext_label_copy_##1_tl } { l__enumext_label_##1_tl }
3168       \tl_reverse:c { l__enumext_label_copy_##1_tl }
3169       \tl_remove_once:cn { l__enumext_label_copy_##1_tl } { . }
3170       \tl_reverse:c { l__enumext_label_copy_##1_tl }
3171     }
3172     \clist_map_inline:nn { i, v, vi, vii, viii } { \__enumext_tmp:n {##1} }
3173     \__enumext_keyans_store_ref_aux_i:
3174   }
3175 }

```

The auxiliary function `__enumext_keyans_store_ref_aux_i:` set the variable `\l__enumext_newlabel_arg_one_tl` which will contain `{⟨store name : position⟩}` analyzing whether the environment in which they are executed is `enumext*` or `enumext`.

```

3176 \cs_new_protected:Npn \__enumext_keyans_store_ref_aux_i:
3177 {
3178   \bool_if:NT \g__enumext_starred_bool
3179   {
3180     \tl_set_eq:NN \l__enumext_label_copy_i_tl \l__enumext_label_copy_vii_tl
3181   }
3182   \int_compare:nNnT { \l__enumext_keyans_pic_level_int } = { 1 }
3183   {
3184     \tl_put_right:Ne \l__enumext_newlabel_arg_two_tl
3185     { \l__enumext_label_copy_i_tl . \l__enumext_label_copy_vi_tl }
3186   }
3187   \int_compare:nNnT { \l__enumext_keyans_level_int } = { 1 }
3188   {
3189     \tl_put_right:Ne \l__enumext_newlabel_arg_two_tl
3190     { \l__enumext_label_copy_i_tl . \l__enumext_label_copy_v_tl }

```

```

3191     }
3192     \int_compare:nNnT { \l__enumext_keyans_level_h_int } = { 1 }
3193     {
3194         \tl_put_right:Ne \l__enumext_newlabel_arg_two_tl
3195         { \l__enumext_label_copy_i_tl . \l__enumext_label_copy_viii_tl }
3196     }
3197     \tl_put_right:Ne \l__enumext_newlabel_arg_one_tl
3198     {
3199         \l__enumext_store_name_tl \c_colon_str
3200         \int_eval:n { \prop_count:c { g__enumext_ \l__enumext_store_name_tl _prop } }
3201     }
3202     \__enumext_keyans_store_ref_aux_ii:
3203 }

```

Now auxiliary function `__enumext_keyans_store_ref_aux_ii:` save the result in the variable `\l__enumext_write_aux_file_tl` and finally we write in the `.aux` file.

```

3204 \cs_new_protected:Nn \__enumext_keyans_store_ref_aux_ii:
3205 {
3206     \tl_put_right:Ne \l__enumext_write_aux_file_tl
3207     {
3208         \__enumext_newlabel:nn
3209         { \exp_not:V \l__enumext_newlabel_arg_one_tl }
3210         { \l__enumext_newlabel_arg_two_tl }
3211     }
3212     \l__enumext_write_aux_file_tl
3213 }

```

(End of definition for `__enumext_keyans_store_ref:`, `__enumext_keyans_store_ref_aux_i:`, and `__enumext_keyans_store_ref_aux_ii:`.)

13.33.3 Storing content in sequence

```

\__enumext_keyans_addto_seq:n
\__enumext_keyans_addto_seq_link:

```

The function `__enumext_keyans_addto_seq:n` will pass the contents of the current *label* `\l__enumext_label_v_tl` for the `keyans` environment and the `\l__enumext_label_vi_tl` for the `keyanspic` environment when using `\item*` and `\anspic*`, followed by the *contents* of the *optional argument* of both commands to the `\l__enumext_store_current_label_tl` variable to the sequence defined by the `save-ans` key.

```

3214 \cs_new_protected:Npn \__enumext_keyans_addto_seq:n #1
3215 {
3216     \tl_clear:N \l__enumext_store_current_label_tl
3217     \int_compare:nNnTF { \l__enumext_keyans_pic_level_int } = { 1 }
3218     {
3219         \tl_put_right:Ne \l__enumext_store_current_label_tl { \item \l__enumext_label_vi_tl }
3220     }
3221     {
3222         \tl_put_right:Ne \l__enumext_store_current_label_tl { \item \l__enumext_label_v_tl }
3223     }
3224     \tl_if_novalue:nF { #1 }
3225     {
3226         \tl_if_empty:NF \l__enumext_store_keyans_item_opt_sep_v_tl
3227         {
3228             \tl_put_right:Ne \l__enumext_store_current_label_tl
3229             {
3230                 \l__enumext_store_keyans_item_opt_sep_v_tl
3231             }
3232         }
3233         \tl_put_right:Ne \l__enumext_store_current_label_tl { #1 }
3234     }
3235     \__enumext_keyans_addto_seq_link:
3236 }

```

Checks if the `save-ref` key is active along with the `hyperref` package load, if both conditions are met, it will create the `\hyperlink` and then store using the `__enumext_store_addto_seq:V` function. Finally, copy the contents of the variable `\l__enumext_store_current_label_tl` into the global variable `\g__enumext_check_ans_item_tl` to be used by the function `__enumext_check_starred_cmd:n` and increment the value of the integer variable `\g__enumext_item_anskey_int` handled by the `check-ans` key.

```

3237 \cs_new_protected:Nn \__enumext_keyans_addto_seq_link:
3238 {
3239     \bool_lazy_and:nnT
3240     { \bool_if_p:N \l__enumext_store_ref_key_bool }
3241     { \bool_if_p:N \l__enumext_hyperref_bool }

```

```

3242     {
3243       \tl_put_right:Ne \l__enumext_store_current_label_tl
3244       {
3245         \hfill \exp_not:N \hyperlink
3246         {
3247           \exp_not:V \l__enumext_newlabel_arg_one_tl
3248         }
3249         { \exp_not:V \l__enumext_mark_ref_sym_tl }
3250       }
3251     }
3252     \__enumext_store_addto_seq:V \l__enumext_store_current_label_tl
3253     \bool_if:NT \l__enumext_check_answers_bool
3254     {
3255       \int_gincr:N \g__enumext_item_anskey_int
3256     }
3257   }

```

(End of definition for `__enumext_keyans_addto_seq:n` and `__enumext_keyans_addto_seq_link:.`)

13.33.4 The show-ans and show-pos keys for keyans and keyanspic

The function `__enumext_keyans_save_item_opt:n` will save the optional argument of `\item*` and `\anspic*` in the variable `\l__enumext_store_current_opt_arg_tl`.

```

\__enumext_keyans_save_item_opt:n
\__enumext_keyans_show_item_opt:
\__enumext_keyans_show_item_opt_viii:
3258 \cs_new_protected:Npn \__enumext_keyans_save_item_opt:n #1
3259 {
3260   \tl_if_novalue:nF { #1 }
3261   {
3262     \tl_set:Ne \l__enumext_store_current_opt_arg_tl { #1 }
3263   }
3264 }

```

The function `__enumext_keyans_show_item_opt:` will print the optional arguments of `\item*` and `\anspic*` when the `show-ans` or `show-pos` keys are set next to the key `wrap-opt` in `keyans` and `keyanspic` environments.

```

3265 \cs_new_protected:Nn \__enumext_keyans_show_item_opt:
3266 {
3267   \tl_if_empty:NF \l__enumext_store_current_opt_arg_tl
3268   {
3269     \bool_lazy_or:nnT
3270     { \bool_if_p:N \l__enumext_show_answer_bool }
3271     { \bool_if_p:N \l__enumext_show_position_bool }
3272     {
3273       \__enumext_keyans_wrapper_opt_v:n
3274       { \l__enumext_store_current_opt_arg_tl } \c_space_tl
3275     }
3276   }
3277 }

```

The function `__enumext_keyans_show_item_opt_viii:` will print the optional argument of `\item*` when the `show-ans` or `show-pos` keys are set next to the key `wrap-opt` in `keyans*` environment.

```

3278 \cs_new_protected:Nn \__enumext_keyans_show_item_opt_viii:
3279 {
3280   \tl_if_empty:NF \l__enumext_store_current_opt_arg_tl
3281   {
3282     \bool_lazy_or:nnT
3283     { \bool_if_p:N \l__enumext_show_answer_bool }
3284     { \bool_if_p:N \l__enumext_show_position_bool }
3285     {
3286       \__enumext_keyans_wrapper_opt_viii:n
3287       { \l__enumext_store_current_opt_arg_tl } \c_space_tl
3288     }
3289   }
3290 }

```

(End of definition for `__enumext_keyans_save_item_opt:n`, `__enumext_keyans_show_item_opt:`, and `__enumext_keyans_show_item_opt_viii:.`)

```

\__enumext_keyans_pos_mark_set:
\__enumext_keyans_show_ans:
\__enumext_keyans_show_pos:

```

The function `__enumext_keyans_pos_mark_set:` adjusts the horizontal spaces for the `mark-sep*` key taking into account the value of the `align` key and the width of `\label`.

```

3291 \cs_new_protected:Nn \__enumext_keyans_pos_mark_set:
3292 {
3293   \__enumext_label_width_by_box:Nn
3294   \l__enumext_mark_sep_tmpa_dim { \l__enumext_label_v_tl }

```



```

3295 \str_case:Vn \l__enumext_align_label_pos_v_str
3296 {
3297   { l }
3298   {
3299     \dim_set:Nn \l__enumext_mark_sep_tmpb_dim { \c_zero_dim }
3300   }
3301   { r }
3302   {
3303     \dim_set:Nn \l__enumext_mark_sep_tmpb_dim
3304       { \l__enumext_labelwidth_v_dim - \l__enumext_mark_sep_tmpa_dim }
3305   }
3306   { c }
3307   {
3308     \dim_set:Nn \l__enumext_mark_sep_tmpb_dim
3309       { 0.5\l__enumext_labelwidth_v_dim - 0.5\l__enumext_mark_sep_tmpa_dim }
3310   }
3311 }

```

Here we set the default values for the key `mark-ans*`, `mark-sep*` and `mark-pos*`.

```

3312 \dim_compare:nNnT { \l__enumext_mark_sym_sep_v_dim } = { \c_zero_dim }
3313 {
3314   \dim_set:Nn \l__enumext_mark_sym_sep_v_dim { \l__enumext_labelsep_v_dim }
3315 }
3316 \tl_set_eq:NN \l__enumext_mark_answer_sym_tl \l__enumext_mark_answer_sym_v_tl
3317 \dim_add:Nn \l__enumext_mark_sym_sep_v_dim { \l__enumext_mark_sep_tmpb_dim }
3318 \str_set_eq:NN \l__enumext_mark_position_str \l__enumext_mark_position_v_str
3319 }

```

The function `__enumext_keyans_show_ans:` will print the *⟨symbol⟩* set by the `mark-ans*` key when the `show-ans` key is active.

```

3320 \cs_new_protected:Nn \__enumext_keyans_show_ans:
3321 {
3322   \bool_lazy_all:nT
3323   {
3324     { \bool_if_p:N \l__enumext_show_answer_bool }
3325     { \bool_if_p:N \l__enumext_item_wrap_key_bool }
3326   }
3327   {
3328     \__enumext_keyans_pos_mark_set:
3329     \__enumext_print_keyans_box:NN
3330       \l__enumext_labelwidth_v_dim \l__enumext_mark_sym_sep_v_dim
3331   }
3332 }

```

The function `__enumext_keyans_show_pos:` will print the *⟨position⟩* of the stored content in *prop list*. Need add `1` to `\g__enumext_⟨store name⟩_prop` for `keyans` environment.

```

3333 \cs_new_protected:Nn \__enumext_keyans_show_pos:
3334 {
3335   \int_compare:nNnTF { \l__enumext_keyans_level_int } = { 1 }
3336   {
3337     \int_incr:N \l__enumext_show_pos_tmp_int
3338   }
3339   {
3340     \int_zero:N \l__enumext_show_pos_tmp_int
3341   }
3342   \bool_lazy_all:nT
3343   {
3344     { \bool_if_p:N \l__enumext_show_position_bool }
3345     { \bool_if_p:N \l__enumext_item_wrap_key_bool }
3346   }
3347   {
3348     \tl_set:Nc \l__enumext_mark_answer_sym_v_tl
3349     {
3350       \group_begin:
3351       \exp_not:N \normalfont
3352       \exp_not:N \footnotesize [ \int_eval:n
3353         {
3354           \prop_count:c { g__enumext_ \l__enumext_store_name_tl _prop }
3355           + \l__enumext_show_pos_tmp_int
3356         }
3357       ]
3358       \group_end:

```

```

3359     }
3360     \__enumext_keyans_pos_mark_set:
3361     \__enumext_print_keyans_box:NN
3362     \l__enumext_labelwidth_v_dim \l__enumext_mark_sym_sep_v_dim
3363   }
3364 }

```

(End of definition for `__enumext_keyans_pos_mark_set:`, `__enumext_keyans_show_ans:`, and `__enumext_keyans_show_pos:`.)

13.34 Redefining `\item` and `\makelabel` in enumext

Redefining the `\item` command is not as simple as I thought. This command works in conjunction with the `\makelabel` command so I have to redefine both of them, in addition to this, we will have to use a couple of *global* variables to pass the values from one command to the other.

When *labeling* PDF is active `\makelabel` is redefined as `\hss #1` and the only way to get the `align` key to work correctly is to redefine `\makelabel` using `\makebox`. The best way to implement this is to use the conditional command `\IfDocumentMetadataTF` to force this redefinition and the dedicated `mode-box` key to manually activate it by the user.

The `\item` and `\item[⟨custom⟩]` commands work in the usual way on `enumext` and we will add `\item*`, `\item*[⟨symbol⟩]` and `\item*[⟨symbol⟩][⟨offset⟩]`.

```
\__enumext_default_item:n
```

First we will see if the *optional argument* is present, if it is NOT present we will check the state of the variable `\l__enumext_check_answers_bool` set by the key `no-store`, set the boolean variable `\l__enumext_wrap_label_X_bool` to “true” for the key `wrap-label` and execute `__enumext_item_std:w` and the key `itemindent`, otherwise we will check the state of the boolean variable `\l__enumext_wrap_label_opt_X_bool` set by the key `wrap-label*` and execute `__enumext_item_std:w` with the *optional argument* and the key `itemindent`.

```

3365 \cs_new_protected:Npn \__enumext_default_item:n #1
3366 {
3367   \tl_if_novalue:nTF {#1}
3368   {
3369     \bool_if:NT \l__enumext_check_answers_bool
3370     {
3371       \int_gincr:N \g__enumext_item_number_int
3372       \bool_set_true:N \l__enumext_item_number_bool
3373     }
3374     \bool_set_true:c { \l__enumext_wrap_label_ \__enumext_level: _bool }
3375     \__enumext_item_std:w \tl_use:c { \l__enumext_fake_item_indent_ \__enumext_level: _tl }
3376   }
3377   {
3378     \bool_set_eq:cc
3379     { \l__enumext_wrap_label_ \__enumext_level: _bool }
3380     { \l__enumext_wrap_label_opt_ \__enumext_level: _bool }
3381     \__enumext_item_std:w [#1] \tl_use:c { \l__enumext_fake_item_indent_ \__enumext_level: _tl }
3382   }
3383 }

```

(End of definition for `__enumext_default_item:n`.)

```

\__enumext_item_starred_exec:nn
\__enumext_item_starred_exec:

```

The `\item*`, `\item*[⟨symbol⟩]` and `\item*[⟨symbol⟩][⟨offset⟩]` works like the *numbered* `\item`, but placing a `⟨symbol⟩` to the “left” of the `⟨label⟩` separated from it by the value the second *optional argument* `⟨offset⟩`.

```

#1: \l__enumext_item_symbol_X_tl
#2: \l__enumext_item_symbol_sep_X_dim

```

First we will make a copy of `\l__enumext_item_symbol_X_tl` which is set by the key `item-sym*` or passed as “first” *optional argument* in the global variable `\g__enumext_item_symbol_aux_tl`, followed by setting the variable `\l__enumext_item_symbol_sep_X_dim` set by the key `item-pos*` or by the “second” *optional argument*, then we will see the state of the variable `\l__enumext_check_answers_bool` set by the key `no-store`, set the boolean variable `\l__enumext_wrap_label_X_bool` to “true” for the key `wrap-label` and execute `__enumext_item_std:w` and the key `itemindent`.

```

3384 \cs_new_protected:Npn \__enumext_item_starred_exec:nn #1 #2
3385 {
3386   \tl_if_novalue:nTF {#1}
3387   {
3388     \tl_gset_eq:Nc
3389     \g__enumext_item_symbol_aux_tl { \l__enumext_item_symbol_ \__enumext_level: _tl }
3390   }
3391   {
3392     \tl_gset:Nn \g__enumext_item_symbol_aux_tl {#1}

```

```

3393     }
3394     \tl_if_novalue:nTF {#2}
3395     {
3396         \dim_set_eq:cc
3397         { \__enumext_item_symbol_sep_ \__enumext_level: _dim }
3398         { \__enumext_labelsep_ \__enumext_level: _dim }
3399     }
3400     {
3401         \dim_set:cn { \__enumext_item_symbol_sep_ \__enumext_level: _dim } {#2}
3402     }
3403     \bool_if:NT \__enumext_check_answers_bool
3404     {
3405         \int_gincr:N \g__enumext_item_number_int
3406         \bool_set_true:N \__enumext_item_number_bool
3407     }
3408     \bool_set_true:c { \__enumext_wrap_label_ \__enumext_level: _bool }
3409     \__enumext_item_std:w \tl_use:c { \__enumext_fake_item_indent_ \__enumext_level: _tl }
3410 }

```

The function `__enumext_item_starred_exec:` will be responsible for executing `\item*` for the `enumext` environment.

```

3411 \cs_new_protected:Nn \__enumext_item_starred_exec:
3412 {
3413     \tl_if_empty:cF { \__enumext_item_symbol_ \__enumext_level: _tl }
3414     {
3415         \mode_leave_vertical:
3416         \skip_horizontal:n { -\dim_use:c { \__enumext_item_symbol_sep_ \__enumext_level: _dim } }
3417         \hbox_overlap_left:n { \g__enumext_item_symbol_aux_tl }
3418         \skip_horizontal:n { \dim_use:c { \__enumext_item_symbol_sep_ \__enumext_level: _dim } }
3419     }
3420 }

```

(End of definition for `__enumext_item_starred_exec:nn` and `__enumext_item_starred_exec:.`)

`__enumext_redefine_item:`

The function `__enumext_redefine_item:` will redefine the `\item` command in the `enumext` environment adding `\item*`. This function are passed to `__enumext_list_arg_two_X:` used in the definition of the `enumext` environment (§13.39).

```

3421 \cs_new_protected:Nn \__enumext_redefine_item:
3422 {
3423     \RenewDocumentCommand \item { s o o }
3424     {
3425         \bool_if:nTF {##1}
3426         {
3427             \__enumext_item_starred_exec:nn {##2} {##3}
3428         }
3429         { \__enumext_default_item:n {##2} }
3430     }
3431 }

```

(End of definition for `__enumext_redefine_item:.`)

`__enumext_make_label:`
`__enumext_make_label_std:`
`__enumext_make_label_box:`

The function `__enumext_make_label:` redefine `\makelabel` for the keys `mode-box`, `align`, `font`, `wrap-label`, `wrap-label*` and `\item*` for `enumext` environment. This function are passed to `__enumext_list_arg_two_X:` used in the definition of the `enumext` environment (§13.39).

```

3432 \cs_new_protected:Nn \__enumext_make_label:
3433 {
3434     \IfDocumentMetadataTF
3435     {
3436         \__enumext_make_label_box:
3437     }
3438     {
3439         \bool_if:NTF \__enumext_mode_box_bool
3440         {
3441             \__enumext_make_label_box:
3442         }
3443         {
3444             \__enumext_make_label_std:
3445         }
3446     }
3447 }

```

Standard definition when `\DocumentMetadata` is not active.

```

3448 \cs_new_protected:Nn \__enumext_make_label_std:
3449 {
3450   \RenewDocumentCommand \makeLabel { m }
3451   {
3452     \tl_use:c { l__enumext_label_fill_left_ \__enumext_level: _tl }
3453     \__enumext_item_starred_exec:
3454     \tl_use:c { l__enumext_label_font_style_ \__enumext_level: _tl }
3455     \bool_if:cTF { l__enumext_wrap_label_ \__enumext_level: _bool }
3456     {
3457       \use:c { __enumext_wrapper_label_ \__enumext_level: :n } { ##1 }
3458     }
3459     { ##1 }
3460     \tl_use:c { l__enumext_label_fill_right_ \__enumext_level: _tl }
3461     \tl_gclear:N \g__enumext_item_symbol_aux_tl
3462   }
3463 }

```

Definition using `\makebox` when `\DocumentMetadata` is active or `mode-box` is active.

- ◆ Here it is necessary to use `\strut\smash` to maintain text *alignment* in case the user wants to use `\labelbx` for example. In my experiments with *mimicking* the `description` environment it was the only way out and it seems to have no adverse effects and may serve in the future as a basis for a more generic `list` environment package than `enumext`.

```

3464 \cs_new_protected:Nn \__enumext_make_label_box:
3465 {
3466   \RenewDocumentCommand \makeLabel { m }
3467   {
3468     \strut\smash
3469     {
3470       \makebox
3471       [ \dim_use:c { l__enumext_labelwidth_ \__enumext_level: _dim } ]
3472       [ \str_use:c { l__enumext_align_label_pos_ \__enumext_level: _str } ]
3473       {
3474         \__enumext_item_starred_exec:
3475         \tl_use:c { l__enumext_label_font_style_ \__enumext_level: _tl }
3476         \bool_if:cTF { l__enumext_wrap_label_ \__enumext_level: _bool }
3477         {
3478           \use:c { __enumext_wrapper_label_ \__enumext_level: :n } { ##1 }
3479         }
3480         { ##1 }
3481         \tl_gclear:N \g__enumext_item_symbol_aux_tl
3482       }
3483     } % close smash
3484   }
3485 }

```

(End of definition for `__enumext_make_label:`, `__enumext_make_label_std:`, and `__enumext_make_label_box:`.)

13.35 Setting `item-sym*` and `item-pos*` keys

In order to have a cleaner implementation of `\item*` for the `enumext` and `enumext*` environments it is best to define a couple of keys that allow us to control and set by default the `⟨symbol⟩` and its `⟨offset⟩`.

`item-sym*` Define and set `item-sym*` and `item-pos*` keys for `enumext` and `enumext*`.

```

item-pos*
3486 \cs_set_protected:Npn \__enumext_tmp:nn #1 #2
3487 {
3488   \keys_define:nn { enumext / #1 }
3489   {
3490     item-sym* .tl_set:c = { l__enumext_item_symbol_#2_tl },
3491     item-sym* .value_required:n = true,
3492     item-sym* .initial:n = {\textborn},
3493     item-pos* .dim_set:c = { l__enumext_item_symbol_sep_#2_dim },
3494     item-pos* .value_required:n = true,
3495   }
3496 }
3497 \clist_map_inline:nn
3498 {
3499   {level-1}{i}, {level-2}{ii}, {level-3}{iii}, {level-4}{iv}, {enumext*}{vii}
3500 }
3501 { \__enumext_tmp:nn #1 }

```

(End of definition for `item-sym*` and `item-pos*`.)

13.36 Handling unknown keys

At this point in the code I already know that I will NOT add more *⟨keys⟩* for and since I have already been quite *paranoid and restrictive* with the definitions of environments and commands, the only thing left to do is do it with the *⟨keys⟩* (you have to be consistent in life).

Well, the paragraph above is not so real, after all I had to add more *⟨keys⟩* than I had planned, not everything turns out the way one thinks in life.

13.36.1 Handling unknown keys for keyans, keyans* and keyanspic

Define and set `unknown` key for `keyans`, `keyans*` and `keyanspic` environments. Here it is necessary to set `\l__enumext_envir_name_tl` in case an `unknown` key is passed using `\setenumext`.

```

unknown
\__enumext_keyans_unknown_keys:n
\__enumext_keyans_unknown_keys:nn
3502 \cs_set_protected:Npn \__enumext_tmp:n #1
3503 {
3504   \keys_define:nn { enumext / #1 }
3505   {
3506     unknown .code:n = {
3507       \tl_set:Nn \l__enumext_envir_name_tl {#1}
3508       \__enumext_keyans_unknown_keys:n {#1}
3509     },
3510   }
3511 }
3512 \clist_map_inline:nn { keyans, keyans*, keyanspic } { \__enumext_tmp:n {#1} }
```

Internal functions for handling `unknown` key.

```

3513 \cs_new_protected:Npn \__enumext_keyans_unknown_keys:n #1
3514 {
3515   \exp_args:NV \__enumext_keyans_unknown_keys:nn \l_keys_key_str {#1}
3516 }
3517 \cs_new_protected:Npn \__enumext_keyans_unknown_keys:nn #1#2
3518 {
3519   \tl_if_blank:nTF {#2}
3520   {
3521     \msg_error:nne { enumext } { keyans-unknown-key } {#1}
3522   }
3523   {
3524     \msg_error:nnee { enumext } { keyans-unknown-key-value } {#1} {#2}
3525   }
3526 }
```

(End of definition for `unknown`, `__enumext_keyans_unknown_keys:n`, and `__enumext_keyans_unknown_keys:nn`.)

13.36.2 Handling unknown keys for enumext*

Define and set `unknown` key for `enumext*` environment.

```

unknown
\__enumext_starred_unknown_keys:n
\__enumext_starred_unknown_keys:nn
3527 \keys_define:nn { enumext / enumext* }
3528 {
3529   unknown .code:n = { \__enumext_starred_unknown_keys:n {#1} },
3530 }
3531 \cs_new_protected:Npn \__enumext_starred_unknown_keys:n #1
3532 {
3533   \exp_args:NV \__enumext_starred_unknown_keys:nn \l_keys_key_str {#1}
3534 }
3535 \cs_new_protected:Npn \__enumext_starred_unknown_keys:nn #1#2
3536 {
3537   \tl_if_blank:nTF {#2}
3538   {
3539     \msg_error:nnn { enumext } { starred-unknown-key } {#1}
3540   }
3541   {
3542     \msg_error:nnnn { enumext } { starred-unknown-key-value } {#1} {#2}
3543   }
3544 }
```

(End of definition for `unknown`, `__enumext_starred_unknown_keys:n`, and `__enumext_starred_unknown_keys:nn`.)

13.36.3 Handling unknown keys for enumext

unknown Defines and set the key `unknown` for `enumext` environment.

```

3545 \cs_set_protected:Npn \__enumext_tmp:n #1
3546 {
3547   \keys_define:nn { enumext / #1 }
3548   {
3549     unknown .code:n = { \__enumext_standar_unknown_keys:n {##1} },
3550   }
3551 }
3552 \clist_map_inline:nn { level-1,level-2,level-3,level-4 } { \__enumext_tmp:n {#1} }

```

Internal functions for handling `unknown` key.

```

3553 \cs_new_protected:Npn \__enumext_standar_unknown_keys:n #1
3554 {
3555   \exp_args:NV \__enumext_standar_unknown_keys:nn \l_keys_key_str {#1}
3556 }
3557 \cs_new_protected:Npn \__enumext_standar_unknown_keys:nn #1#2
3558 {
3559   \tl_if_blank:nTF {#2}
3560   {
3561     \msg_error:nnn { enumext } { standar-unknown-key } {#1}
3562   }
3563   {
3564     \msg_error:nnnn { enumext } { standar-unknown-key-value } {#1} {#2}
3565   }
3566 }

```

(End of definition for `unknown`, `__enumext_standar_unknown_keys:n`, and `__enumext_standar_unknown_keys:nn`.)

13.37 Redefining `\item` and `\makeLabel` in keyans

The `\item` and `\item[⟨custom⟩]` commands work in the usual way in `keyans`, but the `\item*` and `\item*[⟨content⟩]` commands *store* the current `⟨label⟩` next to the `⟨content⟩` if it is present in the *sequence* and *prop list* defined by `save-ans` key.

`__enumext_keyans_default_item:n` The function `__enumext_keyans_default_item:n` executes the original behavior of the `\item` along with the keys `wrap-label`, `wrap-label*` and `itemindent`.

```

3567 \cs_new_protected:Npn \__enumext_keyans_default_item:n #1
3568 {
3569   \tl_if_novalue:nTF { #1 }
3570   {
3571     \bool_set_true:N \l__enumext_wrap_label_v_bool
3572     \__enumext_item_std:w \tl_use:N \l__enumext_fake_item_indent_v_tl
3573   }
3574   {
3575     \bool_set_eq:NN \l__enumext_wrap_label_v_bool \l__enumext_wrap_label_opt_v_bool
3576     \__enumext_item_std:w [#1] \tl_use:N \l__enumext_fake_item_indent_v_tl
3577   }
3578 }

```

(End of definition for `__enumext_keyans_default_item:n`.)

`__enumext_keyans_starred_item:n` The function `__enumext_keyans_starred_item:n` will take as argument `#1` the *optional argument* `[⟨content⟩]` passed to `\item*` and save it via the `__enumext_keyans_save_item_opt:n` function, then activate the `wrap-label` key, execute `\item` using `__enumext_item_std:w`, the `itemindent` key and print the *optional argument* using the `__enumext_keyans_show_item_opt:` function handled by the `wrap-opt` key.

```

3579 \cs_new_protected:Npn \__enumext_keyans_starred_item:n #1
3580 {
3581   \__enumext_keyans_save_item_opt:n { #1 }
3582   \bool_set_true:N \l__enumext_wrap_label_v_bool
3583   \__enumext_item_std:w \tl_use:N \l__enumext_fake_item_indent_v_tl
3584   \__enumext_keyans_show_item_opt:

```

Now *store* the current `⟨label⟩` first in the *prop list* (including the *optional argument*), run the internal “*label and ref*” system if the `save-ref` key is active, then *store* in the *sequence* and finally increments `\g__enumext-check_starred_cmd_int` for internal check system.

```

3585   \__enumext_keyans_addto_prop:n { #1 }
3586   \__enumext_keyans_store_ref:
3587   \__enumext_keyans_addto_seq:n { #1 }
3588   \int_gincr:N \g__enumext_check_starred_cmd_int
3589 }

```

(End of definition for `__enumext_keyans_starred_item:n`.)

`\item*` The function `__enumext_keyans_redefine_item:` is responsible for adding the *starred argument* and *optional argument* by the `__enumext_list_arg_two_v:` function in the definition of the `keyans` environment. Here we will set to true the variable `\l__enumext_item_wrap_key_bool` used by the `wrap-ans*` key only when `\item*` is executed and additionally we need to use `\peek_remove_spaces:n` to avoid an unwanted space when using `\item*` together with the `itemindent` key. This function are passed to `__enumext_list_arg_two_v:` used in the definition of the `keyans` environment (§13.38).

```

3590 \cs_new_protected:Nn \__enumext_keyans_redefine_item:
3591 {
3592   \RenewDocumentCommand \item { s o }
3593   {
3594     \bool_if:nTF {##1}
3595     {
3596       \bool_set_true:N \l__enumext_item_wrap_key_bool % wrap-ans*
3597       \peek_remove_spaces:n
3598       {
3599         \__enumext_keyans_starred_item:n {##2}
3600       }
3601     }
3602     {
3603       \bool_set_false:N \l__enumext_item_wrap_key_bool
3604       \__enumext_keyans_default_item:n {##2}
3605     }
3606   }
3607 }

```

(End of definition for `\item*` and `__enumext_keyans_redefine_item:`. This function is documented on page 16.)

`__enumext_keyans_make_label:` The function `__enumext_keyans_make_label:` redefine `\make_label` for the keys `mode-box`, `align`, `font`, `wrap-label`, `wrap-label*`, `wrap-ans*` and `\item*` for `keyans` environment. This function are passed to `__enumext_list_arg_two_v:` used in the definition of the `keyans` environment (§13.38).

```

3608 \cs_new_protected:Nn \__enumext_keyans_make_label:
3609 {
3610   \IfDocumentMetadataTF
3611   {
3612     \__enumext_keyans_make_label_box:
3613   }
3614   {
3615     \bool_if:NTF \l__enumext_mode_box_bool
3616     {
3617       \__enumext_keyans_make_label_box:
3618     }
3619     {
3620       \__enumext_keyans_make_label_std:
3621     }
3622   }
3623 }

```

We added conditionals to the `__enumext_keyans_wrapper_label:n` function to handle the keys `wrap-ans*`, `wrap-label` and `wrap-label*`.

```

3624 \cs_new_protected:Npn \__enumext_keyans_wrapper_label:n #1
3625 {
3626   \bool_lazy_all:nT
3627   {
3628     { \bool_if_p:N \l__enumext_wrap_label_v_bool }
3629     { \bool_if_p:N \l__enumext_show_answer_bool }
3630     { \bool_if_p:N \l__enumext_item_wrap_key_bool }
3631     { \cs_if_exist_p:N \__enumext_keyans_wrapper_item_v:n }
3632   }
3633   {
3634     \cs_set_eq:NN \__enumext_wrapper_label_v:n \__enumext_keyans_wrapper_item_v:n
3635   }
3636   \bool_if:NTF \l__enumext_wrap_label_v_bool
3637   {
3638     \__enumext_wrapper_label_v:n { #1 }
3639   }
3640   { #1 }
3641 }

```


Standard definition when `\DocumentMetadata` is not active.

```

3642 \cs_new_protected:Nn \__enumext_keyans_make_label_std:
3643 {
3644   \RenewDocumentCommand \makeLabel { m }
3645   {
3646     \tl_use:N \l__enumext_label_fill_left_v_tl
3647     \__enumext_keyans_show_ans:
3648     \__enumext_keyans_show_pos:
3649     \tl_use:N \l__enumext_label_font_style_v_tl
3650     \__enumext_keyans_wrapper_label:n { ##1 }
3651     \tl_use:N \l__enumext_label_fill_right_v_tl
3652   }
3653 }

```

Definition using `\makebox` when `\DocumentMetadata` is active or `mode-box` is active.

```

3654 \cs_new_protected:Nn \__enumext_keyans_make_label_box:
3655 {
3656   \RenewDocumentCommand \makeLabel { m }
3657   {
3658     \strut\smash
3659     {
3660       \makebox[ \l__enumext_labelwidth_v_dim ][ \l__enumext_align_label_pos_v_str ]
3661       {
3662         \__enumext_keyans_show_ans:
3663         \__enumext_keyans_show_pos:
3664         \tl_use:N \l__enumext_label_font_style_v_tl
3665         \__enumext_keyans_wrapper_label:n { ##1 }
3666       }
3667     }
3668   }
3669 }

```

(End of definition for `__enumext_keyans_make_label:` and others.)

13.38 Second argument of the lists

At this point of the code we have already programmed most the necessary tools to create a custom `list` environment, remember that the function `__enumext_start_list:nn` takes two arguments, the first one we have ready, the second one we will define for all the levels of the environment `enumext` and the environment `keyans`.

13.38.1 Calculation of `\leftmargin` and `\itemindent`

Consider the figure 9 where the default margins (on the left) of a list are represented.

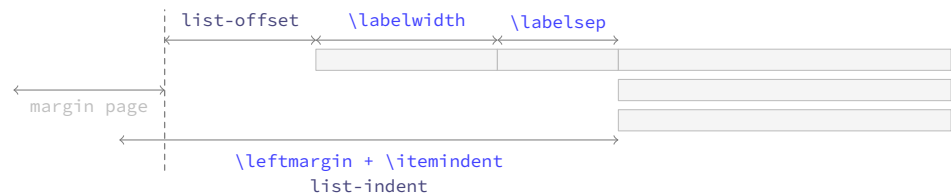


Figure 9: Representation of standard horizontal lengths in `list` environment.

The idea is to have control over these margins so that our list does not overlap the left margin of the page. The key relationship is that the right edge of the `\labelsep` equals the right edge of the `\itemindent`, so that the left edge of the label box is at $\leftmargin + \itemindent - \labelwidth - \labelsep$. Thus, the handling of the margins by the package will be as shown in the figure 10.

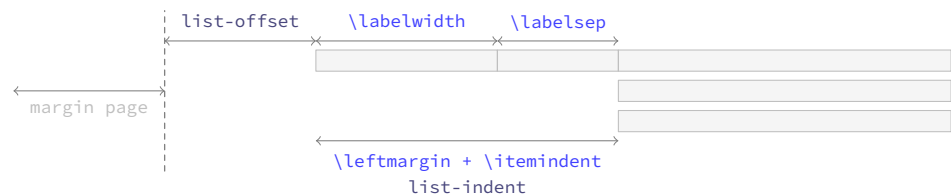


Figure 10: Representation of horizontal lengths concept in list in `enumext`.

Where the default values will look like in the figure 11.

```

\__enumext_calc_hspace:NNNNNNN
\__enumext_calc_hspace:ccccccc


```

The function `__enumext_calc_hspace:NNNNNNN` takes seven arguments to be able to determine horizontal spaces for all list environment:

```

#1: \l__enumext_labelwidth_X_dim      #2: \l__enumext_labelsep_X_dim
#3: \l__enumext_listoffset_X_dim      #4: \l__enumext_leftmargin_tmp_X_dim

```

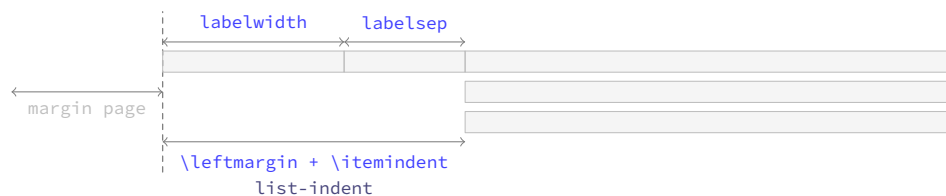Figure 11: Default horizontal lengths in `enumext`.

```
#5: \l__enumext_leftmargin_X_dim      #6: \l__enumext_itemindent_X_dim
#7: \l__enumext_leftmargin_tmp_X_bool
```

And returns the “adjusted” values of `\leftmargin` and `\itemindent`.

This function is passed to `__enumext_list_arg_two_X`: which is used in the definition of the `enumext` and `keyans` environments (§13.38).

```
3670 \cs_new_protected:Npn \__enumext_calc_hspace:NNNNNNN #1 #2 #3 #4 #5 #6 #7
3671 {
3672   \dim_compare:nNnT { #1 } < { \c_zero_dim }
3673   {
3674     \msg_warning:nnnV { enumext } { width-non-positive } { labelwidth } { #1 }
3675     \dim_set:Nn #1 { \dim_abs:n { #1 } }
3676   }
3677   \dim_compare:nNnT { #2 } < { \c_zero_dim }
3678   {
3679     \msg_warning:nnnV { enumext } { width-negative } { labelsep } { #2 }
3680     \dim_set:Nn #2 { \dim_abs:n { #2 } }
3681   }

```

If no value has been passed to the `labelwidth` and `labelsep` keys we set the default values for `\l__enumext_leftmargin_tmp_X_dim`.

```
3682   \bool_if:nF #7 { \dim_set:Nn #4 { #1 + #2 } }
```

We now analyze the cases and set the values for `\leftmargin` and `\itemindent`.

```
3683   \dim_compare:nNnTF { #4 } < { \c_zero_dim }
3684   {
3685     \dim_set:Nn #6 { #1 + #2 - #4 }
3686     \dim_set:Nn #5 { #1 + #2 + #3 - #6 }
3687   }
3688   {
3689     \dim_compare:nNnT { #4 } = { #1 + #2 }
3690     { \dim_set:Nn #6 { \c_zero_dim } }
3691     \dim_compare:nNnT { #4 } < { #1 + #2 }
3692     { \dim_set:Nn #6 { #1 + #2 - #4 } }
3693     \dim_compare:nNnT { #4 } > { #1 + #2 }
3694     {
3695       \dim_set:Nn #6 { -#1 - #2 + #4 }
3696       \dim_set:Nn #6 { #6*-1 }
3697     }
3698     \dim_set:Nn #5 { #1 + #2 + #3 - #6 }
3699   }
3700 }
3701 \cs_generate_variant:Nn \__enumext_calc_hspace:NNNNNNN { cccccc }
```

(End of definition for `__enumext_calc_hspace:NNNNNNN`.)

13.38.2 Setting second argument of the lists

We will “not set” `\leftmargini`, `\leftmarginii`, `\leftmarginiii` or `\leftmarginiv`, in this case, we will directly set the parameters for vertical and horizontal list spacing per level.

```
3702 \cs_set_protected:Npn \__enumext_tmp:n #1
3703 {
3704   \cs_new_protected:cpn { __enumext_list_arg_two_#1: }
3705   {
3706     \__enumext_calc_hspace:ccccc
3707     { \l__enumext_labelwidth_#1_dim } { \l__enumext_labelsep_#1_dim }
3708     { \l__enumext_listoffset_#1_dim } { \l__enumext_leftmargin_tmp_#1_dim }
3709     { \l__enumext_leftmargin_#1_dim } { \l__enumext_itemindent_#1_dim }
3710     { \l__enumext_leftmargin_tmp_#1_bool }
3711     \clist_map_inline:nn
3712     { labelsep, labelwidth, itemindent, leftmargin, rightmargin, listparindent }
3713     { \dim_set_eq:cc {####1} { \l__enumext_####1_#1_dim } }
```

```

3714 \clist_map_inline:nn { topsep, parsep, partopsep, itemsep }
3715 { \skip_set_eq:cc {####1} { l__enumext_####1_#1_skip } }
3716 \usecounter { enumX#1 }
3717 \setcounter { enumX#1 } { \int_eval:n { \int_use:c { l__enumext_start_#1_int } - 1 } }
3718 \str_if_eq:nnTF {#1} { v }
3719 {
3720   \__enumext_keyans_redefine_item:
3721   \__enumext_keyans_make_label:
3722   \__enumext_keyans_ref:
3723   \__enumext_keyans_fake_item_indent:
3724   \bool_if:cT { l__enumext_show_length_#1_bool }
3725   {
3726     \msg_term:nnnn { enumext } { list-lengths-not-nested } { v } { keyans }
3727   }
3728 }
3729 {
3730   \__enumext_redefine_item:
3731   \__enumext_make_label:
3732   \__enumext_standar_ref:
3733   \__enumext_fake_item_indent:
3734   \bool_if:cT { l__enumext_show_length_#1_bool }
3735   {
3736     \msg_term:nnne { enumext } { list-lengths } {#1}
3737     { \int_use:N \l__enumext_level_int }
3738   }
3739 }
3740 }
3741 }
3742 \clist_map_inline:nn { i, ii, iii, iv, v } { \__enumext_tmp:n {#1} }

```

(End of definition for `__enumext_list_arg_two_i:` and others.)

```

\__enumext_list_arg_two_vii:
\__enumext_list_arg_two_viii:

```

For the horizontal environments `enumext*` and `keyans*` the implementation is similar, but, the value of `\partopsep` is always `\opt`. At this point we will modify the `parsep` key to make it take the value of the `itemsep` key and later, in the environment definition, we will modify `parindent` to make it set the value of `\lisparindent` and `parsep` to set the value of `\parskip` locally.

```

3743 \cs_set_protected:Npn \__enumext_tmp:n #1
3744 {
3745   \cs_new_protected:cpn { __enumext_list_arg_two_#1: }
3746   {
3747     \bool_set_true:c { l__enumext_leftmargin_tmp_#1_bool }
3748     \dim_zero:c { l__enumext_leftmargin_tmp_#1_dim }
3749     \__enumext_calc_hspace:ccccc
3750     { l__enumext_labelwidth_#1_dim } { l__enumext_labelsep_#1_dim }
3751     { l__enumext_listoffset_#1_dim } { l__enumext_leftmargin_tmp_#1_dim }
3752     { l__enumext_leftmargin_#1_dim } { l__enumext_itemindent_#1_dim }
3753     { l__enumext_leftmargin_tmp_#1_bool }
3754     \clist_map_inline:nn
3755     { labelsep, labelwidth, itemindent, leftmargin, rightmargin, listparindent }
3756     { \dim_set_eq:cc {####1} { l__enumext_####1_#1_dim } }
3757     \clist_map_inline:nn { topsep, parsep, partopsep, itemsep }
3758     { \skip_set_eq:cc {####1} { l__enumext_####1_#1_skip } }
3759     \skip_set_eq:Nc \parsep { l__enumext_itemsep_#1_skip }
3760     \skip_zero:N \partopsep
3761     \usecounter { enumX#1 }
3762     \setcounter { enumX#1 } { \int_eval:n { \int_use:c { l__enumext_start_#1_int } - 1 } }
3763     \__enumext_starred_ref:
3764     \str_if_eq:nnTF {#1} { vii }
3765     {
3766       \__enumext_fake_item_indent_vii:
3767       \bool_if:cT { l__enumext_show_length_vii_bool }
3768       { \msg_term:nnnn { enumext } { list-lengths-not-nested } { vii } { enumext* } }
3769     }
3770     {
3771       \__enumext_fake_item_indent_viii:
3772       \bool_if:cT { l__enumext_show_length_#1_bool }
3773       { \msg_term:nnnn { enumext } { list-lengths-not-nested } { #1 } { keyans* } }
3774     }
3775   }
3776 }
3777 \clist_map_inline:nn { vii, viii } { \__enumext_tmp:n {#1} }

```

(End of definition for `__enumext_list_arg_two_vii:` and `__enumext_list_arg_two_viii:`.)

13.39 The environment enumext

`__enumext_safe_exec:` The `__enumext_safe_exec:` function first call the function `__enumext_is_not_nested:` which sets `\g__enumext_standar_bool` to “true” if we are NOT nested within `enumext*`, then call the function `__enumext_internal_mini_page:` to create the environment `__enumext_mini_page`, we will increment `\l__enumext_level_int` to restrict nesting of the environment, set `\l__enumext_standar_bool` to “true” and finally call the function `__enumext_is_on_first_level:` which sets `\l__enumext_standar_first_bool` to “true” only if the environment is NOT nested and we are at the “first level”.

```

3778 \cs_new_protected:Nn \__enumext_safe_exec:
3779 {
3780   \__enumext_is_not_nested:
3781   \__enumext_internal_mini_page:
3782   \int_incr:N \l__enumext_level_int
3783   \int_compare:nNnT { \l__enumext_level_int } > { 4 }
3784     { \msg_fatal:nn { enumext } { list-too-deep } }
3785   \bool_set_true:N \l__enumext_standar_bool
3786   \bool_set_false:N \l__enumext_starred_bool
3787   \__enumext_is_on_first_level:
3788 }

```

(End of definition for `__enumext_safe_exec:`.)

`__enumext_parse_keys:n` The `__enumext_parse_store_keys:n` function first we will clear the variable `\l__enumext_series_str` used by the key `series` and then we check if we are at the “first level”, if so we process the `(keys)` and then execute the function `__enumext_parse_series:n` used by the key `series` and call the function `__enumext_nested_base_line_fix:` used by the key `base-fix`, otherwise we will pass the `(keys)` to the inner levels of the environment then we execute the function `__enumext_store_active_keys:n` and reprocess the `(keys)` to pass them to the `sequence` if the key `save-key` is not active.

```

3789 \cs_new_protected:Npn \__enumext_parse_keys:n #1
3790 {
3791   \tl_if_novalue:nF {#1}
3792   {
3793     \str_clear:N \l__enumext_series_str
3794     \int_compare:nNnTF { \l__enumext_level_int } = { 1 }
3795     {
3796       \keys_set:nn { enumext / level-1 } {#1}
3797       \__enumext_parse_series:n {#1}
3798       \__enumext_nested_base_line_fix:
3799     }
3800     {
3801       \exp_args:Ne \keys_set:nn
3802         { enumext / level-\int_use:N \l__enumext_level_int } {#1}
3803     }
3804     \__enumext_store_active_keys:n {#1}
3805   }
3806 }

```

(End of definition for `__enumext_parse_keys:n`.)

`__enumext_start_store_level:` The `__enumext_start_store_level:` function activate the “storing structure” mechanism in the `sequence` for the command `\anskey` and the environment `anskey*`.

```

3807 \cs_new_protected:Nn \__enumext_start_store_level:
3808 {
3809   \bool_lazy_all:nT
3810   {
3811     { \bool_if_p:N \l__enumext_store_active_bool }
3812     { \bool_not_p:n { \l__enumext_keyans_env_bool } }
3813     { \bool_if_p:N \g__enumext_standar_bool }
3814   }
3815   {
3816     \int_compare:nNnT { \l__enumext_level_int } > { 1 }
3817     {
3818       \bool_set_true:c { l__enumext_store_upper_level_ \__enumext_level: _bool }
3819       \__enumext_store_level_open:
3820     }
3821   }

```

If `enumext` are nested in `enumext*` add `__enumext_store_level_open:` to preserve the “*storing structure*”.

```

3822 \bool_lazy_all:nT
3823 {
3824   { \bool_if_p:N \__enumext_store_active_bool }
3825   { \bool_not_p:n { \__enumext_keyans_env_bool } }
3826   { \int_compare_p:nNn { \__enumext_level_h_int } = { 1 } }
3827 }
3828 {
3829   \int_compare:nNnT { \__enumext_level_int } > { 0 }
3830   {
3831     \bool_set_true:c { \__enumext_store_upper_level_ \__enumext_level: _bool }
3832     \__enumext_store_level_open:
3833   }
3834 }
3835 }

```

(End of definition for `__enumext_start_store_level:`.)

`__enumext_stop_store_level:` The `__enumext_stop_store_level:` function stop the “*storing structure*” mechanism in the *sequence* for the command `\anskey` and the environment `anskey*`.

```

3836 \cs_new_protected:Nn \__enumext_stop_store_level:
3837 {
3838   \bool_if:cT { \__enumext_store_upper_level_ \__enumext_level: _bool }
3839   {
3840     \__enumext_store_level_close:
3841   }
3842 }

```

(End of definition for `__enumext_stop_store_level:`.)

`__enumext_multicols_start:` The function `__enumext_multicols_start:` will start the `multicols` environment according to the value passed by the `columns` key, then set the default value for `\columnsep` when `columns-sep=opt` and set the value of `\multicolsep` equal to zero and leave `\columnseprule` equal to zero for inner levels.

```

3843 \cs_new_protected:Nn \__enumext_multicols_start:
3844 {
3845   \int_compare:nNnT
3846   { \int_use:c { \__enumext_columns_ \__enumext_level: _int } } > { 1 }
3847   {
3848     \dim_compare:nNnT
3849     { \dim_use:c { \__enumext_columns_sep_ \__enumext_level: _dim } } = { \c_zero_dim }
3850     {
3851       \dim_set:cn { \__enumext_columns_sep_ \__enumext_level: _dim }
3852       {
3853         ( \dim_use:c { \__enumext_labelwidth_ \__enumext_level: _dim }
3854         + \dim_use:c { \__enumext_labelsep_ \__enumext_level: _dim }
3855         ) / \int_use:c { \__enumext_columns_ \__enumext_level: _int }
3856         - \dim_use:c { \__enumext_listoffset_ \__enumext_level: _dim }
3857       }
3858     }
3859     \dim_set_eq:Nc \columnsep { \__enumext_columns_sep_ \__enumext_level: _dim }
3860     \int_compare:nNnT { \__enumext_level_int } > { 1 }
3861     {
3862       \dim_zero:N \columnseprule
3863     }
3864   }

```

We will calculate the *vertical spacing* settings for the `multicols` environment using the function `__enumext_multi_addvspace:`, apply our “*vertical adjust spacing*”, then start the `multicols` environment.

```

3864 \bool_if:cF { \__enumext_minipage_active_ \__enumext_level: _bool }
3865 {
3866   \skip_zero:N \multicolsep
3867   \__enumext_multi_addvspace:
3868 }
3869 \raggedcolumns
3870 \begin{multicols}{ \int_use:c { \__enumext_columns_ \__enumext_level: _int } }
3871 }
3872 }

```

(End of definition for `__enumext_multicols_start:`.)

`__enumext_multicols_stop:` The function `__enumext_multicols_stop:` will stop the `multicols` environment and apply our “vertical adjust” spacing. For compatibility with *tagged* PDF, the closing of the `list` environment is executed here along with `__enumext_stop_store_level:`.

```

3873 \cs_new_protected:Nn \__enumext_multicols_stop:
3874 {
3875   \int_compare:nNtF
3876     { \int_use:c { \__enumext_columns_ \__enumext_level: _int } } > { 1 }
3877   {
3878     \__enumext_stop_list:
3879     \__enumext_stop_store_level:
3880     \end{multicols}
3881     \__enumext_unskip_unkern:
3882     \__enumext_unskip_unkern:
3883     \par\addvspace{ \skip_use:c { \__enumext_multicols_below_ \__enumext_level: _skip } }
3884   }
3885   {
3886     \__enumext_stop_list:
3887     \__enumext_stop_store_level:
3888   }
3889 }

```

(End of definition for `__enumext_multicols_stop:`)

`__enumext_before_list:` The function `__enumext_before_list:` first calls the function `__enumext_vspace_above:` used by the keys `above` and `above*`, then calls the function `__enumext_before_args_exec:` used by the key `before*` and finally execute the function `__enumext_check_ans_active:` for the check answer mechanism.

```

3890 \cs_new_protected:Nn \__enumext_before_list:
3891 {
3892   \__enumext_vspace_above:
3893   \__enumext_before_args_exec:
3894   \__enumext_check_ans_active:

```

When the `mini-env` key is active it will set the value of the `\l__enumext_minipage_right_X_dim` to be the *width* of the `__enumext_mini_page` environment on the “right side”, using this value together with the value of the `\l__enumext_minipage_hsep_X_dim` set by the `mini-sep` key, the value of `\l__enumext_minipage_left_X_dim` will be set, which will be the *width* of `__enumext_mini_page` environment on the “left side”, always having a current `\linewidth` as *maximum width* between them.

```

3895 \dim_compare:nNt
3896   { \dim_use:c { \l__enumext_minipage_right_ \__enumext_level: _dim } } > { \c_zero_dim }
3897   {
3898     \dim_set:cn { \l__enumext_minipage_left_ \__enumext_level: _dim }
3899     {
3900       \linewidth
3901       - \dim_use:c { \l__enumext_minipage_right_ \__enumext_level: _dim }
3902       - \dim_use:c { \l__enumext_minipage_hsep_ \__enumext_level: _dim }
3903     }

```

The boolean variable `\l__enumext_minipage_active_X_bool` will be activated and the integer variable `\g__enumext_minipage_stat_int` used by the `\miniright` command will be incremented, then the function `__enumext_minipage_add_space:` is called and the `__enumext_mini_page` environment on the “left side” will be initialized followed by the “vertical spacing” applied to preserve the “baseline” between the *left* and *right* side environments. After these actions, the function `__enumext_multicols_start:` is called to handle the `multicols` environment.

```

3904   \bool_set_true:c { \l__enumext_minipage_active_ \__enumext_level: _bool }
3905   \int_gincr:N \g__enumext_minipage_stat_int
3906   \__enumext_minipage_add_space:
3907   \noindent
3908   \__enumext_mini_page{ \dim_use:c { \l__enumext_minipage_left_ \__enumext_level: _dim } }
3909 }
3910 \__enumext_multicols_start:
3911 }

```

(End of definition for `__enumext_before_list:`)

`__enumext_second_part:` The function `__enumext_second_part:` first check the state of the boolean variable `\l__enumext_minipage_active_X_bool`, if it is “true” a small test will be executed to check if we have omitted the use of `\miniright` (the `__enumext_mini_page` environment has not been closed), then close `__enumext_mini_page` and add the *adjusted vertical space* `\l__enumext_minipage_after_skip`, otherwise we will close the `multicols` environment.

```

3912 \cs_new_protected:Nn \__enumext_second_part:

```

```

3913 {
3914   \bool_if:cTF { l__enumext_minipage_active_ \__enumext_level: _bool }
3915   {
3916     \int_compare:nNtT { \g__enumext_minipage_stat_int } = { 1 }
3917     {
3918       \msg_warning:nn { enumext } { missing-miniright }
3919       \miniright
3920     }
3921     \int_gzero:N \g__enumext_minipage_stat_int
3922     \__enumext_unskip_unkern: % remove topsep + [partopsep]
3923     \end__enumext_mini_page
3924   }
3925   {
3926     \__enumext_multicols_stop:
3927   }

```

Now we will execute the functions `__enumext_after_stop_list:` used by the key `after`, `__enumext_check_ans_key_hook:` used by the key `check-ans`, `__enumext_vspace_below:` used by the keys `below` and `below*`. Finally set `\l__enumext_standar_bool` to false and call the function `__enumext_resume_save_counter:` used by the `series`, `resume` and `resume*` keys.

```

3928   \__enumext_after_stop_list:
3929   \__enumext_check_ans_key_hook:
3930   \__enumext_vspace_below:
3931   \bool_set_false:N \l__enumext_standar_bool
3932   \__enumext_resume_save_counter:
3933 }

```

(End of definition for `__enumext_second_part:`.)

`__enumext_set_item_width:` The function `__enumext_set_item_width:` will set the value of `\itemwidth` taking into account the value established by the `list-offset` key for each level of the environment.

```

3934 \cs_new_protected:Nn \__enumext_set_item_width:
3935 {
3936   \dim_set:Nn \itemwidth { \linewidth }
3937   \dim_compare:nT
3938   {
3939     \dim_use:c { l__enumext_listoffset_ \__enumext_level: _dim } != \c_zero_dim
3940   }
3941   {
3942     \dim_sub:Nn \itemwidth
3943     {
3944       \dim_use:c { l__enumext_listoffset_ \__enumext_level: _dim }
3945     }
3946   }
3947 }

```

(End of definition for `__enumext_set_item_width:`.)

enumext Now create the `enumext` environment based on `list` environment by levels.

```

3948 \NewDocumentEnvironment{enumext}{0}{}
3949 {
3950   \__enumext_safe_exec:
3951   \__enumext_parse_keys:n {#1}
3952   \__enumext_before_list:
3953   \__enumext_start_store_level:
3954   \__enumext_start_list:nn
3955   { \tl_use:c { l__enumext_label_ \__enumext_level: _tl } }
3956   {
3957     \use:c { __enumext_list_arg_two_ \__enumext_level: : }
3958     \__enumext_before_keys_exec:
3959   }
3960   \__enumext_set_item_width:
3961   \__enumext_after_args_exec:
3962 }
3963 {
3964   \__enumext_second_part:
3965 }

```

(End of definition for `enumext`. This function is documented on page 5.)

As we don't want our check to be executed `check-ans` by levels but on the complete list, we will take it out of the `enumext` environment using the “hook” function `__enumext_after_env:nn`.


```

3966 \__enumext_after_env:nn {enumext}
3967 {
3968   \__enumext_execute_after_env:
3969 }

```

13.40 The environment keyans

The environment **keyans** also based on lists. The main differences with the **enumext** environment are the *nesting* and the way the *answers* (choice) will be stored and checked, this environment is intended exclusively for “multiple choice questions”.

The **keyans** environment will only be available if the **save-ans** key is active and can only be used at the “first level” within the **enumext** environment. We do not want the environment to be nested, so we will set a maximum at this point. If the conditions are not met, an error message will be returned.

```

3970 \cs_new_protected:Nn \__enumext_keyans_safe_exec:
3971 {
3972   \bool_if:NF \l__enumext_store_active_bool
3973   {
3974     \msg_error:nnnn { enumext } { wrong-place } { keyans } { save-ans }
3975   }
3976   \int_incr:N \l__enumext_keyans_level_int
3977   \bool_set_true:N \l__enumext_keyans_env_bool
3978   \__enumext_keyans_name_and_start:
3979   % Set false for interfering with enumext nested in keyans (yes, its possible and crayze)
3980   \bool_set_false:N \l__enumext_store_active_bool
3981   \int_compare:nNnT { \l__enumext_keyans_level_int } > { 1 }
3982   {
3983     \msg_error:nn { enumext } { keyans-nested }
3984   }
3985   \int_compare:nNnT { \l__enumext_level_int } > { 1 }
3986   {
3987     \msg_error:nn { enumext } { keyans-wrong-level }
3988   }
3989 }

```

(End of definition for __enumext_keyans_safe_exec:.)

__enumext_keyans_parse_keys:n Parse [*key = val*] for **keyans** environment.

```

3990 \cs_new_protected:Npn \__enumext_keyans_parse_keys:n #1
3991 {
3992   \keys_set:nn { enumext / keyans } {#1}
3993 }

```

(End of definition for __enumext_keyans_parse_keys:n.)

__enumext_before_list_v: Same implementation as the one used in the **enumext** environment.

```

\__enumext_keyans_multicols_start:
\__enumext_keyans_multicols_stop:
\__enumext_second_part_v:
3994 \cs_new_protected:Nn \__enumext_before_list_v:
3995 {
3996   \__enumext_vspace_above_v:
3997   \__enumext_before_args_exec_v:
3998   \dim_compare:nNnT { \l__enumext_minipage_right_v_dim } > { \c_zero_dim }
3999   {
4000     \dim_set:Nn \l__enumext_minipage_left_v_dim
4001     {
4002       \linewidth - \l__enumext_minipage_right_v_dim - \l__enumext_minipage_hsep_v_dim
4003     }
4004     \bool_set_true:N \l__enumext_minipage_active_v_bool
4005     \int_gincr:N \g__enumext_minipage_stat_int
4006     \__enumext_keyans_minipage_add_space:
4007     \__enumext_mini_page{ \l__enumext_minipage_left_v_dim }
4008   }
4009   \__enumext_keyans_multicols_start:
4010 }
4011 \cs_new_protected:Nn \__enumext_keyans_multicols_start:
4012 {
4013   \int_compare:nNnT { \l__enumext_columns_v_int } > { 1 }
4014   {
4015     \dim_compare:nNnT { \l__enumext_columns_sep_v_dim } = { \c_zero_dim }
4016     {
4017       \dim_set:Nn \l__enumext_columns_sep_v_dim
4018     }

```

```

4019         (
4020             \l__enumext_labelwidth_v_dim + \l__enumext_labelsep_v_dim
4021         ) / \l__enumext_columns_v_int
4022         - \l__enumext_listoffset_v_dim
4023     }
4024 }
4025 \dim_set_eq:NN \columnsep \l__enumext_columns_sep_v_dim
4026 \dim_zero:N \columnseprule % no rule here
4027 \bool_if:NF \l__enumext_minipage_active_v_bool
4028 {
4029     \skip_zero:N \multicolsep
4030     \__enumext_keyans_multi_addvspace:
4031 }
4032 \raggedcolumns
4033 \begin{multicols}{\l__enumext_columns_v_int}
4034 }
4035 }
4036 \cs_new_protected:Nn \__enumext_keyans_multicols_stop:
4037 {
4038     \int_compare:nNnTF { \l__enumext_columns_v_int } > { 1 }
4039     {
4040         \__enumext_stop_list:
4041         \end{multicols}
4042         \__enumext_unskip_unkern:
4043         \__enumext_unskip_unkern:
4044         \par\addvspace{ \l__enumext_multicols_below_v_skip }
4045     }
4046     {
4047         \__enumext_stop_list:
4048     }
4049 }
4050 \cs_new_protected:Nn \__enumext_second_part_v:
4051 {
4052     \bool_if:NTF \l__enumext_minipage_active_v_bool
4053     {
4054         \int_compare:nNnT { \g__enumext_minipage_stat_int } = { 1 }
4055         {
4056             \msg_warning:nn { enumext } { missing-miniright }
4057             \miniright
4058         }
4059         \int_gzero:N \g__enumext_minipage_stat_int
4060         \__enumext_unskip_unkern: % remove \topsep + [\partopsep]
4061         \end__enumext_mini_page
4062         \par\addvspace{ \l__enumext_minipage_after_skip }
4063     }
4064     {
4065         \__enumext_keyans_multicols_stop:
4066     }
4067     \bool_set_false:N \l__enumext_keyans_env_bool
4068     \__enumext_after_stop_list_v:
4069     \__enumext_vspace_below_v:
4070 }

```

(End of definition for `__enumext_before_list_v:` and others.)

`__enumext_keyans_set_item_width:`

The function `__enumext_keyans_set_item_width:` will set the value of `\itemwidth` taking into account the value established by the list-offset key.

```

4071 \cs_new_protected:Nn \__enumext_keyans_set_item_width:
4072 {
4073     \dim_set:Nn \itemwidth { \linewidth }
4074     \dim_compare:nT
4075     {
4076         \l__enumext_listoffset_v_dim != \c_zero_dim
4077     }
4078     {
4079         \dim_sub:Nn \itemwidth { \l__enumext_listoffset_v_dim }
4080     }
4081 }

```

(End of definition for `__enumext_keyans_set_item_width:`.)

keyans Now we define the environment **keyans** also based on lists.

```

4082 \NewDocumentEnvironment{keyans}{0}{ }
4083 {
4084   \__enumext_keyans_safe_exec:
4085   \__enumext_keyans_parse_keys:n {#1}
4086   \__enumext_before_list_v:
4087   \__enumext_start_list:nn
4088   { \tl_use:N \__enumext_label_v_tl }
4089   {
4090     \__enumext_list_arg_two_v:
4091     \__enumext_before_keys_exec_v:
4092   }
4093   \__enumext_keyans_set_item_width:
4094   \__enumext_after_args_exec_v:
4095 }
4096 {
4097   \__enumext_check_starred_cmd:n { item }
4098   \__enumext_second_part_v:
4099 }

```

(End of definition for *keyans*. This function is documented on page 15.)

13.41 Tagging PDF support for non-standart list environments

The \TeX release 2022-06-01 brings automatic support for *tagged* PDF in several aspects, including the standard *list environments* and the **list** environment. Unfortunately non-standard *list environments* like **keyanspic** or the horizontal list environments **enumext*** and **keyans*** are not structured in a nice way, i.e. the expected result in the PDF file is the expected one, but the underlying structure is not correct. In simple terms, for *tagged* PDF a **list** environment is a **list** environment, no matter what it looks like in the PDF file.

To maintain a correct **list** structure when `\DocumentMetadata` is active, it is necessary to do some things manually using **tagpdf**[17] and **ltsockets**[19]. This implementation is an adaptation of my answer thanks to Ulrike Fischer's comments in [How can I modify my \item redefinition to be compatible with tagging-pdf](#).

13.41.1 Socket for tagging support in **enumext*** and **keyans***

We will first define the necessary sockets and their behavior for **enumext*** and **keyans***.

```

start-list-tags
stop-start-tags
stop-list-tags
\__enumext_start_list_tag:n
\__enumext_stop_start_list_tag:
\__enumext_stop_list_tag:n
4100 \socket_new:nn {tagsupport/__enumext/starred}{1 }
4101 \socket_new_plugin:nnn {tagsupport/__enumext/starred} {start-list-tags}
4102 {
4103   \tag_resume:n {#1}
4104   \tag_mc_end_push:
4105     \tag_struct_begin:n {tag=LI}
4106     \tag_struct_begin:n {tag=Lbl}
4107     \tag_mc_begin:n {tag=Lbl}
4108 }
4109 \socket_new_plugin:nnn {tagsupport/__enumext/starred} {stop-start-tags}
4110 {
4111   \tag_mc_end:
4112   \tag_struct_end:n {tag=Lbl}
4113   \tag_struct_begin:n {tag=LBody}
4114   \tag_struct_begin:n {tag=text-unit}
4115   \tag_struct_begin:n {tag=text}
4116 }
4117 \socket_new_plugin:nnn {tagsupport/__enumext/starred} {stop-list-tags}
4118 {
4119   \tag_struct_end:n {tag=text}
4120   \tag_struct_end:n {tag=text-unit}
4121   \tag_struct_end:n {tag=LBody}
4122   \tag_struct_end:n {tag=LI}
4123   \tag_mc_begin_pop:n {}
4124   \tag_suspend:n {#1}
4125 }

```

And now we'll wrap them so that they're only active when `\DocumentMetadata` is present.

```

4126 \cs_new_protected_nopar:Npn \__enumext_start_list_tag:n #1
4127 {
4128   \IfDocumentMetadataTF
4129   {
4130     \socket_assign_plugin:nn {tagsupport/__enumext/starred} {start-list-tags}
4131     \socket_use:nn {tagsupport/__enumext/starred} {#1}
4132   } {}
4133 }

```

```

4134 \cs_new_protected_nopar:Nn \__enumext_stop_start_list_tag:
4135 {
4136   \IfDocumentMetadataTF
4137   {
4138     \socket_assign_plug:nn {tagsupport/__enumext/starred} {stop-start-tags}
4139     \socket_use:nn {tagsupport/__enumext/starred} { }
4140   } {}
4141 }
4142 \cs_new_protected_nopar:Npn \__enumext_stop_list_tag:n #1
4143 {
4144   \IfDocumentMetadataTF
4145   {
4146     \socket_assign_plug:nn {tagsupport/__enumext/starred} {stop-list-tags}
4147     \socket_use:nn {tagsupport/__enumext/starred} {#1}
4148   } {}
4149 }

```

(End of definition for start-list-tags and others.)

13.41.2 Socket for tagging support in keyanspic

We will first define the necessary sockets and their behavior for `keyanspic` environment.

```

start-list-tags
stop-start-tags
stop-list-tags
\__enumext_anspic_start_list_tag:
\__enumext_anspic_stop_start_list_tag:
\__enumext_anspic_stop_list_tag:
4150 \socket_new:nn {tagsupport/__enumext/keyanspic}{ 0 }
4151 \socket_new_plug:nnn {tagsupport/__enumext/keyanspic} {start-list-tags}
4152 {
4153   \tag_resume:n {keyanspic}
4154   \tag_mc_end_push:
4155     \tag_struct_begin:n {tag=LI}
4156     \tag_struct_begin:n {tag=Lbl}
4157     \tag_mc_begin:n {tag=Lbl}
4158 }
4159 \socket_new_plug:nnn {tagsupport/__enumext/keyanspic} {stop-start-tags}
4160 {
4161   \tag_mc_end:
4162   \tag_struct_end:n {tag=Lbl}
4163   \tag_struct_begin:n {tag=LBody}
4164   \tag_struct_begin:n {tag=text-unit}
4165   \tag_struct_begin:n {tag=text}
4166   \tag_mc_begin:n {tag=text}
4167 }
4168 \socket_new_plug:nnn {tagsupport/__enumext/keyanspic} {stop-list-tags}
4169 {
4170   \tag_mc_end:
4171   \tag_struct_end:n {tag=text}
4172   \tag_struct_end:n {tag=text-unit}
4173   \tag_struct_end:n {tag=LBody}
4174   \tag_struct_end:n {tag=LI}
4175   \tag_mc_begin_pop:n {}
4176   \tag_suspend:n {keyanspic}
4177 }

```

And now we'll wrap them so that they're only active when `\DocumentMetadata` is present.

```

4178 \cs_new_protected_nopar:Nn \__enumext_anspic_start_list_tag:
4179 {
4180   \IfDocumentMetadataTF
4181   {
4182     \socket_assign_plug:nn {tagsupport/__enumext/keyanspic} {start-list-tags}
4183     \socket_use:n {tagsupport/__enumext/keyanspic}
4184   } {}
4185 }
4186 \cs_new_protected_nopar:Nn \__enumext_anspic_stop_start_list_tag:
4187 {
4188   \IfDocumentMetadataTF
4189   {
4190     \socket_assign_plug:nn {tagsupport/__enumext/keyanspic} {stop-start-tags}
4191     \socket_use:n {tagsupport/__enumext/keyanspic}
4192   } {}
4193 }
4194 \cs_new_protected_nopar:Nn \__enumext_anspic_stop_list_tag:
4195 {
4196   \IfDocumentMetadataTF
4197   {
4198     \socket_assign_plug:nn {tagsupport/__enumext/keyanspic} {stop-list-tags}

```

```

4199         \socket_use:n {tagsupport/___enumext/keyanspic}
4200     } {}
4201 }

```

(End of definition for `start-list-tags` and others.)

13.42 The environment `keyanspic` and `\anspic`

The `keyanspic` environment is a `list` based environment that uses the same configuration for “spacing” and `<label>` as the `keyans` environment, but it does not use `\item`. The `<contents>` are passed to the environment by means of the `\anspic` command as replacement for `\item` command and placed inside `minipage` environments, with the `<label>` centered “above” or “below”, adjusting *widths* and *position* according to the options passed to the environment.

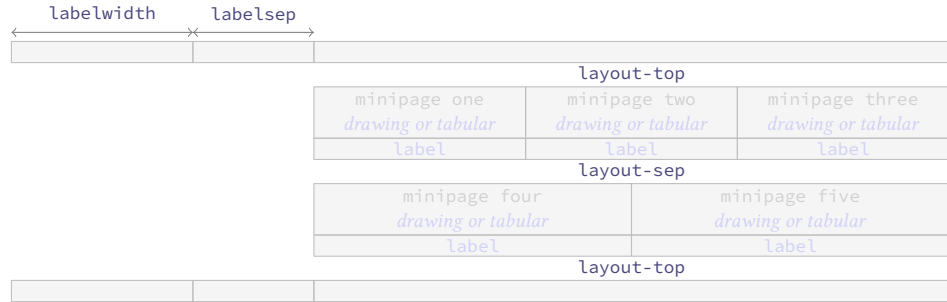


Figure 12: Representation of the `keyanspic` spacing in `enumext`.

In order for the `keyanspic` environment and the `\anspic` command to work correctly, we need to set and export some variables in the first part of the environment definition and pass them to `\anspic` which is executed in the second part of the environment. This implementation is adapted from the answer given by Enrico Gregorio (@egreg) in [How to process the body of an environment and divide it by a \macro?](#).

13.42.1 The environment `keyanspic`

First we define the key that allows us to process the position of the `<label>` centered “above” or “below” which will be `label-pos`, the vertical separation of these from *drawing or tabular* will be handled with the key `label-sep`. The “layout style” will be handled with the key `layout-sty` will take two values separated by comma `{<n° upper, n° lower>}` and will determine the number of `minipage` environments in which all arguments of `\anspic` will be printed at the “upper” and “lower” within the environments separated by the value of the key `layout-sep`. The vertical space “top” and “bottom” of the environment will be handled with the key `layout-top`.

```

4202 \keys_define:nn { enumext / keyanspic }
4203 {
4204     label-pos .choice:,
4205     label-pos / above .code:n =
4206         \bool_set_true:N \l__enumext_anspic_label_above_bool
4207         \str_set:Nn \l__enumext_anspic_mini_pos_str { t },
4208     label-pos / below .code:n =
4209         \bool_set_false:N \l__enumext_anspic_label_above_bool
4210         \str_set:Nn \l__enumext_anspic_mini_pos_str { b },
4211     label-pos / unknown .code:n =
4212         \msg_error:nnee { enumext } { unknown-choice }
4213         { label-pos } { above,~ below } { \exp_not:n {#1} },
4214     label-pos .initial:n = below,
4215     label-pos .value_required:n = true,
4216     label-sep .skip_set:N = \l__enumext_anspic_label_sep_skip,
4217     label-sep .value_required:n = true,
4218     layout-sty .tl_set:N = \l__enumext_anspic_layout_style_tl,
4219     layout-sty .value_required:n = true,
4220     layout-sep .code:n = \keys_set:nn { enumext / keyans } { parsep = #1 },
4221     layout-sep .value_required:n = true,
4222     layout-top .code:n = \keys_set:nn { enumext / keyans } { topsep = #1 },
4223     layout-top .value_required:n = true,
4224     mark-ans .code:n = \keys_set:nn { enumext / keyans } { mark-ans = #1 },
4225     mark-ans .value_required:n = true,
4226     mark-pos .code:n = \keys_set:nn { enumext / keyans } { mark-pos = #1 },
4227     mark-pos .value_required:n = true,
4228     mark-sep .code:n = \keys_set:nn { enumext / keyans } { mark-sep = #1 },
4229     mark-sep .value_required:n = true,
4230     save-sep .code:n = \keys_set:nn { enumext / keyans } { save-sep = #1 },
4231     save-sep .value_required:n = true,
4232     wrap-opt .code:n = \keys_set:nn { enumext / keyans } { wrap-opt = #1 },
4233     wrap-opt .value_required:n = true,

```

```

4234 wrap-ans* .code:n = \keys_set:nn { enumext / keyans } { wrap-ans* = #1 },
4235 wrap-ans* .value_required:n = true,
4236 show-ans .code:n = \keys_set:nn { enumext / keyans } { show-ans = #1 },
4237 show-ans .value_required:n = true,
4238 show-pos .code:n = \keys_set:nn { enumext / keyans } { show-pos = #1 },
4239 show-pos .value_required:n = true,
4240 unknown .code:n = {
4241     \tl_set:Nn \l__enumext_envir_name_tl { keyanspic }
4242     \__enumext_keyans_unknown_keys:n {#1}
4243 },
4244 }

```

(End of definition for label-pos and others.)

```

\__enumext_keyans_pic_safe_exec:
\__enumext_keyans_pic_parse_keys:n
\__enumext_keyans_pic_skip_abs:N
\__enumext_keyans_pic_arg_two:

```

The function `__enumext_keyans_pic_safe_exec:` check the nested level position inside the `enumext` environment.

```

4245 \cs_new_protected:Nn \__enumext_keyans_pic_safe_exec:
4246 {
4247     \int_incr:N \l__enumext_keyans_pic_level_int
4248     \int_compare:nNnT { \l__enumext_keyans_pic_level_int } > { 1 }
4249     {
4250         \msg_error:nn { enumext } { keyanspic-nested }
4251     }
4252     \__enumext_keyans_name_and_start:
4253 }

```

Parse [`⟨key = val⟩`] for `keyanspic` environment.

```

4254 \cs_new_protected:Npn \__enumext_keyans_pic_parse_keys:n #1
4255 {
4256     \tl_if_novalue:nF {#1}
4257     {
4258         \keys_set:nn { enumext / keyanspic } {#1}
4259     }
4260 }

```

The function `__enumext_keyans_pic_skip_abs:N` will return a positive value `\parsep` from `keyans` environment.

```

4261 \cs_new_protected:Npn \__enumext_keyans_pic_skip_abs:N #1
4262 {
4263     \dim_compare:nNnT { #1 } < { \c_zero_dim }
4264     {
4265         \skip_set:Nn #1 { -#1 }
4266     }
4267 }

```

The `__enumext_keyans_pic_arg_two:` function will be used in the *second argument* of the `list` environment that defines the `keyanspic` environment, with this we will take the configuration of the “spaces” and the keys `label`, `wrap-label`, `parsep` and `topsep` from the `keyans` environment. The first thing we need to do is set the boolean variable `\l__enumext_leftmargin_tmp_v_bool` handled by the `list-indent` key to “false”, then copy the definition of the second list argument from the `keyans` environment definition and make sure that `\parsep` does not have a negative value.

```

4268 \cs_new_protected:Npn \__enumext_keyans_pic_arg_two:
4269 {
4270     \bool_set_false:N \l__enumext_leftmargin_tmp_v_bool
4271     \__enumext_list_arg_two_v:
4272     \__enumext_keyans_pic_skip_abs:N \parsep

```

Now we increment the counter `enumXv` of the `keyans` environment and save the *total height* of the `⟨label⟩` in `\l__enumext_anspic_label_htdp_dim` used by `\anspic` and we will adjust the values of `\parsep` only if the key `label-pos` is set to *below*.

```

4273     \bool_if:NF \l__enumext_anspic_label_above_bool
4274     {
4275         \stepcounter { enumXv }
4276         \hbox_set:Nn \l__enumext_anspic_label_box { \l__enumext_label_v_tl }
4277         \dim_set:Nn \l__enumext_anspic_label_htdp_dim
4278         {
4279             \box_ht_plus_dp:N \l__enumext_anspic_label_box
4280         }
4281         \skip_add:Nn \parsep
4282         {
4283             \l__enumext_anspic_label_htdp_dim
4284             + \box_dp:N \strutbox

```

```

4285         + \l__enumext_anspic_label_sep_skip
4286     }
4287 }

```

Finally we *adjust* the value of `\leftmargin` and `\topsep` then set `\listparindent`, `\partopsep` and `\itemsep` to zero so that the *horizontal* and *vertical* space is not affected.

```

4288 \dim_add:Nn \leftmargin { -\l__enumext_labelwidth_v_dim - \l__enumext_labelsep_v_dim }
4289 \ignorespaces
4290 \skip_add:Nn \topsep { 0.5\box_dp:N \strutbox }
4291 \dim_zero:N \listparindent
4292 \skip_zero:N \partopsep
4293 \skip_zero:N \itemsep
4294 }

```

(End of definition for `__enumext_keyans_pic_safe_exec`: and others.)

keyanspic Now we define the environment `keyanspic`. For compatibility with *tagged* PDF we must use the `\begin{list}` form and a lot of conditional code using `\IfDocumentMetadataTF`. We will first stop the code for automatic *tagged* PDF for `list` environments, redefine `\item` so that it cannot be used, and stop the code for automatic *tagged* PDF for the `keyanspic` environment.

```

4295 \NewDocumentEnvironment{keyanspic}{ o }
4296 {
4297   \__enumext_keyans_pic_safe_exec:
4298   \__enumext_keyans_pic_parse_keys:n {#1}
4299   \begin{list} { } { \__enumext_keyans_pic_arg_two: }
4300   \IfDocumentMetadataTF
4301   {
4302     \tag_suspend:n {list}
4303   }{}
4304   \item[] \scan_stop:
4305   \RenewDocumentCommand \item {}
4306   {
4307     \msg_error:nn { enumext } { keyanspic-item-cmd }
4308   }
4309   \IfDocumentMetadataTF
4310   {
4311     \tag_resume:n {keyanspic}
4312     \tag_tool:n {para/tagging=false}
4313     \tag_suspend:n {keyanspic}
4314   } { }
4315 }

```

In the second part of the environment definition we will manually place our code for *tagged* PDF and execute the command `\anspic` using the `__enumext_anspic_exec`: function.

```

4316 {
4317   \IfDocumentMetadataTF
4318   {
4319     \tag_resume:n {keyanspic}
4320     \tag_mc_end_push:
4321     \tag_struct_begin:n {tag=L,attribute=enumerate}
4322   } { }
4323   \__enumext_anspic_exec:
4324   \IfDocumentMetadataTF
4325   {
4326     \tag_suspend:n {keyanspic}
4327   } { }
4328   \end{list}
4329   \IfDocumentMetadataTF
4330   {
4331     \tag_struct_end:n {tag=L}
4332     \tag_mc_begin_pop:n {}
4333     \tag_struct_end:n {tag=L}
4334     \tag_mc_begin_pop:n {}
4335   } { }

```

Finally we check if `\anspic*` has been used, set the counter `enumXvi` to zero and apply our “adjusted” vertical space bottom.

```

4336 \__enumext_check_starred_cmd:n { anspic }
4337 \setcounter { enumXvi } { 0 }
4338 \bool_if:NTF \l__enumext_anspic_label_above_bool
4339 {
4340   \par\addvspace{ 0.5\box_dp:N \strutbox }

```



```

4341     }
4342   {
4343     \par
4344     \addvspace
4345     {
4346       \dim_eval:n
4347       {
4348         \l__enumext_anspic_label_htdp_dim + \box_ht_plus_dp:N \strutbox
4349         + \l__enumext_anspic_label_sep_skip + \l__enumext_topsep_v_skip
4350       }
4351     }
4352   }
4353 }

```

(End of definition for `keyanspic`. This function is documented on page 16.)

13.42.2 The command `\anspic`

The `\anspic` command take three arguments, the *starred versions* `\anspic*[\langle content \rangle]` store the current `\label` next to the *optional argument* `[\langle content \rangle]` in the *sequence* and *prop list* defined by `save-ans` key. The third *mandatory argument* `{\langle drawing or tabular \rangle}` is NOT stored in the *sequence* or *prop list*.

- One of the complications here to make the `keyanspic` environment compatible with *tagged* PDF is the position of `\label`, the `\anspic` command processes the arguments in order, where #1 and #2 correspond to `\label` and #3 to the mandatory argument and puts all this inside a `minipage` environment. If #1 and #2, that is `\label`, is above #3 there are no problems with *tagged* PDF, but if #3 comes first the list created with *tagged* PDF will not be correct.

`\anspic`

We check that the command is active in the `keyanspic` environment only if the `save-ans` key is present, otherwise we return an error. The three arguments are handled by the function `__enumext_anspic_args:nnn` and stored in the sequence `\l__enumext_anspic_args_seq` which is processed by the `keyanspic` environment.

```

4354 \NewDocumentCommand \anspic { s o +m }
4355 {
4356   \bool_if:NF \l__enumext_store_active_bool
4357   {
4358     \msg_error:nnnn { enumext } { wrong-place } { keyanspic } { save-ans }
4359   }
4360   \int_compare:nNt { \l__enumext_level_int } > { 1 }
4361   {
4362     \msg_error:nn { enumext } { keyanspic-wrong-level }
4363   }
4364   \int_compare:nNt { \l__enumext_keyans_level_int } = { 1 }
4365   {
4366     \msg_error:nnnn { enumext } { command-wrong-place } { anspic } { keyans }
4367   }
4368   \seq_put_right:Nn \l__enumext_anspic_args_seq
4369   {
4370     \__enumext_anspic_args:nnn { #1 } { #2 } { #3 }
4371   }
4372 }

```

The `__enumext_anspic_body_dim:n` function will set the value of `\l__enumext_anspic_body_htdp_dim` equal to the “height plus depth” of the *mandatory argument* if the key `label-pos` is set “below”.

```

4373 \cs_new_protected:Npn \__enumext_anspic_body_dim:n #1
4374 {
4375   \bool_if:NF \l__enumext_anspic_label_above_bool
4376   {
4377     \IfDocumentMetadataTF
4378     {
4379       \tag_suspend:n {keyanspic}
4380     } { }
4381     \vbox_set:Nn \l__enumext_anspic_body_box { #1 }
4382     \dim_set:Nn \l__enumext_anspic_body_htdp_dim
4383     {
4384       \box_ht_plus_dp:N \l__enumext_anspic_body_box
4385     }
4386     \IfDocumentMetadataTF
4387     {
4388       \tag_resume:n {keyanspic}
4389     } { }
4390   }
4391 }

```

The `__enumext_anspic_label:nn` function will process inside `\makebox` the *starred argument* ‘*’ and *optional argument* passed to the command. Here we will store the `<label>` and *optional argument* in *prop list* and *sequence* and execute the `show-ans`, `show-pos`, `font`, `wrap-label`, `wrap-ans*` and `wrap-opt` keys.

```

4392 \cs_new_protected:Npn \__enumext_anspic_label:nn #1 #2
4393 {
4394   \makebox[ \l__enumext_anspic_mini_width_dim ][ c ]
4395   {
4396     \bool_if:NTF { #1 }
4397     {
4398       \bool_set_true:N \l__enumext_item_wrap_key_bool
4399       \bool_set_true:N \l__enumext_wrap_label_v_bool
4400       \__enumext_keyans_save_item_opt:n { #2 }
4401       \__enumext_keyans_addto_prop:n { #2 }
4402       \__enumext_keyans_store_ref:
4403       \__enumext_keyans_addto_seq:n { #2 }
4404       \int_gincr:N \g__enumext_check_starred_cmd_int
4405       \__enumext_keyans_show_ans:
4406       \__enumext_keyans_show_pos:
4407       \makebox[ \l__enumext_labelwidth_v_dim ][c]
4408       {
4409         \tl_use:N \l__enumext_label_font_style_v_tl
4410         \__enumext_keyans_wrapper_label:n { \l__enumext_label_vi_tl }
4411       }
4412       \skip_horizontal:n { \l__enumext_labelsep_v_dim }
4413       \__enumext_keyans_show_item_opt:
4414     }
4415     {
4416       \bool_set_false:N \l__enumext_item_wrap_key_bool
4417       \tl_use:N \l__enumext_label_font_style_v_tl
4418       \__enumext_wrapper_label_v:n { \l__enumext_label_vi_tl }
4419     }
4420   }
4421 }

```

The function `__enumext_anspic_label_pos:nnn` will be in charge of handling the “*counter*” and the position of the `<label>`, set by `label-pos` key which will have the same configuration as the `keyans` environment.

```

4422 \cs_new_protected:Npn \__enumext_anspic_label_pos:nnn #1 #2 #3
4423 {
4424   \stepcounter { enumXvi }
4425   \__enumext_anspic_body_dim:n { #3 }
4426   \bool_if:NTF \l__enumext_anspic_label_above_bool
4427   {
4428     \__enumext_anspic_label:nn { #1 } { #2 }
4429   }
4430   {
4431     \raisebox
4432     {
4433       -\dim_eval:n
4434       {
4435         \l__enumext_anspic_label_htdp_dim
4436         + \l__enumext_anspic_body_htdp_dim
4437         + \box_dp:N \strutbox
4438         + \l__enumext_anspic_label_sep_skip
4439       }
4440     }
4441     [ opt ] [ opt ]
4442     {
4443       \__enumext_anspic_label:nn { #1 } { #2 }
4444     }
4445   }
4446 }
4447 %

```

The `__enumext_anspic_args:nnn` function will be responsible for placing the code compatible with *tagged* PDF and the arguments within the `\l__enumext_anspic_args_seq` sequence which will be processed by the `__enumext_anspic_print:n` function in the second part of the definition of the `keyanspic` environment.

```

4448 \cs_new_protected:Nn \__enumext_anspic_args:nnn
4449 {
4450   \__enumext_anspic_start_list_tag:
4451   \__enumext_anspic_label_pos:nnn { #1 } { #2 } { #3 }
4452   \__enumext_anspic_stop_start_list_tag:

```

```

4453 \bool_if:NTF \l__enumext_anspic_label_above_bool
4454 {
4455   \[\l__enumext_anspic_label_sep_skip] #3
4456 }
4457 {
4458   \[ #3
4459 }
4460 \__enumext_anspic_stop_list_tag:
4461 }

```

The value $\langle n^{\circ upper}, n^{\circ lower} \rangle$ passed to the `layout-sty` key is split by comma and is handled directly by the function `__enumext_anspic_print:n` and passed to the function `__enumext_anspic_row:n`.

```

4462 \cs_new_protected:Nn \__enumext_anspic_print:n
4463 {
4464   \clist_map_function:nN { #1 } \__enumext_anspic_row:n
4465 }
4466 \cs_generate_variant:Nn \__enumext_anspic_print:n { e, V }

```

The function `__enumext_anspic_row:n` will set the *widths* for the `minipage` environments and place *all arguments* passed to `\anspic` saved in the `\l__enumext_anspic_args_seq` sequence inside them.

```

4467 \cs_new_protected:Nn \__enumext_anspic_row:n
4468 {
4469   \dim_set:Nn \l__enumext_anspic_mini_width_dim { \linewidth / #1 }
4470   \int_set:Nn \l__enumext_anspic_above_int { \l__enumext_anspic_below_int }
4471   \int_set:Nn \l__enumext_anspic_below_int { \l__enumext_anspic_above_int + #1 }
4472   \int_step_inline:nnn
4473   { \l__enumext_anspic_above_int + 1 }
4474   { \l__enumext_anspic_below_int }
4475   {
4476     \IfDocumentMetadataTF
4477     {
4478       \tag_suspend:n {minipage}
4479     } { }
4480     \begin{minipage}[ \l__enumext_anspic_mini_pos_str ]{ \l__enumext_anspic_mini_width_dim }
4481       \centering
4482       \seq_item:Nn \l__enumext_anspic_args_seq { ##1 }
4483     \end{minipage}
4484     \IfDocumentMetadataTF
4485     {
4486       \tag_resume:n {minipage}
4487     } { }
4488   }
4489   \par
4490 }

```

The `__enumext_anspic_exec:` function will execute all the code in the `\anspic` command in the second argument of the `keyanspic` environment definition. If the key `layout-sty` is not set, everything will be printed on a *single line*.

```

4491 \cs_new_protected:Nn \__enumext_anspic_exec:
4492 {
4493   \tl_if_empty:NTF \l__enumext_anspic_layout_style_tl
4494   {
4495     \__enumext_anspic_print:e { \seq_count:N \l__enumext_anspic_args_seq }
4496   }
4497   {
4498     \__enumext_anspic_print:V \l__enumext_anspic_layout_style_tl
4499   }
4500 }

```

(End of definition for `\anspic` and others. This function is documented on page 17.)

13.43 The horizontal environments

Generating *horizontal list environments* is NOT as simple as standard \LaTeX list environments. The fundamental part of the code is adapted from the `shortlst` package to a more modern version using `expl3`. It is not possible to redefine `\item` and `\makeLabel` using `\RenewDocumentCommand` as in the vertical *non starred* versions.

To achieve the *horizontal list environments* we will capture the `\item` command and the $\langle content \rangle$ of this in *horizontal box* using `\makebox` for the `label` and a `minipage` environment for the $\langle content \rangle$ passed to `\item`, we will also add the *optional argument* ($\langle number \rangle$) to `\item` to be able to *join columns* horizontally, in simple terms, we want `\item` to behave in the same way as in the `enumext` environment but adding an *first optional argument* ($\langle number \rangle$).

A side effect is the limitation of using `\item` in this way *without* using `\RenewDocumentCommand`, which loses the original definition and affects the *standard list environments* provided by \TeX and any environment defined using base `list` environment, including: `itemize`, `enumerate`, `description`, `quote`, `quotation`, `verse`, `center`, `flushleft`, `flushright`, `verbatim`, `tabbing`, `trivlist`, `list` and all environments created with `\newtheorem`.

One way to get around this is to use something like:

```
\AddToHook{env/enumerate/before}{recover original \item definition}
```

inside `minipage`, but in my partial tests this does not have the desired effect and the vertical and horizontal spacing is distorted. For now this will remain as a limitation and I will see if it is feasible to implement it in the future.

For compatibility with the *tagged* PDF we close the environments according to the presence or not of the `mini-env` key.

13.43.1 Functions for item box width

We set the default value for the *width of the box* containing the *content* of the items for `enumext*` environment.

```
\__enumext_starred_columns_set_vii:
\__enumext_starred_columns_set_viii:
4501 \cs_new_protected:Nn \__enumext_starred_columns_set_vii:
4502 {
4503   \dim_compare:nNt { \__enumext_columns_sep_vii_dim } = { \c_zero_dim }
4504   {
4505     \dim_set:Nn \__enumext_columns_sep_vii_dim
4506     {
4507       ( \__enumext_labelwidth_vii_dim + \__enumext_labelsep_vii_dim )
4508       / \__enumext_columns_vii_int
4509     }
4510   }
4511   \int_set:Nn \__enumext_tmpa_vii_int { \__enumext_columns_vii_int - 1 }
4512   \dim_set:Nn \__enumext_item_width_vii_dim
4513   {
4514     ( \linewidth - \__enumext_columns_sep_vii_dim * \__enumext_tmpa_vii_int )
4515     / \__enumext_columns_vii_int
4516     - \__enumext_labelwidth_vii_dim
4517     - \__enumext_labelsep_vii_dim
4518   }
```

When the key `rightmargin` is active we must adjust the values.

```
4519   \dim_compare:nNt { \__enumext_rightmargin_vii_dim } > { \c_zero_dim }
4520   {
4521     \dim_sub:Nn \__enumext_item_width_vii_dim
4522     {
4523       ( \__enumext_rightmargin_vii_dim * \__enumext_tmpa_vii_int )
4524       / \__enumext_columns_vii_int
4525     }
4526     \dim_add:Nn \__enumext_columns_sep_vii_dim
4527     {
4528       \__enumext_rightmargin_vii_dim
4529     }
4530   }
4531 }
```

Same implementation for the `keyans*` environment.

```
4532 \cs_new_protected:Nn \__enumext_starred_columns_set_viii:
4533 {
4534   \dim_compare:nNt { \__enumext_columns_sep_viii_dim } = { \c_zero_dim }
4535   {
4536     \dim_set:Nn \__enumext_columns_sep_viii_dim
4537     {
4538       ( \__enumext_labelwidth_viii_dim + \__enumext_labelsep_viii_dim )
4539       / \__enumext_columns_viii_int
4540     }
4541   }
4542   \int_set:Nn \__enumext_tmpa_viii_int { \__enumext_columns_viii_int - 1 }
4543   \dim_set:Nn \__enumext_item_width_viii_dim
4544   {
4545     ( \linewidth - \__enumext_columns_sep_viii_dim * \__enumext_tmpa_viii_int )
4546     / \__enumext_columns_viii_int
4547     - \__enumext_labelwidth_viii_dim
4548     - \__enumext_labelsep_viii_dim
4549   }
4550   \dim_compare:nNt { \__enumext_rightmargin_viii_dim } > { \c_zero_dim }
4551   {
4552     \dim_sub:Nn \__enumext_item_width_viii_dim
4553     {
```

```

4554         ( \l__enumext_rightmargin_viii_dim * \l__enumext_tmpa_vii_int )
4555         / \l__enumext_columns_viii_int
4556     }
4557 \dim_add:Nn \l__enumext_columns_sep_viii_dim
4558 {
4559     \l__enumext_rightmargin_viii_dim
4560 }
4561 }
4562 }

```

(End of definition for \l__enumext_starred_columns_set_vii: and \l__enumext_starred_columns_set_viii:.)

13.43.2 Functions for join item columns

\l__enumext_starred_joined_item_vii:n The functions \l__enumext_starred_joined_item_vii:n and \l__enumext_starred_joined_item_viii:n will set the *width* of the box in which the *⟨content⟩* passed to \item(*⟨columns⟩*) will be stored together with the value of \itemwidth for the **enumext*** environment.

```

4563 \cs_new_protected:Npn \l__enumext_starred_joined_item_vii:n #1
4564 {
4565     \int_set:Nn \l__enumext_joined_item_vii_int {#1}
4566     \int_compare:nNnT { \l__enumext_joined_item_vii_int } > { \l__enumext_columns_vii_int }
4567     {
4568         \msg_warning:nnee { enumext } { item-joined }
4569         { \int_use:N \l__enumext_joined_item_vii_int }
4570         { \int_use:N \l__enumext_columns_vii_int }
4571         \int_set:Nn \l__enumext_joined_item_vii_int
4572         {
4573             \l__enumext_columns_vii_int - \l__enumext_item_column_pos_vii_int + 1
4574         }
4575     }
4576     \int_compare:nNnT
4577     { \l__enumext_joined_item_vii_int }
4578     >
4579     { \l__enumext_columns_vii_int - \l__enumext_item_column_pos_vii_int + 1 }
4580     {
4581         \msg_warning:nnee { enumext } { item-joined-columns }
4582         { \int_use:N \l__enumext_joined_item_vii_int }
4583         {
4584             \int_eval:n
4585             { \l__enumext_columns_vii_int - \l__enumext_item_column_pos_vii_int + 1 }
4586         }
4587         \int_set:Nn \l__enumext_joined_item_vii_int
4588         {
4589             \l__enumext_columns_vii_int - \l__enumext_item_column_pos_vii_int + 1
4590         }
4591     }
4592     \int_compare:nNnTF { \l__enumext_joined_item_vii_int } > { 1 }
4593     {
4594         \int_set_eq:NN \l__enumext_joined_item_aux_vii_int \l__enumext_joined_item_vii_int
4595         \int_decr:N \l__enumext_joined_item_aux_vii_int
4596         \int_add:Nn \l__enumext_item_column_pos_vii_int { \l__enumext_joined_item_aux_vii_int }
4597         \int_gadd:Nn \g__enumext_item_count_all_vii_int { \l__enumext_joined_item_aux_vii_int }
4598         \dim_set:Nn \l__enumext_joined_width_vii_dim
4599         {
4600             \l__enumext_item_width_vii_dim * \l__enumext_joined_item_vii_int
4601             + ( \l__enumext_labelwidth_vii_dim + \l__enumext_labelsep_vii_dim
4602               + \l__enumext_columns_sep_vii_dim
4603               ) * \l__enumext_joined_item_aux_vii_int
4604         }
4605         \dim_set_eq:NN \itemwidth \l__enumext_joined_width_vii_dim
4606     }
4607     {
4608         \dim_set_eq:NN \l__enumext_joined_width_vii_dim \l__enumext_item_width_vii_dim
4609         \dim_set_eq:NN \itemwidth \l__enumext_item_width_vii_dim
4610     }
4611 }

```

Same implementation for the **keyans*** environment.

```

4612 \cs_new_protected:Npn \l__enumext_starred_joined_item_viii:n #1
4613 {
4614     \int_set:Nn \l__enumext_joined_item_viii_int {#1}
4615     \int_compare:nNnT { \l__enumext_joined_item_viii_int } > { \l__enumext_columns_viii_int }

```

```

4616     {
4617         \msg_warning:nnee { enumext } { item-joined }
4618         { \int_use:N \l__enumext_joined_item_viii_int }
4619         { \int_use:N \l__enumext_columns_viii_int }
4620         \int_set:Nn \l__enumext_joined_item_viii_int
4621         {
4622             \l__enumext_columns_viii_int - \l__enumext_item_column_pos_viii_int + 1
4623         }
4624     }
4625     \int_compare:nNtT
4626     { \l__enumext_joined_item_viii_int }
4627     >
4628     { \l__enumext_columns_viii_int - \l__enumext_item_column_pos_viii_int + 1 }
4629     {
4630         \msg_warning:nnee { enumext } { item-joined-columns }
4631         { \int_use:N \l__enumext_joined_item_viii_int }
4632         {
4633             \int_eval:n
4634             { \l__enumext_columns_viii_int - \l__enumext_item_column_pos_viii_int + 1 }
4635         }
4636         \int_set:Nn \l__enumext_joined_item_viii_int
4637         {
4638             \l__enumext_columns_viii_int - \l__enumext_item_column_pos_viii_int + 1
4639         }
4640     }
4641     \int_compare:nNtTF { \l__enumext_joined_item_viii_int } > { 1 }
4642     {
4643         \int_set_eq:NN \l__enumext_joined_item_aux_viii_int \l__enumext_joined_item_viii_int
4644         \int_decr:N \l__enumext_joined_item_aux_viii_int
4645         \int_add:Nn \l__enumext_item_column_pos_viii_int { \l__enumext_joined_item_aux_viii_int }
4646         \int_gadd:Nn \g__enumext_item_count_all_viii_int { \l__enumext_joined_item_aux_viii_int }
4647         \dim_set:Nn \l__enumext_joined_width_viii_dim
4648         {
4649             \l__enumext_item_width_viii_dim * \l__enumext_joined_item_viii_int
4650             + ( \l__enumext_labelwidth_viii_dim + \l__enumext_labelsep_viii_dim
4651                 + \l__enumext_columns_sep_viii_dim
4652             ) * \l__enumext_joined_item_aux_viii_int
4653         }
4654         \dim_set_eq:NN \itemwidth \l__enumext_joined_width_viii_dim
4655     }
4656     {
4657         \dim_set_eq:NN \l__enumext_joined_width_viii_dim \l__enumext_item_width_viii_dim
4658         \dim_set_eq:NN \itemwidth \l__enumext_item_width_viii_dim
4659     }
4660 }

```

(End of definition for `__enumext_starred_joined_item_vii:n` and `__enumext_starred_joined_item_viii:n`)

13.43.3 Functions for mini-env, mini-right and mini-right* keys

```

\__enumext_start_mini_vii:
\__enumext_stop_mini_vii:

```

The implementation of the `mini-env` key support is almost identical to the one used in the `enumext` and `keyans` environments, the difference is that the `__enumext_mini_page` environment on the “right side” is executed “after” closing the environment, so it is necessary to make a global copy of the variable `\l__enumext_minipage_right_vii_dim` in the variable `\g__enumext_minipage_right_vii_dim`.

```

4661 \cs_new_protected:Nn \__enumext_start_mini_vii:
4662 {
4663     \dim_compare:nNtT { \l__enumext_minipage_right_vii_dim } > { \c_zero_dim }
4664     {
4665         \dim_set:Nn \l__enumext_minipage_left_vii_dim
4666         {
4667             \linewidth
4668             - \l__enumext_minipage_right_vii_dim
4669             - \l__enumext_minipage_hsep_vii_dim
4670         }
4671         \bool_set_true:N \l__enumext_minipage_active_vii_bool
4672         \dim_gset_eq:NN
4673         \g__enumext_minipage_right_vii_dim
4674         \l__enumext_minipage_right_vii_dim
4675         \__enumext_mini_addvspace_vii:
4676         \nointerlineskip\noindent
4677         \__enumext_mini_page{ \l__enumext_minipage_left_vii_dim }
4678     }

```

```
4679 }
```

The function `__enumext_stop_mini_vii:` closes the `__enumext_mini_page` environment on the “*left side*”, applies `\hfill` and set the variable `\g__enumext_minipage_active_vii_bool` to “*true*” which will be used in the function `__enumext_after_env:nn` to execute the `minipage` on the “*right side*”. At this point we will execute the `__enumext_stop_list:` and `__enumext_stop_store_level_vii:` functions stopping the `list` environment and the level saving mechanism for storage in *sequence* of the `\anskey` command and `anskey*` environment. This function is passed to the `__enumext_after_list_vii:` function in the second part of the `enumext*` environment definition (§13.44).

```
4680 \cs_new_protected:Nn \__enumext_stop_mini_vii:
4681 {
4682   \bool_if:NTF \l__enumext_minipage_active_vii_bool
4683   {
4684     \__enumext_stop_list:
4685     \__enumext_stop_store_level_vii:
4686     \IfDocumentMetadataTF { \tag_resume:n {enumext*} } { }
4687     \end__enumext_mini_page
4688     \hfill
4689     \bool_gset_true:N \g__enumext_minipage_active_vii_bool
4690   }
4691   {
4692     \__enumext_stop_list:
4693     \__enumext_stop_store_level_vii:
4694   }
4695 }
```

(End of definition for `__enumext_start_mini_vii:` and `__enumext_stop_mini_vii:`.)

Finally we execute the `{\code}` passed to the `mini-right` or `mini-right*` keys stored in the variable `\g__enumext_miniright_code_vii_tl` in the `minipage` environment on the “*right side*”. For compatibility with the `caption` package and possibly other `{\code}` passed to this key, we will pass it to a box and then print it.

```
4696 \__enumext_after_env:nn {enumext*}
4697 {
4698   \bool_if:NT \g__enumext_minipage_active_vii_bool
4699   {
4700     \__enumext_minipage:w [ t ] { \g__enumext_minipage_right_vii_dim }
4701     \legacy_if_gset_false:n { @minipage }
4702     \skip_vertical:N \c_zero_skip
4703     \par\addvspace { \g__enumext_minipage_right_skip }
4704     \bool_if:NF \g__enumext_minipage_center_vii_bool
4705     {
4706       \tl_put_left:Nn \g__enumext_miniright_code_vii_tl
4707       {
4708         \centering
4709       }
4710     }
4711     \vbox_set_top:Nn \l__enumext_miniright_code_vii_box
4712     {
4713       \tl_use:N \g__enumext_miniright_code_vii_tl
4714     }
4715     \box_use_drop:N \l__enumext_miniright_code_vii_box
4716     \skip_vertical:N \c_zero_skip
4717     \__enumext_endminipage:
4718     \par\addvspace{ \g__enumext_minipage_after_skip }
4719   }
4720   \bool_gset_false:N \g__enumext_minipage_active_vii_bool
4721   \bool_gset_true:N \g__enumext_minipage_center_vii_bool
4722   \tl_gclear:N \g__enumext_miniright_code_vii_tl
4723   \dim_gzero:N \g__enumext_minipage_right_vii_dim
4724   \bool_gset_false:N \g__enumext_starred_bool
4725 }
```

`__enumext_start_mini_viii:` The implementation of the `mini-env`, `mini-right` and `mini-right*` keys is identical to the one used in the `enumext*` environment.

```
4726 \cs_new_protected:Nn \__enumext_start_mini_viii:
4727 {
4728   \dim_compare:nNnT { \l__enumext_minipage_right_viii_dim } > { \c_zero_dim }
4729   {
4730     \dim_set:Nn \l__enumext_minipage_left_viii_dim
4731     {
```



```

4732         \linewidth
4733         - \l__enumext_minipage_right_viii_dim
4734         - \l__enumext_minipage_hsep_viii_dim
4735     }
4736     \bool_set_true:N \l__enumext_minipage_active_viii_bool
4737     \dim_gset_eq:NN
4738         \g__enumext_minipage_right_viii_dim
4739         \l__enumext_minipage_right_viii_dim
4740     \__enumext_mini_addvspace_viii:
4741     \nointerlineskip\noindent
4742     \__enumext_mini_page{ \l__enumext_minipage_left_viii_dim }
4743 }
4744 }
4745 \cs_new_protected:Nn \__enumext_stop_mini_viii:
4746 {
4747     \bool_if:NTF \l__enumext_minipage_active_viii_bool
4748     {
4749         \__enumext_stop_list:
4750         \IfDocumentMetadataTF { \tag_resume:n {keyans*} } { }
4751         \end__enumext_mini_page
4752         \hfill
4753         \bool_gset_true:N \g__enumext_minipage_active_viii_bool
4754     }
4755     {
4756         \__enumext_stop_list:
4757     }
4758 }
4759 \__enumext_after_env:nn {keyans*}
4760 {
4761     \bool_if:NT \g__enumext_minipage_active_viii_bool
4762     {
4763         \__enumext_mini_page{ \g__enumext_minipage_right_viii_dim }
4764         \par\addvspace { \g__enumext_minipage_right_skip }
4765         \bool_if:NF \g__enumext_minipage_center_viii_bool
4766         {
4767             \tl_put_left:Nn \g__enumext_miniright_code_viii_tl
4768                 {
4769                     \centering
4770                 }
4771         }
4772         \vbox_set_top:Nn \l__enumext_miniright_code_viii_box
4773         {
4774             \tl_use:N \g__enumext_miniright_code_viii_tl
4775         }
4776         \box_use_drop:N \l__enumext_miniright_code_viii_box
4777         \end__enumext_mini_page
4778         \par\addvspace{ \g__enumext_minipage_after_skip }
4779     }
4780     \bool_gset_false:N \g__enumext_minipage_active_viii_bool
4781     \bool_gset_true:N \g__enumext_minipage_center_viii_bool
4782     \tl_gclear:N \g__enumext_miniright_code_viii_tl
4783     \dim_gzero:N \g__enumext_minipage_right_viii_dim
4784 }

```

(End of definition for __enumext_start_mini_viii: and __enumext_stop_mini_viii:.)

13.44 The environment enumext*

enumext* First we will generate the environment and we will give a temporary definition to __enumext_stop_item_tmp_vii: equal to __enumext_first_item_tmp_vii: and next to \item equal to __enumext_start_item_tmp_vii: which we will redefine later. Unlike the implementation used by the **shortlst** package, we will not set the values of \rightskip and \@rightskip equal to \@flushglue whose value is 0.0pt plus 1.0 fil, in the tests I have performed this fails in some circumstances and different results are obtained when using pdfTeX and LuaTeX.

```

4785 \NewDocumentEnvironment{enumext*}{ o }
4786 {
4787     \__enumext_safe_exec_vii:
4788     \__enumext_parse_keys_vii:n {#1}
4789     \__enumext_before_list_vii:
4790     \__enumext_start_store_level_vii:
4791     \__enumext_start_list:nn { }

```

```

4792     {
4793         \__enumext_list_arg_two_vii:
4794         \__enumext_before_keys_exec_vii:
4795     }
4796     \IfDocumentMetadataTF { \tag_suspend:n {enumext*} } { }
4797     \__enumext_starred_columns_set_vii:
4798     \item[] \scan_stop:
4799     \cs_set_eq:NN \__enumext_stop_item_tmp_vii: \__enumext_first_item_tmp_vii:
4800     \cs_set_eq:NN \item \__enumext_start_item_tmp_vii:
4801     \ignorespaces
4802 }
4803 {
4804     \IfDocumentMetadataTF { \tag_struct_end:n {tag=text-unit} } { }
4805     \__enumext_stop_item_tmp_vii:
4806     \__enumext_remove_extra_parsep_vii:
4807     \__enumext_after_list_vii:
4808 }

```

(End of definition for `enumext*`. This function is documented on page 5.)

`__enumext_safe_exec_vii:` We will first call the function `__enumext_is_not_nested:` which sets `\g__enumext_starred_bool` to true if we are NOT nested within `enumext`, then call the function `__enumext_internal_mini_page:` to create the environment `__enumext_mini_page`, we will increment `\l__enumext_level_h_int` to restrict nesting of the environment, set `\l__enumext_starred_bool` to true and finally call the function `__enumext_is_on_first_level:` which sets `\l__enumext_starred_first_bool` to true if we are not nested, allowing the “storage system” to be used.

```

4809 \cs_new_protected:Nn \__enumext_safe_exec_vii:
4810 {
4811     \__enumext_is_not_nested:
4812     \__enumext_internal_mini_page:
4813     \int_incr:N \l__enumext_level_h_int
4814     \int_compare:nNnT { \l__enumext_level_h_int } > { 1 }
4815     {
4816         \msg_error:nn { enumext } { nested }
4817     }
4818     \int_compare:nNnT { \l__enumext_keyans_level_h_int } = { 1 }
4819     {
4820         \msg_error:nnn { enumext } { nested-horizontal } { keyans*}
4821     }
4822     \bool_set_true:N \l__enumext_starred_bool
4823     \bool_set_false:N \l__enumext_standar_bool
4824     \__enumext_is_on_first_level:
4825 }

```

(End of definition for `__enumext_safe_exec_vii:.`)

`__enumext_parse_keys_vii:n` First we will clear the variable `\l__enumext_series_str` used by the key `series`, process the environment `[⟨key = val⟩]` and execute the function `__enumext_parse_series:n` and used by the key `series`, then we execute the function `__enumext_store_active_keys_vii:n` and reprocess the `⟨keys⟩` to pass them to the storage `sequence` if the key `save-key` is not active.

```

4826 \cs_new_protected:Npn \__enumext_parse_keys_vii:n #1
4827 {
4828     \tl_if_novalue:nF {#1}
4829     {
4830         \str_clear:N \l__enumext_series_str
4831         \keys_set:nn { enumext / enumext* } {#1}
4832         \__enumext_parse_series:n {#1}
4833         \__enumext_store_active_keys_vii:n {#1}
4834     }
4835 }

```

(End of definition for `__enumext_parse_keys_vii:n.`)

`__enumext_before_list_vii:` The function `__enumext_before_list_vii:` first calls the function `__enumext_vspace_above_vii:` used by the keys `above` and `above*`, then calls the function `__enumext_check_ans_active:` for the check answer mechanism and finally calls the functions `__enumext_before_args_exec:` and `__enumext_start_mini_vii:` used by the keys `before*`, `mini-env`, `mini-right` and `mini-right*`.

```

4836 \cs_new_protected:Nn \__enumext_before_list_vii:
4837 {
4838     \__enumext_vspace_above_vii:

```

```

4839     \__enumext_check_ans_active:
4840     \__enumext_before_args_exec_vii:
4841     \__enumext_start_mini_vii:
4842 }

```

(End of definition for __enumext_before_list_vii:.)

__enumext_after_list_vii: The function __enumext_after_list_vii: first calls the function __enumext_stop_mini_vii: which internally calls __enumext_stop_list: and __enumext_stop_store_level_vii: (§13.43.3) used by the keys `mini-env`, `mini-right` and `mini-right*`, then to the functions __enumext_after_stop_list_vii: used by the key `after`, __enumext_check_ans_key_hook: used by the key `check-ans`, __enumext_vspace_below_vii: used by the keys `below` and `below*`. Finally set __enumext_starred_bool to false and call the __enumext_resume_save_counter: function used by the `series`, `resume` and `resume*` keys.

```

4843 \cs_new_protected:Nn \__enumext_after_list_vii:
4844 {
4845     \__enumext_stop_mini_vii:
4846     \__enumext_after_stop_list_vii:
4847     \__enumext_check_ans_key_hook:
4848     \__enumext_vspace_below_vii:
4849     \bool_set_false:N \__enumext_starred_bool
4850     \__enumext_resume_save_counter:
4851 }

```

(End of definition for __enumext_after_list_vii:.)

__enumext_start_store_level_vii: The __enumext_start_store_level_vii: and __enumext_stop_store_level_vii: functions activate the “*storing structure*” mechanism in *sequence* for \anskey command and `anskey*` environment if `enumext*` are nested in `enumext`.

__enumext_stop_store_level_vii:

```

4852 \cs_new_protected:Nn \__enumext_start_store_level_vii:
4853 {
4854     \bool_if:NT \__enumext_store_active_bool
4855     {
4856         \int_compare:nNnT { \__enumext_level_int } > { 0 }
4857         {
4858             \__enumext_store_level_open_vii:
4859         }
4860     }
4861 }
4862 \cs_new_protected:Nn \__enumext_stop_store_level_vii:
4863 {
4864     \bool_if:NT \__enumext_store_active_bool
4865     {
4866         \int_compare:nNnT { \__enumext_level_int } > { 0 }
4867         {
4868             \__enumext_store_level_close_vii:
4869         }
4870     }
4871 }

```

(End of definition for __enumext_start_store_level_vii: and __enumext_stop_store_level_vii:.)

13.44.1 The command \item in enumext*

__enumext_first_item_tmp_vii:

The __enumext_first_item_tmp_vii: function will remove horizontal space equal to \labelwidth plus \labelsep to the left of the “*first*” \item in the environment at the point of execution of this function, where it is equal to the __enumext_stop_item_tmp_vii: function inside the environment body definition.

```

4872 \cs_new_protected_nopar:Nn \__enumext_first_item_tmp_vii:
4873 {
4874     \skip_horizontal:n
4875     {
4876         -\__enumext_labelwidth_vii_dim - \__enumext_labelsep_vii_dim
4877     }
4878     \ignorespaces
4879 }

```

(End of definition for __enumext_first_item_tmp_vii:.)

```

\__enumext_start_item_tmp_vii:
\__enumext_item_peek_args_vii:
\__enumext_joined_item_vii:w
\__enumext_standar_item_vii:w
\__enumext_starred_item_vii:w
\__enumext_starred_item_vii_aux_i:w
\__enumext_starred_item_vii_aux_ii:w
\__enumext_starred_item_vii_aux_iii:w

```

First we will call the function `__enumext_stop_item_tmp_vii:` that we will redefine later, we will increment the value of `\l__enumext_item_column_pos_vii_int` that will count the item's by rows and the value of `\g__enumext_item_count_all_vii_int` that will count the total of item's in the environment. After that we will call the function `__enumext_item_peek_args_vii:` that will handle the arguments passed to `\item`.

```

4880 \cs_new_protected_nopar:Nn \__enumext_start_item_tmp_vii:
4881 {
4882   \__enumext_stop_item_tmp_vii:
4883   \int_incr:N \l__enumext_item_column_pos_vii_int
4884   \int_gincr:N \g__enumext_item_count_all_vii_int
4885   \__enumext_item_peek_args_vii:
4886 }

```

The function `__enumext_item_peek_args_vii:` will handle the `\item(<number>)`. Look for the argument “(”, if it is present we will call the function `__enumext_joined_item_vii:w (<number>)`, which is in charge of joining the item's in the same row, in case they are not present we will set the default value (1).

```

4887 \cs_new_protected:Nn \__enumext_item_peek_args_vii:
4888 {
4889   \peek_meaning:NTF (
4890     { \__enumext_joined_item_vii:w }
4891     { \__enumext_joined_item_vii:w (1) }
4892   }

```

The function `__enumext_joined_item_vii:w` will first call the function `__enumext_starred_joined_item_vii:n` in charge of setting the *width* of the box that will store the content passed to `\item`. Then we will look for the argument “*”, if it is present we will call the function `__enumext_starred_item_vii:w` otherwise we will call the function `__enumext_standar_item_vii:w`.

```

4893 \cs_new_protected:Npn \__enumext_joined_item_vii:w (#1)
4894 {
4895   \__enumext_starred_joined_item_vii:n {#1}
4896   \peek_meaning_remove:NTF *
4897     { \__enumext_starred_item_vii:w }
4898     { \__enumext_standar_item_vii:w }
4899 }

```

The function `__enumext_standar_item_vii:w` will first look for the argument “[”, if present it will set the state of the variable `\l__enumext_wrap_label_opt_vii_bool` equal to the state of the variable `\l__enumext_wrap_label_opt_vii_bool` handled by the key `wrap-label*` and finally execute the *non-enumerated* version `\item[<custom>]` by means of the function `__enumext_start_item_vii:w`, otherwise we will set the value of the variable `\l__enumext_wrap_label_vii_bool` handled by the `wrap-label` key to true and set the switch `\if@noitemarg` to true to execute the enumerated version of `\item` by means of the function `__enumext_start_item_vii:w [\l__enumext_label_vii_tl]`.

```

4900 \cs_new_protected:Npn \__enumext_standar_item_vii:w
4901 {
4902   \bool_set_false:N \l__enumext_item_starred_vii_bool
4903   \peek_meaning:NTF [
4904     {
4905       \bool_set_eq:NN \l__enumext_wrap_label_vii_bool \l__enumext_wrap_label_opt_vii_bool
4906       \__enumext_start_item_vii:w
4907     }
4908     {
4909       \bool_set_true:N \l__enumext_wrap_label_vii_bool
4910       \legacy_if_set_true:n { @noitemarg }
4911       \__enumext_start_item_vii:w [ \l__enumext_label_vii_tl ] \ignorespaces
4912     }
4913   }

```

The function `__enumext_starred_item_vii:w` together with the specified auxiliary functions `aux_i:w`, `aux_ii:w`, and `aux_iii:w` execute `\item*`, `\item* [<symbol>]` and `\item* [<symbol>] [<offset>]`.

```

4914 \cs_new_protected:Npn \__enumext_starred_item_vii:w
4915 {
4916   \bool_set_true:N \l__enumext_item_starred_vii_bool
4917   \bool_set_true:N \l__enumext_wrap_label_vii_bool
4918   \peek_meaning:NTF [
4919     { \__enumext_starred_item_vii_aux_i:w }
4920     { \__enumext_starred_item_vii_aux_ii:w }
4921   }
4922 \cs_new_protected:Npn \__enumext_starred_item_vii_aux_i:w [#1]
4923 {
4924   \tl_gset:Nn \g__enumext_item_symbol_aux_vii_tl {#1}
4925   \__enumext_starred_item_vii_aux_ii:w

```

```

4926   }
4927   \cs_new_protected:Npn \__enumext_starred_item_vii_aux_ii:w
4928   {
4929     \peek_meaning:NTF [
4930       { \__enumext_starred_item_vii_aux_iii:w }
4931       {
4932         \dim_set_eq:NN \l__enumext_item_symbol_sep_vii_dim \l__enumext_labelsep_vii_dim
4933         \legacy_if_set_true:n { @noitemarg }
4934         \__enumext_start_item_vii:w [ \l__enumext_label_vii_tl ] \ignorespaces
4935       }
4936     }
4937   \cs_new_protected:Npn \__enumext_starred_item_vii_aux_iii:w [#1]
4938   {
4939     \dim_set:Nn \l__enumext_item_symbol_sep_vii_dim {#1}
4940     \legacy_if_set_true:n { @noitemarg }
4941     \__enumext_start_item_vii:w [ \l__enumext_label_vii_tl ] \ignorespaces
4942   }

```

(End of definition for `__enumext_start_item_tmp_vii:` and others.)

`__enumext_fake_make_label_vii:n`

The `__enumext_fake_make_label_vii:n` function will be in charge of handling our definition of `\item`. First we increment the counter `enumXvii` for the enumerated items and activate support for the *check answers* mechanism, followed by support for `\item*[\langle symbol \rangle][\langle offset \rangle]` if present, then the `wrap-label` and `wrap-label*` keys which we execute using `\makebox` whose width will be given by the `labelwidth` key and position by the `align` key, inside the argument of this we will execute the `font` key together with the function defined by the `wrap-label` or `wrap-label*` keys. Finally we execute the `labelsep` key applying a `\skip_horizontal:N` and `\ignorespaces`.

- For compatibility with *tagged* PDF and *hyperref* when an environment `enumext` is nested in `enumext*` and the key `save-ans` is not active need setting the `\if@hyper@item` switch to “true”. The explanation for this is given by the master Heiko Oberdiek on `\refstepcounter{enumi}` twice (or more) creates destination with the same identifier. This patch is only needed if you are running pdf_latex and not if you are running lua_latex

```

4943   \cs_new_protected_nopar:Npn \__enumext_fake_make_label_vii:n #1
4944   {
4945     \legacy_if:nT { @noitemarg }
4946     {
4947       \legacy_if_set_false:n { @noitemarg }
4948       \legacy_if:nT { @nمبرlist }
4949       {
4950         \IfDocumentMetadataTF
4951         {
4952           \bool_if:NT \l__enumext_hyperref_bool
4953           {
4954             \legacy_if_set_true:n { @hyper@item }
4955           }
4956         } { }
4957         \refstepcounter{enumXvii}
4958         \bool_if:NT \l__enumext_check_answers_bool
4959         {
4960           \int_gincr:N \g__enumext_item_number_int
4961           \bool_set_true:N \l__enumext_item_number_bool
4962         }
4963       }
4964     }
4965     \bool_if:NT \l__enumext_item_starred_vii_bool
4966     {
4967       \tl_if_blank:VT \g__enumext_item_symbol_aux_vii_tl
4968       {
4969         \tl_gset_eq:NN
4970         \g__enumext_item_symbol_aux_vii_tl \l__enumext_item_symbol_vii_tl
4971       }
4972       \mode_leave_vertical:
4973       \skip_horizontal:n { -\l__enumext_item_symbol_sep_vii_dim }
4974       \hbox_overlap_left:n { \g__enumext_item_symbol_aux_vii_tl }
4975       \skip_horizontal:N \l__enumext_item_symbol_sep_vii_dim
4976       \tl_gclear:N \g__enumext_item_symbol_aux_vii_tl
4977     }
4978     \makebox[ \l__enumext_labelwidth_vii_dim ][ \l__enumext_align_label_vii_str ]
4979     {
4980       \tl_use:N \l__enumext_label_font_style_vii_tl
4981       \bool_if:NTF \l__enumext_wrap_label_vii_bool

```

```

4982         {
4983             \__enumext_wrapper_label_vii:n {#1}
4984         }
4985         { #1 }
4986     }
4987     \skip_horizontal:N \__enumext_labelsep_vii_dim \ignorespaces
4988 }

```

(End of definition for __enumext_fake_make_label_vii:n.)

13.44.2 Real definition of \item in enumext*

The functions __enumext_start_item_vii:w and __enumext_stop_item_vii: executing the true definition of \item inside the enumext* environment, unlike the implementation in shortlst we will NOT use an extra group and the plain form of the lrbox environment.

__enumext_start_item_vii:w The first thing we will do is set the value of __enumext_stop_item_tmp_vii: equal to __enumext_stop_item_vii: which we will define later, after that we will start capturing \item and “item content” in a horizontal box where the width will be \itemwidth plus \labelwidth plus \labelsep.

```

4989 \cs_new_protected_nopar:Npn \__enumext_start_item_vii:w [#1]
4990 {
4991     \cs_set_eq:NN \__enumext_stop_item_tmp_vii: \__enumext_stop_item_vii:
4992     \hbox_set_to_wd:Nnw \l__enumext_item_text_vii_box
4993     {
4994         \l__enumext_joined_width_vii_dim
4995         + \l__enumext_labelwidth_vii_dim
4996         + \l__enumext_labelsep_vii_dim
4997     }

```

Redefine the \footnote command.

```

4998     \__enumext_renew_footnote_starred:

```

Now we insert our sockets for tagging PDF support and run \item.

```

4999     \__enumext_start_list_tag:n {enumext*}
5000     \__enumext_fake_make_label_vii:n {#1}
5001     \__enumext_stop_start_list_tag:

```

Finally we open the minipage environment, capture the “item content”, make \parindent take the value of the key listparindent and \parskip take the value of the key parsep, then execute the keys itemindent and first.

Here the use of \unskip and \skip_horizontal:n with the value of listparindent is necessary, otherwise an unwanted space is created when using \item[⟨opt⟩] and the value passed to the key itemindent is incremented.

```

5002     \__enumext_minipage:w [ t ]{ \l__enumext_joined_width_vii_dim }
5003     \dim_set_eq:NN \parindent \l__enumext_listparindent_vii_dim
5004     \skip_set_eq:NN \parskip \l__enumext_parsep_vii_skip
5005     \__enumext_unskip_unkern:
5006     \__enumext_unskip_unkern:
5007     \skip_horizontal:n { -\l__enumext_listparindent_vii_dim } \ignorespaces
5008     \tl_use:N \l__enumext_fake_item_indent_vii_tl
5009     \tl_use:N \l__enumext_after_list_args_vii_tl
5010 }

```

The __enumext_stop_item_vii: function will finish the fetching \item and “item content” by closing the minipage environment, the sockets for tagging PDF and the horizontal box.

```

5011 \cs_new_protected_nopar:Nn \__enumext_stop_item_vii:
5012 {
5013     \__enumext_endminipage:
5014     \__enumext_stop_list_tag:n {enumext*}
5015     \hbox_set_end:

```

Here we will reduce the warnings a bit by setting the value of \hbadness to 10000, print \item and “item content” from the horizontal box.

```

5016     \int_set:Nn \hbadness { 10000 }
5017     \box_use_drop:N \l__enumext_item_text_vii_box

```

Finally apply the vertical space between rows set by itemsep key passed to \parsep using \par\noindent and horizontal space between columns set by columns-sep key using \skip_horizontal:N.

```

5018     \int_compare:nNnTF
5019     { \l__enumext_item_column_pos_vii_int } = { \l__enumext_columns_vii_int }
5020     {
5021         \par\noindent
5022         \int_zero:N \l__enumext_item_column_pos_vii_int
5023     }

```

```

5024     {
5025         \skip_horizontal:N \l__enumext_columns_sep_vii_dim
5026     }
5027 }

```

(End of definition for \l__enumext_start_item_vii:w and \l__enumext_stop_item_vii:.)

\l__enumext_remove_extra_parsep_vii:

Remove the extra *vertical space* equal to `\parsep=\itemsep` when the total number of `\item` is divisible by the number of `\item` in the last row of the environment. Here the use of `\unskip` or `\removeatlastskip` fails and does not obtain the expected result, using `\vspace` is the option and in this case, we can use a simplified version since we are always in *(vertical mode)*.

```

5028 \cs_new_protected:Nn \l__enumext_remove_extra_parsep_vii:
5029 {
5030     \int_compare:nNtT
5031     {
5032         \int_mod:nn
5033         { \g__enumext_item_count_all_vii_int } { \l__enumext_columns_vii_int }
5034     }
5035     =
5036     { 0 }
5037     {
5038         \para_end:
5039         \skip_vertical:n { -\l__enumext_itemsep_vii_skip }
5040         \skip_vertical:N \c_zero_skip
5041         \int_gzero:N \g__enumext_item_count_all_vii_int
5042     }
5043 }

```

(End of definition for \l__enumext_remove_extra_parsep_vii:.)

As we don't want our check to be executed `check-ans` by levels but on the complete list, we will take it out of the `enumext*` environment using the “hook” function `\l__enumext_after_env:nn`.

```

5044 \l__enumext_after_env:nn {enumext*}
5045 {
5046     \l__enumext_execute_after_env:
5047 }

```

13.45 The environment `keyans*`

`keyans*`

The implementation of `keyans*` environment is the similar as that used by the `enumext*` environment except for the `\l__enumext_check_starred_cmd:n` function added in the second part.

```

5048 \NewDocumentEnvironment{keyans*}{o}
5049 {
5050     \l__enumext_safe_exec_viii:
5051     \l__enumext_parse_keys_viii:n {#1}
5052     \l__enumext_before_list_viii:
5053     \l__enumext_start_list:nn { }
5054     {
5055         \l__enumext_list_arg_two_viii:
5056         \l__enumext_before_keys_exec_viii:
5057     }
5058     \IfDocumentMetadataTF { \tag_suspend:n {keyans*} } { }
5059     \l__enumext_starred_columns_set_viii:
5060     \item[] \scan_stop:
5061     \cs_set_eq:NN \l__enumext_stop_item_tmp_viii: \l__enumext_first_item_tmp_viii:
5062     \cs_set_eq:NN \item \l__enumext_start_item_tmp_viii:
5063     \ignorespaces
5064 }
5065 {
5066     \IfDocumentMetadataTF { \tag_struct_end:n {tag=text-unit} } { }
5067     \l__enumext_stop_item_tmp_viii:
5068     \l__enumext_remove_extra_parsep_viii:
5069     \l__enumext_check_starred_cmd:n { item }
5070     \l__enumext_after_list_viii:
5071 }

```

(End of definition for `keyans*`. This function is documented on page 15.)

\l__enumext_safe_exec_viii:

The `\l__enumext_safe_exec_viii:` function will first check if the `save-ans` key is active and only when this is true the environment will be available, it will increment the value of `\l__enumext_keyans_level_h_int` and return an error message when we are nesting the environment, then it will call the `\l__enumext_keyans_name_and_start:` function in charge of saving the name of the environment and the line it is

running on, then it will check if we are trying to nest `keyans*` in `enumext*` returning an error and we will set `__enumext_starred_bool` to true, finally we will check if we are within the appropriate level within the `enumext` environment.

```

5072 \cs_new_protected:Nn \__enumext_safe_exec_viii:
5073 {
5074   \bool_if:NF \__enumext_store_active_bool
5075   {
5076     \msg_error:nnnn { enumext } { wrong-place } { keyans* } { save-ans }
5077   }
5078   \int_incr:N \__enumext_keyans_level_h_int
5079   \int_compare:nNnT { \__enumext_keyans_level_h_int } > { 1 }
5080   {
5081     \msg_error:nn { enumext } { nested }
5082   }
5083   \__enumext_keyans_name_and_start:
5084   \bool_if:NT \__enumext_starred_bool
5085   {
5086     \msg_error:nnn { enumext } { nested-horizontal } { enumext* }
5087   }
5088   \bool_set_true:N \__enumext_starred_bool
5089   % Set false for interfering with enumext nested in keyans* (yes, its possible and crayze)
5090   \bool_set_false:N \__enumext_store_active_bool
5091   \int_compare:nNnT { \__enumext_level_int } > { 1 }
5092   {
5093     \msg_error:nn { enumext } { keyans-wrong-level }
5094   }
5095 }

```

(End of definition for `__enumext_safe_exec_viii:`)

```

\__enumext_parse_keys_viii:n Parse [<key = val>] for keyans*.
5096 \cs_new_protected:Npn \__enumext_parse_keys_viii:n #1
5097 {
5098   \tl_if_novalue:nF {#1}
5099   {
5100     \keys_set:nn { enumext / keyans* } {#1}
5101   }
5102 }

```

(End of definition for `__enumext_parse_keys_viii:n`)

`__enumext_before_list_viii:` The function `__enumext_before_list_viii:` will add the vertical spacing on the environment if the `above` key is active next to the `{<code>}` defined by the `before*` key if it is active, the call the function `__enumext_start_mini_viii:` handle by `mini-env`.

```

5103 \cs_new_protected:Nn \__enumext_before_list_viii:
5104 {
5105   \__enumext_vspace_above_viii:
5106   \__enumext_before_args_exec_viii:
5107   \__enumext_start_mini_viii:
5108 }

```

(End of definition for `__enumext_before_list_viii:`)

`__enumext_after_list_viii:` The function `__enumext_after_list_viii:` first call the function `__enumext_stop_mini_viii:`, then apply the `{<code>}` handled by the `after` key together with the *vertical space* handled by the `below` key if they are present.

```

5109 \cs_new_protected:Nn \__enumext_after_list_viii:
5110 {
5111   \__enumext_stop_mini_viii:
5112   \__enumext_after_stop_list_viii:
5113   \__enumext_vspace_below_viii:
5114 }

```

(End of definition for `__enumext_after_list_viii:`)

13.45.1 The command `\item` in `keyans*`

The idea here is to make the `\item` command behave in the same way as in the `keyans` environment with the difference of the *optional argument* (`\langle number \rangle`) which works in the same way as in the `enumext*` environment. In simple terms we want to store the `\langle label \rangle` next to the `\langle content \rangle` if it is present in the *sequence* and *prop list* defined by `save-ans` key for `\item*`, `\item*\langle content \rangle`, `\item(\langle number \rangle)*` and `\item(\langle number \rangle)*\langle content \rangle` commands.

`_enumext_first_item_tmp_viii:`

The `_enumext_first_item_tmp_viii:` function will remove horizontal space equal to `\labelwidth` plus `\labelsep` to the left of the “first” `\item` in the environment at the point of execution of this function, where it is equal to the `_enumext_stop_item_tmp_viii:` function inside the environment body definition.

```
5115 \cs_new_protected_nopar:Nn \_enumext_first_item_tmp_viii:
5116 {
5117   \skip_horizontal:n
5118   {
5119     -\labelwidth_viii_dim - \labelsep_viii_dim
5120   }
5121   \ignorespaces
5122 }
```

(End of definition for `_enumext_first_item_tmp_viii:`.)

`_enumext_start_item_tmp_viii:`

`_enumext_item_peek_args_viii:`

`_enumext_joined_item_viii:w`

`_enumext_standar_item_viii:w`

First we will call the function `_enumext_stop_item_tmp_viii:` that we will redefine later, we will increment the value of `\l__enumext_item_column_pos_viii_int` that will count the item’s by rows and the value of `\g__enumext_item_count_all_viii_int` that will count the total of item’s in the environment. After that we will call the function `_enumext_item_peek_args_viii:` that will handle the arguments passed to `\item`.

```
5123 \cs_new_protected_nopar:Nn \_enumext_start_item_tmp_viii:
5124 {
5125   \_enumext_stop_item_tmp_viii:
5126   \int_incr:N \l__enumext_item_column_pos_viii_int
5127   \int_gincr:N \g__enumext_item_count_all_viii_int
5128   \_enumext_item_peek_args_viii:
5129 }
```

The function `_enumext_item_peek_args_viii:` will handle the `\item(\langle number \rangle)`. Look for the argument “(”, if it is present we will call the function `_enumext_joined_item_viii:w(\langle number \rangle)`, which is in charge of joining the item’s in the same row, in case they are not present we will set the default value (1).

```
5130 \cs_new_protected:Nn \_enumext_item_peek_args_viii:
5131 {
5132   \peek_meaning:NTF (
5133     { \_enumext_joined_item_viii:w }
5134     { \_enumext_joined_item_viii:w (1) }
5135 }
```

The function `_enumext_joined_item_viii:w` will first call the function `_enumext_starred_joined_item_viii:n` in charge of setting the *width* of the box that will store the content passed to `\item`. Then we will look for the argument “*”, if it is present we will call the function `_enumext_starred_item_viii:w` otherwise we will call the function `_enumext_standar_item_viii:w`.

```
5136 \cs_new_protected:Npn \_enumext_joined_item_viii:w (#1)
5137 {
5138   \_enumext_starred_joined_item_viii:n {#1}
5139   \peek_meaning_remove:NTF *
5140     { \_enumext_starred_item_viii:w }
5141     { \_enumext_standar_item_viii:w }
5142 }
```

The function `_enumext_standar_item_viii:w` will first look for the argument “[”, if present it will set the state of the variable `\l__enumext_wrap_label_opt_viii_bool` equal to the state of the variable `\l__enumext_wrap_label_opt_viii_bool` handled by the key `wrap-label*` and finally execute the *non-enumerated* version `\item[\langle custom \rangle]` by means of the function `_enumext_start_item_viii:w`, otherwise we will set the value of the variable `\l__enumext_wrap_label_viii_bool` handled by the `wrap-label` key to true and set the switch `\if@notitemarg` to true to execute the enumerated version of `\item` by means of the function `_enumext_start_item_viii:w[\l__enumext_label_viii_tl]`.

```
5143 \cs_new_protected:Npn \_enumext_standar_item_viii:w
5144 {
5145   \bool_set_false:N \l__enumext_item_starred_viii_bool
5146   \bool_set_false:N \l__enumext_item_wrap_key_bool
5147   \peek_meaning:NTF [
5148     {
5149       \bool_set_eq:NN \l__enumext_wrap_label_viii_bool \l__enumext_wrap_label_opt_viii_bool
```

```

5150     \__enumext_start_item_viii:w
5151   }
5152   {
5153     \bool_set_true:N \__enumext_wrap_label_viii_bool
5154     \legacy_if_set_true:n { @noitemarg }
5155     \__enumext_start_item_viii:w [ \__enumext_label_viii_tl ] \ignorespaces
5156   }
5157 }

```

(End of definition for __enumext_start_item_tmp_viii: and others.)

```

\__enumext_starred_item_viii:w
\__enumext_starred_item_viii_aux_i:w
\__enumext_starred_item_viii_aux_ii:w
\__enumext_keyans_starred_item_star:

```

The function __enumext_starred_item_viii:w together with the specified auxiliary functions `aux_i:w` and `aux_ii:w` execute `\item*` and `\item*[\langle content \rangle]`.

```

5158 \cs_new_protected:Npn \__enumext_starred_item_viii:w
5159 {
5160   \bool_set_true:N \__enumext_item_starred_viii_bool
5161   \bool_set_true:N \__enumext_item_wrap_key_bool
5162   \bool_set_true:N \__enumext_wrap_label_viii_bool
5163   \peek_meaning:NTF [
5164     { \__enumext_starred_item_viii_aux_i:w }
5165     { \__enumext_starred_item_viii_aux_ii:w }
5166   }

```

The function __enumext_starred_item_viii_aux_i:w will save the *optional argument* to `\item*` in `__enumext_store_current_opt_arg_tl` and will save this argument along with the spacing set by the key `save-sep` in variable `__enumext_store_current_label_tl` if present, then call the function `__enumext_starred_item_viii_aux_ii:w`.

```

5167 \cs_new_protected:Npn \__enumext_starred_item_viii_aux_i:w [#1]
5168 {
5169   \tl_clear:N \__enumext_store_current_label_tl
5170   \tl_if_no_value:nF { #1 }
5171   {
5172     \tl_if_empty:NF \__enumext_store_keyans_item_opt_sep_viii_tl
5173     {
5174       \tl_put_right:Ne \__enumext_store_current_label_tl
5175       {
5176         \__enumext_store_keyans_item_opt_sep_viii_tl
5177       }
5178       \tl_put_right:Ne \__enumext_store_current_label_tl { #1 }
5179     }
5180     \tl_set:Ne \__enumext_store_current_opt_arg_tl { #1 }
5181   }
5182   \__enumext_starred_item_viii_aux_ii:w
5183 }
5184 \cs_new_protected:Npn \__enumext_starred_item_viii_aux_ii:w
5185 {
5186   \legacy_if_set_true:n { @noitemarg }
5187   \__enumext_start_item_viii:w [ \__enumext_label_viii_tl ] \ignorespaces
5188 }

```

The function __enumext_keyans_starred_item_star: will be in charge of storing the current *(label)* for `\item*` followed by the `[\langle content \rangle]` for `\item*[\langle content \rangle]` if present in the *sequence* and *prop list* set by the `save-ans` key. In this same function the keys `show-ans`, `show-pos`, `mark-sep` and `save-ref` are implemented.

```

5189 \cs_new_protected:Nn \__enumext_keyans_starred_item_star:
5190 {
5191   \tl_put_left:Ne \__enumext_store_current_label_tl { \__enumext_label_viii_tl }
5192   \__enumext_store_addto_prop:V \__enumext_store_current_label_tl
5193   \__enumext_keyans_store_ref:
5194   \tl_put_left:Ne \__enumext_store_current_label_tl { \item }
5195   \__enumext_keyans_addto_seq_link:
5196   \int_gincr:N \g__enumext_check_starred_cmd_int
5197   \dim_compare:nNt { \__enumext_mark_sym_sep_viii_dim } = { \c_zero_dim }
5198   {
5199     \dim_set:Nn \__enumext_mark_sym_sep_viii_dim { \__enumext_labelsep_viii_dim }
5200   }
5201   \bool_if:NT \__enumext_show_answer_bool
5202   {
5203     \tl_set_eq:NN \__enumext_mark_answer_sym_tl \__enumext_mark_answer_sym_viii_tl
5204     \str_set_eq:NN \__enumext_mark_position_str \__enumext_mark_position_viii_str
5205     \__enumext_print_keyans_box:NN

```

```

5206         \l__enumext_labelwidth_viii_dim \l__enumext_mark_sym_sep_viii_dim
5207     }
5208     \bool_if:NT \l__enumext_show_position_bool
5209     {
5210         \tl_set:Nc \l__enumext_mark_answer_sym_tl
5211         {
5212             \group_begin:
5213             \exp_not:N \normalfont
5214             \exp_not:N \footnotesize [ \int_eval:n
5215                 {
5216                     \prop_count:c { g__enumext_ \l__enumext_store_name_tl _prop }
5217                 }
5218             ]
5219             \group_end:
5220         }
5221         \str_set_eq:NN \l__enumext_mark_position_str \l__enumext_mark_position_viii_str
5222         \__enumext_print_keyans_box:NN
5223         \l__enumext_labelwidth_viii_dim \l__enumext_mark_sym_sep_viii_dim
5224     }
5225 }

```

(End of definition for `__enumext_starred_item_viii:w` and others.)

```

\__enumext_keyans_wrapper_label_viii:n
\__enumext_fake_make_label_viii:n

```

The implementation at this is very similar to that of the `enumext*` environment.

```

5226 \cs_new_protected:Npn \__enumext_keyans_wrapper_label_viii:n #1
5227 {
5228     \bool_lazy_all:nT
5229     {
5230         { \bool_if_p:N \l__enumext_wrap_label_viii_bool }
5231         { \bool_if_p:N \l__enumext_show_answer_bool }
5232         { \bool_if_p:N \l__enumext_item_wrap_key_bool }
5233         { \cs_if_exist_p:N \__enumext_keyans_wrapper_item_viii:n }
5234     }
5235     {
5236         \cs_set_eq:NN
5237         \__enumext_wrapper_label_viii:n \__enumext_keyans_wrapper_item_viii:n
5238     }
5239     \bool_if:NTF \l__enumext_wrap_label_viii_bool
5240     {
5241         \__enumext_wrapper_label_viii:n {#1}
5242     }
5243     { #1 }
5244 }
5245 \cs_new_protected_nopar:Npn \__enumext_fake_make_label_viii:n #1
5246 {
5247     \legacy_if:nT { @noitemarg }
5248     {
5249         \legacy_if_set_false:n { @noitemarg }
5250         \legacy_if:nT { @nmbrrlist }
5251         {
5252             \refstepcounter{enumXviii}
5253         }
5254     }
5255     \bool_if:NT \l__enumext_item_starred_viii_bool
5256     {
5257         \__enumext_keyans_starred_item_star:
5258     }
5259     \makebox[ \l__enumext_labelwidth_viii_dim ][ \l__enumext_align_label_viii_str ]
5260     {
5261         \tl_use:N \l__enumext_label_font_style_viii_tl
5262         \__enumext_keyans_wrapper_label_viii:n {#1}
5263     }
5264     \skip_horizontal:N \l__enumext_labelsep_viii_dim \ignorespaces
5265 }

```

(End of definition for `__enumext_keyans_wrapper_label_viii:n` and `__enumext_fake_make_label_viii:n`.)

13.45.2 Real definition of `\item` in `keyans*`

```

\__enumext_start_item_viii:w
\__enumext_stop_item_viii:

```

The implementation at this is very similar to that of the `enumext*` environment.

```

5266 \cs_new_protected_nopar:Npn \__enumext_start_item_viii:w [#1]
5267 {

```

```

5268 \cs_set_eq:NN \__enumext_stop_item_tmp_viii: \__enumext_stop_item_viii:
5269 \hbox_set_to_wd:Nnw \l__enumext_item_text_viii_box
5270 {
5271   \l__enumext_joined_width_viii_dim
5272   + \l__enumext_labelwidth_viii_dim
5273   + \l__enumext_labelsep_viii_dim
5274 }
5275 \__enumext_renew_footnote_starred:
5276 \__enumext_start_list_tag:n {keyans*}
5277 \__enumext_fake_make_label_viii:n {#1}
5278 \__enumext_stop_start_list_tag:
5279 \__enumext_minipage:w [ t ]{ \l__enumext_joined_width_viii_dim }
5280 \dim_set_eq:NN \parindent \l__enumext_listparindent_viii_dim
5281 \skip_set_eq:NN \parskip \l__enumext_parsep_viii_skip
5282 \__enumext_unskip_unkern:
5283 \__enumext_unskip_unkern:
5284 \skip_horizontal:n { -\l__enumext_listparindent_viii_dim } \ignorespaces
5285 \tl_use:N \l__enumext_fake_item_indent_viii_tl
5286 \bool_if:NT \l__enumext_item_starred_viii_bool
5287 {
5288   \__enumext_keyans_show_item_opt_viii:
5289 }
5290 \tl_use:N \l__enumext_after_list_args_viii_tl
5291 }
5292 \cs_new_protected_nopar:Nn \__enumext_stop_item_viii:
5293 {
5294   \__enumext_endminipage:
5295   \__enumext_stop_list_tag:n {keyans*}
5296   \hbox_set_end:
5297   \int_set:Nn \hbadness { 10000 }
5298   \box_use_drop:N \l__enumext_item_text_viii_box
5299   \int_compare:nNnTF
5300   { \l__enumext_item_column_pos_viii_int } = { \l__enumext_columns_viii_int }
5301   {
5302     \par\noindent
5303     \int_zero:N \l__enumext_item_column_pos_viii_int
5304   }
5305   {
5306     \skip_horizontal:N \l__enumext_columns_sep_viii_dim
5307   }
5308 }

```

(End of definition for __enumext_start_item_viii:w and __enumext_stop_item_viii:.)

__enumext_remove_extra_parsep_viii:

The implementation at this is very similar to that of the `enumext*` environment.

```

5309 \cs_new_protected:Nn \__enumext_remove_extra_parsep_viii:
5310 {
5311   \int_compare:nNnT
5312   {
5313     \int_mod:nn
5314     { \g__enumext_item_count_all_viii_int }
5315     { \l__enumext_columns_viii_int }
5316   }
5317   =
5318   { 0 }
5319   {
5320     \para_end:
5321     \skip_vertical:n { -\l__enumext_itemsep_viii_skip }
5322     \skip_vertical:N \c_zero_skip
5323     \int_gzero:N \g__enumext_item_count_all_viii_int
5324   }
5325 }

```

(End of definition for __enumext_remove_extra_parsep_viii:.)

13.46 The command \getkeyans

```

\__enumext_getkeyans_aux:n
\__enumext_getkeyans:n

```

The `\getkeyans` command takes a *mandatory argument* of the form $\langle \textit{store name} : \textit{position} \rangle$. Retrieve a “single content” stored by `\anskey`, `\anspic*` and `\item*` and `anskey*` from *prop list* defined by `save-anskey`.

```

5326 \NewDocumentCommand \getkeyans { m }
5327 {

```

```

5328 \exp_args:Ne \__enumext_getkeyans_aux:n
5329 { \tl_to_str:e { \text_expand:n {#1} } }
5330 }

```

The internal function `__enumext_getkeyans_aux:n` is in charge of *splitting* the *mandatory argument* using “.”. If “.” is omitted it will return an error.

```

5331 \cs_new_protected:Npn \__enumext_getkeyans_aux:n #1
5332 {
5333   \str_if_in:nnTF {#1} { : }
5334   {
5335     \use:e
5336     {
5337       \cs_set:Npn \exp_not:N \__enumext_tmp:w ##1 \c_colon_str ##2 \scan_stop:
5338       { {##1} {##2} }
5339     }
5340     \exp_after:wN \__enumext_getkeyans:nn \__enumext_tmp:w #1 \scan_stop:
5341   }
5342   { \msg_error:nnn { enumext } { missing-colon } {#1} }
5343 }

```

The internal function `__enumext_getkeyans:nn` will check for the existence of the *prop list*, if it does not exist it will return an error message, then it will fetch the content specified by the *second argument* from *prop list*.

```

5344 \cs_new_protected:Npn \__enumext_getkeyans:nn #1 #2
5345 {
5346   \prop_if_exist:cTF { g__enumext_#1_prop }
5347   {
5348     \prop_item:cn { g__enumext_#1_prop }{#2}
5349   }
5350   {
5351     \msg_error:nnn { enumext } { undefined-storage-anskey } {#1}
5352   }
5353 }

```

(End of definition for `\getkeyans`, `__enumext_getkeyans_aux:n`, and `__enumext_getkeyans:nn`. This function is documented on page 18.)

13.47 The command `\printkeyans`

The `\printkeyans` command prints “all stored content” in the *sequence* defined by the *save-ans* key.

The first thing we will do is define a set of *filtered keys* with which we will control the options of the different nesting levels for the environment `enumext` and `enumext*` by storing their values in the list of tokens `\l__enumext_print_keyans_X_tl`.

The variable `\l__enumext_print_keyans_starred_tl` will have the default *keys* for `\printkeyans*` and will be set by `\setenumext[⟨print*⟩]` and the variable `\l__enumext_print_keyans_vii_tl` will have the default keys for the environment `enumext*` nested within the *sequence* and will be set by `\setenumext[⟨print,*⟩]`, the rest of the variables will be for the environment `enumext` and will be set by `\setenumext[⟨print,level⟩]`.

```

5354 \keys_define:nn { enumext / print }
5355 {
5356   print* .code:n = \keys_precompile:neN { enumext / enumext* }
5357               { \__enumext_filter_save_key:n {#1} }
5358               \l__enumext_print_keyans_starred_tl, % starred cmd
5359   print* .initial:n = { labelwidth=0pt, labelsep=0.3333em, itemindent=0pt, list-offset=0pt,
5360                       rightmargin=0pt, listparindent=0pt, nosep, label=\arabic*,
5361                       columns=2, first=\small, font=\small },
5362   print-1 .code:n = \keys_precompile:neN { enumext / level-1 }
5363                   { \__enumext_filter_save_key:n {#1} }
5364                   \l__enumext_print_keyans_i_tl,
5365   print-1 .initial:n = { labelwidth=0pt, labelsep=0.3333em, itemindent=0pt, list-offset=0pt,
5366                       rightmargin=0pt, listparindent=0pt, nosep, label=\arabic*,
5367                       columns=2, first=\small, font=\small },
5368   print-2 .code:n = \keys_precompile:neN { enumext / level-2 }
5369                   { \__enumext_filter_save_key:n {#1} }
5370                   \l__enumext_print_keyans_ii_tl,
5371   print-2 .initial:n = { labelwidth=0pt, labelsep=0.3333em, itemindent=0pt, list-offset=0pt,
5372                       rightmargin=0pt, listparindent=0pt, nosep, label=(\alph*),
5373                       first=\small, font=\small },
5374   print-3 .code:n = \keys_precompile:neN { enumext / level-3 }
5375                   { \__enumext_filter_save_key:n {#1} }
5376                   \l__enumext_print_keyans_iii_tl,

```

```

5377 print-3 .initial:n = { labelwidth=0pt, labelsep=0.3333em, itemindent=0pt, list-offset=0pt,
5378                      rightmargin=0pt, listparindent=0pt, nosepl, label=\roman*.,
5379                      first=\small, font=\small },
5380 print-4 .code:n      = \keys_precompile:neN { enumext / level-4 }
5381                      { \__enumext_filter_save_key:n {#1} }
5382                      \__enumext_print_keyans_iv_tl,
5383 print-4 .initial:n = { labelwidth=0pt, labelsep=0.3333em, itemindent=0pt, list-offset=0pt,
5384                      rightmargin=0pt, listparindent=0pt, nosepl, label=\Alpha*.,
5385                      first=\small, font=\small },
5386 print-* .code:n      = \keys_precompile:neN { enumext / enumext* }
5387                      { \__enumext_filter_save_key:n {#1} }
5388                      \__enumext_print_keyans_vii_tl, % starred nested
5389 print-* .initial:n = { labelwidth=0pt, labelsep=0.3333em, itemindent=0pt, list-offset=0pt,
5390                      rightmargin=0pt, listparindent=0pt, nosepl, label=\arabic*.,
5391                      first=\small, font=\small },
5392 }

```

• The reason for storing *(keys)* in token lists using `\keys_precompile:neN` is because the keys are set via `\setenumext` but are later executed by running the command `\printkeyans` and they are not handled directly by its *optional argument*, except those related to the *first* opening level.

`\printkeyans`

`__enumext_printkeyans:nnn`

Create a user command to print “*all stored content*” in *sequence* for `\anskey`, `anskey*`, `\item*` and `\anspic*`. Within a group we will run our “*precompiled keys*” and then call the internal function `__enumext_printkeyans:nnn`.

```

5393 \NewDocumentCommand \printkeyans { s O{} m }
5394 {
5395   \group_begin:
5396     \tl_use:N \__enumext_print_keyans_i_tl
5397     \tl_use:N \__enumext_print_keyans_ii_tl
5398     \tl_use:N \__enumext_print_keyans_iii_tl
5399     \tl_use:N \__enumext_print_keyans_iv_tl
5400     \tl_use:N \__enumext_print_keyans_vii_tl
5401     \__enumext_printkeyans:nnn { #1 } { #2 } { #3 }
5402   \group_end:
5403 }

```

The internal function `__enumext_printkeyans:nnn` will check for the existence of the *sequence*, if it does not exist it will return an error message, then it will check if not empty.

```

5404 \cs_new_protected:Npn \__enumext_printkeyans:nnn #1 #2 #3
5405 {
5406   \seq_if_exist:cTF { g__enumext_#3_seq }
5407   {
5408     \seq_if_empty:cF { g__enumext_#3_seq }
5409     {

```

If the *starred argument* ‘***’ is present we will check that the environment `enumext*` is not saved in the *sequence*, then execute the variable `__enumext_print_keyans_starred_tl` that contains the default *(keys)* for the environment `enumext*`, we set `__enumext_base_line_fix_bool` and `__enumext_print_keyans_star_bool` to true for *baseline correction*, open the `enumext*` environment passing the *optional argument* and map the *sequence*, then set `__enumext_base_line_fix_bool` and `__enumext_print_keyans_star_bool` to false.

```

5410       \bool_if:nTF {#1}
5411       {
5412         \seq_if_in:cnTF { g__enumext_#3_seq } { \end{enumext*} }
5413         {
5414           \msg_error:nnnn { enumext } { print-starred } {#3} { enumext* }
5415         }
5416         {
5417           \tl_use:N \__enumext_print_keyans_starred_tl
5418           \bool_set_true:N \__enumext_base_line_fix_bool
5419           \bool_set_true:N \__enumext_print_keyans_star_bool
5420           \begin{enumext*}[#2]
5421             \seq_map_inline:cn { g__enumext_#3_seq } { ##1 }
5422             \end{enumext*}
5423           \bool_set_false:N \__enumext_base_line_fix_bool
5424           \bool_set_false:N \__enumext_print_keyans_star_bool
5425         }
5426       }

```

Otherwise it will open the environment `enumext` passing the *optional argument* to the “*first level*” then map the *sequence*.

```

5427       {

```



```

5428         \begin{enumext}[#2]
5429         \seq_map_inline:cn { g__enumext_#3_seq } { ##1 }
5430         \end{enumext}
5431     }
5432 }
5433 }
5434 {
5435     \msg_error:nnn { enumext } { undefined-storage-anskey } {#3}
5436 }
5437 }

```

(End of definition for `\printkeyans` and `__enumext_printkeyans:nnn`. This function is documented on page 19.)

13.48 The command `\setenumext`

The command `\setenumext` will be in charge of managing the *keys* passed to all environments and to the `\printkeyans` command. We must take precautions with the `enumext*` environment and “first level” of the `enumext` environment so as not to capture *keys* that complicate us.

The function `__enumext_filter_first_level:n` will be in charge of filtering the *keys* passed to the environment `enumext*` and “first level” of the environment `enumext`.

```

5438 \cs_new:Npn \__enumext_filter_first_level:n #1
5439 {
5440     \use:e
5441     {
5442         \keyval_parse:NNn
5443         \__enumext_filter_first_level_key:n
5444         \__enumext_filter_first_level_pair:nn {#1}
5445     }
5446 }

```

The function `__enumext_filter_first_level_key:n` will be responsible for filtering the *keys* that are passed “without value” by excluding the keys `resume` and `resume*`.

```

5447 \cs_new:Npn \__enumext_filter_first_level_key:n #1
5448 {
5449     \str_case:nnF {#1}
5450     {
5451         { resume } {}
5452         { resume* } {}
5453     }
5454     { , { \exp_not:n {#1} } }
5455 }

```

The function `__enumext_filter_first_level_pair:nn` will be responsible for filtering the *keys* that are passed “with value” by excluding the `series`, `resume` and `save-ans` keys.

```

5456 \cs_new:Npn \__enumext_filter_first_level_pair:nn #1#2
5457 {
5458     \str_case:nnF {#1}
5459     {
5460         { series } {}
5461         { resume } {}
5462         { save-ans } {}
5463     }
5464     { , { \exp_not:n {#1} } = { \exp_not:n {#2} } }
5465 }

```

(End of definition for `__enumext_filter_first_level:n`, `__enumext_filter_first_level_key:n`, and `__enumext_filter_first_level_pair:nn`.)

Now define a “meta families” of *keys* to access from `\setenumext`.

```

5466 \keys_define:nn { enumext / meta-families }
5467 {
5468     enumext-1 .code:n =
5469     {
5470         \keys_set:ne { enumext / level-1 }
5471         {
5472             \__enumext_filter_first_level:n {#1}
5473         }
5474     } ,
5475     enumext-2 .code:n = { \keys_set:nn { enumext / level-2 } {#1} } ,
5476     enumext-3 .code:n = { \keys_set:nn { enumext / level-3 } {#1} } ,
5477     enumext-4 .code:n = { \keys_set:nn { enumext / level-4 } {#1} } ,
5478     keyans .code:n = { \keys_set:nn { enumext / keyans } {#1} } ,

```

```

5479     enumext* .code:n =
5480         {
5481             \keys_set:ne { enumext / enumext* }
5482             {
5483                 \__enumext_filter_first_level:n {#1}
5484             }
5485         } ,
5486     keyans* .code:n = { \keys_set:nn { enumext / keyans* } {#1} } ,
5487     print* .code:n = { \keys_set:nn { enumext / print } { print* = {#1} } } ,
5488     print-1 .code:n = { \keys_set:nn { enumext / print } { print-1 = {#1} } } ,
5489     print-2 .code:n = { \keys_set:nn { enumext / print } { print-2 = {#1} } } ,
5490     print-3 .code:n = { \keys_set:nn { enumext / print } { print-3 = {#1} } } ,
5491     print-4 .code:n = { \keys_set:nn { enumext / print } { print-4 = {#1} } } ,
5492     print-* .code:n = { \keys_set:nn { enumext / print } { print-* = {#1} } } ,
5493     unknown .code:n = { \msg_error:nn { enumext } { unknown-key-family } } ,
5494 }

```

We store them in the constant sequence `\c__enumext_all_families_seq` separated by commas.

```

5495 \seq_const_from_clist:Nn \c__enumext_all_families_seq
5496 {
5497     enumext-1, enumext-2, enumext-3, enumext-4, keyans, enumext*,
5498     keyans*, print-1, print-2, print-3, print-4, print-*, print*,
5499 }

```

`\setenumext` Now we define the user command `\setenumext`.

```

\__enumext_set_parse:n
\__enumext_set_error:nn
5500 \NewDocumentCommand \setenumext { 0{enumext,1} +m }
5501 {
5502     \seq_clear:N \l__enumext_setkey_tmpa_seq
5503     \seq_set_from_clist:Nn \l__enumext_setkey_tmpb_seq {#1}
5504     \int_set:Nn \l__enumext_setkey_tmpa_int
5505     {
5506         \seq_count:N \l__enumext_setkey_tmpb_seq
5507     }
5508     \int_compare:nNnTF { \l__enumext_setkey_tmpa_int } > { 1 }
5509     {
5510         \seq_pop_left:NN \l__enumext_setkey_tmpb_seq \l__enumext_setkey_tmpa_tl
5511         \seq_map_function:NN \l__enumext_setkey_tmpb_seq \__enumext_set_parse:n
5512         \seq_set_map_e:NNn \l__enumext_setkey_tmpa_seq \l__enumext_setkey_tmpa_seq
5513         {
5514             \tl_use:N \l__enumext_setkey_tmpa_tl - ##1
5515         }
5516     }
5517     {
5518         \seq_put_right:Ne \l__enumext_setkey_tmpa_seq { \tl_trim_spaces:n {#1} }
5519     }
5520     \seq_if_empty:NTF \l__enumext_setkey_tmpa_seq
5521     { \seq_map_inline:Nn \c__enumext_all_families_seq }
5522     { \seq_map_inline:Nn \l__enumext_setkey_tmpa_seq }
5523     {
5524         \keys_set:nn { enumext / meta-families } { ##1 = {#2} }
5525     }
5526 }

```

Internal functions used by the `\setenumext` command.

```

5527 \cs_new_protected:Npn \__enumext_set_parse:n #1
5528 {
5529     \tl_set:Ne \l__enumext_setkey_tmpb_tl { \tl_trim_spaces:n {#1} }
5530     \clist_map_inline:nn { 0, 1, 2, 3, 4, * } % <- max level
5531     { \tl_remove_all:Nn \l__enumext_setkey_tmpb_tl {##1} }
5532     \tl_if_empty:NTF \l__enumext_setkey_tmpb_tl
5533     {
5534         \seq_put_right:Ne \l__enumext_setkey_tmpa_seq
5535         { \tl_trim_spaces:n {#1} }
5536     }
5537     { \__enumext_set_error:nn {#1} { } }
5538 }
5539 \cs_new_protected:Npn \__enumext_set_error:nn #1 #2
5540 { \msg_error:nnn { enumext } { invalid-key } {#1} {#2} }

```

(End of definition for `\setenumext`, `__enumext_set_parse:n`, and `__enumext_set_error:nn`. This function is documented on page 6.)

13.49 The command \setenumextmeta

The command `\setenumextmeta` will be responsible for adding new “meta-keys” for the `enumext` and `enumext*` environments. The implementation code was given by Jonathan P. Spratte (@Skillmon) answer in [Add .meta key to existing keys \(l3keys\)](#).

`\setenumextmeta`

First we will create a prop list `\c__enumext_meta_paths_prop` to handle the *optional argument*.

```
\c__enumext_meta_paths_prop
__enumext_add_meta_key:nnn
__enumext_def_meta_key:nnn
__enumext_def_meta_key:Vnn

5541 \prop_const_from_keyval:Nn \c__enumext_meta_paths_prop
5542 {
5543   {enumext,1} = level-1,
5544   {enumext,2} = level-2,
5545   {enumext,3} = level-3,
5546   {enumext,4} = level-4,
5547   {enumext*} = enumext*
5548 }
```

Now we create the user command taking care that unknown cannot be passed as an argument.

```
5549 \NewDocumentCommand \setenumextmeta { s O{enumext,1} m +m }
5550 {
5551   \str_if_eq:eeTF { \tl_trim_spaces:n {#3} } { unknown }
5552   { \msg_error:nn { enumext } { prohibited-unknown } }
5553   {
5554     \bool_if:nTF {#1}
5555     {
5556       \int_step_inline:nn { 4 }
5557       { __enumext_add_meta_key:nnn { enumext, ##1 } {#3} {#4} }
5558       __enumext_add_meta_key:nnn { enumext* } {#3} {#4}
5559     }
5560     { __enumext_add_meta_key:nnn {#2} {#3} {#4} }
5561   }
5562 }
```

The internal functions `__enumext_add_meta_key:nnn` and `__enumext_def_meta_key:nnn` will check the *optional argument* and create the “meta-key”.

```
5563 \cs_new_protected:Npn __enumext_add_meta_key:nnn #1
5564 {
5565   \tl_set:Nn \l__enumext_meta_path_tl {#1}
5566   \tl_replace_all:Nnn \l__enumext_meta_path_tl { ~ } {}
5567   \prop_get:NVNTF
5568   \c__enumext_meta_paths_prop \l__enumext_meta_path_tl \l__enumext_meta_path_tl
5569   { __enumext_def_meta_key:Vnn \l__enumext_meta_path_tl }
5570   {
5571     \msg_error:nnn { enumext } { unknown-set } {#1}
5572     \use_none:nn
5573   }
5574 }
5575 \cs_new_protected:Npn __enumext_def_meta_key:nnn #1#2#3
5576 {
5577   \bool_lazy_or:nnTF
5578   { \keys_if_exist_p:nn { enumext / #1 } {#2} }
5579   { \keys_if_exist_p:nn { enumext / enumext* } {#2} }
5580   { \msg_error:nnn { enumext } { already-defined } {#2} }
5581   {
5582     \keys_define:nn { enumext / #1 }
5583     {
5584       #2 .meta:n = {#3},
5585       #2 .value_forbidden:n = true
5586     }
5587   }
5588 }
5589 \cs_generate_variant:Nn __enumext_def_meta_key:nnn { V }
```

(End of definition for `\setenumextmeta` and others. This function is documented on page 6.)

13.50 The command \foreachkeyans

The command `\foreachkeyans` will execute a *loop* over the *prop list* and return its contents. The implementation code is adapted from the answer provided by Enrico Gregorio (@egreg) in [Expand a .cs defined by key inside the function](#).

`\foreachkeyans`

We define a set of *⟨keys⟩* for command and we will save the default values of these in `\g__enumext_-foreach_default_keys_tl` to avoid the use of group.

```
\__enumext_parse_foreach_keys:nn
\__enumext_parse_foreach_keys:n
5590 \keys_define:nn { enumext / foreach }
```

©2024 by Pablo González L

```

5591 {
5592   before .tl_set:N = \l__enumext_foreach_before_tl,
5593   before .value_required:n = true,
5594   after  .tl_set:N = \l__enumext_foreach_after_tl,
5595   after  .value_required:n = true,
5596   start  .int_set:N = \l__enumext_foreach_start_int,
5597   start  .value_required:n = true,
5598   stop   .int_set:N = \l__enumext_foreach_stop_int,
5599   stop   .value_required:n = true,
5600   step   .int_set:N = \l__enumext_foreach_step_int,
5601   step   .value_required:n = true,
5602   wrapper .cs_set_protected:Np = \__enumext_foreach_wrapper:n #1,
5603   wrapper .value_required:n = true,
5604   sep     .tl_set:N = \l__enumext_foreach_sep_tl,
5605   sep     .value_required:n = true,
5606   unknown .code:n = { \__enumext_parse_foreach_keys:n {#1} }
5607 }
5608 \keys_precompile:nnN { enumext / foreach }
5609 {
5610   before={},after={},start=1,step=1,stop=0,wrapper=#1,sep={; }
5611 }
5612 \g__enumext_foreach_default_keys_tl

```

Functions for handling unknown $\langle keys \rangle$.

```

5613 \cs_new_protected:Npn \__enumext_parse_foreach_keys:nn #1#2
5614 {
5615   \tl_if_blank:nTF {#2}
5616   {
5617     \msg_error:nnn { enumext } { for-key-unknown } {#1}
5618   }
5619   {
5620     \msg_error:nnnn { enumext } { for-key-value-unknown } {#1} {#2}
5621   }
5622 }
5623 \cs_new_protected:Npn \__enumext_parse_foreach_keys:n #1
5624 {
5625   \exp_args:NV \__enumext_parse_foreach_keys:nn \l_keys_key_str {#1}
5626 }

```

We create the command.

```

5627 \NewDocumentCommand \foreachkeyans { +0{} m }
5628 {
5629   \__enumext_foreach_keyans:nn {#1} {#2}
5630 }

```

Finally the internal functions $\backslash_enumext_foreach_keyans:nn$ and $\backslash_enumext_foreach_add_body:n$ will loop through the prop list and print the contents.

```

5631 \cs_new_protected:Npn \__enumext_foreach_keyans:nn #1 #2
5632 {
5633   \tl_use:N \g__enumext_foreach_default_keys_tl
5634   \keys_set:nn { enumext / foreach } {#1}
5635   \tl_set:Nn \l__enumext_foreach_name_prop_tl {#2}
5636   \prop_if_exist:cF { g__enumext_#2_prop }
5637   {
5638     \msg_error:nnn { enumext } { undefined-storage-anskey } {#2}
5639   }
5640   \int_compare:nNnT { \l__enumext_foreach_stop_int } = { 0 }
5641   {
5642     \int_set:Nn \l__enumext_foreach_stop_int
5643     { \prop_count:c { g__enumext_#2_prop } }
5644   }
5645   \seq_clear:N \l__enumext_foreach_print_seq
5646   \int_step_function:nnnN
5647   { \l__enumext_foreach_start_int }
5648   { \l__enumext_foreach_step_int }
5649   { \l__enumext_foreach_stop_int }
5650   \__enumext_foreach_add_body:n
5651   \seq_use:NV \l__enumext_foreach_print_seq \l__enumext_foreach_sep_tl
5652 }
5653 \cs_new_protected:Npn \__enumext_foreach_add_body:n #1
5654 {
5655   \seq_put_right:Ne \l__enumext_foreach_print_seq

```

```

5656     {
5657         \exp_not:V \l__enumext_foreach_before_tl
5658         \__enumext_foreach_wrapper:n
5659         {
5660             \prop_item:cn { g__enumext_ \l__enumext_foreach_name_prop_tl _prop }{#1}
5661         }
5662         \exp_not:V \l__enumext_foreach_after_tl
5663     }
5664 }

```

(End of definition for `\foreachkeyans` and others. This function is documented on page 18.)

13.51 Messages

Message used by package-load for `multicol` and `hyperref` packages.

```

5665 \msg_new:nnn { enumext } { package-load }
5666 {
5667     The ~ '#1' ~ package ~ is ~ already ~ loaded.
5668 }
5669 \msg_new:nnn { enumext } { package-not-load }
5670 {
5671     The ~ '#1' ~ package ~ will ~ be ~ loaded ~ as ~ a ~ dependency.
5672 }
5673 \msg_new:nnn { enumext } { package-load-foot }
5674 {
5675     The ~ '#1' ~ package ~ is ~ loaded ~ with ~ the ~ option ~ '#2'.
5676 }

```

Message used in the creation of counters by `enumext` package.

```

5677 \msg_new:nnn { enumext } { counters }
5678 {
5679     The ~ counter ~ '#1' ~ is ~ already ~ defined ~ by ~ some ~ \\
5680     package ~ or ~ macro, ~ it ~ cannot ~ be ~ continued.
5681 }

```

Message used by `align` and `mark-pos` keys.

```

5682 \msg_new:nnn { enumext } { unknown-choice }
5683 {
5684     The ~ value ~ '#3' ~ for ~ '#1' ~ key ~ is ~ invalid ~ use ~ ('#2').
5685 }

```

Message used by reserved `anskey*` environment by `enumext` package.

```

5686 \msg_new:nnnn { enumext } { anskey-env-error }
5687 {
5688     The ~ '#1' ~ environment ~is ~ reserved ~ by ~\\
5689     'enumext' ~ package, ~ It~ is~ already~ defined.
5690 }
5691 {
5692     The ~ anskey* ~ environment ~ is ~ defined ~ internally ~
5693     for ~ the ~ 'save-ans' ~ key.\\
5694 }

```

Message used in the creation of *prop list* by `enumext` package.

```

5695 \msg_new:nnn { enumext } { store-prop }
5696 {
5697     * ~ Package ~ enumext: ~ Creating ~
5698     \c_backslash_str g__enumext_#1_prop ~ \msg_line_context:.
5699 }
5700 \msg_new:nnn { enumext } { store-seq }
5701 {
5702     * ~ Package ~ enumext: ~ Creating ~
5703     \c_backslash_str g__enumext_#1_seq ~ \msg_line_context:.
5704 }
5705 \msg_new:nnn { enumext } { store-int }
5706 {
5707     * ~ Package ~ enumext: ~ Creating ~
5708     \c_backslash_str g__enumext_resume_#1_int ~ \msg_line_context:.
5709 }
5710 \msg_new:nnn { enumext } { prop-seq-int-hook }
5711 {
5712     * ~ Package ~ enumext: ~ Elements ~ in ~
5713     \c_backslash_str g__enumext_#1_prop ~ = ~ #2.\\
5714     * ~ Package ~ enumext: ~ Elements ~ in ~

```

```

5715     \c_backslash_str g__enumext_#1_seq ~ = ~ #3.\\
5716     * ~ Package ~ enumext: ~ Value ~ off ~
5717     \c_backslash_str g__enumext_resume_#1_int ~ = ~ #4.
5718 }
5719 \msg_new:nnn { enumext } { item-answer-hook }
5720 {
5721     * ~ Package ~ enumext: ~ Value ~ off ~
5722     \c_backslash_str g__enumext_item_number_int ~ = ~ #1.\\
5723     * ~ Package ~ enumext: ~ Value ~ off ~
5724     \c_backslash_str g__enumext_item_anskey_int ~ = ~ #2.\\
5725     * ~ Package ~ enumext: ~ Difference ~ item_number_int ~ - ~ item_anskey_int ~ = ~ #3.
5726 }

```

Message used by [`(key = val)`] system and `\setenumext` command.

```

5727 \msg_new:nnn { enumext } { invalid-key }
5728 {
5729     The ~ key ~ '#1' ~ is ~ not ~ know ~ the ~ level ~ #2.
5730 }
5731 \msg_new:nnn { enumext } { unknown-key-family }
5732 {
5733     Unknown~key~family~`\l_keys_key_str'~for~enumext.
5734 }

```

Messages used in length calculation.

```

5735 \msg_new:nnn { enumext } { width-negative }
5736 {
5737     Ignoring ~ negative ~ value ~ '#1=#2' ~ \msg_line_context:.\
5738     The ~ key ~ '#1'~ accepts ~ values ~ >= ~ 0pt.
5739 }
5740 \msg_new:nnn { enumext } { width-zero }
5741 {
5742     Invalid ~ '#1=#2' ~ \msg_line_context:.\
5743     The ~ key ~ '#1'~ accepts ~ values ~ > ~ 0pt.
5744 }

```

Messages used by `show-length` key in `enumext`.

```

5745 \msg_new:nnn { enumext } { list-lengths }
5746 {
5747     **** ~ Lengths ~ used ~ by ~ 'enumext' ~ level ~ '#2' ~ \msg_line_context:~\c_space_tl ****\\
5748     \__enumext_show_length:nnn { dim } { labelsep } { #1}
5749     \__enumext_show_length:nnn { dim } { labelwidth } { #1}
5750     \__enumext_show_length:nnn { dim } { itemindent } { #1}
5751     \__enumext_show_length:nnn { dim } { leftmargin } { #1}
5752     \__enumext_show_length:nnn { dim } { rightmargin } { #1}
5753     \__enumext_show_length:nnn { dim } { listparindent } { #1}
5754     \__enumext_show_length:nnn { skip } { topsep } { #1}
5755     \__enumext_show_length:nnn { skip } { parsep } { #1}
5756     \__enumext_show_length:nnn { skip } { partopsep } { #1}
5757     \__enumext_show_length:nnn { skip } { itemsep } { #1}
5758     ****
5759 }

```

Messages used by `show-length` key in `enumext*`, `keyans*` and `keyans`.

```

5760 \msg_new:nnn { enumext } { list-lengths-not-nested }
5761 {
5762     **** ~ Lengths ~ used ~ by ~ '#2' ~ environment ~ \msg_line_context:~\c_space_tl ****\\
5763     \__enumext_show_length:nnn { dim } { labelsep } { #1}
5764     \__enumext_show_length:nnn { dim } { labelwidth } { #1}
5765     \__enumext_show_length:nnn { dim } { itemindent } { #1}
5766     \__enumext_show_length:nnn { dim } { leftmargin } { #1}
5767     \__enumext_show_length:nnn { dim } { rightmargin } { #1}
5768     \__enumext_show_length:nnn { dim } { listparindent } { #1}
5769     \__enumext_show_length:nnn { skip } { topsep } { #1}
5770     \__enumext_show_length:nnn { skip } { parsep } { #1}
5771     \__enumext_show_length:nnn { skip } { partopsep } { #1}
5772     \__enumext_show_length:nnn { skip } { itemsep } { #1}
5773     ****
5774 }

```

Messages used by `ref` key.

```

5775 \msg_new:nnn { enumext } { key-ref-empty }
5776 {
5777     Key ~ 'ref' ~ need ~ a ~ value ~ in ~ '#1'~ \msg_line_context:.
5778 }

```

Messages used by `save-ans` key.

```

5779 \msg_new:nnn { enumext } { save-ans-empty }
5780 {
5781   Key ~ 'save-ans' ~ need ~ a ~ value ~ in ~ '#1' ~ \msg_line_context:.
5782 }
5783 \msg_new:nnn { enumext } { save-ans-log }
5784 {
5785   * ~ Package ~ enumext: ~ Start ~ #1\c_space_tl with ~ save-ans=#2 ~ \msg_line_context:.
5786 }
5787 \msg_new:nnn { enumext } { save-ans-log-hook }
5788 {
5789   * ~ Package ~ enumext: ~ Stop ~ #1\c_space_tl with ~ save-ans=#2 ~ \msg_line_context:.
5790 }
5791 \msg_new:nnn { enumext } { save-ans-hook }
5792 {
5793   Stop ~ storing ~ for ~ 'save-ans=#1' ~ \msg_line_context:.
5794 }

```

Messages used by the internal system to check answer used by `check-ans` key.

```

5795 \msg_new:nnn { enumext } { need-save-ans }
5796 {
5797   Key ~ '#1' ~ works ~ only ~ with ~ the ~ 'save-ans' ~ key ~ in ~ '#2' ~ \msg_line_context:.
5798 }
5799 \msg_new:nnn { enumext } { items-same-answer }
5800 {
5801   *****\
5802   * ~ Package ~ enumext: ~ Checking ~ answers ~ in ~ '#1' ~
5803   for ~ \c_left_brace_str #2 \c_right_brace_str\
5804   * ~ started ~ #3 ~ and ~ close ~ \msg_line_context: : ~
5805   'OK', ~ all ~ items ~ with ~ answer.\
5806   *****
5807 }
5808 \msg_new:nnn { enumext } { item-greater-answer }
5809 {
5810   Checking ~ answers ~ in ~ '#1' ~ for ~ \c_left_brace_str #2 \c_right_brace_str\
5811   started ~ #3 ~ and ~ close ~ \msg_line_context: : ~'NOT ~ OK'\
5812   Items ~ > ~ Answers.
5813 }
5814 \msg_new:nnn { enumext } { item-less-answer }
5815 {
5816   Checking ~ answers ~ in ~ '#1' ~ for ~ \c_left_brace_str #2 \c_right_brace_str\
5817   started ~ #3 ~ and ~ close ~ \msg_line_context: : ~'NOT ~ OK'\
5818   Items ~ < ~ Answers.
5819 }

```

Messages used by the internal system to check for “starred” `\item*` and `\anspic*` commands.

```

5820 \msg_new:nnn { enumext } { missing-starred }
5821 {
5822   Missing ~ '\c_backslash_str #1*' ~ #2.
5823 }
5824 \msg_new:nnn { enumext } { many-starred }
5825 {
5826   Many ~ '\c_backslash_str #1*' ~ #2.
5827 }

```

Messages used by `\printkeyans*` command.

```

5828 \msg_new:nnn { enumext } { print-starred }
5829 {
5830   \c_backslash_str printkeyans*:~ The ~ sequence ~ '#1' ~ already ~ contains ~
5831   #2 ~ environment ~ \msg_line_context:.
5832 }

```

Message for the nesting depth of the environment `enumext`.

```

5833 \msg_new:nnn { enumext } { list-too-deep }
5834 {
5835   Too ~ deep ~ nesting ~ for ~ 'enumext' ~ \msg_line_context:.. \
5836   The ~ maximum ~ level ~ of ~ nesting ~ is ~ 4.
5837 }

```

Messages used by `\anskey`, `anskey*` and `\anspic` commands.

```

5838 \msg_new:nnn { enumext } { anskey-unnumber-item }
5839 {
5840   Can't ~ store ~ with ~ a ~ unnumbered ~ \c_backslash_str item ~ \msg_line_context:.

```



```

5841 }
5842 \msg_new:nnn { enumext } { anskey-already-stored }
5843 {
5844   Content ~ already ~ stored ~ for ~ this ~ \c_backslash_str item ~ \msg_line_context:.
5845 }
5846 \msg_new:nnn { enumext } { anskey-empty-arg }
5847 {
5848   Can't ~ store ~ empty ~ content ~ \msg_line_context:.
5849 }
5850 \msg_new:nnn { enumext } { anskey-wrong-place }
5851 {
5852   Wrong ~ place ~ for ~ command ~ '\c_backslash_str #1' ~ \msg_line_context:~ \\
5853   '\c_backslash_str #1' ~ works ~ in ~ the ~ environment ~ '#2'.
5854 }
5855 \msg_new:nnn { enumext } { anskey-nested }
5856 {
5857   The ~ command ~ \c_backslash_str anskey~ can't ~ be ~ nested ~ \msg_line_context:.
5858 }
5859 \msg_new:nnn { enumext } { anskey-math-mode }
5860 {
5861   #1 ~ can't ~ work ~ in ~ math ~ mode ~ \msg_line_context:.
5862 }
5863 \msg_new:nnn { enumext } { anskey-env-wrong }
5864 {
5865   The ~ environment ~ anskey* ~ cannot ~ use ~ in ~ '#1' ~ \msg_line_context:.
5866 }
5867 \msg_new:nnn { enumext } { anskey-wrong-place }
5868 {
5869   Wrong ~ place ~ for ~ command ~ '\c_backslash_str #1' ~ \msg_line_context:~ \\
5870   '\c_backslash_str #1' ~ works ~ in ~ the ~ environment ~ '#2'.
5871 }
5872 \msg_new:nnn { enumext } { command-wrong-place }
5873 {
5874   Wrong ~ place ~ for ~ command ~ '\c_backslash_str #1' ~ \msg_line_context:~ \\
5875   '\c_backslash_str #1' ~ works ~ outside ~ the ~ environment ~ '#2'.
5876 }
5877 \msg_new:nnnn { enumext } { anskey-env-key-unknown }
5878 {
5879   The ~ key ~ '#1' ~ is ~ unknown ~ by ~ environment~
5880   'anskey*' ~ and ~ is ~ being ~ ignored.
5881 }
5882 {
5883   The ~ environment ~ 'anskey*' ~ does ~ not ~ have ~ a ~ key ~ called ~'#1'.\\
5884   Check ~ that ~ you ~ have ~ spelled ~ the ~ key ~ name ~ correctly.
5885 }
5886 \msg_new:nnnn { enumext } { anskey-env-key-value-unknown }
5887 {
5888   The ~ key ~ '#1=#2' ~ is ~ unknown ~ by ~ environment ~
5889   'anskey*' ~ and ~ is ~ being ~ ignored.
5890 }
5891 {
5892   The ~ environment ~ 'anskey*' ~ does ~ not ~ have ~ a ~ key ~ called ~'#1'.\\
5893   Check ~ that ~ you ~ have ~ spelled ~ the ~ key ~ name ~ correctly.
5894 }
5895 \msg_new:nnnn { enumext } { anskey-cmd-key-unknown }
5896 { The ~ key ~ '#1' ~ is ~ unknown ~ by ~ '\c_backslash_str anskey' ~ and ~ is ~ being ~ ignored.}
5897 {
5898   The ~ command ~ '\c_backslash_str anskey' ~ does ~ not ~ have ~ a ~ key ~ called ~'#1'.\\
5899   Check ~ that ~ you ~ have ~ spelled ~ the ~ key ~ name ~ correctly.
5900 }
5901 \msg_new:nnnn { enumext } { anskey-cmd-key-value-unknown }
5902 { The ~ key ~ '#1=#2' ~ is ~ unknown ~ by ~ '\c_backslash_str anskey' ~ and ~ is ~ being ~ ignored.}
5903 {
5904   The ~ command ~ '\c_backslash_str anskey' ~ does ~ not ~ have ~ a ~ key ~ called ~'#1'.\\
5905   Check ~ that ~ you ~ have ~ spelled ~ the ~ key ~ name ~ correctly.
5906 }

```

Messages used by **keyans**, **keyans*** and **keyanspic** environment.

```

5907 \msg_new:nnn { enumext } { keyans-nested }
5908 {
5909   The ~ environment ~ 'keyans' ~ can't ~ be ~ nested ~ \msg_line_context:.
5910 }

```

```

5911 \msg_new:nnn { enumext } { keyans-wrong-level }
5912 {
5913   Wrong ~ level ~ position ~ for ~ 'keyans' ~ \msg_line_context:~ \\
5914   The ~ environment ~ 'keyans' ~ can ~ only ~ be ~ in ~ the ~ first ~ level.
5915 }
5916 \msg_new:nnn { enumext } { wrong-place }
5917 {
5918   Wrong ~ place ~ for ~ '#1' ~ environment ~ \msg_line_context:~ \\
5919   '#1' ~ is ~ only ~ found ~ with ~ '#2' ~ in ~ 'enumext.
5920 }
5921 \msg_new:nnn { enumext } { keyanspic-nested }
5922 {
5923   The ~ environment ~ 'keyanspic' ~ can't ~ be ~ nested~ \msg_line_context:~.
5924 }
5925 \msg_new:nnn { enumext } { keyanspic-wrong-level }
5926 {
5927   Wrong ~ level ~ position ~ for ~ 'keyanspic' ~ \msg_line_context:~ \\
5928   The ~ environment ~ 'keyans' ~ can ~ only ~ be ~ in ~ the ~ first ~ level.
5929 }
5930 \msg_new:nnn { enumext } { keyanspic-item-cmd }
5931 {
5932   Can't ~ use ~ \c_backslash_str item ~ in ~ keyanspic ~ \msg_line_context:.
5933 }
5934 \msg_new:nnnn { enumext } { keyans-unknown-key }
5935 {
5936   The ~ key ~ '#1' ~ is ~ unknown ~ by ~ environment~
5937   '\l__enumext_envir_name_tl' ~ and ~ is ~ being ~ ignored.
5938 }
5939 {
5940   The ~ environment ~ '\l__enumext_envir_name_tl' ~ does ~ not
5941   ~ have ~ a ~ key ~ called ~ '#1'.\\
5942   Check ~ that ~ you ~ have ~ spelled ~ the ~ key ~ name ~ correctly.
5943 }
5944 \msg_new:nnnn { enumext } { keyans-unknown-key-value }
5945 {
5946   The ~ key ~ '#1=#2' ~ is ~ unknown ~ by ~ environment ~
5947   '\l__enumext_envir_name_tl' ~ and ~ is ~ being ~ ignored.
5948 }
5949 {
5950   The ~ environment ~ '\l__enumext_envir_name_tl' ~ does ~ not
5951   ~ have ~ a ~ key ~ called ~ '#1'.\\
5952   Check ~ that ~ you ~ have ~ spelled ~ the ~ key ~ name ~ correctly.
5953 }

```

Message used by unknown $\langle keys \rangle$ in `enumext*`. environment.

```

5954 \msg_new:nnnn { enumext } { starred-unknown-key }
5955 {
5956   The ~ key ~ '#1' ~ is ~ unknown ~ by ~ environment~
5957   '\l__enumext_envir_name_tl' ~ and ~ is ~ being ~ ignored.
5958 }
5959 {
5960   The ~ environment ~ '\l__enumext_envir_name_tl' ~ does ~ not
5961   ~ have ~ a ~ key ~ called ~ '#1'.\\
5962   Check ~ that ~ you ~ have ~ spelled ~ the ~ key ~ name ~ correctly.
5963 }
5964 \msg_new:nnnn { enumext } { starred-unknown-key-value }
5965 {
5966   The ~ key ~ '#1=#2' ~ is ~ unknown ~ by ~ environment ~
5967   '\l__enumext_envir_name_tl' ~ and ~ is ~ being ~ ignored.
5968 }
5969 {
5970   The ~ environment ~ '\l__enumext_envir_name_tl' ~ does ~ not
5971   ~ have ~ a ~ key ~ called ~ '#1'.\\
5972   Check ~ that ~ you ~ have ~ spelled ~ the ~ key ~ name ~ correctly.
5973 }

```

Message used by unknown $\langle keys \rangle$ in `enumext` environment.

```

5974 \msg_new:nnnn { enumext } { standar-unknown-key }
5975 {
5976   The ~ key ~ '#1' ~ is ~ unknown ~ by ~ environment ~ '\l__enumext_envir_name_tl' \c_space_tl
5977   ~ on ~ level ~ \int_use:N \l__enumext_level_int \c_space_tl and ~ is ~ being ~ ignored.
5978 }

```

```

5979 {
5980     The ~ environment ~ '\l__enumext_envir_name_tl' ~ does ~ not
5981     ~ have ~ a ~ key ~ called ~ '#1' ~ on ~ level ~ \int_use:N \l__enumext_level_int.\\
5982     Check ~ that ~ you ~ have ~ spelled ~ the ~ key ~ name ~ correctly.
5983 }
5984 \msg_new:nnnn { enumext } { standar-unknown-key-value }
5985 {
5986     The ~ key ~ '#1=#2' ~ is ~ unknown ~ by ~ environment ~ '\l__enumext_envir_name_tl' \c_space_
5987     ~ on ~ level ~ \int_use:N \l__enumext_level_int \c_space_tl and ~ is ~ being ~ ignored.
5988 }
5989 {
5990     The ~ environment ~ '\l__enumext_envir_name_tl' ~ does ~ not
5991     ~ have ~ a ~ key ~ called ~ '#1' ~ on ~ level ~ \int_use:N \l__enumext_level_int.\\
5992     Check ~ that ~ you ~ have ~ spelled ~ the ~ key ~ name ~ correctly.
5993 }

```

Message used by unknown *(keys)* in `\foreachkeyans`.

```

5994 \msg_new:nnnn { enumext } { for-key-unknown }
5995 { The~key~'#1'~is~unknown~by~'\c_backslash_str foreachkeyans'~and~is~being~ignored.}
5996 {
5997     The~command~'\c_backslash_str foreachkeyans'~does~not~have~a~key~called~'#1'.\\
5998     Check~that~you~have~spelled~the~key~name~correctly.
5999 }
6000 \msg_new:nnnn { enumext } { for-key-value-unknown }
6001 { The~key~'#1=#2'~is~unknown~by~'\c_backslash_str foreachkeyans'~and~is~being~ignored. }
6002 {
6003     The~command~'\c_backslash_str foreachkeyans'~does~not~have~a~key~called~'#1'.\\
6004     Check~that~you~have~spelled~the~key~name~correctly.
6005 }

```

Messages used by `\getkeyans` command.

```

6006 \msg_new:nnn { enumext } { undefined-storage-anskey }
6007 {
6008     Storage ~ named ~ '#1' ~ is ~ not ~ defined ~ \msg_line_context:.
6009 }

```

Messages used by `\miniright` command.

```

6010 \msg_new:nnn { enumext } { missing-miniright }
6011 {
6012     Missing ~ '\c_backslash_str miniright' ~ in ~ \msg_line_context:.\\
6013     The ~ key ~ 'mini-env' ~ need ~ '\c_backslash_str miniright'.
6014 }
6015 \msg_new:nnn { enumext } { wrong-miniright-place }
6016 {
6017     Wrong ~ place ~ for ~ '\c_backslash_str miniright' ~ \msg_line_context:~ \\
6018     Works ~ in ~ 'enumext' ~ and ~ 'keyans' ~ with ~ key ~ 'mini-env'.
6019 }
6020 \msg_new:nnn { enumext } { wrong-miniright-use }
6021 {
6022     Wrong ~ use ~ for ~ '\c_backslash_str miniright' ~ \msg_line_context:~ \\
6023     '\c_backslash_str miniright' ~ need ~ a ~ key ~ 'mini-env'.
6024 }
6025 \msg_new:nnn { enumext } { wrong-miniright-starred }
6026 {
6027     Can't ~ use ~ \c_backslash_str miniright ~ in ~ starred ~ environments ~ \msg_line_context:.
6028 }
6029 \msg_new:nnn { enumext } { many-miniright-used }
6030 {
6031     Can't ~ use ~ \c_backslash_str miniright ~ more ~ than ~ once ~ \msg_line_context:.
6032 }

```

Messages used by `\setenumextmeta` command.

```

6033 \msg_new:nnn { enumext } { unknown-set }
6034 {
6035     Argument ~ [#1] ~ is ~ unknown ~ by ~ \c_backslash_str setenumextmeta ~ \msg_line_context:.
6036 }
6037 \msg_new:nnn { enumext } { already-defined }
6038 {
6039     The ~ key ~ '#1' ~ is ~ already ~ defined ~ \msg_line_context:.
6040 }
6041 \msg_new:nnn { enumext } { prohibited-unknown }
6042 {
6043     The ~ name ~ 'unknown' ~ can't ~ be ~ chosen~ for ~ a ~ meta ~ key ~ \msg_line_context:.

```

6044 }

Messages used by `enumext*` and `keyans*` environments.

6045 \msg_new:nnn { enumext } { nested }

6046 {

6047 The ~ environment ~ \l__enumext_envir_name_tl \c_space_tl can't ~ be ~ nested ~ \msg_line_con

6048 }

6049 \msg_new:nnn { enumext } { nested-horizontal }

6050 {

6051 The ~ environment ~ \l__enumext_envir_name_tl \c_space_tl can't ~ be ~ nested ~ in ~ '#1' ~ \

6052 }

6053 \msg_new:nnn { enumext } { item-joined }

6054 {

6055 Items ~ joined ~ (#1) ~ > ~ #2 ~ columns ~\msg_line_context:.

6056 }

6057 \msg_new:nnn { enumext } { item-joined-columns }

6058 {

6059 Not ~ space ~ to ~ join ~ items ~ (#1) ~ > ~ #2 ~\msg_line_context:.

6060 }

13.52 Finish package

Finish package implementation.

6061 \file_input_stop:

6062 </package>

14 Index of Implementation

The italic numbers denote the pages where the corresponding entry is described, the numbers underlined and all others indicate the line on which they are implemented in the package code.

Symbols	
<code>*</code>	232
<code>\+</code>	224
<code>\-</code>	224
<code>\\</code> 240, 3008, 4455, 4458, 5679, 5688, 5693, 5713, 5715, 5722, 5724, 5737, 5742, 5747, 5762, 5801, 5803, 5805, 5810, 5811, 5816, 5817, 5835, 5852, 5869, 5874, 5883, 5892, 5898, 5904, 5913, 5918, 5927, 5941, 5951, 5961, 5971, 5981, 5991, 5997, 6003, 6012, 6017, 6022	
A	
<code>above</code>	<u>1721</u>
<code>above*</code>	<u>1721</u>
<code>\addvspace</code> 1288, 1316, 1359, 1362, 1530, 1533, 1630, 1636, 1674, 1680, 1701, 1707, 3883, 4044, 4062, 4340, 4344, 4703, 4718, 4764, 4778	
<code>after</code>	<u>1118</u>
<code>align</code>	<u>669</u>
<code>\Alph</code>	42, 47
<code>\Alph</code>	611, 739, 783, 847, 5384
<code>\alph</code>	42, 47
<code>\alph</code>	612, 737, 5372
<code>\anskey</code>	13, <u>81</u> , 83, <u>2794</u>
<code>anskey*</code>	14, <u>2904</u>
<code>\anspic</code>	17, <u>112</u> , <u>115</u> , <u>4354</u>
<code>\anspic*</code>	74
<code>\arabic</code>	34, <u>42</u>
<code>\arabic</code>	610, 736, 782, 5360, 5366, 5390
B	
<code>base-fix</code>	<u>976</u>
<code>\baselineskip</code>	55
<code>\baselineskip</code>	992, 1003
<code>before</code>	<u>1118</u>
<code>before*</code>	<u>1118</u>
<code>below</code>	<u>1721</u>
<code>below*</code>	<u>1721</u>
bool commands:	
<code>\bool_gset_false:N</code> 353, 354, 355, 3112, 3114, 4720, 4724, 4780	
<code>\bool_gset_true:N</code> 261, 271, 1221, 2214, 2220, 4689, 4721, 4753, 4781	
<code>\bool_if:NTF</code> . 404, 414, 431, 505, 512, 521, 528, 542, 555, 1743, 1757, 1770, 1781, 1792, 1803, 1814, 1825, 1874, 1891, 1896, 1904, 1931, 1969, 1974, 1981, 1985, 2007, 2012, 2020, 2027, 2058, 2066, 2159, 2426, 2436, 2515, 2539, 2546, 2570, 2668, 2690, 2730, 2744, 2748, 2798, 2817, 2841, 2895, 2906, 3027, 3064, 3128, 3163, 3178, 3253, 3369, 3403, 3439, 3455, 3476, 3615, 3636, 3724, 3734, 3767, 3772, 3838, 3864, 3914, 3972, 4027, 4052, 4273, 4338, 4356, 4375, 4426, 4453, 4682, 4698, 4704, 4747, 4761, 4765, 4854, 4864, 4952, 4958, 4965, 4981, 5074, 5084, 5201, 5208, 5239, 5255, 5286	
<code>\bool_if:nTF</code> 1681, 1708, 3425, 3594, 3682, 4396, 5410, 5554	
<code>\bool_if_p:N</code> 280, 295, 986, 987, 999, 1000, 1653, 2038, 2039, 2047, 2048, 2172, 2198, 2211, 2212, 2217, 2218, 2603, 2613, 2625, 2640, 2641, 2675, 2716, 2717, 3050, 3240, 3241, 3270, 3271, 3283, 3284, 3324, 3325, 3344, 3345, 3628, 3629, 3630, 3811, 3813, 3824, 5230, 5231, 5232	
<code>\bool_lazy_all:nTF</code> 278, 293, 984, 2170, 2196, 2601, 2610, 2623, 2638, 3322, 3342, 3626, 3809, 3822, 5228	
<code>\bool_lazy_and:nnTF</code> 257, 267, 998, 1645, 1652, 2037, 2046, 2210, 2216, 2674, 2681, 2715, 2859, 2871, 3049, 3055, 3239	
<code>\bool_lazy_or:nnTF</code> . . 2099, 2106, 3269, 3282, 5577	
<code>\bool_new:N</code> 30, 31, 32, 33, 34, 35, 36, 37, 60, 69, 93, 98, 99, 104, 105, 108, 127, 139, 140, 147, 153, 154, 156, 160, 162, 163, 180, 192, 194	
<code>\bool_not_p:n</code> 258, 268, 988, 1654, 2612, 2676, 2682, 3051, 3056, 3812, 3825	
<code>\bool_set_eq:NN</code> 3378, 3575, 4905, 5149	
<code>\bool_set_false:N</code> 411, 1010, 2144, 2145, 2177, 2182, 2186, 2190, 2203, 2991, 3603, 3786, 3931, 3980, 4067, 4209, 4270, 4416, 4823, 4849, 4902, 5090, 5145, 5146, 5423, 5424	
<code>\bool_set_true:N</code> . 285, 286, 300, 301, 396, 399, 662, 1025, 1727, 1732, 1994, 2116, 2117, 2458, 2466, 2992, 3372, 3374, 3406, 3408, 3571, 3582, 3596, 3747, 3785, 3818, 3831, 3904, 3977, 4004, 4206, 4398, 4399, 4671, 4736, 4822, 4909, 4916, 4917, 4961, 5088, 5153, 5160, 5161, 5162, 5418, 5419	
box commands:	
<code>\box_dp:N</code> . . 1576, 1577, 1580, 1587, 1600, 1608, 1614, 1622, 4284, 4290, 4340, 4437	
<code>\box_ht:N</code> . . 1359, 1362, 1373, 1374, 1385, 1387, 1402, 1405, 1413, 1414, 1425, 1427, 1442, 1445, 1452, 1453, 1464, 1466, 1481, 1484, 1530, 1533, 1541, 1542, 1550, 1551, 1563, 1565	
<code>\box_ht_plus_dp:N</code> 4279, 4348, 4384	
<code>\box_new:N</code> 66, 149, 150, 187, 193	
<code>\box_use_drop:N</code> 4715, 4776, 5017, 5298	
<code>\box_wd:N</code> 618	
<code>break-col</code>	<u>2764</u>
C	
<code>\c</code>	232, 233, 883, 885, 897, 899
<code>\catcode</code>	3008
<code>\cB</code>	233
<code>\cE</code>	233
<code>\centering</code>	1683, 1710, 4481, 4708, 4769
<code>check-ans</code>	<u>2136</u>
Document class:	
<code>article</code>	48
clist commands:	
<code>\clist_const:Nn</code>	199
<code>\clist_map_function:nN</code>	4464
<code>\clist_map_inline:Nn</code> . 668, 931, 1117, 1132, 1213, 1737	
<code>\clist_map_inline:nn</code> . 45, 56, 74, 82, 95, 107, 142, 171, 198, 646, 699, 719, 1030, 1051, 1227, 1843, 2083, 2150, 2358, 2423, 2455, 2598, 3172, 3497, 3512, 3552, 3711, 3714, 3742, 3754, 3757, 3777, 5530	
<code>\columnbreak</code>	82
<code>\columnbreak</code>	2678
<code>columns</code>	<u>1197</u>
<code>columns-sep</code>	<u>1197</u>
<code>\columnsep</code>	105

`\columnsep` 3859, 4025
`\columnseprule` 105
`\columnseprule` 3862, 4026
 Commands provide by **enumext**:
`\anskey` 31, 70, 71, 77–81, 83, 84, 91, 104, 105, 124, 133, 135, 142
`\anspic*` 31, 32, 74, 78, 91, 92, 114, 115, 133, 135
`\anspic` 32, 79, 112, 115, 142
`\foreachkeyans` 138, 145
`\getkeyans` 78, 133, 145
`\item*` 31, 32, 74, 78, 79, 91, 92, 95, 99, 125, 126, 131, 133, 135
`\item` 95, 99, 119, 125, 127, 130
`\miniright` 30, 53, 61, 62, 106, 145
`\printkeyans*` 134
`\printkeyans` 31, 79, 134, 135
`\setenumextmeta` 138, 145
`\setenumext` 31, 135–137, 141
 Counters defined by **enumext**:
`enumXiii` 29, 41
`enumXii` 29, 41
`enumXiv` 29, 41
`enumXi` 29, 41
`enumXviii` 29, 41
`enumXvii` 29, 41, 126
`enumXvi` 29, 41
`enumXv` 29, 41
 cs commands:
`\cs_generate_variant:Nn` . 204, 205, 620, 636, 889, 905, 2507, 2512, 2588, 2912, 3701, 4466, 5589
`\cs_if_exist:NTF` 590
`\cs_if_exist_p:N` 3631, 5233
`\cs_if_free:NTF` 2863, 2875
`\cs_new:Nn` 218
`\cs_new:Npn` . 236, 1844, 1853, 1861, 2470, 2479, 2487, 5438, 5447, 5456
`\cs_new_eq:NN` . 380, 381, 386, 387, 416, 417, 420, 421
`\cs_new_protected:Nn` . 228, 242, 250, 276, 309, 339, 345, 351, 357, 363, 371, 391, 439, 443, 461, 473, 491, 503, 519, 535, 548, 569, 759, 820, 869, 982, 1133, 1137, 1141, 1145, 1149, 1153, 1157, 1161, 1165, 1169, 1173, 1177, 1181, 1185, 1189, 1193, 1228, 1240, 1273, 1290, 1301, 1318, 1344, 1365, 1490, 1516, 1536, 1569, 1591, 1626, 1632, 1738, 1752, 1766, 1777, 1788, 1799, 1810, 1821, 1902, 2005, 2018, 2035, 2056, 2084, 2089, 2114, 2155, 2165, 2208, 2223, 2230, 2239, 2244, 2249, 2254, 2263, 2268, 2273, 2513, 2537, 2544, 2568, 2575, 2589, 2815, 2834, 2850, 2913, 2975, 3012, 3047, 3089, 3110, 3118, 3161, 3176, 3204, 3237, 3265, 3278, 3291, 3320, 3333, 3411, 3421, 3432, 3448, 3464, 3590, 3608, 3642, 3654, 3778, 3807, 3836, 3843, 3873, 3890, 3912, 3934, 3970, 3994, 4011, 4036, 4050, 4071, 4245, 4448, 4462, 4467, 4491, 4501, 4532, 4661, 4680, 4726, 4745, 4809, 4836, 4843, 4852, 4862, 4887, 5028, 5072, 5103, 5109, 5130, 5189, 5309
`\cs_new_protected:Npn` 206, 210, 214, 424, 588, 605, 615, 621, 740, 784, 852, 876, 890, 1665, 1694, 1870, 1889, 1959, 1992, 2094, 2278, 2424, 2434, 2456, 2464, 2499, 2508, 2664, 2727, 2742, 2780, 2784, 2904, 2961, 2965, 3002, 3138, 3214, 3258, 3365, 3384, 3513, 3517, 3531, 3535, 3553, 3557, 3567, 3579, 3624, 3670, 3704, 3745, 3789, 3990, 4254, 4261, 4268, 4373, 4392, 4422, 4563, 4612, 4826, 4893, 4900, 4914, 4922, 4927, 4937, 5096, 5136, 5143, 5158, 5167, 5184, 5226, 5331, 5344, 5404, 5527, 5539, 5563, 5575, 5613, 5623, 5631, 5653

`\cs_new_protected_nopar:Nn` . . . 4134, 4178, 4186, 4194, 4872, 4880, 5011, 5115, 5123, 5292
`\cs_new_protected_nopar:Npn` . . 4126, 4142, 4943, 4989, 5245, 5266
`\cs_set:Npn` 2599, 2636, 5337
`\cs_set_eq:NN` . . 3634, 4799, 4800, 4991, 5061, 5062, 5236, 5268
`\cs_set_protected:Nn` 1056, 1072, 1085, 1097
`\cs_set_protected:Npn` . 41, 50, 67, 75, 90, 96, 135, 167, 178, 637, 647, 669, 704, 720, 766, 906, 932, 1012, 1035, 1109, 1118, 1197, 1214, 1721, 1832, 2075, 2136, 2324, 2359, 2442, 2591, 3165, 3486, 3502, 3545, 3702, 3743
`\cs_to_str:N` 607, 630
`\cs_undefine:N` 2852, 2853, 2854, 2855

D

`\d` 224
`\DeclareDocumentEnvironment` 573
 dim commands:
`\dim_abs:n` 3675, 3680
`\dim_add:Nn` 3317, 4288, 4526, 4557
`\dim_compare:nNnTF` . . 1058, 1074, 1087, 1099, 1377, 1389, 1417, 1429, 1456, 1468, 1545, 1553, 1667, 1696, 3312, 3672, 3677, 3683, 3689, 3691, 3693, 3848, 3895, 3998, 4015, 4263, 4503, 4519, 4534, 4550, 4663, 4728, 5197
`\dim_compare:nTF` 2700, 3077, 3937, 4074
`\dim_eval:n` 992, 4346, 4433
`\dim_gset_eq:NN` 4672, 4737
`\dim_gzero:N` 3116, 4723, 4783
`\dim_new:N` . 63, 70, 71, 72, 92, 131, 132, 144, 151, 152, 186, 188, 189, 195
`\dim_set:Nn` . 618, 1026, 3299, 3303, 3308, 3314, 3401, 3675, 3680, 3682, 3685, 3686, 3690, 3692, 3695, 3696, 3698, 3851, 3898, 3936, 4000, 4017, 4073, 4277, 4382, 4469, 4505, 4512, 4536, 4543, 4598, 4647, 4665, 4730, 4939, 5199
`\dim_set_eq:NN` 727, 773, 844, 3396, 3713, 3756, 3859, 4025, 4605, 4608, 4609, 4654, 4657, 4658, 4932, 5003, 5280
`\dim_sub:Nn` 3942, 4079, 4521, 4552
`\dim_use:N` . 1059, 1067, 1668, 1678, 2578, 2581, 2586, 3416, 3418, 3471, 3849, 3853, 3854, 3856, 3896, 3901, 3902, 3908, 3939, 3944
`\dim_zero:N` 3748, 3862, 4026, 4291
`\dim_zero_new:N` 587
`\c_zero_dim` 1061, 1075, 1088, 1100, 1668, 1696, 2702, 3079, 3299, 3312, 3672, 3677, 3683, 3690, 3849, 3896, 3939, 3998, 4015, 4076, 4263, 4503, 4519, 4534, 4550, 4663, 4728, 5197
`\dimeval` 2314, 2932

E

`\end` . . . 2541, 2572, 3880, 4041, 4328, 4483, 5412, 5422, 5430
 end internal commands:
`\end__enumext_mini_page` . 1676, 1703, 3923, 4061, 4687, 4751, 4777
`\endgroup` 3008
`\endlist` 381
`\endminipage` 387
enumext 5, 3948
 enumext internal commands:
`\l__enumext__resume_name_tl` 66
`__enumext_add_meta_key:nnn` . . . 138, 5541, 5557, 5558, 5560, 5563

```

\__enumext_add_pre_parsep: . 54, 1238, 1240, 1240
\__enumext_after_args_exec: 52, 1133, 1145, 3961
\__enumext_after_args_exec_v: 1149, 1161, 4094
\__enumext_after_args_exec_vii: . . 1165, 1189
\__enumext_after_args_exec_viii: . . . . . 1193
\__enumext_after_env:nn 87, 89, 90, 107, 121, 128,
210, 210, 561, 565, 3022, 3966, 4696, 4759, 5044
\__enumext_after_hyperref: . . . 37, 389, 389, 391
\l__enumext_after_list_args_v_tl . . . . . 1163
\l__enumext_after_list_args_vii_tl 1191, 5009
\l__enumext_after_list_args_viii_tl . . 1195,
5290
\__enumext_after_list_vii: 121, 124, 4807, 4843,
4843
\__enumext_after_list_viii: . . 129, 5070, 5109,
5109
\__enumext_after_stop_list: 52, 107, 1133, 1141,
3928
\__enumext_after_stop_list_v: 1149, 1157, 4068
\l__enumext_after_stop_list_v_tl . . . . . 1159
\__enumext_after_stop_list_vii: . . 124, 1165,
1181, 4846
\l__enumext_after_stop_list_vii_tl . . 1183
\__enumext_after_stop_list_viii: . 1185, 5112
\l__enumext_after_stop_list_viii_tl . . 1187
\l__enumext_align_label_pos_v_str 3295, 3660
\l__enumext_align_label_pos_X_str . . . . . 75
\l__enumext_align_label_vii_str . . . . . 4978
\l__enumext_align_label_viii_str . . . . . 5259
\l__enumext_align_label_X_str . . . . . 178
\c__enumext_all_envs_clist . 199, 668, 931, 1117,
1132, 1213, 1737
\c__enumext_all_families_seq . . 137, 5495, 5521
\l__enumext_anskey_env_bool 35, 86, 30, 286, 301,
2906
\__enumext_anskey_env_clean_vars: . 90, 3043,
3047, 3110
\__enumext_anskey_env_define_keys: 86, 2904,
2913, 3016
\__enumext_anskey_env_exec: 88, 2909, 3012, 3012
\__enumext_anskey_env_make:n 70, 86, 2119, 2904,
2904, 2912
\__enumext_anskey_env_reset_keys: 87, 89, 2904,
2975, 3044
\__enumext_anskey_env_save_keys: . . 89, 3024,
3047, 3047
\__enumext_anskey_env_store: . . 89, 3040, 3047,
3089
\__enumext_anskey_env_unknown:n 87, 2904, 2958,
2961
\__enumext_anskey_env_unknown:nn . 2904, 2963,
2965
\l__enumext_anskey_level_int . . 24, 2836, 2837
\__enumext_anskey_safe_inner: . 85, 2809, 2815,
2834
\__enumext_anskey_safe_inner:n . . . . . 84
\__enumext_anskey_safe_outer: . 84, 2796, 2815,
2815
\__enumext_anskey_show_wrap_arg:n . 83, 2727,
2727, 2746, 2761
\__enumext_anskey_show_wrap_left:n 83, 2672,
2742, 2742
\__enumext_anskey_unknown:n 84, 2764, 2778, 2780
\__enumext_anskey_unknown:nn . 2764, 2782, 2784
\__enumext_anskey_wrapper:n . . 2311, 2740, 2929
\l__enumext_anspic_above_int . 143, 4470, 4471,
4473
\__enumext_anspic_args:nnn 115, 116, 4354, 4370,
4448
\l__enumext_anspic_args_seq 115–117, 143, 4368,
4482, 4495
\l__enumext_anspic_below_int . 143, 4470, 4471,
4474
\l__enumext_anspic_body_box . . 143, 4381, 4384
\__enumext_anspic_body_dim:n . . 115, 4354, 4373,
4425
\l__enumext_anspic_body_htdp_dim . . 115, 143,
4382, 4436
__enumext_anspic_exec: . . . . . 4354
\__enumext_anspic_exec: . . . 114, 117, 4323, 4491
\__enumext_anspic_label:nn 116, 4354, 4392, 4428,
4443
\l__enumext_anspic_label_above_bool . . 143,
4206, 4209, 4273, 4338, 4375, 4426, 4453
\l__enumext_anspic_label_box . . 143, 4276, 4279
\l__enumext_anspic_label_htdp_dim . 113, 143,
4277, 4283, 4348, 4435
\__enumext_anspic_label_pos:nnn . . 116, 4354,
4422, 4451
\l__enumext_anspic_label_sep_skip 4216, 4285,
4349, 4438, 4455
\l__enumext_anspic_layout_style_tl 4218, 4493,
4498
\l__enumext_anspic_mini_pos_str . . 143, 4207,
4210, 4480
\l__enumext_anspic_mini_width_dim 143, 4394,
4469, 4480
\__enumext_anspic_print:n 116, 117, 4354, 4462,
4466, 4495, 4498
\__enumext_anspic_row:n . . 117, 4354, 4464, 4467
\__enumext_anspic_start_list_tag: 4150, 4178,
4450
\__enumext_anspic_stop_list_tag: . 4150, 4194,
4460
\__enumext_anspic_stop_start_list_tag: 4150,
4186, 4452
\__enumext_at_begin_document:n . . 37, 206, 206,
378, 384
\l__enumext_base_line_fix_bool 49, 135, 978, 987,
1010, 5418, 5423
\__enumext_before_args_exec: 52, 106, 123, 1133,
1133, 3893
\__enumext_before_args_exec_v: 1149, 1149, 3997
\__enumext_before_args_exec_vii: . 1165, 1165,
4840
\__enumext_before_args_exec_viii: 1169, 5106
\__enumext_before_env:nn 86, 210, 214, 2857, 2869,
2881, 3014
\__enumext_before_keys_exec: . . 52, 1133, 1137,
3958
\__enumext_before_keys_exec_v: 1149, 1153, 4091
\__enumext_before_keys_exec_vii . . . . . 1165
\__enumext_before_keys_exec_vii: . 1173, 4794
\__enumext_before_keys_exec_viii: 1177, 5056
\__enumext_before_list: . . 106, 3890, 3890, 3952
\__enumext_before_list_v: . . . 3994, 3994, 4086
\__enumext_before_list_vii: . . 123, 4789, 4836,
4836

```



```

\__enumext_before_list_viii: .. 129, 5052, 5103,
    5103
\l__enumext_before_no_starred_key_v_tl 1155
\l__enumext_before_no_starred_key_vii_-
    tl ..... 1175
\l__enumext_before_no_starred_key_viii_-
    tl ..... 1179
\l__enumext_before_starred_key_v_tl ... 1151
\l__enumext_before_starred_key_vii_tl . 1167
\l__enumext_before_starred_key_viii_tl 1171
\__enumext_calc_hspace:NNNNNN 101, 3670, 3670,
    3701, 3706, 3749
\__enumext_check_ans_active: 72, 106, 123, 2155,
    2155, 3894, 4839
\g__enumext_check_ans_item_tl ..... 92
\g__enumext_check_ans_key_bool 73, 74, 153, 353,
    2214, 2220, 3128
\l__enumext_check_ans_key_bool 73, 2140, 2145,
    2211, 2217
\__enumext_check_ans_key_hook: .. 73, 107, 124,
    2208, 2208, 3929, 4847
\__enumext_check_ans_level: 72, 2155, 2161, 2165
\__enumext_check_ans_log: 73, 74, 90, 2254, 2254,
    3132
\__enumext_check_ans_log_msg_greater: 2254,
    2260, 2273
\__enumext_check_ans_log_msg_less: 2254, 2258,
    2263
\__enumext_check_ans_log_msg_same_ok: 2254,
    2259, 2268
\__enumext_check_ans_msg_greater: 2230, 2236,
    2249
\__enumext_check_ans_msg_less: 2230, 2234, 2239
\__enumext_check_ans_msg_same_ok: 2230, 2235,
    2244
\__enumext_check_ans_show: .. 73, 90, 2230, 2230,
    3130
\l__enumext_check_answers_bool . 70, 72, 84, 95,
    153, 2117, 2144, 2159, 2515, 2539, 2546, 2570, 2798,
    3027, 3253, 3369, 3403, 4958
\__enumext_check_starred_cmd:n 35, 74, 92, 128,
    2278, 2278, 4097, 4336, 5069
\g__enumext_check_starred_cmd_int .. 99, 153,
    2281, 2287, 2292, 3588, 4404, 5196
\l__enumext_check_start_line_env_tl . 35, 153,
    316, 324, 332, 2284, 2290, 2293
\l__enumext_columns_sep_v_dim 4015, 4017, 4025
\l__enumext_columns_sep_vii_dim .. 4503, 4505,
    4514, 4526, 4602, 5025
\l__enumext_columns_sep_viii_dim . 4534, 4536,
    4545, 4557, 4651, 5306
\l__enumext_columns_v_int 1510, 1528, 1699, 4013,
    4021, 4033, 4038
\l__enumext_columns_vii_int .. 4508, 4511, 4515,
    4524, 4566, 4570, 4573, 4579, 4585, 4589, 5019, 5033
\l__enumext_columns_viii_int . 4539, 4542, 4546,
    4555, 4615, 4619, 4622, 4628, 4634, 4638, 5300, 5315
\l__enumext_counter_i_tl ..... 41, 597
\l__enumext_counter_ii_tl ..... 41, 598
\l__enumext_counter_iii_tl ..... 41, 599
\l__enumext_counter_iv_tl ..... 41, 600
\c__enumext_counter_style_tl ..... 34, 46, 230
\g__enumext_counter_styles_tl . 29, 42, 63, 608,
    626
\l__enumext_counter_v_tl ..... 41, 601, 860
\l__enumext_counter_vi_tl ..... 41, 602
\l__enumext_counter_vii_tl ..... 41, 603, 794
\l__enumext_counter_viii_tl ..... 41, 604, 810
\l__enumext_current_widest_dim 29, 63, 632, 728,
    774, 845
\__enumext_def_meta_key:nnn ... 138, 5541, 5569,
    5575, 5589
\__enumext_default_item:n ... 3365, 3365, 3429
\__enumext_define_counters:Nn 29, 588, 588, 597,
    598, 599, 600, 601, 602, 603, 604
\__enumext_endminipage: . 37, 378, 387, 582, 4717,
    5013, 5294
\g__enumext_envir_name_tl 35, 30, 287, 302, 361,
    2087, 2092, 2102, 2242, 2247, 2252, 2266, 2271, 2276
\l__enumext_envir_name_tl 34, 35, 98, 30, 256, 266,
    315, 323, 331, 3507, 4241, 5937, 5940, 5947, 5950,
    5957, 5960, 5967, 5970, 5976, 5980, 5986, 5990, 6047,
    6051
\__enumext_execute_after_env: 36, 70, 73, 74, 85,
    90, 3118, 3118, 3968, 5046
\__enumext_fake_item_indent: . 1056, 1056, 3733
\l__enumext_fake_item_indent_v_dim 1075, 1080
\l__enumext_fake_item_indent_v_tl 1077, 3572,
    3576, 3583
\__enumext_fake_item_indent_vii: . 1056, 1085,
    3766
\l__enumext_fake_item_indent_vii_dim . 1088,
    1092
\l__enumext_fake_item_indent_vii_tl .. 1090,
    5008
\__enumext_fake_item_indent_viii: 1056, 1097,
    3771
\l__enumext_fake_item_indent_viii_dim 1100,
    1104
\l__enumext_fake_item_indent_viii_tl . 1102,
    5285
\l__enumext_fake_item_indent_X_tl ..... 96
\__enumext_fake_make_label_vii:n . 126, 4943,
    4943, 5000
\__enumext_fake_make_label_viii:n 5226, 5245,
    5277
\__enumext_filter_first_level:n .. 136, 5438,
    5438, 5472, 5483
\__enumext_filter_first_level_key:n 136, 5438,
    5443, 5447
\__enumext_filter_first_level_pair:nn . 136,
    5438, 5444, 5456
\__enumext_filter_save_key:n .. 78, 2431, 2439,
    2462, 2468, 2470, 2470, 5357, 5363, 5369, 5375, 5381,
    5387
\__enumext_filter_save_key_key:n .. 78, 2470,
    2475, 2479
\__enumext_filter_save_key_pair:nn 78, 2470,
    2476, 2487
\__enumext_filter_series:n 65, 1844, 1844, 1882,
    1894, 1899
\__enumext_filter_series_key:n 65, 1844, 1849,
    1853
\__enumext_filter_series_pair:nn .. 65, 1844,
    1850, 1861
\__enumext_first_item_tmp_vii: 122, 124, 4799,
    4872, 4872
\__enumext_first_item_tmp_viii: .. 130, 5061,
    5115, 5115
\g__enumext_footnote_standar_arg_seq .. 172,

```

456, 467, 470
 \g__enumext_footnote_standar_int 172, 450, 453, 455, 458
 \g__enumext_footnote_standar_int_seq .. 172, 458, 463, 466, 471
 \g__enumext_footnote_starred_arg_seq .. 172, 486, 497, 500
 \g__enumext_footnote_starred_int 172, 480, 483, 485, 488
 \g__enumext_footnote_starred_int_seq .. 172, 488, 493, 496, 501
 __enumext_footnotes_key_bool 37
 \l__enumext_footnotes_key_bool 32, 37, 162, 399, 404, 411, 512, 528, 542, 555
 __enumext_footnotetext:nn .. 439, 439, 468, 498
 __enumext_foreach_add_body:n . 139, 5590, 5650, 5653
 \l__enumext_foreach_after_tl 5594, 5662
 \l__enumext_foreach_before_tl 5592, 5657
 \g__enumext_foreach_default_keys_tl 138, 122, 5612, 5633
 __enumext_foreach_keyans:nn .. 139, 5590, 5629, 5631
 \l__enumext_foreach_name_prop_tl . 122, 5635, 5660
 \l__enumext_foreach_print_seq 122, 5645, 5651, 5655
 \l__enumext_foreach_sep_tl 5604, 5651
 \l__enumext_foreach_start_int 5596, 5647
 \l__enumext_foreach_step_int 5600, 5648
 \l__enumext_foreach_stop_int . 5598, 5640, 5642, 5649
 __enumext_foreach_wrapper:n 5602, 5658
 __enumext_getkeyans:nn .. 134, 5326, 5340, 5344
 __enumext_getkeyans_aux:n 134, 5326, 5328, 5331
 \l__enumext_hyperref_bool . 32, 37, 38, 162, 396, 414, 431, 2717, 3241, 4952
 __enumext_hypertarget:nn 38, 389, 416, 420, 436
 __enumext_if_is_int:n 222
 __enumext_if_is_int:nTF 222, 878, 892
 __enumext_internal_mini_page: 40, 104, 123, 569, 569, 3781, 4812
 __enumext_is_not_nested: . 29, 34, 104, 123, 250, 250, 3780, 4811
 __enumext_is_on_first_level:.. 29, 35, 104, 123, 250, 276, 3787, 4824
 \g__enumext_item_anskey_int 84, 92, 153, 348, 375, 376, 2227, 2666, 3255
 __enumext_item_answer_diff: .. 73, 74, 90, 2223, 2223, 3125
 \g__enumext_item_answer_diff_int . 73, 74, 153, 349, 2225, 2232, 2256
 \l__enumext_item_column_pos_vii_int 125, 4573, 4579, 4585, 4589, 4596, 4883, 5019, 5022
 \l__enumext_item_column_pos_viii_int .. 130, 4622, 4628, 4634, 4638, 4645, 5126, 5300, 5303
 \l__enumext_item_column_pos_X_int 178
 \g__enumext_item_count_all_vii_int 125, 4597, 4884, 5033, 5041
 \g__enumext_item_count_all_viii_int 130, 4646, 5127, 5314, 5323
 \g__enumext_item_count_all_X_int 178
 \g__enumext_item_number_bool 153
 \l__enumext_item_number_bool 72, 160, 2177, 2182, 2186, 2190, 2203, 2841, 2895, 3372, 3406, 4961
 \g__enumext_item_number_int .. 72, 153, 347, 374, 376, 2176, 2181, 2185, 2189, 2202, 2227, 3371, 3405, 4960
 __enumext_item_peek_args_vii: 125, 4880, 4885, 4887
 __enumext_item_peek_args_viii: .. 130, 5123, 5128, 5130
 __enumext_item_starred_exec: . 96, 3384, 3411, 3453, 3474
 __enumext_item_starred_exec:nn .. 3384, 3384, 3427
 \l__enumext_item_starred_vii_bool 4902, 4916, 4965
 \l__enumext_item_starred_viii_bool 5145, 5160, 5255, 5286
 \l__enumext_item_starred_X_bool 178
 __enumext_item_std:w . 37, 95, 99, 378, 382, 3375, 3381, 3409, 3572, 3576, 3583
 \g__enumext_item_symbol_aux_tl . 95, 126, 3389, 3392, 3417, 3461, 3481
 \g__enumext_item_symbol_aux_vii_tl 4924, 4967, 4970, 4974, 4976
 \g__enumext_item_symbol_aux_X_tl 178
 \l__enumext_item_symbol_sep_vii_dim .. 4932, 4939, 4973, 4975
 \l__enumext_item_symbol_vii_tl 4970
 \l__enumext_item_text_vii_box 4992, 5017
 \l__enumext_item_text_viii_box ... 5269, 5298
 \l__enumext_item_text_X_box 178
 \l__enumext_item_width_vii_dim ... 4512, 4521, 4600, 4608, 4609
 \l__enumext_item_width_viii_dim .. 4543, 4552, 4649, 4657, 4658
 \l__enumext_item_width_X_dim 178
 \l__enumext_item_wrap_key_bool 100, 153, 3325, 3345, 3596, 3603, 3630, 4398, 4416, 5146, 5161, 5232
 \l__enumext_itemindent_X_dim 67
 \l__enumext_itemsep_i_skip ... 1371, 1378, 1381, 1383, 1390, 1394, 1397, 1399, 1539, 1546, 1548, 1549, 1554, 1558, 1560, 1561
 \l__enumext_itemsep_ii_skip .. 1411, 1418, 1421, 1423, 1430, 1434, 1437, 1439
 \l__enumext_itemsep_iii_skip . 1450, 1457, 1460, 1462, 1469, 1473, 1476, 1478
 \l__enumext_itemsep_vii_skip 5039
 \l__enumext_itemsep_viii_skip 5321
 \l__enumext_joined_item_aux_vii_int .. 4594, 4595, 4596, 4597, 4603
 \l__enumext_joined_item_aux_viii_int . 4643, 4644, 4645, 4646, 4652
 \l__enumext_joined_item_aux_X_int 178
 __enumext_joined_item_vii:w .. 125, 4880, 4890, 4891, 4893
 \l__enumext_joined_item_vii_int .. 4565, 4566, 4569, 4571, 4577, 4582, 4587, 4592, 4594, 4600
 __enumext_joined_item_viii:w . 130, 5123, 5133, 5134, 5136
 \l__enumext_joined_item_viii_int . 4614, 4615, 4618, 4620, 4626, 4631, 4636, 4641, 4643, 4649
 \l__enumext_joined_item_X_int 178
 \l__enumext_joined_width_vii_dim . 4598, 4605, 4608, 4994, 5002
 \l__enumext_joined_width_viii_dim 4647, 4654, 4657, 5271, 5279
 \l__enumext_joined_width_X_dim 178

```

\__enumext_keyans_addto_prop:n 90, 3138, 3138,
3585, 4401
\__enumext_keyans_addto_seq:n . 92, 3214, 3214,
3587, 4403
\__enumext_keyans_addto_seq_link: 3214, 3235,
3237, 5195
\__enumext_keyans_default_item:n .. 99, 3567,
3567, 3604
\l__enumext_keyans_env_bool 30, 3812, 3825, 3977,
4067
\__enumext_keyans_fake_item_indent: .. 1056,
1072, 3723
\l__enumext_keyans_level_h_int .. 128, 24, 803,
829, 2825, 2887, 3192, 4818, 5078, 5079
\l__enumext_keyans_level_int .. 24, 1659, 2821,
2883, 3187, 3335, 3976, 3981, 4364
\__enumext_keyans_make_label: . 100, 3608, 3608,
3721
\__enumext_keyans_make_label_box: 3608, 3612,
3617, 3654
\__enumext_keyans_make_label_std: 3608, 3620,
3642
\__enumext_keyans_mini_right_cmd:n 62, 1661,
1694, 1694
\__enumext_keyans_mini_set_vskip: ..... 59
\__enumext_keyans_minipage_add_space: 1490,
1516, 4006
\__enumext_keyans_minipage_set_skip: . 1490,
1490, 1518
\__enumext_keyans_multi_addvspace: 1290, 1301,
4030
\__enumext_keyans_multi_set_vskip: 55, 1290,
1290, 1303
\__enumext_keyans_multicols_start: 3994, 4009,
4011
\__enumext_keyans_multicols_stop: 1698, 3994,
4036, 4065
\__enumext_keyans_name_and_start: 29, 35, 128,
309, 309, 3978, 4252, 5083
\__enumext_keyans_parse_keys:n 3990, 3990, 4085
\__enumext_keyans_pic_arg_two: 113, 4245, 4268,
4299
\l__enumext_keyans_pic_level_int .. 24, 1640,
2829, 2891, 3141, 3182, 3217, 4247, 4248
\__enumext_keyans_pic_parse_keys:n 4245, 4254,
4298
\__enumext_keyans_pic_safe_exec: . 113, 4245,
4245, 4297
\__enumext_keyans_pic_skip_abs:N . 113, 4245,
4261, 4272
\__enumext_keyans_pos_mark_set: 93, 3291, 3291,
3328, 3360
\__enumext_keyans_pre_itemsep_skip: .. 1490,
1509, 1536
\__enumext_keyans_redefine_item: . 100, 3590,
3590, 3720
\__enumext_keyans_ref: ..... 46, 852, 869, 3722
\__enumext_keyans_ref:n ..... 46, 849, 852, 852
\__enumext_keyans_safe_exec: . 3970, 3970, 4084
\__enumext_keyans_save_item_opt:n 93, 99, 3258,
3258, 3581, 4400
\__enumext_keyans_set_item_width: 109, 4071,
4071, 4093
\__enumext_keyans_show_ans: 94, 3291, 3320, 3647,
3662, 4405
\__enumext_keyans_show_item_opt: 93, 99, 3258,
3265, 3584, 4413
\__enumext_keyans_show_item_opt_viii: .. 93,
3258, 3278, 5288
\__enumext_keyans_show_pos: 94, 3291, 3333, 3648,
3663, 4406
\__enumext_keyans_starred_item:n .. 99, 3579,
3579, 3599
\__enumext_keyans_starred_item_star: .. 131,
5158, 5189, 5257
\__enumext_keyans_store_ref: .. 91, 3161, 3161,
3586, 4402, 5193
\__enumext_keyans_store_ref_aux_i: 91, 3161,
3173, 3176
\__enumext_keyans_store_ref_aux_ii: 92, 3161,
3202, 3204
\__enumext_keyans_unknown_keys:n . 3502, 3508,
3513, 4242
\__enumext_keyans_unknown_keys:nn 3502, 3515,
3517
\__enumext_keyans_wrapper_label:n ..... 100
\__enumext_keyans_wrapper_label_viii:n 5226,
5226, 5262
\__enumext_keyans_wrapper_item_v:n 3631, 3634
\__enumext_keyans_wrapper_item_viii:n 5233,
5237
\__enumext_keyans_wrapper_label:n 3608, 3624,
3650, 3665, 4410
\__enumext_keyans_wrapper_opt_v:n .... 3273
\__enumext_keyans_wrapper_opt_viii:n .. 3286
\l__enumext_label_copy_i_tl .. 2632, 3180, 3185,
3190, 3195
\l__enumext_label_copy_v_tl ..... 3190
\l__enumext_label_copy_vi_tl ..... 3185
\l__enumext_label_copy_vii_tl 2608, 2619, 2648,
3180
\l__enumext_label_copy_viii_tl ..... 3195
\l__enumext_label_copy_X_tl ..... 164
\l__enumext_label_fill_left_v_tl .... 3646
\l__enumext_label_fill_left_X_tl ..... 96
\l__enumext_label_fill_right_v_tl .... 3651
\l__enumext_label_fill_right_X_tl ..... 96
\l__enumext_label_font_style_v_tl 3649, 3664,
4409, 4417
\l__enumext_label_font_style_vii_tl ... 4980
\l__enumext_label_font_style_viii_tl .. 5261
\l__enumext_label_i_tl ..... 720
\l__enumext_label_ii_tl ..... 720
\l__enumext_label_iii_tl ..... 720
\l__enumext_label_iv_tl ..... 720
\__enumext_label_style:Nnn 29, 42, 621, 621, 636,
725, 771, 840, 842
\l__enumext_label_v_tl 92, 837, 3146, 3222, 3294,
4088, 4276
\l__enumext_label_vi_tl 92, 837, 3143, 3219, 4410,
4418
\l__enumext_label_vii_tl . 766, 4911, 4934, 4941
\l__enumext_label_viii_tl 766, 5155, 5187, 5191
\l__enumext_label_width_by_box .. 63, 617, 618
\__enumext_label_width_by_box:Nn 42, 615, 615,
620, 632, 902, 3293
\l__enumext_labelsep_v_dim ... 3314, 4020, 4288,
4412
\l__enumext_labelsep_vii_dim . 2733, 4507, 4517,

```

4601, 4876, 4932, 4987, 4996
 \l__enumext_labelsep_viii_dim 4538, 4548, 4650,
 5119, 5199, 5264, 5273
 \l__enumext_labelwidth_v_dim . 845, 3304, 3309,
 3330, 3362, 3660, 4020, 4288, 4407
 \l__enumext_labelwidth_vii_dim ... 2733, 4507,
 4516, 4601, 4876, 4978, 4995
 \l__enumext_labelwidth_viii_dim .. 4538, 4547,
 4650, 5119, 5206, 5223, 5259, 5272
 \l__enumext_leftmargin_tmp_v_bool . 113, 4270
 \l__enumext_leftmargin_tmp_X_bool 67
 \l__enumext_leftmargin_tmp_X_dim 67
 \l__enumext_leftmargin_X_dim 67
 __enumext_level: 218, 218, 749, 752, 753, 761, 763,
 1059, 1063, 1067, 1135, 1139, 1143, 1147, 1230, 1232,
 1234, 1236, 1278, 1280, 1282, 1284, 1288, 1322, 1328,
 1333, 1335, 1338, 1341, 1354, 1357, 1668, 1672, 1678,
 1741, 1743, 1745, 1748, 1755, 1757, 1759, 1762, 2426,
 2428, 2430, 2458, 2459, 2461, 2517, 2525, 2529, 2533,
 2737, 2738, 3374, 3375, 3379, 3380, 3381, 3389, 3397,
 3398, 3401, 3408, 3409, 3413, 3416, 3418, 3452, 3454,
 3455, 3457, 3460, 3471, 3472, 3475, 3476, 3478, 3818,
 3831, 3838, 3846, 3849, 3851, 3853, 3854, 3855, 3856,
 3859, 3864, 3870, 3876, 3883, 3896, 3898, 3901, 3902,
 3904, 3908, 3914, 3939, 3944, 3955, 3957
 \l__enumext_level_h_int 123, 24, 259, 282, 296, 787,
 822, 1647, 2173, 2193, 2627, 2861, 2873, 3826, 4813,
 4814
 \l__enumext_level_int 104, 24, 220, 269, 281, 297,
 571, 1242, 1367, 1646, 2167, 2199, 2604, 2614, 2620,
 2626, 2633, 2642, 2647, 2860, 2872, 3120, 3737, 3782,
 3783, 3794, 3802, 3816, 3829, 3860, 3985, 4360, 4856,
 4866, 5091, 5977, 5981, 5987, 5991
 __enumext_list_arg_two_i: 3702
 __enumext_list_arg_two_ii: 3702
 __enumext_list_arg_two_iii: 3702
 __enumext_list_arg_two_iv: 3702
 __enumext_list_arg_two_v: 100, 3702, 4090, 4271
 __enumext_list_arg_two_vii: 3743, 4793
 __enumext_list_arg_two_viii: 3743, 5055
 \l__enumext_listoffset_v_dim . 4022, 4076, 4079
 \l__enumext_listparindent_vii_dim 5003, 5007
 \l__enumext_listparindent_viii_dim 5280, 5284
 __enumext_log_answer_vars: . 36, 363, 371, 3127
 __enumext_log_global_vars: . 36, 363, 363, 3126
 __enumext_make_label: 96, 3432, 3432, 3731
 __enumext_make_label_box: ... 3432, 3436, 3441,
 3464
 __enumext_make_label_std: ... 3432, 3444, 3448
 \l__enumext_mark_answer_sym_tl 80, 2297, 2583,
 2750, 2935, 3316, 5203, 5210
 \l__enumext_mark_answer_sym_v_tl . 3316, 3348
 \l__enumext_mark_answer_sym_viii_tl ... 5203
 \l__enumext_mark_position_str 126, 2301, 2302,
 2303, 2581, 2939, 2940, 2941, 3318, 5204, 5221
 \l__enumext_mark_position_v_str .. 126, 3318
 \l__enumext_mark_position_viii_str 126, 5204,
 5221
 \l__enumext_mark_ref_sym_tl .. 2363, 2722, 3249
 \l__enumext_mark_sep_tmpa_dim 126, 3294, 3304,
 3309
 \l__enumext_mark_sep_tmppb_dim 126, 3299, 3303,
 3308, 3317
 \l__enumext_mark_sym_sep_dim 2309, 2947
 \l__enumext_mark_sym_sep_v_dim ... 3312, 3314,
 3317, 3330, 3362
 \l__enumext_mark_sym_sep_viii_dim 5197, 5199,
 5206, 5223
 \l__enumext_meta_path_tl . 122, 5565, 5566, 5568,
 5569
 \c__enumext_meta_paths_prop 138, 5541
 __enumext_mini_addvspace_vii: 61, 1626, 1626,
 4675
 __enumext_mini_addvspace_viii: 61, 1626, 1632,
 4740
 __enumext_mini_env* 569
 __enumext_mini_page 1678, 1705, 3908, 4007, 4677,
 4742, 4763
 __enumext_mini_right_cmd:n 62, 1663, 1665, 1665
 __enumext_mini_set_vskip_vii: 60, 1569, 1569,
 1628
 __enumext_mini_set_vskip_viii: 60, 1569, 1591,
 1634
 __enumext_minipage:w 37, 378, 386, 576, 4700, 5002,
 5279
 \l__enumext_minipage_active_v_bool 4004, 4027,
 4052
 \g__enumext_minipage_active_vii_bool .. 121,
 4689, 4698, 4720
 \l__enumext_minipage_active_vii_bool . 4671,
 4682
 \g__enumext_minipage_active_viii_bool 4753,
 4761, 4780
 \l__enumext_minipage_active_viii_bool 4736,
 4747
 \g__enumext_minipage_active_X_bool ... 178
 \l__enumext_minipage_active_X_bool 83
 __enumext_minipage_add_space: . 56, 106, 1318,
 1344, 3906
 \g__enumext_minipage_after_skip 83, 1573, 1585,
 4718, 4778
 \l__enumext_minipage_after_skip .. 56, 106, 83,
 1331, 1371, 1373, 1378, 1381, 1385, 1390, 1394, 1397,
 1401, 1413, 1418, 1421, 1425, 1430, 1434, 1437, 1441,
 1452, 1457, 1460, 1464, 1469, 1473, 1476, 1480, 1492,
 1506, 1539, 1541, 1546, 1548, 1550, 1554, 1558, 1560,
 1562, 1593, 1606, 1620, 1674, 1701, 4062
 \g__enumext_minipage_center_vii_bool . 4704,
 4721
 \g__enumext_minipage_center_viii_bool 4765,
 4781
 \g__enumext_minipage_center_X_bool ... 178
 \l__enumext_minipage_hsep_v_dim 4002
 \l__enumext_minipage_hsep_vii_dim 4669
 \l__enumext_minipage_hsep_viii_dim ... 4734
 \l__enumext_minipage_left_skip 83, 1493, 1571,
 1576, 1580, 1594, 1598, 1612, 1630, 1636
 \l__enumext_minipage_left_v_dim .. 4000, 4007
 \l__enumext_minipage_left_vii_dim 4665, 4677
 \l__enumext_minipage_left_viii_dim 4730, 4742
 \l__enumext_minipage_left_X_dim 83
 \g__enumext_minipage_right_skip 83, 1572, 1577,
 1581, 4703, 4764
 \l__enumext_minipage_right_skip . 56, 83, 1320,
 1326, 1331, 1333, 1335, 1494, 1495, 1501, 1506, 1507,
 1508, 1513, 1595, 1602, 1616, 1680, 1707
 \l__enumext_minipage_right_v_dim . 1696, 1705,
 3998, 4002

`\g__enumext_minipage_right_vii_dim` 120, 4673, 4700, 4723
`\l__enumext_minipage_right_vii_dim` 120, 4663, 4668, 4674
`\g__enumext_minipage_right_viii_dim` .. 4738, 4763, 4783
`\l__enumext_minipage_right_viii_dim` .. 4728, 4733, 4739
`\g__enumext_minipage_right_X_dim` 178
`\g__enumext_minipage_right_X_skip` 178
`__enumext_minipage_set_skip:` . 56, 1318, 1318, 1346
`\g__enumext_minipage_stat_int` .. 106, 83, 1685, 1712, 3905, 3916, 3921, 4005, 4054, 4059
`\l__enumext_minipage_temp_skip` 83, 1392, 1402, 1405, 1432, 1442, 1445, 1471, 1481, 1484, 1556, 1563, 1565
`\l__enumext_miniright_code_vii_box` 4711, 4715
`\g__enumext_miniright_code_vii_tl` 121, 4706, 4713, 4722
`\l__enumext_miniright_code_viii_box` .. 4772, 4776
`\g__enumext_miniright_code_viii_tl` 4767, 4774, 4782
`\l__enumext_miniright_code_X_box` 178
`\l__enumext_mode_box_bool` 641, 3439, 3615
`__enumext_multi_addvspace:` 55, 105, 1273, 1273, 3867
`__enumext_multi_set_vskip:` 54, 1228, 1228, 1275
`\l__enumext_multicols_above_ii_skip` ... 1247
`\l__enumext_multicols_above_iii_skip` .. 1256
`\l__enumext_multicols_above_iv_skip` ... 1265
`\l__enumext_multicols_above_v_skip` 1292, 1306, 1316, 1507
`\l__enumext_multicols_above_X_skip` 75
`\l__enumext_multicols_below_ii_skip` .. 1374, 1383, 1387, 1399, 1404
`\l__enumext_multicols_below_iii_skip` . 1414, 1423, 1427, 1439, 1444
`\l__enumext_multicols_below_iv_skip` .. 1453, 1462, 1466, 1478, 1483
`\l__enumext_multicols_below_v_skip` 1296, 1310, 1508, 1542, 1549, 1551, 1561, 1564, 4044
`\l__enumext_multicols_below_X_skip` 75
`\g__enumext_multicols_right_X_skip` 75
`__enumext_multicols_start:` 105, 106, 3843, 3843, 3910
`__enumext_multicols_stop:` 106, 1670, 3873, 3873, 3926
`__enumext_nested_base_line_fix:` 49, 104, 976, 982, 3798
`__enumext_newlabel:nn` 32, 38, 81, 424, 424, 2658, 3208
`\l__enumext_newlabel_arg_one_tl` 32, 38, 81, 91, 164, 2651, 2659, 2721, 3197, 3209, 3247
`\l__enumext_newlabel_arg_two_tl` 32, 38, 80, 164, 2607, 2617, 2630, 2645, 2660, 3184, 3189, 3194, 3210
`__enumext_parse_foreach_keys:n` .. 5590, 5606, 5623
`__enumext_parse_foreach_keys:nn` . 5590, 5613, 5625
`__enumext_parse_keys:n` 49, 66, 3789, 3789, 3951
`__enumext_parse_keys_vii:n` 66, 4788, 4826, 4826
`__enumext_parse_keys_viii:n` . 5051, 5096, 5096
`__enumext_parse_save_key:n` 77, 2451, 2456, 2456
`__enumext_parse_save_key_vii:n` 77, 2446, 2456, 2464
`__enumext_parse_series:n` .. 66, 104, 123, 1870, 1870, 3797, 4832
`__enumext_parse_store_keys:n` 104
`\l__enumext_parsep_i_skip` 1245, 1249
`\l__enumext_parsep_ii_skip` 1254, 1258
`\l__enumext_parsep_iii_skip` 1263, 1267
`\l__enumext_parsep_vii_skip` 5004
`\l__enumext_parsep_viii_skip` 5281
`\l__enumext_partopsep_v_skip` . 1308, 1312, 1503, 1526
`\l__enumext_partopsep_viii_skip` 1604
`__enumext_phantomsection:` 38, 389, 417, 421, 437
`__enumext_pre_itemsep_skip:` 56, 57, 1336, 1365, 1365
`__enumext_print_footnote:` .. 439, 461, 525, 530
`__enumext_print_footnote_mini:` 439, 491, 552, 557
`__enumext_print_footnote_standar:` 503, 519, 583
`__enumext_print_footnote_starred:` 503, 548, 563, 567
`__enumext_print_keyans_box:NN` 80, 2575, 2575, 2588, 2732, 2736, 3329, 3361, 5205, 5222
`\l__enumext_print_keyans_i_tl` 5364, 5396
`\l__enumext_print_keyans_ii_tl` ... 5370, 5397
`\l__enumext_print_keyans_iii_tl` .. 5376, 5398
`\l__enumext_print_keyans_iv_tl` ... 5382, 5399
`\l__enumext_print_keyans_star_bool` . 49, 135, 126, 988, 1000, 5419, 5424
`\l__enumext_print_keyans_starred_tl` 134, 135, 126, 5358, 5417
`\l__enumext_print_keyans_vii_tl` 134, 5388, 5400
`\l__enumext_print_keyans_X_tl` 126
`__enumext_printkeyans:nnn` 135, 5393, 5401, 5404
`__enumext_redefine_item:` . 96, 3421, 3421, 3730
`\l__enumext_ref_key_arg_tl` 44, 46, 233, 742, 743, 755, 786, 789, 799, 805, 815, 854, 855, 865
`\l__enumext_ref_the_count_tl` . 44, 46, 749, 752, 755, 794, 796, 799, 810, 812, 815, 860, 862, 865
`__enumext_regex_counter_style:` .. 34, 44, 228, 228, 750, 795, 811, 861
`__enumext_register_counter_style:Nn` .. 605, 605, 610, 611, 612, 613, 614
`__enumext_remove_extra_parsep_vii:` .. 4806, 5028, 5028
`__enumext_remove_extra_parsep_viii:` . 5068, 5309, 5309
`__enumext_renew_footnote:` .. 439, 443, 509, 514
`__enumext_renew_footnote_mini:` 439, 473, 539, 544
`__enumext_renew_footnote_standar:` 503, 503, 575
`__enumext_renew_footnote_starred:` 503, 535, 4998, 5275
`\l__enumext_renew_the_count_v_tl` 863, 871, 873
`\l__enumext_renew_the_count_vii_tl` 797, 824, 826
`\l__enumext_renew_the_count_viii_tl` 813, 831, 833
`\l__enumext_renew_the_count_X_tl` 46
`__enumext_rescan_anskey_env:n` .. 88, 89, 2904, 3002, 3097, 3105
`__enumext_reset_global_bool:` .. 339, 342, 351


```

\__enumext_reset_global_int: ... 339, 341, 345
\__enumext_reset_global_tl: ... 339, 343, 357
\__enumext_reset_global_vars: . 36, 90, 339, 339,
    3135
\l__enumext_resume_active_bool 66, 68, 57, 1874,
    1994
\__enumext_resume_counter: . 67, 68, 1992, 1998,
    2005
\__enumext_resume_counter:n . 66, 68, 1963, 1968,
    1992, 1992, 2062, 2070
\__enumext_resume_counter_save_ans: . 68, 69,
    1992, 2003, 2035
\__enumext_resume_counter_series: . 68, 1992,
    2001, 2018
\g__enumext_resume_int ... 57, 1915, 2009, 2010
\__enumext_resume_last:n . 66, 1870, 1876, 1889
\l__enumext_resume_name_tl 57, 1911, 1919, 1922,
    1938, 1946, 1949, 1995, 1996, 2024, 2031
\__enumext_resume_save_counter: . 66, 107, 124,
    1902, 1902, 3932, 4850
\__enumext_resume_series:n . 67, 1838, 1959, 1959
\__enumext_resume_starred: . 69, 1839, 2056, 2056
\g__enumext_resume_vii_int 57, 1942, 2014, 2015
\l__enumext_rightmargin_vii_dim .. 4519, 4523,
    4528
\l__enumext_rightmargin_viii_dim . 4550, 4554,
    4559
\__enumext_safe_exec: . 40, 104, 3778, 3778, 3950
\__enumext_safe_exec_vii: . 40, 4787, 4809, 4809
\__enumext_safe_exec_viii: 128, 5050, 5072, 5072
\__enumext_second_part: . 106, 3912, 3912, 3964
\__enumext_second_part_v: ... 3994, 4050, 4098
\l__enumext_series_name_tl ..... 68
\l__enumext_series_str . 66, 104, 123, 1836, 1872,
    1880, 1881, 1883, 1885, 1906, 1909, 1913, 1933, 1936,
    1940, 3793, 4830
\__enumext_set_error:nn ..... 5500, 5537, 5539
\__enumext_set_item_width: 107, 3934, 3934, 3960
\__enumext_set_parse:n ..... 5500, 5511, 5527
\l__enumext_setkey_tmpa_int ... 117, 5504, 5508
\l__enumext_setkey_tmpa_seq .. 117, 5502, 5512,
    5518, 5520, 5522, 5534
\l__enumext_setkey_tmpa_tl .... 117, 5510, 5514
\l__enumext_setkey_tmpb_seq .. 117, 5503, 5506,
    5510, 5511
\l__enumext_setkey_tmpb_tl 117, 5529, 5531, 5532
\l__enumext_show_answer_bool . 2317, 2350, 2415,
    2744, 2949, 3270, 3283, 3324, 3629, 5201, 5231
\__enumext_show_length:nnn .. 51, 236, 236, 5748,
    5749, 5750, 5751, 5752, 5753, 5754, 5755, 5756, 5757,
    5763, 5764, 5765, 5766, 5767, 5768, 5769, 5770, 5771,
    5772
\l__enumext_show_pos_tmp_int . 126, 3337, 3340,
    3355
\l__enumext_show_position_bool ... 2320, 2353,
    2418, 2748, 2952, 3271, 3284, 3344, 5208
\g__enumext_standar_bool 34, 104, 30, 258, 261, 280,
    354, 505, 521, 1904, 1969, 1981, 2007, 2020, 2058,
    2198, 2212, 2612, 2625, 2640, 3813
\l__enumext_standar_bool 104, 107, 30, 1654, 2613,
    3785, 3931, 4823
\l__enumext_standar_first_bool 35, 104, 30, 285,
    1891, 2038, 2100, 2107
\__enumext_standar_item_vii:w . 125, 4880, 4898,
    4900
\__enumext_standar_item_viii:w 130, 5123, 5141,
    5143
\__enumext_standar_ref: .... 44, 740, 759, 3732
\__enumext_standar_ref:n .... 44, 732, 740, 740
\g__enumext_standar_series_tl . 57, 1893, 1894,
    2060, 2063
\__enumext_standar_unknown_keys:n 3545, 3549,
    3553
\__enumext_standar_unknown_keys:nn 3545, 3555,
    3557
\g__enumext_starred_bool 34, 123, 30, 268, 271, 295,
    355, 1653, 1931, 1974, 1985, 2012, 2027, 2066, 2172,
    2218, 2603, 3178, 4724
\l__enumext_starred_bool 123, 124, 129, 30, 2641,
    2676, 2682, 2730, 3051, 3056, 3786, 4822, 4849, 5084,
    5088
\__enumext_starred_columns_set_vii: .. 4501,
    4501, 4797
\__enumext_starred_columns_set_viii: . 4501,
    4532, 5059
\l__enumext_starred_first_bool 35, 123, 30, 300,
    986, 999, 1896, 2047, 2100, 2107
\__enumext_starred_item_vii:w . 125, 4880, 4897,
    4914
\__enumext_starred_item_vii_aux_i:w .. 4880,
    4919, 4922
\__enumext_starred_item_vii_aux_ii:w . 4880,
    4920, 4925, 4927
\__enumext_starred_item_vii_aux_iii:w 4880,
    4930, 4937
\__enumext_starred_item_viii:w 130, 131, 5140,
    5158, 5158
\__enumext_starred_item_viii_aux_i:w .. 131,
    5158, 5164, 5167
\__enumext_starred_item_viii_aux_ii:w . 131,
    5158, 5165, 5182, 5184
\__enumext_starred_joined_item_vii:n 119, 125,
    4563, 4563, 4895
\__enumext_starred_joined_item_viii:n . 119,
    130, 4563, 4612, 5138
\__enumext_starred_ref: .... 45, 784, 820, 3763
\__enumext_starred_ref:n .... 45, 778, 784, 784
\g__enumext_starred_series_tl . 57, 1898, 1899,
    2068, 2071
\__enumext_starred_unknown_keys:n 3527, 3529,
    3531
\__enumext_starred_unknown_keys:nn 3527, 3533,
    3535
\__enumext_start_from:NNn 47, 876, 876, 889, 911,
    917
\l__enumext_start_i_int ..... 2010, 2022, 2041
\__enumext_start_item_tmp_vii: 122, 4800, 4880,
    4880
\__enumext_start_item_tmp_viii: .. 5062, 5123,
    5123
\__enumext_start_item_vii:w 125, 127, 4906, 4911,
    4934, 4941, 4989, 4989
\__enumext_start_item_viii:w .. 130, 5150, 5155,
    5187, 5266, 5266
\g__enumext_start_line_tl 35, 30, 288, 303, 360,
    2242, 2247, 2252, 2266, 2271, 2276
\__enumext_start_list:nn 37, 101, 378, 380, 3954,

```

4087, 4791, 5053
 __enumext_start_list_tag:n .. 4100, 4126, 4999, 5276
 __enumext_start_mini_vii: 123, 4661, 4661, 4841
 __enumext_start_mini_viii: ... 129, 4726, 4726, 5107
 __enumext_start_save_ans_msg: 70, 2084, 2084, 2109
 __enumext_start_store_level: 104, 3807, 3807, 3953
 __enumext_start_store_level_vii: 124, 4790, 4852, 4852
 \l__enumext_start_vii_int ... 2015, 2029, 2050
 \l__enumext_start_X_int 96
 __enumext_stop_item_tmp_vii: 122, 124, 125, 127, 4799, 4805, 4882, 4991
 __enumext_stop_item_tmp_viii: 130, 5061, 5067, 5125, 5268
 __enumext_stop_item_vii: 127, 4989, 4991, 5011
 __enumext_stop_item_viii: ... 5266, 5268, 5292
 __enumext_stop_list: 37, 121, 124, 378, 381, 3878, 3886, 4040, 4047, 4684, 4692, 4749, 4756
 __enumext_stop_list_tag:n ... 4100, 4142, 5014, 5295
 __enumext_stop_mini_vii: 121, 124, 4661, 4680, 4845
 __enumext_stop_mini_viii: 129, 4726, 4745, 5111
 __enumext_stop_save_ans_msg: . 70, 2084, 2089, 3124
 __enumext_stop_start_list_tag: .. 4100, 4134, 5001, 5278
 __enumext_stop_store_level: .. 105, 106, 3836, 3836, 3879, 3887
 __enumext_stop_store_level_vii: .. 121, 124, 4685, 4693, 4852, 4862
 \l__enumext_store_active_bool 31, 70, 108, 2039, 2048, 2116, 2817, 3811, 3824, 3972, 3980, 4356, 4854, 4864, 5074, 5090
 __enumext_store_active_keys:n . 77, 104, 2424, 2424, 3804
 __enumext_store_active_keys_vii:n . 77, 123, 2424, 2434, 4833
 __enumext_store_addto_prop:n 78, 90, 2499, 2499, 2507, 2667, 3159, 5192
 __enumext_store_addto_seq:n 79, 92, 2508, 2508, 2512, 2519, 2533, 2541, 2550, 2564, 2572, 2725, 3252
 \l__enumext_store_anskey_arg_tl .. 31, 82, 108, 2673, 2678, 2680, 2685, 2692, 2695, 2705, 2710, 2713, 2719, 2725
 __enumext_store_anskey_code:n 81, 84, 89, 2664, 2664, 2810, 3095, 3103
 \l__enumext_store_anskey_env_tl .. 31, 88, 108, 3025, 3029, 3035, 3097, 3105
 \l__enumext_store_anskey_opt_tl .. 31, 89, 108, 3026, 3053, 3059, 3066, 3072, 3082, 3092, 3101
 __enumext_store_anskey_safe_outer: 84
 \g__enumext_store_columns_break_bool . 2917, 3050, 3112
 \l__enumext_store_columns_break_bool . 2675, 2766
 \l__enumext_store_current_label_tl 31, 90, 92, 131, 108, 3140, 3143, 3146, 3152, 3157, 3159, 3216, 3219, 3222, 3228, 3233, 3243, 3252, 5169, 5174, 5178, 5191, 5192, 5194
 \l__enumext_store_current_label_tmp_tl . 31, 108
 \l__enumext_store_current_opt_arg_tl . 31, 93, 131, 108, 3262, 3267, 3274, 3280, 3287, 5180
 __enumext_store_internal_ref: .. 80, 81, 2589, 2589, 2670
 \g__enumext_store_item_join_int .. 2920, 3057, 3061, 3113
 \l__enumext_store_item_join_int .. 2683, 2687, 2769
 \g__enumext_store_item_star_bool . 2922, 3064, 3114
 \l__enumext_store_item_star_bool . 2690, 2771
 \g__enumext_store_item_symbol_sep_dim 2927, 3079, 3084, 3116
 \l__enumext_store_item_symbol_sep_dim 2702, 2707, 2776
 \g__enumext_store_item_symbol_tl . 2925, 3070, 3074, 3115
 \l__enumext_store_item_symbol_tl . 2693, 2697, 2774
 \l__enumext_store_keyans_item_opt_sep_v_-tl 3150, 3154, 3226, 3230
 \l__enumext_store_keyans_item_opt_sep_-viii_tl 5172, 5176
 __enumext_store_level_close: . 79, 2513, 2537, 3840
 __enumext_store_level_close_vii: . 79, 2544, 2568, 4868
 __enumext_store_level_open: 79, 105, 2513, 2513, 3819, 3832
 __enumext_store_level_open_vii: .. 79, 2544, 2544, 4858
 \g__enumext_store_name_tl 31, 70, 108, 359, 366, 367, 368, 369, 2092, 2118, 2241, 2246, 2251, 2265, 2270, 2275, 3122
 \l__enumext_store_name_tl 31, 70, 72, 108, 1925, 1928, 1952, 1955, 2043, 2052, 2087, 2096, 2097, 2118, 2119, 2120, 2122, 2123, 2125, 2127, 2128, 2130, 2132, 2133, 2157, 2501, 2503, 2510, 2653, 2654, 2756, 3031, 3199, 3200, 3354, 5216
 \l__enumext_store_ref_key_bool 81, 2366, 2668, 2716, 3163, 3240
 \l__enumext_store_save_key_vii_bool .. 2436, 2466
 \l__enumext_store_save_key_vii_tl 2438, 2439, 2467, 2468, 2548, 2556, 2560, 2564
 \l__enumext_store_save_key_X_bool .. 77, 126
 \l__enumext_store_save_key_X_tl 77, 126
 \l__enumext_store_upper_level_X_bool .. 126
 __enumext_storing_exec: 70, 86, 2094, 2110, 2114
 __enumext_storing_set:n .. 70, 2079, 2094, 2094
 \l__enumext_the_counter_v_tl 862
 \l__enumext_the_counter_vii_tl 796
 \l__enumext_the_counter_viii_tl 812
 \l__enumext_the_counter_X_tl 46
 __enumext_tmp:n 41, 45, 50, 56, 67, 74, 75, 82, 90, 95, 96, 107, 135, 142, 167, 171, 178, 198, 637, 646, 1832, 1843, 2075, 2083, 2136, 2154, 2359, 2423, 2442, 2455, 2591, 2598, 2599, 2620, 2633, 2636, 2647, 3165, 3172, 3502, 3512, 3545, 3552, 3702, 3742, 3743, 3777
 __enumext_tmp:nn 647, 668, 669, 703, 704, 719, 906, 931, 1012, 1034, 1035, 1055, 1109, 1117, 1118, 1132, 1197, 1213, 1214, 1227, 1721, 1737, 2324, 2358, 3486, 3501
 __enumext_tmp:nnn 720, 736, 737, 738, 739, 766, 782,

783

__enumext_tmp:nnnnn 932, 957, 960, 963, 965, 967, 970, 973

__enumext_tmp:w 5337, 5340

\l__enumext_tmpa_vii_int 4511, 4514, 4523, 4554

\l__enumext_tmpa_viii_int 4542, 4545

\l__enumext_tmpa_X_dim 178

\l__enumext_tmpa_X_int 178

\l__enumext_topsep_v_skip 1294, 1298, 1497, 4349

\l__enumext_topsep_vii_skip .. 1574, 1583, 1587

\l__enumext_topsep_viii_skip . 1596, 1618, 1622

__enumext_undefine_anskey_env: . 85, 90, 2850, 2850, 3133

__enumext_unskip_unkern: .. 34, 242, 242, 1347, 1519, 3881, 3882, 3922, 4042, 4043, 4060, 5005, 5006, 5282, 5283

\l__enumext_vspace_a_star_v_bool 1770

\l__enumext_vspace_a_star_vii_bool ... 1792

\l__enumext_vspace_a_star_viii_bool ... 1803

\l__enumext_vspace_a_star_X_bool 96

__enumext_vspace_above: 63, 106, 1738, 1738, 3892

__enumext_vspace_above_v: . 64, 1766, 1766, 3996

\l__enumext_vspace_above_v_skip .. 1768, 1772, 1774

__enumext_vspace_above_vii: 64, 123, 1788, 1788, 4838

\l__enumext_vspace_above_vii_skip 1790, 1794, 1796

__enumext_vspace_above_viii: . 64, 1788, 1799, 5105

\l__enumext_vspace_above_viii_skip 1801, 1805, 1807

\l__enumext_vspace_b_star_v_bool 1781

\l__enumext_vspace_b_star_vii_bool ... 1814

\l__enumext_vspace_b_star_viii_bool ... 1825

\l__enumext_vspace_b_star_X_bool 96

__enumext_vspace_below: 63, 107, 1752, 1752, 3930

__enumext_vspace_below_v: . 64, 1777, 1777, 4069

\l__enumext_vspace_below_v_skip .. 1779, 1783, 1785

__enumext_vspace_below_vii: 64, 124, 1810, 1810, 4848

\l__enumext_vspace_below_vii_skip 1812, 1816, 1818

__enumext_vspace_below_viii: . 64, 1810, 1821, 5113

\l__enumext_vspace_below_viii_skip 1823, 1827, 1829

__enumext_widest_from:nNNn .. 47, 890, 890, 905, 924

\g__enumext_widest_label_tl 29, 42, 63, 625, 629, 633

\l__enumext_wrap_label_opt_v_bool 3575

\l__enumext_wrap_label_opt_vii_bool 125, 4905

\l__enumext_wrap_label_opt_viii_bool .. 130, 5149

\l__enumext_wrap_label_opt_X_bool 96

\l__enumext_wrap_label_v_bool 3571, 3575, 3582, 3628, 3636, 4399

\l__enumext_wrap_label_vii_bool .. 125, 4905, 4909, 4917, 4981

\l__enumext_wrap_label_viii_bool . 130, 5149, 5153, 5162, 5230, 5239

\l__enumext_wrap_label_X_bool 96

__enumext_wrapper_label_v:n . 3634, 3638, 4418

__enumext_wrapper_label_vii:n 4983

__enumext_wrapper_label_viii:n .. 5237, 5241

\l__enumext_write_aux_file_tl . 32, 81, 92, 164, 2656, 2662, 3206, 3212

enumext* 5, 4785

enumXi 588

enumXii 588

enumXiii 588

enumXiv 588

enumXv 588

enumXvi 588

enumXvii 588

enumXviii 588

Environments provide by enumext:

anskey* 31, 70, 75-77, 80, 81, 83, 85, 86, 88, 90, 104, 105, 124, 133, 135, 140, 142

enumext* .. 28, 29, 32-34, 38-42, 45, 47-51, 53, 60, 61, 64-67, 69-72, 76-85, 89-91, 97, 98, 103-105, 110, 118, 119, 121, 124, 126-130, 132-136, 138, 141, 144, 146

enumext 28, 29, 33, 34, 38-42, 44-49, 51-56, 59, 61-63, 65-67, 69-72, 76-85, 89-91, 95-97, 99, 101, 102, 105, 107, 108, 113, 117, 120, 123, 124, 126, 129, 134-136, 138, 141, 142, 144

keyans* 28, 29, 31-35, 38-41, 45-51, 53, 60, 61, 64, 70, 71, 74-76, 78, 86, 91, 93, 98, 103, 110, 118, 119, 128, 129, 141, 143, 146

keyanspic 28, 29, 31, 32, 35, 41, 46, 70, 71, 74, 78, 79, 86, 90-93, 98, 110-116, 143

keyans 28, 29, 31, 32, 34, 35, 38, 39, 41, 42, 46-49, 51, 53, 55, 59, 61-64, 70, 71, 74-76, 78, 79, 86, 90-94, 98-102, 108, 110, 112, 113, 116, 120, 130, 141, 143

Environments:

center 118

description 97, 118

enumerate 118

flushleft 118

flushright 118

itemize 118

list 33, 37, 83, 97, 101, 106, 107, 110, 112-114, 118, 121

lrbox 127

minipage 33, 37, 39, 40, 53, 55-57, 112, 115, 117, 118, 121, 127

multicols 53-57, 62, 105, 106

quotation 118

quote 118

scontents 86, 89

tabbing 118

trivlist 118

verbatim 118

verse 118

exp commands:

\exp_after:wN 5340

\exp_args:Ne 3094, 3102, 3801, 5328

\exp_args:NV ... 2782, 2963, 3515, 3533, 3555, 5625

\exp_not:N 54, 628, 755, 799, 815, 865, 1065, 1068, 1079, 1080, 1081, 1092, 1093, 1104, 1105, 2721, 2753, 2754, 3245, 3351, 3352, 5213, 5214, 5337

\exp_not:n 290, 305, 318, 326, 334, 694, 714, 755, 799, 815, 865, 1066, 1859, 1868, 2306, 2337, 2485, 2497, 2659, 2687, 2697, 2707, 2721, 2722, 2944, 3061, 3074, 3084, 3209, 3247, 3249, 4213, 5454, 5464, 5657, 5662

F

\fbox 2314, 2932

\fboxrule 2314, 2932

\fboxsep 2314, 2932

file commands:

 \file_input_stop: 6061

first 1118

font 647

\footnote 38

\footnote 38, 445, 475

\footnotemark 455, 485

\footnotesize 2754, 3352, 5214

\footnotetext 441

\foreachkeyans 18, 138, 5590

G

\getkeyans 18, 133, 5326

group commands:

 \group_begin: 2752, 2797, 3004, 3091, 3350, 5212, 5395

 \group_end: 2759, 2813, 3108, 3358, 5219, 5402

H

\hbadness 5016, 5297

hbox commands:

 \hbox_overlap_left:n 2579, 3417, 4974

 \hbox_set:Nn 617, 4276

 \hbox_set_end: 5015, 5296

 \hbox_set_to_wd:Nnw 4992, 5269

\hfill 677, 682, 688, 689, 1677, 1704, 2721, 3245, 4688, 4752

hook commands:

 \hook_gput_code:nnn 5, 208, 212, 216, 389

 \hook_gremove_code:nn 89, 3020

 \hook_gset_rule:nnnn 390

 \hook_if_empty:nTF 3018

\hyperlink 82, 92

\hyperlink 2721, 3245

\hypertarget 38

\hypertarget 416

I

\IfDocumentMetadataTF .. 507, 523, 537, 550, 3434, 3610, 4128, 4136, 4144, 4180, 4188, 4196, 4300, 4309, 4317, 4324, 4329, 4377, 4386, 4476, 4484, 4686, 4750, 4796, 4804, 4950, 5058, 5066

\IfHyperBoolean 397

\IfPackageLoadedTF 7, 15, 393, 406

\ignorespaces .. 1068, 1081, 1093, 1105, 4289, 4801, 4878, 4911, 4934, 4941, 4987, 5007, 5063, 5121, 5155, 5187, 5264, 5284

\inputlineno 290, 305, 318, 326, 334

int commands:

 \int_add:Nn 4596, 4645

 \int_case:nn ... 1242, 1367, 2167, 2193, 2232, 2256

 \int_case:nnTF 244

 \int_compare:nNnTF .. 571, 787, 803, 822, 829, 1337, 1356, 1510, 1528, 1640, 1659, 1671, 1699, 2280, 2286, 2821, 2825, 2829, 2837, 2883, 2887, 2891, 3120, 3141, 3182, 3187, 3192, 3217, 3335, 3783, 3794, 3816, 3829, 3845, 3860, 3875, 3916, 3981, 3985, 4013, 4038, 4054, 4248, 4360, 4364, 4566, 4576, 4592, 4615, 4625, 4641, 4814, 4818, 4856, 4866, 5018, 5030, 5079, 5091, 5299, 5311, 5508, 5640

 \int_compare_p:nNn ... 259, 269, 281, 282, 296, 297, 1646, 1647, 2173, 2199, 2604, 2614, 2626, 2627, 2642, 2683, 2860, 2861, 2872, 2873, 3057, 3826

 \int_decr:N 4595, 4644

 \int_eval:n .. 376, 919, 2503, 2654, 2754, 3200, 3352, 3717, 3762, 4584, 4633, 5214

\int_from_alph:n 884, 898

\int_from_roman:n 886, 900

\int_gadd:Nn 4597, 4646

\int_gdecr:N 2176, 2181, 2185, 2189, 2202

\int_gincr:N 2009, 2014, 2666, 3255, 3371, 3405, 3588, 3905, 4005, 4404, 4884, 4960, 5127, 5196

\int_gset:Nn 453, 483, 2225

\int_gset_eq:NN .. 450, 480, 1908, 1915, 1921, 1927, 1935, 1942, 1948, 1954

\int_gzero:N . 347, 348, 349, 1685, 1712, 2292, 3113, 3921, 4059, 5041, 5323

\int_if_exist:NNTF 1883, 1919, 1925, 1946, 1952, 2130

\int_incr:N 2836, 3337, 3782, 3976, 4247, 4813, 4883, 5078, 5126

\int_mod:nn 5032, 5313

\int_new:N . 24, 25, 26, 27, 28, 29, 57, 58, 83, 100, 119, 133, 145, 146, 157, 158, 159, 161, 172, 173, 181, 182, 183, 184, 185, 1885, 2133

\int_set:Nn 880, 884, 886, 2022, 2029, 2041, 2050, 3005, 4470, 4471, 4511, 4542, 4565, 4571, 4587, 4614, 4620, 4636, 5016, 5297, 5504, 5642

\int_set_eq:NN 2010, 2015, 4594, 4643

\int_sign:n 2227

\int_step_function:nnN 2620, 2633, 2647

\int_step_function:nnnN 5646

\int_step_inline:nn 5556

\int_step_inline:nnn 4472

\int_to_roman:n 220, 2600, 2637

\int_use:N 369, 374, 375, 1338, 1357, 1672, 2024, 2031, 2043, 2052, 3717, 3737, 3762, 3802, 3846, 3855, 3870, 3876, 4569, 4570, 4582, 4618, 4619, 4631, 5977, 5981, 5987, 5991

\int_zero:N 3340, 5022, 5303

\item . 95, 99, 124, 127, 130, 132, 382, 2521, 2527, 2552, 2558, 2680, 3219, 3222, 3423, 3592, 4304, 4305, 4798, 4800, 5060, 5062, 5194

\item* 5, 16, 74, 3590

item-join 2764

item-pos* 2764, 3486

item-star 2764

item-sym* 2764, 3486

\itemindent 102

\itemindent 101

itemindent 1012

\itemsep 4293

\itemwidth . 587, 2314, 2932, 3936, 3942, 4073, 4079, 4605, 4609, 4654, 4658

K

keyans 15, 4082

keyans* 15, 5048

keyanspic 16, 4295

Keys for \anskey provide by enumext:

 break-col 82, 83, 86, 87, 89

 item-join 82, 83, 86, 87, 89

 item-pos* 82, 83, 86, 87, 89

 item-star 82, 83, 86, 87, 89

 item-sym* 82, 83, 86, 87, 89

Keys for anskey* provide by enumext:

 break-col 82, 83, 86, 87, 89

 item-join 82, 83, 86, 87, 89

 item-pos* 82, 83, 86, 87, 89

 item-star 82, 83, 86, 87, 89

 item-sym* 82, 83, 86, 87, 89

Keys for environments provide by **enumext**:

above*	30, 49, 63, 64, 106, 123
above	30, 49, 63, 64, 106, 123, 129
after	51, 52, 107, 124, 129
align	30, 43, 93, 95, 96, 100, 126, 140
base-fix	49, 65, 78, 104
before*	51, 52, 106, 123, 129
before	51, 52
below*	30, 63, 64, 107, 124
below	30, 63, 64, 107, 124, 129
check-ans	32, 33, 35, 70, 71, 73, 74, 78, 90, 92, 107, 124, 128, 142
columns-sep	53, 105, 127
columns	30, 53, 63, 105
first	51, 52, 127
font	42, 96, 100, 116, 126
item-pos*	95, 97
item-sym*	31, 95, 97
itemindent	30, 49, 50, 95, 99, 100, 127
itemsep	48, 103, 127
label-pos	112, 113, 115, 116
label-sep	112
labelsep	42, 102, 126
labelwidth	41, 42, 44-47, 102, 126
label	29, 41, 42, 44, 47, 113, 117
layout-sep	112
layout-sty	112, 117
layout-top	112
lisparindent	103
list-indent	30, 49, 50, 113
list-offset	49, 50, 107, 109
listparindent	49, 127
mark-ans*	75, 94
mark-ans	75, 78, 83
mark-pos*	75, 94
mark-pos	31, 75, 140
mark-ref	76, 78, 80, 82
mark-sep*	75, 93, 94
mark-sep	31, 75, 78, 131
mini-env	30, 38-40, 53, 62, 63, 78, 106, 118, 120, 121, 123, 124, 129
mini-right*	30, 33, 53, 78, 121, 123, 124
mini-right	30, 33, 53, 61, 78, 121, 123, 124
mini-sep	30, 53, 78, 106
mode-box	42, 95-97, 100, 101
no-store	32, 70-72, 78, 84, 95
noitemsep	48
nosep	48
parindent	103
parsep	48, 103, 113, 127
partopsep	48
ref	29, 34, 44-46, 141
resume*	29, 65, 66, 69-71, 78, 107, 124, 136
resume	29, 36, 65-71, 78, 107, 124, 136
rightmargin	49, 118
save-ans	31, 36, 65-70, 72, 73, 77-79, 84-86, 90, 92, 99, 108, 115, 126, 128, 130, 131, 133, 134, 136, 142
save-key	31, 65, 77, 78, 104, 123
save-pos	78
save-ref	32, 38, 76, 78, 80-82, 91, 92, 99, 131
save-sep	75, 78, 91, 131
series	29, 65-69, 78, 104, 107, 123, 124, 136
show-ans	31, 75, 78, 80, 81, 83, 93, 94, 116, 131
show-length	34, 51, 141
show-pos	31, 75, 80, 81, 83, 93, 116, 131

start*	30, 47, 65
start	30, 34, 47, 65
store-key	77
topsep	48, 49, 113
widest	29, 34, 47
wrap-ans*	32, 75, 78, 100, 116
wrap-ans	41, 75, 78, 80, 83
wrap-label*	30, 42, 95, 96, 99, 100, 125, 126, 130
wrap-label	30, 42, 95, 96, 99, 100, 113, 116, 125, 126, 130
wrap-opt	75, 78, 93, 99, 116
keys commands:	
\keys_define:nn	639, 649, 671, 706, 722, 768, 837, 908, 934, 976, 1014, 1037, 1111, 1120, 1199, 1216, 1723, 1834, 2077, 2138, 2295, 2326, 2361, 2444, 2449, 2764, 2915, 2977, 3488, 3504, 3527, 3547, 4202, 5354, 5466, 5582, 5590
\keys_if_exist_p:nn	5578, 5579
\l_keys_key_str	84, 87, 2782, 2963, 3515, 3533, 3555, 5625, 5733
\keys_precompile:nnN	135, 204, 204, 5356, 5362, 5368, 5374, 5380, 5386, 5608
\keys_set:nn	663, 993, 1006, 1222, 1728, 1733, 1971, 1976, 2063, 2071, 2370, 2374, 2375, 2379, 2383, 2384, 2388, 2392, 2393, 2397, 2401, 2402, 2406, 2407, 2411, 2412, 2802, 3796, 3801, 3992, 4220, 4222, 4224, 4226, 4228, 4230, 4232, 4234, 4236, 4238, 4258, 4831, 5100, 5470, 5475, 5476, 5477, 5478, 5481, 5486, 5487, 5488, 5489, 5490, 5491, 5492, 5524, 5634
\keys_set_known:nn	3101
keyval commands:	
\keyval_parse:NNn	1848, 2474, 5442

L

label	720, 766, 837
label-pos	4202
label-sep	4202
Labels provide by enumext :	
\Alph*	41, 42
\Roman*	41, 42
\alph*	41, 42
\arabic*	34, 41, 42
\roman*	41, 42
labelsep	647
\labelwidth	42
labelwidth	647
\lastnodetype	244
layout-sep	4202
layout-sty	4202
layout-top	4202
\leftmargin	102
\leftmargin	101, 4288
legacy commands:	
\legacy_if:nTF	4945, 4948, 5247, 5250
\legacy_if_gset_false:n	577, 4701
\legacy_if_set_false:n	4947, 5249
\legacy_if_set_true:n	4910, 4933, 4940, 4954, 5154, 5186
\linewidth	106
\linewidth	3900, 3936, 4002, 4073, 4469, 4514, 4545, 4667, 4732
\list	380
list-indent	1012
list-offset	1012
\listparindent	4291
listparindent	1012

M

<code>\makebox</code>	117
<code>\makebox</code>	2581, 3470, 3660, 4394, 4407, 4978, 5259
<code>\makelabel</code>	95, 96, 100, 117
<code>\makelabel</code>	95, 99, 3450, 3466, 3644, 3656
<code>mark-ans</code>	2295, 2359, 4202
<code>mark-ans*</code>	2324, 2359
<code>mark-pos</code>	2295, 2359, 4202
<code>mark-pos*</code>	2324, 2359
<code>mark-ref</code>	2359
<code>mark-sep</code>	2295, 2359, 4202
<code>mark-sep*</code>	2324, 2359
<code>mini-env</code>	1197
<code>mini-sep</code>	1197
<code>\minipage</code>	386
<code>\miniright</code>	11, 61, 1638, 1689, 1716, 3919, 4057
mode commands:	
<code>\mode_if_math:TF</code>	2845, 2899
<code>\mode_if_vertical:TF</code>	1276, 1304, 1324, 1348, 1499, 1520
<code>\mode_leave_vertical:</code>	991, 1002, 1065, 1079, 2577, 3415, 4972
<code>mode-box</code>	637
msg commands:	
<code>\msg_error:nn</code>	1691, 1718, 2806, 2839, 2843, 2897, 3037, 3983, 3987, 4250, 4307, 4362, 4816, 5081, 5093, 5493, 5552
<code>\msg_error:nnn</code>	745, 791, 807, 857, 1642, 1649, 1656, 1687, 1714, 1983, 1987, 2102, 2788, 2847, 2865, 2877, 2885, 2889, 2893, 2901, 2969, 3521, 3539, 3561, 4820, 5086, 5342, 5351, 5435, 5540, 5571, 5580, 5617, 5638
<code>\msg_error:nnnn</code>	2791, 2819, 2823, 2827, 2831, 2972, 3524, 3542, 3564, 3974, 4358, 4366, 5076, 5414, 5620
<code>\msg_error:nnnnn</code>	693, 713, 2305, 2336, 2943, 4212
<code>\msg_fatal:nn</code>	3784
<code>\msg_fatal:nnn</code>	591
<code>\msg_info:nnn</code>	9, 12, 17, 20, 395, 408
<code>\msg_line_context:</code>	5698, 5703, 5708, 5737, 5742, 5747, 5762, 5777, 5781, 5785, 5789, 5793, 5797, 5804, 5811, 5817, 5831, 5835, 5840, 5844, 5848, 5852, 5857, 5861, 5865, 5869, 5874, 5909, 5913, 5918, 5923, 5927, 5932, 6008, 6012, 6017, 6022, 6027, 6031, 6035, 6039, 6043, 6047, 6051, 6055, 6059
<code>\msg_log:nnn</code>	2122, 2127, 2132
<code>\msg_log:nnnnn</code>	373, 2265, 2270, 2275
<code>\msg_log:nnnnnn</code>	365
<code>\msg_new:nnn</code>	5665, 5669, 5673, 5677, 5682, 5695, 5700, 5705, 5710, 5719, 5727, 5731, 5735, 5740, 5745, 5760, 5775, 5779, 5783, 5787, 5791, 5795, 5799, 5808, 5814, 5820, 5824, 5828, 5833, 5838, 5842, 5846, 5850, 5855, 5859, 5863, 5867, 5872, 5907, 5911, 5916, 5921, 5925, 5930, 6006, 6010, 6015, 6020, 6025, 6029, 6033, 6037, 6041, 6045, 6049, 6053, 6057
<code>\msg_new:nnnn</code>	5686, 5877, 5886, 5895, 5901, 5934, 5944, 5954, 5964, 5974, 5984, 5994, 6000
<code>\msg_term:nnnn</code>	2086, 2091, 3726, 3736, 3768, 3773
<code>\msg_term:nnnnn</code>	2246
<code>\msg_warning:nn</code>	3918, 4056
<code>\msg_warning:nnnn</code>	2283, 2289, 3674, 3679, 4568, 4581, 4617, 4630
<code>\msg_warning:nnnnn</code>	2241, 2251
<code>\multicolsep</code>	105
<code>\multicolsep</code>	1341, 1513, 3866, 4029

N

<code>\NeedsTeXFormat</code>	3
<code>\NewCommandCopy</code>	382
<code>\newcounter</code>	594
<code>\NewDocumentCommand</code>	1638, 2794, 4354, 5326, 5393, 5500, 5549, 5627
<code>\NewDocumentEnvironment</code>	3948, 4082, 4295, 4785, 5048
<code>\newenvsc</code>	2908
<code>\newlabel</code>	38
<code>\newlabel</code>	428
<code>no-store</code>	2136
<code>\noindent</code>	3907, 4676, 4741, 5021, 5302
<code>\nointerlineskip</code>	1350, 1353, 1522, 1525, 1679, 1706, 4676, 4741
<code>noitemsep</code>	932
<code>\nopagebreak</code>	1287, 1315, 1350, 1353, 1522, 1525, 1629, 1635
<code>\normalfont</code>	2753, 3351, 5213
<code>nosep</code>	932

P

Packages:	
<code>caption</code>	121
<code>enumext</code>	28, 41, 44, 70, 74, 97, 101, 102, 112, 140
<code>enumitem</code>	41
<code>expl3</code>	117
<code>footnotehyper</code>	37, 39, 40
<code>hyperref</code>	32, 33, 37, 38, 82, 92, 126, 140
<code>latex-lab-block</code>	37
<code>ltxcmd</code>	37
<code>ltsockets</code>	110
<code>lua-visual-debug</code>	56
<code>multicol</code>	28, 140
<code>scontents</code>	28, 85, 86
<code>shortlst</code>	117, 122, 127
<code>tagpdf</code>	110
<code>\par</code>	1287, 1315, 1353, 1525, 1629, 1635, 1674, 1679, 1701, 1706, 2729, 3883, 4044, 4062, 4340, 4343, 4489, 4703, 4718, 4764, 4778, 5021, 5302
para commands:	
<code>\para_end:</code>	5038, 5320
<code>\parbox</code>	2314, 2932
<code>\parindent</code>	5003, 5280
<code>\parsep</code>	54, 113
<code>\parsep</code>	992, 3759, 4272, 4281
<code>parsep</code>	932
<code>\parskip</code>	5004, 5281
<code>\partopsep</code>	3760, 4060, 4292
<code>partopsep</code>	932
peek commands:	
<code>\peek_meaning:NTF</code>	4889, 4903, 4918, 4929, 5132, 5147, 5163
<code>\peek_meaning_remove:NTF</code>	4896, 5139
<code>\peek_remove_spaces:n</code>	3597
<code>\phantomsection</code>	38
<code>\phantomsection</code>	417
prg commands:	
<code>\prg_do_nothing:</code>	421
<code>\prg_new_protected_conditional:Npnn</code>	222
<code>\prg_replicate:nn</code>	239
<code>\prg_return_false:</code>	226
<code>\prg_return_true:</code>	225
<code>\printkeyans</code>	19, 134, 5393
prop commands:	
<code>\prop_const_from_keyval:Nn</code>	5541

\prop_count:N 367, 2503, 2654, 2756, 3200, 3354, 5216, 5643

\prop_get:NnNTF 5567

\prop_gput_if_not_in:Nnn 2501

\prop_if_exist:NTF 2120, 5346, 5636

\prop_item:Nn 5348, 5660

\prop_new:N 2123

\ProvidesExplPackage 4

R

\raggedcolumns 3869, 4032

\raisebox 4431

\ref 80, 91

ref 720, 766, 837

\refstepcounter 4957, 5252

regex commands:

\regex_match:nnTF .. 224, 883, 885, 897, 899, 3033

\regex_replace_once:nnN 232

\renewcommand 755, 799, 815, 865

\RenewDocumentCommand . 445, 475, 1689, 1716, 3423, 3450, 3466, 3592, 3644, 3656, 4305

\RequirePackage 13, 21

resume 1832

resume* 1832

rightmargin 1012

\Roman 42, 47

\Roman 613

\roman 42, 47

\roman 614, 738, 5378

S

\s 3034

save-ans 2075

save-key 2442

save-ref 2359

save-sep 2324, 2359, 4202

scan commands:

\scan_stop: 4304, 4798, 5060, 5337, 5340

scontents internal commands:

\l_scontents_fname_out_tl 2993

__scontents_parse_environment_keys:n . 2999

__scontents_rescan_tokens:n 3006

\l_scontents_storing_bool 2991

\l_scontents_writing_bool 2992

seq commands:

\seq_clear:N 5502, 5645

\seq_const_from_clist:Nn 5495

\seq_count:N 368, 4495, 5506

\seq_gclear:N 470, 471, 500, 501

\seq_gput_right:Nn 456, 457, 486, 487, 2510

\seq_if_empty:NTF 463, 493, 5408, 5520

\seq_if_exist:NTF 2125, 5406

\seq_if_in:NnTF 5412

\seq_item:Nn 3031, 4482

\seq_map_function:NN 5511

\seq_map_inline:Nn 5421, 5429, 5521, 5522

\seq_map_pairwise_function:NNN 465, 495

\seq_new:N 120, 121, 123, 143, 174, 175, 176, 177, 2128

\seq_pop_left:NN 5510

\seq_put_right:Nn 4368, 5518, 5534, 5655

\seq_set_from_clist:Nn 5503

\seq_set_map_e:NNn 5512

\seq_use:Nn 204, 205, 5651

series 1832

\setcounter 894, 898, 900, 3717, 3762, 4337

\setenumext 6, 136, 5500

\setenumextmeta 6, 138, 5541

show-ans 2295, 2324, 2359, 4202

show-length 1109

show-pos 2295, 2324, 2359, 4202

skip commands:

\skip_add:Nn 1247, 1256, 1265, 1278, 1282, 1306, 1310, 1326, 1384, 1386, 1400, 1403, 1424, 1426, 1440, 1443, 1463, 1465, 1479, 1482, 1501, 1550, 1551, 1562, 1564, 4281, 4290

\skip_gset:Nn 1577, 1581, 1585

\skip_gzero_new:N 1572, 1573

\skip_horizontal:N .. 1080, 1092, 1104, 4975, 4987, 5025, 5264, 5306

\skip_horizontal:n .. 1066, 2578, 2586, 3416, 3418, 4412, 4874, 4973, 5007, 5117, 5284

\skip_if_eq:nnTF 1245, 1254, 1263, 1370, 1410, 1450, 1538, 1574, 1596, 1740, 1754, 1768, 1779, 1790, 1801, 1812, 1823

\skip_new:N ... 77, 78, 79, 84, 85, 86, 87, 88, 89, 196

\skip_set:Nn 1230, 1234, 1292, 1296, 1320, 1373, 1374, 1392, 1413, 1414, 1432, 1452, 1453, 1471, 1495, 1541, 1542, 1556, 1576, 1580, 1598, 1602, 1606, 1612, 1616, 1620, 4265

\skip_set_eq:NN 1331, 1332, 1334, 1341, 1506, 1507, 1508, 1513, 3715, 3758, 3759, 5004, 5281

\skip_sub:Nn 1380, 1382, 1396, 1398, 1420, 1422, 1436, 1438, 1459, 1461, 1475, 1477, 1548, 1549, 1560, 1561

\skip_use:N 1232, 1236, 1280, 1284, 1288, 1308, 1312, 1322, 1328, 1741, 1745, 1748, 1755, 1759, 1762, 3883

\skip_vertical:N . 578, 581, 1004, 4702, 4716, 5040, 5322

\skip_vertical:n 1003, 5039, 5321

\skip_zero:N 1340, 1354, 1492, 1493, 1494, 1512, 1526, 3760, 3866, 4029, 4292, 4293

\skip_zero_new:N 1571, 1593, 1594, 1595

\c_zero_skip . 578, 581, 1004, 1245, 1254, 1263, 1411, 1450, 1574, 1596, 1741, 1755, 1768, 1779, 1790, 1801, 1812, 1823, 4702, 4716, 5040, 5322

\small 5361, 5367, 5373, 5379, 5385, 5391

\smash 3468, 3658

socket commands:

\socket_assign_plug:nn .. 4130, 4138, 4146, 4182, 4190, 4198

\socket_new:nn 4100, 4150

\socket_new_plug:nnn 4101, 4109, 4117, 4151, 4159, 4168

\socket_use:n 4183, 4191, 4199

\socket_use:nn 4131, 4139, 4147

start 906

start* 906

start-list-tags 4100, 4150

\stepcounter 449, 479, 4275, 4424

stop-list-tags 4100, 4150

stop-start-tags 4100, 4150

str commands:

\c_backslash_str 2847, 5698, 5703, 5708, 5713, 5715, 5717, 5722, 5724, 5822, 5826, 5830, 5840, 5844, 5852, 5853, 5857, 5869, 5870, 5874, 5875, 5896, 5898, 5902, 5904, 5932, 5995, 5997, 6001, 6003, 6012, 6013, 6017, 6022, 6023, 6027, 6031, 6035

\c_colon_str 2653, 3199, 5337

\c_left_brace_str 5803, 5810, 5816

\c_right_brace_str 5803, 5810, 5816

\str_case:nn 252, 311, 3295

`\str_case:nnTF` . 1855, 1863, 2481, 2489, 5449, 5458
`\str_clear:N` 3793, 4830
`\str_count:n` 239
`\str_if_empty:NTF` 1872, 1913, 1940
`\str_if_eq:nnTF` 3718, 3764, 5551
`\str_if_in:nnTF` 5333
`\str_new:N` 80, 128, 129, 130, 148, 191
`\str_set:Nn` . 678, 684, 690, 709, 710, 711, 2301, 2302, 2303, 2332, 2333, 2334, 2939, 2940, 2941, 4207, 4210
`\str_set_eq:NN` 3318, 5204, 5221
`\str_use:N` 3472
`\strut` 3468, 3658
`\strutbox` . 1359, 1362, 1373, 1374, 1385, 1387, 1402, 1405, 1413, 1414, 1425, 1427, 1442, 1445, 1452, 1453, 1464, 1466, 1481, 1484, 1530, 1533, 1541, 1542, 1550, 1551, 1563, 1565, 1576, 1577, 1580, 1587, 1600, 1608, 1614, 1622, 4284, 4290, 4340, 4348, 4437

T

tag commands:

`\tag_mc_begin:n` 4107, 4157, 4166
`\tag_mc_begin_pop:n` 4123, 4175, 4332, 4334
`\tag_mc_end:` 4111, 4161, 4170
`\tag_mc_end_push:` 4104, 4154, 4320
`\tag_resume:n` . . 4103, 4153, 4311, 4319, 4388, 4486, 4686, 4750
`\tag_struct_begin:n` . 4105, 4106, 4113, 4114, 4115, 4155, 4156, 4163, 4164, 4165, 4321
`\tag_struct_end:n` 4112, 4119, 4120, 4121, 4122, 4162, 4171, 4172, 4173, 4174, 4331, 4333, 4804, 5066
`\tag_suspend:n` . 4124, 4176, 4302, 4313, 4326, 4379, 4478, 4796, 5058
`\tag_tool:n` 4312

TeX and L^AT_EX 2_ε commands:

`\@auxout` 426
`\@currentenv` 252, 311
`\protected@write` 426

tex commands:

`\tex_newlinechar:D` 3005

text commands:

`\text_expand:n` 5329
`\textasteriskcentered` 2298, 2329, 2936
`\textborn` 3492
`\textreferencemark` 2364
`\thepage` 432

tl commands:

`\c_space_tl` 3274, 3287, 5747, 5762, 5785, 5789, 5976, 5977, 5986, 5987, 6047, 6051
`\tl_clear:N` . . 676, 683, 2293, 2428, 2438, 2459, 2467, 2673, 3025, 3026, 3140, 3216, 5169
`\tl_clear_new:N` 623
`\tl_const:Nn` 46, 607
`\tl_gclear:N` . 359, 360, 361, 1893, 1898, 3115, 3461, 3481, 4722, 4782, 4976
`\tl_gclear_new:N` 1880
`\tl_gput_right:Nn` 608
`\tl_greplace_all:Nnn` 629
`\tl_gset:Nn` 287, 288, 302, 303, 1881, 1894, 1899, 2118, 3029, 3392, 4924
`\tl_gset_eq:NN` 625, 3388, 4969
`\tl_if_blank:nTF` 2786, 2804, 2967, 3519, 3537, 3559, 4967, 5615
`\tl_if_empty:NTF` . 743, 761, 789, 805, 824, 831, 855, 871, 1906, 1911, 1933, 1938, 1996, 2060, 2068, 2097, 2157, 2517, 2548, 2693, 3070, 3092, 3122, 3150, 3226, 3267, 3280, 3413, 4493, 5172, 5532

`\tl_if_empty:nTF` 1961
`\tl_if_exist:NTF` 1966
`\tl_if_novalue:nTF` 447, 477, 2800, 3148, 3224, 3260, 3367, 3386, 3394, 3569, 3791, 4256, 4828, 5098, 5170
`\tl_map_inline:Nn` 230, 626
`\tl_new:N` 38, 39, 40, 43, 48, 49, 52, 53, 59, 61, 62, 64, 65, 101, 102, 103, 109, 110, 111, 112, 113, 114, 115, 116, 117, 118, 122, 124, 125, 126, 134, 137, 138, 155, 164, 165, 166, 169, 190
`\tl_put_left::Ne` 3059
`\tl_put_left:Nn` 2525, 2556, 2678, 3053, 3066, 3072, 3082, 4706, 4767, 5191, 5194
`\tl_put_right:Nn` 624, 753, 797, 813, 863, 2529, 2560, 2607, 2617, 2630, 2645, 2651, 2656, 2680, 2685, 2692, 2695, 2705, 2710, 2713, 2719, 3143, 3146, 3152, 3157, 3184, 3189, 3194, 3197, 3206, 3219, 3222, 3228, 3233, 3243, 5174, 5178
`\tl_remove_all:Nn` 5531
`\tl_remove_once:Nn` 2595, 3169
`\tl_replace_all:Nnn` 628, 5566
`\tl_reverse:N` 2594, 2596, 3168, 3170
`\tl_set:Nn` . 54, 256, 266, 315, 316, 323, 324, 331, 332, 593, 677, 682, 688, 689, 742, 786, 854, 1063, 1077, 1090, 1102, 1995, 2096, 2429, 2439, 2460, 2468, 2750, 2993, 3262, 3348, 3507, 4241, 5180, 5210, 5529, 5565, 5635
`\tl_set_eq:NN` 634, 748, 751, 794, 796, 810, 812, 860, 862, 2593, 3167, 3180, 3316, 5203
`\tl_to_str:n` 1966, 1972, 1977, 5329
`\tl_trim_spaces:n` . . . 624, 5518, 5529, 5535, 5551
`\tl_use:N` 630, 633, 763, 826, 833, 873, 1135, 1139, 1143, 1147, 1151, 1155, 1159, 1163, 1167, 1171, 1175, 1179, 1183, 1187, 1191, 1195, 2583, 2600, 2608, 2619, 2632, 2637, 2648, 3375, 3381, 3409, 3452, 3454, 3460, 3475, 3572, 3576, 3583, 3646, 3649, 3651, 3664, 3955, 4088, 4409, 4417, 4713, 4774, 4980, 5008, 5009, 5261, 5285, 5290, 5396, 5397, 5398, 5399, 5400, 5417, 5514, 5633

token commands:

`\token_to_str:N` 428
`\topsep` 4060, 4290
`topsep` 932
`\topskip` 1340, 1512

U

`\u` 233, 3034
`\unkern` 247
`unknown` 2764, 3502, 3527, 3545
`\unskip` 246
use commands:
`\use:N` 240, 3457, 3478, 3957
`\use:n` 1846, 2472, 5335, 5440
`\use_none:nn` 420, 5572
`\usecounter` 3716, 3761

V

`\value` 1909, 1915, 1922, 1928, 1936, 1942, 1949, 1955
vbox commands:
`\vbox_set:Nn` 4381
`\vbox_set_top:Nn` 4711, 4772
`\vspace` 992, 1745, 1748, 1759, 1762, 1772, 1774, 1783, 1785, 1794, 1796, 1805, 1807, 1816, 1818, 1827, 1829

W

`widest` 906
`wrap-ans` 2295, 2359
`wrap-ans*` 2324, 2359, 4202

wrap-label	<u>647</u>		Z	
wrap-label*	<u>647</u>	\z	3034
wrap-opt	<u>2324</u> , <u>2359</u> , <u>4202</u>			