

enumext

ENUMERATE EXERCISE SHEETS

V1.4 2025-06-15^{*}

©2024–2025 by Pablo González L[†]

CTAN: <https://www.ctan.org/pkg/enumext>

 <https://github.com/pablgonz/enumext>

Abstract

This package provides enumerated list environments compatible with *tagging* PDF for creating “*simple exercise sheets*” along with “*multiple choice questions*”, storing the “*answers*” to these in memory using *multicol* package.

Contents

1	Introduction	1	6	The storage system	11
1.1	Description and usage	2	6.1	Keys for storage system	11
1.2	The concept of left margin	3	6.1.1	Keys for label and ref	12
1.3	User interface	3	6.1.2	Keys for wrap and marks	12
1.3.1	Internal counters	3	6.1.3	Keys for debug and checking	13
1.3.2	Public dimension	3	6.2	The command <code>\anskey</code>	13
1.3.3	Support for multicol	4	6.2.1	Keys for <code>\anskey</code>	14
1.3.4	Support for minipage	4	6.3	The environment <code>anskey*</code>	14
1.3.5	The <code>\label</code> and <code>\ref</code> system	4	6.3.1	Keys for <code>anskey*</code>	14
1.3.6	Support for <code>\footnote</code>	4	6.4	The environment <code>keyans</code>	15
2	The environments provided	5	6.4.1	The <code>\item*</code> in <code>keyans</code>	16
2.1	The environment <code>enumext</code>	5	6.5	The environment <code>keyanspic</code>	16
2.2	The environment <code>enumext*</code>	5	6.5.1	Keys for <code>keyanspic</code>	17
2.3	The command <code>\item*</code>	5	6.5.2	The command <code>\anspic</code>	17
2.3.1	Keys for <code>\item*</code>	6	6.6	Printing stored content	18
2.4	The command <code>\item</code> in <code>enumext*</code>	6	6.6.1	The command <code>\getkeyans</code>	18
3	The command <code>\setenumext</code>	6	6.6.2	The command <code>\foreachkeyans</code>	18
4	The command <code>\setenumextmeta</code>	6	6.6.3	The command <code>\printkeyans</code>	19
5	The keyval system	7	7	Full examples	20
5.1	Keys for label and ref	7	8	Tagged PDF examples	23
5.2	Keys for spaces	8	9	The way of non-enumerated lists	23
5.2.1	Vertical spaces	8	10	References	25
5.2.2	Horizontal spaces	9	11	Change history	26
5.3	Keys for add code	9	12	Index of Documentation	27
5.4	Keys for start, series and resume	10	13	Implementation	29
5.5	Keys for multicol	10	14	Index of Implementation	145
5.6	Keys for minipage	11			
5.6.1	The command <code>\miniright</code>	11			
5.6.2	The key <code>mini-right</code>	11			

Motivation and acknowledgments

Usually it is enough to use the classic `enumerate` environment to generate “*simple exercise sheets*” or “*multiple choice questions*”, the basic idea behind `enumext` is to cover three points:

1. To have a simple interface to be able to write “*lists of exercises*” with “*answers*”.
2. To have a simple interface for writing “*multiple choice questions*”.
3. To have a simple interface for placing “*columns*” and “*drawings*” or “*tables*”.

This package would not be possible without Phelype Oleinik who has collaborated and adapted a large part of the code and all \LaTeX team for their great work and to the different members of the \TeX-SX community who have provided great answers and ideas. Here a note of the main ones:

1. Answer given by Alan Munn in `\topsep`, `\itemsep`, `\partopsep`, `\parsep` - what do they each mean (and what about the bottom)?
2. Answer given by Enrico Gregorio in [Understanding minipages - aligning at top](#)
3. Answer given by Ulrich Diez in [Different mechanics of hyperlink vs. hyperref](#)
4. Answer given by Enrico Gregorio in [Minipage and multicol, vertical alignment](#)

^{*}This file describes a documentation for v1.4, last revised 2025-06-15.

[†]E-mail: pablgonz@educarchile.cl.

License and Requirements

Permission is granted to copy, distribute and/or modify this software under the terms of the LaTeX Project Public License (lpl), version 1.3 or later (<https://www.latex-project.org/lpl.txt>). The software has the status “maintained”.
The enumext package loads and requires multicol[3] package, need to have a modern T_EX distribution such as T_EX Live or MiK_TTeX. It has been tested with the standard classes provided by L^AT_EX: book, report, article and letter on 10pt, 11pt and 12pt.

The minimum requirement is L^AT_EX release 2025-06-01.

1 Introduction

In the L^AT_EX world there are many useful packages and classes for creating “lists of exercises”, “worksheets” or “multiple choice questions”, classes like exam[1] and packages like xsim[2] do the job perfectly, but they don’t always fit the basic day to day needs.

In my work (and in the work of many teachers) it is common to use “simple exercise sheets” also known as “informal lists of exercises”, as an example:

1. Factor $x^2 - 2x + 1$

2. Factor $3x + 3y + 3z$

3. True False

(a) $\alpha > \delta$

(b) L^AT_EXze is cool?

4. Related to Linux
- (a) You use linux?

(b) Usually uses the package manager?

(c) Rate the following package and class

i. xsim-exam

ii. xsim

iii. exsheets

Sometimes we are also interested in showing the “answers” along with the questions:

1. Factor $x^2 - 2x + 1$

*

$(x - 1)^2$

2. Factor $3x + 3y + 3z$

*

$3(x + y + z)$

3. True False

(a) $\alpha > \delta$

*

False

(b) L^AT_EXze is cool?

*

Very True!

4. Related to Linux
- (a) You use linux?

*

Yes

(b) Usually uses the package manager?

*

Yes, dnf

(c) Rate the following package and class

i. xsim-exam

*

doesn’t exist for now :(

ii. xsim

*

very good

iii. exsheets

*

obsolete
- Or we are interested in referring to a specific question and its “answer”, for example:
- The answer to 3.(b) is “Very True!” and the answer to 4.(c).ii is “very good”.
- Or we are interested in printing all the “answers”:
1. $(x - 1)^2$

2. $3(x + y + z)$

3. (a) False

(b) Very True!

4. (a) Yes

(b) Yes, dnf

(c) i. doesn’t exist for now :(

ii. very good

iii. obsolete
- Another very common thing to use in my work is “multiple choice questions”, for example:
1. First type of questions

A) value

B) correct

C) value

D) value

2. Second type of questions

I. $2\alpha + 2\delta = 90^\circ$

II. $\alpha = \delta$

III. $\angle EDF = 45^\circ$

A) I only

B) II only

C) I and II only

D) I and III only

E) I, II, and III

★ 3. Third type of questions

(1) $2\alpha + 2\delta = 90^\circ$

(2) $\angle EDF = 45^\circ$

A) value

B) value

C) value

D) value

E) value

4. Question with image and label below:

A

A)

B


B)

A

C)

A

D)



E)

5. Question with image on right side:

A) value

B) value

C) value

D) correct

E) value

B

©2024–2025 by Pablo González L

2 / 161

Where what we are interested in the $\langle label \rangle$ and a “short note” that we leave as an explanation, and then print them:

1. B) $x = 5$

2. D)

3. C) some note
- ⌘ 4. E) A duck

⌘ 5. D) “other note”

⌘

The `enumext` package was created and designed to meet these small requirements in the creation of “simple worksheets” and “multiple choice questions”.

- These “simple worksheets” or “multiple choice questions” appear to be easy to obtain using a combination of the `enumerate`, `minipage` and `multicols` environments, but like many things, what “looks simple” is not so simple.

1.1 Description and usage

The `enumext` package defines enumerated environments using the `list` environment provided by \TeX , but “does not redefine” any internal commands associated with it such as `\list`, `\endlist` or `\item` outside of the “scope” in which they are defined.

- This package is NOT intend to replace the `enumerate` environment nor replace the powerful `enumitem`[6], the approach is intended to work without hindering either of them.

This package can be used with `xelatex`, `lualatex`, `pdflatex` and the classical `latex`»`dvips`»`ps2pdf` and is present in \TeX Live and $\text{MiK}\text{\TeX}$, use the package manager to install. For manual installation, download `enumext.zip` and unzip it, run `luatex enumext.ins` and move all files to appropriate locations, then run `mktexlsr`. To produce the documentation run `arara enumext.dtx`.

<code>enumext.sty</code>	»	<code>TDS:tex/latex/enumext/</code>
<code>enumext.pdf</code>	»	<code>TDS:doc/latex/enumext/</code>
<code>README.md</code>	»	<code>TDS:doc/latex/enumext/</code>
<code>enumext.dtx</code>	»	<code>TDS:source/latex/enumext/</code>
<code>enumext.ins</code>	»	<code>TDS:source/latex/enumext/</code>

The package is loaded in the usual way:

```
\usepackage{enumext}
```

1.2 The concept of left margin

There is a direct relationship between the parameters `\leftmargin`, `\itemindent`, `\labelwidth` and `\labelsep` plus an “extra space” that makes it difficult to obtain the desired *horizontal spaces* in a `list` environment. Usually we don’t want the `list` to go beyond the left margin of the page, but since these four values are related, that causes a problem.

The `enumitem`[6] package adds the `\labelindent` parameter to solve some of these problems. A simplified representation of this in the figure 1.

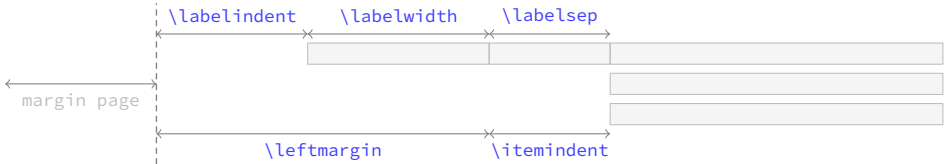


Figure 1: Representation of horizontal lengths in `enumitem`.

The `enumext` package does NOT provide a user interface to set the values for `\leftmargin` and `\itemindent`, instead it provides the keys `list-offset` and `list-indent` which internally set the values for `\leftmargin` and `\itemindent`. The concepts of `\leftmargin` and `\itemindent` are different in `enumext`. The figure 2 shows the visual representation of idea.

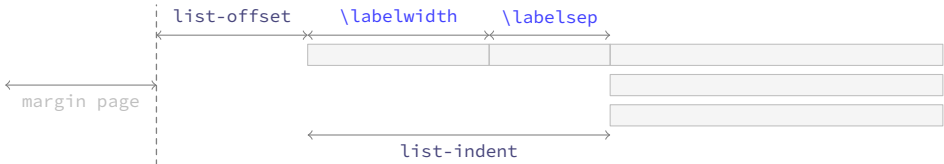


Figure 2: Representation of horizontal lengths concept in `enumext`.

In this way we reduce a *little* the amount of parameters we have to pass. With the default values of keys `list-offset`, `list-indent`, `labelwidth` and `labelsep` the lists will have the (usually) expected output for “simple worksheets”. The figure 3 shows the visual representation.

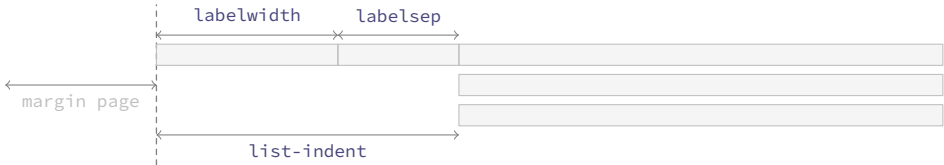


Figure 3: Default horizontal lengths `list-offset=0pt`, `list-indent=\labelwidth+\labelsep` in `enumext`.

1.3 User interface

The user interface consists of two main list environments `enumext` (vertical) and `enumext*` (horizontal), the environment `anskey*` and the command `\anskey` to “store content” and the environments `keyans`, `keyans*` and `keyanspic` for multiple choice. It also provides the commands `\getkeyans` to print individual *stored content*, `\printkeyans` and `\foreachkeyans` to print all *stored content*, `\miniright` for `minipage`, `\setenumext` and `\setenumextmeta` to config [*key* = *val*] options.

1.3.1 Internal counters

The package `enumext` uses internally the `enumXi`, `enumXii`, `enumXiii`, `enumXiv` counters for the four nesting levels of the `enumext` environment, the `enumXv` counter for the `keyans` environment, the `enumXvi` counter for the `keyanspic` environment, the counter `enumXvii` for `enumext*` environment and the counter `enumXviii` for `keyans*` environment.

- If any package defines these counters or they are user-defined in the document, the package will return a fatal error and abort the load.

1.3.2 Public dimension

The package `enumext` only provides a single public dimension `\itemwidth` and is intended for user convenience only and is not for internal use as such. The dimension `\itemwidth` is *rigid length* and contains the “width of the content” of each `\item` regardless of `labelwidth` and `labelsep`.

- If any package defines `\itemwidth` or they are user-defined `\itemwidth` in the document, the package will overwrite it without warning.

1.3.3 Support for multicol

The package provides direct support for using the `multicol`[3] package. This allows to obtain directly a two-column output as shown in the figure 4.

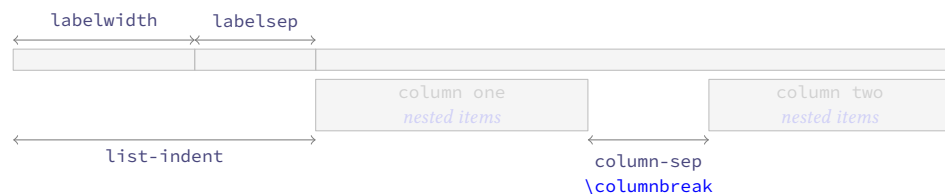


Figure 4: Representation of the two column output for a nested level in `enumext` environment.

The “non starred” version of the `multicols` environment is always used together with the `\raggedcolumns` command and is controlled by `columns` and `columns-sep` keys. It can be used in all nesting levels of the environment `enumext` and the environment `keyans` and can together with the `mini-env` key. If you need to force a start a new column `\columnbreak` must be used (see §5.5).

- The `\columnseprule` command is not available as a key and is set to “zero” for the inner levels and the `keyans` environment. If the value of this is set inside the document, it will affect “all environments” that use the `columns` key.

1.3.4 Support for minipage

The package provides direct support for `minipage` environment, this allows you to obtain an output like the one shown in figure 5.



Figure 5: Representation of the `mini-env` output for a nested level `enumext` environment.

The `minipage` environments on “left side” and “right side” is always used with “aligned on top” [*t*]. It can be used in all nesting levels of the environment `enumext` and the environment `keyans` and is controlled by `mini-env` and `mini-sep` keys. In order to switch from the “left” side `minipage` environment to the “right” side one must use the command `\miniright` (see §5.6).

1.3.5 The \label and \ref system

This package provides a user interface like the `enumitem`[6] package to customize the references which is activated by the `ref` key (§5.1), the standard \TeX `\label` and `\ref` commands work as usual. It also provides an “internal reference” system for the “stored content” by means of the key `save-ref` (§6.1.1) when the key `save-ans` (§6.1) is active.

1.3.6 Support for \footnote

The `enumext*` and `keyans*` environments and the `mini-env` key use the `minipage` environment in their implementation but in a transparent way for the user, i.e. it is only used for typesetting and not directly. The `enumext` package provides an *internal implementation* for the command `\footnote` compatible with the `hyperref` package to work in the same way as if it were used anywhere in the document.

Unfortunately, if *tagging* PDF is not enabled, it will not produce the expected “links” because the internal implementation uses `\footnotetext[⟨number⟩]` and `\footnotemark[⟨number⟩]{⟨text⟩}` and support for these is limited by the `hyperref` package.

The best way to solve this if *tagged* PDF is NOT active is to use Jean-François Burnol `footnotehyper`[9] package, it will support keeping the “links” if `hyperref` is loaded with the `hyperfootnotes=true` option (default). Load it is as follows:

```
\IfDocumentMetadataTF{ }
{
  \usepackage{footnotehyper}
  \makesavenoteenv{enumext}
  \makesavenoteenv{enumext*}
}
```

At the moment the `footnotehyper` package is not compatible with *tagged* PDF.

2 The environments provided

The package `enumext` provides two main list environments, the *vertical* environment `enumext` and the *horizontal* environment `enumext*`.

enumext	<code>\begin{enumext}[⟨keyval list⟩]</code>	<code>\begin{enumext*}[⟨keyval list⟩]</code>
enumext*	<code>\item ⟨item content⟩</code>	<code>\item ⟨item content⟩</code>
	<code>\item [⟨custom⟩] ⟨item content⟩</code>	<code>\item [⟨custom⟩] ⟨item content⟩</code>
	<code>\item* [⟨symbol⟩] [⟨offset⟩] ⟨item content⟩</code>	<code>\item* [⟨symbol⟩] [⟨offset⟩] ⟨item content⟩</code>
	<code>\end{enumext}</code>	<code>\end{enumext*}</code>

2.1 The environment enumext

The `enumext` is an environment that works in the same way as the standard `enumerate` environment provided by \TeX , `\item` and `\item[⟨custom⟩]` commands work in the usual way. The environment can be nested with at most “four levels” and the options can be configured globally using `\setenumext` command and locally using `[⟨key = val⟩]` in the environment.

Example with `columns=2`

1. This text is in the first level.
- A. This text is in the fourth level.
- (a) This text is in the second level.
- X This text is in the first level.
- i. This text is in the third level.
- ★ 2. This text is in the first level.

2.2 The environment enumext*

The `enumext*` is a *horizontal list environment* similar to the `shortenumberate` or `tasks` environments provided by the `shortlst`[16] and `tasks`[17] packages, `\item` and `\item[⟨custom⟩]` work as usual. The options can be configured globally using `\setenumext` command and locally using `[⟨key = val⟩]` in the environment.

Some considerations to take into account for this environment:

- The environment cannot be nested within itself or in the environment `keyans*`, but it can be nested within `enumext` and vice versa.
- Each “item content” in the environment is placed within a `minipage` environment whose *width* is stored in the dimension `\itemwidth` that NOT includes `labelwidth`, `labelsep`, only the *width of the content*.
- You cannot have floating environments like `figure` or `table` but `\footnote` with `hyperref` support is supported if the `footnotehyper` package is loaded (see §1.3.6 for full support).
- You cannot have any standard list environments like `itemize`, `enumerate`, `description`, `quote`, `quotation`, `verse`, `center`, `flushleft`, `flushright`, `verbatim`, `tabbing`, `trivlist`, `list` and all environments created with `\newtheorem`.

Example with `columns=2`

1. This text is in the first level.
2. This text is in the first level.
- X This text is in the first level.
- ★ 4. This text is in the first level.

2.3 The command \item*

```
\item* \item* [⟨symbol⟩] [⟨offset⟩]
```

The `\item*`, `\item*[⟨symbol⟩]` and `\item*[⟨symbol⟩][⟨offset⟩]` works like the numbered `\item`, but placing a `⟨symbol⟩` to the “left” of the `⟨label⟩` separated from it by the `⟨offset⟩` set by the the *second optional argument*. The *starred argument* “*” cannot be separated by spaces ‘ ’ from the command, i.e. `\item*` and the *first optional argument* does “NOT” support *verbatim content*. Can be configure with the keys `item-sym*` and `item-pos*` locally in the environment or globally using `\setenumext` command (§3).

The behavior of `\item*` in the `enumext` and `enumext*` environments is NOT the same as in the `keyans` and `keyans*` environments.

2.3.1 Keys for \item*

`item-sym*` = {<symbol>} default: \textborn
Sets the *symbol* to be displayed in the “left” of the box containing the current <label> set by `labelwidth` key for `\item*` in `enumext` and `enumext*`. The *symbol* can be in *text* or *math* mode, for example `item-sym*={\star}`.

`item-pos*` = {<rigid length>} default: by levels
Sets the *offset* between the box containing the current <label> defined by `labelwidth` key and the <symbol> set by `item-sym*` key. The default values are set by `labelsep` key at each level. If positive values are passed it will *offset to the left* and if negative values are passed it will *offset to the right*.

2.4 The command \item in enumext*

The `\item` command for the `enumext*` environment provides an “first optional argument” `\item(<columns>)` which “joins items” between columns. Let’s consider the following examples adapted directly from the `task` package:

```
\begin{enumext*}[widest=10,columns=4]
  \item The first
  \item* The second
  \item The third
  \item The fourth
  \item(3)* The fifth item is way too long for this and needs three columns
  \item The sixth
  \item The seventh
  \item(2)[X] The eighth item is way too long for this and needs two columns
    (\the\itemwidth)
  \item The ninth
  \item[Z] The tenth (\the\itemwidth)
\end{enumext*}
```

1. The first
- ★ 2. The second
3. The third
4. The fourth
- ★ 5. The fifth item is way too long for this and needs three columns
6. The sixth
7. The seventh
- X 8. The eighth item is way too long for this and needs two columns (196.17749pt)
9. The ninth
- Z 10. The tenth (89.28171pt)

3 The command \setenumext

<code>\setenumext</code>	<code>\setenumext{<key = val>}</code>	<code>\setenumext[<keyans*>]{<key = val>}</code>
	<code>\setenumext[<enumext, level>]{<key = val>}</code>	<code>\setenumext[<print, level>]{<key = val>}</code>
	<code>\setenumext[<enumext*>]{<key = val>}</code>	<code>\setenumext[<print, *>]{<key = val>}</code>
	<code>\setenumext[<keyans>]{<key = val>}</code>	<code>\setenumext[<print*>]{<key = val>}</code>

The command `\setenumext` sets the <keys> on a global basis for environments `enumext`, `enumext*`, `keyans`, `keyans*` and the `\printkeyans` command. It can be used both in the preamble and in the body of the document as many times as desired.

The <keys> set in the *optional argument* of environments and commands have the *highest precedence*, overriding both options passed by `\setenumext`. If the *optional argument* is not passed, the first level of the environment `enumext` will be taken by default.

🔴 The key `save-ans` that activate the “storage system” must NOT be passed through this command and must be passed directly in the *optional argument* of the “first level” of the environment in which they are executed.

4 The command \setenumextmeta

<code>\setenumextmeta</code>	<code>\setenumextmeta {<key name>}{<key-one = val, key-two = val, ...>}</code>
	<code>\setenumextmeta*{<key name>}{<key-one = val, key-two = val, ...>}</code>
	<code>\setenumextmeta [<enumext*>]{<key name>}{<key-one = val, key-two = val, ...>}</code>
	<code>\setenumextmeta [<enumext, level>]{<key name>}{<key-one = val, key-two = val, ...>}</code>

The command `\setenumextmeta` adds a new “meta-key” for the environments `enumext` and `enumext*`, the {<key name>} must be different from those defined by the package. If the *optional argument* is not passed, the new “meta-key” will be created for the “first level” of the environment `enumext`.

The *starred argument* ‘*’ will create the new “meta-key” for the environment `enumext*` and for all levels of the environment `enumext`. For example: `\setenumextmeta*{midsep}{topsep=3pt, partopsep=0pt}` will create a new key `midsep` available for all levels of the `enumext` environment and the `enumext*` environment and we can use it like any other key so `\begin{enumext}[midsep]` and `\begin{enumext*}[midsep]` will be valid.

5 The keyval system

The $\langle key = val \rangle$ system used by the `enumext` package is implemented using `l3keys` so it must be taken into consideration that those keys marked as “*value forbidden*”, that is $\langle key \rangle$ is different from $\langle key = \rangle$.

All $\langle keys \rangle$ described in this section are available for the `enumext`, `enumext*`, `keyans` and `keyans*` environments with the exception of the keys `series`, `resume`, `resume*` which are only available for the “*first level*” of the environments `enumext` and `enumext*`; and the keys `mini-right`, `mini-right*` which are only available for the `enumext*` and `keyans*` environments.

All $\langle keys \rangle$ related to vertical or horizontal spacing accept a “*skip*” or “*dim*” expression if passed between braces, i.e. you do not need to use `\dimeval` or `\dimexpr` to perform calculations.

- It should be kept in mind that using any $\langle key \rangle$ that sets a *rubber lengths* or *rigid lengths* for vertical or horizontal space on a level will influence the vertical and horizontal space for *inners levels* and `keyans`, `keyans*` and `keyanspic` environments.

5.1 Keys for label and ref

`mode-box` $\langle value forbidden \rangle$ default: *not used*

This is a “*switch-key*” that does not receive an argument and is “*only*” available for the “*first level*” of the `enumext` environment and the `enumext*` environment. When this is set the `label`, `font`, `wrap-label` and `wrap-label*` keys are executed within `\makebox` for the `enumext` and `keyans` environments.

- This key is intended for compatibility with *tagged* PDF and is forcibly “*enabled*” when `\DocumentMetadata` is present. If you want to get the same document output whether `\DocumentMetadata` is active or not, you must enable this key.
- In the `enumext*` and `keyans*` environments `\makebox` are redefined using `\makebox` by default. If `enumext` or `keyans` is used in the `enumext*` environment the key must be activated manually.

`label` = { $\langle \backslash\alpha^* | \backslash\Alpha^* | \backslash\arabic^* | \backslash\roman^* | \backslash\Roman^* \rangle$ } default: *by levels*

Sets the $\langle label \rangle$ that will be printed at the *current level* and default value for `labelwidth` key. The default value for the first level of the environments `enumext` and `enumext*` are `\arabic*`, for second level are `(\alph*)`, for third level are `\roman*`, and for fourth level are `\Alpha*`. For `keyans` and `keyans*` environments the default value is `\Alpha*`.

- This key is intended to give the basic structure with which the $\langle label \rangle$ will be displayed, and the form in which it is used by standard “*label and ref*” and the “*internal label and ref*” system with the `save-ref` key. You cannot use commands with $\langle label \rangle$ as an argument, for example `\emph{\langle\alph*\rangle}` will return an error. For full customization of how $\langle label \rangle$ is displayed use the `font`, `wrap-label` and/or `wrap-label*` keys.

`labelsep` = { $\langle rigid length \rangle$ } default: `0.3333em`

Sets the *horizontal space* between the box containing the current $\langle label \rangle$ defined by `label` key and the text of an item on the first line. Internally sets the value of `\labelsep` for the current level.

`labelwidth` = { $\langle rigid length \rangle$ } default: *by label*

Sets the *width* of the box containing the current $\langle label \rangle$ set by the `label` key. Internally sets the value of `\labelwidth` for the current level. The default values are calculated by means of the *width* of a box by setting a *value* to the current counter set by `label` key using ‘0’ for `\arabic*`, ‘M’ for `\Alpha*`, ‘m’ for `\alph*`, ‘VIII’ for `\Roman*` and ‘viii’ for `\roman*`.

`widest` = { $\langle integer | string \rangle$ } default: *empty*

Sets the `labelwidth` key pass the $\langle integer \rangle$ or converting the $\langle string \rangle$ of the form `\Alpha`, `\alph`, `\Roman` or `\roman` to a *value* for the current counter defined by `label` key, then calculating the *width* by means of a box. For example `widest={XXIII}` or `widest={23}` are equivalent. This key is useful when the default values of the `labelwidth` key are smaller than those actually used.

`font` = { $\langle font commands \rangle$ } default: *empty*

Sets the *font style* for the current $\langle label \rangle$ defined by `label` key. For example `font={\bfseries\small}`.

`align` = { $\langle left | right | center \rangle$ } default: *left*

Sets the *aligned* of $\langle label \rangle$ defined by `label` key on the current level in the label box.

`wrap-label` = { $\langle code \{ \#1 \} more code \rangle$ } default: *empty*

Wraps the *current* $\langle label \rangle$ defined by `label` key referenced by `\{ \#1 \}` after executing the `align` and `font` keys. The `\{ \langle code \rangle \}` must be passed between braces and this does not modify the value set by the `labelwidth` key and is applied *only* on `\item` and `\item*`. When using it in the `\setenumext` command it is necessary to use the *double* ‘`\{ \#1 \}`’. For example `wrap-label={\fbox{\#1}}` or you can create a command:

```
\NewDocumentCommand \mywrap { s m }
{
  \IfBooleanTF{\#1}
  {
    {\textcolor{red}{\textbf{Q}}\textcolor{blue}{\textbf{.}}\textcolor{gray}{\#2}}
    {\textcolor{blue}{\textbf{Q}}\textcolor{red}{\textbf{.}}\textcolor{gray}{\#2}}
  }
}
```

and then pass it through the key `wrap-label={\mywrap{\#1}}` or `wrap-label={\mywrap*{\#1}}`.

`wrap-label*` = { $\langle code \{ \#1 \} more code \rangle$ } default: *empty*

The same as the `wrap-label` key but also applies on `\item[custom]`.

`ref = {\code {\alph*|\Alph*|\arabic*|\roman*|\Roman*} more code}` default: *empty*

Modifies the way *cross references* are displayed. The `label` key sets the default form of the *cross references*, by using this key you can define a different format, for example: `ref=\emph{\alph*}` is valid.

Internally it renews the command associated with each counter when it is executed, i.e., in the environment `enumext` the command `\theenumxi` is modified when the key is executed at the first level, `\theenumxii` when it is executed at the second level and `\theenumxiii` together with `\theenumxiv` when it is executed at the third and fourth levels.

- This must be kept in mind, since the values set by the `label` and `ref` keys are not cumulative by levels, so if you have used the `ref` key in the first level and then want to associate the counter with `label` or `ref` in the second level you must use the direct commands, i.e. `\arabic{enumxi}` to indicate the count of the first level instead of using `\theenumxi`.

5.2 Keys for spaces

`show-length = {\true|false}` default: *false*

Displays on the terminal the values for *all list parameters* at the current level. For *vertical spaces* show the values of `\topsep`, `\itemsep`, `\parsep` and `\partopsep`. For *horizontal spaces* show the values of `\labelwidth`, `\labelsep`, `\itemindent`, `\listparindent` and `\leftmargin`.

5.2.1 Vertical spaces

`topsep = {\rubber length|rigid length}` default: *by levels*

Set the *vertical space* added to both the top and bottom of the list. Internally sets the value of `\topsep` for the current level. The default value for the first level of the environments `enumext` and `enumext*` are `8.0pt` plus `2.0pt` minus `4.0pt`, for second level are `4.0pt` plus `2.0pt` minus `1.0pt`, for third and fourth level are `2.0pt` plus `1.0pt` minus `1.0pt`. For `keyans` and `keyans*` environments the default value is `4.0pt` plus `2.0pt` minus `1.0pt`.

`parsep = {\rubber length|rigid length}` default: *by levels*

Set the *vertical space* between paragraphs within an item. Internally sets the value of `\parsep` for the current level. The default value for the first level of the environments `enumext` and `enumext*` are `4.0pt` plus `2.0pt` minus `1.0pt`, for second level are `2.0pt` plus `1.0pt` minus `1.0pt`, for third and fourth level are `0pt`. For `keyans` and `keyans*` environments the default value is `2.0pt` plus `1.0pt` minus `1.0pt`.

- In the `enumext*` and `keyans*` environments this value is passed to `\parskip` within the `minipage` environment where “item content” is placed.

`partopsep = {\rubber length|rigid length}` default: *by levels*

Set the *vertical space* added, beyond `topsep`, to the “top” and “bottom” of the entire environment if the environment instance is preceded by a “blank line” or `\par` command. Internally sets the value of `\partopsep` for the current level. The default values for first and second level in environment `enumext` are `2.0pt` plus `1.0pt` minus `1.0pt`, for third and fourth level are `1.0pt` minus `1.0pt`. For the `keyans` environment the default value is `2.0pt` plus `1.0pt` minus `1.0pt`, and for the `keyans*` and `enumext*` environments it is available but *without* effect.

- The value of this parameter also affects the *inner levels* and the environments `keyans`, `keyanspic` and `keyans*`. Caution should be taken with “blank lines” or `\par` command “before” each environment or nested level when formatting the source code of document. T_EX will enter *vertical mode* and apply this value to the “top” and “bottom” the environment or nested level.

`itemsep = {\rubber length|rigid length}` default: *by levels*

Set the *vertical space* between items, beyond the `parsep`. Internally sets the value of `\itemsep` for the current level. The default value for the first level of the environments `enumext` and `enumext*` are `4.0pt` plus `2.0pt` minus `1.0pt`, for the rest of the levels are `2.0pt` plus `1.0pt` minus `1.0pt`. For `keyans` and `keyans*` environments the default value is `4.0pt` plus `2.0pt` minus `1.0pt`.

- In the `enumext*` and `keyans*` environments this value corresponds to the separation between rows.

`noitemsep` *<value forbidden>* default: *not used*

This is a “meta-key” that does not receive an argument. Set `itemsep` and `parsep` equal to `0pt` the entire level of environment.

`nosep` *<value forbidden>* default: *not used*

This is a “meta-key” that does not receive an argument. Sets all keys for vertical spacing equal to `0pt` the entire level of environment.

`base-fix` *<value forbidden>* default: *not used*

This is a “switch-key” that does not receive an argument available *only* for the “first level” of environment `enumext`. Fix the *baseline* when an environment `enumext` is nested in `enumext*` and there is no material between the `\item` and the start of the environment for example `\item \begin{enumext}` within the environment `enumext*`. Internally sets the keys `topsep`, `above` and `above*` at `0pt`.

- This key is provided as a way to work around this minor issue, but you should be aware that if for some reason you have the `itemindent` key set in the `enumext*` environment it will be lost and you will need to adjust it using the `list-offset` key in the `enumext` environment.

- The following $\langle keys \rangle$ should be used with “caution”, they are intended to be used at the “top” and “bottom” of the environment when the `columns` or `mini-env` keys do not provide adequate *vertical spaces*. The values passed can be *rubber* or *rigid* lengths, the way they are applied is the way you differ, using the star ‘*’ $\langle keys \rangle$ applies `\vspace*` so that \LaTeX does *not discard* this space at page break.

`above = { $\langle rubber length \mid rigid length \rangle$ }` default: *not used*

Set the *extra vertical space* added, beyond `topsep`, to the top of the entire level of environment. This key is intended to give a “fine adjustment” of the vertical space “above” the environment without hindering the value of the `topsep` key. The space is added with `\vspace` so is “discordable”.

`above* = { $\langle rubber length \mid rigid length \rangle$ }` default: *not used*

Set the *extra vertical space* added, beyond `topsep`, to the top of the entire level of environment. This key is intended to give a “fine adjustment” of the vertical space “above” the environment without hindering the value of the `topsep` key. The space is added with `\vspace*` so is “not discordable”.

`below = { $\langle rubber length \mid rigid length \rangle$ }` default: *not used*

Set the *extra vertical space* space added, beyond `topsep`, to the bottom of the entire level of environment. This key is intended to give a “fine adjustment” of the vertical space on the “below” the environment without hindering the value of the `topsep` key. The space is added with `\vspace` so is “discordable”.

`below* = { $\langle rubber length \mid rigid length \rangle$ }` default: *not used*

Set the *extra vertical space* space added, beyond `topsep`, to the bottom of the entire level of environment. This key is intended to give a “fine adjustment” of the vertical space on the “below” the environment without hindering the value of the `topsep` key. The space is added with `\vspace*` so is “not discordable”.

5.2.2 Horizontal spaces

`list-offset = { $\langle rigid length \rangle$ }` default: `0pt`

Sets the *horizontal translation* of the entire environment level from the left edge of the box defined by the `labelwidth` key. Internally sets the values of `\leftmargin` and `\itemindent` for the current level.

`list-indent = { $\langle rigid length \rangle$ }` default: `labelwidth + labelsep`

Sets the *indentation* of the whole environment under the box defined by `labelwidth` and `labelsep` keys. Internally sets the value of `\leftmargin` and `\itemindent` for the current level. If `list-indent=0pt` is set in the environments `enumext` and `keyans` the $\langle label \rangle$ will be part of the text, separated by the value of the `labelsep` key and the *first word*, in simple terms it will look like a “common paragraph”.

- The `enumext*` and `keyans*` environments are implemented using `\makebox` and `minipage` which causes “list indent” to always be equal to the value passed to `labelwidth` plus `labelsep`. Passing a value to this key is equivalent to setting the value for the `list-offset` key.

`itemindent = { $\langle rigid length \rangle$ }` default: `0pt`

Sets the extra *horizontal indentation*, beyond `labelsep`, of the “first line” off each `\item` that is not followed by a “blank line” or the `\par` command. This value must be greater than or equal to `0pt` and is applied internally using `\hspace` without modifying the value of `\itemindent`.

- This key is intended for the `enumext*` and `keyans*` environments where, by their implementation, it is not possible to adjust `labelwidth` and `list-indent` without modifying the output. If you use `enumext` or `keyans` and want to get around the *blank line* limitation or the `\par` command followed by `\item` you can modify `labelwidth` and `list-indent` and get the same effect.

`rightmargin = { $\langle rigid length \rangle$ }` default: `0pt`

Set the *horizontal space* between the right margin of the environment and the right margin of the enclosing environment, the value it takes must be greater than or equal to `0pt`. Internally sets the value of `\rightmargin` for the current level.

`listparindent = { $\langle rigid length \rangle$ }` default: `0pt`

Sets the *horizontal space* indentation, beyond `list-indent`, for second and subsequent paragraphs within a list item. Internally sets the value of `\listparindent` for the current level.

- In the `enumext*` and `keyans*` environments this value is passed to `\parindent` within the `minipage` environment where “item content” is placed.

5.3 Keys for add code

The following $\langle keys \rangle$ should be used with “caution”, they are intended to inject $\{ \langle code \rangle \}$ into different parts of the defined environments. We must keep in mind that the defined environments are based on the `list` base environment provided by \LaTeX which is defined (simplified) as plain form `\list{ $\langle arg one \rangle$ }{ $\langle arg two \rangle$ }`. Using the `before*` key does not allow access to the `list` parameters defined by $[\langle key = val \rangle]$.

`before = { $\langle code \rangle$ }` default: *not used*

Execute $\{ \langle code \rangle \}$ “before” the environment starts. The $\{ \langle code \rangle \}$ must be passed between braces, is executed “after” performing all calculations related to the *list parameters* in the environment and the parameters sets by $[\langle key = val \rangle]$ that is, in the second argument of the list after setting all the parameters `\begin{list}{ $\langle arg one \rangle$ }{ $\langle arg two \rangle$ }{ $\langle code \rangle$ }`.

`before* = {⟨code⟩}` default: *not used*
 Execute {⟨code⟩} “before” the environment starts. The {⟨code⟩} must be passed between braces, is executed “before” performing all calculations related to the *list parameters* and [`key = val`] sets in the environment that is, before the arguments defining the environment are executed: {⟨code⟩}\begin{list}{⟨arg one⟩}{⟨arg two⟩}.

`first = {⟨code⟩}` default: *not used*
 Executes {⟨code⟩} when “starting” the environment. The {⟨code⟩} must be passed between braces, is executed right “after” all *list parameters* are done, after the second argument of list, just before the first occurrence of \item: \begin{list}{⟨arg one⟩}{⟨arg two⟩}{⟨code⟩}\item.

- 🔹 Keep in mind that the code set in this key will affect the entire “body” of the environment and therefore the inner levels of the list and the *keyans* environment. It is recommended to set this key per level.
- 🔹 In the *enumext** and *keyans** environments this key is executed after the *listparindent*, *parsep* and *itemindent* keys within the *minipage* environment in which the “item content” is placed.

`after = {⟨code⟩}` default: *not used*
 Execute {⟨code⟩} “after” finishing the environment. The {⟨code⟩} must be passed between braces.

5.4 Keys for start, series and resume

`start = {⟨integer | integer expression⟩}` default: *1*
 Sets the *start value* of the numbering on the current level. The {⟨integer expression⟩} must be passed between braces, internally is evaluated and pass to the counter defined by *label* key on the current level, i.e. it is equivalent to enter `start={\dimeval{100*⟨value⟩}{chapter}}` or `start={100*⟨value⟩{chapter}}`.

`start* = {⟨integer | string⟩}` default: *not used*
 Sets the *start value* of the numbering on the current level. Internally ⟨string⟩ is converted and passed as value to the counter defined by *label* key on the current level, i.e. it is equivalent to enter `start=5`, `start=E` or `start=v`.

The following ⟨keys⟩ are “only” available for the *enumext** environment and the “first level” of the *enumext* environment and are ignored if set when nested within each other.

`series = {⟨series name⟩}` default: *not used*
 Stores the *keys* of the *optional argument* of the “first level” of the environment in which it is executed in {⟨series name⟩} which is used as an argument in the key *resume*. The ⟨keys⟩ stored in {⟨series name⟩} are not cumulative and are overwritten if the same {⟨series name⟩} is used again.

`resume = {⟨series name⟩}` default: *not used*
 Sets the *start value* and *options* for the “first level” continuing the numbering of the environment in which the `series={⟨series name⟩}` key was executed. If passed *without value* this will only set *start value* continue the numbering from the last environment in which `series={⟨series name⟩}` or `resume={⟨series name⟩}` is not present and if the *save-ans* key is active it will continue the numbering from the last environment in which it was executed. The *start value* can be overwritten using *start* or *start** keys.

`resume* ⟨value forbidden⟩` default: *not used*
 Sets the *start value* and *options* for the “first level” continuing the numbering of the environment in which the `series={⟨series name⟩}` or `resume={⟨series name⟩}` keys are NOT present, if the *save-ans* key is active it will continue the numbering from the last environment in which it was executed. The *start value* can be overwritten using *start* or *start** keys.

- 🔹 For security reasons the *series* key will never save in {⟨series name⟩} the keys *series*, *resume*, *resume**, *save-ans*, *save-key*, *start** and *start*. When using the key `resume={⟨series name⟩}` it will have hierarchy in the ⟨keys⟩ that are saved in {⟨series name⟩}, in order to establish the value of a ⟨key⟩ already saved in {⟨series name⟩} it must be placed to the “right” of `resume={⟨series name⟩}`, the same thing happens with the *resume** key, the exception is the *save-ans* key that must be placed on the “left” if you want to start the numbering with its value. The *resume* key passed “without value” must be exactly “without value”, i.e. `resume=` cannot be used and if executed before *resume** it will affect the *start value*.

5.5 Keys for multicol

`columns = {⟨integer⟩}` default: *1*
 Set the *number of columns* to be used by the *multicol* environment within the environments *enumext* and *keyans*. The value must be a positive integer less than or equal to 10. In the *enumext** and *keyans** environments they correspond to the default number of columns (without joining) and internally adjust the value of \itemwidth.

`columns-sep = {⟨rigid length⟩}` default: *by level*
 Set the *space between columns* used by the *multicol* environment within the environments *enumext* and *keyans*. Internally sets the value of \columnsep, by default its value is equal to the sum of the values set in the keys *labelwidth* and *labelsep* of the current level. In the *enumext** and *keyans** environments they correspond to the *space between columns* (without joining) and internally adjust the value of \itemwidth.

5.6 Keys for minipage

`mini-env = {⟨rigid length⟩}`

default: *not used*

Sets the *width* of the `minipage` environment on the “right side”. This value added to the value set by the `mini-sep` key to determines the *width* of the `minipage` environment on the “left side”, taking `\linewidth` as the maximum reference value.

`mini-sep = {⟨rigid length⟩}`

default: `0.3333em`

Sets the *space between* the `minipage` environment on the “left side” and the `minipage` environment on the “right side”. This separation is applied together with `\hfill`.

5.6.1 The command `\miniright`

```
\miniright \begin{enumext}[mini-env={⟨rigid length⟩}] ⟨item's before⟩ \item \miniright ⟨content⟩ \end{enumext}
\begin{enumext}[mini-env={⟨rigid length⟩}] ⟨item's before⟩ \item \miniright*⟨content⟩ \end{enumext}
```

The `\miniright` command close the `minipage` environment on the “left side” and opens the `minipage` environment on the “right side” by starting it with the `\centering` command. It must be placed “after” the last `\item` of the current environment and “before” starting the material to be placed on the “right side”.

The *starred argument* “*” inhibits the use of `\centering` command i.e. the usual L^AT_EX justification is maintained in the `minipage` on the “right side”.

5.6.2 The key `mini-right`

In the *horizontal list environments* `enumext*` and `keyans*` it is not possible to use the `\miniright` command and the `mini-right` key must be used instead.

`mini-right = {⟨content⟩}`

default: *not used*

Set the *content* for the drawing or tabular to be placed in the `minipage` environment on the “right side” by starting it with `\centering`. The `{⟨content⟩}` must be passed between braces.

`mini-right* = {⟨content⟩}`

default: *not used*

Same as above, but *without* starting with `\centering`.

6 The storage system

The entire mechanism for “*storing content*” it is activated according to `save-ans` key on the “*first level*” of `enumext` or `enumext*` environments and it is ignored if they are established when they are nested inside each other. Only when this `⟨key⟩` is “*active*” the `\anskey` command and the environments `anskey*`, `keyans`, `keyans*` and `keyanspic` are available.

<pre>\begin{enumext}[save-ans={⟨store name⟩}] \item Text \anskey{answer} \item Text \begin{keyans} ... \end{keyans} \end{enumext}</pre>	<pre>\begin{enumext}[save-ans={⟨store name⟩}] \item Text \anskey{answer} \item Text \begin{keyanspic} ... \end{keyanspic} \end{enumext}</pre>
---	---

By executing the key `save-ans={⟨store name⟩}` the entire “*structure*” of the environment (excluding the *first level*) including the *optional argument* passed to the inner levels or the environment nested in it, along with the `⟨content⟩` passed to `\anskey` or `anskey*`, the current `⟨labels⟩` for `\item*` and `\anspic*` in the environments `keyans`, `keyans*` and `keyanspic` will be “*stored*” in a *sequence* `{⟨store name⟩}` and at the same time will be “*stored*” (without the “*structure*” or *optional argument*) in a *prop list* `{⟨store name⟩}`.

For security reasons the *optional argument* of the inner levels or the nested environment are *filtered* by excluding all `⟨keys⟩` related to the “*storage system*” (§6.1) along with the keys `mini-env`, `mini-sep`, `mini-right`, `mini-right*`, `series`, `resume` and `resume*` when storing in *sequence* `{⟨store name⟩}` set by `save-ans` key.

6.1 Keys for storage system

The only `⟨keys⟩` available for all levels of the `enumext` environment and the `enumext*` environment are `no-store` and `save-key`, the rest of the `⟨keys⟩` described in this section must be passed directly in the *optional argument* of the “*first level*” of the environment in which the key `save-ans` is executed. The key `save-ans` should NOT be passed with the command `\setenumext`.

`save-ans = {⟨store name⟩}`

default: *not set*

Sets the *name* of the *sequence* and *prop list* in which the `{⟨contents⟩}` will be “*stored*” by `\anskey` and `anskey*` in `enumext` and `enumext*` environments and the current `⟨labels⟩` for `\item*` and `\anspic*` in the environments `keyans`, `keyans*` and `keyanspic`. If the *sequence* or *prop list* `{⟨store name⟩}` does not exist, it will be created globally and will not be *overwritten* if the key is used again.

`save-key = {⟨key list⟩}`

default: *not set*

This key *overrides* the default “*stored keys*” of the *optional argument* of the inner levels or nested environment that will be passed to the *sequence*. The `⟨key list⟩` passed to this key ignores any `⟨keys⟩` in the “*stored structure*” and must be passed between braces. For example, if we execute at a second level:

```

\begin{enumext}[save-ans={\store name}]
  \item Text \anskey{answer}
  \item Text
  \begin{enumext}[nosep, columns=2, save-key={columns=3}]
    ...
  \end{enumext}
\end{enumext}

```

The “stored keys” by default in the *sequence* $\{\langle store name \rangle\}$ would be `nosep`, `columns=2`, but using the key `save-key={columns=3}` will overwrite and the “stored key” in the *sequence* $\{\langle store name \rangle\}$ are only `columns=3` ignoring all the others.

`save-sep = {\langle text symbol \rangle}` default: {,}

Sets the *text symbol* that will separate the current $\langle label \rangle$ to the *optional argument* passed to the `\item*` and `\anspic*` in the environments `keyans`, `keyans*` and `keyanspic` and storing them in the *sequence* and *prop list* $\{\langle store name \rangle\}$ set by `save-ans` key. The $\{\langle text symbol \rangle\}$ must always be passed between braces, whitespace ‘`␣`’ is preserved within the braces and only affects the “stored content” and not what is displayed when using the `show-ans` or `show-pos` keys.

`no-store` $\langle value forbidden \rangle$ default: not used

This is a “switch-key” that does not receive an argument and disables the “storing content” in the *sequence* and *prop list* $\{\langle store name \rangle\}$ set by `save-ans` key at the entire level or a nested environment in which it runs. This key is intended for use in internal levels or nested `enumext` or `enumext*` environments in which you want to use `enumext` or `enumext*` but “without” using the `\anskey` command or use `anskey*` environment and “without” interfering with the `check-ans` key.

6.1.1 Keys for label and ref

`save-ref = {\langle true | false \rangle}` default: false

Activates the “internal label and ref” mechanism for referencing “stored content” in *prop list* $\{\langle store name \rangle\}$ set by `save-ans` key. To reference the location of the “stored content” within the environment you must use `\ref{\langle store name : position \rangle}`, where $\langle position \rangle$ corresponds to the position occupied by the “stored content” in the *prop list* $\{\langle store name \rangle\}$ returned by the `show-pos` key. For example `\ref{test:4}` will return `3`. (b) which corresponds to the location of the “stored content” at position `4` in *prop list* `test` within the environment in which the key `save-ans=test` was set.

`mark-ref = {\langle symbol \rangle}` default: \textreferencemark

Sets the *symbol* that will be displayed by the `\printkeyans` command only if the `hyperref` package is detected and the `save-ref` key are active. This “symbol” is used as a “link” between the environment in which the `save-ans` key was used and the place where the command is executed.

6.1.2 Keys for wrap and marks

The `enumext` package provides a set of $\langle keys \rangle$ to set and manipulate “symbol marks” associated with “answers” and how they are displayed and stored in the *sequence* and *prop list*.

The $\langle keys \rangle$ available for the `\anskey` command and the `anskey*` environment can be passed “only” in the *optional argument* in the “first level” of the `enumext` or `enumext*` environment.

The $\langle keys \rangle$ available for the `keyans` and `keyans*` environments can be passed locally in the *optional argument*, at the “first level” of the `enumext` or `enumext*` environment or via the `\setenumext` command with one minor difference, when $\langle keys \rangle$ are passed through the “first level” of the `enumext` or `enumext*` environment they are set in “both” environments, but when they are passed using the `\setenumext` command they are set “individually” in each environment.

`show-ans = {\langle true | false \rangle}` default: false

Display the *symbol* set by the `mark-ans` key to the left of the *mandatory argument* $\langle content \rangle$ passed to the `\anskey` command and $\langle body \rangle$ for the `anskey*` environment using the `wrap-ans` key if set.

For `\item*` and `\anspic*` the `keyans`, `keyans*` and `keyanspic` environments it will display the *symbol* set by the `mark-ans*` key to the left of the current $\langle label \rangle$ and *optional argument*. If the *optional argument* is present in `\item*` or `\anspic*` it will be shown using `wrap-opt` key.

Keys for \anskey and anskey*

`mark-ans = {\langle symbol \rangle}` default: \textasteriskcentered

Sets the *symbol* to be displayed in the left margin for `\anskey` command and `anskey*` environment when using the key `show-ans`. The “symbol” is placed in a box of width equal to the value of `labelwidth` at the current level, separated by the value of the key `mark-sep` and aligned by the value of the key `mark-pos`. This key is not affected by the keys `font` or `wrap-label` so if you want to apply *styling* you have to do it directly, for example: `mark-ans={\textcolor{red}{\textbf{\textasteriskcentered}}}`

`mark-pos = {\langle left | right | center \rangle}` default: left

Sets the *aligned* of the “symbol” defined by `mark-ans` key for `\anskey` command and `anskey*` environment. The “symbol” is aligned in a box with the same dimensions of the label box defined by `labelwidth` key on the current level and separated by the value of the `mark-sep` key.

`mark-sep = {⟨rigid length⟩}` default: `labelsep`
 Sets the *horizontal space* between the box containing the “symbol” defined by `mark-ans` key and the *mandatory argument* ⟨*content*⟩ passed to the `\anskey` command and the *body* in `anskey*` environment.

`wrap-ans = {⟨code {#1} more code⟩}` default: `\fbox+\parbox{#1}`
 Wraps the *mandatory argument* ⟨*content*⟩ passed to the `\anskey` and the ⟨*body*⟩ in `anskey*` environment referenced by {#1} when using the `show-ans` or `show-pos` keys. The {⟨*code*⟩} must be passed between braces and only affects how the *argument* or *body* is displayed and NOT the “stored content” in the *sequence* and *prop list* {⟨*store name*⟩} set by `save-ans` key. If this key is passed using `\setenumext` it is necessary to use double ‘{#1}’.

Keys for `keyans`, `keyans*` and `keyanspic`

`mark-ans* = {⟨symbol⟩}` default: `\textasteriskcentered`
 Sets the *symbol* to be displayed in the left margin for `\item*` and `\anspic*` for the `keyans`, `keyans*` and `keyanspic` environments when using the key `show-ans`. The “symbol” is placed in a box of width equal to the value of `labelwidth` of the environment in which it is executed, separated by the value of the key `mark-sep*` and aligned by the value of the key `mark-pos*`. This key is not affected by the keys `font` or `wrap-label` so if you want to apply *styling* you have to do it directly, for example:
`mark-ans*={\textcolor{red}{\textbf{\textasteriskcentered}}}`.

`mark-pos* = {⟨left | right | center⟩}` default: `left`
 Sets the *aligned* of the “symbol” defined by `mark-ans*` key for the `keyans`, `keyans*` and `keyanspic` environments. The “symbol” is aligned in a box with the same dimensions of the label box defined by `labelwidth` key of the environment in which it is executed and separated by the value of the `mark-sep*` key.

`mark-sep* = {⟨rigid length⟩}` default: `labelsep`
 Sets the *horizontal space* between the box containing the “symbol” defined by `mark-ans*` key and the current ⟨*label*⟩ for `\item*` and `\anspic*` in the `keyans`, `keyans*` and `keyanspic` environments.

`wrap-ans* = {⟨code {#1} more code⟩}` default: `not used`
 Wraps the *current* ⟨*label*⟩ when using the `show-ans` key for `\item*` and `\anspic*` referenced by {#1} in the `keyans`, `keyans*` and `keyanspic` environments after executing the `align` and `font` keys. The {⟨*code*⟩} must be passed between braces and *only* affects how the ⟨*label*⟩ is displayed and NOT the “stored label” in the *sequence* and *prop list* {⟨*store name*⟩} set by `save-ans` key. This key overwrites the key `wrap-label` and if is passed using `\setenumext` it is necessary to use double ‘{#1}’. For example, if you want the ⟨*label*⟩ to be displayed in red when using `show-ans` you just set `wrap-ans*={\textcolor{red}{#1}}`.

`wrap-opt = {⟨code {#1} more code⟩}` default: `[{#1}]`
 Wraps the *optional argument* passed to the `\item*` and `\anspic*` referenced by {#1} in the `keyans`, `keyans*` and `keyanspic` environments when using the `show-ans` or `show-pos` keys. The {⟨*code*⟩} must be passed between braces and only affects the current *optional argument* and NOT the “stored content” in the *sequence* and *prop list* {⟨*store name*⟩} set by `save-ans` key. If this key is passed using `\setenumext` it is necessary to use double ‘{#1}’.

6.1.3 Keys for debug and checking

`show-pos = {⟨true | false⟩}` default: `false`
 Displays the *position* occupied by the “stored content” by `\anskey`, `anskey*`, `\item*` and `\anspic*` in the *prop list* {⟨*store name*⟩} set by `save-ans` key. This position is used by the `\getkeyans` command and by the `\ref` command if the `save-ref` key is active.

`check-ans = {⟨true | false⟩}` default: `false`
 Enables the *checking answer* mechanism displaying an appropriate message on the terminal. This key works under the logic that each `\item` or `\item*` that does not open an inner level or nested environment contains “only one answer” or “only one execution” of the `\anskey` or `anskey*`. It is intended to be used in conjunction with the `no-store` key.

6.2 The command `\anskey`

`\anskey` `\anskey[⟨keys⟩]{⟨content⟩}`

The command `\anskey` takes a mandatory non empty argument {⟨*content*⟩} and “stores” it in the *sequence* and *prop list* {⟨*store name*⟩} set by `save-ans` key. By design the command cannot be nested or passed *verbatim material* in the argument and it is assumed that each *numbered* `\item` or `\item*` within the environment in which it is active it has a “single execution” of `\anskey` unless `\item` or `\item*` open a nested level or use the `no-store` key.

If `save-ref` key are active and the `hyperref`[8] package is detected, `\hyperlink` and `\hypertarget` will be used, otherwise the usual “label and ref” system provided by L^AT_EX will be used.

The `\anskey` command is available for all levels of the `enumext` environment and the `enumext*` environment, but is disabled for the `keyans`, `keyans*` and `keyanspic` environments.

6.2.1 Keys for \anskey

By default the *mandatory argument* $\langle content \rangle$ passed to `\anskey` when “storing” in the *sequence* $\{\langle store name \rangle\}$ has the form `\item $\langle content \rangle$` , the following $\langle keys \rangle$ allow modifying the way in which it is “stored” in the *sequence*.

`break-col` $\langle value forbidden \rangle$ default: *not used*

Stores $\{\langle content \rangle\}$ in the *sequence* $\{\langle store name \rangle\}$ of the form `\columnbreak \item $\langle content \rangle$` .

`item-join` = $\{\langle columns \rangle\}$ default: *not set*

Set the *number of columns* to be used for `\item($\langle columns \rangle$)` and stores $\{\langle content \rangle\}$ in the *sequence* $\{\langle store name \rangle\}$ of the form `\item($\langle columns \rangle$) $\langle content \rangle$` .

`item-star` $\langle value forbidden \rangle$ default: *not used*

Stores $\{\langle content \rangle\}$ in the *sequence* $\{\langle store name \rangle\}$ of the form `\item* $\langle content \rangle$` .

`item-sym*` = $\{\langle symbol \rangle\}$ default: *not set*

Sets the *symbol* for `\item*` when using the key `item-star` and stores $\{\langle content \rangle\}$ in the *sequence* $\{\langle store name \rangle\}$ of the form `\item*[$\langle symbol \rangle$] $\langle content \rangle$` . The *symbol* can be in text or math mode, for example `item-sym*={ $\$ \ast \$$ }` stores `\item*[$\$ \ast \$$] $\langle content \rangle$` .

`item-pos*` = $\{\langle rigid length \rangle\}$ default: *not set*

Sets the *offset* for `\item*` when using the keys `item-star` and `item-sym*` and stores $\{\langle content \rangle\}$ in the *sequence* $\{\langle store name \rangle\}$ of the form `\item*[$\langle symbol \rangle$][$\langle offset \rangle$] $\langle content \rangle$` .

Example

```
\begin{enumext}[save-ans=test,show-ans=true]
  \item* Text containing our instructions or questions. \anskey{\first answer}
  \item Text containing our instructions or questions.
    \begin{enumext}
      \item Question.\anskey{\second answer}
    \end{enumext}
  \item Text containing our instructions or questions. \anskey{\third answer}
  \item Text containing our instructions or questions. \anskey{\fourth answer}
\end{enumext}
```

* 1. Text containing our instructions or questions.

*

2. Text containing our instructions or questions.

(a) Question.

*

3. Text containing our instructions or questions.

*

4. Text containing our instructions or questions.

*

6.3 The environment anskey*

`anskey*` `\begin{anskey*}[\langle key = val \rangle] \langle body content \rangle \end{anskey*}`

The environment `anskey*` takes a mandatory $\{\langle body content \rangle\}$ and “stores it” in the *sequence* and *prop list* $\{\langle store name \rangle\}$ set by `save-ans` key. If `save-ref` key are active and the `hyperref`[8] package is detected `\hyperlink` and `\hypertarget` will be used, otherwise the usual “label and ref” system provided by \LaTeX will be used.

By design the environment cannot be nested but full supports “verbatim material” in the $\langle body \rangle$ and it is assumed that “each numbered” `\item` or `\item*` within the environment in which it is active it has a “single execution” unless `\item` or `\item*` open a nested level or use the `no-store` key.

The `anskey*` environment is implemented using the new “collect code” c-type argument part of \LaTeX release 2025-06-01[13]. `\begin{anskey*}` and `\end{anskey*}` must be in different lines and should not appear within verbatim environments or commands. All $\langle keys \rangle$ must be passed separated by commas and “without separation” of the start of the environment.

Comments “%” or “any character” after `\begin{anskey*}` or `[\langle key = val \rangle]` on the same line are NOT supported, \LaTeX will return an “error” message if this happens. In a similar way comments “%” or “any character” after `\end{anskey*}` on the same line \LaTeX will return a “warning” message.

6.3.1 Keys for anskey*

The `anskey*` environment uses the same $\langle keys \rangle$ as the `\anskey` command next to the $\langle keys \rangle$ `write-env`, `overwrite` and `force-eol`. The environment is available for all levels of the `enumext` environment and the `enumext*` environment, but it is disabled for the `keyans`, `keyans*` and `keyanspic` environments.

`write-env` = $\{\langle file.ext \rangle\}$ default: *not used*

Sets the name of the $\langle external file \rangle$ in which the $\langle contents \rangle$ of the environment will be written. The $\langle file.ext \rangle$ will be created in the working directory, relative or absolute paths are not supported. If $\langle file.ext \rangle$ does not exist, it will be created or overwritten if the `overwrite` key is used.

`overwrite` = $\{\langle true | false \rangle\}$ default: *false*

Sets whether the $\langle file.ext \rangle$ generated by `write-env` from the `anskey*` environment will be rewritten.

force-eol = { $\langle true \mid false \rangle$ }

default: *false*

Sets if the *end of line* for the $\langle stored\ content \rangle$ is hidden or not. This key is necessary only if the last line is the closing of some environment defined by the `fancyvrb` package as `\end{Verbatim}` or another environment that does not support a comments “%” after closing `\end{Verbatim}`%.

Example

```
\begin{enumext}[save-ans=test,show-pos=true,start=5]
  \item* Text containing our instructions or questions.

  \begin{anskey*}[item-star]
    \first answer
  \end{anskey*}

  \item Text containing our instructions or questions.

  \begin{enumext}
    \item Question.
    \begin{anskey*}
      \second answer
    \end{anskey*}
  \end{enumext}

  \item Text containing our instructions or questions.

  \begin{anskey*}
    \third answer
  \end{anskey*}

  \item Text containing our instructions or questions.

  \begin{anskey*}
    \fourth answer
  \end{anskey*}
\end{enumext}
```

★ 5. Text containing our instructions or questions.

[5] First answer with verbatim

6. Text containing our instructions or questions.

(a) Question.

[6] second answer

7. Text containing our instructions or questions.

[7] third answer

8. Text containing our instructions or questions.

[8] fourth answer

6.4 The environments `keyans` and `keyans*`

`keyans` `\begin{keyans}[\langle key = val \rangle] \item \item[\langle custom \rangle] \item* \item*[\langle content \rangle] \end{keyans}`

`keyans*` `\begin{keyans*}[\langle key = val \rangle] \item \item[\langle custom \rangle] \item* \item*[\langle content \rangle] \end{keyans*}`

The `keyans` and `keyans*` environments are “*enumerated list*” environments designed for “*multiple choice*” questions activated by the `save-ans` key. This environments can NOT be nested and must always be at the “*first level*” of the `enumext` environment, the commands `\item` and `\item[\langle custom \rangle]` work in the usual and the command `\item(\langle columns \rangle)` is available for the `keyans*` environment.

- The behavior of `\item*` in `keyans` and `keyans*` environments is NOT the same as in the `enumext` or `enumext*` environments.

```
\begin{enumext}[save-ans=test]
  \item \item content
  \begin{keyans}[\langle key = val \rangle]
    \item \item content
    \item [\langle custom \rangle] \item content
    \item* \item content
    \item*[\langle content \rangle] \item content
  \end{keyans}
\end{enumext}
```

```
\begin{enumext}[save-ans=test]
  \item \item content
  \begin{keyans*}[\langle key = val \rangle]
    \item \item content
    \item [\langle custom \rangle] \item content
    \item* \item content
    \item*[\langle content \rangle] \item content
  \end{keyans*}
\end{enumext}
```

The $\langle keys \rangle$ set in the *optional argument* of the environment are the same (almost) as those of the `enumext` and `enumext*` environments and have *higher precedence* than those set by `\setenumext[\langle keyans \rangle]{\langle key = val \rangle}` or `\setenumext[\langle keyans* \rangle]{\langle key = val \rangle}`. If the *optional argument* is not passed or the $\langle keys \rangle$ are not set by `\setenumext`, the default values will be the same as the “*second level*” of the `enumext` environment with the difference in the $\langle label \rangle$ which will be set to `label=\Alph*`.

The keys `mark-ans*`, `mark-pos*`, `mark-sep*`, `save-sep`, `wrap-opt`, `wrap-ans*`, `show-ans` and `show-pos` are available for both environments.

6.4.1 The \item* in keyans and keyans*

`\item*` `\item*`
`\item*[\langle content \rangle]`

The `\item*` and `\item*[\langle content \rangle]` command “store” the current `\label` set by `label` key next to the *optional argument* `\langle content \rangle` in *sequence* and *prop list* `\{ \langle store name \rangle \}` set by `save-ans` key in the “first level” of the `enumext` or `enumext*` environments.

The *starred argument* ‘*’ cannot be separated by spaces ‘ ’ from the command, i.e. `\item*` and the *optional argument* does “NOT” support *verbatim content*. By design it is assumed that the `\item*` will only appear “once” within the environment.


Example

```
\begin{enumext}[save-ans=test,columns=2,show-ans=true]
  \item Text containing a question.

  \begin{keyans*}[nosep,columns=2]
    \item Choice
    \item* Correct choice
    \item Choice
    \item Choice
    \item Choice
  \end{keyans*}

  \item Text containing a question and image.

  \begin{keyans}[nosep,mini-env={0.4\linewidth}]
    \item Choice
    \item Choice
    \item Choice
    \item Choice
    \item*[\note] Correct choice
    \miniright
    \includegraphics[scale=0.25]{example-image-a}
    Some text
  \end{keyans}
\end{enumext}
```

1. Text containing a question.
A) Choice * B) Correct choice
C) Choice D) Choice
E) Choice
2. Text containing a question and image.
A) Choice
B) Choice
C) Choice
D) Choice
* E) [note] Correct choice
- 
Some text

6.5 The environment keyanspic

`keyanspic` `\begin{keyanspic}[\langle key = val \rangle] \anspic*[\langle content \rangle]{\langle drawing or tabular \rangle} \end{keyanspic}`

The `keyanspic` environment is an “enumerated list” environment activated by the `save-ans` key that has the same configuration for “spacing” and `\label` as the `keyans` environment that uses the `\anspic` command instead of `\item`. It is intended for placing *drawings or tabular* with `\label` centered *above* or *below* in a *single line* or *upper and lower* layout style.

When the `keyanspic` environment is used *without keys* the `\label`s are centered *below* the *drawings or tabular* in a *single line* layout style.

A representation of the output can be seen in the figure 6.

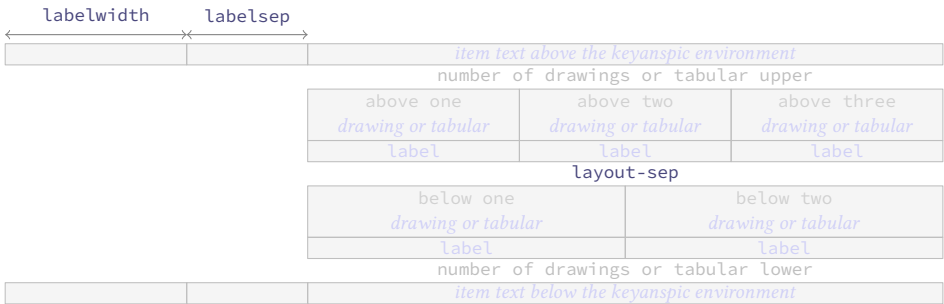


Figure 6: Representation of the `keyanspic` environment with `layout-sty={\langle 3, 2 \rangle}` in `enumext`.

This environment cannot be nested and must *always* be at the “first level” of the `enumext` environment, the `\item` command is disabled and `\keys` cannot be set using `\setenumext`.

6.5.1 Keys for keyanspic

`label-pos = {⟨above | below⟩}` default: *below*

Set the *position* of ⟨*label*⟩ to be centered “above” or “below” *drawings* or *tabular* when the `\anspic` command is executed.

`label-sep = {⟨rubber length | rigid length⟩}` default: *internal adjustment*

Set the *vertical spacing* between the ⟨*label*⟩ centered “above” or “below” and *drawings* or *tabular* when running the `\anspic` command.

`layout-sty = {⟨n° upper , n° lower⟩}` default: *not set*

Set the *number of drawings* or *tabular* that will be distributed “upper” and “lower” within the environment when executing the `\anspic` command. The value must be passed in braces and if not set or the ⟨*n° lower*⟩ is omitted the *drawings* or *tabular* will be put on a *single line*.

`layout-sep = {⟨rubber length | rigid length⟩}` default: *adjusted parsep from keyans*

Set the *vertical separation* between the number of *drawings* or *tabular* placed at the “upper” and “lower” within the environment when executing the `\anspic` command. Internally adjusts the `parsep` value taken from the `keyans` environment.

`layout-top = {⟨rubber length | rigid length⟩}` default: *adjusted topsep from keyans*

Set the *vertical space* added to both the top and bottom of the environment. Internally adjust the value of `topsep` taken from `keyans` environment.

The keys `mark-ans*`, `mark-pos*`, `mark-sep*`, `save-sep`, `wrap-opt`, `wrap-ans*`, `show-ans` and `show-pos` are available for this environment.

6.5.2 The command `\anspic`

`\anspic` `\anspic{⟨drawing or tabular⟩}`
`\anspic*` `\anspic*[⟨content⟩]{⟨drawing or tabular⟩}`

The `\anspic` command take three arguments, the *starred argument* ‘`*`’ store the current ⟨*label*⟩ next to the *optional argument* ⟨*content*⟩ in *sequence* and *prop list* {⟨*store name*⟩} set by `save-ans` key.

The *starred argument* ‘`*`’ cannot be separated by spaces ‘`␣`’ from the command, i.e. `\anspic*` and the *optional argument* does “NOT” support *verbatim content*. By design it is assumed that the *starred argument* ‘`*`’ will only appear “once” within the environment.

Example

```
\begin{enumext}[save-ans=test,show-ans=true,nosep]
  \item Question with images and labels below.

  \begin{keyanspic}[layout-sty={3,2}]
    \anspic{\includegraphics[scale=0.15]{example-image-a}}
    \anspic{\includegraphics[scale=0.15]{example-image-b}}
    \anspic{\includegraphics[scale=0.15]{example-image-a}}
    \anspic{\includegraphics[scale=0.15]{example-image-a}}
    \anspic*[note]{\includegraphics[scale=0.15]{example-image-a}}
  \end{keyanspic}

  \item Question with images and labels above.

  \begin{keyanspic}[label-pos=above, layout-sty={3,2},layout-sep=0.25cm]
    \anspic{\includegraphics[scale=0.15]{example-image-a}}
    \anspic{\includegraphics[scale=0.15]{example-image-b}}
    \anspic{\includegraphics[scale=0.15]{example-image-a}}
    \anspic{\includegraphics[scale=0.15]{example-image-a}}
    \anspic*[note]{\includegraphics[scale=0.15]{example-image-a}}
  \end{keyanspic}

  \item Question with images and labels below on a single line.

  \begin{keyanspic}
    \anspic{\includegraphics[scale=0.15]{example-image-a}}
    \anspic{\includegraphics[scale=0.15]{example-image-b}}
    \anspic{\includegraphics[scale=0.15]{example-image-a}}
    \anspic{\includegraphics[scale=0.15]{example-image-a}}
    \anspic*[note]{\includegraphics[scale=0.15]{example-image-a}}
  \end{keyanspic}

\end{enumext}
```

1. Question with images and labels below.



A)



B)



C)




D)




* E) [note]


2. Question with images and labels above.




A)



B)



C)



D)



* E) [note]

3. Question with images and labels below on a single line.



A)



B)



C)



D)



* E) [note]

◆ Remember to pass the `alt={⟨description⟩}` key to the `\includegraphics` command when creating a *tagged* PDF.

6.6 Printing stored content

6.6.1 The command `\getkeyans`

```
\getkeyans <⟨store name : position⟩>
```

The command `\getkeyans` prints the “*stored content*” in *prop list* `{⟨store name⟩}` defined by `save-ans` key in the `⟨position⟩` returned by the `show-pos` key.

The “*stored content*” can only be accessed *after* it is stored, if `{⟨store name⟩}` does not exist the command will return an error.

The form taken by the argument `{⟨store name : position⟩}` is the same as that used to generate the “*internal label and ref*” system when `save-ref` key are active, so to refer to a “*stored content*”. For example `\getkeyans{test:4}` will return the “*stored content*” at position `4` of the environment in which the key `save-ans=test` was set.

6.6.2 The command `\foreachkeyans`

```
\foreachkeyans [⟨key = val⟩]{⟨store name⟩}
```

The command `\foreachkeyans` goes through and executes the command `\getkeyans` on the contents in *prop list* `{⟨store name⟩}`. If you pass without options run `\getkeyans` on all contents in *prop list* `{⟨store name⟩}`.

Options for command

`sep = {⟨code⟩}` default: {;}

Establishes the *separation* between “*each*” `{⟨content⟩}` stored in *prop list* `{⟨store name⟩}`. For example, you can use `sep={\\[10pt]}` for vertical separation of stored contents.

`step = {⟨integer⟩}` default: 1

Sets the *step* (increment) applied to the value set by key `start` for “*each*” `{⟨content⟩}` stored in *prop list* `{⟨store name⟩}`. The value must be a *positive integer*.

`start = {⟨integer⟩}` default: 1

Sets the *position* of the *prop list* `{⟨store name⟩}` from which execution will start. The value must be a *positive integer*.

`stop = {⟨integer⟩}` default: 0

Sets the *position* of the *prop list* `{⟨store name⟩}` from which execution will finish. The value must be a *positive integer*.

`before = {⟨code⟩}` default: *empty*
 Sets the {⟨code⟩} that will be executed ⟨before⟩ each {⟨content⟩} stored in *prop list* {⟨store name⟩}. The {⟨code⟩} must be passed between braces.

`after = {⟨code⟩}` default: *empty*
 Sets the {⟨code⟩} that will be executed ⟨after⟩ each {⟨content⟩} stored in *prop list* {⟨store name⟩}. The {⟨code⟩} must be passed between braces.

`wrapper = {⟨code #1⟩ more code}` default: *empty*
 Wraps the {⟨content⟩} stored in *prop list* {⟨store name⟩} referenced by {#1}. The {⟨code⟩} must be passed between braces. For example `\foreachkeyans[wrapper={\makebox[1em][l]{#1}}]{⟨store name⟩}`.

6.6.3 The command `\printkeyans`

```
\printkeyans {⟨store name⟩}
\printkeyans [⟨keys⟩]{⟨store name⟩}
\printkeyans * [⟨keys⟩]{⟨store name⟩}
```

The command `\printkeyans` prints “all stored content” in *sequence* {⟨store name⟩} defined by `save-ans` key placing this inside the `enumext` or `enumext*` environment if the *starred argument* ‘*’ is used.

The “stored content” can only be accessed *after* it is stored in the *sequence*, if {⟨store name⟩} does not exist the command will return an error.

The *optional argument* allows managing the ⟨keys⟩ in the “first level” of the environment in which the “stored content” of the *sequence* {⟨store name⟩} will be printed, if the *starred argument* ‘*’ is used it will be `enumext*` otherwise `enumext`.

The default values for the “first level” are the same as the default values for the `enumext` and `enumext*` environments along with the keys `nosep`, `first=\small`, `font=\small` and `columns=2`. For the inner levels of the environment `enumext` saved in the *sequence* {⟨store name⟩} the default values are the same as those established for the second, third and fourth levels plus the keys `nosep`, `first=\small`, `font=\small`. If the environment `enumext*` is saved within the *sequence* {⟨store name⟩} it will have the same default values plus the keys `nosep`, `first=\small`, `font=\small`.

Since the command encapsulates by default the `enumext` environment or the `enumext*` environment, we must take some considerations:

- If we execute `\printkeyans*{⟨store name⟩}` and the *sequence* {⟨store name⟩} already contains any `enumext*` environment an error will be returned as we cannot nest.
- If we execute `\printkeyans*{⟨store name⟩}` and the *sequence* {⟨store name⟩} contains any `enumext` environments, they will start with the ⟨keys⟩ set for the first level unless they are set in the *optional argument* or `save-key` is used to modify it.
- If we execute `\printkeyans{⟨store name⟩}` and the *sequence* {⟨store name⟩} contains any environment `enumext*`, they will start with the ⟨keys⟩ set by default unless they are set in the *optional argument* or `save-key` is used to modify it.

The default values for the “first level” of `\printkeyans` commands and `\printkeyans*` are established using `\setenumext[⟨print , 1⟩]{⟨keys⟩}` and `\setenumext[⟨print*⟩]{⟨keys⟩}`.

If we need to set the ⟨keys⟩ for the environment `enumext` “saved” in the *sequence* {⟨store name⟩} we will use `\setenumext[⟨print , level⟩]{⟨keys⟩}` and if we need to set the ⟨keys⟩ for the environment `enumext*` “saved” in the *sequence* {⟨store name⟩} we will use `\setenumext[⟨print , *⟩]{⟨keys⟩}`.

Example

```
\begin{enumext}[save-ans=sample,columns=1,show-pos=true,nosep,save-ref=true]
  \item Factor $3x+3y+3z$. \anskey{$3(x+y+z)$}
  \item True False

  \begin{enumext}[nosep]
    \item \LaTeX2e\ is cool? \anskey{Very True!}
  \end{enumext}

  \item Related to Linux

  \begin{enumext}[nosep]
    \item You use linux? \anskey{Yes}
    \item Rate the following package and class
      \begin{enumext}[nosep]
        \item \texttt{xsim} \anskey{very good}
        \item \texttt{exsheets} \anskey{obsolete}
      \end{enumext}
    \end{enumext}
\end{enumext}
```

```
The answer to \ref{sample:4} is \getkeyans{sample:4} and the answers to
all the worksheets are as follows:

\printkeyans{sample}
```

1. Factor $3x + 3y + 3z$.
- [1]
2. True False
- (a) ~~TeX~~ze is cool?
- [2]
3. Related to Linux
- (a) You use linux?
- [3]
- (b) Rate the following package and class
- i. `xsim`
- [4]
- ii. `exsheets`
- [5]

The answer to 3.(b).i is very good and the answers to all the worksheets are as follows:

1. $3(x + y + z)$ ✖
2. (a) Very True! ✖
3. (a) Yes ✖
- (b) i. very good ✖
- ii. obsolete ✖


7 Full examples

Here I will leave as an example some adaptations questions taken from TeX-SX. The examples are attached to this documentation and can be extracted from your PDF viewer or from the command line by running:

```
$ pdfdetach -saveall enumext.pdf
```

and then you can use the excellent arara¹ tool to compile them.


Example 1

Adapted from the response given by Enrico Gregorio in Squares for answer choice options and perfect alignment to mathematical answers .

1. La velocità di $1,00 \times 10^2$ m/s espressa in km/h è:
- ☐ A 36 km/h.
- ☐ B 360 km/h.
- ☐ C 27,8 km/h.
- ☐ D $3,60 \times 10^8$ km/h.
3. La velocità di $1,00 \times 10^2$ m/s espressa in km/h è:
- ☐ A 36 km/h.
- ☐ B 360 km/h.
- ☐ C 27,8 km/h.
- ☐ D $3,60 \times 10^8$ km/h.
2. In fisica nucleare si usa l’angstrom (simbolo: $1 \text{ \AA} = 1 \times 10^{-10}$ m) e il fermi o femtometro ($1 \text{ fm} = 1 \times 10^{-15}$ m). Qual è la relazione tra queste due unità di misura?
- ☐ A $1 \text{ \AA} = 1 \times 10^5 \text{ fm}$.
- ☐ B $1 \text{ \AA} = 1 \times 10^{-5} \text{ fm}$.
- ☐ C $1 \text{ \AA} = 1 \times 10^{-15} \text{ fm}$.
- ☐ D $1 \text{ \AA} = 1 \times 10^3 \text{ fm}$.
4. In fisica nucleare si usa l’angstrom (simbolo: $1 \text{ \AA} = 1 \times 10^{-10}$ m) e il fermi o femtometro ($1 \text{ fm} = 1 \times 10^{-15}$ m). Qual è la relazione tra queste due unità di misura?
- ☐ A $1 \text{ \AA} = 1 \times 10^5 \text{ fm}$.
- ☐ B $1 \text{ \AA} = 1 \times 10^{-5} \text{ fm}$.
- ☐ C $1 \text{ \AA} = 1 \times 10^{-15} \text{ fm}$.
- ☐ D $1 \text{ \AA} = 1 \times 10^3 \text{ fm}$.

1. B
2. A
3. B
4. A

Example 2

Adapted from the response given by Florent Rougon in Multiple choice questions with proposed answers in random order — addition of automatic correction (cross mark) .

¹The cool TeX automation tool: <https://www.ctan.org/pkg/arara>

1. La velocità di $1,00 \times 10^2$ m/s espressa in km/h è:

A 36 km/h.

✓ B 360 km/h.

C 27,8 km/h.

D $3,60 \times 10^8$ km/h.
2. In fisica nucleare si usa l'angstrom (simbolo: $1 \text{ \AA} = 1 \times 10^{-10}$ m) e il fermi o femtometro ($1 \text{ fm} = 1 \times 10^{-15}$ m). Qual è la relazione tra queste due unità di misura?

✓ A $1 \text{ \AA} = 1 \times 10^5 \text{ fm}$.

B $1 \text{ \AA} = 1 \times 10^{-5} \text{ fm}$.

C $1 \text{ \AA} = 1 \times 10^{-15} \text{ fm}$.

D $1 \text{ \AA} = 1 \times 10^3 \text{ fm}$.
3. La velocità di $1,00 \times 10^2$ m/s espressa in km/h è:

A 36 km/h.

✓ B 360 km/h.

C 27,8 km/h.

D $3,60 \times 10^8$ km/h.
4. In fisica nucleare si usa l'angstrom (simbolo: $1 \text{ \AA} = 1 \times 10^{-10}$ m) e il fermi o femtometro ($1 \text{ fm} = 1 \times 10^{-15}$ m). Qual è la relazione tra queste due unità di misura?

✓ A $1 \text{ \AA} = 1 \times 10^5 \text{ fm}$.

B $1 \text{ \AA} = 1 \times 10^{-5} \text{ fm}$.

C $1 \text{ \AA} = 1 \times 10^{-15} \text{ fm}$.

D $1 \text{ \AA} = 1 \times 10^3 \text{ fm}$.
1. B

✖ 2. A

✖

3. B

✖ 4. A

✖
- Example 3
- A “simple multiple choice” test 📄.
1. First type of questions

A value

B correct

C value

D value

2. Second type of questions

I. $2\alpha + 2\delta = 90^\circ$

II. $\alpha = \delta$

III. $\angle EDF = 45^\circ$

A I only

B II only

C I and II only

D I and III only

E I, II, and III

3. Third type of questions

(1) $2\alpha + 2\delta = 90^\circ$

(2) $\angle EDF = 45^\circ$

A value

B value

C value

D value

E value

4. Question with image and label below:

A

A

B


B

A

C

A

D



E

5. Question with image on right side:

A value

B value

C value

D correct

E value

Test keys

1. B, $x = 5$

✖ 4. E, A duck

✖

2. D

✖ 5. D, other note


✖


3. C, some note

✖


Example 4

A “simple worksheet” using ducks :) 📄.

 Factor $x^2 - 2x + 1$


 Factor $3x + 3y + 3z$

The following questions need to be cuaqtified :)

 True False

(a) $\alpha > \delta$

(b) \LaTeX is cool?

 Related to Linux

(a) You use linux?

©2024–2025 by Pablo González L


21 / 161

- (b) Usually uses the package manager?
- (c) Rate the following package and class
 - i. xsim-exam
 - ii. xsim
 - iii. exsheets

The answer to 1 is $(x - 1)^2$ and the answer to 3.(a) is False.

- | | | | |
|-------------------|---|---------------------------------|---|
| 1. $(x - 1)^2$ | ⌘ | (b) Yes, dnf | ⌘ |
| 2. $3(x + y + z)$ | ⌘ | (c) i. doesn't exist for now :(| ⌘ |
| 3. (a) False | ⌘ | ii. very good | ⌘ |
| (b) Very True! | ⌘ | iii. obsolete | ⌘ |
| 4. (a) Yes | ⌘ | | |

Example 5

Adapted from the response given by Stephen in SAT like question format .

<div>1</div> <p>Which choice best describes what happens in the passage?</p> <ul style="list-style-type: none">A) One character argues with another character who intrudes on her home.B) One character receives a surprising request from another character.C) One character reminisces about choices she has made over the years.D) One character criticizes another character for pursuing an unexpected course of action.	<div>3</div> <p>Which choice best describes what happens in the passage?</p> <ul style="list-style-type: none">A) One character argues with another character who intrudes on her home.B) One character receives a surprising request from another character.C) One character reminisces about choices she has made over the years.D) One character criticizes another character for pursuing an unexpected course of action.
<div>2</div> <p>Which choice best describes what happens in the passage?</p> <ul style="list-style-type: none">A) One character argues with another character who intrudes on her home.B) One character receives a surprising request from another character.C) One character reminisces about choices she has made over the years.D) One character criticizes another character for pursuing an unexpected course of action.	<div>4</div> <p>Which choice best describes what happens in the passage?</p> <ul style="list-style-type: none">A) One character argues with another character who intrudes on her home.B) One character receives a surprising request from another character.C) One character reminisces about choices she has made over the years.D) One character criticizes another character for pursuing an unexpected course of action.

1. A) 2. C) 3. B) 4. D)

Example 6

Adapted from the response to Environment for enumerate environment .

- 8.5a, KSC 10. sample
- A sample
 - ✓ B answer
 - C sample
 - D sample
- 9.5a, KSC 11. sample
- A sample
 - B sample
 - C sample
 - ✓ D answer
12. sample
- A sample
 - B answer
 - C sample
 - D sample
13. sample
- A sample
 - B sample
 - C sample
 - D answer

10. B (8.5a, KSC)
11. D (9.5a, KSC)

12. B (10.5a, KSC)
13. D (11.5a, KSC)













8 Tagged PDF examples

This section is just to show the compatibility of `enumext` with *tagged* PDF using `lualatex`. The attached files here are just for testing and are intended as examples and, in a way, to simplify the time of Matthew Bertucci (@mbertucci) when he sees this excellent package and adds it to [The LaTeX Tagged PDF repository](#).

To compile the tests with `lualatex-dev` the packages `multicol`, `unicode-math`, `geometry`, `graphicx`, `luamml` and `hyperref` are required along with the line:

```
\DocumentMetadata
{
  lang = en-US, pdfversion = 2.0, pdfstandard = ua-2, tagging=on,
}
```

◆ All examples have been checked using `veraPDF` together with `ngpdf`.

- The file `enumext-01.tex` contains the basic tests for the `enumext` and `enumext*` environments and the nesting between them plus the use of the `label`, `labelwidth`, `labelsep`, `ref`, `align` and `wrap-label` keys. Source file  and *tagged* PDF .
- The file `enumext-02.tex` contains the tests for the `enumext` and `enumext*` environments and the support for `minipage` and `multicol` environments using the keys `columns`, `columns-sep`, `mini-env`, `mini-right` and `\miniright` command. Source file  and *tagged* PDF .
- The file `enumext-03.tex` contains the tests for the `enumext` and `keyanspic` environments activated by the `save-ans` key together with the `save-sep` and `save-ref` keys and the `\printkeyans` command. Source file  and *tagged* PDF .
- The file `enumext-04.tex` contains the tests for the `\anskey` command and the `anskey*` environment activated by the `save-ans` key along with the `\getkeyans` and `\printkeyans` commands. Source file  and *tagged* PDF .
- The file `enumext-05.tex` contains the tests for the environments `keyans`, `keyans*` and `keyanspic` activated by the key `save-ans` together with the keys `no-store` and `show-ans` and the commands `\setenumext`, `\setenumextmeta`, `\printkeyans` and `\foreachkeyans`. Source file  and *tagged* PDF .
- The file `enumext-06.tex` contains the tests for the environments `enumext` and `enumext*` for *fake itemize* and *description*. Source file  and *tagged* PDF .

9 The way of non-enumerated lists

It is possible to use (or abuse) the `enumext` and `enumext*` environments to mimic *non-enumerated* list environments such as `itemize` and `description`, clearly the `\keys` to “store answers”, the `keyans`, `keyans*` and `keyanspic` environments lose their sense and it is not the focus of `enumext` package, but, why not to do it?.

Here I leave as an example other uses of the `enumext` environment that can be helpful for specific purposes. The *trick* to generate these “fake environments” is set `label={}` or `label={\some}` and play with the `list-indent`, `list-offset`, `font` and `wrap-label` keys.

Fake itemize environment

Here we set the `label` key using the default settings in \TeX for the four levels `\textbullet`, `\textendash`, `\textasteriskcentered` and `\textperiodcentered` together with the `nosep` key to reduce the vertical spaces in the left side example and set the `label` key in *mathematical mode* for the right side as `\ast`, `\diamond`, `\circ` and `\star` for the four levels together with the `nosep` key

- | | |
|---------------------|---------------------|
| • First level item | * First level item |
| – Second level item | ◇ Second level item |
| • Third level item | ◦ Third level item |
| · Fourth level item | ★ Fourth level item |
| • First level item | * First level item |

Fake description environment

Here we set `label={}` and `list-indent=2.5em`, `font=\bfseries`.

SomeThing A short one-line description.

This is an entry *without* a label.

Something A short *one-line* description text.

Something long A much *longer* description text may take more than one line or more than one paragraph.

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua.

If we add `list-indent=0pt` you get *widest style*:

SomeThing A short one-line description.

This is an entry *without* a label.

Something A short *one-line* description text.

Something long A much *longer* description text may take more than one line or more than one paragraph. Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua.

- The small space at the beginning of the “*unlabeled entry*” corresponds to `\labelsep` and can be removed using `\hspace{-\labelsep}` at the beginning of the line.
- When *tagged* PDF is active the default `description` style is NOT available due to the redefinition of `\makeLabel` for the `align` key which uses `\makebox` in this case, meaning that `\item[⟨content⟩]` will not extend beyond `\labelwidth` which causes overlaps,

Description indented by label

Here we set `label={}` and we will give a convenient value to `labelsep` and `labelwidth`, for example we can take as reference our *longest label* and pass it as value using:

```
\newlength{\descitemwd}
\settowidth{\descitemwd}{\textbf{Something long}}
```

and then use `labelsep=4pt, labelwidth=\descitemwd, font=\bfseries`.

SomeThing A short one-line description.

This is an entry *without* a label.

Something A short one-line description.

Something long A much longer description. Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris.

The environment can be translated so that the `⟨labels⟩` are on the left margin calculating the value passed to the `list-offset` key, in this case it will be equal to the sum of the values set by the `labelwidth` and `labelsep` keys finally resulting as `list-offset={-\descitemwd - 4pt}`.

SomeThing A short one-line description.

This is an entry *without* a label.

Something A short one-line description.

Something long A much longer description. Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris.

If we add `align=right` it will look like this:

SomeThing A short one-line description.

This is an entry *without* a label.

Something A short one-line description.

Something long A much longer description. Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris.

- At this point we have used `list-offset={-\descitemwd - 4pt}` instead of `list-offset={-\labelwidth - \labelsep}`, this is because the parameters `\labelwidth` and `\labelsep` take the default values, as if we had not set `label`.

Description with multi-line labels

The `label` key does not accept *multiline material*, this is where the `wrap-label` and `wrap-label*` keys comes into play. Unlike the `enumitem` package, the `align` key only supports three options, so what we will do is create a command in the style `\parleft` of `enumitem` that allows us to place *multiline labels* using `\parbox`.

```
\NewDocumentCommand \labelbx { s +m }
{%
  \SuspendTagging{\parbox}%
  \IfBooleanTF{#1}
  {%\strut\smash{\parbox[t]{\labelwidth}{\raggedright{#2}}}}%
  {%\strut\smash{\parbox[t]{\labelwidth}{\raggedleft{#2}}}}%
  \ResumeTagging{\parbox}%
}
```

Now we just need to set `wrap-label*={\labelbx{#1}}`.

SomeThing A short one-line description.

This is an entry *without* a label.

Something A short one-line description.

Something A much longer description. Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris.

long Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris.

SoMeThInG A much longer description. Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum
LoNg ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris.

Final notes

The original implementation (if you can call it that) of the ideas that led to the creation of `enumext` were some macros using the `enumerate[5]` package for personal use created in early 2003, the code was quite questionable, but functional for these simple requirements.

With the great answers given by Christian Hupfer in [Create a fake label ref using list](#) and the answer given by David Carlisle in [Change the use of label ref by data save in an array \(list\)](#) I managed to create a more solid code than the original version, now using the `l3prop[11]` and `l3seq[11]` modules together with the `hyperref[8]` and `enumitem[6]` packages, which did the job, but with some limitations.

As time went by I took these limitations as a personal challenge which I called “*reinventing the wheel*”, since there were packages and classes that did more or less what I was looking for, but did not fit my simple requirements. This “*reinventing the wheel*” finally ended up becoming `enumext`.

Why list environments?

The answer is simple, first I love the beauty of its syntax and many of what I had already written used the `enumerate` environment or lists created using the `enumitem` package. In my mind I thought: how complicated could it be to write a package that looked like `enumitem`? It seemed simple enough, of course I didn’t have in mind the mess I was getting into working with `list` environments, `minipage` and adding support for the `multicol` and `hyperref` packages.

Of course, seeing the final result of the experiment “*reinventing the wheel*” I am quite satisfied.

Why not random questions and other utilities

The “*random*” type questions I love and hate them at the same time, although they simplify a lot the work when creating a multiple choice test, but you lose the beauty of typesetting a document with \LaTeX , that is to say the output does not always look as nice as it should, even if they are only alternatives these must follow a certain order when presented either numerical or presentation, that said handling that using *nested lists* is quite complicated so I do not classify to be implemented.

Why has it taken so long?

One of the setbacks, beyond my laziness, was including compatibility with *tagged* PDF. To be honest, it’s something I never considered at any point, but I firmly believe that being able to create *accessible documents* provides a great opportunity in the world of mathematics education. From my perspective as a *high school* teacher, beyond theorems and deep mathematics, the use of exercise lists is one of the most common things. Being able to open the way to work in parallel with those who have different abilities is really important and I regret not having looked into this in the past. I hope that `enumext` serves this purpose and inspires more users and authors to follow this path.

10 References

- [1] HIRSCHHORN, PHILIP. “Using the exam document class”. Available from CTAN, <https://www.ctan.org/pkg/exam>, 2023.
- [2] NIEDERBERGER, CLEMENS. “xsim – eXercise Sheets IMproved”. Available from CTAN, <https://www.ctan.org/pkg/xsim>, 2023.
- [3] MITTELBACH, FRANK. “An environment for multicolumn output”. Available from CTAN, <https://www.ctan.org/pkg/multicol>, 2025.
- [4] GONZÁLEZ, PABLO. “scontents - Stores \LaTeX contents in memory or files”. Available from CTAN, <https://www.ctan.org/pkg/scontents>, 2025.
- [5] The \LaTeX Project. “enumerate – Enumerate with redefinable labels”. Available from CTAN, <https://www.ctan.org/pkg/enumerate>, 2025.
- [6] BEZOS, JAVIER. “Customizing lists with the enumitem package”. Available from CTAN, <https://www.ctan.org/pkg/enumitem>, 2025.
- [7] BERRY, KARL. “ $\text{\LaTeX}_{2\epsilon}$: An Unofficial Reference Manual”. Available from CTAN, <https://ctan.org/pkg/latex2e-help-texinfo>, 2025.
- [8] The \LaTeX Project. “Extensive support for hypertext in \LaTeX ”. Available from CTAN, <https://www.ctan.org/pkg/hyperref>, 2025.
- [9] BURNOL, JEAN-FRANÇOIS. “The footnotehyper package”. Available from CTAN, <https://www.ctan.org/pkg/footnotehyper>, 2021.

- [10] The \LaTeX Project. “The `expl3` package”. Available from CTAN, <https://www.ctan.org/pkg/l3kernel>, 2025.
- [11] The \LaTeX Project. “The \LaTeX 3 Interfaces”. Available from CTAN, <https://www.ctan.org/pkg/l3kernel>, 2025.
- [12] The \LaTeX Project. “The \LaTeX 2 ϵ sources”. Available from CTAN, <https://ctan.org/tex-archive/macros/latex/base>, 2025.
- [13] The \LaTeX Project. “ \LaTeX News, Issue 41, June 2025”. Available from CTAN, <https://ctan.org/tex-archive/macros/latex/base>, 2025.
- [14] The \LaTeX Project. “ \LaTeX for authors current version”. Available from CTAN, <https://ctan.org/pkg/latex-base>, 2025.
- [15] GUNDLACH, PATRICK. “The `lua-visual-debug` package”. Available from CTAN, <https://www.ctan.org/pkg/lua-visual-debug>, 2023.
- [16] LEMVIG, MOGENS. “The `shortlst` package”. Available from CTAN, <https://www.ctan.org/pkg/shortlst>, 1998.
- [17] NIEDERBERGER, CLEMENS. “`tasks` – Horizontally columned lists”. Available from CTAN, <https://www.ctan.org/pkg/tasks>, 2022.
- [18] FISCHER, ULRIKE. “`tagpdf` – \LaTeX kernel code for PDF tagging”. Available from CTAN, <https://www.ctan.org/pkg/tagpdf>, 2025.
- [19] The \LaTeX Project. “`latex-lab` – \LaTeX laboratory”. Available from CTAN, <https://www.ctan.org/pkg/latex-lab>, 2025.
- [20] MITTELBACH, FRANK. “ \LaTeX ’s socket management”. Available from CTAN, <https://ctan.org/tex-archive/macros/latex/base>, 2025.

11 Change history

- v1.4 (ctan), 2025-06-15**
 - Improved implementation of the `ref` key.
 - Fixed the behavior of the `save-sep` key.
- v1.3 (ctan), 2025-06-01**
 - Removed dependency on the `scontents` package.
 - The `anskey`* environment has been rewritten using the new `c`-type argument.
- v1.2 (ctan), 2025-03-28**
 - Replace signature (prevent expansion for optional argument).
 - Solve Inconsistent local/global assignment.
- v1.1 (ctan), 2024-11-14**
 - Fixed implementation for `font` and `base-fix` keys.
 - Added new keys for symbol marks.
 - Update and improvements in the internal code.
 - Adjustments in the documentation.
- v1.0 (ctan), 2024-11-01**
 - First public release.

12 Index of Documentation

The italic numbers denote the pages where the corresponding entry is described.

C		F	
Document class:		\footnote	5
article	2	I	
book	2	\itemsep	8
exam	2	K	
letter	2	Keys for \anskey provide by enumext:	
report	2	break-col	14
\columnbreak	4, 14	item-join	14
\columnsep	10	item-pos*	14
Commands provide by enumext:		item-star	14
\anskey	11-14	item-sym*	14
\anspic	11-13, 16, 17	Keys for \foreachkeyans provide by enumext:	
\foreachkeyans	18	after	19
\getkeyans	13, 18	before	19
\item*	5-7, 11-13, 15, 16	sep	18
\item	5-7, 10, 11, 13, 15, 16	start	18
\miniright	11	step	18
\printkeyans	6, 12, 19	stop	18
\setenumextmeta	6	wrapper	19
\setenumext	5-7, 11, 13, 15, 19	Keys for anskey* provide by enumext:	
Counters defined by enumext:		break-col	14
enumXiii	4	force-eol	15
enumXii	4	item-join	14
enumXiv	4	item-pos*	14
enumXi	4	item-star	14
enumXviii	4	item-sym*	14
enumXvii	4	overwrite	14
enumXvi	4	write-env	14
enumXv	4	Keys for environments provide by enumext:	
E		above*	9
Environments provide by enumext:		above	8, 9
anskey*	11-14, 23	after	10
enumext*	4-16, 19, 23	align	7, 13, 23, 24
enumext	4-16, 19, 23	base-fix	8
keyans*	4-15, 23	before*	9, 10
keyanspic	4, 7, 8, 11-14, 16, 23	before	9
keyans	4-17, 23	below*	9
Environments:		below	9
Verbatim	15	check-ans	12, 13
center	5	columns-sep	4, 10, 23
description	5, 23, 24	columns	4, 9, 10, 23
enumerate	1, 3, 5, 25	first	10
figure	5	font	7, 12, 13
flushleft	5	item-pos*	5, 6
flushright	5	item-sym*	5, 6
itemize	5, 23	itemindent	8-10
list	3, 5, 9, 25	itemsep	8
minipage	3-5, 8-11, 23, 25	label-pos	17
multicols	3, 4, 10, 23	label-sep	17
quotation	5	labelsep	3-7, 9, 10, 23, 24
quote	5	labelwidth	3, 4, 6, 7, 9, 10, 12, 13, 23, 24
shortenurerate	5	labelwith	5
tabbing	5	label	7, 8, 10, 15, 16, 23, 24
table	5	labewdith	9
tasks	5	layout-sep	17
trivlist	5	layout-sty	16, 17
verbatim	5	layout-top	17
verse	5	list-indent	3, 9
		list-offset	3, 8, 9, 24

listparindent 9, 10

mark-ans* 12, 13, 15, 17

mark-ans 12, 13

mark-pos* 13, 15, 17

mark-pos 12

mark-ref 12

mark-sep* 13, 15, 17

mark-sep 12, 13

mini-env 4, 9, 11, 23

mini-right* 7, 11

mini-right 7, 11, 23

mini-sep 4, 11

mode-box 7

no-store 11–14, 23

noitemsep 8

nosep 8, 23

overwrite 14

parsep 8, 10, 17

partopsep 8

ref 4, 8, 23

resume* 7, 10, 11

resume 7, 10, 11

rightmargin 9

save-ans 4, 6, 10–19, 23

save-key 10–12, 19

save-ref 4, 7, 12–14, 18, 23

save-sep 12, 15, 17, 23

series 7, 10, 11

show-ans 12, 13, 15, 17, 23

show-length 8

show-pos 12, 13, 15, 17, 18

start* 10

start 10

topsep 8, 9, 17

widest 7

wrap-ans* 13, 15, 17

wrap-ans 12, 13

wrap-label* 7, 24

wrap-label 7, 12, 13, 23, 24

wrap-opt 12, 13, 15, 17

write-env 14

L

\label 4

Labels provide by **enumext**:

 \Alph* 7, 8, 15

 \Roman* 7, 8

 \alph* 7, 8

 \arabic* 7, 8

 \roman* 7, 8

\labelsep 3, 7

\labelwidth 3, 7

\linewidth 11

\listparindent 9

P

Packages:

 enumerate 25

 enumext 1–5, 7, 12, 16, 23, 25

 enumitem 3, 4, 24, 25

 fancyvrb 15

 footnotehyper 5

 geometry 23

 graphicx 23

 hyperref 4, 5, 12–14, 23, 25

 l3keys 7

 l3prop 25

 l3seq 25

 luamml 23

 multicol 1, 2, 4, 23, 25

 scontents 26

 shortlst 5

 tasks 5

 task 6

 unicode-math 23

 xsim 2

\parsep 8

\partopsep 8

R

\raggedcolumns 4

\ref 4

\rightmargin 9

T

\topsep 8

13 Implementation

The most recent publicly released version of `enumext` is available at CTAN: <https://www.ctan.org/pkg/enumext>. While general feedback via email is welcomed, specific bugs or feature requests should be reported through the issue tracker: <https://github.com/pablgonz/enumext/issues>.

- The documentation presented here is far from professional, it contains a lot of obvious information that to the eye of a TeXpert are superfluous, but, after so many years developing this project is the only way to remember what does what.

13.1 General conventions

Variables containing `i`, `ii`, `iii` and `iv` are associated by level with the `enumext` environment, variables containing `v` are associated with the `keyans` environment, variables containing `vi` are associated with the `keyanspic` environment, variables containing `vii` are associated with the `enumext*` environment and variables containing `viii` are associated with the `keyans*` environment.

To simplify writing and documentation some variables and functions that are common to the different levels of the environments are described using a capital “X”.

The temporary function `__enumext_tmp:n` is used in different parts of the package code for variable creation or execution of other functions that are grouped into this one.

All variables and functions defined in this package are private and are NOT intended to work or be used by another package or module.

13.2 Initial set up

Start the DocStrip guards.

```
1 (*package)
```

Identify the internal prefix (L^AT_EX3 DocStrip convention) for l3doc class.

```
2 (@@=enumext)
```

13.3 Declaration of the package

First we will make sure we have a minimum (super updated) version of L^AT_EX to work correctly.

```
3 \NeedsTeXFormat{LaTeX2e}[2025-06-01]
```

Now declare the `enumext` package.

```
4 \ProvidesExplPackage {enumext} {2025-06-15} {1.4} {Enumerate exercise sheets}
```

Finally check if the `multicol` package are loaded, if not we load it.

```
5 \hook_gput_code:nnn {begindocument} {enumext}
6 {
7   \IfPackageLoadedTF { multicol }
8   {
9     \msg_info:nnn { enumext } { package-load } { multicol }
10  }
11  {
12    \msg_info:nnn { enumext } { package-not-load } { multicol }
13    \RequirePackage{multicol}[2024-09-14]
14  }
15 }
```

13.4 Definition of variables

Variables that do not appear in this section are created by means of `\keys_define:nn` or some function described below.

Integer variables will control the nesting levels of the environments, `anskey*` environment and `\anskey` command.

```
\__enumext_level_int
\__enumext_level_h_int
\__enumext_anskey_level_int
\__enumext_keyans_level_int
\__enumext_keyans_level_h_int
\__enumext_keyans_pic_level_int

16 \int_new:N \__enumext_level_int
17 \int_new:N \__enumext_level_h_int
18 \int_new:N \__enumext_anskey_level_int
19 \int_new:N \__enumext_keyans_level_int
20 \int_new:N \__enumext_keyans_level_h_int
21 \int_new:N \__enumext_keyans_pic_level_int
```

(End of definition for `__enumext_level_int` and others.)

```

\l__enumext_starred_bool
\g__enumext_starred_bool
\l__enumext_starred_first_bool
\l__enumext_standar_bool
\g__enumext_standar_bool
\l__enumext_standar_first_bool
\l__enumext_keyans_env_bool
\g__enumext_start_line_tl
\g__enumext_envir_name_tl
\l__enumext_envir_name_tl

```

Internal variables used by functions `__enumext_is_not_nested:`, `__enumext_is_on_first_level:` and `__enumext_keyans_name_and_start:` (§13.5.1).

```

22 \bool_new:N \l__enumext_starred_bool
23 \bool_new:N \g__enumext_starred_bool
24 \bool_new:N \l__enumext_starred_first_bool
25 \bool_new:N \l__enumext_standar_bool
26 \bool_new:N \g__enumext_standar_bool
27 \bool_new:N \l__enumext_standar_first_bool
28 \bool_new:N \l__enumext_keyans_env_bool
29 \tl_new:N \g__enumext_start_line_tl
30 \tl_new:N \g__enumext_envir_name_tl
31 \tl_new:N \l__enumext_envir_name_tl

```

(End of definition for `\l__enumext_starred_bool` and others.)

```

\l__enumext_counter_i_tl
\l__enumext_counter_ii_tl
\l__enumext_counter_iii_tl
\l__enumext_counter_iv_tl
\l__enumext_counter_v_tl
\l__enumext_counter_vi_tl
\l__enumext_counter_vii_tl
\l__enumext_counter_viii_tl

```

Variables to store the “*name of the counters*” `enumXi`, `enumXii`, `enumXiii` and `enumXiv` for `enumext` environment, `enumXv` for `keyans` environment and `enumXvi` for the `keyanspic` environment. The counters `enumXvii` and `enumXviii` are used by `enumext*` and `keyans*` environments.

The initial values of these variables are set by the function `__enumext_define_counters:Nn` (§13.11) and then modified by the function `__enumext_label_style:Nnn` used by `label` key (§13.14).

```

32 \cs_set_protected:Npn \__enumext_tmp:n #1
33 {
34   \tl_new:c { l__enumext_counter_#1_tl }
35 }
36 \clist_map_inline:nn { i, ii, iii, iv, v, vi, vii, viii } { \__enumext_tmp:n {#1} }

```

(End of definition for `\l__enumext_counter_i_tl` and others.)

```

\l__enumext_ref_key_arg_tl
\l__enumext_ref_the_count_tl
\l__enumext_the_counter_X_tl
\l__enumext_renew_counter_X_tl

```

Internal variables used by `ref` key (§13.14).

```

37 \tl_new:N \l__enumext_ref_key_arg_tl
38 \tl_new:N \l__enumext_ref_the_count_tl
39 \cs_set_protected:Npn \__enumext_tmp:n #1
40 {
41   \tl_new:c { l__enumext_renew_counter_#1_tl }
42   \tl_new:c { l__enumext_the_counter_#1_tl }
43   \tl_set:ce { l__enumext_the_counter_#1_tl } { \exp_not:c { theenumX#1 } }
44 }
45 \clist_map_inline:nn { i, ii, iii, iv, v, vi, vii, viii } { \__enumext_tmp:n {#1} }

```

(End of definition for `\l__enumext_ref_key_arg_tl` and others.)

```

\g__enumext_resume_int
\g__enumext_resume_vii_int
\l__enumext_resume_name_tl
\l__enumext_resume_active_bool
\g__enumext_starred_series_tl
\g__enumext_standar_series_tl

```

Internal variables used by `resume`, `resume*` and `series` keys (§13.25).

```

46 \int_new:N \g__enumext_resume_int
47 \int_new:N \g__enumext_resume_vii_int
48 \tl_new:N \l__enumext_resume_name_tl
49 \bool_new:N \l__enumext_resume_active_bool
50 \tl_new:N \g__enumext_standar_series_tl
51 \tl_new:N \g__enumext_starred_series_tl

```

(End of definition for `\g__enumext_resume_int` and others.)

```

\l__enumext_current_widest_dim
\g__enumext_counter_styles_tl
\g__enumext_widest_label_tl
\l__enumext_label_width_by_box

```

The variable `\l__enumext_current_widest_dim` stores the current label width, the variable `\g__enumext_counter_styles_tl` stores the default *label style* and the variable `\g__enumext_widest_label_tl` the label width. These variables are used by `widest` (§13.15) and `label` (§13.13) keys.

```

52 \dim_new:N \l__enumext_current_widest_dim
53 \tl_new:N \g__enumext_counter_styles_tl
54 \tl_new:N \g__enumext_widest_label_tl
55 \box_new:N \l__enumext_label_width_by_box

```

(End of definition for `\l__enumext_current_widest_dim` and others.)

```

\l__enumext_leftmargin_tmp_X_bool
\l__enumext_leftmargin_tmp_X_dim
\l__enumext_leftmargin_X_dim
\l__enumext_itemindent_X_dim

```

The boolean variable `\l__enumext_leftmargin_tmp_X_bool` and the dimensional variable `\l__enumext_leftmargin_tmp_X_dim` are used by the `list-indent` key (§13.18). The variables `\l__enumext_leftmargin_X_dim` and `\l__enumext_itemindent_X_dim` are used and set by the function `__enumext_calc_hspace:NNNNNNNNNN` (§13.38.1).

```

56 \cs_set_protected:Npn \__enumext_tmp:n #1
57 {
58   \bool_new:c { l__enumext_leftmargin_tmp_#1_bool }
59   \dim_new:c { l__enumext_leftmargin_tmp_#1_dim }
60   \dim_new:c { l__enumext_leftmargin_#1_dim }

```

```

61     \dim_new:c { \__enumext_itemindent_#1_dim      }
62   }
63   \clist_map_inline:nn { i, ii, iii, iv, v, vi, vii, viii } { \__enumext_tmp:n {#1} }

```

(End of definition for `__enumext_leftmargin_tmp_X_bool` and others.)

```

\__enumext_multicols_above_X_skip
\__enumext_multicols_below_X_skip
\g__enumext_multicols_right_X_skip
\__enumext_align_label_pos_X_str

```

Internal variables used by `columns` key (§13.22) and `align` key (§13.13).

```

64   \cs_set_protected:Npn \__enumext_tmp:n #1
65   {
66     \skip_new:c { \__enumext_multicols_above_#1_skip }
67     \skip_new:c { \__enumext_multicols_below_#1_skip }
68     \skip_new:c { \g__enumext_multicols_right_#1_skip }
69     \str_new:c { \__enumext_align_label_pos_#1_str }
70   }
71   \clist_map_inline:nn { i, ii, iii, iv, v } { \__enumext_tmp:n {#1} }

```

(End of definition for `__enumext_multicols_above_X_skip` and others.)

```

\g__enumext_minipage_stat_int
\__enumext_minipage_temp_skip
\__enumext_minipage_left_skip
\__enumext_minipage_right_skip
\__enumext_minipage_after_skip
\g__enumext_minipage_right_skip
\g__enumext_minipage_after_skip
\__enumext_minipage_left_X_dim
\__enumext_minipage_active_X_bool

```

Internal variables used by `\miniright` command (§13.23.4) and the keys `mini-right`, `mini-right*`, `mini-env` and `mini-sep` (§13.21, §13.23).

```

72   \int_new:N \g__enumext_minipage_stat_int
73   \skip_new:N \__enumext_minipage_temp_skip
74   \skip_new:N \__enumext_minipage_left_skip
75   \skip_new:N \__enumext_minipage_right_skip
76   \skip_new:N \__enumext_minipage_after_skip
77   \skip_new:N \g__enumext_minipage_right_skip
78   \skip_new:N \g__enumext_minipage_after_skip
79   \cs_set_protected:Npn \__enumext_tmp:n #1
80   {
81     \dim_new:c { \__enumext_minipage_left_#1_dim }
82     \bool_new:c { \__enumext_minipage_active_#1_bool }
83   }
84   \clist_map_inline:nn { i, ii, iii, iv, v, vii, viii } { \__enumext_tmp:n {#1} }

```

(End of definition for `\g__enumext_minipage_stat_int` and others.)

```

\__enumext_wrap_label_X_bool
\__enumext_wrap_label_opt_X_bool
\__enumext_start_X_int
\__enumext_fake_item_indent_X_tl
\__enumext_label_fill_left_X_tl
\__enumext_label_fill_right_X_tl
\__enumext_vspace_a_star_X_bool
\__enumext_vspace_b_star_X_bool

```

The bool vars `__enumext_wrap_label_X_bool` and `__enumext_wrap_label_opt_X_bool` are used by `wrap-label` and `wrap-label*` keys (§13.13), the integer `__enumext_start_X_int` are used by the `start` and `start*` keys (§13.15), the token list `__enumext_fake_item_indent_X_tl` is used by `itemindent` key (§13.18.1), the variables `__enumext_label_fill_left_X_tl` and `__enumext_label_fill_right_X_tl` are used by the `align` key (§13.13). The boolean vars `__enumext_vspace_a_star_X_bool`, `__enumext_vspace_b_star_X_bool` are used by `above`, `above*`, `below` and `below*` keys (§13.20).

```

85   \cs_set_protected:Npn \__enumext_tmp:n #1
86   {
87     \bool_new:c { \__enumext_wrap_label_#1_bool }
88     \bool_new:c { \__enumext_wrap_label_opt_#1_bool }
89     \int_new:c { \__enumext_start_#1_int }
90     \tl_new:c { \__enumext_fake_item_indent_#1_tl }
91     \tl_new:c { \__enumext_label_fill_left_#1_tl }
92     \tl_new:c { \__enumext_label_fill_right_#1_tl }
93     \bool_new:c { \__enumext_vspace_a_star_#1_bool }
94     \bool_new:c { \__enumext_vspace_b_star_#1_bool }
95   }
96   \clist_map_inline:nn { i, ii, iii, iv, v, vii, viii } { \__enumext_tmp:n {#1} }

```

(End of definition for `__enumext_wrap_label_X_bool` and others.)

```

\__enumext_store_active_bool
\__enumext_store_name_tl
\g__enumext_store_name_tl
\__enumext_store_current_label_tl
\__enumext_store_current_opt_arg_tl
\__enumext_store_current_label_tmp_tl

```

The variable `__enumext_store_active_bool` setting by `save-ans` key (§13.26.1) activates all the mechanism related to `\anskey`, `anskey*`, `keyans`, `keyans*` and `keyanspic` environments.

The variable `__enumext_store_name_tl` saves the `{⟨store name⟩}` set by the `save-ans` key of the *sequence* and *prop list* in which we will store, the variable `\g__enumext_store_name_tl` it's just a global copy of `{⟨store name⟩}` used by different functions.

The variables `__enumext_store_current_label_tl` and `__enumext_store_current_opt_arg_tl` save the *current label* and *optional argument* of `\item*` (§13.37) and `\anspic*` (§13.42.2) for the `keyans`, `keyans*` and `keyanspic` environments.

The variable `__enumext_store_current_label_tmp_tl` is a temporary variable used by `keyans`, `keyans*` and `keyanspic` at various points.

```

97   \bool_new:N \__enumext_store_active_bool

```

```

98 \tl_new:N \l__enumext_store_name_tl
99 \tl_new:N \g__enumext_store_name_tl
100 \tl_new:N \l__enumext_store_current_label_tl
101 \tl_new:N \l__enumext_store_current_opt_arg_tl
102 \tl_new:N \l__enumext_store_current_label_tmp_tl

```

(End of definition for `\l__enumext_store_active_bool` and others.)

```

\l__enumext_store_anskey_arg_tl
\l__enumext_store_anskey_env_tl

```

The variable `\l__enumext_store_anskey_arg_tl` save the *argument* of `\anskey` (§13.30) and the variables `\l__enumext_store_anskey_env_tl` save the *body* of the environment `anskey*` (§13.31).

```

\l__enumext_write_anskey_env_bool
\l__enumext_write_anskey_env_file_name_tl
\l__enumext_write_anskey_env_file_iow

```

The variables `\l__enumext_write_anskey_env_bool`, `\l__enumext_write_anskey_env_file_name_tl` and `\l__enumext_write_anskey_env_file_iow` they are used by the `write-env` and `overwrite` keys in the `anskey*` environment implementation.

```

103 \tl_new:N \l__enumext_store_anskey_arg_tl
104 \tl_new:N \l__enumext_store_anskey_env_tl
105 \bool_new:N \l__enumext_write_anskey_env_bool
106 \tl_new:N \l__enumext_write_anskey_env_file_name_tl
107 \iow_new:N \l__enumext_write_anskey_env_file_iow

```

(End of definition for `\l__enumext_store_anskey_arg_tl` and others.)

```
\c__enumext_anskey_env_hidden_space_str
```

The `\c__enumext_anskey_env_hidden_space_str` is a constant *string* to used to hide the *forced space* added by T_EX when recording content in a macro. This *string* contains the *reserved phrase* “`%^^Aenumextheol%`” which is added to the end of the argument stored in *sequence* and *prop list* when the key `force-eol` is false.

```

108 \str_const:Nc \c__enumext_anskey_env_hidden_space_str
109 { \c_percent_str \c_circumflex_str \c_circumflex_str A enumextheol \c_percent_str }

```

(End of definition for `\c__enumext_anskey_env_hidden_space_str`.)

```

\l__enumext_setkey_tmpa_tl
\l__enumext_setkey_tmpb_tl
\l__enumext_setkey_tmpa_int
\l__enumext_setkey_tmpa_seq
\l__enumext_setkey_tmpb_seq

```

Internal variables used by the command `\setenumext` (§13.48).

```

110 \tl_new:N \l__enumext_setkey_tmpa_tl
111 \tl_new:N \l__enumext_setkey_tmpb_tl
112 \int_new:N \l__enumext_setkey_tmpa_int
113 \seq_new:N \l__enumext_setkey_tmpa_seq
114 \seq_new:N \l__enumext_setkey_tmpb_seq

```

(End of definition for `\l__enumext_setkey_tmpa_tl` and others.)

```

\l__enumext_meta_path_tl
\l__enumext_foreach_print_seq
\l__enumext_foreach_name_prop_tl
\l__enumext_foreach_default_keys_tl

```

Internal variables used by the `\printkeyans` command (§13.47) and `\foreachkeyans` command (§13.50).

```

115 \tl_new:N \l__enumext_meta_path_tl
116 \seq_new:N \l__enumext_foreach_print_seq
117 \tl_new:N \l__enumext_foreach_name_prop_tl
118 \tl_new:N \l__enumext_foreach_default_keys_tl

```

(End of definition for `\l__enumext_meta_path_tl` and others.)

```

\l__enumext_print_keyans_starred_tl
\l__enumext_print_keyans_star_bool
\l__enumext_mark_position_str
\l__enumext_mark_position_v_str
\l__enumext_mark_position_viii_str
\l__enumext_mark_sep_tmpa_dim
\l__enumext_mark_sep_tmpb_dim
\l__enumext_show_pos_tmp_int
\g__enumext_item_symbol_aux_tl
\l__enumext_print_keyans_X_tl
\l__enumext_store_save_key_X_tl
\l__enumext_store_save_key_X_bool
\l__enumext_store_upper_level_X_bool

```

Internal variables used by command `\printkeyans` (§13.47), `show-pos`, `show-ans`, `mark-pos`, `mark-sep` keys (§13.27), `item-sym*` key (§13.35), `save-key` key (§13.27.3) and “*storing structure*”.

```

119 \tl_new:N \l__enumext_print_keyans_starred_tl
120 \bool_new:N \l__enumext_print_keyans_star_bool
121 \str_new:N \l__enumext_mark_position_str
122 \str_new:N \l__enumext_mark_position_v_str
123 \str_new:N \l__enumext_mark_position_viii_str
124 \dim_new:N \l__enumext_mark_sep_tmpa_dim
125 \dim_new:N \l__enumext_mark_sep_tmpb_dim
126 \int_new:N \l__enumext_show_pos_tmp_int
127 \tl_new:N \g__enumext_item_symbol_aux_tl
128 \cs_set_protected:Npn \__enumext_tmp:n #1
129 {
130   \tl_new:c { \l__enumext_print_keyans_#1_tl }
131   \tl_new:c { \l__enumext_store_save_key_#1_tl }
132   \bool_new:c { \l__enumext_store_save_key_#1_bool }
133   \bool_new:c { \l__enumext_store_upper_level_#1_bool }
134 }
135 \clist_map_inline:nn { i, ii, iii, iv, vii } { \__enumext_tmp:n {#1} }

```

(End of definition for `\l__enumext_print_keyans_starred_tl` and others.)

```

\l__enumext_anspic_args_seq
  \l__enumext_anspic_mini_width_dim
\l__enumext_anspic_above_int
\l__enumext_anspic_below_int
  \l__enumext_anspic_label_above_bool
  \l__enumext_anspic_mini_pos_str
\l__enumext_anspic_label_box
\l__enumext_anspic_body_box
  \l__enumext_anspic_label_htdp_dim
  \l__enumext_anspic_body_htdp_dim

```

Internal variables used by **keyanspic** environment and **\anspic** command (§13.42.1).

```

136 \seq_new:N \l__enumext_anspic_args_seq
137 \dim_new:N \l__enumext_anspic_mini_width_dim
138 \int_new:N \l__enumext_anspic_above_int
139 \int_new:N \l__enumext_anspic_below_int
140 \bool_new:N \l__enumext_anspic_label_above_bool
141 \str_new:N \l__enumext_anspic_mini_pos_str
142 \box_new:N \l__enumext_anspic_label_box
143 \box_new:N \l__enumext_anspic_body_box
144 \dim_new:N \l__enumext_anspic_label_htdp_dim
145 \dim_new:N \l__enumext_anspic_body_htdp_dim

```

(End of definition for `\l__enumext_anspic_args_seq` and others.)

```

  \l__enumext_check_answers_bool
  \g__enumext_check_ans_key_bool
\l__enumext_check_start_line_env_tl
  \l__enumext_item_wrap_key_bool
  \g__enumext_check_starred_cmd_int
\g__enumext_item_anskey_int
\g__enumext_item_number_int
\g__enumext_item_number_bool
  \g__enumext_item_answer_diff_int

```

Internal variables used by “*internal check answer*” mechanism (§13.26.3) used by the **check-ans**, **no-store**, **wrap-ans*** keys and check for starred commands **\item*** in **keyans** and **keyans*** environments and **\anspic*** in **keyanspic** environment.

```

146 \bool_new:N \l__enumext_check_answers_bool
147 \bool_new:N \g__enumext_check_ans_key_bool
148 \tl_new:N \l__enumext_check_start_line_env_tl
149 \bool_new:N \l__enumext_item_wrap_key_bool
150 \int_new:N \g__enumext_check_starred_cmd_int
151 \int_new:N \g__enumext_item_anskey_int
152 \int_new:N \g__enumext_item_number_int
153 \bool_new:N \l__enumext_item_number_bool
154 \int_new:N \g__enumext_item_answer_diff_int

```

(End of definition for `\l__enumext_check_answers_bool` and others.)

```

\l__enumext_hyperref_bool
  \l__enumext_footnotes_key_bool

```

The boolean variable `\l__enumext_hyperref_bool` will determine if the **hyperref** package is present or load in memory (§13.7). The boolean variable `\l__enumext_footnotes_key_bool` determine if **hyperref** is load with key **hyperfootnotes=true**.

```

155 \bool_new:N \l__enumext_hyperref_bool
156 \bool_new:N \l__enumext_footnotes_key_bool

```

(End of definition for `\l__enumext_hyperref_bool` and `\l__enumext_footnotes_key_bool`.)

```

\l__enumext_newlabel_arg_one_tl
\l__enumext_newlabel_arg_two_tl
  \l__enumext_write_aux_file_tl
\l__enumext_label_copy_X_tl

```

Internal variables used by **save-ref** key (§13.27). The variables `\l__enumext_label_copy_X_tl` correspond to temporary copies of the *labels* defined by level on which operations will be performed.

The variables `\l__enumext_newlabel_arg_one_tl` and `\l__enumext_newlabel_arg_two_tl` will be used to form the arguments passed to the function `__enumext_newlabel:nn` (§13.7) and the variable `\l__enumext_write_aux_file_tl` will be in charge of executing the writing code in the `.aux` file.

```

157 \tl_new:N \l__enumext_newlabel_arg_one_tl
158 \tl_new:N \l__enumext_newlabel_arg_two_tl
159 \tl_new:N \l__enumext_write_aux_file_tl
160 \cs_set_protected:Npn \__enumext_tmp:n #1
161 {
162   \tl_new:c { \l__enumext_label_copy_#1_tl }
163 }
164 \clist_map_inline:nn { i, ii, iii, iv, v, vi, vii, viii } { \__enumext_tmp:n {#1} }

```

(End of definition for `\l__enumext_newlabel_arg_one_tl` and others.)

```

\g__enumext_footnote_standar_int
\g__enumext_footnote_starred_int
\g__enumext_footnote_standar_arg_seq
\g__enumext_footnote_starred_arg_seq
\g__enumext_footnote_standar_int_seq
\g__enumext_footnote_starred_int_seq

```

Internal variables used for redefinition of **\footnote** (§13.8).

```

165 \int_new:N \g__enumext_footnote_standar_int
166 \int_new:N \g__enumext_footnote_starred_int
167 \seq_new:N \g__enumext_footnote_standar_arg_seq
168 \seq_new:N \g__enumext_footnote_starred_arg_seq
169 \seq_new:N \g__enumext_footnote_standar_int_seq
170 \seq_new:N \g__enumext_footnote_starred_int_seq

```

(End of definition for `\g__enumext_footnote_standar_int` and others.)

```

\l__enumext_item_starred_X_bool
\l__enumext_item_column_pos_X_int
\g__enumext_item_count_all_X_int
  \l__enumext_joined_item_X_int
\l__enumext_joined_item_aux_X_int
  \l__enumext_tmpa_X_int
  \l__enumext_tmpa_X_dim
\l__enumext_item_text_X_box

```

Internal variables used by **enumext*** and **keyans*** environments.

```

171 \cs_set_protected:Npn \__enumext_tmp:n #1
172 {
173   \bool_new:c { \l__enumext_item_starred_#1_bool }
174   \int_new:c { \l__enumext_item_column_pos_#1_int }
175   \int_new:c { \g__enumext_item_count_all_#1_int }
176   \int_new:c { \l__enumext_joined_item_#1_int }

```

©2024–2025 by Pablo González L

```

177 \int_new:c { \__enumext_joined_item_aux_#1_int }
178 \int_new:c { \__enumext_tmpa_#1_int }
179 \dim_new:c { \__enumext_tmpa_#1_dim }
180 \box_new:c { \__enumext_item_text_#1_box }
181 \dim_new:c { \__enumext_joined_width_#1_dim }
182 \dim_new:c { \__enumext_item_width_#1_dim }
183 \tl_new:c { g__enumext_item_symbol_aux_#1_tl }
184 \str_new:c { \__enumext_align_label_#1_str }
185 \bool_new:c { g__enumext_minipage_active_#1_bool }
186 \box_new:c { \__enumext_miniright_code_#1_box }
187 \bool_new:c { g__enumext_minipage_center_#1_bool }
188 \dim_new:c { g__enumext_minipage_right_#1_dim }
189 \skip_new:c { g__enumext_minipage_right_#1_skip }
190 }
191 \clist_map_inline:nn { vii, viii } { \__enumext_tmp:n {#1} }

```

(End of definition for `__enumext_item_starred_X_bool` and others.)

`\c__enumext_all_envs_clist` An internal `clist-var` variable to run with `__enumext_tmp:n`.

```

192 \clist_const:Nn \c__enumext_all_envs_clist
193 {
194   {level-1}{i}, {level-2}{ii}, {level-3}{iii}, {level-4}{iv},
195   {keyans}{v}, {enumext*}{vii}, {keyans*}{viii}
196 }

```

(End of definition for `\c__enumext_all_envs_clist`.)

13.5 Some utility functions

`\keys_precompile:neN` `\seq_use:NV` Non-standard kernel variants used by the `\printkeyans` command (§13.47) and `\foreachkeyans` command (§13.50).

```

197 \cs_generate_variant:Nn \keys_precompile:nnN { neN }
198 \cs_generate_variant:Nn \seq_use:Nn { NV }

```

(End of definition for `\keys_precompile:neN` and `\seq_use:NV`.)

`__enumext_scan_tokens:n` The functions `\tl_rescan:nn` and `\tl_set_rescan:Nnn` provided by `expl3` doesn't fit the needs of this package because it does not allow catcode changes inside the argument, so verbatim stuff used inside one of `anskey*` environment will not work. Here we create a private copy of `\tex_scantokens:D` which will serve our purposes. See the answer by Ulrich Diez in [How do use {<setup> in \tl_set_rescan:Nnn to replace \scantokens?](#).

```

199 \cs_new_protected:Npn \__enumext_scan_tokens:n #1 { \tex_scantokens:D {#1} }

```

(End of definition for `__enumext_scan_tokens:n`.)

`__enumext_at_begin_document:n` A internal “hook” function used for copying plain `list` and `minipage` environments definition and `hyperref` detection.

```

200 \cs_new_protected:Npn \__enumext_at_begin_document:n #1
201 {
202   \hook_gput_code:nnn {begindocument} {enumext} { #1 }
203 }

```

(End of definition for `__enumext_at_begin_document:n`.)

`__enumext_after_env:nn` `__enumext_before_env:nn` A internal “hook” functions for execute code `mini-right` and `mini-right*` keys outside the `enumext*` and `keyans*` environments and print `check-ans` outside the `enumext` and `enumext*` environments.

```

204 \cs_new_protected:Npn \__enumext_after_env:nn #1 #2
205 {
206   \hook_gput_code:nnn {env/#1/after} {enumext} {#2}
207 }
208 \cs_new_protected:Npn \__enumext_before_env:nn #1 #2
209 {
210   \hook_gput_code:nnn {env/#1/before} {enumext} {#2}
211 }

```

(End of definition for `__enumext_after_env:nn` and `__enumext_before_env:nn`.)

`__enumext_level:` Function for check current level in `enumext`.

```

212 \cs_new:Nn \__enumext_level:
213 {
214   \int_to_roman:n { \__enumext_level_int }
215 }

```


(End of definition for `__enumext_level:`.)

`__enumext_if_is_int:nT`
`__enumext_if_is_int:nF`
`__enumext_if_is_int:nTF`

A conditional function to know if the variable we are passing is an integer used by `start` and `widest` keys. This function is taken directly from the answer given by Henri Menke in [How to test if an expl3 function argument is an integer expression?](#).

```
216 \prg_new_protected_conditional:Npnn \__enumext_if_is_int:n #1 { T, F, TF }
217 {
218   \regex_match:nnTF { ^[\+|-]?[\d]+$ } {#1} % $
219   { \prg_return_true: }
220   { \prg_return_false: }
221 }
```

(End of definition for `__enumext_if_is_int:nT`, `__enumext_if_is_int:nF`, and `__enumext_if_is_int:nTF`.)

`__enumext_regex_counter_style:`

The internal function `__enumext_regex_counter_style:` replace the ‘`*`’ with the actual counter of the running level and is used by the `ref` key. It loops through the defined counter styles in `__enumext_counter_style_tl` and replace ‘`*`’ by real command, for example, looking for `\arabic*` and replacing that by `\arabic{<counter>}` defined on the current level.

```
222 \cs_new_protected:Nn \__enumext_regex_counter_style:
223 {
224   \tl_map_inline:Nn \__enumext_counter_style_tl
225   {
226     \regex_replace_once:nnN { \c{##1}\* }
227     { \c{##1}\cB{\u{\__enumext_ref_the_count_tl}\cE} } \l__enumext_ref_key_arg_tl
228   }
229 }
```

(End of definition for `__enumext_regex_counter_style:`.)

`__enumext_show_length:nnn`

Internal function used by `show-length` key to show “all lengths” calculated and use in `enumext`, `enumext*`, `keyans` and `keyans*` environments.

```
230 \cs_new:Npn \__enumext_show_length:nnn #1 #2 #3
231 {
232   *~#2
233   \prg_replicate:nn { 14 - \str_count:n {#2} } {~}
234   =~\use:c { #1_use:c } { \__enumext_#2_#3_#1 } \\
235 }
```

(End of definition for `__enumext_show_length:nnn`.)

`__enumext_unskip_unkern:`

The function `__enumext_unskip_unkern:` will remove the last `<skip>` or `<kern>` at execution time using the values `11` and `12` of `\lastnodetype` to apply `\unskip` or `\unkern` according to the case.

```
236 \cs_new_protected:Nn \__enumext_unskip_unkern:
237 {
238   \int_case:nnT { \lastnodetype }
239   {
240     { 11 }{ \unskip }
241     { 12 }{ \unkern }
242   }
243 }
```

(End of definition for `__enumext_unskip_unkern:`.)

13.5.1 Utilities for environments and levels

`__enumext_is_not_nested:`
`__enumext_is_on_first_level:`

The function `__enumext_is_not_nested:` set the variables `\g__enumext_standar_bool` and `\g__enumext_starred_bool` to “true” only if the environments `enumext` and `enumext*` are NOT nested in each other and save the environment name in `\l__enumext_envir_name_tl`.

```
244 \cs_new_protected:Nn \__enumext_is_not_nested:
245 {
246   \str_case:en { \@currentenv }
247   {
248     {enumext}
249     {
250       \tl_set:Nn \l__enumext_envir_name_tl { enumext }
251       \bool_lazy_and:nnT
252       { \bool_not_p:n { \g__enumext_standar_bool } }
253       { \int_compare_p:nNn { \l__enumext_level_h_int } = { 0 } }
254       {
255         \bool_gset_true:N \g__enumext_standar_bool
256       }
257     }
258   }
```

```

257     }
258     {enumext*}
259     {
260         \tl_set:Nn \l__enumext_envir_name_tl { enumext* }
261         \bool_lazy_and:nnT
262         { \bool_not_p:n { \g__enumext_starred_bool } }
263         { \int_compare_p:nNn { \l__enumext_level_int } = { 0 } }
264         {
265             \bool_gset_true:N \g__enumext_starred_bool
266         }
267     }
268 }
269 }

```

The function `__enumext_is_on_first_level:` will set the variables `\l__enumext_standar_first_bool` (§13.26.1), `\l__enumext_starred_first_bool` (§13.26.1) to “true” only if the environment is not nested and we are in the “first level” of it. We will also save the *start line number* of each environment in the variable `\g__enumext_start_line_tl` and the *name* of each environment in the variable `\g__enumext_envir_name_tl` to use in messages related to the `check-ans` key and `.log` file.

```

270 \cs_new_protected:Nn \__enumext_is_on_first_level:
271 {
272     \bool_lazy_all:nT
273     {
274         { \bool_if_p:N \g__enumext_standar_bool }
275         { \int_compare_p:nNn { \l__enumext_level_int } = { 1 } }
276         { \int_compare_p:nNn { \l__enumext_level_h_int } = { 0 } }
277     }
278     {
279         \bool_set_true:N \l__enumext_standar_first_bool
280         \tl_gset:Nn \g__enumext_envir_name_tl { enumext }
281         \tl_gset:Ne \g__enumext_start_line_tl
282         {
283             on~line~\exp_not:V \inputlineno
284         }
285     }
286     \bool_lazy_all:nT
287     {
288         { \bool_if_p:N \g__enumext_starred_bool }
289         { \int_compare_p:nNn { \l__enumext_level_h_int } = { 1 } }
290         { \int_compare_p:nNn { \l__enumext_level_int } = { 0 } }
291     }
292     {
293         \bool_set_true:N \l__enumext_starred_first_bool
294         \tl_gset:Nn \g__enumext_envir_name_tl { enumext* }
295         \tl_gset:Ne \g__enumext_start_line_tl
296         {
297             on~line~\exp_not:V \inputlineno
298         }
299     }
300 }

```

(End of definition for `__enumext_is_not_nested:` and `__enumext_is_on_first_level:`)

`__enumext_keyans_name_and_start:`

The function `__enumext_keyans_name_and_start:` will save the start line number and name of the environments `keyans`, `keyans*` and `keyanspic` in the variables `\l__enumext_check_start_line_env_tl` and `\l__enumext_envir_name_tl` to use in the `__enumext_check_starred_cmd:n` function.

```

301 \cs_new_protected:Nn \__enumext_keyans_name_and_start:
302 {
303     \str_case:en { \@currenvir }
304     {
305         {keyans}
306         {
307             \tl_set:Nn \l__enumext_envir_name_tl { keyans }
308             \tl_set:Ne \l__enumext_check_start_line_env_tl
309             {
310                 in~'keyans'~start~on~line~\exp_not:V \inputlineno
311             }
312         }
313         {keyans*}
314         {
315             \tl_set:Nn \l__enumext_envir_name_tl { keyans* }

```

```

316         \tl_set:Nc \l__enumext_check_start_line_env_tl
317         {
318             in~'keyans*'~start~on~line~\exp_not:V \inputlineno
319         }
320     }
321     {keyanspic}
322     {
323         \tl_set:Nn \l__enumext_envir_name_tl { keyanspic }
324         \tl_set:Nc \l__enumext_check_start_line_env_tl
325         {
326             in~'keyanspic'~start~on~line~\exp_not:V \inputlineno
327         }
328     }
329 }
330 }

```

(End of definition for `__enumext_keyans_name_and_start:`.)

13.5.2 Utilities for log and terminal

The function `__enumext_reset_global_vars:` will be passed to the function `__enumext_execute_after_env:` and will return the global variables to their default values after being used.

```

\__enumext_reset_global_vars:
\__enumext_reset_global_int:
\__enumext_reset_global_bool:
\__enumext_reset_global_tl:
331 \cs_new_protected:Nn \__enumext_reset_global_vars:
332 {
333     \__enumext_reset_global_int:
334     \__enumext_reset_global_bool:
335     \__enumext_reset_global_tl:
336 }
337 \cs_new_protected:Nn \__enumext_reset_global_int:
338 {
339     \int_gzero:N \g__enumext_item_number_int
340     \int_gzero:N \g__enumext_item_anskey_int
341     \int_gzero:N \g__enumext_item_answer_diff_int
342 }
343 \cs_new_protected:Nn \__enumext_reset_global_bool:
344 {
345     \bool_gset_false:N \g__enumext_check_ans_key_bool
346     \bool_gset_false:N \g__enumext_standar_bool
347     \bool_gset_false:N \g__enumext_starred_bool
348 }
349 \cs_new_protected:Nn \__enumext_reset_global_tl:
350 {
351     \tl_gclear:N \g__enumext_store_name_tl
352     \tl_gclear:N \g__enumext_start_line_tl
353     \tl_gclear:N \g__enumext_envir_name_tl
354 }

```

(End of definition for `__enumext_reset_global_vars:` and others.)

The function `__enumext_log_global_vars:` will be passed to the function `__enumext_execute_after_env:` and write to the `.log` file the number of elements saved in the *prop list* and *sequence* created by the *save-ans* key along with the value of the integer variable created for the *resume* key.

```

355 \cs_new_protected:Nn \__enumext_log_global_vars:
356 {
357     \msg_log:nneeee { enumext } { prop-seq-int-hook }
358     { \g__enumext_store_name_tl }
359     { \prop_count:c { g__enumext_ \g__enumext_store_name_tl _prop } }
360     { \seq_count:c { g__enumext_ \g__enumext_store_name_tl _seq } }
361     { \int_use:c { g__enumext_resume_ \g__enumext_store_name_tl _int } }
362 }

```

The function `__enumext_log_answer_vars:` will be passed to the function `__enumext_execute_after_env:` and write to the `.log` file the number of items and answers along with the difference between them.

```

363 \cs_new_protected:Nn \__enumext_log_answer_vars:
364 {
365     \msg_log:nneeee { enumext } { item-answer-hook }
366     { \int_use:N \g__enumext_item_number_int }
367     { \int_use:N \g__enumext_item_anskey_int }
368     { \int_eval:n { \g__enumext_item_number_int - \g__enumext_item_anskey_int } }
369 }

```

(End of definition for `__enumext_log_global_vars:` and `__enumext_log_answer_vars:`.)

13.6 Copying list and minipage environments

The `list` environment provided by \LaTeX has the following plain form:

```
\list{⟨arg one⟩}{⟨arg two⟩}
  \item[⟨opt⟩]
\endlist
```

And `minipage` environment provided by \LaTeX has the following (simplified) plain form:

```
\minipage[⟨pos⟩][⟨height⟩][⟨inner-pos⟩]{⟨width⟩}
  ⟨internal implement⟩
\endminipage
```

As a precaution we copy them using `__enumext_at_begin_document:n` in case any package redefines the `list` environment or a related command.

For compatibility with *tagged* PDF we should use `\NewCommandCopy` and not `\cs_new_eq:NN` for `\item`. When *tagged* PDF is active `\item` is redefined using `ltxcmd` (see `latex-lab-block`[19]).

```
\__enumext_start_list:nn
  \__enumext_stop_list:
  \__enumext_item_std:w
  \__enumext_minipage:w
  \__enumext_endminipage:
```

The functions `__enumext_start_list:nn` and `__enumext_stop_list:` correspond to copies of `\list` and `\endlist` from plain definition of `list` environment, the function `__enumext_item_std:w` is a copy of the `\item` command.

```
370 \__enumext_at_begin_document:n
371 {
372   \cs_new_eq:NN \__enumext_start_list:nn \list
373   \cs_new_eq:NN \__enumext_stop_list: \endlist
374   \NewCommandCopy \__enumext_item_std:w \item
375 }
```

The functions `__enumext_minipage:w` and `__enumext_endminipage:` correspond to copies of `\minipage` and `\endminipage` from plain definition of `minipage` environment.

```
376 \__enumext_at_begin_document:n
377 {
378   \cs_new_eq:NN \__enumext_minipage:w \minipage
379   \cs_new_eq:NN \__enumext_endminipage: \endminipage
380 }
```

(End of definition for `__enumext_start_list:nn` and others.)

13.7 Compatibility with hyperref and footnotehyper

First we define the necessary rules using “hooks” to determine if the `hyperref` package is loaded.

```
\__enumext_after_hyperref:
  \__enumext_hypertarget:nn
  \__enumext_phantomsection:
```

```
381 \hook_gput_code:nnn { begindocument } { enumext } { \__enumext_after_hyperref: }
382 \hook_gset_rule:nnnn { begindocument } { enumext } { after } { hyperref }
```

The function `__enumext_after_hyperref:` sets the state of the boolean variable `\l__enumext_hyperref_bool` to “true” if the package is loaded. At this point we will use the public macro `\IfHyperBoolean` to determine if the `hyperfootnotes=true` key is present, if so, we set the state of the boolean variable `\l__enumext_footnotes_key_bool` to “true”.

```
383 \cs_new_protected:Nn \__enumext_after_hyperref:
384 {
385   \IfPackageLoadedT { hyperref }
386   {
387     \msg_info:nnn { enumext } { package-load } { hyperref }
388     \bool_set_true:N \l__enumext_hyperref_bool
389     \IfHyperBoolean{hyperfootnotes}
390     {
391       \bool_set_true:N \l__enumext_footnotes_key_bool
392     }
393     { }
394   }
```

If the state of the variable `\l__enumext_footnotes_key_bool` is true we will check if the package `footnotehyper` is loaded, in case it is not present, we will set the value of `\l__enumext_footnotes_key_bool` to false and we will redefine `\footnote`.

```
395   \bool_if:NT \l__enumext_footnotes_key_bool
396   {
397     \IfPackageLoadedTF { footnotehyper }
398     {
399       \msg_info:nnn { enumext } { package-load } { footnotehyper }
400     }
401     {
402       \bool_set_false:N \l__enumext_footnotes_key_bool
```

```

403     }
404 }

```

The functions `__enumext_hypertarget:nn` and `__enumext_phantomsection:` correspond to the internal copies of `\hypertarget` and `\phantomsection`. If the boolean variable `__enumext_hyperref_bool` is false the functions `__enumext_hypertarget:nn` and `__enumext_phantomsection:` will be disabled.

```

405 \bool_if:NTF \__enumext_hyperref_bool
406 {
407   \cs_new_eq:NN \__enumext_hypertarget:nn \hypertarget
408   \cs_new_eq:NN \__enumext_phantomsection: \phantomsection
409 }
410 {
411   \cs_new_eq:NN \__enumext_hypertarget:nn \use_none:nn
412   \cs_new_eq:NN \__enumext_phantomsection: \prg_do_nothing:
413 }
414 }

```

(End of definition for `__enumext_after_hyperref:`, `__enumext_hypertarget:nn`, and `__enumext_phantomsection:`.)

`__enumext_newlabel:nn`

The function `__enumext_newlabel:nn` write the information to the `.aux` file when using the `save-ref` key. The arguments taken by the function are:

#1: `\l__enumext_newlabel_arg_one_tl`
 #2: `\l__enumext_newlabel_arg_two_tl`

🔗 The trick here is to manage the number of arguments passed to `\newlabel{#1}{#2}` according to the presence of the `hyperref` package.

```

415 \cs_new_protected:Npn \__enumext_newlabel:nn #1 #2
416 {
417   \protected@write \@auxout { }
418   {
419     \token_to_str:N \newlabel {#1}
420     {
421       {#2}
422       \bool_if:NT \__enumext_hyperref_bool
423       { { \thepage } {#2} {#1} }
424       { }
425     }
426   }
427   \__enumext_hypertarget:nn {#1} { }
428   \__enumext_phantomsection:
429 }

```

(End of definition for `__enumext_newlabel:nn`.)

13.8 Internal redefining `\footnote` command

To keep the correct numbering of `\footnote` and to make it work correctly in the `enumext*` and `keyans*` environments and `mini-env` key it is necessary to redefine the `\footnote` command. This implementation is adapted from the answer given by Clea F. Rees (@cfr) in `footnotes in boxes compatible with hyperref`.

`__enumext_footnotetext:nn`
`__enumext_renew_footnote:`
`__enumext_print_footnote:`
`__enumext_renew_footnote_mini:`
`__enumext_print_footnote_mini:`

Redefinition of the `\footnote` command using `\footnotetext` and `\footnotemark` for the `mini-env` key in the `enumext` and `keyans` environments.

```

430 \cs_new_protected:Nn \__enumext_footnotetext:nn
431 {
432   \footnotetext[#1]{#2}
433 }
434 \cs_new_protected:Nn \__enumext_renew_footnote:
435 {
436   \RenewDocumentCommand \footnote { o +m }
437   {
438     \tl_if_novalue:nTF {##1}
439     {
440       \stepcounter{footnote}
441       \int_gset_eq:Nc \g__enumext_footnote_standar_int { c@footnote }
442     }
443     {
444       \int_gset:Nn \g__enumext_footnote_standar_int { ##1 }
445     }
446     \footnotemark [ \g__enumext_footnote_standar_int ]
447     \seq_gput_right:Nn \g__enumext_footnote_standar_arg_seq { ##2 }
448     \seq_gput_right:NV
449     \g__enumext_footnote_standar_int_seq \g__enumext_footnote_standar_int

```

```

450     }
451   }
452   \cs_new_protected:Nn \__enumext_print_footnote:
453   {
454     \seq_if_empty:NF \g__enumext_footnote_standar_int_seq
455     {
456       \seq_map_pairwise_function:NNN
457       \g__enumext_footnote_standar_int_seq
458       \g__enumext_footnote_standar_arg_seq
459       \__enumext_footnotetext:nn
460     }
461     \seq_gclear:N \g__enumext_footnote_standar_arg_seq
462     \seq_gclear:N \g__enumext_footnote_standar_int_seq
463   }

```

The `enumext*` and `keyans*` environments are implemented using `minipage` so we must also redefine `\footnote` to keep these numbering as if it were part of the document.

```

464   \cs_new_protected:Nn \__enumext_renew_footnote_mini:
465   {
466     \RenewDocumentCommand \footnote { o +m }
467     {
468       \tl_if_no_value:nTF {##1}
469       {
470         \stepcounter{footnote}
471         \int_gset_eq:Nc \g__enumext_footnote_starred_int { c@footnote }
472       }
473       {
474         \int_gset:Nn \g__enumext_footnote_starred_int { ##1 }
475       }
476       \footnotemark [ \g__enumext_footnote_starred_int ]
477       \seq_gput_right:Nn \g__enumext_footnote_starred_arg_seq { ##2 }
478       \seq_gput_right:NV
479       \g__enumext_footnote_starred_int_seq \g__enumext_footnote_starred_int
480     }
481   }
482   \cs_new_protected:Nn \__enumext_print_footnote_mini:
483   {
484     \seq_if_empty:NF \g__enumext_footnote_starred_int_seq
485     {
486       \seq_map_pairwise_function:NNN
487       \g__enumext_footnote_starred_int_seq
488       \g__enumext_footnote_starred_arg_seq
489       \__enumext_footnotetext:nn
490     }
491     \seq_gclear:N \g__enumext_footnote_starred_arg_seq
492     \seq_gclear:N \g__enumext_footnote_starred_int_seq
493   }

```

(End of definition for `__enumext_footnotetext:nn` and others.)

`__enumext_renew_footnote_standar:`
`__enumext_print_footnote_standar:`
`__enumext_renew_footnote_starred:`
`__enumext_print_footnote_starred:`

We encapsulate the redefinition of `\footnote` to pass it to internal `__enumext_mini_page` environment used by the `mini-env` key in the `enumext` and `keyans` environments. We will run the redefinition when `tagged` PDF is active or when the `footnotehyper` package is not loaded.

```

494   \cs_new_protected:Nn \__enumext_renew_footnote_standar:
495   {
496     \bool_if:NT \g__enumext_standar_bool
497     {
498       \IfDocumentMetadataTF
499       {
500         \__enumext_renew_footnote:
501       }
502       {
503         \bool_if:NF \l__enumext_footnotes_key_bool
504         {
505           \__enumext_renew_footnote:
506         }
507       }
508     }
509   }
510   \cs_new_protected:Nn \__enumext_print_footnote_standar:
511   {

```



```

512 \bool_if:NT \g__enumext_standar_bool
513 {
514   \IfDocumentMetadataTF
515   {
516     \__enumext_print_footnote:
517   }
518   {
519     \bool_if:NF \l__enumext_footnotes_key_bool
520     {
521       \__enumext_print_footnote:
522     }
523   }
524 }
525 }

```

We encapsulate the redefinition of `\footnote` to pass it to the `enumext*` and `keyans*` environments. We will run the redefinition when *tagged* PDF is active or when the `footnotehyper` package is not loaded.

```

526 \cs_new_protected:Nn \__enumext_renew_footnote_starred:
527 {
528   \IfDocumentMetadataTF
529   {
530     \__enumext_renew_footnote_mini:
531   }
532   {
533     \bool_if:NF \l__enumext_footnotes_key_bool
534     {
535       \__enumext_renew_footnote_mini:
536     }
537   }
538 }
539 \cs_new_protected:Nn \__enumext_print_footnote_starred:
540 {
541   \IfDocumentMetadataTF
542   {
543     \__enumext_print_footnote_mini:
544   }
545   {
546     \bool_if:NF \l__enumext_footnotes_key_bool
547     {
548       \__enumext_print_footnote_mini:
549     }
550   }
551 }

```

In `enumext*` and `keyans*` environments we need to use “hooks” to print `\footnote` with support for *tagged* PDF.

```

552 \__enumext_after_env:nn { enumext* }
553 {
554   \__enumext_print_footnote_starred:
555 }
556 \__enumext_after_env:nn { keyans* }
557 {
558   \__enumext_print_footnote_starred:
559 }

```

(End of definition for `__enumext_renew_footnote_standar:` and others.)

13.9 The internal minipage environment

```

\__enumext_internal_mini_page:
__enumext_mini_env*

```

The function `__enumext_internal_mini_page:` creates a internal `__enumext_mini_page` environment (*custom version* of `minipage`) setting the `\if@minipage` switch to “false” to allow spaces at the “above” of the environment, plus we will add `\skip_vertical:N \c_zero_skip` to maintain alignment on “top” in the first part and `\skip_vertical:N \c_zero_skip` in the second part to allow spaces “below”. This environment will be used internally by the `mini-env` key, it is NOT documented in the user interface and is for internal use only. Within this environment we redefine `\footnote` to make them look the same as if they were elsewhere in the document. This function is passed to the function `__enumext_safe_exec:` in the `enumext` environment definition (§13.39) and `__enumext_safe_exec_vii:` in the `enumext*` environment definition (§13.44)

```

560 \cs_new_protected:Nn \__enumext_internal_mini_page:
561 {
562   \int_compare:nNnT { \l__enumext_level_int } = { 0 }
563   {

```

```

564 \DeclareDocumentEnvironment{__enumext_mini_page}{ m }
565 {
566     \__enumext_renew_footnote_standar:
567     \__enumext_minipage:w [ t ] { ##1 }
568     \legacy_if_gset_false:n { @minipage }
569     \skip_vertical:N \c_zero_skip
570 }
571 {
572     \skip_vertical:N \c_zero_skip
573     \__enumext_endminipage:
574     \__enumext_print_footnote_standar:
575 }
576 }
577 }

```

(End of definition for `__enumext_internal_mini_page:` and `__enumext_mini_env*`.)

13.10 Definition of public dimension

The package `enumext` only provides a single public dimension `\itemwidth` and is intended for user convenience only and is not for internal use as such. This dimension is set in all environments and is only used by the `wrap-ans` key at its default value.

```

578 \dim_zero_new:N \itemwidth

```

13.11 Definition of counters

```

\__enumext_define_counters:Nn
enumXi
enumXii
enumXiii
enumXiv
enumXv
enumXvi
enumXvii
enumXviii

```

To create the necessary “counters” we must first make sure that they are not already defined by the user or a package such as `enumitem`, otherwise a error will be returned and the package loading will be aborted. The arguments taken by the function are:

- #1: A token list `__enumext_counter_X_tl` for “store” the counter’s name.
- #2: The counter’s name.

```

579 \cs_new_protected:Npn \__enumext_define_counters:Nn #1 #2
580 {
581     \cs_if_exist:cTF { c@ #2 }
582     { \msg_fatal:nnn { enumext } { counters } { #2 } }
583     {
584         \tl_set:Nn #1 { #2 }
585         \newcounter { #2 }
586     }
587 }

```

The counters created here are `enumXi`, `enumXii`, `enumXiii` and `enumXiv` for `enumext` environment, `enumXv` for `keyans` environment, `enumXvi` for `keyanspic` environment, `enumXvii` for `enumext*` and `enumXviii` for the `keyans*` environments.

```

588 \__enumext_define_counters:Nn \__enumext_counter_i_tl { enumXi }
589 \__enumext_define_counters:Nn \__enumext_counter_ii_tl { enumXii }
590 \__enumext_define_counters:Nn \__enumext_counter_iii_tl { enumXiii }
591 \__enumext_define_counters:Nn \__enumext_counter_iv_tl { enumXiv }
592 \__enumext_define_counters:Nn \__enumext_counter_v_tl { enumXv }
593 \__enumext_define_counters:Nn \__enumext_counter_vi_tl { enumXvi }
594 \__enumext_define_counters:Nn \__enumext_counter_vii_tl { enumXvii }
595 \__enumext_define_counters:Nn \__enumext_counter_viii_tl { enumXviii }

```

(End of definition for `__enumext_define_counters:Nn` and others.)

13.12 Definition of labels

This part of the code is inspired by the `enumitem` package. The idea is to be able to access the counters using `\arabic*`, `\Alph*`, `\alph*`, `\Roman*` and `\roman*` to use them in the `label` key.

```

\__enumext_register_counter_style:Nn

```

These `⟨counters⟩` will be used as default `⟨labels⟩` if the `label` key is not used for the different levels of the `enumext`, `enumext*`, `keyans` and `keyans*` environments, so it is necessary to get a default value for `labelwidth` from these `⟨labels⟩` at the same time.

```

596 \cs_new_protected:Npn \__enumext_register_counter_style:Nn #1 #2
597 {
598     \tl_const:cn { c__enumext_widest_ \cs_to_str:N #1 _tl } {#2}
599     \tl_gput_right:Nn \g__enumext_counter_styles_tl {#1}
600 }
601 \__enumext_register_counter_style:Nn \arabic { 0 }
602 \__enumext_register_counter_style:Nn \Alph { M }
603 \__enumext_register_counter_style:Nn \alph { m }
604 \__enumext_register_counter_style:Nn \Roman { VIII }
605 \__enumext_register_counter_style:Nn \roman { viii }

```

(End of definition for `__enumext_register_counter_style:Nn`.)

`__enumext_label_width_by_box:Nn`
`__enumext_label_width_by_box:cv`

The function `__enumext_label_width_by_box:Nn` set the default `\labelwidth` using a box width if no `labelwidth` key is passed.

```
606 \cs_new_protected:Npn \__enumext_label_width_by_box:Nn #1 #2
607 {
608   \hbox_set:Nn \__enumext_label_width_by_box {#2}
609   \dim_set:Nn #1 { \box_wd:N \__enumext_label_width_by_box }
610 }
611 \cs_generate_variant:Nn \__enumext_label_width_by_box:Nn { cv }
```

(End of definition for `__enumext_label_width_by_box:Nn`.)

`__enumext_label_style:Nnn`
`__enumext_label_style:cvn`

The function `__enumext_label_style:Nnn` is used by the `label` key to creates the variables containing the `<label style>` and will allow to use `\arabic*`, `\Alph*`, `\alph*`, `\Roman*` and `\roman*` as arguments. It loops through the defined counter styles in `\g__enumext_counter_styles_tl` (`\arabic`, `\alph`, `\Alph`, `\roman` and `\Roman`) for example, looking for `\roman*` and replacing that by `\roman{<counter>}`, and doing the same for the `\g__enumext_widest_label_tl` to keep both in sync.

```
612 \cs_new_protected:Npn \__enumext_label_style:Nnn #1 #2 #3
613 {
614   \tl_clear_new:N #1
615   \tl_put_right:Ne #1 { \tl_trim_spaces:n {#3} }
616   \tl_gset_eq:NN \g__enumext_widest_label_tl #1
617   \tl_map_inline:Nn \g__enumext_counter_styles_tl
618   {
619     \tl_replace_all:Nne #1 { ##1* } { \exp_not:N ##1 {#2} }
620     \tl_greplace_all:Nne \g__enumext_widest_label_tl { ##1* }
621     { \tl_use:c { c__enumext_widest_ \cs_to_str:N ##1 _tl } }
622   }
623   \__enumext_label_width_by_box:Nn \__enumext_current_widest_dim
624   { \tl_use:N \g__enumext_widest_label_tl }
625   \tl_set_eq:cN { the #2 } #1
626 }
627 \cs_generate_variant:Nn \__enumext_label_style:Nnn { cvn }
```

(End of definition for `__enumext_label_style:Nnn`.)

13.13 Setting keys associated with label

When *tagged* PDF is active `\makelabel` is redefined using `\makebox` to work correctly (§13.34). From the user side it is convenient to have a key that allows using this redefinition with `\makebox` without having `\IfDocumentMetadataTF` active.

`mode-box` We define the key `mode-box` only for the “first level” of `enumext` and `enumext*` environments.

```
628 \cs_set_protected:Npn \__enumext_tmp:n #1
629 {
630   \keys_define:nn { enumext / #1 }
631   {
632     mode-box .bool_set:N = \l__enumext_mode_box_bool,
633     mode-box .initial:n = false,
634     mode-box .value_forbidden:n = true,
635   }
636 }
637 \clist_map_inline:nn { level-1, enumext* } { \__enumext_tmp:n {#1} }
```

(End of definition for `mode-box`.)

`font`
`labelsep`
`labelwidth`
`wrap-label`
`wrap-label*`

Definition of keys `font`, `labelsep`, `labelwidth`, `wrap-label` and `wrap-label*` keys for `enumext` and `keyans` environments.

```
638 \cs_set_protected:Npn \__enumext_tmp:nn #1 #2
639 {
640   \keys_define:nn { enumext / #1 }
641   {
642     font .tl_set:c = { l__enumext_label_font_style_#2_tl },
643     font .value_required:n = true,
644     labelsep .dim_set:c = { l__enumext_labelsep_#2_dim },
645     labelsep .initial:n = {0.3333em},
646     labelsep .value_required:n = true,
647     labelwidth .dim_set:c = { l__enumext_labelwidth_#2_dim },
648     labelwidth .value_required:n = true,
649     wrap-label .cs_set_protected:cp = { __enumext_wrapper_label_#2:n } ##1,
```

```

650     wrap-label .initial:n = {##1},
651     wrap-label .value_required:n = true,
652     wrap-label* .code:n = {
653         \bool_set_true:c { l__enumext_wrap_label_opt_#2_bool }
654         \keys_set:nn { enumext / #1 } { wrap-label = {##1} }
655     },
656     wrap-label* .value_required:n = true,
657 }
658 }
659 \clist_map_inline:Nn \c__enumext_all_envs_clist { \__enumext_tmp:nn #1 }

```

(End of definition for font and others.)

`align` The `align` key is implemented differently for “starred” and “non starred” environments. For compatibility with tagged PDF we must set `__enumext_align_label_pos_X_str`.

```

660 \cs_set_protected:Npn \__enumext_tmp:nn #1 #2
661 {
662     \keys_define:nn { enumext / #1 }
663     {
664         align .choice:,
665         align / left .code:n =
666             {
667                 \tl_clear:c { l__enumext_label_fill_left_#2_tl }
668                 \tl_set:cn { l__enumext_label_fill_right_#2_tl } { \hfill }
669                 \str_set:cn { l__enumext_align_label_pos_#2_str } { l }
670             },
671         align / right .code:n =
672             {
673                 \tl_set:cn { l__enumext_label_fill_left_#2_tl } { \hfill }
674                 \tl_clear:c { l__enumext_label_fill_right_#2_tl }
675                 \str_set:cn { l__enumext_align_label_pos_#2_str } { r }
676             },
677         align / center .code:n =
678             {
679                 \tl_set:cn { l__enumext_label_fill_left_#2_tl } { \hfill }
680                 \tl_set:cn { l__enumext_label_fill_right_#2_tl } { \hfill }
681                 \str_set:cn { l__enumext_align_label_pos_#2_str } { c }
682             },
683         align / unknown .code:n =
684             \msg_error:nnee { enumext } { unknown-choice }
685             { align } { left,~right,~ center } { \exp_not:n {##1} },
686         align .initial:n = left,
687         align .value_required:n = true,
688     }
689 }
690 \clist_map_inline:nn
691 {
692     {level-1}{i}, {level-2}{ii}, {level-3}{iii}, {level-4}{iv}, {keyans}{v}
693 }
694 { \__enumext_tmp:nn #1 }

695 \cs_set_protected:Npn \__enumext_tmp:nn #1 #2
696 {
697     \keys_define:nn { enumext / #1 }
698     {
699         align .choice:,
700         align / left .code:n = \str_set:cn { l__enumext_align_label_#2_str } { l },
701         align / right .code:n = \str_set:cn { l__enumext_align_label_#2_str } { r },
702         align / center .code:n = \str_set:cn { l__enumext_align_label_#2_str } { c },
703         align / unknown .code:n =
704             \msg_error:nnee { enumext } { unknown-choice }
705             { align } { left,~right,~ center } { \exp_not:n {##1} },
706         align .initial:n = left,
707         align .value_required:n = true,
708     }
709 }
710 \clist_map_inline:nn { {enumext*}{vii}, {keyans*}{viii} } { \__enumext_tmp:nn #1 }

```

(End of definition for align.)

13.14 Setting label and ref keys

The implementation of the keys `label` and `ref` are part of the core of the package `enumext`, here the default values for `\label`, the value of the variables `\l__enumext_label_X_tl`, the default values for `\labelwidth` and the “*label and ref*” system.

13.14.1 Define and set label and ref keys for enumext environment

Here we set the default `\labels` of the *four levels* of `enumext` environment, along with the default value for `labelwidth` key and `ref` key.

```

label
ref
\l__enumext_label_i_tl
\l__enumext_label_ii_tl
\l__enumext_label_iii_tl
\l__enumext_label_iv_tl
711 \cs_set_protected:Npn \__enumext_tmp:nnn #1 #2 #3
712 {
713   \keys_define:nn { enumext / #1 }
714   {
715     label .code:n = {
716       \__enumext_label_style:cvn { \l__enumext_label_#2_tl }
717       { \l__enumext_counter_#2_tl } {##1}
718       \dim_set_eq:cN { \l__enumext_labelwidth_#2_dim }
719       \l__enumext_current_widest_dim
720     },
721     label .initial:n = #3,
722     label .value_required:n = true,
723     ref .code:n = \__enumext_standar_ref:n {##1},
724     ref .value_required:n = true,
725   }
726 }
727 \__enumext_tmp:nnn { level-1 } { i } { \arabic*. }
728 \__enumext_tmp:nnn { level-2 } { ii } { (\alph*. ) }
729 \__enumext_tmp:nnn { level-3 } { iii } { \roman*. }
730 \__enumext_tmp:nnn { level-4 } { iv } { \Alph*. }
```

(End of definition for `label` and others.)

```

\__enumext_standar_ref:n
\__enumext_standar_ref:
```

The `__enumext_standar_ref:n` first we will pass the key argument to `\l__enumext_ref_key_arg_tl` and we will analyze its state, if it is not *empty* we will make a copy of the current counter in `\l__enumext_ref_the_count_tl` and we will execute the function `__enumext_regex_counter_style:` which will return the modified `\l__enumext_ref_key_arg_tl` and we make the value of `\l__enumext_ref_the_count_tl` the same as that `\l__enumext_the_counter_X_tl` which contains `\theenumX` and finally we set `\l__enumext_renew_counter_X_tl` with the renewed command.

```

731 \cs_new_protected:Npn \__enumext_standar_ref:n #1
732 {
733   \tl_set:Nn \l__enumext_ref_key_arg_tl {#1}
734   \tl_if_empty:NTF \l__enumext_ref_key_arg_tl
735   {
736     \msg_error:nnn { enumext } { key-ref-empty } { enumext }
737   }
738   {
739     \tl_set_eq:Nc \l__enumext_ref_the_count_tl
740     {
741       \l__enumext_the_counter_ \__enumext_level: _tl
742     }
743     \tl_set:ce { \l__enumext_renew_counter_ \__enumext_level: _tl }
744     {
745       \exp_not:N \renewcommand { \exp_not:V \l__enumext_ref_the_count_tl }
746       { \exp_not:V \l__enumext_ref_key_arg_tl }
747     }
748   }
749 }
```

Finally the function `__enumext_standar_ref:` will execute the modification for the reference system in the second argument of the environment definition `enumext`.

```

750 \cs_new_protected:Npn \__enumext_standar_ref:
751 {
752   \tl_if_empty:cF { \l__enumext_renew_counter_ \__enumext_level: _tl }
753   {
754     \tl_use:c { \l__enumext_renew_counter_ \__enumext_level: _tl }
755   }
756 }
```

(End of definition for `__enumext_standar_ref:n` and `__enumext_standar_ref:`.)

13.14.2 Define and set label and ref keys for enumext* and keyans* environments

Here we set the default $\langle labels \rangle$ for `enumext*` and `keyans*` environments, along with the default value for `labelwidth` key and `ref` key.

```

label
ref
\l__enumext_label_vii_tl 757 \cs_set_protected:Npn \l__enumext_tmp:nnn #1 #2 #3
\l__enumext_label_viii_tl 758 {
759   \keys_define:nn { enumext / #1 }
760   {
761     label .code:n = {
762       \__enumext_label_style:cvn { \l__enumext_label_#2_tl }
763       { \l__enumext_counter_#2_tl } {##1}
764       \dim_set_eq:cN { \l__enumext_labelwidth_#2_dim }
765       \l__enumext_current_widest_dim
766     },
767     label .initial:n = #3,
768     label .value_required:n = true,
769     ref .code:n = \l__enumext_starred_ref:n {##1},
770     ref .value_required:n = true,
771   }
772 }
773 \l__enumext_tmp:nnn { enumext* } { vii } { \arabic*.}
774 \l__enumext_tmp:nnn { keyans* } { viii } { \Alph*.}

```

(End of definition for label and others.)

The implementation of `\l__enumext_starred_ref:n` is the same as that used for the environment `enumext`.

```

\l__enumext_starred_ref:n 775 \cs_new_protected:Npn \l__enumext_starred_ref:n #1
\l__enumext_starred_ref: 776 {
777   \tl_set:Nn \l__enumext_ref_key_arg_tl {#1}
778   \int_compare:nNnT { \l__enumext_level_h_int } = { 1 }
779   {
780     \tl_if_empty:NTF \l__enumext_ref_key_arg_tl
781     {
782       \msg_error:nnn { enumext } { key-ref-empty } { enumext* }
783     }
784     {
785       \tl_set_eq:NN \l__enumext_ref_the_count_tl \l__enumext_the_counter_vii_tl
786       \tl_set:Ne \l__enumext_renew_counter_vii_tl
787       {
788         \exp_not:N \renewcommand { \exp_not:V \l__enumext_ref_the_count_tl } { \exp_not:V
789       }
790     }
791   }
792   \int_compare:nNnT { \l__enumext_keyans_level_h_int } = { 1 }
793   {
794     \tl_if_empty:NTF \l__enumext_ref_key_arg_tl
795     {
796       \msg_error:nnn { enumext } { key-ref-empty } { keyans* }
797     }
798     {
799       \tl_set_eq:NN \l__enumext_ref_the_count_tl \l__enumext_the_counter_viii_tl
800       \tl_set:Ne \l__enumext_renew_counter_viii_tl
801       {
802         \exp_not:N \renewcommand { \exp_not:V \l__enumext_ref_the_count_tl } { \exp_not:V
803       }
804     }
805   }
806 }

```

Finally the function `\l__enumext_starred_ref:` will execute the modification for the reference system in the second argument of the `enumext*` and `keyans*` environment definition.

```

807 \cs_new_protected:Nn \l__enumext_starred_ref:
808 {
809   \int_compare:nNnT { \l__enumext_level_h_int } = { 1 }
810   {
811     \tl_if_empty:NF \l__enumext_renew_counter_vii_tl
812     {
813       \tl_use:N \l__enumext_renew_counter_vii_tl
814     }
815   }
816   \int_compare:nNnT { \l__enumext_keyans_level_h_int } = { 1 }
817   {

```



```

818         \tl_if_empty:NF \l__enumext_renew_counter_viii_tl
819         {
820             \tl_use:N \l__enumext_renew_counter_viii_tl
821         }
822     }
823 }

```

(End of definition for `__enumext_starred_ref:n` and `__enumext_starred_ref:.`)

13.14.3 Define and set `label` and `ref` keys for `keyans` and `keyanspic` environments

Here we set the default `<label>` for `keyans` and `keyanspic` environment, along with the default value for `labelwidth` if it has not been established and `ref` key. The `keyanspic` environment use the same `<label>` as the `keyans` environment.

```

\__enumext_label_v_tl
\__enumext_label_vi_tl
824 \keys_define:nn { enumext / keyans }
825 {
826     label .code:n = {
827         \__enumext_label_style:cnv { \__enumext_label_v_tl }
828         { \__enumext_counter_v_tl } {#1}
829         \__enumext_label_style:cnv { \__enumext_label_vi_tl }
830         { \__enumext_counter_vi_tl } {#1}
831         \dim_set_eq:NN
832         \l__enumext_labelwidth_v_dim \l__enumext_current_widest_dim
833     },
834     label .initial:n = \Alph*,
835     label .value_required:n = true,
836     ref .code:n = \__enumext_keyans_ref:n {#1},
837     ref .value_required:n = true,
838 }

```

(End of definition for `label` and others.)

The implementation of `__enumext_keyans_ref:n` is the same as that used for the environment `enumext`.

```

\__enumext_keyans_ref:n
\__enumext_keyans_ref:
839 \cs_new_protected:Npn \__enumext_keyans_ref:n #1
840 {
841     \tl_set:Nn \l__enumext_ref_key_arg_tl {#1}
842     \tl_if_empty:NTF \l__enumext_ref_key_arg_tl
843     {
844         \msg_error:nnn { enumext } { key-ref-empty } { keyans }
845     }
846     {
847         \tl_set_eq:NN \l__enumext_ref_the_count_tl \l__enumext_the_counter_v_tl
848         \tl_put_right:Ne \l__enumext_renew_counter_v_tl
849         {
850             \exp_not:N \renewcommand { \exp_not:V \l__enumext_ref_the_count_tl } { \exp_not:V \l__
851         }
852     }
853 }

```

Finally the function `__enumext_keyans_ref:` will execute the modification for the reference system in the second argument of the `keyans*` environment definition.

```

854 \cs_new_protected:Nn \__enumext_keyans_ref:
855 {
856     \tl_if_empty:NF \l__enumext_renew_counter_v_tl
857     {
858         \tl_use:N \l__enumext_renew_counter_v_tl
859     }
860 }

```

(End of definition for `__enumext_keyans_ref:n` and `__enumext_keyans_ref:.`)

13.15 Setting `start`, `start*` and `widest` keys

The function `__enumext_start_from:NNn` used by `start` and `start*` keys take three arguments:

```

\__enumext_start_from:ccn #1: \l__enumext_label_X_tl
\__enumext_start_from:cce #2: \l__enumext_start_X_int
\__enumext_start_from:cce #3: <integer or string>

```

The first argument of this function are the “*counter style*” set by `label` key, the second argument is returned by the function, the third argument can be an `<integer>` or `<string>` of the form `\Alph`, `\alph`, `\Roman` or `\roman`. This effectively allows `start=A` or `start=1` to be used.

```

861 \cs_new_protected:Npn \__enumext_start_from:NNn #1 #2 #3
862 {

```

```

863     \__enumext_if_is_int:nTF { #3 }
864     {
865         \int_set:Nn #2 {#3}
866     }
867     {
868         \regex_match:nVT { \c{Alph} | \c{alph} } {#1}
869         { \int_set:Nn #2 { \int_from_alph:n {#3} } }
870         \regex_match:nVT { \c{Roman} | \c{roman} } {#1}
871         { \int_set:Nn #2 { \int_from_roman:n {#3} } }
872     }
873 }
874 \cs_generate_variant:Nn \__enumext_start_from:NNn { ccn, cce }

```

(End of definition for __enumext_start_from:NNn.)

```

\__enumext_widest_from:nNNn
\__enumext_widest_from:nccn

```

The function __enumext_widest_from:nNNn used by the `widest` key take four arguments:

- #1: The counter associated with the environment level
- #2: __enumext_label_X_tl
- #3: __enumext_labelwidth_X_dim
- #4: *integer or string*

The second and third arguments of this function are the values set by `label` and `labelwidth` keys, the four argument can be an *integer* or *string* of the form `\Alph`, `\alph`, `\Roman` or `\roman`. The value of the four argument is set temporarily for the identified counter in this point (level), then the value is expanded into a “box” and the “width” of the “box” is returned.

```

875 \cs_new_protected:Npn \__enumext_widest_from:nNNn #1 #2 #3 #4
876 {
877     \__enumext_if_is_int:nTF {#4}
878     {
879         \setcounter{enumX#1} { #4 }
880     }
881     {
882         \regex_match:nVT { \c{Alph} | \c{alph} } {#2}
883         { \setcounter{enumX#1} { \int_from_alph:n {#4} } }
884         \regex_match:nVT { \c{Roman} | \c{roman} } {#2}
885         { \setcounter{enumX#1} { \int_from_roman:n {#4} } }
886     }
887     \__enumext_label_width_by_box:cv
888     { \__enumext_labelwidth_#1_dim } { \__enumext_label_#1_tl }
889 }
890 \cs_generate_variant:Nn \__enumext_widest_from:nNNn { nccn }

```

(End of definition for __enumext_widest_from:nNNn.)

Now define and set `start*`, `start` and `widest` keys for `enumext`, `enumext*`, `keyans` and `keyans*` environments.

`start`

`start*`

`widest`

```

891 \cs_set_protected:Npn \__enumext_tmp:nn #1 #2
892 {
893     \keys_define:nn { enumext / #1 }
894     {
895         start* .code:n = {
896             \__enumext_start_from:ccn
897             { \__enumext_label_#2_tl }
898             { \__enumext_start_#2_int } {##1}
899         },
900         start* .value_required:n = true,
901         start .code:n = {
902             \__enumext_start_from:cce
903             { \__enumext_label_#2_tl }
904             { \__enumext_start_#2_int } { \int_eval:n {##1} }
905         },
906         start .initial:n = 1,
907         start .value_required:n = true,
908         widest .code:n = {
909             \__enumext_widest_from:nccn {#2}
910             { \__enumext_label_#2_tl }
911             { \__enumext_labelwidth_#2_dim } {##1}
912         },
913         widest .value_required:n = true,
914     }
915 }
916 \clist_map_inline:Nn \__enumext_all_envs_clist { \__enumext_tmp:nn #1 }

```

(End of definition for `start`, `start*`, and `widest`.)

13.16 Setting keys for vertical spaces

Define and set `topsep`, `partopsep`, `parsep`, `itemsep`, `noitemsep` and `nosep` keys for `enumext`, `enumext*`, `keyans` and `keyans*` environments.

```

topsep
partopsep
parsep
noitemsep
nosep
917 \cs_set_protected:Npn \__enumext_tmp:nnnnnn #1 #2 #3 #4 #5 #6
918 {
919   \keys_define:nn { enumext / #1 }
920   {
921     topsep .skip_set:c = { l__enumext_topsep_#2_skip },
922     topsep .initial:n = {#3},
923     topsep .value_required:n = true,
924     partopsep .skip_set:c = { l__enumext_partopsep_#2_skip },
925     partopsep .initial:n = {#4},
926     partopsep .value_required:n = true,
927     parsep .skip_set:c = { l__enumext_parsep_#2_skip },
928     parsep .initial:n = {#5},
929     parsep .value_required:n = true,
930     itemsep .skip_set:c = { l__enumext_itemsep_#2_skip },
931     itemsep .initial:n = {#6},
932     itemsep .value_required:n = true,
933     noitemsep .meta:n = { itemsep = 0pt, parsep = 0pt },
934     noitemsep .value_forbidden:n = true,
935     nosep .meta:n = {
936       itemsep = 0pt, parsep = 0pt,
937       topsep = 0pt, partopsep = 0pt,
938     },
939     nosep .value_forbidden:n = true,
940   }
941 }
```

Now we set the values based on standard `article` class in `10pt`.

```

942 \__enumext_tmp:nnnnnn { level-1 } { i } { 8.0pt plus 2.0pt minus 4.0pt }
943 { 2.0pt plus 1.0pt minus 1.0pt } { 4.0pt plus 2.0pt minus 1.0pt }
944 { 4.0pt plus 2.0pt minus 1.0pt }
945 \__enumext_tmp:nnnnnn { level-2 } { ii } { 4.0pt plus 2.0pt minus 1.0pt }
946 { 2.0pt plus 1.0pt minus 1.0pt } { 2.0pt plus 1.0pt minus 1.0pt }
947 { 2.0pt plus 1.0pt minus 1.0pt }
948 \__enumext_tmp:nnnnnn { level-3 } { iii } { 2.0pt plus 1.0pt minus 1.0pt }
949 { 1.0pt minus 1.0pt } { 0pt } { 2.0pt plus 1.0pt minus 1.0pt }
950 \__enumext_tmp:nnnnnn { level-4 } { iv } { 2.0pt plus 1.0pt minus 1.0pt }
951 { 1.0pt minus 1.0pt } { 0pt } { 2.0pt plus 1.0pt minus 1.0pt }
952 \__enumext_tmp:nnnnnn { keyans } { v } { 4.0pt plus 2.0pt minus 1.0pt }
953 { 2.0pt plus 1.0pt minus 1.0pt } { 2.0pt plus 1.0pt minus 1.0pt }
954 { 2.0pt plus 1.0pt minus 1.0pt }
955 \__enumext_tmp:nnnnnn { enumext* } { vii } { 8.0pt plus 2.0pt minus 4.0pt }
956 { 2.0pt plus 1.0pt minus 1.0pt } { 4.0pt plus 2.0pt minus 1.0pt }
957 { 4.0pt plus 2.0pt minus 1.0pt }
958 \__enumext_tmp:nnnnnn { keyans* } { viii } { 4.0pt plus 2.0pt minus 1.0pt }
959 { 2.0pt plus 1.0pt minus 1.0pt } { 2.0pt plus 1.0pt minus 1.0pt }
960 { 2.0pt plus 1.0pt minus 1.0pt }
```

(End of definition for `topsep` and others.)

13.17 Setting base-fix key

When nesting starting right after `\item` (without material between them) there is a problem with the alignment of the *baseline* between the two environments. One way to get around this problem is to place `\mode_leave_vertical:` apply `\vspace[-\baselineskip]` and set `\topsep=0pt` for the “first level” of the nested `enumext` environment.

We define the key `base-fix` only for the “first level” of `enumext` environment.

```

base-fix
\__enumext_nested_base_line_fix:
961 \keys_define:nn { enumext / level-1 }
962 {
963   base-fix .bool_set:N = \l__enumext_base_line_fix_bool,
964   base-fix .initial:n = false,
965   base-fix .value_forbidden:n = true,
966 }
```

The function `__enumext_nested_base_line_fix:` passed to the `__enumext_parse_keys:n` function in the definition of the `enumext` environment (§13.39) will be responsible for applying the *baseline correction* and adjusting the *⟨keys⟩* for the `enumext` environment and the `\printkeyans` with *starred argument* ‘*’ (§13.47).

We will first implement the function code from the user side of the `base-fix` key, that is, only the user knows when it is necessary to apply it within the document in which case the variable `__enumext_print_keyans_star_bool` set by the `\printkeyans` command is false and the variable `__enumext_base_line_fix_bool` is true.

We set the values of the keys `topsep`, `above` and `above*` for the “first level” of `enumext` environment equal to `0pt` and finally set the variable `__enumext_base_line_fix_bool` to false.

```

967 \cs_new_protected:Nn \__enumext_nested_base_line_fix:
968 {
969   \bool_lazy_all:nT
970   {
971     { \bool_if_p:N \__enumext_starred_first_bool }
972     { \bool_if_p:N \__enumext_base_line_fix_bool }
973     { \bool_not_p:n { \__enumext_print_keyans_star_bool } }
974   }
975   {
976     \mode_leave_vertical:
977     \vspace { -\dim_eval:n { \baselineskip + \parsep } }
978     \keys_set:nn { enumext / level-1 }
979     {
980       topsep = 0pt, above = 0pt, above* = 0pt,
981     }
982   }

```

When we are running the `\printkeyans` command with the *starred argument* ‘*’ the variable `__enumext_print_keyans_star_bool` is true and we can run a simplified version of `\vspace` using `\skip_vertical:n`.

```

983   \bool_lazy_and:nnT
984   { \bool_if_p:N \__enumext_starred_first_bool }
985   { \bool_if_p:N \__enumext_print_keyans_star_bool }
986   {
987     \mode_leave_vertical:
988     \skip_vertical:n { -\baselineskip }
989     \skip_vertical:N \c_zero_skip
990     \keys_set:nn { enumext / level-1 }
991     {
992       topsep = 0pt, above = 0pt, above* = 0pt,
993     }
994   }
995   \bool_set_false:N \__enumext_base_line_fix_bool
996 }

```

(End of definition for `base-fix` and `__enumext_nested_base_line_fix:`.)

13.18 Setting keys for horizontal spaces

Define and set `itemindent`, `rightmargin`, `listparindent`, `list-offset` and `list-indent` keys for `enumext`, `enumext*`, `keyans` and `keyans*` environments.

```

997 \cs_set_protected:Npn \__enumext_tmp:nn #1 #2
998 {
999   \keys_define:nn { enumext / #1 }
1000   {
1001     itemindent .dim_set:c = { \__enumext_fake_item_indent_#2_dim },
1002     itemindent .value_required:n = true,
1003     rightmargin .dim_set:c = { \__enumext_rightmargin_#2_dim },
1004     rightmargin .value_required:n = true,
1005     listparindent .dim_set:c = { \__enumext_listparindent_#2_dim },
1006     listparindent .value_required:n = true,
1007     list-offset .dim_set:c = { \__enumext_listoffset_#2_dim },
1008     list-offset .value_required:n = true,
1009     list-indent .code:n =
1010       {
1011         \bool_set_true:c { \__enumext_leftmargin_tmp_#2_bool }
1012         \dim_set:cn { \__enumext_leftmargin_tmp_#2_dim } {##1},
1013       }
1014   }
1015   \clist_map_inline:nn
1016   {

```

```

1017     {level-1}{i}, {level-2}{ii}, {level-3}{iii}, {level-4}{iv}, {keyans}{v}
1018   }
1019   { \__enumext_tmp:nn #1 }

```

(End of definition for `itemindent` and others.)

For `enumext*` and `keyans*` environments the situation is a bit different, the `list-indent` key behaves like the `list-offset` key.

```

1020 \cs_set_protected:Npn \__enumext_tmp:nn #1 #2
1021 {
1022   \keys_define:nn { enumext / #1 }
1023   {
1024     itemindent .dim_set:c = { l__enumext_fake_item_indent_#2_dim },
1025     itemindent .value_required:n = true,
1026     rightmargin .dim_set:c = { l__enumext_rightmargin_#2_dim },
1027     rightmargin .value_required:n = true,
1028     listparindent .dim_set:c = { l__enumext_listparindent_#2_dim },
1029     listparindent .value_required:n = true,
1030     list-offset .dim_set:c = { l__enumext_listoffset_#2_dim },
1031     list-offset .value_required:n = true,
1032     list-indent .meta:n = { list-offset = ##1 },
1033     list-indent .value_required:n = true,
1034   }
1035 }
1036 \clist_map_inline:nn
1037 {
1038   {enumext*}{vii}, {keyans*}{viii}
1039 }
1040 { \__enumext_tmp:nn #1 }

```

13.18.1 Functions for setting the fake `itemindent`

The `itemindent` key does not set the value of `\itemindent`, it only sets the value of the *horizontal space* applied using `\skip_horizontal:N`. We will store this value in the variable and only apply it when it is greater than `\opt`. Here I will need to place `\mode_leave_vertical:` and the plain TeX macro `\ignorespaces` to avoid unwanted extra space when using the `itemindent` key.

```

1041 \cs_set_protected:Nn \__enumext_fake_item_indent:
1042 {
1043   \dim_compare:nNnT
1044   { \dim_use:c { l__enumext_fake_item_indent_ \__enumext_level: _dim } }
1045   >
1046   { \c_zero_dim }
1047   {
1048     \tl_set:ce { l__enumext_fake_item_indent_ \__enumext_level: _tl }
1049     {
1050       \exp_not:N \mode_leave_vertical:
1051       \exp_not:n { \skip_horizontal:n }
1052       { \dim_use:c { l__enumext_fake_item_indent_ \__enumext_level: _dim } }
1053       \exp_not:N \ignorespaces
1054     }
1055   }
1056 }
1057 \cs_set_protected:Nn \__enumext_keyans_fake_item_indent:
1058 {
1059   \dim_compare:nNnT
1060   { \l__enumext_fake_item_indent_v_dim } > { \c_zero_dim }
1061   {
1062     \tl_set:Ne \l__enumext_fake_item_indent_v_tl
1063     {
1064       \exp_not:N \mode_leave_vertical:
1065       \exp_not:N \skip_horizontal:N \l__enumext_fake_item_indent_v_dim
1066       \exp_not:N \ignorespaces
1067     }
1068   }
1069 }
1070 \cs_set_protected:Nn \__enumext_fake_item_indent_vii:
1071 {
1072   \dim_compare:nNnT
1073   { \l__enumext_fake_item_indent_vii_dim } > { \c_zero_dim }
1074   {
1075     \tl_set:Ne \l__enumext_fake_item_indent_vii_tl
1076     {

```

```

1077         \exp_not:N \skip_horizontal:N \l__enumext_fake_item_indent_vii_dim
1078         \exp_not:N \ignorespaces
1079     }
1080 }
1081 }
1082 \cs_set_protected:Nn \l__enumext_fake_item_indent_viii:
1083 {
1084     \dim_compare:nNnT
1085     { \l__enumext_fake_item_indent_viii_dim } > { \c_zero_dim }
1086     {
1087         \tl_set:Nc \l__enumext_fake_item_indent_viii_tl
1088         {
1089             \exp_not:N \skip_horizontal:N \l__enumext_fake_item_indent_viii_dim
1090             \exp_not:N \ignorespaces
1091         }
1092     }
1093 }

```

(End of definition for `\l__enumext_fake_item_indent:` and others.)

13.19 Setting show-length key

show-length

Define and set `show-length` key for `enumext`, `enumext*`, `keyans` and `keyans*` environments. The function sets the boolean variable `\l__enumext_show_length_X_bool` used in the definition of all environments to “true” and calls the function `\l__enumext_show_length:nnn` which prints all the values of the “vertical” and “horizontal” parameters calculated and used.

```

1094 \cs_set_protected:Npn \l__enumext_tmp:nn #1 #2
1095 {
1096     \keys_define:nn { enumext / #1 }
1097     {
1098         show-length .bool_set:c = { \l__enumext_show_length_#2_bool },
1099         show-length .initial:n = false,
1100     }
1101 }
1102 \clist_map_inline:Nn \c__enumext_all_envs_clist { \l__enumext_tmp:nn #1 }

```

(End of definition for `show-length`.)

13.20 Setting before, after and first keys

before

before*

after

first

Define and set `before`, `before*`, `after` and `first` keys for `enumext`, `enumext*`, `keyans` and `keyans*` environments.

```

1103 \cs_set_protected:Npn \l__enumext_tmp:nn #1 #2
1104 {
1105     \keys_define:nn { enumext / #1 }
1106     {
1107         before .tl_set:c = { \l__enumext_before_no_starred_key_#2_tl },
1108         before .value_required:n = true,
1109         before* .tl_set:c = { \l__enumext_before_starred_key_#2_tl },
1110         before* .value_required:n = true,
1111         after .tl_set:c = { \l__enumext_after_stop_list_#2_tl },
1112         after .value_required:n = true,
1113         first .tl_set:c = { \l__enumext_after_list_args_#2_tl },
1114         first .value_required:n = true,
1115     }
1116 }
1117 \clist_map_inline:Nn \c__enumext_all_envs_clist { \l__enumext_tmp:nn #1 }

```

(End of definition for `before` and others.)

13.20.1 Functions for before, after and first keys in enumext

`\l__enumext_before_args_exec:`

`\l__enumext_before_keys_exec:`

`\l__enumext_after_stop_list:`

`\l__enumext_after_args_exec:`

The function `\l__enumext_before_args_exec:` executes the `{\code}` set by the `before*` key “before” the `enumext` environment is started. The `{\code}` is executed “without” knowing any definition of the `{\arg two}` of the list: `{\code}\list{\arg one}{\arg two}`.

```

1118 \cs_new_protected:Nn \l__enumext_before_args_exec:
1119 {
1120     \tl_use:c { \l__enumext_before_starred_key_ \l__enumext_level: _tl }
1121 }

```


The function `__enumext_before_keys_exec`: executes the $\{\langle code \rangle\}$ set by the `before` key “before” the `enumext` environment is started in *second argument* of the list. The $\{\langle code \rangle\}$ is executed “knowing” all definition and values provides by $\langle keys \rangle$: `\list{\langle arg one \rangle}{\langle arg two \rangle}{\langle code \rangle}`

```
1122 \cs_new_protected:Nn \__enumext_before_keys_exec:
1123 {
1124   \tl_use:c { l__enumext_before_no_starred_key_ \__enumext_level: _tl }
1125 }
```

The function `__enumext_after_stop_list`: executes the $\{\langle code \rangle\}$ set by the `after` key “after” the `enumext` environment has finished: `\endlist{\langle code \rangle}`.

```
1126 \cs_new_protected:Nn \__enumext_after_stop_list:
1127 {
1128   \tl_use:c { l__enumext_after_stop_list_ \__enumext_level: _tl }
1129 }
```

The function `__enumext_after_args_exec`: executes the $\{\langle code \rangle\}$ set by the `first` key after the end of the second argument of the list defining the `enumext` environment, just before the first occurrence of `\item`: `\list{\langle arg one \rangle}{\langle arg two \rangle}{\langle code \rangle}\item`.

```
1130 \cs_new_protected:Nn \__enumext_after_args_exec:
1131 {
1132   \tl_use:c { l__enumext_after_list_args_ \__enumext_level: _tl }
1133 }
```

(End of definition for `__enumext_before_args_exec`: and others.)

13.20.2 Functions for before, after and first keys in keyans

Same implementation as the one used in the `enumext` environment.

```
\__enumext_before_args_exec_v:
\__enumext_before_keys_exec_v:
\__enumext_after_stop_list_v:
\__enumext_after_args_exec_v:
1134 \cs_new_protected:Nn \__enumext_before_args_exec_v:
1135 {
1136   \tl_use:N \l__enumext_before_starred_key_v_tl
1137 }
1138 \cs_new_protected:Nn \__enumext_before_keys_exec_v:
1139 {
1140   \tl_use:N \l__enumext_before_no_starred_key_v_tl
1141 }
1142 \cs_new_protected:Nn \__enumext_after_stop_list_v:
1143 {
1144   \tl_use:N \l__enumext_after_stop_list_v_tl
1145 }
1146 \cs_new_protected:Nn \__enumext_after_args_exec_v:
1147 {
1148   \tl_use:N \l__enumext_after_list_args_v_tl
1149 }
```

(End of definition for `__enumext_before_args_exec_v`: and others.)

13.20.3 Functions for before, after and first keys in enumext* and keyans*

Same implementation as the one used in the `enumext` environment.

```
\__enumext_before_args_exec_vii:
\__enumext_before_keys_exec_vii:
\__enumext_after_stop_list_vii:
\__enumext_after_args_exec_vii:
1150 \cs_new_protected:Nn \__enumext_before_args_exec_vii:
1151 {
1152   \tl_use:N \l__enumext_before_starred_key_vii_tl
1153 }
1154 \cs_new_protected:Nn \__enumext_before_args_exec_viii:
1155 {
1156   \tl_use:N \l__enumext_before_starred_key_viii_tl
1157 }
1158 \cs_new_protected:Nn \__enumext_before_keys_exec_vii:
1159 {
1160   \tl_use:N \l__enumext_before_no_starred_key_vii_tl
1161 }
1162 \cs_new_protected:Nn \__enumext_before_keys_exec_viii:
1163 {
1164   \tl_use:N \l__enumext_before_no_starred_key_viii_tl
1165 }
1166 \cs_new_protected:Nn \__enumext_after_stop_list_vii:
1167 {
1168   \tl_use:N \l__enumext_after_stop_list_vii_tl
1169 }
1170 \cs_new_protected:Nn \__enumext_after_stop_list_viii:
1171 {
1172   \tl_use:N \l__enumext_after_stop_list_viii_tl
```

```

1173   }
1174   \cs_new_protected:Nn \__enumext_after_args_exec_vii:
1175   {
1176     \tl_use:N \l__enumext_after_list_args_vii_tl
1177   }
1178   \cs_new_protected:Nn \__enumext_after_args_exec_viii:
1179   {
1180     \tl_use:N \l__enumext_after_list_args_viii_tl
1181   }

```

(End of definition for `__enumext_before_args_exec_vii:` and others.)

13.21 Setting keys for multicols and minipage

The default value of the `columns-sep` key is handled by the state of the boolean variable `\l__enumext_columns_sep_X_bool` which is handled in the internal definition of the `enumext` and `keyans` environments. Define and set `mini-env`, `mini-sep`, `columns-sep` and `columns` keys for `enumext`, `enumext*`, `keyans` and `keyans*` environments.

```

1182 \cs_set_protected:Npn \__enumext_tmp:nn #1 #2
1183 {
1184   \keys_define:nn { enumext / #1 }
1185   {
1186     mini-env .dim_set:c = { \l__enumext_minipage_right_#2_dim },
1187     mini-env .value_required:n = true,
1188     mini-sep .dim_set:c = { \l__enumext_minipage_hsep_#2_dim },
1189     mini-sep .initial:n = 0.3333em,
1190     mini-sep .value_required:n = true,
1191     columns-sep .dim_set:c = { \l__enumext_columns_sep_#2_dim },
1192     columns-sep .value_required:n = true,
1193     columns .int_set:c = { \l__enumext_columns_#2_int },
1194     columns .initial:n = 1,
1195     columns .value_required:n = true,
1196   }
1197 }
1198 \clist_map_inline:Nn \c__enumext_all_envs_clist { \__enumext_tmp:nn #1 }

```

For `enumext*` and `keyans*` environments the situation is a bit different, the command `\miniright` is not available, so we will add the keys `mini-right` and `mini-right*` to implement support for `minipage` environment.

```

1199 \cs_set_protected:Npn \__enumext_tmp:nn #1 #2
1200 {
1201   \keys_define:nn { enumext / #1 }
1202   {
1203     mini-right .tl_gset:c = { g__enumext_miniright_code_#2_tl },
1204     mini-right .value_required:n = true,
1205     mini-right* .code:n = {
1206       \bool_gset_true:c { g__enumext_minipage_center_#2_bool }
1207       \keys_set:nn { enumext / #1 } { mini-right = {##1} }
1208     },
1209     mini-right* .value_required:n = true,
1210   }
1211 }
1212 \clist_map_inline:nn { {enumext*}{vii}, {keyans*}{viii} } { \__enumext_tmp:nn #1 }

```

(End of definition for `mini-env` and others.)

13.22 Adjustment of vertical spaces for multicols

When nesting a “list environment” inside the `multicols` environment, the values of the “vertical spaces” are lost, basically the `multicols` environment takes control over them. Graphically it can be seen like in the figure 7.



Figure 7: Representation of the vertical space in `multicols` for a nested level.

To keep the desired spaces *above* and *below* in the “list environment” (`\topsep + [\partopsep]`) it is necessary to “adjust” the spaces added by the `multicols` environment. The most appropriate option in this case is to use a “context sensitive” vertical space with `\addvspace`.

• I should make it clear that the implementation here is a “*bit questionable*”. At first glance doing `\multicolsep=\topsep` seemed right, but the results were not always as expected. An almost *imperceptible* detail is that in some cases the `\itemsep` values of are “*stretched*”, possibly due to the use of `\raggedcolumns` and this affects the lower space when closing the environment, which is “*smaller*” than expected. My attempts to find the correct values using `\showoutput` and `\showboxdepth` absolutely failed.

13.22.1 Adjustment of vertical spaces for multicol in enumext

`__enumext_multi_set_vskip:` The function `__enumext_multi_set_vskip:` will take care of determining the “*adjusted spaces*” that we will apply “*above*” and “*below*” the `multicols` environment in `enumext`.

We will set the default values taking into account that \TeX is in *horizontal mode*, then we will make the settings for the *vertical mode* in which `\partopsep` comes into play.

Set the values of `\l__enumext_multicols_above_X_skip` and `\l__enumext_multicols_below_X_skip` equal to the value of `\topsep` in the *current level*.

```

1213 \cs_new_protected:Nn \__enumext_multi_set_vskip:
1214 {
1215   \skip_set:cn { \l__enumext_multicols_above_ \__enumext_level: _skip }
1216   {
1217     \skip_use:c { \l__enumext_topsep_ \__enumext_level: _skip }
1218   }
1219   \skip_set:cn { \l__enumext_multicols_below_ \__enumext_level: _skip }
1220   {
1221     \skip_use:c { \l__enumext_topsep_ \__enumext_level: _skip }
1222   }
1223   \__enumext_add_pre_parsep:
1224 }

```

(End of definition for `__enumext_multi_set_vskip:`.)

`__enumext_add_pre_parsep:` The function `__enumext_add_pre_parsep:` “*adjusted*” the value of `\l__enumext_multicols_above_X_skip` detecting the value of `\parsep` from the previous level. This is necessary since `\parsep` from the previous level affects the *vertical spaces*.

```

1225 \cs_new_protected:Nn \__enumext_add_pre_parsep:
1226 {
1227   \int_case:nn { \l__enumext_level_int }
1228   {
1229     { 2 }{
1230       \skip_if_eq:nnF { \l__enumext_parsep_i_skip } { \c_zero_skip }
1231       {
1232         \skip_add:Nn \l__enumext_multicols_above_ii_skip
1233         {
1234           \l__enumext_parsep_i_skip
1235         }
1236       }
1237     }
1238     { 3 }{
1239       \skip_if_eq:nnF { \l__enumext_parsep_ii_skip } { \c_zero_skip }
1240       {
1241         \skip_add:Nn \l__enumext_multicols_above_iii_skip
1242         {
1243           \l__enumext_parsep_ii_skip
1244         }
1245       }
1246     }
1247     { 4 }{
1248       \skip_if_eq:nnF { \l__enumext_parsep_iii_skip } { \c_zero_skip }
1249       {
1250         \skip_add:Nn \l__enumext_multicols_above_iv_skip
1251         {
1252           \l__enumext_parsep_iii_skip
1253         }
1254       }
1255     }
1256   }
1257 }

```

(End of definition for `__enumext_add_pre_parsep:`.)

`__enumext_multi_addvspace:` The function `__enumext_multi_addvspace:` will apply the spaces set using `\addvspace` “*above*” the `multicols` environment in `enumext`, taking into account whether \TeX is in *horizontal mode* or *vertical mode*.

```

1258 \cs_new_protected:Nn \__enumext_multi_addvspace:
1259 {
1260   \__enumext_multi_set_vskip:
1261   \mode_if_vertical:T
1262   {
1263     \skip_add:cn { \l__enumext_multicols_above_ \__enumext_level: }_skip }
1264     {
1265       \skip_use:c { \l__enumext_partopsep_ \__enumext_level: }_skip }
1266     }
1267     \skip_add:cn { \l__enumext_multicols_below_ \__enumext_level: }_skip }
1268     {
1269       \skip_use:c { \l__enumext_partopsep_ \__enumext_level: }_skip }
1270     }
1271   }
1272   \par\nopagebreak
1273   \addvspace{ \skip_use:c { \l__enumext_multicols_above_ \__enumext_level: }_skip } }
1274 }

```

(End of definition for `__enumext_multi_addvspace:`.)

13.22.2 Adjustment of vertical spaces for multicols in keyans

```

\__enumext_keyans_multi_set_vskip:
\__enumext_keyans_multi_addvspace:

```

The function `__enumext_keyans_multi_set_vskip:` will take care of determining the “*adjusted spaces*” that we will apply “*above*” and “*below*” the `\multicols` environment in `keyans`. The implementation of this function is the same as the one used in `enumext`.

```

1275 \cs_new_protected:Nn \__enumext_keyans_multi_set_vskip:
1276 {
1277   \skip_set:Nn \l__enumext_multicols_above_v_skip
1278   {
1279     \l__enumext_topsep_v_skip
1280   }
1281   \skip_set:Nn \l__enumext_multicols_below_v_skip
1282   {
1283     \l__enumext_topsep_v_skip
1284   }
1285 }
1286 \cs_new_protected:Nn \__enumext_keyans_multi_addvspace:
1287 {
1288   \__enumext_keyans_multi_set_vskip:
1289   \mode_if_vertical:T
1290   {
1291     \skip_add:Nn \l__enumext_multicols_above_v_skip
1292     {
1293       \skip_use:N \l__enumext_partopsep_v_skip
1294     }
1295     \skip_add:Nn \l__enumext_multicols_below_v_skip
1296     {
1297       \skip_use:N \l__enumext_partopsep_v_skip
1298     }
1299   }
1300   \par\nopagebreak
1301   \addvspace{ \l__enumext_multicols_above_v_skip }
1302 }

```

(End of definition for `__enumext_keyans_multi_set_vskip:` and `__enumext_keyans_multi_addvspace:`.)

13.23 Adjustment of vertical spaces for minipage

When nesting a “*list environment*” within the `minipage` environment, the values of the “*vertical spaces*” are lost. Graphically it can be seen like in the figure 8.

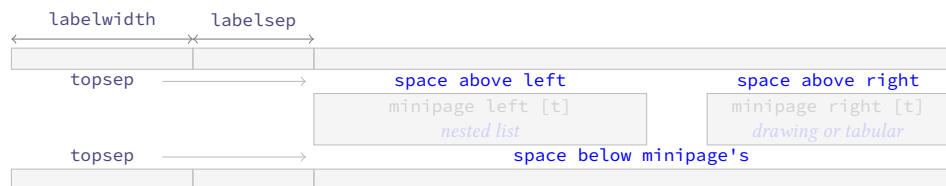


Figure 8: Representation of the `minipage` spacing adjustment for a nested level.

Since we want to keep the “*left*” and “*right*” environments “*aligned on top*”, preserving the `\baselineskip` and keep the desired “*spaces*” (`\topsep` + `[\partopsep]`) it is necessary to “*adjust*” the “*vertical spaces*” for `minipage` environments.

Here there are several complications that we must circumvent, the `minipage` environment eliminates the “top” spaces, the `multicols` environment can be nested in the `minipage` environment, the “top” and “bottom” spaces are affected when `topsep=0pt` and to this is added the `\partopsep` parameter that comes into action according to whether \TeX is in *horizontal mode* or *vertical mode*. Depending on these cases, small adjustments must be made using `\vspace` and `\addvspace` to obtain the “desired vertical spacing”.

Again I must make clear that the implementation here is a “bit questionable”, but hunting the spaces (`glue`) produced by the `minipage` environment is quite complicated, even more if `multicols` it is nested. The setting of the values was more “trial and error” (approx to `\strutbox`), using the help of the `lua-visual-debug`[15] package, again my attempts to find the correct values using `\showoutput` and `\showboxdepth` absolutely failed.

13.23.1 Adjustment of vertical spaces for minipage in enumext

`__enumext_minipage_set_skip:`
`__enumext_minipage_add_space:`

The function `__enumext_minipage_set_skip:` will take care of determining the “adjust” spaces that we will apply “above” and “below” the `__enumext_mini_page` environment in `enumext`.

First we will set the value of `__enumext_minipage_right_skip` equal to `\topsep`, then we will see if \TeX is in *vertical mode* and we will add `\partopsep`, followed by that we set the value of `__enumext_minipage_after_skip`.

```

1303 \cs_new_protected:Nn \__enumext_minipage_set_skip:
1304 {
1305   \skip_set:Nn \__enumext_minipage_right_skip
1306   {
1307     \skip_use:c { \__enumext_topsep_ \__enumext_level: _skip }
1308   }
1309   \mode_if_vertical:T
1310   {
1311     \skip_add:Nn \__enumext_minipage_right_skip
1312     {
1313       \skip_use:c { \__enumext_partopsep_ \__enumext_level: _skip }
1314     }
1315   }
1316   \skip_set_eq:NN \__enumext_minipage_after_skip \__enumext_minipage_right_skip

```

We will adjust the values `__enumext_multicols_above_X_skip` and `__enumext_multicols_below_X_skip` and call the function `__enumext_pre_itemsep_skip:`.

```

1317   \skip_set_eq:cN
1318   { \__enumext_multicols_above_ \__enumext_level: _skip } \__enumext_minipage_right_skip
1319   \skip_set_eq:cN
1320   { \__enumext_multicols_below_ \__enumext_level: _skip } \__enumext_minipage_right_skip
1321   \__enumext_pre_itemsep_skip:

```

If the environment `multicols` is active, we set `\topskip=0pt` and then we make `\multicolsep` have the same value as `__enumext_multicols_above_X_skip`.

```

1322   \int_compare:nNnT
1323   { \int_use:c { \__enumext_columns_ \__enumext_level: _int } } > { 1 }
1324   {
1325     \skip_zero:N \topskip
1326     \skip_set_eq:Nc \multicolsep { \__enumext_multicols_above_ \__enumext_level: _skip }
1327   }
1328 }

```

The function `__enumext_minipage_add_space:` will apply the spaces on the “left side” using `\addvspace` “above” the `__enumext_mini_page` environment, taking into account whether \TeX is in *horizontal mode* or *vertical mode*. Here we use the plain \TeX macro `\nointerlineskip` to prevent baseline “glue” being added between the next pair of boxes in a *vertical list*. For the latter we will make some adjustments since the `\partopsep` parameter comes into play and this affects the *vertical spacing*.

```

1329 \cs_new_protected:Nn \__enumext_minipage_add_space:
1330 {
1331   \__enumext_minipage_set_skip:
1332   \__enumext_unskip_unkern:
1333   \mode_if_vertical:TF
1334   {
1335     \nopagebreak\nointerlineskip
1336   }
1337   {
1338     \par\nopagebreak\nointerlineskip
1339     \skip_zero:c { \__enumext_partopsep_ \__enumext_level: _skip }
1340   }
1341   \int_compare:nNnTF
1342   { \int_use:c { \__enumext_columns_ \__enumext_level: _int } } > { 1 }
1343   {
1344     \addvspace{ 0.445\box_ht:N \strutbox }

```

```

1345     }
1346     {
1347         \addvspace{ 0.250\box_ht:N \strutbox }
1348     }
1349 }

```

(End of definition for `__enumext_minipage_set_skip:` and `__enumext_minipage_add_space:.`)

`__enumext_pre_itemsep_skip:` The function `__enumext_pre_itemsep_skip:` will adjust the spaces below the environment `minipage` and the environment `multicols` if it is nested in it, taking into account the value of `\itemsep` from the previous level.

```

1350 \cs_new_protected:Nn \__enumext_pre_itemsep_skip:
1351 {
1352     \int_case:nn { \__enumext_level_int }
1353     {
1354         { 2 }{
1355             \skip_if_eq:nnTF
1356             { \__enumext_itemsep_i_skip } { \__enumext_minipage_after_skip }
1357             {
1358                 \skip_set:Nn \__enumext_minipage_after_skip { 0.150\box_ht:N \strutbox }
1359                 \skip_set:Nn \__enumext_multicols_below_ii_skip { 0.350\box_ht:N \strutbox }
1360             }
1361             {
1362                 \dim_compare:nNnT
1363                 { \__enumext_itemsep_i_skip } < { \__enumext_minipage_after_skip }
1364                 {
1365                     \skip_sub:Nn
1366                     \__enumext_minipage_after_skip { \__enumext_itemsep_i_skip }
1367                     \skip_sub:Nn
1368                     \__enumext_multicols_below_ii_skip { \__enumext_itemsep_i_skip }
1369                     \skip_add:Nn
1370                     \__enumext_minipage_after_skip { 0.150\box_ht:N \strutbox }
1371                     \skip_add:Nn
1372                     \__enumext_multicols_below_ii_skip { 0.350\box_ht:N \strutbox }
1373                 }
1374                 \dim_compare:nNnT
1375                 { \__enumext_itemsep_i_skip } > { \__enumext_minipage_after_skip }
1376                 {
1377                     \skip_set:Nn \__enumext_minipage_temp_skip
1378                     {
1379                         \__enumext_itemsep_i_skip - \__enumext_minipage_after_skip
1380                     }
1381                     \skip_sub:Nn
1382                     \__enumext_minipage_after_skip { \__enumext_itemsep_i_skip }
1383                     \skip_sub:Nn
1384                     \__enumext_multicols_below_ii_skip { \__enumext_itemsep_i_skip }
1385                     \skip_add:Nn
1386                     \__enumext_minipage_after_skip
1387                     { 0.150\box_ht:N \strutbox + \__enumext_minipage_temp_skip }
1388                     \skip_add:Nn
1389                     \__enumext_multicols_below_ii_skip
1390                     { 0.350\box_ht:N \strutbox + \__enumext_minipage_temp_skip }
1391                 }
1392             }
1393         }
1394         { 3 }{
1395             \skip_if_eq:nnTF
1396             { \__enumext_itemsep_ii_skip } { \c_zero_skip }
1397             {
1398                 \skip_set:Nn \__enumext_minipage_after_skip { 0.150\box_ht:N \strutbox }
1399                 \skip_set:Nn \__enumext_multicols_below_iii_skip { 0.350\box_ht:N \strutbox }
1400             }
1401             {
1402                 \dim_compare:nNnT
1403                 { \__enumext_itemsep_ii_skip } < { \__enumext_minipage_after_skip }
1404                 {
1405                     \skip_sub:Nn
1406                     \__enumext_minipage_after_skip { \__enumext_itemsep_ii_skip }
1407                     \skip_sub:Nn
1408                     \__enumext_multicols_below_iii_skip { \__enumext_itemsep_ii_skip }
1409                     \skip_add:Nn

```



```

1410         \l__enumext_minipage_after_skip { 0.150\box_ht:N \strutbox }
1411     \skip_add:Nn
1412         \l__enumext_multicols_below_iii_skip { 0.350\box_ht:N \strutbox }
1413     }
1414     \dim_compare:nNnT
1415     { \l__enumext_itemsep_ii_skip } > { \l__enumext_minipage_after_skip }
1416     {
1417         \skip_set:Nn \l__enumext_minipage_temp_skip
1418         {
1419             \l__enumext_itemsep_ii_skip - \l__enumext_minipage_after_skip
1420         }
1421         \skip_sub:Nn
1422             \l__enumext_minipage_after_skip { \l__enumext_itemsep_ii_skip }
1423         \skip_sub:Nn
1424             \l__enumext_multicols_below_iii_skip { \l__enumext_itemsep_ii_skip }
1425         \skip_add:Nn
1426             \l__enumext_minipage_after_skip
1427             { 0.150\box_ht:N \strutbox + \l__enumext_minipage_temp_skip }
1428         \skip_add:Nn
1429             \l__enumext_multicols_below_iii_skip
1430             { 0.350\box_ht:N \strutbox + \l__enumext_minipage_temp_skip }
1431     }
1432 }
1433 }
1434 { 4 }{
1435     \skip_if_eq:nnTF { \l__enumext_itemsep_iii_skip } { \c_zero_skip }
1436     {
1437         \skip_set:Nn \l__enumext_minipage_after_skip { 0.150\box_ht:N \strutbox }
1438         \skip_set:Nn \l__enumext_multicols_below_iv_skip { 0.350\box_ht:N \strutbox }
1439     }
1440     {
1441         \dim_compare:nNnT
1442         { \l__enumext_itemsep_iii_skip } < { \l__enumext_minipage_after_skip }
1443         {
1444             \skip_sub:Nn
1445                 \l__enumext_minipage_after_skip { \l__enumext_itemsep_iii_skip }
1446             \skip_sub:Nn
1447                 \l__enumext_multicols_below_iv_skip { \l__enumext_itemsep_iii_skip }
1448             \skip_add:Nn
1449                 \l__enumext_minipage_after_skip { 0.150\box_ht:N \strutbox }
1450             \skip_add:Nn
1451                 \l__enumext_multicols_below_iv_skip { 0.350\box_ht:N \strutbox }
1452         }
1453         \dim_compare:nNnT
1454         { \l__enumext_itemsep_iii_skip } > { \l__enumext_minipage_after_skip }
1455         {
1456             \skip_set:Nn \l__enumext_minipage_temp_skip
1457             {
1458                 \l__enumext_itemsep_iii_skip - \l__enumext_minipage_after_skip
1459             }
1460             \skip_sub:Nn
1461                 \l__enumext_minipage_after_skip { \l__enumext_itemsep_iii_skip }
1462             \skip_sub:Nn
1463                 \l__enumext_multicols_below_iv_skip { \l__enumext_itemsep_iii_skip }
1464             \skip_add:Nn
1465                 \l__enumext_minipage_after_skip
1466                 { 0.150\box_ht:N \strutbox + \l__enumext_minipage_temp_skip }
1467             \skip_add:Nn
1468                 \l__enumext_multicols_below_iv_skip
1469                 { 0.350\box_ht:N \strutbox + \l__enumext_minipage_temp_skip }
1470         }
1471     }
1472 }
1473 }
1474 }

```

(End of definition for `__enumext_pre_itemsep_skip:`)

13.23.2 Adjustment of vertical spaces for minipage in keyans

The function `__enumext_keyans_mini_set_vskip:` will take care of determining the “adjusted” spaces that we will apply “*above*” and “*below*” the `__enumext_mini_page` environment in *keyans*. The implemen-

```

\__enumext_keyans_minipage_set_skip:
\__enumext_keyans_minipage_add_space:
\__enumext_keyans_pre_itemsep_skip:

```

tation of this function is the same as the one used in [enumext](#).

```

1475 \cs_new_protected:Nn \__enumext_keyans_minipage_set_skip:
1476 {
1477   \skip_zero:N \l__enumext_minipage_after_skip
1478   \skip_zero:N \l__enumext_minipage_left_skip
1479   \skip_zero:N \l__enumext_minipage_right_skip
1480   \skip_set:Nn \l__enumext_minipage_right_skip
1481   {
1482     \l__enumext_topsep_v_skip
1483   }
1484   \mode_if_vertical:T
1485   {
1486     \skip_add:Nn \l__enumext_minipage_right_skip
1487     {
1488       \l__enumext_partopsep_v_skip
1489     }
1490   }
1491   \skip_set_eq:NN \l__enumext_minipage_after_skip \l__enumext_minipage_right_skip
1492   \skip_set_eq:NN \l__enumext_multicols_above_v_skip \l__enumext_minipage_right_skip
1493   \skip_set_eq:NN \l__enumext_multicols_below_v_skip \l__enumext_minipage_right_skip
1494   \__enumext_keyans_pre_itemsep_skip:
1495   \int_compare:nNnT { \l__enumext_columns_v_int } > { 1 }
1496   {
1497     \skip_zero:N \topskip
1498     \skip_set_eq:NN \multicolsep \l__enumext_minipage_right_skip
1499   }
1500 }
1501 \cs_new_protected:Nn \__enumext_keyans_minipage_add_space:
1502 {
1503   \__enumext_keyans_minipage_set_skip:
1504   \__enumext_unskip_unkern:
1505   \mode_if_vertical:TF
1506   {
1507     \nopagebreak\nointerlineskip
1508   }
1509   {
1510     \par\nopagebreak\nointerlineskip
1511     \skip_zero:N \l__enumext_partopsep_v_skip
1512   }
1513   \int_compare:nNnTF { \l__enumext_columns_v_int } > { 1 }
1514   {
1515     \addvspace{ 0.445\box_ht:N \strutbox }
1516   }
1517   {
1518     \addvspace{ 0.250\box_ht:N \strutbox }
1519   }
1520 }
1521 \cs_new_protected:Nn \__enumext_keyans_pre_itemsep_skip:
1522 {
1523   \skip_if_eq:nnTF
1524   { \l__enumext_itemsep_i_skip } { \l__enumext_minipage_after_skip }
1525   {
1526     \skip_set:Nn \l__enumext_minipage_after_skip { 0.150\box_ht:N \strutbox }
1527     \skip_set:Nn \l__enumext_multicols_below_v_skip { 0.350\box_ht:N \strutbox }
1528   }
1529   {
1530     \dim_compare:nNnT
1531     { \l__enumext_itemsep_i_skip } < { \l__enumext_minipage_after_skip }
1532     {
1533       \skip_sub:Nn \l__enumext_minipage_after_skip { \l__enumext_itemsep_i_skip }
1534       \skip_sub:Nn \l__enumext_multicols_below_v_skip { \l__enumext_itemsep_i_skip }
1535       \skip_add:Nn \l__enumext_minipage_after_skip { 0.150\box_ht:N \strutbox }
1536       \skip_add:Nn \l__enumext_multicols_below_v_skip { 0.350\box_ht:N \strutbox }
1537     }
1538     \dim_compare:nNnT
1539     { \l__enumext_itemsep_i_skip } > { \l__enumext_minipage_after_skip }
1540     {
1541       \skip_set:Nn \l__enumext_minipage_temp_skip
1542       {
1543         \l__enumext_itemsep_i_skip - \l__enumext_minipage_after_skip
1544       }

```

```

1545         \skip_sub:Nn \l__enumext_minipage_after_skip { \l__enumext_itemsep_i_skip }
1546         \skip_sub:Nn \l__enumext_multicols_below_v_skip { \l__enumext_itemsep_i_skip }
1547         \skip_add:Nn \l__enumext_minipage_after_skip
1548             { 0.150\box_ht:N \strutbox + \l__enumext_minipage_temp_skip }
1549         \skip_add:Nn \l__enumext_multicols_below_v_skip
1550             { 0.350\box_ht:N \strutbox + \l__enumext_minipage_temp_skip }
1551     }
1552 }
1553 }

```

(End of definition for `__enumext_keyans_minipage_set_skip:`, `__enumext_keyans_minipage_add_space:`, and `__enumext_keyans_pre_itemsep_skip:`.)

13.23.3 Adjustment of vertical spaces for minipage in enumext* and keyans*

```

\__enumext_mini_set_vskip_vii:
\__enumext_mini_set_vskip_viii:

```

The functions `__enumext_mini_set_vskip_vii:` and `__enumext_mini_set_vskip_viii:` will take care of determining the “adjusted” spaces that we will apply “above” and “below” the `__enumext_mini_page` environment in `enumext*` and `keyans*`.

```

1554 \cs_new_protected:Nn \__enumext_mini_set_vskip_vii:
1555 {
1556     \skip_zero_new:N \l__enumext_minipage_left_skip
1557     \skip_gzero_new:N \g__enumext_minipage_right_skip
1558     \skip_gzero_new:N \g__enumext_minipage_after_skip
1559     \skip_if_eq:nnTF { \l__enumext_topsep_vii_skip } { \c_zero_skip }
1560     {
1561         \skip_set:Nn \l__enumext_minipage_left_skip { 0.5\box_dp:N \strutbox }
1562         \skip_gset:Nn \g__enumext_minipage_right_skip { 0.325\box_dp:N \strutbox }
1563     }
1564     {
1565         \skip_set:Nn \l__enumext_minipage_left_skip { 0.5875\box_dp:N \strutbox }
1566         \skip_gset:Nn \g__enumext_minipage_right_skip
1567             {
1568                 \l__enumext_topsep_vii_skip
1569             }
1570         \skip_gset:Nn \g__enumext_minipage_after_skip
1571             {
1572                 0.325\box_dp:N \strutbox + \l__enumext_topsep_vii_skip
1573             }
1574     }
1575 }
1576 \cs_new_protected:Nn \__enumext_mini_set_vskip_viii:
1577 {
1578     \skip_zero_new:N \l__enumext_minipage_after_skip
1579     \skip_zero_new:N \l__enumext_minipage_left_skip
1580     \skip_zero_new:N \l__enumext_minipage_right_skip
1581     \skip_if_eq:nnTF { \l__enumext_topsep_viii_skip } { \c_zero_skip }
1582     {
1583         \skip_set:Nn \l__enumext_minipage_left_skip
1584             {
1585                 0.5\box_dp:N \strutbox
1586             }
1587         \skip_set:Nn \l__enumext_minipage_right_skip
1588             {
1589                 \l__enumext_parttopsep_viii_skip
1590             }
1591         \skip_set:Nn \l__enumext_minipage_after_skip
1592             {
1593                 1.6\box_dp:N \strutbox
1594             }
1595     }
1596     {
1597         \skip_set:Nn \l__enumext_minipage_left_skip
1598             {
1599                 0.5875\box_dp:N \strutbox
1600             }
1601         \skip_set:Nn \l__enumext_minipage_right_skip
1602             {
1603                 \l__enumext_topsep_viii_skip
1604             }
1605         \skip_set:Nn \l__enumext_minipage_after_skip
1606             {
1607                 0.325\box_dp:N \strutbox + \l__enumext_topsep_viii_skip

```

```

1608     }
1609   }
1610 }

```

(End of definition for `__enumext_mini_set_vskip_vii:` and `__enumext_mini_set_vskip_viii:`)

```

\__enumext_mini_addvspace_vii:
\__enumext_mini_addvspace_viii:

```

The functions `__enumext_mini_addvspace_vii:` and `__enumext_mini_addvspace_viii:` will apply the vertical space “only above” the `__enumext_mini_page` environment on the *left side* when the `mini-right` key is active in the `enumext*` and `keyans*` environments.

Here we will NOT take into account whether \TeX is in $\langle horizontal mode \rangle$ or $\langle vertical mode \rangle$, since `\partopsep` is equal to `\opt` in both environments.

```

1611 \cs_new_protected:Nn \__enumext_mini_addvspace_vii:
1612 {
1613   \__enumext_mini_set_vskip_vii:
1614   \par\nopagebreak
1615   \addvspace { \l__enumext_minipage_left_skip }
1616 }
1617 \cs_new_protected:Nn \__enumext_mini_addvspace_viii:
1618 {
1619   \__enumext_mini_set_vskip_viii:
1620   \par\nopagebreak
1621   \addvspace { \l__enumext_minipage_left_skip }
1622 }

```

(End of definition for `__enumext_mini_addvspace_vii:` and `__enumext_mini_addvspace_viii:`)

13.23.4 The command `\miniright`

The command `\miniright` will close the `__enumext_mini_page` environment on the “left side”, open the `__enumext_mini_page` environment on the “right side” adding the *adjusted vertical space*. By default we will add `\centering` when starting the “right side” environment. The *starred argument* ‘`*`’ inhibits the use of `\centering` command i.e. the usual \TeX justification is maintained in the `__enumext_mini_page` on the “right side”.

`\miniright` First we will perform some checks to prevent the command from being executed outside the `enumext` environment or somewhere inappropriate then we will call the internal functions to execute it in the `enumext` and `keyans` environments.

```

1623 \NewDocumentCommand \miniright { s }
1624 {
1625   \int_compare:nNt { \l__enumext_keyans_pic_level_int } = { 1 }
1626   {
1627     \msg_error:nnn { enumext } { wrong-miniright-place }
1628   }
1629   % outside
1630   \bool_lazy_and:nnT
1631   { \int_compare_p:nNn { \l__enumext_level_int } = { 0 } }
1632   { \int_compare_p:nNn { \l__enumext_level_h_int } = { 0 } }
1633   {
1634     \msg_error:nnn { enumext } { wrong-miniright-place }
1635   }
1636   % starred env
1637   \bool_lazy_and:nnT
1638   { \bool_if_p:N \g__enumext_starred_bool }
1639   { \bool_not_p:n { \l__enumext_standar_bool } }
1640   {
1641     \msg_error:nnn { enumext } { wrong-miniright-starred }
1642   }
1643   % exec
1644   \int_compare:nNtTF { \l__enumext_keyans_level_int } = { 1 }
1645   {
1646     \__enumext_keyans_mini_right_cmd:n {#1}
1647   }
1648   { \__enumext_mini_right_cmd:n {#1} }
1649 }

```

(End of definition for `\miniright`. This function is documented on page 11.)

```
\__enumext_mini_right_cmd:n
```

The function `__enumext_mini_right_cmd:n` takes as argument the *starred* ‘`*`’ of the `\miniright` command in the `enumext` environment. We check if the `mini-env` key is active via the variable `\l__enumext_minipage_right_X_dim`, if so we close the `multicols` environment with the `__enumext_mini_page` environment on the “left side”, then we open the `__enumext_mini_page` environment on the “right side”,

apply our adjusted “vertical spaces”, followed by adding the `\centering` command when the *starred* argument ‘*’ is not present and set zero `\g__enumext_minipage_stat_int`, otherwise we return an error.

```

1650 \cs_new_protected:Npn \__enumext_mini_right_cmd:n #1
1651 {
1652   \dim_compare:nNnTF
1653     { \dim_use:c { \l__enumext_minipage_right_ \__enumext_level: _dim } } > { \c_zero_dim }
1654     {
1655       \__enumext_multicols_stop:
1656       \int_compare:nNnTF
1657         { \int_use:c { \l__enumext_columns_ \__enumext_level: _int } } = { 1 }
1658         {
1659           \par\addvspace{ \l__enumext_minipage_after_skip }
1660         }
1661       \end__enumext_mini_page
1662       \hfill
1663       \__enumext_mini_page{ \dim_use:c { \l__enumext_minipage_right_ \__enumext_level: _dim } }
1664       \par\nointerlineskip
1665       \addvspace { \l__enumext_minipage_right_skip }
1666       \bool_if:nF {#1}
1667       {
1668         \centering
1669       }
1670       \int_gzero:N \g__enumext_minipage_stat_int
1671     }
1672     { \msg_error:nnn { enumext } { wrong-miniright-use } }
1673   % paranoia
1674   \RenewDocumentCommand \miniright { s }
1675   {
1676     \msg_error:nn { enumext } { many-miniright-used }
1677   }
1678 }

```

(End of definition for `__enumext_mini_right_cmd:n`.)

`__enumext_keyans_mini_right_cmd:n`

The function `__enumext_keyans_mini_right_cmd:n` takes as argument the *starred* ‘*’ of the `\miniright` command in the `keyans` environment. The implementation of this function is the same as that of the `__enumext_mini_right_cmd:n` function of the `enumext` environment.

```

1679 \cs_new_protected:Npn \__enumext_keyans_mini_right_cmd:n #1
1680 {
1681   \dim_compare:nNnTF { \l__enumext_minipage_right_v_dim } > { \c_zero_dim }
1682   {
1683     \__enumext_keyans_multicols_stop:
1684     \int_compare:nNnTF { \l__enumext_columns_v_int } = { 1 }
1685     {
1686       \par\addvspace{ \l__enumext_minipage_after_skip }
1687     }
1688     \end__enumext_mini_page
1689     \hfill
1690     \__enumext_mini_page{ \l__enumext_minipage_right_v_dim }
1691     \par\nointerlineskip
1692     \addvspace { \l__enumext_minipage_right_skip }
1693     \bool_if:nF {#1}
1694     {
1695       \centering
1696     }
1697     \int_gzero:N \g__enumext_minipage_stat_int
1698   }
1699   { \msg_error:nnn { enumext } { wrong-miniright-use } }
1700   % paranoia
1701   \RenewDocumentCommand \miniright { s }
1702   {
1703     \msg_error:nn { enumext } { many-miniright-used }
1704   }
1705 }

```

(End of definition for `__enumext_keyans_mini_right_cmd:n`.)

13.24 Setting above and below keys

While having controlled the *vertical spaces* within the `enumext` and `keyans` environments when using the `columns` or `mini-env` keys, sometimes the “vertical spaces above” or “vertical spaces below” the environments are not as expected and it is necessary to be able to apply a “fine correction” to these. As I have not been able

to correct these *glitches*, the best option is to leave a couple of (*keys*) dedicated to this purpose, in this case it is best to use `\vspace` or `\vspace*` when convenient.

Define `above`, `above*`, `below` and `below*` keys for `enumext` and `keyans` environments.

```

1706 \cs_set_protected:Npn \__enumext_tmp:nn #1 #2
1707 {
1708   \keys_define:nn { enumext / #1 }
1709   {
1710     above .skip_set:c = { l__enumext_vspace_above_#2_skip },
1711     above .value_required:n = true,
1712     above* .code:n      = \bool_set_true:c { l__enumext_vspace_a_star_#2_bool }
1713                      \keys_set:nn { enumext / #1 } { above = {##1} },
1714     above* .value_required:n = true,
1715     below .skip_set:c = { l__enumext_vspace_below_#2_skip },
1716     below .value_required:n = true,
1717     below* .code:n     = \bool_set_true:c { l__enumext_vspace_b_star_#2_bool }
1718                      \keys_set:nn { enumext / #1 } { below = {##1} },
1719     below* .value_required:n = true,
1720   }
1721 }
1722 \clist_map_inline:Nn \c__enumext_all_envs_clist { \__enumext_tmp:nn #1 }

```

(End of definition for `above` and others.)

13.24.1 Functions for `above` and `below` keys in `enumext`

`__enumext_vspace_above:` The function `__enumext_vspace_above:` apply the *vertical space above* the `enumext` environment set by the `above*` and `above` keys.

```

1723 \cs_new_protected:Nn \__enumext_vspace_above:
1724 {
1725   \skip_if_eq:nnF
1726   { \skip_use:c { l__enumext_vspace_above_ \__enumext_level: _skip } } { \c_zero_skip }
1727   {
1728     \bool_if:cTF { l__enumext_vspace_a_star_ \__enumext_level: _bool }
1729     {
1730       \vspace*{ \skip_use:c { l__enumext_vspace_above_ \__enumext_level: _skip } }
1731     }
1732     {
1733       \vspace { \skip_use:c { l__enumext_vspace_above_ \__enumext_level: _skip } }
1734     }
1735   }
1736 }

```

(End of definition for `__enumext_vspace_above:`.)

`__enumext_vspace_below:` The function `__enumext_vspace_below:` apply the *vertical space below* the `enumext` environment set by the `below*` and `below` keys.

```

1737 \cs_new_protected:Nn \__enumext_vspace_below:
1738 {
1739   \skip_if_eq:nnF
1740   { \skip_use:c { l__enumext_vspace_below_ \__enumext_level: _skip } } { \c_zero_skip }
1741   {
1742     \bool_if:cTF { l__enumext_vspace_b_star_ \__enumext_level: _bool }
1743     {
1744       \vspace*{ \skip_use:c { l__enumext_vspace_below_ \__enumext_level: _skip } }
1745     }
1746     {
1747       \vspace { \skip_use:c { l__enumext_vspace_below_ \__enumext_level: _skip } }
1748     }
1749   }
1750 }

```

(End of definition for `__enumext_vspace_below:`.)

13.24.2 Functions for `above` and `below` keys in `keyans`

`__enumext_vspace_above_v:` The function `__enumext_vspace_above_v:` apply the *vertical space above* the `keyans` environment set by the `above` and `above*` keys.

```

1751 \cs_new_protected:Nn \__enumext_vspace_above_v:
1752 {
1753   \skip_if_eq:nnF { \l__enumext_vspace_above_v_skip } { \c_zero_skip }
1754   {
1755     \bool_if:NTF \l__enumext_vspace_a_star_v_bool

```

```

1756         {
1757             \vspace*{ \l__enumext_vspace_above_v_skip }
1758         }
1759         { \vspace { \l__enumext_vspace_above_v_skip } }
1760     }
1761 }

```

(End of definition for \l__enumext_vspace_above_v:.)

\l__enumext_vspace_below_v:

The function \l__enumext_vspace_below_v: apply the *vertical space below* the **keyans** environment set by the **below*** and **below** keys.

```

1762 \cs_new_protected:Nn \l__enumext_vspace_below_v:
1763 {
1764     \skip_if_eq:nnF { \l__enumext_vspace_below_v_skip } { \c_zero_skip }
1765     {
1766         \bool_if:NTF \l__enumext_vspace_b_star_v_bool
1767         {
1768             \vspace*{ \l__enumext_vspace_below_v_skip }
1769         }
1770         { \vspace { \l__enumext_vspace_below_v_skip } }
1771     }
1772 }

```

(End of definition for \l__enumext_vspace_below_v:.)

13.24.3 Functions for above and below keys in enumext* keyans*

\l__enumext_vspace_above_vii:

The functions \l__enumext_vspace_above_vii: and \l__enumext_vspace_above_viii: apply the *vertical space above* the **enumext*** and **keyans*** environments set by the **above** and **above*** keys.

\l__enumext_vspace_above_viii:

```

1773 \cs_new_protected:Nn \l__enumext_vspace_above_vii:
1774 {
1775     \skip_if_eq:nnF { \l__enumext_vspace_above_vii_skip } { \c_zero_skip }
1776     {
1777         \bool_if:NTF \l__enumext_vspace_a_star_vii_bool
1778         {
1779             \vspace*{ \l__enumext_vspace_above_vii_skip }
1780         }
1781         { \vspace { \l__enumext_vspace_above_vii_skip } }
1782     }
1783 }
1784 \cs_new_protected:Nn \l__enumext_vspace_above_viii:
1785 {
1786     \skip_if_eq:nnF { \l__enumext_vspace_above_viii_skip } { \c_zero_skip }
1787     {
1788         \bool_if:NTF \l__enumext_vspace_a_star_viii_bool
1789         {
1790             \vspace*{ \l__enumext_vspace_above_viii_skip }
1791         }
1792         { \vspace { \l__enumext_vspace_above_viii_skip } }
1793     }
1794 }

```

(End of definition for \l__enumext_vspace_above_vii: and \l__enumext_vspace_above_viii:.)

\l__enumext_vspace_below_vii:

The functions \l__enumext_vspace_below_vii: and \l__enumext_vspace_below_viii: apply the *vertical space below* the **enumext*** and **keyans*** environments set by the **below*** and **below** keys.

\l__enumext_vspace_below_viii:

```

1795 \cs_new_protected:Nn \l__enumext_vspace_below_vii:
1796 {
1797     \skip_if_eq:nnF { \l__enumext_vspace_below_vii_skip } { \c_zero_skip }
1798     {
1799         \bool_if:NTF \l__enumext_vspace_b_star_vii_bool
1800         {
1801             \vspace*{ \l__enumext_vspace_below_vii_skip }
1802         }
1803         { \vspace { \l__enumext_vspace_below_vii_skip } }
1804     }
1805 }
1806 \cs_new_protected:Nn \l__enumext_vspace_below_viii:
1807 {
1808     \skip_if_eq:nnF { \l__enumext_vspace_below_viii_skip } { \c_zero_skip }
1809     {
1810         \bool_if:NTF \l__enumext_vspace_b_star_viii_bool

```



```

1811         {
1812             \vspace*{ \l__enumext_vspace_below_viii_skip }
1813         }
1814         { \vspace { \l__enumext_vspace_below_viii_skip } }
1815     }
1816 }

```

(End of definition for `__enumext_vspace_below_vii:` and `__enumext_vspace_below_viii:`.)

13.25 Setting series, resume and resume* keys

The `series` key is responsible for the whole process of the `resume` and `resume*` keys. The idea behind this is to be able to absorb the $\langle keys \rangle$ passed to the *optional argument* of the “first level” of the environments `enumext` and `enumext*`, but, discarding some specific $\langle keys \rangle$. This implementation is adapted directly from the code provided by Jonathan P. Spratte (@Skillmon) in `chat-Tex-SX`

```

series We define the keys series, resume and resume* only for the “first level” of enumext and enumext*.
resume
resume*
1817 \cs_set_protected:Npn \__enumext_tmp:n #1
1818 {
1819     \keys_define:nn { enumext / #1 }
1820     {
1821         series .str_set:N = \l__enumext_series_str,
1822         series .value_required:n = true,
1823         resume .code:n = \__enumext_resume_series:n {##1},
1824         resume* .code:n = \__enumext_resume_starred:,
1825         resume* .value_forbidden:n = true,
1826     }
1827 }
1828 \clist_map_inline:nn { level-1, enumext* } { \__enumext_tmp:n {#1} }

```

(End of definition for `series`, `resume`, and `resume*`.)

13.25.1 Internal functions for series key

`__enumext_filter_series:n` The function `__enumext_filter_series:n` will be in charge of filtering the $\langle keys \rangle$ we want to store where `{#1}` represents the *optional argument* passed to the environment.

```

1829 \cs_new:Npn \__enumext_filter_series:n #1
1830 {
1831     \use:e
1832     {
1833         \keyval_parse:NNn
1834         \__enumext_filter_series_key:n
1835         \__enumext_filter_series_pair:nn {#1}
1836     }
1837 }

```

The function `__enumext_filter_series_key:n` will be responsible for filtering the $\langle keys \rangle$ that are passed “without value” by excluding the `resume`, `resume*` and `base-fix` keys.

```

1838 \cs_new:Npn \__enumext_filter_series_key:n #1
1839 {
1840     \str_case:nnF {#1}
1841     {
1842         { resume } {} { resume* } {} { base-fix } {}
1843     }
1844     { , { \exp_not:n {#1} } }
1845 }

```

The function `__enumext_filter_series_pair:nn` will be responsible for filtering the $\langle keys \rangle$ that are passed “with value” by excluding the `series`, `resume`, `start`, `start*`, `save-ans` and `save-key` keys.

```

1846 \cs_new:Npn \__enumext_filter_series_pair:nn #1#2
1847 {
1848     \str_case:nnF {#1}
1849     {
1850         { series } {} { resume } {} { start } {}
1851         { start* } {} { save-ans } {} { save-key } {}
1852     }
1853     { , { \exp_not:n {#1} } = { \exp_not:n {#2} } }
1854 }

```

(End of definition for `__enumext_filter_series:n`, `__enumext_filter_series_key:n`, and `__enumext_filter_series_pair:nn`.)

```

\__enumext_parse_series:n
\__enumext_resume_last:n

```

The function `__enumext_parse_series:n` will be responsible for storing the filtered *(keys)* in the global variable `\g__enumext_series_⟨series name⟩_tl` along with the creation of the integer variable `\g__enumext_series_⟨series name⟩_int` when the key is passed as an argument; otherwise, it will check the state of the boolean variable `\l__enumext_resume_active_bool` set by the keys `resume` and `resume*` and will call the function `__enumext_resume_last:n`.

- The value of boolean variable `\l__enumext_resume_active_bool` is set to true by the function `__enumext_resume_counter:n` which is used by the keys `resume` and `resume*`, in this case we must Make sure it is set to false so that it does not overwrite the default filtered *(keys)*. This function is passed to the function `__enumext_parse_keys:n` in the `enumext` environment definition (§13.39) and to the function `__enumext_parse_keys_vii:n` in the `enumext*` environment definition (§13.44).

```

1855 \cs_new_protected:Npn \__enumext_parse_series:n #1
1856 {
1857   \str_if_empty:NTF \l__enumext_series_str
1858   {
1859     \bool_if:NF \l__enumext_resume_active_bool
1860     {
1861       \__enumext_resume_last:n {#1}
1862     }
1863   }
1864   {
1865     \tl_gclear_new:c { g__enumext_series_ \l__enumext_series_str_tl }
1866     \tl_gset:ce { g__enumext_series_ \l__enumext_series_str_tl }
1867       { \__enumext_filter_series:n {#1} }
1868     \int_if_exist:cF { g__enumext_series_ \l__enumext_series_str_int }
1869     {
1870       \int_new:c { g__enumext_series_ \l__enumext_series_str_int }
1871     }
1872   }
1873 }

```

The function `__enumext_resume_last:n` will be in charge of saving the filtering *(keys)* when the `series` key is *not used* and will save them in the variable `\g__enumext_standar_series_tl` for the `enumext` environment and in the variable `\g__enumext_starred_series_tl` for the `enumext*` environment.

```

1874 \cs_new_protected:Npn \__enumext_resume_last:n #1
1875 {
1876   \bool_if:NT \l__enumext_standar_first_bool
1877   {
1878     \tl_gclear:N \g__enumext_standar_series_tl
1879     \tl_gset:Ne \g__enumext_standar_series_tl { \__enumext_filter_series:n {#1} }
1880   }
1881   \bool_if:NT \l__enumext_starred_first_bool
1882   {
1883     \tl_gclear:N \g__enumext_starred_series_tl
1884     \tl_gset:Ne \g__enumext_starred_series_tl { \__enumext_filter_series:n {#1} }
1885   }
1886 }

```

(End of definition for `__enumext_parse_series:n` and `__enumext_resume_last:n`)

13.25.2 Internal function to save counter value

```

\__enumext_resume_save_counter:

```

The `__enumext_resume_save_counter:` function will save the last counter value to `\g__enumext_series_⟨series name⟩_int` if the `series={⟨series name⟩}` key has been passed, to `\g__enumext_resume_int` if it has passed the key `resume without value` and the key `series` is not active, in `\g__enumext_series_⟨series name⟩_int` if the key `resume={⟨series name⟩}` has been passed and in `\g__enumext_series_⟨store name⟩_int` if the key has been passed `save-ans={⟨store name⟩}`.

- The variables `\l__enumext_series_str` and `\l__enumext__resume_name_tl` contain the same *{⟨series name⟩}* but are executed at different moments, the integer variable with `\l__enumext_series_str` sets the value when execute `series={⟨series name⟩}` and the integer variable with `\l__enumext__resume_name_tl` sets the subsequent values when use `resume={⟨series name⟩}`. This function is passed to the `enumext` environment definition (§13.39) and the `enumext*` environment definition (§13.44).

```

1887 \cs_new_protected:Npn \__enumext_resume_save_counter:
1888 {
1889   \bool_if:NT \g__enumext_standar_bool
1890   {
1891     \tl_if_empty:NF \l__enumext_series_str
1892     {
1893       \int_gset_eq:cN
1894         { g__enumext_series_ \l__enumext_series_str_int } \value{enumXi}
1895     }

```

```

1896         \tl_if_empty:NTF \l__enumext_resume_name_tl
1897         {
1898             \str_if_empty:NT \l__enumext_series_str
1899             {
1900                 \int_gset_eq:NN \g__enumext_resume_int \value{enumXi}
1901             }
1902         }
1903         {
1904             \int_if_exist:cT { g__enumext_series_ \l__enumext_resume_name_tl _int }
1905             {
1906                 \int_gset_eq:cN
1907                 { g__enumext_series_ \l__enumext_resume_name_tl _int } \value{enumXi}
1908             }
1909         }
1910         \int_if_exist:cT { g__enumext_resume_ \l__enumext_store_name_tl _int }
1911         {
1912             \int_gset_eq:cN
1913             { g__enumext_resume_ \l__enumext_store_name_tl _int } \value{enumXi}
1914         }
1915     }
1916     \bool_if:NT \g__enumext_starred_bool
1917     {
1918         \tl_if_empty:NF \l__enumext_series_str
1919         {
1920             \int_gset_eq:cN
1921             { g__enumext_series_ \l__enumext_series_str _int } \value{enumXvii}
1922         }
1923         \tl_if_empty:NTF \l__enumext_resume_name_tl
1924         {
1925             \str_if_empty:NT \l__enumext_series_str
1926             {
1927                 \int_gset_eq:NN \g__enumext_resume_vii_int \value{enumXvii}
1928             }
1929         }
1930         {
1931             \int_if_exist:cT { g__enumext_series_ \l__enumext_resume_name_tl _int }
1932             {
1933                 \int_gset_eq:cN
1934                 { g__enumext_series_ \l__enumext_resume_name_tl _int } \value{enumXvii}
1935             }
1936         }
1937         \int_if_exist:cT { g__enumext_resume_ \l__enumext_store_name_tl _int }
1938         {
1939             \int_gset_eq:cN
1940             { g__enumext_resume_ \l__enumext_store_name_tl _int } \value{enumXvii}
1941         }
1942     }
1943 }

```

(End of definition for `__enumext_resume_save_counter:`.)

13.25.3 Internal functions for resume key

`__enumext_resume_series:n`

The function `__enumext_resume_series:n` will handle the argument passed to the `resume` key in `enumext` and `enumext*` environments. If the key is passed *without value* the function `__enumext_resume_counter:` is executed which will set the counter according to the numbering of the last `enumext` or `enumext*` environments in which `series={⟨series name⟩}` key is not present, if the `save-ans` key is active it will set the counter according to the value of the integer variable created by that key, otherwise it will verify that the `\g__enumext_series_⟨series name⟩_tl` variable set by the `series` key exists, if so it will pass these keys to the *first level* of the environment, otherwise it will return an error.

```

1944 \cs_new_protected:Npn \__enumext_resume_series:n #1
1945 {
1946     \tl_if_empty:nTF {#1}
1947     {
1948         \__enumext_resume_counter:n { #1 }
1949     }
1950     {
1951         \tl_if_exist:cTF { g__enumext_series_ \tl_to_str:n {#1} _tl }
1952         {
1953             \__enumext_resume_counter:n {#1}
1954             \bool_if:NT \g__enumext_standar_bool
1955             {

```

```

1956         \keys_set:nv { enumext / level-1 }
1957         { g__enumext_series_ \tl_to_str:n {#1} _tl }
1958     }
1959     \bool_if:NT \g__enumext_starred_bool
1960     {
1961         \keys_set:nv { enumext / enumext* }
1962         { g__enumext_series_ \tl_to_str:n {#1} _tl }
1963     }
1964 }
1965 {
1966     \bool_if:NT \g__enumext_standar_bool
1967     {
1968         \msg_error:nnn { enumext } { unknown-series } {#1}
1969     }
1970     \bool_if:NT \g__enumext_starred_bool
1971     {
1972         \msg_error:nnn { enumext } { unknown-series } {#1}
1973     }
1974 }
1975 }
1976 }

```

(End of definition for __enumext_resume_series:n)

```

\__enumext_resume_counter:n
\__enumext_resume_counter:
  \__enumext_resume_counter_series:
  \__enumext_resume_counter_save_ans:

```

The function `__enumext_resume_counter:n` will set the variable `__enumext_resume_active_bool` to true and pass the value of the key `resume` to the variable `__enumext_series_name_tl` which will contain the `{\series name}`. If the variable `__enumext_series_name_tl` is empty, that is, we are passing the key `resume` *without value*, we will execute the function `__enumext_resume_counter:`; otherwise, when we pass `resume={\series name}` we will execute the function `__enumext_resume_counter_series:`, finally we will execute the function `__enumext_resume_counter_save_ans:` which is associated with the key `save-ans`.

```

1977 \cs_new_protected:Npn \__enumext_resume_counter:n #1
1978 {
1979     \bool_set_true:N \__enumext_resume_active_bool
1980     \tl_set:Nn \__enumext_resume_name_tl {#1}
1981     \tl_if_empty:NTF \__enumext_resume_name_tl
1982     {
1983         \__enumext_resume_counter:
1984     }
1985     {
1986         \__enumext_resume_counter_series:
1987     }
1988     \__enumext_resume_counter_save_ans:
1989 }

```

The `__enumext_resume_counter:` function is executed when the `resume` key is used *without value*, only the counters for the “first level” of the environments will be set.

```

1990 \cs_new_protected:Nn \__enumext_resume_counter:
1991 {
1992     \bool_if:NT \g__enumext_standar_bool
1993     {
1994         \int_gincr:N \g__enumext_resume_int
1995         \int_set_eq:NN \__enumext_start_i_int \g__enumext_resume_int
1996     }
1997     \bool_if:NT \g__enumext_starred_bool
1998     {
1999         \int_gincr:N \g__enumext_resume_vii_int
2000         \int_set_eq:NN \__enumext_start_vii_int \g__enumext_resume_vii_int
2001     }
2002 }

```

The function `__enumext_resume_counter_series:` will be executed when the `resume={\series name}` key is active, setting the counters for the “first level” of the environments according to the value of the integer variables created by the `series` key.

```

2003 \cs_new_protected:Nn \__enumext_resume_counter_series:
2004 {
2005     \bool_if:NT \g__enumext_standar_bool
2006     {
2007         \int_set:Nn \__enumext_start_i_int
2008         {
2009             \int_use:c { g__enumext_series_ \__enumext_resume_name_tl _int } + 1

```

```

2010     }
2011   }
2012   \bool_if:NT \g__enumext_starred_bool
2013   {
2014     \int_set:Nn \l__enumext_start_vii_int
2015     {
2016       \int_use:c { g__enumext_series_ \l__enumext_resume_name_tl _int } + 1
2017     }
2018   }
2019 }

```

The function `__enumext_resume_counter_save_ans:` will be executed when the `save-ans` key is active along with the `resume` key, setting the counters for the “first level” of the environments according to the value of the integer variables created by the `save-ans` key.

```

2020 \cs_new_protected:Nn \__enumext_resume_counter_save_ans:
2021 {
2022   \bool_lazy_and:nnT
2023   { \bool_if_p:N \l__enumext_standar_first_bool }
2024   { \bool_if_p:N \l__enumext_store_active_bool }
2025   {
2026     \int_set:Nn \l__enumext_start_i_int
2027     {
2028       \int_use:c { g__enumext_resume_ \l__enumext_store_name_tl _int } + 1
2029     }
2030   }
2031   \bool_lazy_and:nnT
2032   { \bool_if_p:N \l__enumext_starred_first_bool }
2033   { \bool_if_p:N \l__enumext_store_active_bool }
2034   {
2035     \int_set:Nn \l__enumext_start_vii_int
2036     {
2037       \int_use:c { g__enumext_resume_ \l__enumext_store_name_tl _int } + 1
2038     }
2039   }
2040 }

```

(End of definition for `__enumext_resume_counter:n` and others.)

13.25.4 Internal function for `resume*` key

`__enumext_resume_starred:` The function `__enumext_resume_starred:` will handle the `resume*` key in the `enumext` and `enumext*` environments. This function will execute the filtered *(keys)* in the last one and will continue with the numbering according to the last execution of the environment `enumext` or `enumext*` in which the keys `resume={⟨series name⟩}` or `series={⟨series name⟩}` were not active.

```

2041 \cs_new_protected:Nn \__enumext_resume_starred:
2042 {
2043   \bool_if:NT \g__enumext_standar_bool
2044   {
2045     \tl_if_empty:NF \g__enumext_standar_series_tl
2046     {
2047       \__enumext_resume_counter:n { }
2048       \keys_set:nV { enumext / level-1 } \g__enumext_standar_series_tl
2049     }
2050   }
2051   \bool_if:NT \g__enumext_starred_bool
2052   {
2053     \tl_if_empty:NF \g__enumext_starred_series_tl
2054     {
2055       \__enumext_resume_counter:n { }
2056       \keys_set:nV { enumext / enumext* } \g__enumext_starred_series_tl
2057     }
2058   }
2059 }

```

(End of definition for `__enumext_resume_starred:`.)

13.26 Setting `save-ans`, `check-ans` and `no-store` keys

The key `save-ans` is directly associated with the keys `check-ans`, `no-store`, `resume` and `resume*`, this will activate the entire “storage system” in the `enumext` package.

13.26.1 Setting save-ans key

`save-ans` We define the keys `save-ans` only for the “*first level*” of `enumext` and `enumext*`.

```
2060 \cs_set_protected:Npn \__enumext_tmp:n #1
2061 {
2062   \keys_define:nn { enumext / #1 }
2063   {
2064     save-ans .code:n = \__enumext_storing_set:n {##1},
2065     save-ans .value_required:n = true,
2066   }
2067 }
2068 \clist_map_inline:nn { level-1, enumext* } { { \__enumext_tmp:n {#1} }
```

(End of definition for `save-ans`.)

13.26.2 Internal functions for save-ans key

`__enumext_start_save_ans_msg:` The functions `__enumext_start_save_ans_msg:` and `__enumext_stop_save_ans_msg:` will display in the terminal and `.log` file the environment in which the `save-ans` key was executed along with the line at the beginning and end of it. The function `__enumext_start_save_ans_msg:` will be passed to `__enumext_storing_set:n` and the function `__enumext_stop_save_ans_msg:` will be passed to the function `__enumext_execute_after_env:`.

```
2069 \cs_new_protected:Nn \__enumext_start_save_ans_msg:
2070 {
2071   \msg_term:nnVV { enumext } { save-ans-log }
2072   \g__enumext_envir_name_tl \l__enumext_store_name_tl
2073 }
2074 \cs_new_protected:Nn \__enumext_stop_save_ans_msg:
2075 {
2076   \msg_term:nnVV { enumext } { save-ans-log-hook }
2077   \g__enumext_envir_name_tl \g__enumext_store_name_tl
2078 }
```

(End of definition for `__enumext_start_save_ans_msg:` and `__enumext_stop_save_ans_msg:`.)

`__enumext_storing_set:n` The function `__enumext_storing_set:n` first pass the value of the `save-ans` key to the variable `\l__enumext_store_name_tl` which will contain the `{(store name)}` of the *sequence* and *prop list* we will use. If `\l__enumext_store_name_tl` is *empty* we return an error message, otherwise will return the appropriate message `__enumext_start_save_ans_msg:` and proceed to execute the function `__enumext_storing_exec:` for `enumext` and `enumext*` environments.

```
2079 \cs_new_protected:Npn \__enumext_storing_set:n #1
2080 {
2081   \tl_set:Nx \l__enumext_store_name_tl {#1}
2082   \tl_if_empty:NTF \l__enumext_store_name_tl
2083   {
2084     \bool_lazy_or:nnT
2085     { \l__enumext_standar_first_bool } { \l__enumext_starred_first_bool }
2086     {
2087       \msg_error:nnV { enumext } { save-ans-empty } \g__enumext_envir_name_tl
2088     }
2089   }
2090   {
2091     \bool_lazy_or:nnT
2092     { \l__enumext_standar_first_bool } { \l__enumext_starred_first_bool }
2093     {
2094       \__enumext_start_save_ans_msg:
2095       \__enumext_storing_exec:
2096     }
2097   }
2098 }
```

The function `__enumext_storing_exec:` will set to true the variable `\l__enumext_store_active_bool` which activates the use of the `\anskey` command and the `anskey*`, `keyans`, `keyans*` and `keyanspic` environments and will set to “true” the variable `\l__enumext_check_answers_bool` used for internal checking answers mechanism set by the `check-ans` and `no-store` keys, copy `{(store name)}` into the variable `\g__enumext_store_name_tl`.

```
2099 \cs_new_protected:Nn \__enumext_storing_exec:
2100 {
2101   \bool_set_true:N \l__enumext_store_active_bool
2102   \bool_set_true:N \l__enumext_check_answers_bool
2103   \tl_gset:NV \g__enumext_store_name_tl \l__enumext_store_name_tl
```

The *prop list* `\g__enumext_series_⟨store name⟩_prop` and the *sequence* `\g__enumext_series_⟨store name⟩_seq` will be created globally to “store content” in case they do not exist together with the integer variable `\g__enumext_series_⟨store name⟩_int` used by the keys `resume` and `resume*`.

```

2104 \prop_if_exist:cF { g__enumext_ \l__enumext_store_name_tl _prop }
2105 {
2106     \msg_log:nnV { enumext } { store-prop } \l__enumext_store_name_tl
2107     \prop_new:c { g__enumext_ \l__enumext_store_name_tl _prop }
2108 }
2109 \seq_if_exist:cF { g__enumext_ \l__enumext_store_name_tl _seq }
2110 {
2111     \msg_log:nnV { enumext } { store-seq } \l__enumext_store_name_tl
2112     \seq_new:c { g__enumext_ \l__enumext_store_name_tl _seq }
2113 }
2114 \int_if_exist:cF { g__enumext_resume_ \l__enumext_store_name_tl _int }
2115 {
2116     \msg_log:nnV { enumext } { store-int } \l__enumext_store_name_tl
2117     \int_new:c { g__enumext_resume_ \l__enumext_store_name_tl _int }
2118 }
2119 }

```

(End of definition for `__enumext_storing_set:n` and `__enumext_storing_exec:.`)

13.26.3 The check answer mechanism

The internal mechanism for “checking answers” follows this logic:

If the line begins with `\item` or `\item*` and does NOT *open a nested environment*, each `\item` or `\item*` must contain a *single* execution of the `\anskey` command, i.e. the counter of the executions of the `\anskey` command must be equal to the counter associated with the sum of executions of `\item` and `\item*`.

If the line begins with `\item` or `\item*` and *opens a nested environment* each `\item` or `\item*` in the nested environment must have a *single* execution of the `\anskey` command and the counter associated to the sum of `\item` and `\item*` executions must decrementing by “one” to maintain equality.

In order for the mechanism for the check-answer to work (not counting `keyans`, `keyans*` and `keyanspic`) we need:

1. We must keep track of the total number of `\item` and `\item*` (enumerated) that appear within the environment including the nested levels.
2. We must keep track of the total number of `\item` and `\item*` (enumerated) that appear per level of nesting.
3. Keeping track of the number of times the environment nests.

The integer variable associated to the sum of each `\item` and `\item*` in the environment `\g__enumext_item_number_int` must match the integer variable `\g__enumext_item_anskey_int` associated to the execution of the command `\anskey`. We analyze the cases:

- a) If the list only has one level the number of `\item` + `\item*` = `\anskey`
- b) If the list has *nested levels*, for each level of nesting we need to decrementing by one (for the `\item` or `\item*` that opens the nest) so that the account remains the same.

With `keyans`, `keyans*` and `keyanspic` it is enough to increase in one the integer of `\anskey`. The integers created must be global if they are not lost in the interior levels of nesting and to execute the test we will use a “hook” function after closing the *first level* of the environment.

13.26.4 Setting check-ans and no-store keys

Now we define the keys `check-ans` and `no-store` for all levels of `enumext` and `enumext*` environments.

```

check-ans no-store
2120 \cs_set_protected:Npn \__enumext_tmp:n #1
2121 {
2122     \keys_define:nn { enumext / #1 }
2123     {
2124         check-ans .bool_set:N = \l__enumext_check_ans_key_bool,
2125         check-ans .initial:n = false,
2126         check-ans .value_required:n = true,
2127         no-store .code:n = {
2128             \bool_set_false:N \l__enumext_check_answers_bool
2129             \bool_set_false:N \l__enumext_check_ans_key_bool
2130         },
2131         no-store .value_forbidden:n = true,
2132     }
2133 }
2134 \clist_map_inline:nn

```



```

2135 {
2136     level-1, level-2, level-3, level-4, enumext*
2137 }
2138 { \__enumext_tmp:n {#1} }

```

(End of definition for check-ans and no-store.)

13.26.5 Set-up check answer mechanism

The function `__enumext_check_ans_active:` will first check the state of the variable `\l__enumext_store_name_tl`, that is, the `save-ans` key is active, if so it will check the state of the variable `\l__enumext_check_answers_bool` handled by the key `no-store` and will execute the function `__enumext_check_ans_level:` only if “true”, i.e. the key `no-store` is not active.

```

2139 \cs_new_protected:Nn \__enumext_check_ans_active:
2140 {
2141     \tl_if_empty:NF \l__enumext_store_name_tl
2142     {
2143         \bool_if:NT \l__enumext_check_answers_bool
2144         {
2145             \__enumext_check_ans_level:
2146         }
2147     }
2148 }

```

The function `__enumext_check_ans_level:` will decrement by “one” the value of the variable `\g__enumext_item_number_int` which keeps track of the executions of `\item` and `\item*` for each level of nesting of the environment `enumext`, taking into account whether it is nested within `enumext*` or the opposite and set `\l__enumext_item_number_bool` to “false”.

```

2149 \cs_new_protected:Nn \__enumext_check_ans_level:
2150 {
2151     \int_case:nn { \l__enumext_level_int }
2152     {
2153         { 1 }{
2154             \bool_lazy_all:nT
2155             {
2156                 { \bool_if_p:N \g__enumext_starred_bool }
2157                 { \int_compare_p:nNn { \l__enumext_level_h_int } = { 1 } }
2158             }
2159             {
2160                 \int_gdecr:N \g__enumext_item_number_int
2161                 \bool_set_false:N \l__enumext_item_number_bool
2162             }
2163         }
2164         { 2 }{
2165             \int_gdecr:N \g__enumext_item_number_int
2166             \bool_set_false:N \l__enumext_item_number_bool
2167         }
2168         { 3 }{
2169             \int_gdecr:N \g__enumext_item_number_int
2170             \bool_set_false:N \l__enumext_item_number_bool
2171         }
2172         { 4 }{
2173             \int_gdecr:N \g__enumext_item_number_int
2174             \bool_set_false:N \l__enumext_item_number_bool
2175         }
2176     }

```

We should only execute this if `enumext*` is nested in the “first level” of `enumext`, for the rest of the cases the value of `\g__enumext_item_number_int` is already decreased.

```

2177     \int_case:nn { \l__enumext_level_h_int }
2178     {
2179         { 1 }{
2180             \bool_lazy_all:nT
2181             {
2182                 { \bool_if_p:N \g__enumext_standar_bool }
2183                 { \int_compare_p:nNn { \l__enumext_level_int } = { 1 } }
2184             }
2185             {
2186                 \int_gdecr:N \g__enumext_item_number_int
2187                 \bool_set_false:N \l__enumext_item_number_bool
2188             }
2189         }

```

```

2190     }
2191 }

```

(End of definition for `__enumext_check_ans_active:` and `__enumext_check_ans_level:`.)

`__enumext_check_ans_key_hook:`

The function `__enumext_check_ans_key_hook:` will *export* the status of the local variable `\l__enumext_check_ans_key_bool` to the global variable `\g__enumext_check_ans_key_bool` only if the key `check-ans` is active.

```

2192 \cs_new_protected:Nn \__enumext_check_ans_key_hook:
2193 {
2194     \bool_lazy_and:nnT
2195     { \bool_if_p:N \l__enumext_check_ans_key_bool }
2196     { \bool_if_p:N \g__enumext_standar_bool }
2197     {
2198         \bool_gset_true:N \g__enumext_check_ans_key_bool
2199     }
2200     \bool_lazy_and:nnT
2201     { \bool_if_p:N \l__enumext_check_ans_key_bool }
2202     { \bool_if_p:N \g__enumext_starred_bool }
2203     {
2204         \bool_gset_true:N \g__enumext_check_ans_key_bool
2205     }
2206 }

```

(End of definition for `__enumext_check_ans_key_hook:`.)

`__enumext_item_answer_diff:`

The function `__enumext_item_answer_diff:` will set the value of the variable `\g__enumext_item_answer_diff_int` which is used by the functions `__enumext_check_ans_show:` for the key `save-ans` and by the function `__enumext_check_ans_log:` by the internal “*check answer*” mechanism. This function will be passed to the function `__enumext_execute_after_env:`.

```

2207 \cs_new_protected:Nn \__enumext_item_answer_diff:
2208 {
2209     \int_gset:Nn \g__enumext_item_answer_diff_int
2210     {
2211         \int_sign:n { \g__enumext_item_number_int - \g__enumext_item_anskey_int }
2212     }
2213 }

```

(End of definition for `__enumext_item_answer_diff:`.)

`__enumext_check_ans_show:`

The function `__enumext_check_ans_show:` will be executed within the function `__enumext_execute_after_env:` when the key `check-ans` is active, that is, when `\g__enumext_check_ans_key_bool` is “*true*” and will return the appropriate message according to the value of `\g__enumext_item_answer_diff_int` set by the function `__enumext_item_answer_diff:`.

`__enumext_check_ans_msg_less:`
`__enumext_check_ans_msg_same_ok:`
`__enumext_check_ans_msg_greater:`

```

2214 \cs_new_protected:Nn \__enumext_check_ans_show:
2215 {
2216     \int_case:nn { \g__enumext_item_answer_diff_int }
2217     {
2218         { -1 } { \__enumext_check_ans_msg_less: }
2219         { 0 } { \__enumext_check_ans_msg_same_ok: }
2220         { 1 } { \__enumext_check_ans_msg_greater: }
2221     }
2222 }
2223 \cs_new_protected:Nn \__enumext_check_ans_msg_less:
2224 {
2225     \msg_warning:nnee { enumext } { item-less-answer } { \g__enumext_store_name_tl }
2226     { \g__enumext_envir_name_tl } { \g__enumext_start_line_tl }
2227 }
2228 \cs_new_protected:Nn \__enumext_check_ans_msg_same_ok:
2229 {
2230     \msg_term:nnee { enumext } { items-same-answer } { \g__enumext_store_name_tl }
2231     { \g__enumext_envir_name_tl } { \g__enumext_start_line_tl }
2232 }
2233 \cs_new_protected:Nn \__enumext_check_ans_msg_greater:
2234 {
2235     \msg_warning:nnee { enumext } { item-greater-answer } { \g__enumext_store_name_tl }
2236     { \g__enumext_envir_name_tl } { \g__enumext_start_line_tl }
2237 }

```

(End of definition for `__enumext_check_ans_show:` and others.)

`__enumext_check_ans_log:` The function `__enumext_check_ans_log:` will be executed within the function `__enumext_execute_after_env:` when the key `check-ans` is not active, that is, when `\g__enumext_check_ans_key_bool` is “false” and write in the log the appropriate message according to the value of `\g__enumext_item_answer_diff_int` set by the function `__enumext_item_answer_diff:`.

```

2238 \cs_new_protected:Nn \__enumext_check_ans_log:
2239 {
2240   \int_case:nn { \g__enumext_item_answer_diff_int }
2241   {
2242     { -1 } { \__enumext_check_ans_log_msg_less: }
2243     { 0 } { \__enumext_check_ans_log_msg_same_ok: }
2244     { 1 } { \__enumext_check_ans_log_msg_greater: }
2245   }
2246 }
2247 \cs_new_protected:Nn \__enumext_check_ans_log_msg_less:
2248 {
2249   \msg_log:nneee { enumext } { item-less-answer } { \g__enumext_store_name_tl }
2250   { \g__enumext_envir_name_tl } { \g__enumext_start_line_tl }
2251 }
2252 \cs_new_protected:Nn \__enumext_check_ans_log_msg_same_ok:
2253 {
2254   \msg_log:nneee { enumext } { items-same-answer } { \g__enumext_store_name_tl }
2255   { \g__enumext_envir_name_tl } { \g__enumext_start_line_tl }
2256 }
2257 \cs_new_protected:Nn \__enumext_check_ans_log_msg_greater:
2258 {
2259   \msg_log:nneee { enumext } { item-greater-answer } { \g__enumext_store_name_tl }
2260   { \g__enumext_envir_name_tl } { \g__enumext_start_line_tl }
2261 }

```

(End of definition for `__enumext_check_ans_log:` and others.)

13.26.6 Check for `\item*` and `\anspic*` commands

`__enumext_check_starred_cmd:n` The function `__enumext_check_starred_cmd:n` performs an *extra check* for the `keyans`, `keyans*` and `keyanspic` environments. Unlike the *check* executed by `check-ans` key this one is not controlled by any key, it is intended to prevent the forgetting of `\item*` or `\anspic*` in these environments.

```

2262 \cs_new_protected:Npn \__enumext_check_starred_cmd:n #1
2263 {
2264   \int_compare:nNnT
2265   { \g__enumext_check_starred_cmd_int } = { 0 }
2266   {
2267     \msg_warning:nnnV
2268     { enumext } { missing-starred } { #1 } \l__enumext_check_start_line_env_tl
2269   }
2270   \int_compare:nNnT
2271   { \g__enumext_check_starred_cmd_int } > { 1 }
2272   {
2273     \msg_warning:nnnV
2274     { enumext } { many-starred } { #1 } \l__enumext_check_start_line_env_tl
2275   }
2276   \int_gzero:N \g__enumext_check_starred_cmd_int
2277   \tl_clear:N \l__enumext_check_start_line_env_tl
2278 }

```

(End of definition for `__enumext_check_starred_cmd:n`.)

13.27 Keys and functions associated with storage

13.27.1 Keys for marks, wrap and show

The `enumext` package provides a set of *keys* for manipulating “symbol marks” associated with “answers” and how they are displayed and stored in the *sequence* and *prop list* as well as an internal “label and ref” system.

For the `keyans` and `keyans*` environments we will only add the keys `mark-ans*`, `mark-pos*`, `mark-sep*`, `wrap-ans*`, `wrap-opt`, `save-sep`, `show-ans` and `show-pos`.

```

2279 \cs_set_protected:Npn \__enumext_tmp:nn #1 #2
2280 {
2281   \keys_define:nn { enumext / #1 }
2282   {
2283     mark-ans* .tl_set:c = { \l__enumext_mark_answer_sym_#2_tl },
2284     mark-ans* .initial:n = \textasteriskcentered,
2285     mark-ans* .value_required:n = true,

```

```

2286 mark-pos* .choice:,
2287 mark-pos* / left .code:n = \str_set:cn { \__enumext_mark_position_#2_str } { l },
2288 mark-pos* / right .code:n = \str_set:cn { \__enumext_mark_position_#2_str } { r },
2289 mark-pos* / center .code:n = \str_set:cn { \__enumext_mark_position_#2_str } { c },
2290 mark-pos* / unknown .code:n =
2291 \msg_error:nneee { enumext } { unknown-choice }
2292 { mark-pos } { left,~right,~center } { \exp_not:n {##1} },
2293 mark-pos* .initial:n = right,
2294 mark-pos* .value_required:n = true,
2295 mark-sep* .dim_set:c = { \__enumext_mark_sym_sep_#2_dim },
2296 mark-sep* .value_required:n = true,
2297 wrap-ans* .cs_set_protected:cp = { \__enumext_keyans_wrapper_item_#2:n } ##1,
2298 wrap-ans* .value_required:n = true,
2299 wrap-opt .cs_set_protected:cp = { \__enumext_keyans_wrapper_opt_#2:n } ##1,
2300 wrap-opt .initial:n = [{##1}],
2301 wrap-opt .value_required:n = true,
2302 save-sep .tl_set:c = { \__enumext_store_keyans_item_opt_sep_#2_tl },
2303 save-sep .initial:n = {,~},
2304 save-sep .value_required:n = true,
2305 show-ans .bool_set:N = \__enumext_show_answer_bool,
2306 show-ans .initial:n = false,
2307 show-ans .value_required:n = true,
2308 show-pos .bool_set:N = \__enumext_show_position_bool,
2309 show-pos .initial:n = false,
2310 show-pos .value_required:n = true,
2311 }
2312 }
2313 \clist_map_inline:nn { {keyans}{v}, {keyans*}{viii} } { \__enumext_tmp:n #1 }

```

(End of definition for mark-ans* and others.)

mark-ref We add the $\langle keys \rangle$ mark-ref and save-ref related to the “storage system” and internal mechanism of “label and ref” along with the $\langle keys \rangle$ show-ans, show-pos and the $\langle keys \rangle$ mark-ans, mark-pos, mark-sep and wrap-ans for the command `\anskey`, the environment `anskey*` and the the $\langle keys \rangle$ for environments `keyans` and `keyans*` only at the *first level* of `enumext` and `enumext*`.

```

2314 \cs_set_protected:Npn \__enumext_tmp:n #1
2315 {
2316   \keys_define:nn { enumext / #1 }
2317   {
2318     mark-ref .tl_set:N = \__enumext_mark_ref_sym_tl,
2319     mark-ref .initial:n = \textreferencemark,
2320     mark-ref .value_required:n = true,
2321     save-ref .bool_set:N = \__enumext_store_ref_key_bool,
2322     save-ref .initial:n = false,
2323     save-ref .value_required:n = true,
2324     show-ans .bool_set:N = \__enumext_show_answer_bool,
2325     show-ans .initial:n = false,
2326     show-ans .value_required:n = true,
2327     show-pos .bool_set:N = \__enumext_show_position_bool,
2328     show-pos .initial:n = false,
2329     show-pos .value_required:n = true,
2330     mark-ans .tl_set:N = \__enumext_mark_answer_sym_tl,
2331     mark-ans .initial:n = \textasteriskcentered,
2332     mark-ans .value_required:n = true,
2333     mark-sep .dim_set:N = \__enumext_mark_sym_sep_dim,
2334     mark-sep .value_required:n = true,
2335     mark-pos .choice:,
2336     mark-pos / left .code:n = \str_set:Nn \__enumext_mark_position_str { l },
2337     mark-pos / right .code:n = \str_set:Nn \__enumext_mark_position_str { r },
2338     mark-pos / center .code:n = \str_set:Nn \__enumext_mark_position_str { c },
2339     mark-pos / unknown .code:n =
2340       \msg_error:nneee { enumext } { unknown-choice }
2341       { mark-pos } { left,~right,~center } { \exp_not:n {##1} },
2342     mark-pos .initial:n = right,
2343     mark-pos .value_required:n = true,
2344
2345     wrap-ans .cs_set_protected:Np = \__enumext_anskey_wrapper:n ##1,
2346     wrap-ans .initial:n =
2347       {
2348         \fbox{\parbox[t]{\dimeval{\itemwidth -2\fboxsep -2\fboxrule}}{##1}}
2349       },

```

```

2350     wrap-ans .value_required:n = true,
2351     mark-ans* .code:n = {
2352         \keys_set:nn { enumext / keyans } { mark-ans* = {##1} }
2353         \keys_set:nn { enumext / keyans* } { mark-ans* = {##1} }
2354     },
2355     mark-ans* .value_required:n = true,
2356     mark-pos* .code:n = {
2357         \keys_set:nn { enumext / keyans } { mark-pos* = {##1} }
2358         \keys_set:nn { enumext / keyans* } { mark-pos* = {##1} }
2359     },
2360     mark-pos* .value_required:n = true,
2361     mark-sep* .code:n = {
2362         \keys_set:nn { enumext / keyans } { mark-sep* = {##1} }
2363         \keys_set:nn { enumext / keyans* } { mark-sep* = {##1} }
2364     },
2365     mark-sep* .value_required:n = true,
2366     wrap-ans* .code:n = {
2367         \keys_set:nn { enumext / keyans } { wrap-ans* = {##1} }
2368         \keys_set:nn { enumext / keyans* } { wrap-ans* = {##1} }
2369     },
2370     wrap-ans* .value_required:n = true,
2371     wrap-opt .code:n = {
2372         \keys_set:nn { enumext / keyans } { wrap-opt = {##1} }
2373         \keys_set:nn { enumext / keyans* } { wrap-opt = {##1} }
2374     },
2375     wrap-opt .value_required:n = true,
2376     save-sep .code:n = {
2377         \keys_set:nn { enumext / keyans } { save-sep = {##1} }
2378         \keys_set:nn { enumext / keyans* } { save-sep = {##1} }
2379     },
2380     save-sep .value_required:n = true,
2381 }
2382 }
2383 \clist_map_inline:nn { level-1, enumext* } { { \__enumext_tmp:n {#1} }

```

(End of definition for *mark-ref* and others.)

13.27.2 Storing structure of the environments

The idea behind “*storing structure*” in the *sequence* is to have a copy of the *structure of the environment* in which the key *save-ans* is being executed so we must capture the *optional argument* passed to the levels of the environment in which it is executed and “*storing*” this in the *sequence*.

```

\__enumext_store_active_keys:n
\__enumext_store_active_keys_vii:n

```

The functions `__enumext_store_active_keys:n` and `__enumext_store_active_keys_vii:n` will be responsible for the “*storing keys*” filtered from the *optional argument* of the environment in which the key *save-ans* is executed and the levels within this for the *enumext* and *enumext** environments. We will execute this function only if the variable `__enumext_store_save_key_X_bool` is false, that is, the key *store-key* is not active, establishing the variable `__enumext_store_save_key_X_tl` with the filtered *keys*.

```

2384 \cs_new_protected:Npn \__enumext_store_active_keys:n #1
2385 {
2386     \bool_if:cF { \__enumext_store_save_key_ \__enumext_level: _bool }
2387     {
2388         \tl_clear:c { \__enumext_store_save_key_ \__enumext_level: _tl }
2389         \tl_set:ce
2390             { \__enumext_store_save_key_ \__enumext_level: _tl }
2391             { \__enumext_filter_save_key:n {#1} }
2392     }
2393 }
2394 \cs_new_protected:Npn \__enumext_store_active_keys_vii:n #1
2395 {
2396     \bool_if:NF \__enumext_store_save_key_vii_bool
2397     {
2398         \tl_clear:N \__enumext_store_save_key_vii_tl
2399         \tl_set:Ne \__enumext_store_save_key_vii_tl { \__enumext_filter_save_key:n {#1} }
2400     }
2401 }

```

(End of definition for `__enumext_store_active_keys:n` and `__enumext_store_active_keys_vii:n`.)

13.27.3 Setting save-key key

Since this “*storing structure*” in the *sequence* established by the `save-ans` key when executing `\anskey` or `anskey*`, we will not be able to modify it. The best thing here is to have a key that allows you to modify the *optional argument* of the “*storing structure*” in the *sequence*.

`save-key` The values set by this key passed in the *optional argument* of the `enumext` and `enumext*` environments will override the values of the `\l__enumext_store_save_key_X_tl` variable set by the functions `__enumext_store_active_keys:n` and `__enumext_store_active_keys_vii:n`. Now define the key `save-key` for all levels of `enumext` and `enumext*` environments.

```

2402 \cs_set_protected:Npn \__enumext_tmp:n #1
2403 {
2404   \keys_define:nn { enumext / enumext* }
2405   {
2406     save-key .code:n = \__enumext_parse_save_key_vii:n {##1},
2407     save-key .value_required:n = true,
2408   }
2409   \keys_define:nn { enumext / #1 }
2410   {
2411     save-key .code:n = \__enumext_parse_save_key:n {##1},
2412     save-key .value_required:n = true,
2413   }
2414 }
2415 \clist_map_inline:nn { level-1, level-2, level-3, level-4 } { \__enumext_tmp:n {#1} }

```

(End of definition for `save-key`.)

```

\__enumext_parse_save_key:n
\__enumext_parse_save_key_vii:n

```

The functions `__enumext_parse_save_key:n` and `__enumext_parse_save_key_vii:n` will be responsible for “*storing keys*” in the variable `\l__enumext_store_save_key_X_tl` for `enumext` and `enumext*`.

```

2416 \cs_new_protected:Npn \__enumext_parse_save_key:n #1
2417 {
2418   \bool_set_true:c { l__enumext_store_save_key_ \__enumext_level: _bool }
2419   \tl_clear:c { l__enumext_save_key_ \__enumext_level: _tl }
2420   \tl_set:ce
2421   { l__enumext_store_save_key_ \__enumext_level: _tl }
2422   { \__enumext_filter_save_key:n {#1} }
2423 }
2424 \cs_new_protected:Npn \__enumext_parse_save_key_vii:n #1
2425 {
2426   \bool_set_true:N \l__enumext_store_save_key_vii_bool
2427   \tl_clear:N \l__enumext_store_save_key_vii_tl
2428   \tl_set:Ne \l__enumext_store_save_key_vii_tl { \__enumext_filter_save_key:n {#1} }
2429 }

```

(End of definition for `__enumext_parse_save_key:n` and `__enumext_parse_save_key_vii:n`.)

13.27.4 Internal functions to store optional arguments

```

\__enumext_filter_save_key:n
\__enumext_filter_save_key_key:n
\__enumext_filter_save_key_pair:nn

```

The function `__enumext_filter_save_key:n` will be in charge of “*filtering keys*” we want to *stored in sequence* where `{#1}` represents the *optional argument* passed to the environment.

```

2430 \cs_new:Npn \__enumext_filter_save_key:n #1
2431 {
2432   \use:e
2433   {
2434     \keyval_parse:NNn
2435     \__enumext_filter_save_key_key:n
2436     \__enumext_filter_save_key_pair:nn {#1}
2437   }
2438 }

```

The function `__enumext_filter_save_key_key:n` will be responsible for “*filtering keys*” that are passed “*without value*” by excluding the `resume`, `resume*`, `no-store` and `base-fix` keys.

```

2439 \cs_new:Npn \__enumext_filter_save_key_key:n #1
2440 {
2441   \str_case:nnF {#1}
2442   {
2443     { resume } {} { resume* } {} { no-store } {} { base-fix } {}
2444   }
2445   { , { \exp_not:n {#1} } }
2446 }

```

The function `__enumext_filter_save_key_pair:nn` will be responsible for “*filtering keys*” that are passed “*with value*” by excluding the `series`, `resume`, `save-ans`, `save-ref`, `save-key`, `check-ans`, `show-ans`, `save-pos`, `mark-ans`, `mark-pos`, `mark-sep`, `wrap-ans`, `mark-ans*`, `mark-pos*`, `mark-sep*`, `wrap-ans*`, `wrap-opt`, `save-sep`, `mark-ref`, `mini-env`, `mini-sep`, `mini-right` and `mini-right*` keys.

```

2447 \cs_new:Npn \__enumext_filter_save_key_pair:nn #1#2
2448 {
2449   \str_case:nnF {#1}
2450   {
2451     { series } {} { resume } {} { save-ans } {} { save-ref } {}
2452     { save-key } {} { check-ans } {} { show-ans } {} { show-pos } {}
2453     { mark-ans } {} { mark-pos } {} { mark-sep } {} { wrap-ans } {}
2454     { mark-ans* } {} { mark-pos* } {} { mark-sep* } {} { wrap-ans* } {}
2455     { wrap-opt } {} { save-sep } {} { mark-ref } {} { mini-env } {}
2456     { mini-sep } {} { mini-right } {} { mini-right* } {}
2457   }
2458   { , { \exp_not:n {#1} } } = { \exp_not:n {#2} } }
2459 }

```

(End of definition for `__enumext_filter_save_key:n`, `__enumext_filter_save_key_key:n`, and `__enumext_filter_save_key_pair:nn`.)

13.27.5 Function for storing content in prop list

```

\__enumext_store_addto_prop:n
\__enumext_store_addto_prop:V

```

The function `__enumext_store_addto_prop:n` stores the $\langle content \rangle$ in *prop list* defined by `save-ans` key. The “*stored content*” is retrieved by means of the `\getkeyans` command.

The form in which the $\langle content \rangle$ is “*stored*” in the *prop list* is $\langle position \rangle \langle content \rangle$. This function is used by `\anskey` in `enumext` and `enumext*` environments, `\item*` in `keyans` and `keyans*` environments and `\anspic*` in `keyanspic` environment.

```

2460 \cs_new_protected:Npn \__enumext_store_addto_prop:n #1
2461 {
2462   \prop_gput_if_not_in:cen { g__enumext_ \l__enumext_store_name_tl _prop }
2463   {
2464     \int_eval:n { \prop_count:c { g__enumext_ \l__enumext_store_name_tl _prop } + 1 }
2465   }
2466   { #1 }
2467 }
2468 \cs_generate_variant:Nn \__enumext_store_addto_prop:n { V }

```

(End of definition for `__enumext_store_addto_prop:n`.)

13.27.6 Function for storing content in sequence

```

\__enumext_store_addto_seq:n
\__enumext_store_addto_seq:v
\__enumext_store_addto_seq:V

```

The function `__enumext_store_addto_seq:n` stores the $\langle content \rangle$ in *sequence* defined by `save-ans` key. This function is used by `\anskey` in `enumext`, `\item*` in `keyans` and `\anspic` in `keyanspic`.

The form in which the $\langle content \rangle$ is stored in *sequence* is in a internal `enumext` or `enumext*` environments with the “*same structure*” in which the command was executed.

The “*stored content*” is retrieved by means of the `\printkeyans` command.

```

2469 \cs_new_protected:Npn \__enumext_store_addto_seq:n #1
2470 {
2471   \seq_gput_right:cn { g__enumext_ \l__enumext_store_name_tl _seq } { #1 }
2472 }
2473 \cs_generate_variant:Nn \__enumext_store_addto_seq:n { v, V }

```

(End of definition for `__enumext_store_addto_seq:n`.)

13.27.7 Functions for storing structure in the sequence

```

\__enumext_store_level_open:
\__enumext_store_level_close:

```

The “*storing structure*” is handled by the functions `__enumext_store_level_open:` and `__enumext_store_level_close:` which are executed per level within the `enumext` environment.

```

2474 \cs_new_protected:Nn \__enumext_store_level_open:
2475 {
2476   \bool_if:NT \l__enumext_check_answers_bool
2477   {
2478     \tl_if_empty:cTF { l__enumext_store_save_key_ \__enumext_level: _tl }
2479     {
2480       \__enumext_store_addto_seq:n
2481       {
2482         \item \begin{enumext}
2483       }
2484     }
2485     {
2486       \tl_put_left:cn { l__enumext_store_save_key_ \__enumext_level: _tl }

```



```

2487         {
2488             \item \begin{enumext} [
2489         ]
2490         \tl_put_right:cn { l__enumext_store_save_key_ \__enumext_level: _tl }
2491         {
2492             ]
2493         }
2494         \__enumext_store_addto_seq:v { l__enumext_store_save_key_ \__enumext_level: _tl }
2495     }
2496 }
2497 }
2498 \cs_new_protected:Nn \__enumext_store_level_close:
2499 {
2500     \bool_if:NT \l__enumext_check_answers_bool
2501     {
2502         \__enumext_store_addto_seq:n { \end{enumext} }
2503     }
2504 }

```

(End of definition for __enumext_store_level_open: and __enumext_store_level_close:.)

__enumext_store_level_open_vii:
 __enumext_store_level_close_vii:

The “*storing structure*” is handled by the functions __enumext_store_level_open_vii: and __enumext_store_level_close_vii: which are executed in the `enumext*` environment.

```

2505 \cs_new_protected:Nn \__enumext_store_level_open_vii:
2506 {
2507     \bool_if:NT \l__enumext_check_answers_bool
2508     {
2509         \tl_if_empty:NTF \l__enumext_store_save_key_vii_tl
2510         {
2511             \__enumext_store_addto_seq:n
2512             {
2513                 \item \begin{enumext*}
2514             }
2515         }
2516         {
2517             \tl_put_left:Nn \l__enumext_store_save_key_vii_tl
2518             {
2519                 \item \begin{enumext*}[
2520             }
2521             \tl_put_right:Nn \l__enumext_store_save_key_vii_tl
2522             {
2523                 ]
2524             }
2525             \__enumext_store_addto_seq:V \l__enumext_store_save_key_vii_tl
2526         }
2527     }
2528 }
2529 \cs_new_protected:Nn \__enumext_store_level_close_vii:
2530 {
2531     \bool_if:NT \l__enumext_check_answers_bool
2532     {
2533         \__enumext_store_addto_seq:n { \end{enumext*} }
2534     }
2535 }

```

(End of definition for __enumext_store_level_open_vii: and __enumext_store_level_close_vii:.)

13.27.8 Function for show marks and position

__enumext_print_keyans_box:NN
 __enumext_print_keyans_box:cc

The function __enumext_print_keyans_box:NN print a box in the left margin with \l__enumext_mark_answer_sym_tl used by the `wrap-ans`, `show-ans` and `show-pos` keys. The function takes two arguments:

#1: \l__enumext_labelwidth_X_dim
#2: \l__enumext_labelsep_X_dim

```

2536 \cs_new_protected:Nn \__enumext_print_keyans_box:NN
2537 {
2538     \mode_leave_vertical:
2539     \skip_horizontal:n { -\dim_use:N #2 }
2540     \hbox_overlap_left:n
2541     {
2542         \makebox[ \dim_use:N #1 ] [ \l__enumext_mark_position_str ]
2543         {

```

```

2544         \tl_use:N \l__enumext_mark_answer_sym_tl
2545     }
2546 }
2547 \skip_horizontal:n { \dim_use:N #2 }
2548 }
2549 \cs_generate_variant:Nn \__enumext_print_keyans_box:NN { cc }

```

(End of definition for `__enumext_print_keyans_box:NN`.)

13.28 The internal label and ref

The function `__enumext_store_internal_ref:` handles the “*internal label and ref*” system used by the `save-ref` and `mark-ref` keys for `\anskey` will allow to execute `\ref{⟨store name : position⟩}` and will return `1.(a).i.A`.

`__enumext_store_internal_ref:`

First we will remove the dots “.” from the current `⟨labels⟩`, we do not want to get double dots in our references, then we will place this in the variable `\l__enumext_newlabel_arg_two_tl`.

```

2550 \cs_new_protected:Nn \__enumext_store_internal_ref:
2551 {
2552     \cs_set_protected:Npn \__enumext_tmp:n ##1
2553     {
2554         \tl_set_eq:cc { \l__enumext_label_copy_##1_tl } { \l__enumext_label_##1_tl }
2555         \tl_reverse:c { \l__enumext_label_copy_##1_tl }
2556         \tl_remove_once:cn { \l__enumext_label_copy_##1_tl } { . }
2557         \tl_reverse:c { \l__enumext_label_copy_##1_tl }
2558     }
2559     \clist_map_inline:nn { i, ii, iii, iv, vii } { \__enumext_tmp:n {##1} }
2560     \cs_set:Npn \__enumext_tmp:n ##1
2561     { . \tl_use:c { \l__enumext_label_copy_ \int_to_roman:n {##1} _tl } }

```

Here we need to analyse the cases where the environment is started with `enumext*` and if `\anskey` or `anskey*` is running alone in it or if it is running in a nested `enumext` environment within the starting environment.

```

2562 \bool_lazy_all:nT
2563 {
2564     { \bool_if_p:N \g__enumext_starred_bool }
2565     { \int_compare_p:nNn { \l__enumext_level_int } = { 0 } }
2566 }
2567 {
2568     \tl_put_right:Ne \l__enumext_newlabel_arg_two_tl
2569     { \tl_use:N \l__enumext_label_copy_vii_tl }
2570 }
2571 \bool_lazy_all:nT
2572 {
2573     { \bool_not_p:n { \g__enumext_standar_bool } }
2574     { \bool_if_p:N \l__enumext_standar_bool }
2575     { \int_compare_p:nNn { \l__enumext_level_int } > { 0 } }
2576 }
2577 {
2578     \tl_put_right:Ne \l__enumext_newlabel_arg_two_tl
2579     {
2580         \tl_use:N \l__enumext_label_copy_vii_tl
2581         \int_step_function:nnN { 1 } { \l__enumext_level_int } \__enumext_tmp:n
2582     }
2583 }

```

If started with `enumext` and if `\anskey` or `anskey*` is running alone in it or if it is running in a nested `enumext*` environment within the starting environment.

```

2584 \bool_lazy_all:nT
2585 {
2586     { \bool_if_p:N \g__enumext_standar_bool }
2587     { \int_compare_p:nNn { \l__enumext_level_int } > { 0 } }
2588     { \int_compare_p:nNn { \l__enumext_level_h_int } = { 0 } }
2589 }
2590 {
2591     \tl_put_right:Ne \l__enumext_newlabel_arg_two_tl
2592     {
2593         \tl_use:N \l__enumext_label_copy_i_tl
2594         \int_step_function:nnN { 2 } { \l__enumext_level_int } \__enumext_tmp:n
2595     }
2596 }
2597 \cs_set:Npn \__enumext_tmp:n ##1
2598 { \tl_use:c { \l__enumext_label_copy_ \int_to_roman:n {##1} _tl } . }

```

```

2599 \bool_lazy_all:nT
2600 {
2601   { \bool_if_p:N \g__enumext_standar_bool }
2602   { \bool_if_p:N \l__enumext_starred_bool }
2603   { \int_compare_p:nNn { \l__enumext_level_int } > { 0 } } }
2604 }
2605 {
2606   \tl_put_right:Ne \l__enumext_newlabel_arg_two_tl
2607   {
2608     \int_step_function:nnN { 1 } { \l__enumext_level_int } \l__enumext_tmp:n
2609     \tl_use:N \l__enumext_label_copy_vii_tl
2610   }
2611 }

```

Now we set the variable `\l__enumext_newlabel_arg_one_tl` which will contain $\langle \textit{store name} : \textit{position} \rangle$.

```

2612 \tl_put_right:Ne \l__enumext_newlabel_arg_one_tl
2613 {
2614   \l__enumext_store_name_tl \c_colon_str
2615   \int_eval:n { \prop_count:c { g__enumext_ \l__enumext_store_name_tl _prop } }
2616 }

```

Now execute the function `__enumext_newlabel:nn` and save the result in the variable `\l__enumext_write_aux_file_tl` and finally we write in the `.aux` file.

```

2617 \tl_put_right:Ne \l__enumext_write_aux_file_tl
2618 {
2619   \__enumext_newlabel:nn
2620   { \exp_not:V \l__enumext_newlabel_arg_one_tl }
2621   { \l__enumext_newlabel_arg_two_tl }
2622 }
2623 \l__enumext_write_aux_file_tl
2624 }

```

(End of definition for `__enumext_store_internal_ref:.`)

13.29 Common functions for `\anskey` and `anskey*` environment

`__enumext_store_anskey_arg:n`

The internal function `__enumext_store_anskey_arg:n` first we pass the $\langle \textit{argument} \rangle$ to the *prop list*, then checks the state of the variable `\l__enumext_store_ref_key_bool` handled by the *save-ref* key and will call the function `__enumext_store_internal_ref:` for the “*internal label and ref*” system. Followed by this if the *show-ans* or *show-pos* keys are active we will show the “*wrapped*” $\langle \textit{argument} \rangle$.

```

2625 \cs_new_protected:Npn \__enumext_store_anskey_arg:n #1
2626 {
2627   \int_gincr:N \g__enumext_item_anskey_int
2628   \__enumext_store_addto_prop:n {#1}
2629   \bool_if:NT \l__enumext_store_ref_key_bool
2630   {
2631     \__enumext_store_internal_ref:
2632   }
2633   \__enumext_anskey_show_wrap_left:n { #1 }

```

Now we start processing the $[(key = val)]$ passed to the command to build our `\item` in the variable `\l__enumext_store_anskey_arg_tl` which we will “*store*” in the *sequence*. First we clear the variable `\l__enumext_store_anskey_arg_tl` and process the $\langle \textit{keys} \rangle$, if the *break-col* key is present and the command is running under `enumext` (not in `enumext*`) we will add `\columnbreak` and then `\item`.

```

2634 \tl_clear:N \l__enumext_store_anskey_arg_tl
2635 \bool_lazy_and:nnT
2636 { \bool_if_p:N \l__enumext_store_columns_break_bool }
2637 { \bool_not_p:n { \l__enumext_starred_bool } }
2638 {
2639   \tl_put_left:Nn \l__enumext_store_anskey_arg_tl { \columnbreak }
2640 }
2641 \tl_put_right:Nn \l__enumext_store_anskey_arg_tl { \item }

```

If the *item-join* key is present and the command is running under `enumext*` we will add $\langle \textit{number} \rangle$ to `\l__enumext_store_anskey_arg_tl`.

```

2642 \bool_lazy_and:nnT
2643 { \bool_not_p:n { \l__enumext_starred_bool } }
2644 { \int_compare_p:nNn { \l__enumext_store_item_join_int } > { 1 } }
2645 {
2646   \tl_put_right:Ne \l__enumext_store_anskey_arg_tl
2647   {
2648     ( \exp_not:V \l__enumext_store_item_join_int )
2649   }

```

```
2650     }
```

And now we will review the keys `item-star`, `item-sym*` and `item-pos*` and pass them to `\l__enumext_store_anskey_arg_tl` along with the $\langle argument \rangle$ for `\anskey` or $\langle body \rangle$ for `anskey*`.

```
2651     \bool_if:NTF \l__enumext_store_item_star_bool
2652     {
2653       \tl_put_right:Nn \l__enumext_store_anskey_arg_tl { * }
2654       \tl_if_empty:NF \l__enumext_store_item_symbol_tl
2655       {
2656         \tl_put_right:Ne \l__enumext_store_anskey_arg_tl
2657         {
2658           [ \exp_not:V \l__enumext_store_item_symbol_tl ]
2659         }
2660       }
2661       \dim_compare:nT
2662       {
2663         \l__enumext_store_item_symbol_sep_dim != \c_zero_dim
2664       }
2665       {
2666         \tl_put_right:Ne \l__enumext_store_anskey_arg_tl
2667         {
2668           [ \exp_not:V \l__enumext_store_item_symbol_sep_dim ]
2669         }
2670       }
2671       \tl_put_right:Nn \l__enumext_store_anskey_arg_tl {#1}
2672     }
2673     {
2674       \tl_put_right:Nn \l__enumext_store_anskey_arg_tl {#1}
2675     }
```

Finally we check if the `save-ref` key are active along with the `hyperref` package load, if both conditions are met, it will create the `\hyperlink` with “`symbol`” set by `mark-ref` key and then store in *sequence*.

```
2676     \bool_lazy_and:nnT
2677     { \bool_if_p:N \l__enumext_store_ref_key_bool }
2678     { \bool_if_p:N \l__enumext_hyperref_bool }
2679     {
2680       \tl_put_right:Ne \l__enumext_store_anskey_arg_tl
2681       {
2682         \hfill \exp_not:N \hyperlink { \exp_not:V \l__enumext_newlabel_arg_one_tl }
2683         { \exp_not:V \l__enumext_mark_ref_sym_tl }
2684       }
2685     }
2686     \__enumext_store_addto_seq:V \l__enumext_store_anskey_arg_tl
2687 }
```

(End of definition for `__enumext_store_anskey_arg:n`)

```
\__enumext_anskey_show_wrap_arg:n
```

The function `__enumext_anskey_show_wrap_arg:n` “wraps” the $\langle argument \rangle$ passed to `\anskey` and the $\langle body \rangle$ for `anskey*` when using the `wrap-ans` and `wrap-sep` keys.

```
2688 \cs_new_protected:Npn \__enumext_anskey_show_wrap_arg:n #1
2689 {
2690   \par
2691   \bool_if:NTF \l__enumext_starred_bool
2692   {
2693     \dim_compare:nNnT { \l__enumext_mark_sym_sep_dim } = { \c_zero_dim }
2694     {
2695       \dim_set:Nn \l__enumext_mark_sym_sep_dim { \l__enumext_labelsep_vii_dim }
2696     }
2697     \__enumext_print_keyans_box:NN
2698     \l__enumext_labelwidth_vii_dim \l__enumext_mark_sym_sep_dim
2699   }
2700   {
2701     \dim_compare:nNnT { \l__enumext_mark_sym_sep_dim } = { \c_zero_dim }
2702     {
2703       \dim_set:Nn \l__enumext_mark_sym_sep_dim
2704       {
2705         \dim_use:c { \l__enumext_labelsep_ \__enumext_level: _dim }
2706       }
2707     }
2708     \__enumext_print_keyans_box:cc
2709     { \l__enumext_labelwidth_ \__enumext_level: _dim } { \l__enumext_mark_sym_sep_dim }
2710   }
```

```

2711   \__enumext_anskey_wrapper:n { #1 }
2712 }

```

(End of definition for __enumext_anskey_show_wrap_arg:n.)

__enumext_anskey_show_wrap_left:n

The function __enumext_anskey_show_wrap_left:n will show the “*mark*” defined by the `mark-ans` key or the “*position*” of the $\langle content \rangle$ stored in the *prop list* when using the `show-pos` key on the left margin next to the “*wraps*” $\langle argument \rangle$ passed to `\anskey` and the $\langle body \rangle$ in `anskey*` on the right side when using the `show-ans` key.

```

2713 \cs_new_protected:Npn \__enumext_anskey_show_wrap_left:n #1
2714 {
2715   \bool_if:NT \__enumext_show_answer_bool
2716   {
2717     \__enumext_anskey_show_wrap_arg:n { #1 }
2718   }
2719   \bool_if:NT \__enumext_show_position_bool
2720   {
2721     \tl_set:Nx \__enumext_mark_answer_sym_tl
2722     {
2723       \group_begin:
2724       \exp_not:N \normalfont
2725       \exp_not:N \footnotesize [ \int_eval:n
2726       {
2727         \prop_count:c { g__enumext_ \__enumext_store_name_tl _prop }
2728       }
2729       ]
2730       \group_end:
2731     }
2732     \__enumext_anskey_show_wrap_arg:n { #1 }
2733   }
2734 }

```

(End of definition for __enumext_anskey_show_wrap_left:n.)

13.30 The command \anskey

Since we will be “*storing content*” in a `list` environment within *sequences* and can (more or less) manage the options passed to each level, it is necessary that we have a little more control over `\item` when storing.

The `\anskey` command will cover this point and give it similar behaviour to that of `\item` in the `enumext` and `enumext*` environments executed as follows `\anskey[\key = val]{\langle content \rangle}`.

First we’ll add the keys `break-col`, `item-join`, `item-star`, `item-sym*` and `item-pos*`.

```

break-col
item-join
item-star
item-sym*
item-pos*
unknown
\__enumext_anskey_unknown:n
\__enumext_anskey_unknown:nn
2735 \keys_define:nn { enumext / anskey }
2736 {
2737   break-col .bool_set:N = \__enumext_store_columns_break_bool,
2738   break-col .default:n = true,
2739   break-col .value_forbidden:n = true,
2740   item-join .int_set:N = \__enumext_store_item_join_int,
2741   item-join .value_required:n = true,
2742   item-star .bool_set:N = \__enumext_store_item_star_bool,
2743   item-star .default:n = true,
2744   item-star .value_forbidden:n = true,
2745   item-sym* .tl_set:N = \__enumext_store_item_symbol_tl,
2746   item-sym* .value_required:n = true,
2747   item-pos* .dim_set:N = \__enumext_store_item_symbol_sep_dim,
2748   item-pos* .value_required:n = true,
2749   unknown .code:n = { \__enumext_anskey_unknown:n {#1} },
2750 }

```

The $\langle keys \rangle$ are stored in `\l_keys_key_str` and the value (if any) is passed as an argument to the function `__enumext_anskey_unknown:n`.

```

2751 \cs_new_protected:Npn \__enumext_anskey_unknown:n #1
2752 {
2753   \exp_args:NV \__enumext_anskey_unknown:nn \l_keys_key_str {#1}
2754 }
2755 \cs_new_protected:Npn \__enumext_anskey_unknown:nn #1 #2
2756 {
2757   \tl_if_blank:nTF {#2}
2758   {
2759     \msg_error:nnn { enumext } { anskey-cmd-key-unknown } {#1}
2760   }
2761 }

```

```

2762         \msg_error:nnnn { enumext } { anskey-cmd-key-value-unknown } {#1} {#2}
2763     }
2764 }

```

(End of definition for `break-col` and others.)

- The `\anskey` command will only be present when using the `save-ans` key in `enumext` and `enumext*` environments, otherwise it will return an error.

\anskey We will first call the function `__enumext_anskey_safe_outer:` to be sure where we execute the command, then we will check the state of the variable `\l__enumext_check_answers_bool` set by the key `no-store`, if is true we will increment `\g__enumext_item_anskey_int` for the internal “*check answer*” system and execute the function `__enumext_anskey_safe_inner:n` to ensure that the command is not nested and that the argument is not empty, finally search the `[(key = val)]` and call the function `__enumext_store_-anskey_arg:n`.

```

2765 \NewDocumentCommand \anskey { o +m }
2766 {
2767     \__enumext_anskey_safe_outer:
2768     \group_begin:
2769         \bool_if:NT \l__enumext_check_answers_bool
2770         {
2771             \tl_if_novalue:nF {#1}
2772             {
2773                 \keys_set:nn { enumext / anskey } {#1}
2774             }
2775             \tl_if_blank:nTF {#2}
2776             {
2777                 \msg_error:nn { enumext } { anskey-empty-arg }
2778             }
2779             {
2780                 \__enumext_anskey_safe_inner:
2781                 \__enumext_store_anskey_arg:n {#2}
2782             }
2783         }
2784     \group_end:
2785 }

```

(End of definition for `\anskey`. This function is documented on page 13.)

13.30.1 Internal functions for the command

`__enumext_anskey_safe_outer:` The `__enumext_store_anskey_safe_outer:` function will return the appropriate messages when the command is executed outside the environment in which the `save-ans` key was activated.

`__enumext_anskey_safe_inner:`

```

2786 \cs_new_protected:Nn \__enumext_anskey_safe_outer:
2787 {
2788     \bool_if:NF \l__enumext_store_active_bool
2789     {
2790         \msg_error:nnnn { enumext } { anskey-wrong-place } { anskey } { enumext }
2791     }
2792     \int_compare:nNnT { \l__enumext_keyans_level_int } = { 1 }
2793     {
2794         \msg_error:nnnn { enumext } { command-wrong-place } { anskey } { keyans }
2795     }
2796     \int_compare:nNnT { \l__enumext_keyans_level_h_int } = { 1 }
2797     {
2798         \msg_error:nnnn { enumext } { command-wrong-place } { anskey } { keyans* }
2799     }
2800     \int_compare:nNnT { \l__enumext_keyans_pic_level_int } = { 1 }
2801     {
2802         \msg_error:nnnn { enumext } { command-wrong-place } { anskey } { keyanspic }
2803     }
2804 }

```

The `__enumext_anskey_safe_inner:` function will first check if the command is nested, if preceded by a not numbered `\item` or if it is in *math mode* returning the appropriate messages.

```

2805 \cs_new_protected:Nn \__enumext_anskey_safe_inner:
2806 {
2807     \int_incr:N \l__enumext_anskey_level_int
2808     \int_compare:nNnT { \l__enumext_anskey_level_int } > { 1 }
2809     {
2810         \msg_error:nn { enumext } { anskey-nested }
2811     }
2812     \bool_if:NF \l__enumext_item_number_bool

```

```

2813     {
2814         \msg_error:nn { enumext } { anskey-unnumber-item }
2815     }
2816     \mode_if_math:T
2817     {
2818         \msg_error:nne { enumext } { anskey-math-mode } { \c_backslash_str anskey }
2819     }
2820 }

```

(End of definition for `__enumext_anskey_safe_outer:` and `__enumext_anskey_safe_inner:`)

13.31 The environment `anskey*`

The original implementation of the `anskey*` environment used non-public functions from the `scontents`[4] package, which was not the best approach. Fortunately L^AT_EX release 2025-06-01 implemented the new `c`-type argument in the `ltxcmd`[13], with which we can record the *body* of the environment in *verbatim mode* and, together with `\scantokens` do the work as the original implementation.

First we add the same keys from the `\anskey` command along with the `force-eol`, `write-env` and `overwrite` keys that were in the original implementation that used the `scontents` support package for these.

```

break-col 2821 \keys_define:nn { enumext / anskey* }
item-join 2822 {
item-star 2823     break-col .bool_set:N = \__enumext_store_columns_break_bool,
item-sym* 2824     break-col .default:n = true,
item-pos* 2825     break-col .value_forbidden:n = true,
force-eol 2826     item-join .int_set:N = \__enumext_store_item_join_int,
write-env 2827     item-join .value_required:n = true,
overwrite 2828     item-star .bool_set:N = \__enumext_store_item_star_bool,
          2829     item-star .default:n = true,
          2830     item-star .value_forbidden:n = true,
          2831     item-sym* .tl_set:N = \__enumext_store_item_symbol_tl,
          2832     item-sym* .value_required:n = true,
          2833     item-pos* .dim_set:N = \__enumext_store_item_symbol_sep_dim,
          2834     item-pos* .value_required:n = true,
          2835     force-eol .bool_set:N = \__enumext_anskey_env_force_eol_bool,
          2836     force-eol .initial:n = false,
          2837     force-eol .default:n = true,
          2838     write-env .code:n = {
2839         \bool_set_true:N \__enumext_write_anskey_env_bool
2840         \tl_set:Nn \__enumext_write_anskey_env_file_name_tl {#1}
2841     },
2842     write-env .value_required:n = true,
2843     overwrite .bool_set:N = \__enumext_anskey_env_overwrite_bool,
2844     overwrite .initial:n = false,
2845     overwrite .default:n = true,
2846     unknown .code:n = { \__enumext_anskey_env_unknown:n {#1} },
2847 }

```

(End of definition for `break-col` and others.)

The *keys* are stored in `\l_keys_key_str` and the value (if any) is passed as an argument to the function `__enumext_anskey_env_unknown:n`.

```

\__enumext_anskey_env_unknown:n 2848 \cs_new_protected:Npn \__enumext_anskey_env_unknown:n #1
\__enumext_anskey_env_unknown:nn 2849 {
2850     \exp_args:NV \__enumext_anskey_env_unknown:nn \l_keys_key_str {#1}
2851 }
2852 \cs_new_protected:Npn \__enumext_anskey_env_unknown:nn #1#2
2853 {
2854     \tl_if_blank:nTF {#2}
2855     {
2856         \msg_error:nnn { enumext } { anskey-env-key-unknown } {#1}
2857     }
2858     {
2859         \msg_error:nnnn { enumext } { anskey-env-key-value-unknown } {#1} {#2}
2860     }
2861 }

```

(End of definition for `__enumext_anskey_env_unknown:n` and `__enumext_anskey_env_unknown:nn`.)


```

\__enumext_anskey_env_file_if_writable:n
\__enumext_anskey_env_file_if_writable:nT
\__enumext_anskey_env_file_if_writable:nF
\__enumext_anskey_env_file_if_writable:nT

```

The conditional function `__enumext_anskey_env_file_if_writable:n` used by the `write-env` and `overwrite` keys in the `anskey*` environment to determine whether the output file is written or overwritten.

```

2862 \prg_new_protected_conditional:Npnn \__enumext_anskey_env_file_if_writable:n #1 { T, F, TF }
2863 {
2864   \bool_if:NTF \l__enumext_write_anskey_env_bool
2865   {
2866     \file_if_exist:nTF {#1}
2867     {
2868       \bool_if:NTF \l__enumext_anskey_env_overwrite_bool
2869       {
2870         \msg_warning:nne { enumext } { overwrite-file } {#1}
2871         \prg_return_true:
2872       }
2873       {
2874         \msg_warning:nne { enumext } { not-writing } {#1}
2875         \prg_return_false:
2876       }
2877     }
2878     {
2879       \msg_warning:nne { enumext } { writing-file } {#1}
2880       \prg_return_true:
2881     }
2882   }
2883   { \prg_return_false: }
2884 }

```

The `__enumext_anskey_env_file_write:nn` function is used by the `write-env` key in the `anskey*` environment to write the output file with the `⟨body⟩` of the environment.

```

2885 \cs_new_protected:Npn \__enumext_anskey_env_file_write:nn #1#2
2886 {
2887   \__enumext_anskey_env_file_if_writable:nT {#1}
2888   {
2889     \iow_open:Nn \l__enumext_write_anskey_env_file_iow {#1}
2890     \iow_now:Nn \l__enumext_write_anskey_env_file_iow {#2}
2891     \iow_close:N \l__enumext_write_anskey_env_file_iow
2892   }
2893 }
2894 \cs_generate_variant:Nn \__enumext_anskey_env_file_write:nn { VV }

```

(End of definition for `__enumext_anskey_env_file_if_writable:n` and others.)

anskey* First, we'll call the function `__enumext_anskey_env_safe_outer:` to make sure where we're running the environment, then, we'll check the state of the variable `\l__enumext_check_answers_bool` set by the key `no-store`. If it's true, we'll look for `[⟨key = val⟩]` and verify that the *argument* `c` `⟨body⟩` is not empty. Finally, we'll run the internal check function `__enumext_anskey_env_safe_inner:n` and call the function `__enumext_store_anskey_arg:n`.

```

2895 \NewDocumentEnvironment{anskey*}{ o c }
2896 {
2897   \__enumext_anskey_env_safe_outer:
2898   \bool_if:NNT \l__enumext_check_answers_bool
2899   {
2900     \tl_if_no_value:nF {#1}
2901     {
2902       \keys_set:nn { enumext / anskey* } {#1}
2903     }
2904     \tl_if_blank:nTF {#2}
2905     {
2906       \msg_error:nn { enumext } { anskey-empty-arg }
2907     }
2908     {
2909       \__enumext_anskey_env_safe_inner:
2910       \__enumext_store_anskey_env:n {#2}
2911     }
2912   }
2913 } { }

```

(End of definition for `anskey*`. This function is documented on page 14.)

13.31.1 Internal functions for the environment

```

\__enumext_anskey_env_safe_outer:
\__enumext_anskey_env_safe_inner:
\__enumext_store_anskey_env:n

```

The function `__enumext_store_anskey_safe_outer:` will return the appropriate messages when `anskey*` is executed outside the environment in which the `save-ans` key was activated or within the `keyans`, `keyans*` or `keyanspic` environments.

```

2914 \cs_new_protected:Nn \__enumext_anskey_env_safe_outer:
2915 {
2916   \bool_if:NF \l__enumext_store_active_bool
2917   {
2918     \msg_error:nnn { enumext } { anskey-env-error } { anskey* }
2919   }
2920   \int_compare:nNnT { \l__enumext_keyans_level_int } = { 1 }
2921   {
2922     \msg_error:nnn { enumext } { anskey-env-wrong } { keyans }
2923   }
2924   \int_compare:nNnT { \l__enumext_keyans_level_h_int } = { 1 }
2925   {
2926     \msg_error:nnn { enumext } { anskey-env-wrong } { keyans* }
2927   }
2928   \int_compare:nNnT { \l__enumext_keyans_pic_level_int } = { 1 }
2929   {
2930     \msg_error:nnn { enumext } { anskey-env-wrong } { keyanspic }
2931   }
2932 }

```

The function `__enumext_anskey_env_safe_inner:` will first check if preceded by a not numbered `\item` or if it is in *math mode* returning the appropriate messages.

```

2933 \cs_new_protected:Nn \__enumext_anskey_env_safe_inner:
2934 {
2935   \bool_if:NF \l__enumext_item_number_bool
2936   {
2937     \msg_error:nn { enumext } { anskey-unnumber-item }
2938   }
2939   \mode_if_math:T
2940   {
2941     \msg_error:nnn { enumext } { anskey-math-mode } { anskey* }
2942   }
2943 }

```

The `__enumext_store_anskey_env:n` function will first pass the argument `c` (*body*) to the variable `\l__enumext_store_anskey_env_tl` and replace the macro `\obeyedline` with `^^J` and then execute the `write-env` and `overwrite` keys, check the state of the variable `\l__enumext_anskey_env_force_eol_bool` managed by the `force-eol` key and we will add `\c__enumext_anskey_env_hidden_space_str` if necessary. Finally we will use `\exp_args:Ne` on the `__enumext_store_anskey_arg:n` to expand the `__enumext_scan_tokens:n` function which rescans the `\l__enumext_store_anskey_env_tl` variable before processing it.

```

2944 \cs_new_protected:Npn \__enumext_store_anskey_env:n #1
2945 {
2946   \tl_set:Nn \l__enumext_store_anskey_env_tl {#1}
2947   \RenewDocumentCommand \obeyedline { } { \iow_char:N ^^J }
2948   \tl_replace_all:Nee \l__enumext_store_anskey_env_tl { \obeyedline } { \iow_char:N ^^J }
2949   \__enumext_anskey_env_file_write:VV
2950   \l__enumext_write_anskey_env_file_name_tl \l__enumext_store_anskey_env_tl
2951   \bool_if:NF \l__enumext_anskey_env_force_eol_bool
2952   {
2953     \tl_put_right:Ne \l__enumext_store_anskey_env_tl
2954     {
2955       \c__enumext_anskey_env_hidden_space_str
2956     }
2957   }
2958   \exp_args:Ne
2959   \__enumext_store_anskey_arg:n
2960   {
2961     \__enumext_scan_tokens:n { \l__enumext_store_anskey_env_tl }
2962   }
2963 }

```

Since `\obeyedline` can be redefined by the user, for example to `\mbox{} \par`, it is necessary to redefine it to `^^J` in order to use `\tl_replace_all:Nee` otherwise it returns an error.

(End of definition for `__enumext_anskey_env_safe_outer:`, `__enumext_anskey_env_safe_inner:`, and `__enumext_store_anskey_env:n`.)

13.32 Executing check-ans system and write .log

`__enumext_execute_after_env:`

The `__enumext_execute_after_env:` function will first return the appropriate message for the end of the environment in which the `save-ans` key is being executed, then call the `__enumext_item_answer_diff:` function and then will write the values of the global variables used to the `.log` file. If the key `check-ans` is active it will execute the function `__enumext_check_ans_show:` and show the result in the terminal, otherwise it will execute the function `__enumext_check_ans_log:` and write the results in the `.log` file and finally we execute the function `__enumext_reset_global_vars:` returning the used variables to their original state.

```

2964 \cs_new_protected:Nn \__enumext_execute_after_env:
2965 {
2966   \int_compare:nNnT { \l__enumext_level_int } = { 0 }
2967   {
2968     \tl_if_empty:NF \g__enumext_store_name_tl
2969     {
2970       \__enumext_stop_save_ans_msg:
2971       \__enumext_item_answer_diff:
2972       \__enumext_log_global_vars:
2973       \__enumext_log_answer_vars:
2974       \bool_if:NTF \g__enumext_check_ans_key_bool
2975       {
2976         \__enumext_check_ans_show:
2977       }
2978       { \__enumext_check_ans_log: }
2979     }
2980     \__enumext_reset_global_vars:
2981   }
2982 }

```

• This function is passed to the function `__enumext_after_env:nn` for the environments `enumext` (§13.39) and `enumext*` (§13.44) and it is executed only when the environments are not nested or at some level of these..

(End of definition for `__enumext_execute_after_env:`.)

13.33 Common functions for keyans, keyans* and keyanspic

13.33.1 Storing content in prop list

`__enumext_keyans_addto_prop:n`

The function `__enumext_keyans_addto_prop:n` will pass the the current $\langle label \rangle$ for $\langle item^* \rangle$ in `keyans` environment and the current $\langle label \rangle$ for $\langle anspic^* \rangle$ in `keyanspic` environment followed by the $\langle contents \rangle$ of the *optional argument* of both commands to the `\l__enumext_store_current_label_tl` variable, which will be stored to the *prop list* defined by the `save-ans` key using the function `__enumext_store_addto_prop:V`.

```

2983 \cs_new_protected:Npn \__enumext_keyans_addto_prop:n #1
2984 {
2985   \tl_clear:N \l__enumext_store_current_label_tl
2986   \int_compare:nNnTF { \l__enumext_keyans_pic_level_int } = { 1 }
2987   {
2988     \tl_put_right:Ne \l__enumext_store_current_label_tl { \l__enumext_label_vi_tl }
2989   }
2990   {
2991     \tl_put_right:Ne \l__enumext_store_current_label_tl { \l__enumext_label_v_tl }
2992   }

```

If the *optional argument* is present and the `save-sep` key is not empty, we save it.

```

2993   \tl_if_novalue:NF { #1 }
2994   {
2995     \tl_if_empty:NF \l__enumext_store_keyans_item_opt_sep_v_tl
2996     {
2997       \tl_put_right:NV \l__enumext_store_current_label_tl \l__enumext_store_keyans_item_opt_sep_v_tl
2998     }
2999     \tl_put_right:Nn \l__enumext_store_current_label_tl { #1 }
3000   }
3001   \__enumext_store_addto_prop:V \l__enumext_store_current_label_tl
3002 }

```

(End of definition for `__enumext_keyans_addto_prop:n`.)

13.33.2 The save-ref key for keyans, keyans* and keyanspic

The “*internal label and ref*” system for the `keyans`, `keyans*` and `keyanspic` environments has *slight differences* with the one implemented for `\anskey` basically because in this environments the interest is in the current $\langle label \rangle$ for `\item*` and `\anspic*` with the $\langle contents \rangle$ of the *optional argument*. The mechanism defined here will allow to execute `\ref{\(store name : position\)}` and will return 1. (A).

The function `__enumext_keyans_store_ref`: handles the “*internal label and ref*” system used by the `save-ref` key for `\item*` and `\anspic*` commands. First we will create copies of the current $\langle labels \rangle$ and remove the dots “.” from them, we do not want to get double dots in references.

```

3003 \cs_new_protected:Nn \__enumext_keyans_store_ref:
3004 {
3005   \bool_if:NT \l__enumext_store_ref_key_bool
3006   {
3007     \cs_set_protected:Npn \__enumext_tmp:n ##1
3008     {
3009       \tl_set_eq:cc { \l__enumext_label_copy_##1_tl } { \l__enumext_label_##1_tl }
3010       \tl_reverse:c { \l__enumext_label_copy_##1_tl }
3011       \tl_remove_once:cn { \l__enumext_label_copy_##1_tl } { . }
3012       \tl_reverse:c { \l__enumext_label_copy_##1_tl }
3013     }
3014     \clist_map_inline:nn { i, v, vi, vii, viii } { \__enumext_tmp:n {##1} }
3015     \__enumext_keyans_store_ref_aux_i:
3016   }
3017 }

```

The auxiliary function `__enumext_keyans_store_ref_aux_i`: set the variable `\l__enumext_newlabel_arg_one_tl` which will contain $\{ \langle store name : position \rangle \}$ analyzing whether the environment in which they are executed is `enumext*` or `enumext`.

```

3018 \cs_new_protected:Nn \__enumext_keyans_store_ref_aux_i:
3019 {
3020   \bool_if:NT \g__enumext_starred_bool
3021   {
3022     \tl_set_eq:NN \l__enumext_label_copy_i_tl \l__enumext_label_copy_vii_tl
3023   }
3024   \int_compare:nNnT { \l__enumext_keyans_pic_level_int } = { 1 }
3025   {
3026     \tl_put_right:Ne \l__enumext_newlabel_arg_two_tl
3027     { \l__enumext_label_copy_i_tl . \l__enumext_label_copy_vi_tl }
3028   }
3029   \int_compare:nNnT { \l__enumext_keyans_level_int } = { 1 }
3030   {
3031     \tl_put_right:Ne \l__enumext_newlabel_arg_two_tl
3032     { \l__enumext_label_copy_i_tl . \l__enumext_label_copy_v_tl }
3033   }
3034   \int_compare:nNnT { \l__enumext_keyans_level_h_int } = { 1 }
3035   {
3036     \tl_put_right:Ne \l__enumext_newlabel_arg_two_tl
3037     { \l__enumext_label_copy_i_tl . \l__enumext_label_copy_viii_tl }
3038   }
3039   \tl_put_right:Ne \l__enumext_newlabel_arg_one_tl
3040   {
3041     \l__enumext_store_name_tl \c_colon_str
3042     \int_eval:n { \prop_count:c { g__enumext_ \l__enumext_store_name_tl _prop } }
3043   }
3044   \__enumext_keyans_store_ref_aux_ii:
3045 }

```

Now auxiliary function `__enumext_keyans_store_ref_aux_ii`: save the result in the variable `\l__enumext_write_aux_file_tl` and finally we write in the .aux file.

```

3046 \cs_new_protected:Nn \__enumext_keyans_store_ref_aux_ii:
3047 {
3048   \tl_put_right:Ne \l__enumext_write_aux_file_tl
3049   {
3050     \__enumext_newlabel:nn
3051     { \exp_not:V \l__enumext_newlabel_arg_one_tl }
3052     { \l__enumext_newlabel_arg_two_tl }
3053   }
3054   \l__enumext_write_aux_file_tl
3055 }

```

(End of definition for `__enumext_keyans_store_ref`:, `__enumext_keyans_store_ref_aux_i`:, and `__enumext_keyans_store_ref_aux_ii`:.)

13.33.3 Storing content in sequence

```
\__enumext_keyans_addto_seq:n
\__enumext_keyans_addto_seq_link:
```

The function `__enumext_keyans_addto_seq:n` will pass the contents of the current *⟨label⟩* `\l__enumext_label_v_tl` for the `keyans` environment and the `\l__enumext_label_vi_tl` for the `keyanspic` environment when using `\item*` and `\anspic*`, followed by the *⟨contents⟩* of the *optional argument* of both commands to the `\l__enumext_store_current_label_tl` variable to the sequence defined by the `save-ans` key.

```
3056 \cs_new_protected:Npn \__enumext_keyans_addto_seq:n #1
3057 {
3058   \tl_clear:N \l__enumext_store_current_label_tl
3059   \int_compare:nNnTF { \l__enumext_keyans_pic_level_int } = { 1 }
3060   {
3061     \tl_put_right:Ne \l__enumext_store_current_label_tl { \item \l__enumext_label_vi_tl }
3062   }
3063   {
3064     \tl_put_right:Ne \l__enumext_store_current_label_tl { \item \l__enumext_label_v_tl }
3065   }
3066   \tl_if_novalue:nF { #1 }
3067   {
3068     \tl_if_empty:NF \l__enumext_store_keyans_item_opt_sep_v_tl
3069     {
3070       \tl_put_right:NV \l__enumext_store_current_label_tl \l__enumext_store_keyans_item_opt_
3071     }
3072     \tl_put_right:Nn \l__enumext_store_current_label_tl { #1 }
3073   }
3074   \__enumext_keyans_addto_seq_link:
3075 }
```

Checks if the `save-ref` key is active along with the `hyperref` package load, if both conditions are met, it will create the `\hyperlink` and then store using the `__enumext_store_addto_seq:V` function. Finally, copy the contents of the variable `\l__enumext_store_current_label_tl` into the global variable `\g__enumext_check_ans_item_tl` to be used by the function `__enumext_check_starred_cmd:n` and increment the value of the integer variable `\g__enumext_item_anskey_int` handled by the `check-ans` key.

```
3076 \cs_new_protected:Nn \__enumext_keyans_addto_seq_link:
3077 {
3078   \bool_lazy_and:nnT
3079   { \bool_if_p:N \l__enumext_store_ref_key_bool }
3080   { \bool_if_p:N \l__enumext_hyperref_bool }
3081   {
3082     \tl_put_right:Ne \l__enumext_store_current_label_tl
3083     {
3084       \hfill \exp_not:N \hyperlink
3085       {
3086         \exp_not:V \l__enumext_newlabel_arg_one_tl
3087       }
3088       { \exp_not:V \l__enumext_mark_ref_sym_tl }
3089     }
3090   }
3091   \__enumext_store_addto_seq:V \l__enumext_store_current_label_tl
3092   \bool_if:NT \l__enumext_check_answers_bool
3093   {
3094     \int_gincr:N \g__enumext_item_anskey_int
3095   }
3096 }
```

(End of definition for `__enumext_keyans_addto_seq:n` and `__enumext_keyans_addto_seq_link:.`)

13.33.4 The show-ans and show-pos keys for keyans and keyanspic

```
\__enumext_keyans_save_item_opt:n
\__enumext_keyans_show_item_opt:
\__enumext_keyans_show_item_opt_viii:
```

The function `__enumext_keyans_save_item_opt:n` will save the optional argument of `\item*` and `\anspic*` in the variable `\l__enumext_store_current_opt_arg_tl`.

```
3097 \cs_new_protected:Npn \__enumext_keyans_save_item_opt:n #1
3098 {
3099   \tl_if_novalue:nF { #1 }
3100   {
3101     \tl_set:Nn \l__enumext_store_current_opt_arg_tl { #1 }
3102   }
3103 }
```

The function `__enumext_keyans_show_item_opt:` will print the optional arguments of `\item*` and `\anspic*` when the `show-ans` or `show-pos` keys are set next to the key `wrap-opt` in `keyans` and `keyanspic` environments.

```

3104 \cs_new_protected:Nn \__enumext_keyans_show_item_opt:
3105 {
3106   \tl_if_empty:NF \l__enumext_store_current_opt_arg_tl
3107   {
3108     \bool_lazy_or:nnT
3109     { \bool_if_p:N \l__enumext_show_answer_bool }
3110     { \bool_if_p:N \l__enumext_show_position_bool }
3111     {
3112       \__enumext_keyans_wrapper_opt_v:n
3113       { \l__enumext_store_current_opt_arg_tl } \c_space_tl
3114     }
3115   }
3116 }

```

The function `__enumext_keyans_show_item_opt_viii:` will print the optional argument of `\item*` when the `show-ans` or `show-pos` keys are set next to the key `wrap-opt` in `keyans*` environment.

```

3117 \cs_new_protected:Nn \__enumext_keyans_show_item_opt_viii:
3118 {
3119   \tl_if_empty:NF \l__enumext_store_current_opt_arg_tl
3120   {
3121     \bool_lazy_or:nnT
3122     { \bool_if_p:N \l__enumext_show_answer_bool }
3123     { \bool_if_p:N \l__enumext_show_position_bool }
3124     {
3125       \__enumext_keyans_wrapper_opt_viii:n
3126       { \l__enumext_store_current_opt_arg_tl } \c_space_tl
3127     }
3128   }
3129 }

```

(End of definition for `__enumext_keyans_save_item_opt:n`, `__enumext_keyans_show_item_opt:`, and `__enumext_keyans_show_item_opt_viii:`.)

```

\__enumext_keyans_pos_mark_set:
\__enumext_keyans_show_ans:
\__enumext_keyans_show_pos:

```

The function `__enumext_keyans_pos_mark_set:` adjusts the horizontal spaces for the `mark-sep*` key taking into account the value of the `align` key and the width of `\label`.

```

3130 \cs_new_protected:Nn \__enumext_keyans_pos_mark_set:
3131 {
3132   \__enumext_label_width_by_box:Nn
3133   \l__enumext_mark_sep_tmpa_dim { \l__enumext_label_v_tl }
3134   \str_case:Vn \l__enumext_align_label_pos_v_str
3135   {
3136     { l }
3137     {
3138       \dim_set:Nn \l__enumext_mark_sep_tmpb_dim { \c_zero_dim }
3139     }
3140     { r }
3141     {
3142       \dim_set:Nn \l__enumext_mark_sep_tmpb_dim
3143       { \l__enumext_labelwidth_v_dim - \l__enumext_mark_sep_tmpa_dim }
3144     }
3145     { c }
3146     {
3147       \dim_set:Nn \l__enumext_mark_sep_tmpb_dim
3148       { 0.5\l__enumext_labelwidth_v_dim - 0.5\l__enumext_mark_sep_tmpa_dim }
3149     }
3150   }

```

Here we set the default values for the key `mark-ans*`, `mark-sep*` and `mark-pos*`.

```

3151   \dim_compare:nNnT { \l__enumext_mark_sym_sep_v_dim } = { \c_zero_dim }
3152   {
3153     \dim_set:Nn \l__enumext_mark_sym_sep_v_dim { \l__enumext_labelsep_v_dim }
3154   }
3155   \tl_set_eq:NN \l__enumext_mark_answer_sym_tl \l__enumext_mark_answer_sym_v_tl
3156   \dim_add:Nn \l__enumext_mark_sym_sep_v_dim { \l__enumext_mark_sep_tmpb_dim }
3157   \str_set_eq:NN \l__enumext_mark_position_str \l__enumext_mark_position_v_str
3158 }

```

The function `__enumext_keyans_show_ans:` will print the `\symbol` set by the `mark-ans*` key when the `show-ans` key is active.

```

3159 \cs_new_protected:Nn \__enumext_keyans_show_ans:
3160 {
3161   \bool_lazy_all:nT

```

```

3162     {
3163         { \bool_if_p:N \l__enumext_show_answer_bool }
3164         { \bool_if_p:N \l__enumext_item_wrap_key_bool }
3165     }
3166     {
3167         \__enumext_keyans_pos_mark_set:
3168         \__enumext_print_keyans_box:NN
3169         \l__enumext_labelwidth_v_dim \l__enumext_mark_sym_sep_v_dim
3170     }
3171 }

```

The function `__enumext_keyans_show_pos:` will print the *position* of the stored content in *prop list*. Need add `1` to `\g__enumext_⟨store name⟩_prop` for `keyans` environment.

```

3172 \cs_new_protected:Nn \__enumext_keyans_show_pos:
3173 {
3174     \int_compare:nNnTF { \l__enumext_keyans_level_int } = { 1 }
3175     {
3176         \int_incr:N \l__enumext_show_pos_tmp_int
3177     }
3178     {
3179         \int_zero:N \l__enumext_show_pos_tmp_int
3180     }
3181     \bool_lazy_all:nT
3182     {
3183         { \bool_if_p:N \l__enumext_show_position_bool }
3184         { \bool_if_p:N \l__enumext_item_wrap_key_bool }
3185     }
3186     {
3187         \tl_set:Ne \l__enumext_mark_answer_sym_v_tl
3188         {
3189             \group_begin:
3190             \exp_not:N \normalfont
3191             \exp_not:N \footnotesize [ \int_eval:n
3192             {
3193                 \prop_count:c { g__enumext_ \l__enumext_store_name_tl _prop }
3194                 + \l__enumext_show_pos_tmp_int
3195             }
3196             ]
3197             \group_end:
3198         }
3199         \__enumext_keyans_pos_mark_set:
3200         \__enumext_print_keyans_box:NN
3201         \l__enumext_labelwidth_v_dim \l__enumext_mark_sym_sep_v_dim
3202     }
3203 }

```

(End of definition for `__enumext_keyans_pos_mark_set:`, `__enumext_keyans_show_ans:`, and `__enumext_keyans_show_pos:`.)

13.34 Redefining `\item` and `\makelabel` in `enumext`

Redefining the `\item` command is not as simple as I thought. This command works in conjunction with the `\makelabel` command so I have to redefine both of them, in addition to this, we will have to use a couple of *global* variables to pass the values from one command to the other.

When *labeling* PDF is active `\makelabel` is redefined as `\hss #1` and the only way to get the `align` key to work correctly is to redefine `\makelabel` using `\makebox`. The best way to implement this is to use the conditional command `\IfDocumentMetadataTF` to force this redefinition and the dedicated `mode-box` key to manually activate it by the user.

The `\item` and `\item[⟨custom⟩]` commands work in the usual way on `enumext` and we will add `\item*`, `\item*[⟨symbol⟩]` and `\item*[⟨symbol⟩][⟨offset⟩]`.

```
\__enumext_default_item:n
```

First we will see if the *optional argument* is present, if it is NOT present we will check the state of the variable `\l__enumext_check_answers_bool` set by the key `no-store`, set the boolean variable `\l__enumext_wrap_label_X_bool` to “true” for the key `wrap-label` and execute `__enumext_item_std:w` and the key `itemindent`, otherwise we will check the state of the boolean variable `\l__enumext_wrap_label_opt_X_bool` set by the key `wrap-label*` and execute `__enumext_item_std:w` with the *optional argument* and the key `itemindent`.

```

3204 \cs_new_protected:Npn \__enumext_default_item:n #1
3205 {
3206     \tl_if_novalue:nTF {#1}
3207     {

```



```

3208     \bool_if:NT \l__enumext_check_answers_bool
3209     {
3210         \int_gincr:N \g__enumext_item_number_int
3211         \bool_set_true:N \l__enumext_item_number_bool
3212     }
3213     \bool_set_true:c { \l__enumext_wrap_label_ \__enumext_level: _bool }
3214     \__enumext_item_std:w \tl_use:c { \l__enumext_fake_item_indent_ \__enumext_level: _tl }
3215 }
3216 {
3217     \bool_set_eq:cc
3218     { \l__enumext_wrap_label_ \__enumext_level: _bool }
3219     { \l__enumext_wrap_label_opt_ \__enumext_level: _bool }
3220     \__enumext_item_std:w [#1] \tl_use:c { \l__enumext_fake_item_indent_ \__enumext_level: _tl }
3221 }
3222 }

```

(End of definition for __enumext_default_item:n.)

__enumext_item_starred_exec:nn
 __enumext_item_starred_exec:

The `\item*`, `\item*[\langle symbol \rangle]` and `\item*[\langle symbol \rangle][\langle offset \rangle]` works like the *numbered* `\item`, but placing a *symbol* to the “left” of the *label* separated from it by the value the second *optional argument* *offset*.

#1: \l__enumext_item_symbol_X_tl

#2: \l__enumext_item_symbol_sep_X_dim

First we will make a copy of `\l__enumext_item_symbol_X_tl` which is set by the key `item-sym*` or passed as “*first*” *optional argument* in the global variable `\g__enumext_item_symbol_aux_tl`, followed by setting the variable `\l__enumext_item_symbol_sep_X_dim` set by the key `item-pos*` or by the “*second*” *optional argument*, then we will see the state of the variable `\l__enumext_check_answers_bool` set by the key `no-store`, set the boolean variable `\l__enumext_wrap_label_X_bool` to “true” for the key `wrap-label` and execute `__enumext_item_std:w` and the key `itemindent`.

```

3223 \cs_new_protected:Npn \__enumext_item_starred_exec:nn #1 #2
3224 {
3225     \tl_if_novalue:nTF {#1}
3226     {
3227         \tl_gset_eq:Nc
3228         \g__enumext_item_symbol_aux_tl { \l__enumext_item_symbol_ \__enumext_level: _tl }
3229     }
3230     {
3231         \tl_gset:Nn \g__enumext_item_symbol_aux_tl {#1}
3232     }
3233     \tl_if_novalue:nTF {#2}
3234     {
3235         \dim_set_eq:cc
3236         { \l__enumext_item_symbol_sep_ \__enumext_level: _dim }
3237         { \l__enumext_labelsep_ \__enumext_level: _dim }
3238     }
3239     {
3240         \dim_set:cn { \l__enumext_item_symbol_sep_ \__enumext_level: _dim } {#2}
3241     }
3242     \bool_if:NT \l__enumext_check_answers_bool
3243     {
3244         \int_gincr:N \g__enumext_item_number_int
3245         \bool_set_true:N \l__enumext_item_number_bool
3246     }
3247     \bool_set_true:c { \l__enumext_wrap_label_ \__enumext_level: _bool }
3248     \__enumext_item_std:w \tl_use:c { \l__enumext_fake_item_indent_ \__enumext_level: _tl }
3249 }

```

The function `__enumext_item_starred_exec:` will be responsible for executing `\item*` for the `enumext` environment.

```

3250 \cs_new_protected:Nn \__enumext_item_starred_exec:
3251 {
3252     \tl_if_empty:cF { \l__enumext_item_symbol_ \__enumext_level: _tl }
3253     {
3254         \mode_leave_vertical:
3255         \skip_horizontal:n { -\dim_use:c { \l__enumext_item_symbol_sep_ \__enumext_level: _dim } }
3256         \hbox_overlap_left:n { \g__enumext_item_symbol_aux_tl }
3257         \skip_horizontal:n { \dim_use:c { \l__enumext_item_symbol_sep_ \__enumext_level: _dim } }
3258     }
3259 }

```

(End of definition for __enumext_item_starred_exec:nn and __enumext_item_starred_exec:.)

`__enumext_redefine_item:` The function `__enumext_redefine_item:` will redefine the `\item` command in the `enumext` environment adding `\item*`. This function are passed to `__enumext_list_arg_two_X:` used in the definition of the `enumext` environment (§13.39).

```

3260 \cs_new_protected:Nn \__enumext_redefine_item:
3261 {
3262   \RenewDocumentCommand \item { s o o }
3263   {
3264     \bool_if:NTF {##1}
3265     {
3266       \__enumext_item_starred_exec:nn {##2} {##3}
3267     }
3268     { \__enumext_default_item:n {##2} }
3269   }
3270 }

```

(End of definition for `__enumext_redefine_item:`.)

`__enumext_make_label:` The function `__enumext_make_label:` redefine `\makeLabel` for the keys `mode-box`, `align`, `font`, `wrap-label`, `wrap-label*` and `\item*` for `enumext` environment. This function are passed to `__enumext_list_arg_two_X:` used in the definition of the `enumext` environment (§13.39).

```

3271 \cs_new_protected:Nn \__enumext_make_label:
3272 {
3273   \IfDocumentMetadataTF
3274   {
3275     \__enumext_make_label_box:
3276   }
3277   {
3278     \bool_if:NTF \l__enumext_mode_box_bool
3279     {
3280       \__enumext_make_label_box:
3281     }
3282     {
3283       \__enumext_make_label_std:
3284     }
3285   }
3286 }

```

Standard definition when `\DocumentMetadata` is not active.

```

3287 \cs_new_protected:Nn \__enumext_make_label_std:
3288 {
3289   \RenewDocumentCommand \makeLabel { m }
3290   {
3291     \tl_use:c { l__enumext_label_fill_left_ \__enumext_level: _tl }
3292     \__enumext_item_starred_exec:
3293     \tl_use:c { l__enumext_label_font_style_ \__enumext_level: _tl }
3294     \bool_if:cTF { l__enumext_wrap_label_ \__enumext_level: _bool }
3295     {
3296       \use:c { __enumext_wrapper_label_ \__enumext_level: :n } { ##1 }
3297     }
3298     { ##1 }
3299     \tl_use:c { l__enumext_label_fill_right_ \__enumext_level: _tl }
3300     \tl_gclear:N \g__enumext_item_symbol_aux_tl
3301   }
3302 }

```

Definition using `\makebox` when `\DocumentMetadata` is active or `mode-box` is active.

- Here it is necessary to use `\strut\smash` to maintain text *alignment* in case the user wants to use `\labelbx` for example. In my experiments with *mimicking* the `description` environment it was the only way out and it seems to have no adverse effects and may serve in the future as a basis for a more generic `list` environment package than `enumext`.

```

3303 \cs_new_protected:Nn \__enumext_make_label_box:
3304 {
3305   \RenewDocumentCommand \makeLabel { m }
3306   {
3307     \strut\smash
3308     {
3309       \makebox
3310       [ \dim_use:c { l__enumext_labelwidth_ \__enumext_level: _dim } ]
3311       [ \str_use:c { l__enumext_align_label_pos_ \__enumext_level: _str } ]
3312       {
3313         \__enumext_item_starred_exec:

```

```

3314         \tl_use:c { l__enumext_label_font_style_ \__enumext_level: _tl }
3315         \bool_if:cTF { l__enumext_wrap_label_ \__enumext_level: _bool }
3316         {
3317             \use:c { __enumext_wrapper_label_ \__enumext_level: :n } { ##1 }
3318         }
3319         { ##1 }
3320         \tl_gclear:N \g__enumext_item_symbol_aux_tl
3321     }
3322 } % close smash
3323 }
3324 }

```

(End of definition for `__enumext_make_label:`, `__enumext_make_label_std:`, and `__enumext_make_label_box:`.)

13.35 Setting `item-sym*` and `item-pos*` keys

In order to have a cleaner implementation of `\item*` for the `enumext` and `enumext*` environments it is best to define a couple of keys that allow us to control and set by default the `<symbol>` and its `<offset>`.

`item-sym*` Define and set `item-sym*` and `item-pos*` keys for `enumext` and `enumext*`.

```

item-pos*
3325 \cs_set_protected:Npn \__enumext_tmp:nn #1 #2
3326 {
3327     \keys_define:nn { enumext / #1 }
3328     {
3329         item-sym* .tl_set:c = { l__enumext_item_symbol_#2_tl },
3330         item-sym* .value_required:n = true,
3331         item-sym* .initial:n = {\textborn},
3332         item-pos* .dim_set:c = { l__enumext_item_symbol_sep_#2_dim },
3333         item-pos* .value_required:n = true,
3334     }
3335 }
3336 \clist_map_inline:nn
3337 {
3338     {level-1}{i}, {level-2}{ii}, {level-3}{iii}, {level-4}{iv}, {enumext*}{vii}
3339 }
3340 { \__enumext_tmp:nn #1 }

```

(End of definition for `item-sym*` and `item-pos*`.)

13.36 Handling unknown keys

At this point in the code I already know that I will NOT add more `<keys>` for and since I have already been quite *paranoid and restrictive* with the definitions of environments and commands, the only thing left to do is do it with the `<keys>` (you have to be consistent in life).

- Well, the paragraph above is not so real, after all I had to add more `<keys>` than I had planned, not everything turns out the way one thinks in life.

13.36.1 Handling unknown keys for `keyans`, `keyans*` and `keyanspic`

`unknown` Define and set `unknown` key for `keyans`, `keyans*` and `keyanspic` environments. Here it is necessary to set `\l__enumext_envir_name_tl` in case an `unknown` key is passed using `\setenumext`.

```

\__enumext_keyans_unknown_keys:n
\__enumext_keyans_unknown_keys:nn
3341 \cs_set_protected:Npn \__enumext_tmp:n #1
3342 {
3343     \keys_define:nn { enumext / #1 }
3344     {
3345         unknown .code:n = {
3346             \tl_set:Nn \l__enumext_envir_name_tl {#1}
3347             \__enumext_keyans_unknown_keys:n {##1}
3348         },
3349     }
3350 }
3351 \clist_map_inline:nn { keyans, keyans*, keyanspic } { \__enumext_tmp:n {#1} }

```

Internal functions for handling `unknown` key.

```

3352 \cs_new_protected:Npn \__enumext_keyans_unknown_keys:n #1
3353 {
3354     \exp_args:NV \__enumext_keyans_unknown_keys:nn \l_keys_key_str {#1}
3355 }
3356 \cs_new_protected:Npn \__enumext_keyans_unknown_keys:nn #1#2
3357 {
3358     \tl_if_blank:nTF {#2}
3359     {
3360         \msg_error:nne { enumext } { keyans-unknown-key } {#1}

```

```

3361     }
3362     {
3363         \msg_error:nnee { enumext } { keyans-unknown-key-value } {#1} {#2}
3364     }
3365 }

```

(End of definition for `unknown`, `__enumext_keyans_unknown_keys:n`, and `__enumext_keyans_unknown_keys:nn`.)

13.36.2 Handling unknown keys for `enumext*`

Define and set `unknown` key for `enumext*` environment.

```

\__enumext_starred_unknown_keys:n
\__enumext_starred_unknown_keys:nn
3366 \keys_define:nn { enumext / enumext* }
3367 {
3368     unknown .code:n = { \__enumext_starred_unknown_keys:n {#1} },
3369 }

```

Internal functions for handling `unknown` key.

```

3370 \cs_new_protected:Npn \__enumext_starred_unknown_keys:n #1
3371 {
3372     \exp_args:NV \__enumext_starred_unknown_keys:nn \l_keys_key_str {#1}
3373 }
3374 \cs_new_protected:Npn \__enumext_starred_unknown_keys:nn #1#2
3375 {
3376     \tl_if_blank:nTF {#2}
3377     {
3378         \msg_error:nnn { enumext } { starred-unknown-key } {#1}
3379     }
3380     {
3381         \msg_error:nnnn { enumext } { starred-unknown-key-value } {#1} {#2}
3382     }
3383 }

```

(End of definition for `unknown`, `__enumext_starred_unknown_keys:n`, and `__enumext_starred_unknown_keys:nn`.)

13.36.3 Handling unknown keys for `enumext`

Defines and set the key `unknown` for `enumext` environment.

```

\__enumext_standar_unknown_keys:n
\__enumext_standar_unknown_keys:nn
3384 \cs_set_protected:Npn \__enumext_tmp:n #1
3385 {
3386     \keys_define:nn { enumext / #1 }
3387     {
3388         unknown .code:n = { \__enumext_standar_unknown_keys:n {##1} },
3389     }
3390 }
3391 \clist_map_inline:nn { level-1,level-2,level-3,level-4 } { \__enumext_tmp:n {#1} }

```

Internal functions for handling `unknown` key.

```

3392 \cs_new_protected:Npn \__enumext_standar_unknown_keys:n #1
3393 {
3394     \exp_args:NV \__enumext_standar_unknown_keys:nn \l_keys_key_str {#1}
3395 }
3396 \cs_new_protected:Npn \__enumext_standar_unknown_keys:nn #1#2
3397 {
3398     \tl_if_blank:nTF {#2}
3399     {
3400         \msg_error:nnn { enumext } { standar-unknown-key } {#1}
3401     }
3402     {
3403         \msg_error:nnnn { enumext } { standar-unknown-key-value } {#1} {#2}
3404     }
3405 }

```

(End of definition for `unknown`, `__enumext_standar_unknown_keys:n`, and `__enumext_standar_unknown_keys:nn`.)

13.37 Redefining `\item` and `\makeLabel` in `keyans`

The `\item` and `\item[⟨custom⟩]` commands work in the usual way in `keyans`, but the `\item*` and `\item*[⟨content⟩]` commands *store* the current `⟨label⟩` next to the `⟨content⟩` if it is present in the *sequence* and *prop list* defined by `save-ans` key.

The function `__enumext_keyans_default_item:n` executes the original behavior of the `\item` along with the keys `wrap-label`, `wrap-label*` and `itemindent`.

```

3406 \cs_new_protected:Npn \__enumext_keyans_default_item:n #1
3407 {

```

```

3408 \tl_if_novalue:nTF { #1 }
3409 {
3410     \bool_set_true:N \l__enumext_wrap_label_v_bool
3411     \__enumext_item_std:w \tl_use:N \l__enumext_fake_item_indent_v_tl
3412 }
3413 {
3414     \bool_set_eq:NN \l__enumext_wrap_label_v_bool \l__enumext_wrap_label_opt_v_bool
3415     \__enumext_item_std:w [#1] \tl_use:N \l__enumext_fake_item_indent_v_tl
3416 }
3417 }

```

(End of definition for __enumext_keyans_default_item:n.)

__enumext_keyans_starred_item:n

The function __enumext_keyans_starred_item:n will take as argument *#1* the *optional argument* [*content*] passed to *\item** and save it via the __enumext_keyans_save_item_opt:n function, then activate the *wrap-label* key, execute *\item* using __enumext_item_std:w, the *itemindent* key and print the *optional argument* using the __enumext_keyans_show_item_opt: function handled by the *wrap-opt* key.

```

3418 \cs_new_protected:Npn \__enumext_keyans_starred_item:n #1
3419 {
3420     \__enumext_keyans_save_item_opt:n { #1 }
3421     \bool_set_true:N \l__enumext_wrap_label_v_bool
3422     \__enumext_item_std:w \tl_use:N \l__enumext_fake_item_indent_v_tl
3423     \__enumext_keyans_show_item_opt:

```

Now store the current *label* first in the *prop* list (including the *optional argument*), run the internal “*label and ref*” system if the *save-ref* key is active, then store in the *sequence* and finally increments \g__enumext_check_starred_cmd_int for internal check system.

```

3424     \__enumext_keyans_addto_prop:n { #1 }
3425     \__enumext_keyans_store_ref:
3426     \__enumext_keyans_addto_seq:n { #1 }
3427     \int_gincr:N \g__enumext_check_starred_cmd_int
3428 }

```

(End of definition for __enumext_keyans_starred_item:n.)

*\item**

__enumext_keyans_redefine_item:

The function __enumext_keyans_redefine_item: is responsible for adding the *starred argument* and *optional argument* by the __enumext_list_arg_two_v: function in the definition of the *keyans* environment. Here we will set to true the variable \l__enumext_item_wrap_key_bool used by the *wrap-ans** key only when *\item** is executed and additionally we need to use \peek_remove_spaces:n to avoid an unwanted space when using *\item** together with the *itemindent* key. This function are passed to __enumext_list_arg_two_v: used in the definition of the *keyans* environment (§13.38).

```

3429 \cs_new_protected:Nn \__enumext_keyans_redefine_item:
3430 {
3431     \RenewDocumentCommand \item { s o }
3432     {
3433         \bool_if:nTF {##1}
3434         {
3435             \bool_set_true:N \l__enumext_item_wrap_key_bool % wrap-ans*
3436             \peek_remove_spaces:n
3437             {
3438                 \__enumext_keyans_starred_item:n {##2}
3439             }
3440         }
3441         {
3442             \bool_set_false:N \l__enumext_item_wrap_key_bool
3443             \__enumext_keyans_default_item:n {##2}
3444         }
3445     }
3446 }

```

(End of definition for \item* and __enumext_keyans_redefine_item:. This function is documented on page 16.)

__enumext_keyans_make_label:
__enumext_keyans_wrapper_label:n
__enumext_keyans_make_label_std:
__enumext_keyans_make_label_box:

The function __enumext_keyans_make_label: redefine *\makeLabel* for the keys *mode-box*, *align*, *font*, *wrap-label*, *wrap-label**, *wrap-ans** and *\item** for *keyans* environment. This function are passed to __enumext_list_arg_two_v: used in the definition of the *keyans* environment (§13.38).

```

3447 \cs_new_protected:Nn \__enumext_keyans_make_label:
3448 {
3449     \IfDocumentMetadataTF
3450     {
3451         \__enumext_keyans_make_label_box:

```

```

3452     }
3453     {
3454         \bool_if:NTF \l__enumext_mode_box_bool
3455         {
3456             \__enumext_keyans_make_label_box:
3457         }
3458         {
3459             \__enumext_keyans_make_label_std:
3460         }
3461     }
3462 }

```

We added conditionals to the `__enumext_keyans_wrapper_label:n` function to handle the keys `wrap-ans*`, `wrap-label` and `wrap-label*`.

```

3463 \cs_new_protected:Npn \__enumext_keyans_wrapper_label:n #1
3464 {
3465     \bool_lazy_all:nT
3466     {
3467         { \bool_if_p:N \l__enumext_wrap_label_v_bool }
3468         { \bool_if_p:N \l__enumext_show_answer_bool }
3469         { \bool_if_p:N \l__enumext_item_wrap_key_bool }
3470         { \cs_if_exist_p:N \__enumext_keyans_wrapper_item_v:n }
3471     }
3472     {
3473         \cs_set_eq:NN \__enumext_wrapper_label_v:n \__enumext_keyans_wrapper_item_v:n
3474     }
3475     \bool_if:NTF \l__enumext_wrap_label_v_bool
3476     {
3477         \__enumext_wrapper_label_v:n { #1 }
3478     }
3479     { #1 }
3480 }

```

Standard definition when `\DocumentMetadata` is not active.

```

3481 \cs_new_protected:Nn \__enumext_keyans_make_label_std:
3482 {
3483     \RenewDocumentCommand \makeLabel { m }
3484     {
3485         \tl_use:N \l__enumext_label_fill_left_v_tl
3486         \__enumext_keyans_show_ans:
3487         \__enumext_keyans_show_pos:
3488         \tl_use:N \l__enumext_label_font_style_v_tl
3489         \__enumext_keyans_wrapper_label:n { ##1 }
3490         \tl_use:N \l__enumext_label_fill_right_v_tl
3491     }
3492 }

```

Definition using `\makebox` when `\DocumentMetadata` is active or `mode-box` is active.

```

3493 \cs_new_protected:Nn \__enumext_keyans_make_label_box:
3494 {
3495     \RenewDocumentCommand \makeLabel { m }
3496     {
3497         \strut\smash
3498         {
3499             \makebox[ \l__enumext_labelwidth_v_dim ][ \l__enumext_align_label_pos_v_str ]
3500             {
3501                 \__enumext_keyans_show_ans:
3502                 \__enumext_keyans_show_pos:
3503                 \tl_use:N \l__enumext_label_font_style_v_tl
3504                 \__enumext_keyans_wrapper_label:n { ##1 }
3505             }
3506         }
3507     }
3508 }

```

(End of definition for `__enumext_keyans_make_label:` and others.)

13.38 Second argument of the lists

At this point of the code we have already programmed most the necessary tools to create a custom `list` environment, remember that the function `__enumext_start_list:nn` takes two arguments, the first one we have ready, the second one we will define for all the levels of the environment `enumext` and the environment `keyans`.

13.38.1 Calculation of `\leftmargin` and `\itemindent`

Consider the figure 9 where the default margins (on the left) of a list are represented.

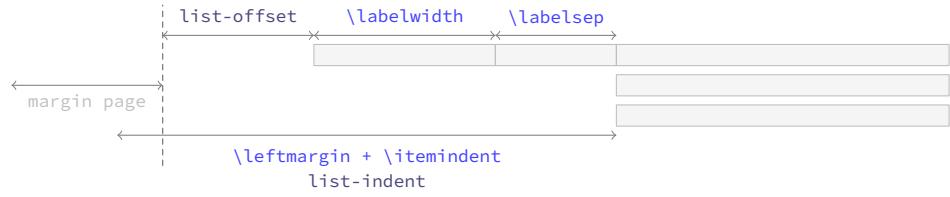


Figure 9: Representation of standard horizontal lengths in `list` environment.

The idea is to have control over these margins so that our list does not overlap the left margin of the page. The key relationship is that the right edge of the `\labelsep` equals the right edge of the `\itemindent`, so that the left edge of the `label` box is at `\leftmargin + \itemindent` minus `\labelwidth + \labelsep`. Thus, the handling of the margins by the package will be as shown in the figure 10.

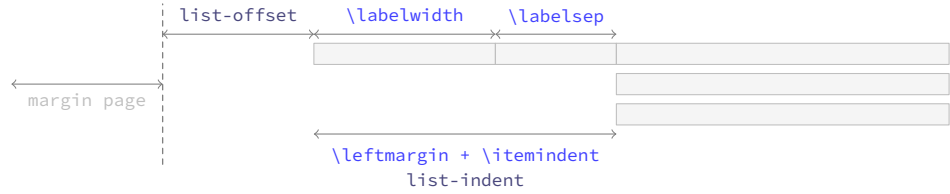


Figure 10: Representation of horizontal lengths concept in list in `enumext`.

Where the default values will look like in the figure 11.

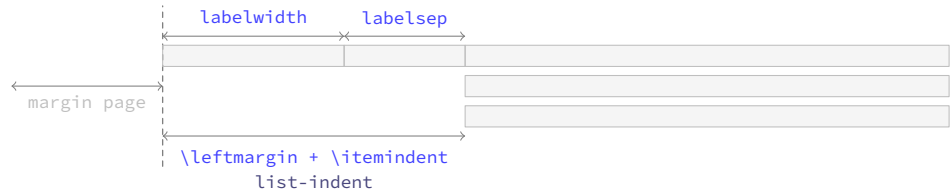


Figure 11: Default horizontal lengths in `enumext`.

```
\_enumext_calc_hspace:NNNNNNN
\_enumext_calc_hspace:ccccc
```

The function `_enumext_calc_hspace:NNNNNNN` takes seven arguments to be able to determine horizontal spaces for all list environment:

```
#1: \l__enumext_labelwidth_X_dim      #2: \l__enumext_labelsep_X_dim
#3: \l__enumext_listoffset_X_dim      #4: \l__enumext_leftmargin_tmp_X_dim
#5: \l__enumext_leftmargin_X_dim      #6: \l__enumext_itemindent_X_dim
#7: \l__enumext_leftmargin_tmp_X_bool
```

And returns the “adjusted” values of `\leftmargin` and `\itemindent`.

This function is passed to `_enumext_list_arg_two_X:` which is used in the definition of the `enumext` and `keyans` environments (§13.38).

```
3509 \cs_new_protected:Npn \_enumext_calc_hspace:NNNNNNN #1 #2 #3 #4 #5 #6 #7
3510 {
3511   \dim_compare:nNt { #1 } < { \c_zero_dim }
3512   {
3513     \msg_warning:nnnV { enumext } { width-non-positive } { labelwidth } { #1 }
3514     \dim_set:Nn #1 { \dim_abs:n { #1 } }
3515   }
3516   \dim_compare:nNt { #2 } < { \c_zero_dim }
3517   {
3518     \msg_warning:nnnV { enumext } { width-negative } { labelsep } { #2 }
3519     \dim_set:Nn #2 { \dim_abs:n { #2 } }
3520   }
3521 }
```

If no value has been passed to the `labelwidth` and `labelsep` keys we set the default values for `\l__enumext_leftmargin_tmp_X_dim`.

```
3521 \bool_if:NF #7 { \dim_set:Nn #4 { #1 + #2 } }
```

We now analyze the cases and set the values for `\leftmargin` and `\itemindent`.

```
3522 \dim_compare:nNtF { #4 } < { \c_zero_dim }
3523 {
3524   \dim_set:Nn #6 { #1 + #2 - #4 }
3525   \dim_set:Nn #5 { #1 + #2 + #3 - #6 }
3526 }
3527 {
3528   \dim_compare:nNt { #4 } = { #1 + #2 }
```



```

3529     { \dim_set:Nn #6 { \c_zero_dim } }
3530 \dim_compare:nNnT { #4 } < { #1 + #2 }
3531     { \dim_set:Nn #6 { #1 + #2 - #4 } }
3532 \dim_compare:nNnT { #4 } > { #1 + #2 }
3533     {
3534         \dim_set:Nn #6 { -#1 - #2 + #4 }
3535         \dim_set:Nn #6 { #6*-1 }
3536     }
3537 \dim_set:Nn #5 { #1 + #2 + #3 - #6 }
3538 }
3539 }
3540 \cs_generate_variant:Nn \__enumext_calc_hspace:NNNNNNN { cccccc }

```

(End of definition for `__enumext_calc_hspace:NNNNNNN`.)

13.38.2 Setting second argument of the lists

We will “not set” `\leftmargini`, `\leftmarginii`, `\leftmarginiii` or `\leftmarginiv`, in this case, we will directly set the parameters for vertical and horizontal list spacing per level.

```

\__enumext_list_arg_two_i:
\__enumext_list_arg_two_ii:
\__enumext_list_arg_two_iii:
\__enumext_list_arg_two_iv:
\__enumext_list_arg_two_v:
3541 \cs_set_protected:Npn \__enumext_tmp:n #1
3542 {
3543     \cs_new_protected:cpn { __enumext_list_arg_two_#1: }
3544     {
3545         \__enumext_calc_hspace:ccccc
3546         { \__enumext_labelwidth_#1_dim } { \__enumext_labelsep_#1_dim }
3547         { \__enumext_listoffset_#1_dim } { \__enumext_leftmargin_tmp_#1_dim }
3548         { \__enumext_leftmargin_#1_dim } { \__enumext_itemindent_#1_dim }
3549         { \__enumext_leftmargin_tmp_#1_bool }
3550 \clist_map_inline:nn
3551     { labelsep, labelwidth, itemindent, leftmargin, rightmargin, listparindent }
3552     { \dim_set_eq:cc {###1} { \__enumext_###1_#1_dim } }
3553 \clist_map_inline:nn { topsep, parsep, partopsep, itemsep }
3554     { \skip_set_eq:cc {###1} { \__enumext_###1_#1_skip } }
3555 \usecounter { enumX#1 }
3556 \setcounter { enumX#1 } { \int_eval:n { \int_use:c { \__enumext_start_#1_int } - 1 } }
3557 \str_if_eq:nnTF {#1} { v }
3558 {
3559     \__enumext_keyans_redefine_item:
3560     \__enumext_keyans_make_label:
3561     \__enumext_keyans_ref:
3562     \__enumext_keyans_fake_item_indent:
3563     \bool_if:cT { \__enumext_show_length_#1_bool }
3564     {
3565         \msg_term:nnnn { enumext } { list-lengths-not-nested } { v } { keyans }
3566     }
3567 }
3568 {
3569     \__enumext_redefine_item:
3570     \__enumext_make_label:
3571     \__enumext_standar_ref:
3572     \__enumext_fake_item_indent:
3573     \bool_if:cT { \__enumext_show_length_#1_bool }
3574     {
3575         \msg_term:nnne { enumext } { list-lengths } {#1}
3576         { \int_use:N \__enumext_level_int }
3577     }
3578 }
3579 }
3580 }
3581 \clist_map_inline:nn { i, ii, iii, iv, v } { \__enumext_tmp:n {#1} }

```

(End of definition for `__enumext_list_arg_two_i:` and others.)

For the horizontal environments `enumext*` and `keyans*` the implementation is similar, but, the value of `\partopsep` is always `\opt`. At this point we will modify the `parsep` key to make it take the value of the `itemsep` key and later, in the environment definition, we will modify `parindent` to make it set the value of `\listparindent` and `parsep` to set the value of `\parskip` locally.

```

3582 \cs_set_protected:Npn \__enumext_tmp:n #1
3583 {
3584     \cs_new_protected:cpn { __enumext_list_arg_two_#1: }
3585     {
3586         \bool_set_true:c { \__enumext_leftmargin_tmp_#1_bool }

```

```

3587 \dim_zero:c { \__enumext_leftmargin_tmp_#1_dim }
3588 \__enumext_calc_hspace:ccccc
3589 { \__enumext_labelwidth_#1_dim } { \__enumext_labelsep_#1_dim }
3590 { \__enumext_listoffset_#1_dim } { \__enumext_leftmargin_tmp_#1_dim }
3591 { \__enumext_leftmargin_#1_dim } { \__enumext_itemindent_#1_dim }
3592 { \__enumext_leftmargin_tmp_#1_bool }
3593 \clist_map_inline:nn
3594 { labelsep, labelwidth, itemindent, leftmargin, rightmargin, listparindent }
3595 { \dim_set_eq:cc {####1} { \__enumext_####1_#1_dim } }
3596 \clist_map_inline:nn { topsep, parsep, partopsep, itemsep }
3597 { \skip_set_eq:cc {####1} { \__enumext_####1_#1_skip } }
3598 \skip_set_eq:Nc \parsep { \__enumext_itemsep_#1_skip }
3599 \skip_zero:N \partopsep
3600 \usecounter { enumX#1 }
3601 \setcounter { enumX#1 } { \int_eval:n { \int_use:c { \__enumext_start_#1_int } - 1 } }
3602 \__enumext_starred_ref:
3603 \str_if_eq:nnTF {#1} { vii }
3604 {
3605     \__enumext_fake_item_indent_vii:
3606     \bool_if:cT { \__enumext_show_length_vii_bool }
3607     { \msg_term:nnnn { enumext } { list-lengths-not-nested } { vii } { enumext* } }
3608 }
3609 {
3610     \__enumext_fake_item_indent_viii:
3611     \bool_if:cT { \__enumext_show_length_#1_bool }
3612     { \msg_term:nnnn { enumext } { list-lengths-not-nested } { #1 } { keyans* } }
3613 }
3614 }
3615 }
3616 \clist_map_inline:nn { vii, viii } { \__enumext_tmp:n {#1} }

```

(End of definition for __enumext_list_arg_two_vii: and __enumext_list_arg_two_viii:.)

13.39 The environment enumext

__enumext_safe_exec: The __enumext_safe_exec: function first call the function __enumext_is_not_nested: which sets \g__enumext_standar_bool to “true” if we are NOT nested within enumext*, then call the function __enumext_internal_mini_page: to create the environment __enumext_mini_page, we will increment \l__enumext_level_int to restrict nesting of the environment, set \l__enumext_standar_bool to “true” and finally call the function __enumext_is_on_first_level: which sets \l__enumext_standar_first_bool to “true” only if the environment is NOT nested and we are at the “first level”.

```

3617 \cs_new_protected:Nn \__enumext_safe_exec:
3618 {
3619     \__enumext_is_not_nested:
3620     \__enumext_internal_mini_page:
3621     \int_incr:N \l__enumext_level_int
3622     \int_compare:nNnT { \l__enumext_level_int } > { 4 }
3623     { \msg_fatal:nn { enumext } { list-too-deep } }
3624     \bool_set_true:N \l__enumext_standar_bool
3625     \bool_set_false:N \l__enumext_starred_bool
3626     \__enumext_is_on_first_level:
3627 }

```

(End of definition for __enumext_safe_exec:.)

__enumext_parse_keys:n The __enumext_parse_store_keys:n function first we will clear the variable \l__enumext_series_str used by the key series and then we check if we are at the “first level”, if so we process the ⟨keys⟩ and then execute the function __enumext_parse_series:n used by the key series and call the function __enumext_nested_base_line_fix: used by the key base-fix, otherwise we will pass the ⟨keys⟩ to the inner levels of the environment then we execute the function __enumext_store_active_keys:n and reprocess the ⟨keys⟩ to pass them to the sequence if the key save-key is not active.

```

3628 \cs_new_protected:Npn \__enumext_parse_keys:n #1
3629 {
3630     \tl_if_novalue:nF {#1}
3631     {
3632         \str_clear:N \l__enumext_series_str
3633         \int_compare:nNnTF { \l__enumext_level_int } = { 1 }
3634         {
3635             \keys_set:nn { enumext / level-1 } {#1}
3636             \__enumext_parse_series:n {#1}
3637             \__enumext_nested_base_line_fix:

```

```

3638         }
3639         {
3640             \exp_args:Ne \keys_set:nn
3641             { enumext / level-\int_use:N \l__enumext_level_int } {#1}
3642         }
3643         \__enumext_store_active_keys:n {#1}
3644     }
3645 }

```

(End of definition for __enumext_parse_keys:n.)

__enumext_start_store_level: The __enumext_start_store_level: function activate the “*storing structure*” mechanism in the *sequence* for the command \anskey and the environment anskey*.

```

3646 \cs_new_protected:Nn \__enumext_start_store_level:
3647 {
3648     \bool_lazy_all:nT
3649     {
3650         { \bool_if_p:N \l__enumext_store_active_bool }
3651         { \bool_not_p:n { \l__enumext_keyans_env_bool } }
3652         { \bool_if_p:N \g__enumext_standar_bool }
3653     }
3654     {
3655         \int_compare:nNnT { \l__enumext_level_int } > { 1 }
3656         {
3657             \bool_set_true:c { l__enumext_store_upper_level_ \__enumext_level: _bool }
3658             \__enumext_store_level_open:
3659         }
3660     }

```

If enumext are nested in enumext* add __enumext_store_level_open: to preserve the “*storing structure*”.

```

3661     \bool_lazy_all:nT
3662     {
3663         { \bool_if_p:N \l__enumext_store_active_bool }
3664         { \bool_not_p:n { \l__enumext_keyans_env_bool } }
3665         { \int_compare_p:nNn { \l__enumext_level_h_int } = { 1 } }
3666     }
3667     {
3668         \int_compare:nNnT { \l__enumext_level_int } > { 0 }
3669         {
3670             \bool_set_true:c { l__enumext_store_upper_level_ \__enumext_level: _bool }
3671             \__enumext_store_level_open:
3672         }
3673     }
3674 }

```

(End of definition for __enumext_start_store_level:.)

__enumext_stop_store_level: The __enumext_stop_store_level: function stop the “*storing structure*” mechanism in the *sequence* for the command \anskey and the environment anskey*.

```

3675 \cs_new_protected:Nn \__enumext_stop_store_level:
3676 {
3677     \bool_if:cT { l__enumext_store_upper_level_ \__enumext_level: _bool }
3678     {
3679         \__enumext_store_level_close:
3680     }
3681 }

```

(End of definition for __enumext_stop_store_level:.)

__enumext_multicols_start: The function __enumext_multicols_start: will start the multicols environment according to the value passed by the columns key, then set the default value for \columnsep when columns-sep=opt and set the value of \multicolsep equal to zero and leave \columnseprule equal to zero for inner levels.

```

3682 \cs_new_protected:Nn \__enumext_multicols_start:
3683 {
3684     \int_compare:nNnT
3685     { \int_use:c { l__enumext_columns_ \__enumext_level: _int } } > { 1 }
3686     {
3687         \dim_compare:nNnT
3688         { \dim_use:c { l__enumext_columns_sep_ \__enumext_level: _dim } } = { \c_zero_dim }
3689         {
3690             \dim_set:cn { l__enumext_columns_sep_ \__enumext_level: _dim }

```

```

3691         {
3692             ( \dim_use:c { l__enumext_labelwidth_ \__enumext_level: _dim }
3693               + \dim_use:c { l__enumext_labelsep_ \__enumext_level: _dim }
3694             ) / \int_use:c { l__enumext_columns_ \__enumext_level: _int }
3695             - \dim_use:c { l__enumext_listoffset_ \__enumext_level: _dim }
3696         }
3697     }
3698     \dim_set_eq:Nc \columnsep { l__enumext_columns_sep_ \__enumext_level: _dim }
3699     \int_compare:nNnT { \l__enumext_level_int } > { 1 }
3700     {
3701         \dim_zero:N \columnseprule
3702     }

```

We will calculate the *vertical spacing* settings for the `multicols` environment using the function `__enumext_multi_addvspace:`, apply our “*vertical adjust spacing*”, then start the `multicols` environment.

```

3703     \bool_if:cF { l__enumext_minipage_active_ \__enumext_level: _bool }
3704     {
3705         \skip_zero:N \multicolsep
3706         \__enumext_multi_addvspace:
3707     }
3708     \raggedcolumns
3709     \begin{multicols}{ \int_use:c { l__enumext_columns_ \__enumext_level: _int } }
3710 }
3711 }

```

(End of definition for `__enumext_multicols_start:`)

`__enumext_multicols_stop:` The function `__enumext_multicols_stop:` will stop the `multicols` environment and apply our “*vertical adjust*” spacing. For compatibility with *tagged PDF*, the closing of the `list` environment is executed here along with `__enumext_stop_store_level:`.

```

3712 \cs_new_protected:Nn \__enumext_multicols_stop:
3713 {
3714     \int_compare:nNnTF
3715     { \int_use:c { l__enumext_columns_ \__enumext_level: _int } } > { 1 }
3716     {
3717         \__enumext_stop_list:
3718         \__enumext_stop_store_level:
3719         \end{multicols}
3720         \__enumext_unskip_unkern:
3721         \__enumext_unskip_unkern:
3722         \par\addvspace{ \skip_use:c { l__enumext_multicols_below_ \__enumext_level: _skip } }
3723     }
3724     {
3725         \__enumext_stop_list:
3726         \__enumext_stop_store_level:
3727     }
3728 }

```

(End of definition for `__enumext_multicols_stop:`)

`__enumext_before_list:` The function `__enumext_before_list:` first calls the function `__enumext_vspace_above:` used by the keys `above` and `above*`, then calls the function `__enumext_before_args_exec:` used by the key `before*` and finally execute the function `__enumext_check_ans_active:` for the check answer mechanism.

```

3729 \cs_new_protected:Nn \__enumext_before_list:
3730 {
3731     \__enumext_vspace_above:
3732     \__enumext_before_args_exec:
3733     \__enumext_check_ans_active:

```

When the `mini-env` key is active it will set the value of the `\l__enumext_minipage_right_X_dim` to be the *width* of the `__enumext_mini_page` environment on the “*right side*”, using this value together with the value of the `\l__enumext_minipage_hsep_X_dim` set by the `mini-sep` key, the value of `\l__enumext_minipage_left_X_dim` will be set, which will be the *width* of `__enumext_mini_page` environment on the “*left side*”, always having a current `\linewidth` as *maximum width* between them.

```

3734     \dim_compare:nNnT
3735     { \dim_use:c { l__enumext_minipage_right_ \__enumext_level: _dim } } > { \c_zero_dim }
3736     {
3737         \dim_set:cn { l__enumext_minipage_left_ \__enumext_level: _dim }
3738         {
3739             \linewidth
3740             - \dim_use:c { l__enumext_minipage_right_ \__enumext_level: _dim }

```

```

3741         - \dim_use:c { l__enumext_minipage_hsep_ \__enumext_level: _dim }
3742     }

```

The boolean variable `\l__enumext_minipage_active_X_bool` will be activated and the integer variable `\g__enumext_minipage_stat_int` used by the `\miniright` command will be incremented, then the function `__enumext_minipage_add_space:` is called and the `__enumext_mini_page` environment on the “left side” will be initialized followed by the “vertical spacing” applied to preserve the “baseline” between the *left* and *right* side environments. After these actions, the function `__enumext_multicols_start:` is called to handle the `multicols` environment.

```

3743     \bool_set_true:c { l__enumext_minipage_active_ \__enumext_level: _bool }
3744     \int_gincr:N \g__enumext_minipage_stat_int
3745     \__enumext_minipage_add_space:
3746     \noindent
3747     \__enumext_mini_page{ \dim_use:c { l__enumext_minipage_left_ \__enumext_level: _dim } }
3748 }
3749 \__enumext_multicols_start:
3750 }

```

(End of definition for `__enumext_before_list:`)

`__enumext_second_part:` The function `__enumext_second_part:` first check the state of the boolean variable `\l__enumext_minipage_active_X_bool`, if it is “true” a small test will be executed to check if we have omitted the use of `\miniright` (the `__enumext_mini_page` environment has not been closed), then close `__enumext_mini_page` and add the *adjusted vertical space* `\l__enumext_minipage_after_skip`, otherwise we will close the `multicols` environment.

```

3751 \cs_new_protected:Nn \__enumext_second_part:
3752 {
3753     \bool_if:cTF { l__enumext_minipage_active_ \__enumext_level: _bool }
3754     {
3755         \int_compare:nNnT { \g__enumext_minipage_stat_int } = { 1 }
3756         {
3757             \msg_warning:nn { enumext } { missing-miniright }
3758             \miniright
3759         }
3760         \int_gzero:N \g__enumext_minipage_stat_int
3761         \__enumext_unskip_unkern: % remove topsep + [partopsep]
3762         \end__enumext_mini_page
3763     }
3764     {
3765         \__enumext_multicols_stop:
3766     }

```

Now we will execute the functions `__enumext_after_stop_list:` used by the key `after`, `__enumext_check_ans_key_hook:` used by the key `check-ans`, `__enumext_vspace_below:` used by the keys `below` and `below*`. Finally set `\l__enumext_standar_bool` to false and call the function `__enumext_resume_save_counter:` used by the `series`, `resume` and `resume*` keys.

```

3767     \__enumext_after_stop_list:
3768     \__enumext_check_ans_key_hook:
3769     \__enumext_vspace_below:
3770     \bool_set_false:N \l__enumext_standar_bool
3771     \__enumext_resume_save_counter:
3772 }

```

(End of definition for `__enumext_second_part:`)

`__enumext_set_item_width:` The function `__enumext_set_item_width:` will set the value of `\itemwidth` taking into account the value established by the `list-offset` key for each level of the environment.

```

3773 \cs_new_protected:Nn \__enumext_set_item_width:
3774 {
3775     \dim_set:Nn \itemwidth { \linewidth }
3776     \dim_compare:nT
3777     {
3778         \dim_use:c { l__enumext_listoffset_ \__enumext_level: _dim } != \c_zero_dim
3779     }
3780     {
3781         \dim_sub:Nn \itemwidth
3782         {
3783             \dim_use:c { l__enumext_listoffset_ \__enumext_level: _dim }
3784         }
3785     }
3786 }

```

(End of definition for `__enumext_set_item_width:`.)

enumext Now create the `enumext` environment based on `list` environment by levels.

```

3787 \NewDocumentEnvironment{enumext}{0}{ }
3788 {
3789   \__enumext_safe_exec:
3790   \__enumext_parse_keys:n {#1}
3791   \__enumext_before_list:
3792   \__enumext_start_store_level:
3793   \__enumext_start_list:nn
3794   { \tl_use:c { l__enumext_label_ } \__enumext_level: _tl } }
3795   {
3796     \use:c { __enumext_list_arg_two_ } \__enumext_level: : }
3797     \__enumext_before_keys_exec:
3798   }
3799   \__enumext_set_item_width:
3800   \__enumext_after_args_exec:
3801 }
3802 {
3803   \__enumext_second_part:
3804 }

```

(End of definition for `enumext`. This function is documented on page 5.)

As we don't want our check to be executed `check-ans` by levels but on the complete list, we will take it out of the `enumext` environment using the “hook” function `__enumext_after_env:nn`.

```

3805 \__enumext_after_env:nn {enumext}
3806 {
3807   \__enumext_execute_after_env:
3808 }

```

13.40 The environment keyans

The environment `keyans` also based on lists. The main differences with the `enumext` environment are the *nesting* and the way the *answers* (choice) will be stored and checked, this environment is intended exclusively for “multiple choice questions”.

The `keyans` environment will only be available if the `save-ans` key is active and can only be used at the “first level” within the `enumext` environment. We do not want the environment to be nested, so we will set a maximum at this point. If the conditions are not met, an error message will be returned.

```

3809 \cs_new_protected:Nn \__enumext_keyans_safe_exec:
3810 {
3811   \bool_if:NF \l__enumext_store_active_bool
3812   {
3813     \msg_error:nnnn { enumext } { wrong-place } { keyans } { save-ans }
3814   }
3815   \int_incr:N \l__enumext_keyans_level_int
3816   \bool_set_true:N \l__enumext_keyans_env_bool
3817   \__enumext_keyans_name_and_start:
3818   % Set false for interfering with enumext nested in keyans (yes, its possible and crayze)
3819   \bool_set_false:N \l__enumext_store_active_bool
3820   \int_compare:nNnT { \l__enumext_keyans_level_int } > { 1 }
3821   {
3822     \msg_error:nn { enumext } { keyans-nested }
3823   }
3824   \int_compare:nNnT { \l__enumext_level_int } > { 1 }
3825   {
3826     \msg_error:nn { enumext } { keyans-wrong-level }
3827   }
3828 }

```

(End of definition for `__enumext_keyans_safe_exec:`.)

`__enumext_keyans_parse_keys:n` Parse [`key = val`] for `keyans` environment.

```

3829 \cs_new_protected:Npn \__enumext_keyans_parse_keys:n #1
3830 {
3831   \keys_set:nn { enumext / keyans } {#1}
3832 }

```

(End of definition for `__enumext_keyans_parse_keys:n`.)

`__enumext_before_list_v:` Same implementation as the one used in the `enumext` environment.

```

3833 \cs_new_protected:Nn \__enumext_before_list_v:
3834 {
3835   \__enumext_vspace_above_v:
3836   \__enumext_before_args_exec_v:
3837   \dim_compare:nNnT { \l__enumext_minipage_right_v_dim } > { \c_zero_dim }
3838   {
3839     \dim_set:Nn \l__enumext_minipage_left_v_dim
3840     {
3841       \linewidth - \l__enumext_minipage_right_v_dim - \l__enumext_minipage_hsep_v_dim
3842     }
3843     \bool_set_true:N \l__enumext_minipage_active_v_bool
3844     \int_gincr:N \g__enumext_minipage_stat_int
3845     \__enumext_keyans_minipage_add_space:
3846     \__enumext_mini_page{ \l__enumext_minipage_left_v_dim }
3847   }
3848   \__enumext_keyans_multicols_start:
3849 }
3850 \cs_new_protected:Nn \__enumext_keyans_multicols_start:
3851 {
3852   \int_compare:nNnT { \l__enumext_columns_v_int } > { 1 }
3853   {
3854     \dim_compare:nNnT { \l__enumext_columns_sep_v_dim } = { \c_zero_dim }
3855     {
3856       \dim_set:Nn \l__enumext_columns_sep_v_dim
3857       {
3858         (
3859           \l__enumext_labelwidth_v_dim + \l__enumext_labelsep_v_dim
3860         ) / \l__enumext_columns_v_int
3861         - \l__enumext_listoffset_v_dim
3862       }
3863     }
3864     \dim_set_eq:NN \columnsep \l__enumext_columns_sep_v_dim
3865     \dim_zero:N \columnseprule % no rule here
3866     \bool_if:NF \l__enumext_minipage_active_v_bool
3867     {
3868       \skip_zero:N \multicolsep
3869       \__enumext_keyans_multi_addvspace:
3870     }
3871     \raggedcolumns
3872     \begin{multicols}{\l__enumext_columns_v_int}
3873   }
3874 }
3875 \cs_new_protected:Nn \__enumext_keyans_multicols_stop:
3876 {
3877   \int_compare:nNnTF { \l__enumext_columns_v_int } > { 1 }
3878   {
3879     \__enumext_stop_list:
3880     \end{multicols}
3881     \__enumext_unskip_unkern:
3882     \__enumext_unskip_unkern:
3883     \par\addvspace{ \l__enumext_multicols_below_v_skip }
3884   }
3885   {
3886     \__enumext_stop_list:
3887   }
3888 }
3889 \cs_new_protected:Nn \__enumext_second_part_v:
3890 {
3891   \bool_if:NTF \l__enumext_minipage_active_v_bool
3892   {
3893     \int_compare:nNnT { \g__enumext_minipage_stat_int } = { 1 }
3894     {
3895       \msg_warning:nn { enumext } { missing-miniright }
3896       \miniright
3897     }
3898     \int_gzero:N \g__enumext_minipage_stat_int
3899     \__enumext_unskip_unkern: % remove \topsep + [\partopsep]
3900     \end__enumext_mini_page
3901     \par\addvspace{ \l__enumext_minipage_after_skip }
3902   }

```



```

3903     {
3904         \__enumext_keyans_multicols_stop:
3905     }
3906     \bool_set_false:N \__enumext_keyans_env_bool
3907     \__enumext_after_stop_list_v:
3908     \__enumext_vspace_below_v:
3909 }

```

(End of definition for __enumext_before_list_v: and others.)

__enumext_keyans_set_item_width:

The function __enumext_keyans_set_item_width: will set the value of \itemwidth taking into account the value established by the list-offset key.

```

3910 \cs_new_protected:Nn \__enumext_keyans_set_item_width:
3911 {
3912     \dim_set:Nn \itemwidth { \linewidth }
3913     \dim_compare:nT
3914     {
3915         \__enumext_listoffset_v_dim != \c_zero_dim
3916     }
3917     {
3918         \dim_sub:Nn \itemwidth { \__enumext_listoffset_v_dim }
3919     }
3920 }

```

(End of definition for __enumext_keyans_set_item_width:.)

keyans

Now we define the environment `keyans` also based on lists.

```

3921 \NewDocumentEnvironment{keyans}{0}{ }
3922 {
3923     \__enumext_keyans_safe_exec:
3924     \__enumext_keyans_parse_keys:n {#1}
3925     \__enumext_before_list_v:
3926     \__enumext_start_list:nn
3927     { \tl_use:N \__enumext_label_v_tl }
3928     {
3929         \__enumext_list_arg_two_v:
3930         \__enumext_before_keys_exec_v:
3931     }
3932     \__enumext_keyans_set_item_width:
3933     \__enumext_after_args_exec_v:
3934 }
3935 {
3936     \__enumext_check_starred_cmd:n { item }
3937     \__enumext_second_part_v:
3938 }

```

(End of definition for `keyans`. This function is documented on page 15.)

13.41 Tagging PDF support for non-standart list environments

The \TeX release 2022-06-01 brings automatic support for *tagged* PDF in several aspects, including the standard *list environments* and the `list` environment. Unfortunately non-standard *list environments* like `keyanspic` or the horizontal list environments `enumext*` and `keyans*` are not structured in a nice way, i.e. the expected result in the PDF file is the expected one, but the underlying structure is not correct. In simple terms, for *tagged* PDF a `list` environment is a `list` environment, no matter what it looks like in the PDF file.

To maintain a correct `list` structure when `\DocumentMetadata` is active, it is necessary to do some things manually using `tagpdf`[18] and `ltsockets`[20]. This implementation is an adaptation of my answer thanks to Ulrike Fischer's comments in [How can I modify my \item redefinition to be compatible with tagging-pdf](#).

13.41.1 Socket for tagging support in `enumext*` and `keyans*`

start-list-tags

stop-start-tags

stop-list-tags

__enumext_start_list_tag:n

__enumext_stop_start_list_tag:

__enumext_stop_list_tag:n

We will first define the necessary sockets and their behavior for `enumext*` and `keyans*`.

```

3939 \socket_new:nn {tagsupport/\__enumext/starred}{1 }
3940 \socket_new_plug:nnn {tagsupport/\__enumext/starred} {start-list-tags}
3941 {
3942     \tag_resume:n {#1}
3943     \tag_mc_end_push:
3944     \tag_struct_begin:n {tag=LI}
3945     \tag_struct_begin:n {tag=Lbl}
3946     \tag_mc_begin:n {tag=Lbl}
3947 }
3948 \socket_new_plug:nnn {tagsupport/\__enumext/starred} {stop-start-tags}

```

```

3949 {
3950     \tag_mc_end:
3951     \tag_struct_end:n {tag=Lbl}
3952     \tag_struct_begin:n {tag=LBody}
3953     \tag_struct_begin:n {tag=text-unit}
3954     \tag_struct_begin:n {tag=text}
3955 }
3956 \socket_new_plug:nnn {tagsupport/__enumext/starred} {stop-list-tags}
3957 {
3958     \tag_struct_end:n {tag=text}
3959     \tag_struct_end:n {tag=text-unit}
3960     \tag_struct_end:n {tag=LBody}
3961     \tag_struct_end:n {tag=LI}
3962     \tag_mc_begin_pop:n {}
3963     \tag_suspend:n {#1}
3964 }

```

And now we'll wrap them so that they're only active when `\DocumentMetadata` is present.

```

3965 \cs_new_protected_nopar:Npn \__enumext_start_list_tag:n #1
3966 {
3967     \IfDocumentMetadataTF
3968     {
3969         \socket_assign_plug:nn {tagsupport/__enumext/starred} {start-list-tags}
3970         \socket_use:nn {tagsupport/__enumext/starred} {#1}
3971     } {}
3972 }
3973 \cs_new_protected_nopar:Nn \__enumext_stop_start_list_tag:
3974 {
3975     \IfDocumentMetadataTF
3976     {
3977         \socket_assign_plug:nn {tagsupport/__enumext/starred} {stop-start-tags}
3978         \socket_use:nn {tagsupport/__enumext/starred} { }
3979     } {}
3980 }
3981 \cs_new_protected_nopar:Npn \__enumext_stop_list_tag:n #1
3982 {
3983     \IfDocumentMetadataTF
3984     {
3985         \socket_assign_plug:nn {tagsupport/__enumext/starred} {stop-list-tags}
3986         \socket_use:nn {tagsupport/__enumext/starred} {#1}
3987     } {}
3988 }

```

(End of definition for start-list-tags and others.)

13.41.2 Socket for tagging support in keyanspic

We will first define the necessary sockets and their behavior for `keyanspic` environment.

```

start-list-tags
stop-start-tags
stop-list-tags
__enumext_anspic_start_list_tag:
__enumext_anspic_stop_start_list_tag:
__enumext_anspic_stop_list_tag:
3989 \socket_new:nn {tagsupport/__enumext/keyanspic}{ 0 }
3990 \socket_new_plug:nnn {tagsupport/__enumext/keyanspic} {start-list-tags}
3991 {
3992     \tag_resume:n {keyanspic}
3993     \tag_mc_end_push:
3994     \tag_struct_begin:n {tag=LI}
3995     \tag_struct_begin:n {tag=Lbl}
3996     \tag_mc_begin:n {tag=Lbl}
3997 }
3998 \socket_new_plug:nnn {tagsupport/__enumext/keyanspic} {stop-start-tags}
3999 {
4000     \tag_mc_end:
4001     \tag_struct_end:n {tag=Lbl}
4002     \tag_struct_begin:n {tag=LBody}
4003     \tag_struct_begin:n {tag=text-unit}
4004     \tag_struct_begin:n {tag=text}
4005     \tag_mc_begin:n {tag=text}
4006 }
4007 \socket_new_plug:nnn {tagsupport/__enumext/keyanspic} {stop-list-tags}
4008 {
4009     \tag_mc_end:
4010     \tag_struct_end:n {tag=text}
4011     \tag_struct_end:n {tag=text-unit}
4012     \tag_struct_end:n {tag=LBody}
4013     \tag_struct_end:n {tag=LI}

```

```

4014 \tag_mc_begin_pop:n {}
4015 \tag_suspend:n {keyanspic}
4016 }

And now we'll wrap them so that they're only active when \DocumentMetadata is present.

4017 \cs_new_protected_nopar:Nn \__enumext_anspic_start_list_tag:
4018 {
4019   \IfDocumentMetadataTF
4020   {
4021     \socket_assign_plug:nn {tagsupport/__enumext/keyanspic} {start-list-tags}
4022     \socket_use:n {tagsupport/__enumext/keyanspic}
4023   } {}
4024 }
4025 \cs_new_protected_nopar:Nn \__enumext_anspic_stop_start_list_tag:
4026 {
4027   \IfDocumentMetadataTF
4028   {
4029     \socket_assign_plug:nn {tagsupport/__enumext/keyanspic} {stop-start-tags}
4030     \socket_use:n {tagsupport/__enumext/keyanspic}
4031   } {}
4032 }
4033 \cs_new_protected_nopar:Nn \__enumext_anspic_stop_list_tag:
4034 {
4035   \IfDocumentMetadataTF
4036   {
4037     \socket_assign_plug:nn {tagsupport/__enumext/keyanspic} {stop-list-tags}
4038     \socket_use:n {tagsupport/__enumext/keyanspic}
4039   } {}
4040 }

```

(End of definition for *start-list-tags* and others.)

13.42 The environment `keyanspic` and `\anspic`

The `keyanspic` environment is a `list` based environment that uses the same configuration for “*spacing*” and $\langle label \rangle$ as the `keyans` environment, but it does not use `\item`. The $\langle contents \rangle$ are passed to the environment by means of the `\anspic` command as replacement for `\item` command and placed inside `minipage` environments, with the $\langle label \rangle$ centered “*above*” or “*below*”, adjusting *widths* and *position* according to the options passed to the environment.

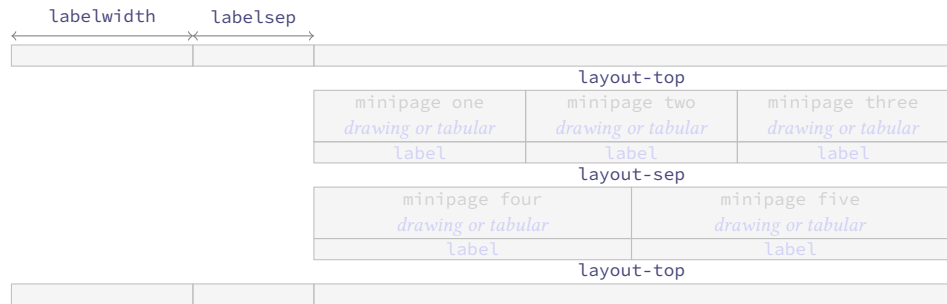


Figure 12: Representation of the `keyanspic` spacing in `enumext`.

In order for the `keyanspic` environment and the `\anspic` command to work correctly, we need to set and export some variables in the first part of the environment definition and pass them to `\anspic` which is executed in the second part of the environment. This implementation is adapted from the answer given by Enrico Gregorio (@egreg) in [How to process the body of an environment and divide it by a \macro?](#).

13.42.1 The environment `keyanspic`

First we define the key that allows us to process the position of the $\langle label \rangle$ centered “*above*” or “*below*” which will be `label-pos`, the vertical separation of these from *drawing or tabular* will be handled with the key `label-sep`. The “*layout style*” will be handled with the key `layout-sty` will take two values separated by comma $\{ \langle n^\circ upper, n^\circ lower \rangle \}$ and will determine the number of `minipage` environments in which all arguments of `\anspic` will be printed at the “upper” and “lower” within the environments separated by the value of the key `layout-sep`. The vertical space “top” and “bottom” of the environment will be handled with the key `layout-top`.

```

label-pos 231 First we define the key that allows us to process the position of the <label> centered “above” or “below” which
label-sep 231 will be label-pos, the vertical separation of these from drawing or tabular will be handled with the key
layout-sty 231 label-sep. The “layout style” will be handled with the key layout-sty will take two values separated
layout-sep 231 by comma {<n° upper, n° lower>} and will determine the number of minipage environments in which all
layout-top 231 arguments of \anspic will be printed at the “upper” and “lower” within the environments separated by the
mark-ans   231 value of the key layout-sep. The vertical space “top” and “bottom” of the environment will be handled with
mark-pos   231 the key layout-top.
mark-sep   4041 \keys_define:nn { enumext / keyanspic }
save-sep   4042 {
wrap-opt   4043   label-pos .choice:,
wrap-ans*  4044   label-pos / above .code:n =
show-ans   4045             \bool_set_true:N \l__enumext_anspic_label_above_bool
show-pos   4046             \str_set:Nn \l__enumext_anspic_mini_pos_str { t },
           4047   label-pos / below .code:n =

```

```

4048         \bool_set_false:N \l__enumext_anspic_label_above_bool
4049         \str_set:Nn \l__enumext_anspic_mini_pos_str { b },
4050     label-pos / unknown .code:n =
4051         \msg_error:nnee { enumext } { unknown-choice }
4052         { label-pos } { above,~ below } { \exp_not:n {#1} },
4053     label-pos .initial:n = below,
4054     label-pos .value_required:n = true,
4055     label-sep .skip_set:N = \l__enumext_anspic_label_sep_skip,
4056     label-sep .value_required:n = true,
4057     layout-sty .tl_set:N = \l__enumext_anspic_layout_style_tl,
4058     layout-sty .value_required:n = true,
4059     layout-sep .code:n = \keys_set:nn { enumext / keyans } { parsep = #1 },
4060     layout-sep .value_required:n = true,
4061     layout-top .code:n = \keys_set:nn { enumext / keyans } { topsep = #1 },
4062     layout-top .value_required:n = true,
4063     mark-ans .code:n = \keys_set:nn { enumext / keyans } { mark-ans = #1 },
4064     mark-ans .value_required:n = true,
4065     mark-pos .code:n = \keys_set:nn { enumext / keyans } { mark-pos = #1 },
4066     mark-pos .value_required:n = true,
4067     mark-sep .code:n = \keys_set:nn { enumext / keyans } { mark-sep = #1 },
4068     mark-sep .value_required:n = true,
4069     save-sep .code:n = \keys_set:nn { enumext / keyans } { save-sep = #1 },
4070     save-sep .value_required:n = true,
4071     wrap-opt .code:n = \keys_set:nn { enumext / keyans } { wrap-opt = #1 },
4072     wrap-opt .value_required:n = true,
4073     wrap-ans* .code:n = \keys_set:nn { enumext / keyans } { wrap-ans* = #1 },
4074     wrap-ans* .value_required:n = true,
4075     show-ans .code:n = \keys_set:nn { enumext / keyans } { show-ans = #1 },
4076     show-ans .value_required:n = true,
4077     show-pos .code:n = \keys_set:nn { enumext / keyans } { show-pos = #1 },
4078     show-pos .value_required:n = true,
4079     unknown .code:n = {
4080         \tl_set:Nn \l__enumext_envir_name_tl { keyanspic }
4081         \__enumext_keyans_unknown_keys:n {#1}
4082     },
4083 }

```

(End of definition for `label-pos` and others.)

```

\__enumext_keyans_pic_safe_exec:
\__enumext_keyans_pic_parse_keys:n
\__enumext_keyans_pic_skip_abs:N
\__enumext_keyans_pic_arg_two:

```

The function `__enumext_keyans_pic_safe_exec`: check the nested level position inside the `enumext` environment.

```

4084 \cs_new_protected:Nn \__enumext_keyans_pic_safe_exec:
4085 {
4086     \int_incr:N \l__enumext_keyans_pic_level_int
4087     \int_compare:nNtT { \l__enumext_keyans_pic_level_int } > { 1 }
4088     {
4089         \msg_error:nn { enumext } { keyanspic-nested }
4090     }
4091     \__enumext_keyans_name_and_start:
4092 }

```

Parse [`<key = val>`] for `keyanspic` environment.

```

4093 \cs_new_protected:Npn \__enumext_keyans_pic_parse_keys:n #1
4094 {
4095     \tl_if_novalue:nF {#1}
4096     {
4097         \keys_set:nn { enumext / keyanspic } {#1}
4098     }
4099 }

```

The function `__enumext_keyans_pic_skip_abs:N` will return a positive value `\parsep` from `keyans` environment.

```

4100 \cs_new_protected:Npn \__enumext_keyans_pic_skip_abs:N #1
4101 {
4102     \dim_compare:nNtT { #1 } < { \c_zero_dim }
4103     {
4104         \skip_set:Nn #1 { -#1 }
4105     }
4106 }

```

The `__enumext_keyans_pic_arg_two:` function will be used in the *second argument* of the `list` environment that defines the `keyanspic` environment, with this we will take the configuration of the “*spaces*” and

the keys `label`, `wrap-label`, `parsep` and `topsep` from the `keyans` environment. The first thing we need to do is set the boolean variable `\l__enumext_leftmargin_tmp_v_bool` handled by the `list-indent` key to “false”, then copy the definition of the second list argument from the `keyans` environment definition and make sure that `\parsep` does not have a negative value.

```

4107 \cs_new_protected:Npn \__enumext_keyans_pic_arg_two:
4108 {
4109   \bool_set_false:N \l__enumext_leftmargin_tmp_v_bool
4110   \__enumext_list_arg_two_v:
4111   \__enumext_keyans_pic_skip_abs:N \parsep

```

Now we increment the counter `enumXv` of the `keyans` environment and save the *total height* of the *(label)* in `\l__enumext_anspic_label_htdp_dim` used by `\anspic` and we will adjust the values of `\parsep` only if the key `label-pos` is set to *below*.

```

4112   \bool_if:NF \l__enumext_anspic_label_above_bool
4113   {
4114     \stepcounter { enumXv }
4115     \hbox_set:Nn \l__enumext_anspic_label_box { \l__enumext_label_v_tl }
4116     \dim_set:Nn \l__enumext_anspic_label_htdp_dim
4117     {
4118       \box_ht_plus_dp:N \l__enumext_anspic_label_box
4119     }
4120     \skip_add:Nn \parsep
4121     {
4122       \l__enumext_anspic_label_htdp_dim
4123       + \box_dp:N \strutbox
4124       + \l__enumext_anspic_label_sep_skip
4125     }
4126   }

```

Finally we *adjust* the value of `\leftmargin` and `\topsep` then set `\listparindent`, `\partopsep` and `\itemsep` to zero so that the *horizontal* and *vertical* space is not affected.

```

4127   \dim_add:Nn \leftmargin { -\l__enumext_labelwidth_v_dim - \l__enumext_labelsep_v_dim }
4128   \ignorespaces
4129   \skip_add:Nn \topsep { 0.5\box_dp:N \strutbox }
4130   \dim_zero:N \listparindent
4131   \skip_zero:N \partopsep
4132   \skip_zero:N \itemsep
4133 }

```

(End of definition for `__enumext_keyans_pic_safe_exec:` and others.)

keyanspic Now we define the environment `keyanspic`. For compatibility with *tagged* PDF we must use the `\begin{list}` form and a lot of conditional code using `\IfDocumentMetadataTF`. We will first stop the code for automatic *tagged* PDF for `list` environments, redefine `\item` so that it cannot be used, and stop the code for automatic *tagged* PDF for the `keyanspic` environment.

```

4134 \NewDocumentEnvironment{keyanspic}{ o }
4135 {
4136   \__enumext_keyans_pic_safe_exec:
4137   \__enumext_keyans_pic_parse_keys:n {#1}
4138   \begin{list} { } { \__enumext_keyans_pic_arg_two: }
4139   \IfDocumentMetadataTF
4140   {
4141     \tag_suspend:n {list}
4142   }{}
4143   \item[] \scan_stop:
4144   \RenewDocumentCommand \item {}
4145   {
4146     \msg_error:nn { enumext } { keyanspic-item-cmd }
4147   }
4148   \IfDocumentMetadataTF
4149   {
4150     \tag_resume:n {keyanspic}
4151     \tag_tool:n {para/tagging=false}
4152     \tag_suspend:n {keyanspic}
4153   } { }
4154 }

```

In the second part of the environment definition we will manually place our code for *tagged* PDF and execute the command `\anspic` using the `__enumext_anspic_exec:` function.

```

4155 {
4156   \IfDocumentMetadataTF

```

```

4157     {
4158       \tag_resume:n {keyanspic}
4159       \tag_mc_end_push:
4160       \tag_struct_begin:n {tag=L,attribute=enumerate}
4161     } { }
4162     \__enumext_anspic_exec:
4163     \IfDocumentMetadataTF
4164     {
4165       \tag_suspend:n {keyanspic}
4166     } { }
4167     \end{list}
4168     \IfDocumentMetadataTF
4169     {
4170       \tag_struct_end:n {tag=L}
4171       \tag_mc_begin_pop:n {}
4172       \tag_struct_end:n {tag=L}
4173       \tag_mc_begin_pop:n {}
4174     } { }

```

Finally we check if `\anspic*` has been used, set the counter `enumXvi` to zero and apply our “adjusted” vertical space bottom.

```

4175     \__enumext_check_starred_cmd:n { anspic }
4176     \setcounter { enumXvi } { 0 }
4177     \bool_if:NTF \__enumext_anspic_label_above_bool
4178     {
4179       \par\addvspace{ 0.5\box_dp:N \strutbox }
4180     }
4181     {
4182       \par
4183       \addvspace
4184       {
4185         \dim_eval:n
4186         {
4187           \__enumext_anspic_label_htdp_dim + \box_ht_plus_dp:N \strutbox
4188           + \__enumext_anspic_label_sep_skip + \__enumext_topsep_v_skip
4189         }
4190       }
4191     }
4192   }

```

(End of definition for `keyanspic`. This function is documented on page 16.)

13.42.2 The command `\anspic`

The `\anspic` command take three arguments, the *starred versions* `\anspic*[\langle content \rangle]` store the current `\label` next to the *optional argument* `[\langle content \rangle]` in the *sequence* and *prop list* defined by `save-ans` key. The third *mandatory argument* `{\langle drawing or tabular \rangle}` is NOT stored in the *sequence* or *prop list*.

- One of the complications here to make the `keyanspic` environment compatible with *tagged* PDF is the position of `\label`, the `\anspic` command processes the arguments in order, where #1 and #2 correspond to `\label` and #3 to the mandatory argument and puts all this inside a `minipage` environment. If #1 and #2, that is `\label`, is above #3 there are no problems with *tagged* PDF, but if #3 comes first the list created with *tagged* PDF will not be correct.

`\anspic`

We check that the command is active in the `keyanspic` environment only if the `save-ans` key is present, otherwise we return an error. The three arguments are handled by the function `__enumext_anspic_args:nnn` and stored in the sequence `__enumext_anspic_args_seq` which is processed by the `keyanspic` environment.

```

4193 \NewDocumentCommand \anspic { s o +m }
4194 {
4195   \bool_if:NF \__enumext_store_active_bool
4196   {
4197     \msg_error:nnnn { enumext } { wrong-place } { keyanspic } { save-ans }
4198   }
4199   \int_compare:nNt { \__enumext_level_int } > { 1 }
4200   {
4201     \msg_error:nn { enumext } { keyanspic-wrong-level }
4202   }
4203   \int_compare:nNt { \__enumext_keyans_level_int } = { 1 }
4204   {
4205     \msg_error:nnnn { enumext } { command-wrong-place } { anspic } { keyans }
4206   }
4207   \seq_put_right:Nn \__enumext_anspic_args_seq
4208   {

```

```

4209     \__enumext_anspic_args:nnn { #1 } { #2 } { #3 }
4210   }
4211 }

```

The `__enumext_anspic_body_dim:n` function will set the value of `\l__enumext_anspic_body_htdp_dim` equal to the “height plus depth” of the *mandatory argument* if the key `label-pos` is set “below”.

```

4212 \cs_new_protected:Npn \__enumext_anspic_body_dim:n #1
4213 {
4214   \bool_if:NF \l__enumext_anspic_label_above_bool
4215   {
4216     \IfDocumentMetadataTF
4217     {
4218       \tag_suspend:n {keyanspic}
4219     } { }
4220     \vbox_set:Nn \l__enumext_anspic_body_box { #1 }
4221     \dim_set:Nn \l__enumext_anspic_body_htdp_dim
4222     {
4223       \box_ht_plus_dp:N \l__enumext_anspic_body_box
4224     }
4225     \IfDocumentMetadataTF
4226     {
4227       \tag_resume:n {keyanspic}
4228     } { }
4229   }
4230 }

```

The `__enumext_anspic_label:nn` function will process inside `\makebox` the *starred argument* ‘*’ and *optional argument* passed to the command. Here we will store the `<label>` and *optional argument* in *prop list* and *sequence* and execute the `show-ans`, `show-pos`, `font`, `wrap-label`, `wrap-ans*` and `wrap-opt` keys.

```

4231 \cs_new_protected:Npn \__enumext_anspic_label:nn #1 #2
4232 {
4233   \makebox[ \l__enumext_anspic_mini_width_dim ][ c ]
4234   {
4235     \bool_if:NTF { #1 }
4236     {
4237       \bool_set_true:N \l__enumext_item_wrap_key_bool
4238       \bool_set_true:N \l__enumext_wrap_label_v_bool
4239       \__enumext_keyans_save_item_opt:n { #2 }
4240       \__enumext_keyans_addto_prop:n { #2 }
4241       \__enumext_keyans_store_ref:
4242       \__enumext_keyans_addto_seq:n { #2 }
4243       \int_gincr:N \g__enumext_check_starred_cmd_int
4244       \__enumext_keyans_show_ans:
4245       \__enumext_keyans_show_pos:
4246       \makebox[ \l__enumext_labelwidth_v_dim ][ c ]
4247       {
4248         \tl_use:N \l__enumext_label_font_style_v_tl
4249         \__enumext_keyans_wrapper_label:n { \l__enumext_label_vi_tl }
4250       }
4251       \skip_horizontal:n { \l__enumext_labelsep_v_dim }
4252       \__enumext_keyans_show_item_opt:
4253     }
4254     {
4255       \bool_set_false:N \l__enumext_item_wrap_key_bool
4256       \tl_use:N \l__enumext_label_font_style_v_tl
4257       \__enumext_wrapper_label_v:n { \l__enumext_label_vi_tl }
4258     }
4259   }
4260 }

```

The function `__enumext_anspic_label_pos:nnn` will be in charge of handling the “counter” and the position of the `<label>`, set by `label-pos` key which will have the same configuration as the `keyans` environment.

```

4261 \cs_new_protected:Npn \__enumext_anspic_label_pos:nnn #1 #2 #3
4262 {
4263   \stepcounter { enumXvi }
4264   \__enumext_anspic_body_dim:n { #3 }
4265   \bool_if:NTF \l__enumext_anspic_label_above_bool
4266   {
4267     \__enumext_anspic_label:nn { #1 } { #2 }
4268   }
4269   {
4270     \raisebox

```



```

4271     {
4272         -\dim_eval:n
4273         {
4274             \l__enumext_anspic_label_htdp_dim
4275             + \l__enumext_anspic_body_htdp_dim
4276             + \box_dp:N \strutbox
4277             + \l__enumext_anspic_label_sep_skip
4278         }
4279     }
4280     [ opt ] [ opt ]
4281     {
4282         \l__enumext_anspic_label:nn { #1 } { #2 }
4283     }
4284 }
4285 }
4286 %

```

The `\l__enumext_anspic_args:nnn` function will be responsible for placing the code compatible with *tagged* PDF and the arguments within the `\l__enumext_anspic_args_seq` sequence which will be processed by the `\l__enumext_anspic_print:n` function in the second part of the definition of the `keyanspic` environment.

```

4287 \cs_new_protected:Nn \l__enumext_anspic_args:nnn
4288 {
4289     \l__enumext_anspic_start_list_tag:
4290     \l__enumext_anspic_label_pos:nnn { #1 } { #2 } { #3 }
4291     \l__enumext_anspic_stop_start_list_tag:
4292     \bool_if:NTF \l__enumext_anspic_label_above_bool
4293     {
4294         \\[\l__enumext_anspic_label_sep_skip] #3
4295     }
4296     {
4297         \\ #3
4298     }
4299     \l__enumext_anspic_stop_list_tag:
4300 }

```

The value $\langle n^{\circ} upper, n^{\circ} lower \rangle$ passed to the `layout-sty` key is split by comma and is handled directly by the function `\l__enumext_anspic_print:n` and passed to the function `\l__enumext_anspic_row:n`.

```

4301 \cs_new_protected:Nn \l__enumext_anspic_print:n
4302 {
4303     \clist_map_function:nN { #1 } \l__enumext_anspic_row:n
4304 }
4305 \cs_generate_variant:Nn \l__enumext_anspic_print:n { e, V }

```

The function `\l__enumext_anspic_row:n` will set the *widths* for the `minipage` environments and place *all arguments* passed to `\anspic` saved in the `\l__enumext_anspic_args_seq` sequence inside them.

```

4306 \cs_new_protected:Nn \l__enumext_anspic_row:n
4307 {
4308     \dim_set:Nn \l__enumext_anspic_mini_width_dim { \linewidth / #1 }
4309     \int_set:Nn \l__enumext_anspic_above_int { \l__enumext_anspic_below_int }
4310     \int_set:Nn \l__enumext_anspic_below_int { \l__enumext_anspic_above_int + #1 }
4311     \int_step_inline:nnn
4312     { \l__enumext_anspic_above_int + 1 }
4313     { \l__enumext_anspic_below_int }
4314     {
4315         \IfDocumentMetadataTF
4316         {
4317             \tag_suspend:n {minipage}
4318         } { }
4319         \begin{minipage}[ \l__enumext_anspic_mini_pos_str ]{ \l__enumext_anspic_mini_width_dim }
4320             \centering
4321             \seq_item:Nn \l__enumext_anspic_args_seq { ##1 }
4322         \end{minipage}
4323         \IfDocumentMetadataTF
4324         {
4325             \tag_resume:n {minipage}
4326         } { }
4327     }
4328     \par
4329 }

```

The `\l__enumext_anspic_exec:` function will execute all the code in the `\anspic` command in the second argument of the `keyanspic` environment definition. If the key `layout-sty` is not set, everything will be printed on a *single line*.

```

4330 \cs_new_protected:Nn \__enumext_anspic_exec:
4331 {
4332   \tl_if_empty:NTF \l__enumext_anspic_layout_style_tl
4333   {
4334     \__enumext_anspic_print:e { \seq_count:N \l__enumext_anspic_args_seq }
4335   }
4336   {
4337     \__enumext_anspic_print:V \l__enumext_anspic_layout_style_tl
4338   }
4339 }

```

(End of definition for `\anspic` and others. This function is documented on page 17.)

13.43 The horizontal environments

Generating *horizontal list environments* is NOT as simple as standard \LaTeX list environments. The fundamental part of the code is adapted from the `shortlst` package to a more modern version using `expl3`. It is not possible to redefine `\item` and `\makelabel` using `\RenewDocumentCommand` as in the vertical *non starred* versions.

To achieve the *horizontal list environments* we will capture the `\item` command and the $\langle content \rangle$ of this in *horizontal box* using `\makebox` for the `label` and a `minipage` environment for the $\langle content \rangle$ passed to `\item`, we will also add the *optional argument* ($\langle number \rangle$) to `\item` to be able to *join columns* horizontally, in simple terms, we want `\item` to behave in the same way as in the `enumext` environment but adding an *first optional argument* ($\langle number \rangle$).

A side effect is the limitation of using `\item` in this way *without* using `\RenewDocumentCommand`, which loses the original definition and affects the *standard list environments* provided by \LaTeX and any environment defined using base `list` environment, including: `itemize`, `enumerate`, `description`, `quote`, `quotation`, `verse`, `center`, `flushleft`, `flushright`, `verbatim`, `tabbing`, `trivlist`, `list` and all environments created with `\newtheorem`.

- One way to get around this is to use something like:

```
\AddToHook{env/enumerate/before}{recover original \item definition}
```

inside `minipage`, but in my partial tests this does not have the desired effect and the vertical and horizontal spacing is distorted. For now this will remain as a limitation and I will see if it is feasible to implement it in the future.

- For compatibility with the *tagged* PDF we close the environments according to the presence or not of the `mini-env` key.

13.43.1 Functions for item box width

We set the default value for the *width of the box* containing the $\langle content \rangle$ of the items for `enumext*` environment.

```

\__enumext_starred_columns_set_vii:
\__enumext_starred_columns_set_viii:
4340 \cs_new_protected:Nn \__enumext_starred_columns_set_vii:
4341 {
4342   \dim_compare:nNnT { \l__enumext_columns_sep_vii_dim } = { \c_zero_dim }
4343   {
4344     \dim_set:Nn \l__enumext_columns_sep_vii_dim
4345     {
4346       ( \l__enumext_labelwidth_vii_dim + \l__enumext_labelsep_vii_dim )
4347       / \l__enumext_columns_vii_int
4348     }
4349   }
4350   \int_set:Nn \l__enumext_tmpa_vii_int { \l__enumext_columns_vii_int - 1 }
4351   \dim_set:Nn \l__enumext_item_width_vii_dim
4352   {
4353     ( \linewidth - \l__enumext_columns_sep_vii_dim * \l__enumext_tmpa_vii_int )
4354     / \l__enumext_columns_vii_int
4355     - \l__enumext_labelwidth_vii_dim
4356     - \l__enumext_labelsep_vii_dim
4357   }

```

When the key `rightmargin` is active we must adjust the values.

```

4358   \dim_compare:nNnT { \l__enumext_rightmargin_vii_dim } > { \c_zero_dim }
4359   {
4360     \dim_sub:Nn \l__enumext_item_width_vii_dim
4361     {
4362       ( \l__enumext_rightmargin_vii_dim * \l__enumext_tmpa_vii_int )
4363       / \l__enumext_columns_vii_int
4364     }
4365     \dim_add:Nn \l__enumext_columns_sep_vii_dim
4366     {
4367       \l__enumext_rightmargin_vii_dim
4368     }
4369   }
4370 }

```

Same implementation for the `keyans*` environment.

```

4371 \cs_new_protected:Nn \__enumext_starred_columns_set_viii:
4372 {
4373   \dim_compare:nNnT { \__enumext_columns_sep_viii_dim } = { \c_zero_dim }
4374   {
4375     \dim_set:Nn \__enumext_columns_sep_viii_dim
4376     {
4377       ( \__enumext_labelwidth_viii_dim + \__enumext_labelsep_viii_dim )
4378       / \__enumext_columns_viii_int
4379     }
4380   }
4381   \int_set:Nn \__enumext_tmpa_viii_int { \__enumext_columns_viii_int - 1 }
4382   \dim_set:Nn \__enumext_item_width_viii_dim
4383   {
4384     ( \linewidth - \__enumext_columns_sep_viii_dim * \__enumext_tmpa_viii_int )
4385     / \__enumext_columns_viii_int
4386     - \__enumext_labelwidth_viii_dim
4387     - \__enumext_labelsep_viii_dim
4388   }
4389   \dim_compare:nNnT { \__enumext_rightmargin_viii_dim } > { \c_zero_dim }
4390   {
4391     \dim_sub:Nn \__enumext_item_width_viii_dim
4392     {
4393       ( \__enumext_rightmargin_viii_dim * \__enumext_tmpa_viii_int )
4394       / \__enumext_columns_viii_int
4395     }
4396     \dim_add:Nn \__enumext_columns_sep_viii_dim
4397     {
4398       \__enumext_rightmargin_viii_dim
4399     }
4400   }
4401 }

```

(End of definition for `__enumext_starred_columns_set_vii:` and `__enumext_starred_columns_set_viii:`)

13.43.2 Functions for join item columns

`__enumext_starred_joined_item_vii:n`
`__enumext_starred_joined_item_viii:n`

The functions `__enumext_starred_joined_item_vii:n` and `__enumext_starred_joined_item_viii:n` will set the *width* of the box in which the *content* passed to `\item(<columns>)` will be stored together with the value of `\itemwidth` for the `enumext*` environment.

```

4402 \cs_new_protected:Npn \__enumext_starred_joined_item_vii:n #1
4403 {
4404   \int_set:Nn \__enumext_joined_item_vii_int {#1}
4405   \int_compare:nNnT { \__enumext_joined_item_vii_int } > { \__enumext_columns_vii_int }
4406   {
4407     \msg_warning:nnee { enumext } { item-joined }
4408     { \int_use:N \__enumext_joined_item_vii_int }
4409     { \int_use:N \__enumext_columns_vii_int }
4410     \int_set:Nn \__enumext_joined_item_vii_int
4411     {
4412       \__enumext_columns_vii_int - \__enumext_item_column_pos_vii_int + 1
4413     }
4414   }
4415   \int_compare:nNnT
4416   { \__enumext_joined_item_vii_int }
4417   >
4418   { \__enumext_columns_vii_int - \__enumext_item_column_pos_vii_int + 1 }
4419   {
4420     \msg_warning:nnee { enumext } { item-joined-columns }
4421     { \int_use:N \__enumext_joined_item_vii_int }
4422     {
4423       \int_eval:n
4424       { \__enumext_columns_vii_int - \__enumext_item_column_pos_vii_int + 1 }
4425     }
4426     \int_set:Nn \__enumext_joined_item_vii_int
4427     {
4428       \__enumext_columns_vii_int - \__enumext_item_column_pos_vii_int + 1
4429     }
4430   }
4431   \int_compare:nNnTF { \__enumext_joined_item_vii_int } > { 1 }
4432   {
4433     \int_set_eq:NN \__enumext_joined_item_aux_vii_int \__enumext_joined_item_vii_int

```

```

4434     \int_decr:N \l__enumext_joined_item_aux_vii_int
4435     \int_add:Nn \l__enumext_item_column_pos_vii_int { \l__enumext_joined_item_aux_vii_int }
4436     \int_gadd:Nn \g__enumext_item_count_all_vii_int { \l__enumext_joined_item_aux_vii_int }
4437     \dim_set:Nn \l__enumext_joined_width_vii_dim
4438     {
4439         \l__enumext_item_width_vii_dim * \l__enumext_joined_item_vii_int
4440         + ( \l__enumext_labelwidth_vii_dim + \l__enumext_labelsep_vii_dim
4441           + \l__enumext_columns_sep_vii_dim
4442           )*\l__enumext_joined_item_aux_vii_int
4443     }
4444     \dim_set_eq:NN \itemwidth \l__enumext_joined_width_vii_dim
4445 }
4446 {
4447     \dim_set_eq:NN \l__enumext_joined_width_vii_dim \l__enumext_item_width_vii_dim
4448     \dim_set_eq:NN \itemwidth \l__enumext_item_width_vii_dim
4449 }
4450 }

```

Same implementation for the `keyans*` environment.

```

4451 \cs_new_protected:Npn \__enumext_starred_joined_item_viii:n #1
4452 {
4453     \int_set:Nn \l__enumext_joined_item_viii_int {#1}
4454     \int_compare:nNnT { \l__enumext_joined_item_viii_int } > { \l__enumext_columns_viii_int }
4455     {
4456         \msg_warning:nnee { enumext } { item-joined }
4457         { \int_use:N \l__enumext_joined_item_viii_int }
4458         { \int_use:N \l__enumext_columns_viii_int }
4459         \int_set:Nn \l__enumext_joined_item_viii_int
4460         {
4461             \l__enumext_columns_viii_int - \l__enumext_item_column_pos_viii_int + 1
4462         }
4463     }
4464     \int_compare:nNnT
4465     { \l__enumext_joined_item_viii_int }
4466     >
4467     { \l__enumext_columns_viii_int - \l__enumext_item_column_pos_viii_int + 1 }
4468     {
4469         \msg_warning:nnee { enumext } { item-joined-columns }
4470         { \int_use:N \l__enumext_joined_item_viii_int }
4471         {
4472             \int_eval:n
4473             { \l__enumext_columns_viii_int - \l__enumext_item_column_pos_viii_int + 1 }
4474         }
4475         \int_set:Nn \l__enumext_joined_item_viii_int
4476         {
4477             \l__enumext_columns_viii_int - \l__enumext_item_column_pos_viii_int + 1
4478         }
4479     }
4480     \int_compare:nNnTF { \l__enumext_joined_item_viii_int } > { 1 }
4481     {
4482         \int_set_eq:NN \l__enumext_joined_item_aux_viii_int \l__enumext_joined_item_viii_int
4483         \int_decr:N \l__enumext_joined_item_aux_viii_int
4484         \int_add:Nn \l__enumext_item_column_pos_viii_int { \l__enumext_joined_item_aux_viii_int }
4485         \int_gadd:Nn \g__enumext_item_count_all_viii_int { \l__enumext_joined_item_aux_viii_int }
4486         \dim_set:Nn \l__enumext_joined_width_viii_dim
4487         {
4488             \l__enumext_item_width_viii_dim * \l__enumext_joined_item_viii_int
4489             + ( \l__enumext_labelwidth_viii_dim + \l__enumext_labelsep_viii_dim
4490               + \l__enumext_columns_sep_viii_dim
4491               )*\l__enumext_joined_item_aux_viii_int
4492         }
4493         \dim_set_eq:NN \itemwidth \l__enumext_joined_width_viii_dim
4494     }
4495     {
4496         \dim_set_eq:NN \l__enumext_joined_width_viii_dim \l__enumext_item_width_viii_dim
4497         \dim_set_eq:NN \itemwidth \l__enumext_item_width_viii_dim
4498     }
4499 }

```

(End of definition for `__enumext_starred_joined_item_vii:n` and `__enumext_starred_joined_item_viii:n`)

13.43.3 Functions for mini-env, mini-right and mini-right* keys

The implementation of the `mini-env` key support is almost identical to the one used in the `enumext` and `keyans` environments, the difference is that the `__enumext_mini_page` environment on the “right side” is executed “after” closing the environment, so it is necessary to make a global copy of the variable `__enumext_minipage_right_vii_dim` in the variable `\g__enumext_minipage_right_vii_dim`.

```

4500 \cs_new_protected:Nn \__enumext_start_mini_vii:
4501 {
4502   \dim_compare:nNnT { \__enumext_minipage_right_vii_dim } > { \c_zero_dim }
4503   {
4504     \dim_set:Nn \l__enumext_minipage_left_vii_dim
4505     {
4506       \linewidth
4507       - \__enumext_minipage_right_vii_dim
4508       - \__enumext_minipage_hsep_vii_dim
4509     }
4510     \bool_set_true:N \l__enumext_minipage_active_vii_bool
4511     \dim_gset_eq:NN
4512       \g__enumext_minipage_right_vii_dim
4513       \l__enumext_minipage_right_vii_dim
4514     \__enumext_mini_addvspace_vii:
4515     \nointerlineskip\noindent
4516     \__enumext_mini_page{ \l__enumext_minipage_left_vii_dim }
4517   }
4518 }

```

The function `__enumext_stop_mini_vii:` closes the `__enumext_mini_page` environment on the “left side”, applies `\hfill` and set the variable `\g__enumext_minipage_active_vii_bool` to “true” which will be used in the function `__enumext_after_env:nn` to execute the `minipage` on the “right side”. At this point we will execute the `__enumext_stop_list:` and `__enumext_stop_store_level_vii:` functions stopping the `list` environment and the level saving mechanism for storage in *sequence* of the `\anskey` command and `anskey*` environment. This function is passed to the `__enumext_after_list_vii:` function in the second part of the `enumext*` environment definition (§13.44).

```

4519 \cs_new_protected:Nn \__enumext_stop_mini_vii:
4520 {
4521   \bool_if:NTF \l__enumext_minipage_active_vii_bool
4522   {
4523     \__enumext_stop_list:
4524     \__enumext_stop_store_level_vii:
4525     \IfDocumentMetadataTF { \tag_resume:n {enumext*} } { }
4526     \end__enumext_mini_page
4527     \hfill
4528     \bool_gset_true:N \g__enumext_minipage_active_vii_bool
4529   }
4530   {
4531     \__enumext_stop_list:
4532     \__enumext_stop_store_level_vii:
4533   }
4534 }

```

(End of definition for `__enumext_start_mini_vii:` and `__enumext_stop_mini_vii:`.)

Finally we execute the `{\code}` passed to the `mini-right` or `mini-right*` keys stored in the variable `\g__enumext_miniright_code_vii_tl` in the `minipage` environment on the “right side”. For compatibility with the `caption` package and possibly other `{\code}` passed to this key, we will pass it to a box and then print it.

```

4535 \__enumext_after_env:nn {enumext*}
4536 {
4537   \bool_if:NT \g__enumext_minipage_active_vii_bool
4538   {
4539     \__enumext_minipage:w [ t ] { \g__enumext_minipage_right_vii_dim }
4540     \legacy_if_gset_false:n { @minipage }
4541     \skip_vertical:N \c_zero_skip
4542     \par\addvspace { \g__enumext_minipage_right_skip }
4543     \bool_if:NF \g__enumext_minipage_center_vii_bool
4544     {
4545       \tl_put_left:Nn \g__enumext_miniright_code_vii_tl
4546       {
4547         \centering
4548       }
4549     }
4550     \vbox_set_top:Nn \l__enumext_miniright_code_vii_box

```

```

4551         {
4552             \tl_use:N \g__enumext_miniright_code_vii_tl
4553         }
4554         \box_use_drop:N \l__enumext_miniright_code_vii_box
4555         \skip_vertical:N \c_zero_skip
4556         \__enumext_endminipage:
4557         \par\addvspace{ \g__enumext_minipage_after_skip }
4558     }
4559     \bool_gset_false:N \g__enumext_minipage_active_vii_bool
4560     \bool_gset_true:N \g__enumext_minipage_center_vii_bool
4561     \tl_gclear:N \g__enumext_miniright_code_vii_tl
4562     \dim_gzero:N \g__enumext_minipage_right_vii_dim
4563     \bool_gset_false:N \g__enumext_starred_bool
4564 }

```

```

\__enumext_start_mini_viii:
\__enumext_stop_mini_viii:

```

The implementation of the `mini-env`, `mini-right` and `mini-right*` keys is identical to the one used in the `enumext*` environment.

```

4565 \cs_new_protected:Nn \__enumext_start_mini_viii:
4566 {
4567     \dim_compare:nNt { \l__enumext_minipage_right_viii_dim } > { \c_zero_dim }
4568     {
4569         \dim_set:Nn \l__enumext_minipage_left_viii_dim
4570         {
4571             \linewidth
4572             - \l__enumext_minipage_right_viii_dim
4573             - \l__enumext_minipage_hsep_viii_dim
4574         }
4575         \bool_set_true:N \l__enumext_minipage_active_viii_bool
4576         \dim_gset_eq:NN
4577             \g__enumext_minipage_right_viii_dim
4578             \l__enumext_minipage_right_viii_dim
4579         \__enumext_mini_addvspace_viii:
4580         \nointerlineskip\noindent
4581         \__enumext_mini_page{ \l__enumext_minipage_left_viii_dim }
4582     }
4583 }
4584 \cs_new_protected:Nn \__enumext_stop_mini_viii:
4585 {
4586     \bool_if:NTF \l__enumext_minipage_active_viii_bool
4587     {
4588         \__enumext_stop_list:
4589         \IfDocumentMetadataTF { \tag_resume:n {keyans*} } { } { }
4590         \end__enumext_mini_page
4591         \hfill
4592         \bool_gset_true:N \g__enumext_minipage_active_viii_bool
4593     }
4594     {
4595         \__enumext_stop_list:
4596     }
4597 }
4598 \__enumext_after_env:nn {keyans*}
4599 {
4600     \bool_if:NT \g__enumext_minipage_active_viii_bool
4601     {
4602         \__enumext_mini_page{ \g__enumext_minipage_right_viii_dim }
4603         \par\addvspace { \g__enumext_minipage_right_skip }
4604         \bool_if:NF \g__enumext_minipage_center_viii_bool
4605         {
4606             \tl_put_left:Nn \g__enumext_miniright_code_viii_tl
4607             {
4608                 \centering
4609             }
4610         }
4611         \vbox_set_top:Nn \l__enumext_miniright_code_viii_box
4612         {
4613             \tl_use:N \g__enumext_miniright_code_viii_tl
4614         }
4615         \box_use_drop:N \l__enumext_miniright_code_viii_box
4616         \end__enumext_mini_page
4617         \par\addvspace{ \g__enumext_minipage_after_skip }
4618     }

```

```

4619 \bool_gset_false:N \g__enumext_minipage_active_viii_bool
4620 \bool_gset_true:N \g__enumext_minipage_center_viii_bool
4621 \tl_gclear:N \g__enumext_miniright_code_viii_tl
4622 \dim_gzero:N \g__enumext_minipage_right_viii_dim
4623 }

```

(End of definition for __enumext_start_mini_viii: and __enumext_stop_mini_viii:.)

13.44 The environment enumext*

enumext* First we will generate the environment and we will give a temporary definition to __enumext_stop_item_tmp_vii: equal to __enumext_first_item_tmp_vii: and next to \item equal to __enumext_start_item_tmp_vii: which we will redefine later. Unlike the implementation used by the **shortlst** package, we will not set the values of \rightskip and \@rightskip equal to \@flushglue whose value is 0.0pt plus 1.0 fil, in the tests I have performed this fails in some circumstances and different results are obtained when using pdfTeX and LuaTeX.

```

4624 \NewDocumentEnvironment{enumext*}{o}{
4625 {
4626 \__enumext_safe_exec_vii:
4627 \__enumext_parse_keys_vii:n {#1}
4628 \__enumext_before_list_vii:
4629 \__enumext_start_store_level_vii:
4630 \__enumext_start_list:nn { }
4631 {
4632 \__enumext_list_arg_two_vii:
4633 \__enumext_before_keys_exec_vii:
4634 }
4635 \IfDocumentMetadataTF { \tag_suspend:n {enumext*} } { }
4636 \__enumext_starred_columns_set_vii:
4637 \item[] \scan_stop:
4638 \cs_set_eq:NN \__enumext_stop_item_tmp_vii: \__enumext_first_item_tmp_vii:
4639 \cs_set_eq:NN \item \__enumext_start_item_tmp_vii:
4640 \ignorespaces
4641 }
4642 {
4643 \IfDocumentMetadataTF { \tag_struct_end:n {tag=text-unit} } { }
4644 \__enumext_stop_item_tmp_vii:
4645 \__enumext_remove_extra_parsep_vii:
4646 \__enumext_after_list_vii:
4647 }

```

(End of definition for enumext*. This function is documented on page 5.)

__enumext_safe_exec_vii:

We will first call the function __enumext_is_not_nested: which sets \g__enumext_starred_bool to true if we are NOT nested within **enumext**, then call the function __enumext_internal_mini_page: to create the environment **__enumext_mini_page**, we will increment \l__enumext_level_h_int to restrict nesting of the environment, set \l__enumext_starred_bool to true and finally call the function __enumext_is_on_first_level: which sets \l__enumext_starred_first_bool to true if we are not nested, allowing the “storage system” to be used.

```

4648 \cs_new_protected:Nn \__enumext_safe_exec_vii:
4649 {
4650 \__enumext_is_not_nested:
4651 \__enumext_internal_mini_page:
4652 \int_incr:N \l__enumext_level_h_int
4653 \int_compare:nNtT { \l__enumext_level_h_int } > { 1 }
4654 {
4655 \msg_error:nn { enumext } { nested }
4656 }
4657 \int_compare:nNtT { \l__enumext_keyans_level_h_int } = { 1 }
4658 {
4659 \msg_error:nnn { enumext } { nested-horizontal } { keyans* }
4660 }
4661 \bool_set_true:N \l__enumext_starred_bool
4662 \bool_set_false:N \l__enumext_standar_bool
4663 \__enumext_is_on_first_level:
4664 }

```

(End of definition for __enumext_safe_exec_vii:.)

`__enumext_parse_keys_vii:n`

First we will clear the variable `__enumext_series_str` used by the key `series`, process the environment `[⟨key = val⟩]` and execute the function `__enumext_parse_series:n` and used by the key `series`, then we execute the function `__enumext_store_active_keys_vii:n` and reprocess the `⟨keys⟩` to pass them to the storage `sequence` if the key `save-key` is not active.

```

4665 \cs_new_protected:Npn \__enumext_parse_keys_vii:n #1
4666 {
4667   \tl_if_novalue:nF {#1}
4668   {
4669     \str_clear:N \__enumext_series_str
4670     \keys_set:nn { enumext / enumext* } {#1}
4671     \__enumext_parse_series:n {#1}
4672     \__enumext_store_active_keys_vii:n {#1}
4673   }
4674 }

```

(End of definition for `__enumext_parse_keys_vii:n`.)

`__enumext_before_list_vii:`

The function `__enumext_before_list_vii:` first calls the function `__enumext_vspace_above_vii:` used by the keys `above` and `above*`, then calls the function `__enumext_check_ans_active:` for the check answer mechanism and finally calls the functions `__enumext_before_args_exec:` and `__enumext_start_mini_vii:` used by the keys `before*`, `mini-env`, `mini-right` and `mini-right*`.

```

4675 \cs_new_protected:Nn \__enumext_before_list_vii:
4676 {
4677   \__enumext_vspace_above_vii:
4678   \__enumext_check_ans_active:
4679   \__enumext_before_args_exec_vii:
4680   \__enumext_start_mini_vii:
4681 }

```

(End of definition for `__enumext_before_list_vii:`.)

`__enumext_after_list_vii:`

The function `__enumext_after_list_vii:` first calls the function `__enumext_stop_mini_vii:` which internally calls `__enumext_stop_list:` and `__enumext_stop_store_level_vii:` (§13.43.3) used by the keys `mini-env`, `mini-right` and `mini-right*`, then to the functions `__enumext_after_stop_list_vii:` used by the key `after`, `__enumext_check_ans_key_hook:` used by the key `check-ans`, `__enumext_vspace_below_vii:` used by the keys `below` and `below*`. Finally set `__enumext_starred_bool` to false and call the `__enumext_resume_save_counter:` function used by the `series`, `resume` and `resume*` keys.

```

4682 \cs_new_protected:Nn \__enumext_after_list_vii:
4683 {
4684   \__enumext_stop_mini_vii:
4685   \__enumext_after_stop_list_vii:
4686   \__enumext_check_ans_key_hook:
4687   \__enumext_vspace_below_vii:
4688   \bool_set_false:N \__enumext_starred_bool
4689   \__enumext_resume_save_counter:
4690 }

```

(End of definition for `__enumext_after_list_vii:`.)

`__enumext_start_store_level_vii:`

`__enumext_stop_store_level_vii:`

The `__enumext_start_store_level_vii:` and `__enumext_stop_store_level_vii:` functions activate the “storing structure” mechanism in *sequence* for `\anskey` command and `anskey*` environment if `enumext*` are nested in `enumext`.

```

4691 \cs_new_protected:Nn \__enumext_start_store_level_vii:
4692 {
4693   \bool_if:NT \__enumext_store_active_bool
4694   {
4695     \int_compare:nNt { \__enumext_level_int } > { 0 }
4696     {
4697       \__enumext_store_level_open_vii:
4698     }
4699   }
4700 }
4701 \cs_new_protected:Nn \__enumext_stop_store_level_vii:
4702 {
4703   \bool_if:NT \__enumext_store_active_bool
4704   {
4705     \int_compare:nNt { \__enumext_level_int } > { 0 }
4706     {
4707       \__enumext_store_level_close_vii:

```

```

4708     }
4709 }
4710 }

```

(End of definition for `__enumext_start_store_level_vii:` and `__enumext_stop_store_level_vii:`)

13.44.1 The command `\item` in `enumext*`

`__enumext_first_item_tmp_vii:`

The `__enumext_first_item_tmp_vii:` function will remove horizontal space equal to `\labelwidth` plus `\labelsep` to the left of the “*first*” `\item` in the environment at the point of execution of this function, where it is equal to the `__enumext_stop_item_tmp_vii:` function inside the environment body definition.

```

4711 \cs_new_protected_nopar:Nn \__enumext_first_item_tmp_vii:
4712 {
4713     \skip_horizontal:n
4714     {
4715         -\__enumext_labelwidth_vii_dim - \__enumext_labelsep_vii_dim
4716     }
4717     \ignorespaces
4718 }

```

(End of definition for `__enumext_first_item_tmp_vii:`)

`__enumext_start_item_tmp_vii:`

`__enumext_item_peek_args_vii:`

`__enumext_joined_item_vii:w`

`__enumext_standar_item_vii:w`

`__enumext_starred_item_vii:w`

First we will call the function `__enumext_stop_item_tmp_vii:` that we will redefine later, we will increment the value of `__enumext_item_column_pos_vii_int` that will count the item’s by rows and the value of `\g__enumext_item_count_all_vii_int` that will count the total of item’s in the environment. After that we will call the function `__enumext_item_peek_args_vii:` that will handle the arguments passed to `\item`.

```

4719 \cs_new_protected_nopar:Nn \__enumext_start_item_tmp_vii:
4720 {
4721     \__enumext_stop_item_tmp_vii:
4722     \int_incr:N \__enumext_item_column_pos_vii_int
4723     \int_gincr:N \g__enumext_item_count_all_vii_int
4724     \__enumext_item_peek_args_vii:
4725 }

```

The function `__enumext_item_peek_args_vii:` will handle the `\item(<number>)`. Look for the argument “(”, if it is present we will call the function `__enumext_joined_item_vii:w (<number>)`, which is in charge of joining the item’s in the same row, in case they are not present we will set the default value (1).

```

4726 \cs_new_protected:Nn \__enumext_item_peek_args_vii:
4727 {
4728     \peek_meaning:NTF (
4729     { \__enumext_joined_item_vii:w }
4730     { \__enumext_joined_item_vii:w (1) }
4731 }

```

The function `__enumext_joined_item_vii:w` will first call the function `__enumext_starred_joined_item_vii:n` in charge of setting the *width* of the box that will store the content passed to `\item`. Then we will look for the argument “*”, if it is present we will call the function `__enumext_starred_item_vii:w` otherwise we will call the function `__enumext_standar_item_vii:w`.

```

4732 \cs_new_protected:Npn \__enumext_joined_item_vii:w (#1)
4733 {
4734     \__enumext_starred_joined_item_vii:n {#1}
4735     \peek_meaning_remove:NTF *
4736     { \__enumext_starred_item_vii:w }
4737     { \__enumext_standar_item_vii:w }
4738 }

```

The function `__enumext_standar_item_vii:w` will first look for the argument “[”, if present it will set the state of the variable `__enumext_wrap_label_opt_vii_bool` equal to the state of the variable `\l__enumext_wrap_label_opt_vii_bool` handled by the key `wrap-label*` and finally execute the *non-enumerated* version `\item[<custom>]` by means of the function `__enumext_start_item_vii:w`, otherwise we will set the value of the variable `\l__enumext_wrap_label_vii_bool` handled by the `wrap-label` key to true and set the switch `\if@noitemarg` to true to execute the enumerated version of `\item` by means of the function `__enumext_start_item_vii:w [__enumext_label_vii_tl]`.

```

4739 \cs_new_protected:Npn \__enumext_standar_item_vii:w
4740 {
4741     \bool_set_false:N \l__enumext_item_starred_vii_bool
4742     \peek_meaning:NTF [
4743     {
4744         \bool_set_eq:NN \l__enumext_wrap_label_vii_bool \l__enumext_wrap_label_opt_vii_bool
4745         \__enumext_start_item_vii:w
4746     }

```

```

4747     {
4748       \bool_set_true:N \l__enumext_wrap_label_vii_bool
4749       \legacy_if_set_true:n { @noitemarg }
4750       \l__enumext_start_item_vii:w [ \l__enumext_label_vii_tl ] \ignorespaces
4751     }
4752   }

```

The function `\l__enumext_starred_item_vii:w` together with the specified auxiliary functions `aux_i:w`, `aux_ii:w`, and `aux_iii:w` execute `\item*`, `\item*[\langle symbol \rangle]` and `\item*[\langle symbol \rangle][\langle offset \rangle]`.

```

4753 \cs_new_protected:Npn \l__enumext_starred_item_vii:w
4754 {
4755   \bool_set_true:N \l__enumext_item_starred_vii_bool
4756   \bool_set_true:N \l__enumext_wrap_label_vii_bool
4757   \peek_meaning:NTF [
4758     { \l__enumext_starred_item_vii_aux_i:w }
4759     { \l__enumext_starred_item_vii_aux_ii:w }
4760   }
4761   \cs_new_protected:Npn \l__enumext_starred_item_vii_aux_i:w [#1]
4762   {
4763     \tl_gset:Nn \g__enumext_item_symbol_aux_vii_tl {#1}
4764     \l__enumext_starred_item_vii_aux_ii:w
4765   }
4766   \cs_new_protected:Npn \l__enumext_starred_item_vii_aux_ii:w
4767   {
4768     \peek_meaning:NTF [
4769       { \l__enumext_starred_item_vii_aux_iii:w }
4770       {
4771         \dim_set_eq:NN \l__enumext_item_symbol_sep_vii_dim \l__enumext_labelsep_vii_dim
4772         \legacy_if_set_true:n { @noitemarg }
4773         \l__enumext_start_item_vii:w [ \l__enumext_label_vii_tl ] \ignorespaces
4774       }
4775     }
4776   \cs_new_protected:Npn \l__enumext_starred_item_vii_aux_iii:w [#1]
4777   {
4778     \dim_set:Nn \l__enumext_item_symbol_sep_vii_dim {#1}
4779     \legacy_if_set_true:n { @noitemarg }
4780     \l__enumext_start_item_vii:w [ \l__enumext_label_vii_tl ] \ignorespaces
4781   }

```

(End of definition for `\l__enumext_start_item_tmp_vii:` and others.)

`\l__enumext_fake_make_label_vii:n`

The `\l__enumext_fake_make_label_vii:n` function will be in charge of handling our definition of `\item`. First we increment the counter `enumXvii` for the enumerated items and activate support for the *check answers* mechanism, followed by support for `\item*[\langle symbol \rangle][\langle offset \rangle]` if present, then the `wrap-label` and `wrap-label*` keys which we execute using `\makebox` whose width will be given by the `labelwidth` key and position by the `align` key, inside the argument of this we will execute the `font` key together with the function defined by the `wrap-label` or `wrap-label*` keys. Finally we execute the `labelsep` key applying a `\skip_horizontal:N` and `\ignorespaces`.

💡 For compatibility with *tagged* PDF and *hyperref* when an environment `enumext` is nested in `enumext*` and the key `save-ans` is not active need setting the `\if@hyper@item` switch to “true”. The explanation for this is given by the master Heiko Oberdiek on `\refstepcounter{enumi}` twice (or more) creates destination with the same identifier. This patch is only needed if you are running `pdflatex` and not if you are running `lua1latex`

```

4782 \cs_new_protected_nopar:Npn \l__enumext_fake_make_label_vii:n #1
4783 {
4784   \legacy_if:nT { @noitemarg }
4785   {
4786     \legacy_if_set_false:n { @noitemarg }
4787     \legacy_if:nT { @nmbrrlist }
4788     {
4789       \IfDocumentMetadataTF
4790       {
4791         \bool_if:NT \l__enumext_hyperref_bool
4792         {
4793           \legacy_if_set_true:n { @hyper@item }
4794         }
4795       } { }
4796       \refstepcounter{enumXvii}
4797       \bool_if:NT \l__enumext_check_answers_bool
4798       {
4799         \int_gincr:N \g__enumext_item_number_int

```

```

4800         \bool_set_true:N \l__enumext_item_number_bool
4801     }
4802 }
4803 }
4804 \bool_if:NT \l__enumext_item_starred_vii_bool
4805 {
4806     \tl_if_blank:VT \g__enumext_item_symbol_aux_vii_tl
4807     {
4808         \tl_gset_eq:NN
4809         \g__enumext_item_symbol_aux_vii_tl \l__enumext_item_symbol_vii_tl
4810     }
4811     \mode_leave_vertical:
4812     \skip_horizontal:n { -\l__enumext_item_symbol_sep_vii_dim }
4813     \hbox_overlap_left:n { \g__enumext_item_symbol_aux_vii_tl }
4814     \skip_horizontal:N \l__enumext_item_symbol_sep_vii_dim
4815     \tl_gclear:N \g__enumext_item_symbol_aux_vii_tl
4816 }
4817 \makebox[ \l__enumext_labelwidth_vii_dim ][ \l__enumext_align_label_vii_str ]
4818 {
4819     \tl_use:N \l__enumext_label_font_style_vii_tl
4820     \bool_if:NTF \l__enumext_wrap_label_vii_bool
4821     {
4822         \__enumext_wrapper_label_vii:n {#1}
4823     }
4824     { #1 }
4825 }
4826 \skip_horizontal:N \l__enumext_labelsep_vii_dim \ignorespaces
4827 }

```

(End of definition for __enumext_fake_make_label_vii:n.)

13.44.2 Real definition of \item in enumext*

The functions __enumext_start_item_vii:w and __enumext_stop_item_vii: executing the true definition of \item inside the enumext* environment, unlike the implementation in shortlst we will NOT use an extra group and the plain form of the lrbox environment.

```

\__enumext_start_item_vii:w
\__enumext_stop_item_vii:

```

The first thing we will do is set the value of __enumext_stop_item_tmp_vii: equal to __enumext_stop_item_vii: which we will define later, after that we will start capturing \item and “item content” in a horizontal box where the width will be \itemwidth plus \labelwidth plus \labelsep.

```

4828 \cs_new_protected_nopar:Npn \__enumext_start_item_vii:w [#1]
4829 {
4830     \cs_set_eq:NN \__enumext_stop_item_tmp_vii: \__enumext_stop_item_vii:
4831     \hbox_set_to_wd:Nnw \l__enumext_item_text_vii_box
4832     {
4833         \l__enumext_joined_width_vii_dim
4834         + \l__enumext_labelwidth_vii_dim
4835         + \l__enumext_labelsep_vii_dim
4836     }

```

Redefine the \footnote command.

```

4837 \__enumext_renew_footnote_starred:

```

Now we insert our sockets for tagging PDF support and run \item.

```

4838 \__enumext_start_list_tag:n {enumext*}
4839 \__enumext_fake_make_label_vii:n {#1}
4840 \__enumext_stop_start_list_tag:

```

Finally we open the minipage environment, capture the “item content”, make \parindent take the value of the key listparindent and \parskip take the value of the key parsep, then execute the keys itemindent and first.

- Here the use of \unskip and \skip_horizontal:n with the value of listparindent is necessary, otherwise an unwanted space is created when using \item[⟨opt⟩] and the value passed to the key itemindent is incremented.

```

4841 \__enumext_minipage:w [ t ]{ \l__enumext_joined_width_vii_dim }
4842 \dim_set_eq:NN \parindent \l__enumext_listparindent_vii_dim
4843 \skip_set_eq:NN \parskip \l__enumext_parsep_vii_skip
4844 \__enumext_unskip_unkern:
4845 \__enumext_unskip_unkern:
4846 \skip_horizontal:n { -\l__enumext_listparindent_vii_dim } \ignorespaces
4847 \tl_use:N \l__enumext_fake_item_indent_vii_tl
4848 \tl_use:N \l__enumext_after_list_args_vii_tl
4849 }

```

The `__enumext_stop_item_vii:` function will finish the fetching `\item` and “*item content*” by closing the `minipage` environment, the *sockets for tagging* PDF and the *horizontal box*.

```
4850 \cs_new_protected_nopar:Nn \__enumext_stop_item_vii:
4851 {
4852     \__enumext_endminipage:
4853     \__enumext_stop_list_tag:n {enumext*}
4854     \hbox_set_end:
```

Here we will reduce the *warnings* a bit by setting the value of `\hbadness` to `10000`, print `\item` and “*item content*” from the *horizontal box*.

```
4855     \int_set:Nn \hbadness { 10000 }
4856     \box_use_drop:N \l__enumext_item_text_vii_box
```

Finally apply the *vertical space* between rows set by `itemsep` key passed to `\parsep` using `\par\noindent` and *horizontal space* between columns set by `columns-sep` key using `\skip_horizontal:N`.

```
4857     \int_compare:nNnTF
4858     { \l__enumext_item_column_pos_vii_int } = { \l__enumext_columns_vii_int }
4859     {
4860         \par\noindent
4861         \int_zero:N \l__enumext_item_column_pos_vii_int
4862     }
4863     {
4864         \skip_horizontal:N \l__enumext_columns_sep_vii_dim
4865     }
4866 }
```

(End of definition for `__enumext_start_item_vii:w` and `__enumext_stop_item_vii:.`)

`__enumext_remove_extra_parsep_vii:`

Remove the extra *vertical space* equal to `\parsep=itemsep` when the total number of `\item` is divisible by the number of `\item` in the last row of the environment. Here the use of `\unskip` or `\removeatlastskip` fails and does not obtain the expected result, using `\vspace` is the option and in this case, we can use a simplified version since we are always in *(vertical mode)*.

```
4867 \cs_new_protected:Nn \__enumext_remove_extra_parsep_vii:
4868 {
4869     \int_compare:nNnT
4870     {
4871         \int_mod:nn
4872         { \g__enumext_item_count_all_vii_int } { \l__enumext_columns_vii_int }
4873     }
4874     =
4875     { 0 }
4876     {
4877         \para_end:
4878         \skip_vertical:n { -\l__enumext_itemsep_vii_skip }
4879         \skip_vertical:N \c_zero_skip
4880         \int_gzero:N \g__enumext_item_count_all_vii_int
4881     }
4882 }
```

(End of definition for `__enumext_remove_extra_parsep_vii:.`)

As we don’t want our check to be executed `check-ans` by levels but on the complete list, we will take it out of the `enumext*` environment using the “*hook*” function `__enumext_after_env:nn`.

```
4883 \__enumext_after_env:nn {enumext*}
4884 {
4885     \__enumext_execute_after_env:
4886 }
```

13.45 The environment `keyans*`

keyans*

The implementation of `keyans*` environment is the similar as that used by the `enumext*` environment except for the `__enumext_check_starred_cmd:n` function added in the second part.

```
4887 \NewDocumentEnvironment{keyans*}{ o }
4888 {
4889     \__enumext_safe_exec_viii:
4890     \__enumext_parse_keys_viii:n {#1}
4891     \__enumext_before_list_viii:
4892     \__enumext_start_list:nn { }
4893     {
4894         \__enumext_list_arg_two_viii:
4895         \__enumext_before_keys_exec_viii:
4896     }
```

```

4897 \IfDocumentMetadataTF { \tag_suspend:n {keyans*} } { }
4898 \__enumext_starred_columns_set_viii:
4899 \item[] \scan_stop:
4900 \cs_set_eq:NN \__enumext_stop_item_tmp_viii: \__enumext_first_item_tmp_viii:
4901 \cs_set_eq:NN \item \__enumext_start_item_tmp_viii:
4902 \ignorespaces
4903 }
4904 {
4905 \IfDocumentMetadataTF { \tag_struct_end:n {tag=text-unit} } { }
4906 \__enumext_stop_item_tmp_viii:
4907 \__enumext_remove_extra_parsep_viii:
4908 \__enumext_check_starred_cmd:n { item }
4909 \__enumext_after_list_viii:
4910 }

```

(End of definition for `keyans*`. This function is documented on page 15.)

`__enumext_safe_exec_viii:` The `__enumext_safe_exec_viii:` function will first check if the `save-ans` key is active and only when this is true the environment will be available, it will increment the value of `__enumext_keyans_level_h_int` and return an error message when we are nesting the environment, then it will call the `__enumext_keyans_name_and_start:` function in charge of saving the name of the environment and the line it is running on, then it will check if we are trying to nest `keyans*` in `enumext*` returning an error and we will set `__enumext_starred_bool` to true, finally we will check if we are within the appropriate level within the `enumext` environment.

```

4911 \cs_new_protected:Nn \__enumext_safe_exec_viii:
4912 {
4913   \bool_if:NF \__enumext_store_active_bool
4914   {
4915     \msg_error:nnnn { enumext } { wrong-place } { keyans* } { save-ans }
4916   }
4917   \int_incr:N \__enumext_keyans_level_h_int
4918   \int_compare:nNnT { \__enumext_keyans_level_h_int } > { 1 }
4919   {
4920     \msg_error:nn { enumext } { nested }
4921   }
4922   \__enumext_keyans_name_and_start:
4923   \bool_if:NT \__enumext_starred_bool
4924   {
4925     \msg_error:nnn { enumext } { nested-horizontal } { enumext* }
4926   }
4927   \bool_set_true:N \__enumext_starred_bool
4928   % Set false for interfering with enumext nested in keyans* (yes, its possible and crayze)
4929   \bool_set_false:N \__enumext_store_active_bool
4930   \int_compare:nNnT { \__enumext_level_int } > { 1 }
4931   {
4932     \msg_error:nn { enumext } { keyans-wrong-level }
4933   }
4934 }

```

(End of definition for `__enumext_safe_exec_viii:`.)

`__enumext_parse_keys_viii:n` Parse [`<key = val>`] for `keyans*`.

```

4935 \cs_new_protected:Npn \__enumext_parse_keys_viii:n #1
4936 {
4937   \tl_if_novalue:nF {#1}
4938   {
4939     \keys_set:nn { enumext / keyans* } {#1}
4940   }
4941 }

```

(End of definition for `__enumext_parse_keys_viii:n`.)

`__enumext_before_list_viii:` The function `__enumext_before_list_viii:` will add the vertical spacing on the environment if the `above` key is active next to the `{<code>}` defined by the `before*` key if it is active, the call the function `__enumext_start_mini_viii:` handle by `mini-env`.

```

4942 \cs_new_protected:Nn \__enumext_before_list_viii:
4943 {
4944   \__enumext_vspace_above_viii:
4945   \__enumext_before_args_exec_viii:
4946   \__enumext_start_mini_viii:
4947 }

```

(End of definition for `__enumext_before_list_viii:`)

`__enumext_after_list_viii:` The function `__enumext_after_list_viii:` first call the function `__enumext_stop_mini_viii:`, then apply the `{\code}` handled by the `after` key together with the *vertical space* handled by the `below` key if they are present.

```
4948 \cs_new_protected:Nn \__enumext_after_list_viii:
4949 {
4950     \__enumext_stop_mini_viii:
4951     \__enumext_after_stop_list_viii:
4952     \__enumext_vspace_below_viii:
4953 }
```

(End of definition for `__enumext_after_list_viii:`)

13.45.1 The command `\item` in `keyans*`

The idea here is to make the `\item` command behave in the same way as in the `keyans` environment with the difference of the *optional argument* (`\number`) which works in the same way as in the `enumext*` environment. In simple terms we want to store the `\label` next to the `[\content]` if it is present in the *sequence* and *prop list* defined by `save-ans` key for `\item*`, `\item*[\content]`, `\item(\number)*` and `\item(\number)*[\content]` commands.

`__enumext_first_item_tmp_viii:` The `__enumext_first_item_tmp_viii:` function will remove horizontal space equal to `\labelwidth` plus `\labelsep` to the left of the “first” `\item` in the environment at the point of execution of this function, where it is equal to the `__enumext_stop_item_tmp_viii:` function inside the environment body definition.

```
4954 \cs_new_protected_nopar:Nn \__enumext_first_item_tmp_viii:
4955 {
4956     \skip_horizontal:n
4957     {
4958         -\__enumext_labelwidth_viii_dim - \__enumext_labelsep_viii_dim
4959     }
4960     \ignorespaces
4961 }
```

(End of definition for `__enumext_first_item_tmp_viii:`)

`__enumext_start_item_tmp_viii:` First we will call the function `__enumext_stop_item_tmp_viii:` that we will redefine later, we will
`__enumext_item_peek_args_viii:` increment the value of `__enumext_item_column_pos_viii_int` that will count the item’s by rows and
`__enumext_joined_item_viii:w` the value of `\g__enumext_item_count_all_viii_int` that will count the total of item’s in the environment.
`__enumext_standar_item_viii:w` After that we will call the function `__enumext_item_peek_args_viii:` that will handle the arguments passed to `\item`.

```
4962 \cs_new_protected_nopar:Nn \__enumext_start_item_tmp_viii:
4963 {
4964     \__enumext_stop_item_tmp_viii:
4965     \int_incr:N \__enumext_item_column_pos_viii_int
4966     \int_gincr:N \g__enumext_item_count_all_viii_int
4967     \__enumext_item_peek_args_viii:
4968 }
```

The function `__enumext_item_peek_args_viii:` will handle the `\item(\number)`. Look for the argument “(”, if it is present we will call the function `__enumext_joined_item_viii:w(\number)`, which is in charge of joining the item’s in the same row, in case they are not present we will set the default value (1).

```
4969 \cs_new_protected:Nn \__enumext_item_peek_args_viii:
4970 {
4971     \peek_meaning:NTF (
4972         { \__enumext_joined_item_viii:w }
4973         { \__enumext_joined_item_viii:w (1) }
4974     }
```

The function `__enumext_joined_item_viii:w` will first call the function `__enumext_starred_joined_item_viii:n` in charge of setting the *width* of the box that will store the content passed to `\item`. Then we will look for the argument “*”, if it is present we will call the function `__enumext_starred_item_viii:w` otherwise we will call the function `__enumext_standar_item_viii:w`.

```
4975 \cs_new_protected:Npn \__enumext_joined_item_viii:w (#1)
4976 {
4977     \__enumext_starred_joined_item_viii:n {#1}
4978     \peek_meaning_remove:NTF *
4979     { \__enumext_starred_item_viii:w }
4980     { \__enumext_standar_item_viii:w }
4981 }
```


The function `__enumext_standar_item_viii:w` will first look for the argument “[”, if present it will set the state of the variable `\l__enumext_wrap_label_opt_viii_bool` equal to the state of the variable `\l__enumext_wrap_label_opt_viii_bool` handled by the key `wrap-label*` and finally execute the *non-enumerated* version `\item[⟨custom⟩]` by means of the function `__enumext_start_item_viii:w`, otherwise we will set the value of the variable `\l__enumext_wrap_label_viii_bool` handled by the `wrap-label` key to true and set the switch `\if@noitemarg` to true to execute the enumerated version of `\item` by means of the function `__enumext_start_item_viii:w [\l__enumext_label_viii_tl]`.

```

4982 \cs_new_protected:Npn \__enumext_standar_item_viii:w
4983 {
4984   \bool_set_false:N \l__enumext_item_starred_viii_bool
4985   \bool_set_false:N \l__enumext_item_wrap_key_bool
4986   \peek_meaning:NTF [
4987     {
4988       \bool_set_eq:NN \l__enumext_wrap_label_viii_bool \l__enumext_wrap_label_opt_viii_bool
4989       \__enumext_start_item_viii:w
4990     }
4991     {
4992       \bool_set_true:N \l__enumext_wrap_label_viii_bool
4993       \legacy_if_set_true:n { @noitemarg }
4994       \__enumext_start_item_viii:w [ \l__enumext_label_viii_tl ] \ignorespaces
4995     }
4996   }

```

(End of definition for `__enumext_start_item_tmp_viii:` and others.)

```

\__enumext_starred_item_viii:w
\__enumext_starred_item_viii_aux_i:w
\__enumext_starred_item_viii_aux_ii:w
\__enumext_keyans_starred_item_star:

```

The function `__enumext_starred_item_viii:w` together with the specified auxiliary functions `aux_i:w` and `aux_ii:w` execute `\item*` and `\item*[⟨content⟩]`.

```

4997 \cs_new_protected:Npn \__enumext_starred_item_viii:w
4998 {
4999   \bool_set_true:N \l__enumext_item_starred_viii_bool
5000   \bool_set_true:N \l__enumext_item_wrap_key_bool
5001   \bool_set_true:N \l__enumext_wrap_label_viii_bool
5002   \peek_meaning:NTF [
5003     { \__enumext_starred_item_viii_aux_i:w }
5004     { \__enumext_starred_item_viii_aux_ii:w }
5005   }

```

The function `__enumext_starred_item_viii_aux_i:w` will save the *optional argument* to `\item*` in `\l__enumext_store_current_opt_arg_tl` and will save this argument along with the spacing set by the key `save-sep` in variable `\l__enumext_store_current_label_tl` if present, then call the function `__enumext_starred_item_viii_aux_ii:w`.

```

5006 \cs_new_protected:Npn \__enumext_starred_item_viii_aux_i:w [#1]
5007 {
5008   \tl_clear:N \l__enumext_store_current_label_tl
5009   \tl_if_novalue:nF { #1 }
5010   {
5011     \tl_if_empty:NF \l__enumext_store_keyans_item_opt_sep_viii_tl
5012     {
5013       \tl_put_right:NV \l__enumext_store_current_label_tl \l__enumext_store_keyans_item_opt_sep_viii_tl
5014       \tl_put_right:Nn \l__enumext_store_current_label_tl { #1 }
5015     }
5016     \tl_set:Nn \l__enumext_store_current_opt_arg_tl { #1 }
5017   }
5018   \__enumext_starred_item_viii_aux_ii:w
5019 }
5020 \cs_new_protected:Npn \__enumext_starred_item_viii_aux_ii:w
5021 {
5022   \legacy_if_set_true:n { @noitemarg }
5023   \__enumext_start_item_viii:w [ \l__enumext_label_viii_tl ] \ignorespaces
5024 }

```

The function `__enumext_keyans_starred_item_star:` will be in charge of storing the current *⟨label⟩* for `\item*` followed by the *⟨content⟩* for `\item*[⟨content⟩]` if present in the *sequence* and *prop list* set by the `save-ans` key. In this same function the keys `show-ans`, `show-pos`, `mark-sep` and `save-ref` are implemented.

```

5025 \cs_new_protected:Nn \__enumext_keyans_starred_item_star:
5026 {
5027   \tl_put_left:Ne \l__enumext_store_current_label_tl { \l__enumext_label_viii_tl }
5028   \__enumext_store_addto_prop:V \l__enumext_store_current_label_tl
5029   \__enumext_keyans_store_ref:
5030   \tl_put_left:Nn \l__enumext_store_current_label_tl { \item }

```

```

5031 \__enumext_keyans_addto_seq_link:
5032 \int_gincr:N \__enumext_check_starred_cmd_int
5033 \dim_compare:nNt { \__enumext_mark_sym_sep_viii_dim } = { \c_zero_dim }
5034 {
5035     \dim_set:Nn \__enumext_mark_sym_sep_viii_dim { \__enumext_labelsep_viii_dim }
5036 }
5037 \bool_if:NT \__enumext_show_answer_bool
5038 {
5039     \tl_set_eq:NN \__enumext_mark_answer_sym_tl \__enumext_mark_answer_sym_viii_tl
5040     \str_set_eq:NN \__enumext_mark_position_str \__enumext_mark_position_viii_str
5041     \__enumext_print_keyans_box:NN
5042     \__enumext_labelwidth_viii_dim \__enumext_mark_sym_sep_viii_dim
5043 }
5044 \bool_if:NT \__enumext_show_position_bool
5045 {
5046     \tl_set:Nx \__enumext_mark_answer_sym_tl
5047     {
5048         \group_begin:
5049         \exp_not:N \normalfont
5050         \exp_not:N \footnotesize [ \int_eval:n
5051             {
5052                 \prop_count:c { g__enumext_ \__enumext_store_name_tl _prop }
5053             }
5054         ]
5055         \group_end:
5056     }
5057     \str_set_eq:NN \__enumext_mark_position_str \__enumext_mark_position_viii_str
5058     \__enumext_print_keyans_box:NN
5059     \__enumext_labelwidth_viii_dim \__enumext_mark_sym_sep_viii_dim
5060 }
5061 }

```

(End of definition for __enumext_starred_item_viii:w and others.)

```

\__enumext_keyans_wrapper_label_viii:n
\__enumext_fake_make_label_viii:n

```

The implementation at this is very similar to that of the `enumext*` environment.

```

5062 \cs_new_protected:Npn \__enumext_keyans_wrapper_label_viii:n #1
5063 {
5064     \bool_lazy_all:nT
5065     {
5066         { \bool_if_p:N \__enumext_wrap_label_viii_bool }
5067         { \bool_if_p:N \__enumext_show_answer_bool }
5068         { \bool_if_p:N \__enumext_item_wrap_key_bool }
5069         { \cs_if_exist_p:N \__enumext_keyans_wrapper_item_viii:n }
5070     }
5071     {
5072         \cs_set_eq:NN
5073         \__enumext_wrapper_label_viii:n \__enumext_keyans_wrapper_item_viii:n
5074     }
5075     \bool_if:NTF \__enumext_wrap_label_viii_bool
5076     {
5077         \__enumext_wrapper_label_viii:n {#1}
5078     }
5079     { #1 }
5080 }
5081 \cs_new_protected_nopar:Npn \__enumext_fake_make_label_viii:n #1
5082 {
5083     \legacy_if:nT { @noitemarg }
5084     {
5085         \legacy_if_set_false:n { @noitemarg }
5086         \legacy_if:nT { @nmbrrlist }
5087         {
5088             \refstepcounter{enumXviii}
5089         }
5090     }
5091     \bool_if:NT \__enumext_item_starred_viii_bool
5092     {
5093         \__enumext_keyans_starred_item_star:
5094     }
5095     \makebox[ \__enumext_labelwidth_viii_dim ][ \__enumext_align_label_viii_str ]
5096     {
5097         \tl_use:N \__enumext_label_font_style_viii_tl

```

```

5098     \__enumext_keyans_wrapper_label_viii:n {#1}
5099   }
5100   \skip_horizontal:N \l__enumext_labelsep_viii_dim \ignorespaces
5101 }

```

(End of definition for __enumext_keyans_wrapper_label_viii:n and __enumext_fake_make_label_viii:n.)

13.45.2 Real definition of \item in keyans*

The implementation at this is very similar to that of the `enumext*` environment.

```

\__enumext_start_item_viii:w
\__enumext_stop_item_viii:
5102 \cs_new_protected_nopar:Npn \__enumext_start_item_viii:w [#1]
5103 {
5104   \cs_set_eq:NN \__enumext_stop_item_tmp_viii: \__enumext_stop_item_viii:
5105   \hbox_set_to_wd:Nnw \l__enumext_item_text_viii_box
5106   {
5107     \l__enumext_joined_width_viii_dim
5108     + \l__enumext_labelwidth_viii_dim
5109     + \l__enumext_labelsep_viii_dim
5110   }
5111   \__enumext_renew_footnote_starred:
5112   \__enumext_start_list_tag:n {keyans*}
5113   \__enumext_fake_make_label_viii:n {#1}
5114   \__enumext_stop_start_list_tag:
5115   \__enumext_minipage:w [ t ]{ \l__enumext_joined_width_viii_dim }
5116   \dim_set_eq:NN \parindent \l__enumext_listparindent_viii_dim
5117   \skip_set_eq:NN \parskip \l__enumext_parsep_viii_skip
5118   \__enumext_unskip_unkern:
5119   \__enumext_unskip_unkern:
5120   \skip_horizontal:n { -\l__enumext_listparindent_viii_dim } \ignorespaces
5121   \tl_use:N \l__enumext_fake_item_indent_viii_tl
5122   \bool_if:NT \l__enumext_item_starred_viii_bool
5123   {
5124     \__enumext_keyans_show_item_opt_viii:
5125   }
5126   \tl_use:N \l__enumext_after_list_args_viii_tl
5127 }
5128 \cs_new_protected_nopar:Nn \__enumext_stop_item_viii:
5129 {
5130   \__enumext_endminipage:
5131   \__enumext_stop_list_tag:n {keyans*}
5132   \hbox_set_end:
5133   \int_set:Nn \hbadness { 10000 }
5134   \box_use_drop:N \l__enumext_item_text_viii_box
5135   \int_compare:nNnTF
5136   { \l__enumext_item_column_pos_viii_int } = { \l__enumext_columns_viii_int }
5137   {
5138     \par\noindent
5139     \int_zero:N \l__enumext_item_column_pos_viii_int
5140   }
5141   {
5142     \skip_horizontal:N \l__enumext_columns_sep_viii_dim
5143   }
5144 }

```

(End of definition for __enumext_start_item_viii:w and __enumext_stop_item_viii:.)

__enumext_remove_extra_parsep_viii: The implementation at this is very similar to that of the `enumext*` environment.

```

5145 \cs_new_protected:Nn \__enumext_remove_extra_parsep_viii:
5146 {
5147   \int_compare:nNnT
5148   {
5149     \int_mod:nn
5150     { \g__enumext_item_count_all_viii_int }
5151     { \l__enumext_columns_viii_int }
5152   }
5153   =
5154   { 0 }
5155   {
5156     \para_end:
5157     \skip_vertical:n { -\l__enumext_itemsep_viii_skip }
5158     \skip_vertical:N \c_zero_skip
5159     \int_gzero:N \g__enumext_item_count_all_viii_int

```

```

5160     }
5161 }

```

(End of definition for `__enumext_remove_extra_parsep_viii:`.)

13.46 The command `\getkeyans`

`\getkeyans` The `\getkeyans` command takes a *mandatory argument* of the form $\langle \textit{store name} : \textit{position} \rangle$. Retrieve a “single content” stored by `\anskey`, `\anspic*` and `\item*` and `anskey*` from *prop list* defined by `save-ans key`.

```

5162 \NewDocumentCommand \getkeyans { m }
5163 {
5164   \exp_args:Ne \__enumext_getkeyans_aux:n
5165   { \tl_to_str:e { \text_expand:n {#1} } }
5166 }

```

The internal function `__enumext_getkeyans_aux:n` is in charge of *splitting* the *mandatory argument* using “.”. If “.” is omitted it will return an error.

```

5167 \cs_new_protected:Npn \__enumext_getkeyans_aux:n #1
5168 {
5169   \str_if_in:nnTF {#1} { : }
5170   {
5171     \use:e
5172     {
5173       \cs_set:Npn \exp_not:N \__enumext_tmp:w ##1 \c_colon_str ##2 \scan_stop:
5174       { {##1} {##2} }
5175     }
5176     \exp_after:wN \__enumext_getkeyans:nn \__enumext_tmp:w #1 \scan_stop:
5177   }
5178   { \msg_error:nnn { enumext } { missing-colon } {#1} }
5179 }

```

The internal function `__enumext_getkeyans:nn` will check for the existence of the *prop list*, if it does not exist it will return an error message, then it will fetch the content specified by the *second argument* from *prop list*.

```

5180 \cs_new_protected:Npn \__enumext_getkeyans:nn #1 #2
5181 {
5182   \prop_if_exist:cTF { g__enumext_#1_prop }
5183   {
5184     \prop_item:cn { g__enumext_#1_prop } {#2}
5185   }
5186   {
5187     \msg_error:nnn { enumext } { undefined-storage-anskey } {#1}
5188   }
5189 }

```

(End of definition for `\getkeyans`, `__enumext_getkeyans_aux:n`, and `__enumext_getkeyans:nn`. This function is documented on page 18.)

13.47 The command `\printkeyans`

The `\printkeyans` command prints “all stored content” in the *sequence* defined by the `save-ans key`. The first thing we will do is define a set of $\langle \textit{filtered keys} \rangle$ with which we will control the options of the different nesting levels for the environment `enumext` and `enumext*` by storing their values in the list of tokens `\l__enumext_print_keyans_X_tl`.

The variable `\l__enumext_print_keyans_starred_tl` will have the default $\langle \textit{keys} \rangle$ for `\printkeyans*` and will be set by `\setenumext[⟨print*⟩]` and the variable `\l__enumext_print_keyans_vii_tl` will have the default keys for the environment `enumext*` nested within the *sequence* and will be set by `\setenumext[⟨print,*⟩]`, the rest of the variables will be for the environment `enumext` and will be set by `\setenumext[⟨print,level⟩]`.

```

5190 \keys_define:nn { enumext / print }
5191 {
5192   print* .code:n      = \keys_precompile:neN { enumext / enumext* }
5193                   { \__enumext_filter_save_key:n {#1} }
5194                   \l__enumext_print_keyans_starred_tl, % starred cmd
5195   print* .initial:n   = { labelwidth=0pt, labelsep=0.3333em, itemindent=0pt, list-offset=0pt,
5196                   rightmargin=0pt, listparindent=0pt, nosepl, label=\arabic*.,
5197                   columns=2, first=\small, font=\small },
5198   print-1 .code:n     = \keys_precompile:neN { enumext / level-1 }
5199                   { \__enumext_filter_save_key:n {#1} }
5200                   \l__enumext_print_keyans_i_tl,
5201   print-1 .initial:n  = { labelwidth=0pt, labelsep=0.3333em, itemindent=0pt, list-offset=0pt,

```

```

5202             rightmargin=0pt, listparindent=0pt, nosep, label=\arabic*.,
5203             columns=2, first=\small, font=\small },
5204     print-2 .code:n    = \keys_precompile:neN { enumext / level-2 }
5205                       { \__enumext_filter_save_key:n {#1} }
5206                       \l__enumext_print_keyans_ii_tl,
5207     print-2 .initial:n = { labelwidth=0pt, labelsep=0.3333em, itemindent=0pt, list-offset=0pt,
5208                           rightmargin=0pt, listparindent=0pt, nosep, label=(\alph*),
5209                           first=\small, font=\small },
5210     print-3 .code:n    = \keys_precompile:neN { enumext / level-3 }
5211                       { \__enumext_filter_save_key:n {#1} }
5212                       \l__enumext_print_keyans_iii_tl,
5213     print-3 .initial:n = { labelwidth=0pt, labelsep=0.3333em, itemindent=0pt, list-offset=0pt,
5214                           rightmargin=0pt, listparindent=0pt, nosep, label=\roman*.,
5215                           first=\small, font=\small },
5216     print-4 .code:n    = \keys_precompile:neN { enumext / level-4 }
5217                       { \__enumext_filter_save_key:n {#1} }
5218                       \l__enumext_print_keyans_iv_tl,
5219     print-4 .initial:n = { labelwidth=0pt, labelsep=0.3333em, itemindent=0pt, list-offset=0pt,
5220                           rightmargin=0pt, listparindent=0pt, nosep, label=\Alph*.,
5221                           first=\small, font=\small },
5222     print-* .code:n    = \keys_precompile:neN { enumext / enumext* }
5223                       { \__enumext_filter_save_key:n {#1} }
5224                       \l__enumext_print_keyans_vii_tl, % starred nested
5225     print-* .initial:n = { labelwidth=0pt, labelsep=0.3333em, itemindent=0pt, list-offset=0pt,
5226                           rightmargin=0pt, listparindent=0pt, nosep, label=\arabic*.,
5227                           first=\small, font=\small },
5228 }

```

- The reason for storing $\langle keys \rangle$ in token lists using `\keys_precompile:neN` is because the keys are set via `\setenumext` but are later executed by running the command `\printkeyans` and they are not handled directly by its *optional argument*, except those related to the *first* opening level.

`\printkeyans`

`__enumext_printkeyans:nnn`

Create a user command to print “*all stored content*” in *sequence* for `\anskey`, `anskey*`, `\item*` and `\anspic*`. Within a group we will run our “*precompiled keys*” and then call the internal function `__enumext_printkeyans:nnn`.

```

5229 \NewDocumentCommand \printkeyans { s O{} m }
5230 {
5231   \group_begin:
5232     \tl_use:N \l__enumext_print_keyans_i_tl
5233     \tl_use:N \l__enumext_print_keyans_ii_tl
5234     \tl_use:N \l__enumext_print_keyans_iii_tl
5235     \tl_use:N \l__enumext_print_keyans_iv_tl
5236     \tl_use:N \l__enumext_print_keyans_vii_tl
5237     \__enumext_printkeyans:nnn { #1 } { #2 } { #3 }
5238   \group_end:
5239 }

```

The internal function `__enumext_printkeyans:nnn` will check for the existence of the *sequence*, if it does not exist it will return an error message, then it will check if not empty.

```

5240 \cs_new_protected:Npn \__enumext_printkeyans:nnn #1 #2 #3
5241 {
5242   \seq_if_exist:cTF { g__enumext_#3_seq }
5243   {
5244     \seq_if_empty:cF { g__enumext_#3_seq }
5245     {

```

If the *starred argument* ‘`*`’ is present we will check that the environment `enumext*` is not saved in the *sequence*, then execute the variable `\l__enumext_print_keyans_starred_tl` that contains the default $\langle keys \rangle$ for the environment `enumext*`, we set `\l__enumext_base_line_fix_bool` and `\l__enumext_print_keyans_star_bool` to true for *baseline correction*, open the `enumext*` environment passing the *optional argument* and map the *sequence*, then set `\l__enumext_base_line_fix_bool` and `\l__enumext_print_keyans_star_bool` to false.

```

5246       \bool_if:nTF {#1}
5247       {
5248         \seq_if_in:cnTF { g__enumext_#3_seq } { \end{enumext*} }
5249         {
5250           \msg_error:nnnn { enumext } { print-starred } {#3} { enumext* }
5251         }
5252       {
5253         \tl_use:N \l__enumext_print_keyans_starred_tl
5254         \bool_set_true:N \l__enumext_base_line_fix_bool

```

```

5255         \bool_set_true:N \__enumext_print_keyans_star_bool
5256         \begin{enumext*}[#2]
5257             \seq_map_inline:cn { g__enumext_#3_seq } { ##1 }
5258         \end{enumext*}
5259         \bool_set_false:N \__enumext_base_line_fix_bool
5260         \bool_set_false:N \__enumext_print_keyans_star_bool
5261     }
5262 }

```

Otherwise it will open the environment `enumext` passing the *optional argument* to the “first level” then map the *sequence*.

```

5263     {
5264         \begin{enumext}[#2]
5265             \seq_map_inline:cn { g__enumext_#3_seq } { ##1 }
5266         \end{enumext}
5267     }
5268 }
5269 }
5270 {
5271     \msg_error:nnn { enumext } { undefined-storage-anskey } {#3}
5272 }
5273 }

```

(End of definition for `\printkeyans` and `__enumext_printkeyans:nnn`. This function is documented on page 19.)

13.48 The command `\setenumext`

The command `\setenumext` will be in charge of managing the *⟨keys⟩* passed to all environments and to the `\printkeyans` command. We must take precautions with the `enumext*` environment and “first level” of the `enumext` environment so as not to capture *⟨keys⟩* that complicate us.

The function `__enumext_filter_first_level:n` will be in charge of filtering the *⟨keys⟩* passed to the environment `enumext*` and “first level” of the environment `enumext`.

```

\__enumext_filter_first_level:n
\__enumext_filter_first_level_key:n
\__enumext_filter_first_level_pair:nn
5274 \cs_new:Npn \__enumext_filter_first_level:n #1
5275 {
5276     \use:e
5277     {
5278         \keyval_parse:NNn
5279         \__enumext_filter_first_level_key:n
5280         \__enumext_filter_first_level_pair:nn {#1}
5281     }
5282 }

```

The function `__enumext_filter_first_level_key:n` will be responsible for filtering the *⟨keys⟩* that are passed “without value” by excluding the keys `resume` and `resume*`.

```

5283 \cs_new:Npn \__enumext_filter_first_level_key:n #1
5284 {
5285     \str_case:nnF {#1}
5286     {
5287         { resume } {}
5288         { resume* } {}
5289     }
5290     { , { \exp_not:n {#1} } }
5291 }

```

The function `__enumext_filter_first_level_pair:nn` will be responsible for filtering the *⟨keys⟩* that are passed “with value” by excluding the `series`, `resume` and `save-ans` keys.

```

5292 \cs_new:Npn \__enumext_filter_first_level_pair:nn #1#2
5293 {
5294     \str_case:nnF {#1}
5295     {
5296         { series } {}
5297         { resume } {}
5298         { save-ans } {}
5299     }
5300     { , { \exp_not:n {#1} } } = { \exp_not:n {#2} } }
5301 }

```

(End of definition for `__enumext_filter_first_level:n`, `__enumext_filter_first_level_key:n`, and `__enumext_filter_first_level_pair:nn`.)

Now define a “meta families” of *⟨keys⟩* to access from `\setenumext`.

```

5302 \keys_define:nn { enumext / meta-families }

```

```

5303 {
5304     enumext-1 .code:n =
5305         {
5306             \keys_set:ne { enumext / level-1 }
5307             {
5308                 \__enumext_filter_first_level:n {#1}
5309             }
5310         } ,
5311     enumext-2 .code:n = { \keys_set:nn { enumext / level-2 } {#1} } ,
5312     enumext-3 .code:n = { \keys_set:nn { enumext / level-3 } {#1} } ,
5313     enumext-4 .code:n = { \keys_set:nn { enumext / level-4 } {#1} } ,
5314     keyans .code:n = { \keys_set:nn { enumext / keyans } {#1} } ,
5315     enumext* .code:n =
5316         {
5317             \keys_set:ne { enumext / enumext* }
5318             {
5319                 \__enumext_filter_first_level:n {#1}
5320             }
5321         } ,
5322     keyans* .code:n = { \keys_set:nn { enumext / keyans* } {#1} } ,
5323     print* .code:n = { \keys_set:nn { enumext / print } { print* = {#1} } } ,
5324     print-1 .code:n = { \keys_set:nn { enumext / print } { print-1 = {#1} } } ,
5325     print-2 .code:n = { \keys_set:nn { enumext / print } { print-2 = {#1} } } ,
5326     print-3 .code:n = { \keys_set:nn { enumext / print } { print-3 = {#1} } } ,
5327     print-4 .code:n = { \keys_set:nn { enumext / print } { print-4 = {#1} } } ,
5328     print-* .code:n = { \keys_set:nn { enumext / print } { print-* = {#1} } } ,
5329     unknown .code:n = { \msg_error:nn { enumext } { unknown-key-family } } ,
5330 }

```

We store them in the constant sequence `\c__enumext_all_families_seq` separated by commas.

```

5331 \seq_const_from_clist:Nn \c__enumext_all_families_seq
5332 {
5333     enumext-1, enumext-2, enumext-3, enumext-4, keyans, enumext*,
5334     keyans*, print-1, print-2, print-3, print-4, print-*, print*,
5335 }

```

`\setenumext` Now we define the user command `\setenumext`.

```

5336 \NewDocumentCommand \setenumext { 0{enumext,1} +m }
5337 {
5338     \seq_clear:N \l__enumext_setkey_tmpa_seq
5339     \seq_set_from_clist:Nn \l__enumext_setkey_tmpb_seq {#1}
5340     \int_set:Nn \l__enumext_setkey_tmpa_int
5341     {
5342         \seq_count:N \l__enumext_setkey_tmpb_seq
5343     }
5344     \int_compare:nNnTF { \l__enumext_setkey_tmpa_int } > { 1 }
5345     {
5346         \seq_pop_left:NN \l__enumext_setkey_tmpb_seq \l__enumext_setkey_tmpa_tl
5347         \seq_map_function:NN \l__enumext_setkey_tmpb_seq \l__enumext_set_parse:n
5348         \seq_set_map_e:NNn \l__enumext_setkey_tmpa_seq \l__enumext_setkey_tmpa_seq
5349         {
5350             \tl_use:N \l__enumext_setkey_tmpa_tl - ##1
5351         }
5352     }
5353     {
5354         \seq_put_right:Ne \l__enumext_setkey_tmpa_seq { \tl_trim_spaces:n {#1} }
5355     }
5356     \seq_if_empty:NNTF \l__enumext_setkey_tmpa_seq
5357     { \seq_map_inline:Nn \c__enumext_all_families_seq }
5358     { \seq_map_inline:Nn \l__enumext_setkey_tmpa_seq }
5359     {
5360         \keys_set:nn { enumext / meta-families } { ##1 = {#2} }
5361     }
5362 }

```

Internal functions used by the `\setenumext` command.

```

5363 \cs_new_protected:Npn \l__enumext_set_parse:n #1
5364 {
5365     \tl_set:Ne \l__enumext_setkey_tmpb_tl { \tl_trim_spaces:n {#1} }
5366     \clist_map_inline:nn { 0, 1, 2, 3, 4, * } % <- max level
5367     { \tl_remove_all:Nn \l__enumext_setkey_tmpb_tl {##1} }
5368     \tl_if_empty:NNTF \l__enumext_setkey_tmpb_tl

```



```

5369     {
5370         \seq_put_right:Nn \l__enumext_setkey_tmpa_seq
5371         { \tl_trim_spaces:n {#1} }
5372     }
5373     { \__enumext_set_error:nn {#1} { } }
5374 }
5375 \cs_new_protected:Npn \__enumext_set_error:nn #1 #2
5376 { \msg_error:nnn { enumext } { invalid-key } {#1} {#2} }

```

(End of definition for `\setenumext`, `__enumext_set_parse:n`, and `__enumext_set_error:nn`. This function is documented on page 6.)

13.49 The command `\setenumextmeta`

The command `\setenumextmeta` will be responsible for adding new “meta-keys” for the `enumext` and `enumext*` environments. The implementation code was given by Jonathan P. Spratte (@Skillmon) answer in [Add .meta key to existing keys \(l3keys\)](#).

`\setenumextmeta`

First we will create a prop list `\c__enumext_meta_paths_prop` to handle the *optional argument*.

```

\c__enumext_meta_paths_prop
\__enumext_add_meta_key:nnn
\__enumext_def_meta_key:nnn
\__enumext_def_meta_key:Vnn

```

```

5377 \prop_const_from_keyval:Nn \c__enumext_meta_paths_prop
5378 {
5379     {enumext,1} = level-1,
5380     {enumext,2} = level-2,
5381     {enumext,3} = level-3,
5382     {enumext,4} = level-4,
5383     {enumext*} = enumext*
5384 }

```

Now we create the user command taking care that unknown cannot be passed as an argument.

```

5385 \NewDocumentCommand \setenumextmeta { s O{enumext,1} m +m }
5386 {
5387     \str_if_eq:eeTF { \tl_trim_spaces:n {#3} } { unknown }
5388     { \msg_error:nn { enumext } { prohibited-unknown } }
5389     {
5390         \bool_if:nTF {#1}
5391         {
5392             \int_step_inline:nn { 4 }
5393             { \__enumext_add_meta_key:nnn { enumext, ##1 } {#3} {#4} }
5394             \__enumext_add_meta_key:nnn { enumext* } {#3} {#4}
5395         }
5396         { \__enumext_add_meta_key:nnn {#2} {#3} {#4} }
5397     }
5398 }

```

The internal functions `__enumext_add_meta_key:nnn` and `__enumext_def_meta_key:nnn` will check the *optional argument* and create the “meta-key”.

```

5399 \cs_new_protected:Npn \__enumext_add_meta_key:nnn #1
5400 {
5401     \tl_set:Nn \l__enumext_meta_path_tl {#1}
5402     \tl_replace_all:Nnn \l__enumext_meta_path_tl {~} {}
5403     \prop_get:NVNTF
5404     \c__enumext_meta_paths_prop \l__enumext_meta_path_tl \l__enumext_meta_path_tl
5405     { \__enumext_def_meta_key:Vnn \l__enumext_meta_path_tl }
5406     {
5407         \msg_error:nnn { enumext } { unknown-set } {#1}
5408         \use_none:nn
5409     }
5410 }
5411 \cs_new_protected:Npn \__enumext_def_meta_key:nnn #1#2#3
5412 {
5413     \bool_lazy_or:nnTF
5414     { \keys_if_exist_p:nn { enumext / #1 } {#2} }
5415     { \keys_if_exist_p:nn { enumext / enumext* } {#2} }
5416     { \msg_error:nnn { enumext } { already-defined } {#2} }
5417     {
5418         \keys_define:nn { enumext / #1 }
5419         {
5420             #2 .meta:n = {#3},
5421             #2 .value_forbidden:n = true
5422         }
5423     }
5424 }
5425 \cs_generate_variant:Nn \__enumext_def_meta_key:nnn { V }

```

(End of definition for `\setenumextmeta` and others. This function is documented on page 6.)

13.50 The command `\foreachkeyans`

The command `\foreachkeyans` will execute a *loop* over the *prop list* and return its contents. The implementation code is adapted from the answer provided by Enrico Gregorio (@egreg) in [Expand a .cs defined by key inside the function](#).

We define a set of *keys* for command and we will save the default values of these in `\g__enumext_foreach_default_keys_tl` to avoid the use of group.

```
\foreachkeyans
\__enumext_parse_foreach_keys:nn
\__enumext_parse_foreach_keys:n
\__enumext_foreach_keyans:nn
\__enumext_foreach_add_body:n

5426 \keys_define:nn { enumext / foreach }
5427 {
5428   before .tl_set:N = \l__enumext_foreach_before_tl,
5429   before .value_required:n = true,
5430   after .tl_set:N = \l__enumext_foreach_after_tl,
5431   after .value_required:n = true,
5432   start .int_set:N = \l__enumext_foreach_start_int,
5433   start .value_required:n = true,
5434   stop .int_set:N = \l__enumext_foreach_stop_int,
5435   stop .value_required:n = true,
5436   step .int_set:N = \l__enumext_foreach_step_int,
5437   step .value_required:n = true,
5438   wrapper .cs_set_protected:Np = \__enumext_foreach_wrapper:n #1,
5439   wrapper .value_required:n = true,
5440   sep .tl_set:N = \l__enumext_foreach_sep_tl,
5441   sep .value_required:n = true,
5442   unknown .code:n = { \__enumext_parse_foreach_keys:n {#1} }
5443 }
5444 \keys_precompile:nnN { enumext / foreach }
5445 {
5446   before={},after={},start=1,step=1,stop=0,wrapper=#1,sep={; }
5447 }
5448 \l__enumext_foreach_default_keys_tl
```

Functions for handling unknown *keys*.

```
5449 \cs_new_protected:Npn \__enumext_parse_foreach_keys:nn #1#2
5450 {
5451   \tl_if_blank:nTF {#2}
5452   {
5453     \msg_error:nnn { enumext } { for-key-unknown } {#1}
5454   }
5455   {
5456     \msg_error:nnnn { enumext } { for-key-value-unknown } {#1} {#2}
5457   }
5458 }
5459 \cs_new_protected:Npn \__enumext_parse_foreach_keys:n #1
5460 {
5461   \exp_args:NV \__enumext_parse_foreach_keys:nn \l_keys_key_str {#1}
5462 }
```

We create the command.

```
5463 \NewDocumentCommand \foreachkeyans { +0{ } m }
5464 {
5465   \__enumext_foreach_keyans:nn {#1} {#2}
5466 }
```

Finally the internal functions `__enumext_foreach_keyans:nn` and `__enumext_foreach_add_body:n` will loop through the prop list and print the contents.

```
5467 \cs_new_protected:Npn \__enumext_foreach_keyans:nn #1 #2
5468 {
5469   \tl_use:N \l__enumext_foreach_default_keys_tl
5470   \keys_set:nn { enumext / foreach } {#1}
5471   \tl_set:Nn \l__enumext_foreach_name_prop_tl {#2}
5472   \prop_if_exist:cF { g__enumext_#2_prop }
5473   {
5474     \msg_error:nnn { enumext } { undefined-storage-anskey } {#2}
5475   }
5476   \int_compare:nNt { \l__enumext_foreach_stop_int } = { 0 }
5477   {
5478     \int_set:Nn \l__enumext_foreach_stop_int
5479     { \prop_count:c { g__enumext_#2_prop } }
5480   }
5481   \seq_clear:N \l__enumext_foreach_print_seq
```

```

5482 \int_step_function:nnnN
5483 { \l__enumext_foreach_start_int }
5484 { \l__enumext_foreach_step_int }
5485 { \l__enumext_foreach_stop_int }
5486 \__enumext_foreach_add_body:n
5487 \seq_use:NV \l__enumext_foreach_print_seq \l__enumext_foreach_sep_tl
5488 }
5489 \cs_new_protected:Npn \__enumext_foreach_add_body:n #1
5490 {
5491   \seq_put_right:Ne \l__enumext_foreach_print_seq
5492   {
5493     \exp_not:V \l__enumext_foreach_before_tl
5494     \__enumext_foreach_wrapper:n
5495     {
5496       \prop_item:cn { g__enumext_ \l__enumext_foreach_name_prop_tl _prop }{#1}
5497     }
5498     \exp_not:V \l__enumext_foreach_after_tl
5499   }
5500 }

```

(End of definition for `\foreachkeyans` and others. This function is documented on page 18.)

13.51 Messages

Message used by package-load for `multicol` and `hyperref` packages.

```

5501 \msg_new:nnn { enumext } { package-load }
5502 {
5503   The~'#1'~package~is~already~loaded.
5504 }
5505 \msg_new:nnn { enumext } { package-not-load }
5506 {
5507   The~'#1'~package~will~be~loaded~as~a~dependency.
5508 }
5509 \msg_new:nnn { enumext } { package-load-foot }
5510 {
5511   The~'#1'~package~is~loaded~with~the~option~'#2'.
5512 }

```

Message used in the creation of counters by `enumext` package.

```

5513 \msg_new:nnn { enumext } { counters }
5514 {
5515   The~counter~'#1'~is~already~defined~by~some~\\
5516   package~or~macro,~it~cannot~be~continued.
5517 }

```

Message used by `align` and `mark-pos` keys.

```

5518 \msg_new:nnn { enumext } { unknown-choice }
5519 {
5520   The~value~'#3'~for~'#1'~key~is~invalid~use~('#2').
5521 }

```

Message used by reserved `anskey*` environment by `enumext` package.

```

5522 \msg_new:nnnn { enumext } { anskey-env-error }
5523 {
5524   The~environment~'#1'~is~reserved~by ~\\
5525   'enumext'~package,~It~is~already~defined.
5526 }
5527 {
5528   The~environment~'#1'~is~defined~internally ~
5529   for~the~'save-ans'~key~with~save-ans~key~active.~See~documentation.\\
5530 }
5531 \msg_new:nnn { enumext } { anskey-env-nested }
5532 {
5533   The~#1~'#2'~can't~be~nested~\msg_line_context:.
5534 }

```

Message used in the creation of *prop list* by `enumext` package.

```

5535 \msg_new:nnn { enumext } { store-prop }
5536 {
5537   *~Package~enumext:~Creating ~
5538   \c_backslash_str g__enumext_#1_prop~\msg_line_context:.
5539 }
5540 \msg_new:nnn { enumext } { store-seq }

```

```

5541 {
5542     *~Package~enumext:~Creating ~
5543     \c_backslash_str g__enumext_#1_seq~\msg_line_context:.
5544 }
5545 \msg_new:nnn { enumext } { store-int }
5546 {
5547     *~Package~enumext:~Creating ~
5548     \c_backslash_str g__enumext_resume_#1_int~\msg_line_context:.
5549 }
5550 \msg_new:nnn { enumext } { prop-seq-int-hook }
5551 {
5552     *~Package~enumext:~Elements~in ~
5553     \c_backslash_str g__enumext_#1_prop=~#2.\\
5554     *~Package~enumext:~Elements~in ~
5555     \c_backslash_str g__enumext_#1_seq=~#3.\\
5556     *~Package~enumext:~Value~off ~
5557     \c_backslash_str g__enumext_resume_#1_int=~#4.
5558 }
5559 \msg_new:nnn { enumext } { item-answer-hook }
5560 {
5561     *~Package~enumext:~Value~off ~
5562     \c_backslash_str g__enumext_item_number_int=~#1.\\
5563     *~Package~enumext:~Value~off ~
5564     \c_backslash_str g__enumext_item_anskey_int=~#2.\\
5565     *~Package~enumext:~Difference~item_number_int~~~item_anskey_int=~#3.
5566 }

```

Message used by [*(key = val)*] system and `\setenumext` command.

```

5567 \msg_new:nnn { enumext } { invalid-key }
5568 {
5569     The~key~'#1'~is~not~know~the~level~#2.
5570 }
5571 \msg_new:nnn { enumext } { unknown-key-family }
5572 {
5573     Unknown~key~family~`\l_keys_key_str'~for~enumext.
5574 }

```

Messages used in length calculation.

```

5575 \msg_new:nnn { enumext } { width-negative }
5576 {
5577     Ignoring~negative~value~'#1=#2'~\msg_line_context:.\\
5578     The~key~'#1'~ accepts~values ~>~0pt.
5579 }
5580 \msg_new:nnn { enumext } { width-zero }
5581 {
5582     Invalid~'#1=#2'~\msg_line_context:.\\
5583     The~key~'#1'~ accepts~values ~>~0pt.
5584 }

```

Messages used by `show-length` key in `enumext`.

```

5585 \msg_new:nnn { enumext } { list-lengths }
5586 {
5587     ****~Lengths~used~by~'enumext'~level~'#2'~\msg_line_context:~\c_space_tl ****\\
5588     \__enumext_show_length:nnn { dim } { labelsep } {#1}
5589     \__enumext_show_length:nnn { dim } { labelwidth } {#1}
5590     \__enumext_show_length:nnn { dim } { itemindent } {#1}
5591     \__enumext_show_length:nnn { dim } { leftmargin } {#1}
5592     \__enumext_show_length:nnn { dim } { rightmargin } {#1}
5593     \__enumext_show_length:nnn { dim } { listparindent } {#1}
5594     \__enumext_show_length:nnn { skip } { topsep } {#1}
5595     \__enumext_show_length:nnn { skip } { parsep } {#1}
5596     \__enumext_show_length:nnn { skip } { partopsep } {#1}
5597     \__enumext_show_length:nnn { skip } { itemsep } {#1}
5598     ****~
5599 }

```

Messages used by `show-length` key in `enumext*`, `keyans*` and `keyans`.

```

5600 \msg_new:nnn { enumext } { list-lengths-not-nested }
5601 {
5602     ****~Lengths~used~by~'#2'~environment~\msg_line_context:~\c_space_tl ****\\
5603     \__enumext_show_length:nnn { dim } { labelsep } {#1}
5604     \__enumext_show_length:nnn { dim } { labelwidth } {#1}
5605     \__enumext_show_length:nnn { dim } { itemindent } {#1}

```

```

5606     \__enumext_show_length:nnn { dim } { leftmargin } {#1}
5607     \__enumext_show_length:nnn { dim } { rightmargin } {#1}
5608     \__enumext_show_length:nnn { dim } { listparindent } {#1}
5609     \__enumext_show_length:nnn { skip } { topsep } {#1}
5610     \__enumext_show_length:nnn { skip } { parsep } {#1}
5611     \__enumext_show_length:nnn { skip } { partopsep } {#1}
5612     \__enumext_show_length:nnn { skip } { itemsep } {#1}
5613     *****
5614 }

```

Messages used by `ref` key.

```

5615 \msg_new:nnn { enumext } { key-ref-empty }
5616 {
5617     Key~'ref'~need~a~value~in~'#1'~ \msg_line_context:.
5618 }

```

Messages used by `save-ans` key.

```

5619 \msg_new:nnn { enumext } { save-ans-empty }
5620 {
5621     Key~'save-ans'~need~a~value~in~'#1'~ \msg_line_context:.
5622 }
5623 \msg_new:nnn { enumext } { save-ans-log }
5624 {
5625     *~Package~enumext:~Start~#1\c_space_tl with~save-ans=#2~\msg_line_context:.
5626 }
5627 \msg_new:nnn { enumext } { save-ans-log-hook }
5628 {
5629     *~Package~enumext:~Stop~#1\c_space_tl with~save-ans=#2~\msg_line_context:.
5630 }
5631 \msg_new:nnn { enumext } { save-ans-hook }
5632 {
5633     Stop~storing~for~'save-ans=#1'~\msg_line_context:.
5634 }

```

Messages used by the internal system to check answer used by `check-ans` key.

```

5635 \msg_new:nnn { enumext } { need-save-ans }
5636 {
5637     Key~'#1'~ works~only~with~the~'save-ans'~key~in~'#2'~ \msg_line_context:.
5638 }
5639 \msg_new:nnn { enumext } { items-same-answer }
5640 {
5641     *****\
5642     *~Package~enumext:~Checking~answers~in~'#1' ~
5643     for~\c_left_brace_str #2 \c_right_brace_str\
5644     *~started~#3~and~close~\msg_line_context: : ~
5645     'OK',~all~items~with~answer.\
5646     *****
5647 }
5648 \msg_new:nnn { enumext } { item-greater-answer }
5649 {
5650     Checking~answers~in~'#1'~for~\c_left_brace_str #2 \c_right_brace_str\
5651     started~#3~and~close~\msg_line_context: : ~'NOT~OK'\
5652     Items~>~Answers.
5653 }
5654 \msg_new:nnn { enumext } { item-less-answer }
5655 {
5656     Checking~answers~in~'#1'~for~\c_left_brace_str #2 \c_right_brace_str\
5657     started~#3~and~close~\msg_line_context: : ~'NOT~OK'\
5658     Items~<~Answers.
5659 }

```

Messages used by the internal system to check for “starred” `\item*` and `\anspic*` commands.

```

5660 \msg_new:nnn { enumext } { missing-starred }
5661 {
5662     Missing~'\c_backslash_str #1'~#2.
5663 }
5664 \msg_new:nnn { enumext } { many-starred }
5665 {
5666     Many~'\c_backslash_str #1'~#2.
5667 }

```

Messages used by `\printkeyans*` command.

```

5668 \msg_new:nnn { enumext } { print-starred }

```

```

5669 {
5670     \c_backslash_str printkeyans*:~ The~sequence~'#1'~already~contains ~
5671     #2~environment~ \msg_line_context:.
5672 }

```

Message for the nesting depth of the environment `enumext`.

```

5673 \msg_new:nnn { enumext } { list-too-deep }
5674 {
5675     Too~deep~nesting ~for~'enumext'~\msg_line_context:~ \
5676     The~maximum ~level ~of ~nesting ~is~4.
5677 }

```

Messages used by `\anskey`, `anskey*` and `\anspic` commands.

```

5678 \msg_new:nnn { enumext } { anskey-unnumber-item }
5679 {
5680     Can't~store~with~a~unnumbered~\c_backslash_str item~\msg_line_context:.
5681 }
5682 \msg_new:nnn { enumext } { anskey-already-stored }
5683 {
5684     Content~already~stored~for~this~\c_backslash_str item~\msg_line_context:.
5685 }
5686 \msg_new:nnn { enumext } { anskey-empty-arg }
5687 {
5688     Can't~store~empty~content~\msg_line_context:.
5689 }
5690 \msg_new:nnn { enumext } { anskey-wrong-place }
5691 {
5692     Wrong~place~for~command~'\c_backslash_str #1'~\msg_line_context:~ \
5693     '\c_backslash_str #1'~works~in~the~environment~'#2'.
5694 }
5695 \msg_new:nnn { enumext } { anskey-nested }
5696 {
5697     The~command~\c_backslash_str anskey~ can't~be~nested~\msg_line_context:.
5698 }
5699 \msg_new:nnn { enumext } { anskey-math-mode }
5700 {
5701     #1~can't~work~in~math~mode~\msg_line_context:.
5702 }
5703 \msg_new:nnn { enumext } { anskey-env-wrong }
5704 {
5705     The~environment~anskey*~cannot~use~in~'#1'~\msg_line_context:.
5706 }
5707 \msg_new:nnn { enumext } { ansPIC-wrong-place }
5708 {
5709     Wrong~place~for~command~'\c_backslash_str #1'~\msg_line_context:~ \
5710     '\c_backslash_str #1'~works~in~the~environment~'#2'.
5711 }
5712 \msg_new:nnn { enumext } { command-wrong-place }
5713 {
5714     Wrong~place~for~command~'\c_backslash_str #1'~\msg_line_context:~ \
5715     '\c_backslash_str #1'~works~outside~the~environment~'#2'.
5716 }
5717 \msg_new:nnnn { enumext } { anskey-env-key-unknown }
5718 {
5719     The~key~'#1'~is~unknown~by~environment~
5720     'anskey*~and~is~being~ignored.
5721 }
5722 {
5723     The~environment~'anskey*~does~not~have~a~key~called ~'#1'.\\
5724     Check~that~you~have~spelled~the~key~name~correctly.
5725 }
5726 \msg_new:nnnn { enumext } { anskey-env-key-value-unknown }
5727 {
5728     The~key~'#1=#2'~is~unknown~by~environment ~
5729     'anskey*~and~is~being~ignored.
5730 }
5731 {
5732     The~environment~'anskey*~does~not~have~a~key~called ~'#1'.\\
5733     Check~that~you~have~spelled~the~key~name~correctly.
5734 }
5735 \msg_new:nnnn { enumext } { anskey-cmd-key-unknown }
5736 { The~key~'#1'~is~unknown~by~'\c_backslash_str anskey'~and~is~being~ignored.}

```

```

5737 {
5738     The~command ~'\c_backslash_str anskey'~does~not~have~a~key~called ~'#1'.\\
5739     Check~that~you~have~spelled~the~key~name~correctly.
5740 }
5741 \msg_new:nnnn { enumext } { anskey-cmd-key-value-unknown }
5742 { The~key~'#1=#2'~is~unknown~by~'\c_backslash_str anskey'~and~is~being~ignored. }
5743 {
5744     The~command~'\c_backslash_str anskey'~does~not~have~a~key~called ~'#1'.\\
5745     Check~that~you~have~spelled~the~key~name~correctly.
5746 }
5747 \msg_new:nnn { enumext } { overwrite-file }
5748 {
5749     Overwriting~file~'#1'.
5750 }
5751 \msg_new:nnn { enumext } { writing-file }
5752 {
5753     Writing~file~'#1'.
5754 }
5755 \msg_new:nnn { enumext } { not-writing }
5756 {
5757     File~'#1'~already~exists.~Not~writing.
5758 }

```

Messages used by [keyans](#), [keyans*](#) and [keyanspic](#) environment.

```

5759 \msg_new:nnn { enumext } { keyans-nested }
5760 {
5761     The~environment~'keyans'~can't~be ~nested ~\msg_line_context:.
5762 }
5763 \msg_new:nnn { enumext } { keyans-wrong-level }
5764 {
5765     Wrong~level~position~for~'keyans'~\msg_line_context:.~ \\
5766     The~environment~'keyans'~can~only~be~in~the~first~level.
5767 }
5768 \msg_new:nnn { enumext } { wrong-place }
5769 {
5770     Wrong~place~for~'#1'~environment ~\msg_line_context:.~ \\
5771     '#1'~is~only~found~with~'#2'~ in ~ 'enumext.
5772 }
5773 \msg_new:nnn { enumext } { keyanspic-nested }
5774 {
5775     The~environment~'keyanspic'~can't~be ~nested~ \msg_line_context:.~.
5776 }
5777 \msg_new:nnn { enumext } { keyanspic-wrong-level }
5778 {
5779     Wrong~level~position~for~'keyanspic'~\msg_line_context:.~ \\
5780     The~environment~'keyans'~can~only~be~in~the~first~level.
5781 }
5782 \msg_new:nnn { enumext } { keyanspic-item-cmd }
5783 {
5784     Can't~use ~\c_backslash_str item~in~keyanspic~\msg_line_context:.
5785 }
5786 \msg_new:nnnn { enumext } { keyans-unknown-key }
5787 {
5788     The~key~'#1'~is~unknown~by~environment~
5789     '\l__enumext_envir_name_tl'~and~is~being~ignored.
5790 }
5791 {
5792     The~environment~'\l__enumext_envir_name_tl'~does~not
5793     ~have~a~key~called ~'#1'.\\
5794     Check~that~you~have~spelled~the~key~name~correctly.
5795 }
5796 \msg_new:nnnn { enumext } { keyans-unknown-key-value }
5797 {
5798     The~key~'#1=#2'~is~unknown~by~environment ~
5799     '\l__enumext_envir_name_tl'~and~is~being~ignored.
5800 }
5801 {
5802     The~environment~'\l__enumext_envir_name_tl'~does~not
5803     ~have~a~key~called ~'#1'.\\
5804     Check~that~you~have~spelled~the~key~name~correctly.
5805 }

```


Message used by unknown *⟨keys⟩* in `enumext*`. environment.

```

5806 \msg_new:nnnn { enumext } { starred-unknown-key }
5807 {
5808     The~key~'#1'~is~unknown~by~environment~
5809     '\l__enumext_envir_name_tl'~and~is~being~ignored.
5810 }
5811 {
5812     The~environment~'\l__enumext_envir_name_tl'~does~not
5813     ~have~a~key~called ~'#1'.\\
5814     Check~that~you~have~spelled~the~key~name~correctly.
5815 }
5816 \msg_new:nnnn { enumext } { starred-unknown-key-value }
5817 {
5818     The~key~'#1=#2'~is~unknown~by~environment ~
5819     '\l__enumext_envir_name_tl'~and~is~being~ignored.
5820 }
5821 {
5822     The~environment~'\l__enumext_envir_name_tl'~does~not
5823     ~have~a~key~called ~'#1'.\\
5824     Check~that~you~have~spelled~the~key~name~correctly.
5825 }

```

Message used by unknown *⟨keys⟩* in `enumext` environment.

```

5826 \msg_new:nnnn { enumext } { standar-unknown-key }
5827 {
5828     The~key~'#1'~is~unknown~by~environment~'\l__enumext_envir_name_tl' \c_space_tl
5829     ~on~level~\int_use:N \l__enumext_level_int \c_space_tl and~is~being~ignored.
5830 }
5831 {
5832     The~environment~'\l__enumext_envir_name_tl'~does~not
5833     ~have~a~key~called ~'#1'~on~level~\int_use:N \l__enumext_level_int.\\
5834     Check~that~you~have~spelled~the~key~name~correctly.
5835 }
5836 \msg_new:nnnn { enumext } { standar-unknown-key-value }
5837 {
5838     The~key~'#1=#2'~is~unknown~by~environment~'\l__enumext_envir_name_tl' \c_space_tl
5839     ~on~level~\int_use:N \l__enumext_level_int \c_space_tl and~is~being~ignored.
5840 }
5841 {
5842     The~environment~'\l__enumext_envir_name_tl'~does~not
5843     ~have~a~key~called ~'#1'~on~level~\int_use:N \l__enumext_level_int.\\
5844     Check~that~you~have~spelled~the~key~name~correctly.
5845 }

```

Message used by unknown *⟨keys⟩* in `\foreachkeyans`.

```

5846 \msg_new:nnnn { enumext } { for-key-unknown }
5847 { The~key~'#1'~is~unknown~by~'\c_backslash_str foreachkeyans'~and~is~being~ignored.}
5848 {
5849     The~command~'\c_backslash_str foreachkeyans'~does~not~have~a~key~called~'#1'.\\
5850     Check~that~you~have~spelled~the~key~name~correctly.
5851 }
5852 \msg_new:nnnn { enumext } { for-key-value-unknown }
5853 { The~key~'#1=#2'~is~unknown~by~'\c_backslash_str foreachkeyans'~and~is~being~ignored. }
5854 {
5855     The~command~'\c_backslash_str foreachkeyans'~does~not~have~a~key~called~'#1'.\\
5856     Check~that~you~have~spelled~the~key~name~correctly.
5857 }

```

Messages used by `\getkeyans` command.

```

5858 \msg_new:nnn { enumext } { undefined-storage-anskey }
5859 {
5860     Storage~named~'#1'~is~not~defined~\msg_line_context:.
5861 }

```

Messages used by `\miniright` command.

```

5862 \msg_new:nnn { enumext } { missing-miniright }
5863 {
5864     Missing~'\c_backslash_str miniright'~in~\msg_line_context:.\\
5865     The~key~'mini-env'~need~'\c_backslash_str miniright'.
5866 }
5867 \msg_new:nnn { enumext } { wrong-miniright-place }
5868 {
5869     Wrong~place~for~'\c_backslash_str miniright'~\msg_line_context:.~ \\

```

```

5870     Works~in~'enumext'~and~'keyans'~with~key~'mini-env'.
5871   }
5872   \msg_new:nnn { enumext } { wrong-miniright-use }
5873   {
5874     Wrong~use~for~'\c_backslash_str miniright'~\msg_line_context:~ \\
5875     '\c_backslash_str miniright'~need~a~key~'mini-env'.
5876   }
5877   \msg_new:nnn { enumext } { wrong-miniright-starred }
5878   {
5879     Can't~use ~\c_backslash_str miniright~in~starred~environments~\msg_line_context:.
5880   }
5881   \msg_new:nnn { enumext } { many-miniright-used }
5882   {
5883     Can't~use ~\c_backslash_str miniright~more~than~once~ \msg_line_context:.
5884   }

```

Messages used by `\setenumextmeta` command.

```

5885   \msg_new:nnn { enumext } { unknown-set }
5886   {
5887     Argument~[#1]~is~unknown~by~ \c_backslash_str setenumextmeta~\msg_line_context:.
5888   }
5889   \msg_new:nnn { enumext } { already-defined }
5890   {
5891     The~key~'#1'~is~already~defined~\msg_line_context:.
5892   }
5893   \msg_new:nnn { enumext } { prohibited-unknown }
5894   {
5895     The~name~'unknown'~can't~be~chosen~ for~a~meta~key~\msg_line_context:.
5896   }

```

Messages used by `enumext*` and `keyans*` environments.

```

5897   \msg_new:nnn { enumext } { nested }
5898   {
5899     The~environment~\l__enumext_envir_name_tl \c_space_tl can't~be~nested~\msg_line_context:.
5900   }
5901   \msg_new:nnn { enumext } { nested-horizontal }
5902   {
5903     The~environment~\l__enumext_envir_name_tl \c_space_tl can't~be~nested~in~'#1'~ \msg_line_context:.
5904   }
5905   \msg_new:nnn { enumext } { item-joined }
5906   {
5907     Items~joined~(#1)~>~#2 ~columns ~\msg_line_context:.
5908   }
5909   \msg_new:nnn { enumext } { item-joined-columns }
5910   {
5911     Not~space~to~join~items~(#1)~>~#2 ~\msg_line_context:.
5912   }

```

13.52 Finish package

Finish package implementation.

```

5913   \file_input_stop:
5914   </package>

```

14 Index of Implementation

The italic numbers denote the pages where the corresponding entry is described, the numbers underlined and all others indicate the line on which they are implemented in the package code.

Symbols

*

.....

226

\+

.....

218

\-

.....

218

\\

234, 4294, 4297, 5515, 5524, 5529, 5553, 5555, 5562, 5564, 5577, 5582, 5587, 5602, 5641, 5643, 5645, 5650, 5651, 5656, 5657, 5675, 5692, 5709, 5714, 5723, 5732, 5738, 5744, 5765, 5770, 5779, 5793, 5803, 5813, 5823, 5833, 5843, 5849, 5855, 5864, 5869, 5874

A

above

.....

1706

above*

.....

1706

\addvspace

1273, 1301, 1344, 1347, 1515, 1518, 1615, 1621, 1659, 1665, 1686, 1692, 3722, 3883, 3901, 4179, 4183, 4542, 4557, 4603, 4617

after

.....

1103

align

.....

660

\Alph

.....

43, 47, 48

\Alph

602, 730, 774, 834, 5220

\alph

.....

43, 47, 48

\alph

603, 728, 5208

\anskey

.....

13, 82, 84, 2765

anskey*

.....

14, 2895

\anspic

.....

17, 110, 113, 4193

\anspic*

.....

75

\arabic

.....

35, 43

\arabic

601, 727, 773, 5196, 5202, 5226

B

base-fix

.....

961

\baselineskip

.....

56

\baselineskip

977, 988

before

.....

1103

before*

.....

1103

below

.....

1706

below*

.....

1706

bool commands:

\bool_gset_false:N

345, 346, 347, 4559, 4563, 4619

\bool_gset_true:N

255, 265, 1206, 2198, 2204, 4528, 4560, 4592, 4620

\bool_if:NTF

395, 405, 422, 496, 503, 512, 519, 533, 546, 1728, 1742, 1755, 1766, 1777, 1788, 1799, 1810, 1859, 1876, 1881, 1889, 1916, 1954, 1959, 1966, 1970, 1992, 1997, 2005, 2012, 2043, 2051, 2143, 2386, 2396, 2476, 2500, 2507, 2531, 2629, 2651, 2691, 2715, 2719, 2769, 2788, 2812, 2864, 2868, 2898, 2916, 2935, 2951, 2974, 3005, 3020, 3092, 3208, 3242, 3278, 3294, 3315, 3454, 3475, 3521, 3563, 3573, 3606, 3611, 3677, 3703, 3753, 3811, 3866, 3891, 4112, 4177, 4195, 4214, 4265, 4292, 4521, 4537, 4543, 4586, 4600, 4604, 4693, 4703, 4791, 4797, 4804, 4820, 4913, 4923, 5037, 5044, 5075, 5091, 5122

\bool_if:nTF

1666, 1693, 3264, 3433, 4235, 5246, 5390

\bool_if_p:N

274, 288, 971, 972, 984, 985, 1638, 2023, 2024, 2032, 2033, 2156, 2182, 2195, 2196, 2201, 2202, 2564, 2574, 2586, 2601, 2602, 2636, 2677, 2678, 3079, 3080, 3109, 3110, 3122, 3123, 3163, 3164, 3183, 3184, 3467, 3468, 3469, 3650, 3652, 3663, 5066, 5067, 5068

\bool_lazy_all:nTF

272, 286, 969, 2154, 2180, 2562, 2571, 2584, 2599, 3161, 3181, 3465, 3648, 3661, 5064

\bool_lazy_and:nnTF

251, 261, 983, 1630, 1637, 2022, 2031, 2194, 2200, 2635, 2642, 2676, 3078

\bool_lazy_or:nnTF

2084, 2091, 3108, 3121, 5413

\bool_new:N

22, 23, 24, 25, 26, 27, 28, 49, 58, 82, 87, 88, 93, 94, 97, 105, 120, 132, 133, 140, 146, 147, 149, 153, 155, 156, 173, 185, 187

\bool_not_p:n

252, 262, 973, 1639, 2573, 2637, 2643, 3651, 3664

\bool_set_eq:NN

3217, 3414, 4744, 4988

\bool_set_false:N

402, 995, 2128, 2129, 2161, 2166, 2170, 2174, 2187, 3442, 3625, 3770, 3819, 3906, 4048, 4109, 4255, 4662, 4688, 4741, 4929, 4984, 4985, 5259, 5260

\bool_set_true:N

279, 293, 388, 391, 653, 1010, 1712, 1717, 1979, 2101, 2102, 2418, 2426, 2839, 3211, 3213, 3245, 3247, 3410, 3421, 3435, 3586, 3624, 3657, 3670, 3743, 3816, 3843, 4045, 4237, 4238, 4510, 4575, 4661, 4748, 4755, 4756, 4800, 4927, 4992, 4999, 5000, 5001, 5254, 5255

box commands:

\box_dp:N

1561, 1562, 1565, 1572, 1585, 1593, 1599, 1607, 4123, 4129, 4179, 4276

\box_ht:N

1344, 1347, 1358, 1359, 1370, 1372, 1387, 1390, 1398, 1399, 1410, 1412, 1427, 1430, 1437, 1438, 1449, 1451, 1466, 1469, 1515, 1518, 1526, 1527, 1535, 1536, 1548, 1550

\box_ht_plus_dp:N

4118, 4187, 4223

\box_new:N

55, 142, 143, 180, 186

\box_use_drop:N

4554, 4615, 4856, 5134

\box_wd:N

609

break-col

2735, 2821

C

\c

226, 227, 868, 870, 882, 884

\cB

227

\cE

227

\centering

1668, 1695, 4320, 4547, 4608

check-ans

2120

Document class:

article

49

clist commands:

\clist_const:Nn

192

\clist_map_function:nN

4303

\clist_map_inline:Nn

659, 916, 1102, 1117, 1198, 1722

\clist_map_inline:nn

36, 45, 63, 71, 84, 96, 135, 164, 191, 637, 690, 710, 1015, 1036, 1212, 1828, 2068, 2134, 2313, 2383, 2415, 2559, 3014, 3336, 3351, 3391, 3550, 3553, 3581, 3593, 3596, 3616, 5366

\columnbreak

82

\columnbreak

2639

columns

1182

columns-sep

1182

\columnsep

103

\columnsep

3698, 3864

\columnseprule

103

\columnseprule

3701, 3865

©2024–2025 by Pablo González L

145 / 161

Commands provide by **enumext**:

\anskey 31, 32, 71, 72, 78, 79, 81, 83–85, 90, 103, 122, 132, 133, 141
 \anspic* 31, 33, 75, 79, 90, 91, 113, 132, 133
 \anspic 33, 79, 110, 113, 141
 \foreachkeyans 137, 143
 \getkeyans 79, 132, 143
 \item* 31, 33, 75, 79, 90, 91, 93, 94, 97, 124, 129, 132, 133
 \item 93, 97, 117, 123, 125, 128, 129
 \miniright 31, 54, 62, 63, 105, 143
 \printkeyans* 132
 \printkeyans 32, 79, 132, 133
 \setenumextmeta 136, 144
 \setenumext 32, 133–135, 139

Counters defined by **enumext**:

enumXiii 30, 42
 enumXii 30, 42
 enumXiv 30, 42
 enumXi 30, 42
 enumXviii 30, 42
 enumXvii 30, 42, 124
 enumXvi 30, 42
 enumXv 30, 42

cs commands:

\cs_generate_variant:Nn . 197, 198, 611, 627, 874, 890, 2468, 2473, 2549, 2894, 3540, 4305, 5425
 \cs_if_exist:NTF 581
 \cs_if_exist_p:N 3470, 5069
 \cs_new:Nn 212
 \cs_new:Npn . 230, 1829, 1838, 1846, 2430, 2439, 2447, 5274, 5283, 5292
 \cs_new_eq:NN . 372, 373, 378, 379, 407, 408, 411, 412
 \cs_new_protected:Nn . 222, 236, 244, 270, 301, 331, 337, 343, 349, 355, 363, 383, 430, 434, 452, 464, 482, 494, 510, 526, 539, 560, 750, 807, 854, 967, 1118, 1122, 1126, 1130, 1134, 1138, 1142, 1146, 1150, 1154, 1158, 1162, 1166, 1170, 1174, 1178, 1213, 1225, 1258, 1275, 1286, 1303, 1329, 1350, 1475, 1501, 1521, 1554, 1576, 1611, 1617, 1723, 1737, 1751, 1762, 1773, 1784, 1795, 1806, 1887, 1990, 2003, 2020, 2041, 2069, 2074, 2099, 2139, 2149, 2192, 2207, 2214, 2223, 2228, 2233, 2238, 2247, 2252, 2257, 2474, 2498, 2505, 2529, 2536, 2550, 2786, 2805, 2914, 2933, 2964, 3003, 3018, 3046, 3076, 3104, 3117, 3130, 3159, 3172, 3250, 3260, 3271, 3287, 3303, 3429, 3447, 3481, 3493, 3617, 3646, 3675, 3682, 3712, 3729, 3751, 3773, 3809, 3833, 3850, 3875, 3889, 3910, 4084, 4287, 4301, 4306, 4330, 4340, 4371, 4500, 4519, 4565, 4584, 4648, 4675, 4682, 4691, 4701, 4726, 4867, 4911, 4942, 4948, 4969, 5025, 5145
 \cs_new_protected:Npn 199, 200, 204, 208, 415, 579, 596, 606, 612, 731, 775, 839, 861, 875, 1650, 1679, 1855, 1874, 1944, 1977, 2079, 2262, 2384, 2394, 2416, 2424, 2460, 2469, 2625, 2688, 2713, 2751, 2755, 2848, 2852, 2885, 2944, 2983, 3056, 3097, 3204, 3223, 3352, 3356, 3370, 3374, 3392, 3396, 3406, 3418, 3463, 3509, 3543, 3584, 3628, 3829, 4093, 4100, 4107, 4212, 4231, 4261, 4402, 4451, 4665, 4732, 4739, 4753, 4761, 4766, 4776, 4935, 4975, 4982, 4997, 5006, 5020, 5062, 5167, 5180, 5240, 5363, 5375, 5399, 5411, 5449, 5459, 5467, 5489
 \cs_new_protected_nopar:Nn . . 3973, 4017, 4025, 4033, 4711, 4719, 4850, 4954, 4962, 5128
 \cs_new_protected_nopar:Npn . . 3965, 3981, 4782, 4828, 5081, 5102
 \cs_set:Npn 2560, 2597, 5173

\cs_set_eq:NN . . 3473, 4638, 4639, 4830, 4900, 4901, 5072, 5104
 \cs_set_protected:Nn 1041, 1057, 1070, 1082
 \cs_set_protected:Npn . 32, 39, 56, 64, 79, 85, 128, 160, 171, 628, 638, 660, 695, 711, 757, 891, 917, 997, 1020, 1094, 1103, 1182, 1199, 1706, 1817, 2060, 2120, 2279, 2314, 2402, 2552, 3007, 3325, 3341, 3384, 3541, 3582
 \cs_to_str:N 598, 621

D

\d 218
 \DeclareDocumentEnvironment 564
 dim commands:

\dim_abs:n 3514, 3519
 \dim_add:Nn 3156, 4127, 4365, 4396
 \dim_compare:nNnTF . . 1043, 1059, 1072, 1084, 1362, 1374, 1402, 1414, 1441, 1453, 1530, 1538, 1652, 1681, 2693, 2701, 3151, 3511, 3516, 3522, 3528, 3530, 3532, 3687, 3734, 3837, 3854, 4102, 4342, 4358, 4373, 4389, 4502, 4567, 5033
 \dim_compare:nTF 2661, 3776, 3913
 \dim_eval:n 977, 4185, 4272
 \dim_gset_eq:NN 4511, 4576
 \dim_gzero:N 4562, 4622
 \dim_new:N . 52, 59, 60, 61, 81, 124, 125, 137, 144, 145, 179, 181, 182, 188
 \dim_set:Nn . 609, 1011, 2695, 2703, 3138, 3142, 3147, 3153, 3240, 3514, 3519, 3521, 3524, 3525, 3529, 3531, 3534, 3535, 3537, 3690, 3737, 3775, 3839, 3856, 3912, 4116, 4221, 4308, 4344, 4351, 4375, 4382, 4437, 4486, 4504, 4569, 4778, 5035
 \dim_set_eq:NN 718, 764, 831, 3235, 3552, 3595, 3698, 3864, 4444, 4447, 4448, 4493, 4496, 4497, 4771, 4842, 5116
 \dim_sub:Nn 3781, 3918, 4360, 4391
 \dim_use:N . 1044, 1052, 1653, 1663, 2539, 2542, 2547, 2705, 3255, 3257, 3310, 3688, 3692, 3693, 3695, 3735, 3740, 3741, 3747, 3778, 3783
 \dim_zero:N 3587, 3701, 3865, 4130
 \dim_zero_new:N 578
 \c_zero_dim 1046, 1060, 1073, 1085, 1653, 1681, 2663, 2693, 2701, 3138, 3151, 3511, 3516, 3522, 3529, 3688, 3735, 3778, 3837, 3854, 3915, 4102, 4342, 4358, 4373, 4389, 4502, 4567, 5033
 \dimeval 2348

E

\end . . . 2502, 2533, 3719, 3880, 4167, 4322, 5248, 5258, 5266
 end internal commands:

\end_enumext_mini_page . 1661, 1688, 3762, 3900, 4526, 4590, 4616

\endlist 373
 \endminipage 379
 enumext 5, 3787

enumext internal commands:

\l_enumext_resume_name_tl 67
 __enumext_add_meta_key:nnn . . 136, 5377, 5393, 5394, 5396, 5399
 __enumext_add_pre_parsep: . 55, 1223, 1225, 1225
 __enumext_after_args_exec: 53, 1118, 1130, 3800
 __enumext_after_args_exec_v: 1134, 1146, 3933
 __enumext_after_args_exec_vii: . . 1150, 1174
 __enumext_after_args_exec_viii: 1178
 __enumext_after_env:nn 89, 106, 119, 126, 204, 204, 552, 556, 3805, 4535, 4598, 4883

```

\__enumext_after_hyperref: ... 38, 381, 381, 383
\l__enumext_after_list_args_v_tl ..... 1148
\l__enumext_after_list_args_vii_tl 1176, 4848
\l__enumext_after_list_args_viii_tl .. 1180,
    5126
\__enumext_after_list_vii: 119, 122, 4646, 4682,
    4682
\__enumext_after_list_viii: ... 128, 4909, 4948,
    4948
\__enumext_after_stop_list: 53, 105, 1118, 1126,
    3767
\__enumext_after_stop_list_v: 1134, 1142, 3907
\l__enumext_after_stop_list_v_tl ..... 1144
\__enumext_after_stop_list_vii: .. 122, 1150,
    1166, 4685
\l__enumext_after_stop_list_vii_tl ... 1168
\__enumext_after_stop_list_viii: . 1170, 4951
\l__enumext_after_stop_list_viii_tl ... 1172
\l__enumext_align_label_pos_v_str 3134, 3499
\l__enumext_align_label_pos_X_str ..... 64
\l__enumext_align_label_vii_str ..... 4817
\l__enumext_align_label_viii_str ..... 5095
\l__enumext_align_label_X_str ..... 171
\c__enumext_all_envs_clist . 192, 659, 916, 1102,
    1117, 1198, 1722
\c__enumext_all_families_seq .. 135, 5331, 5357
\__enumext_anskey_env_file_if_writable:n 87,
    2862, 2862
\__enumext_anskey_env_file_if-
    writable:nTF ..... 2862, 2887
\__enumext_anskey_env_file_write:nn 87, 2885,
    2894, 2949
\l__enumext_anskey_env_force_eol_bool .. 88,
    2835, 2951
\c__enumext_anskey_env_hidden_space_str 32,
    88, 108, 2955
\l__enumext_anskey_env_overwrite_bool 2843,
    2868
\__enumext_anskey_env_safe_inner: . 88, 2909,
    2914, 2933
\__enumext_anskey_env_safe_inner:n .... 87
\__enumext_anskey_env_safe_outer: . 87, 2897,
    2914, 2914
\__enumext_anskey_env_unknown:n 86, 2846, 2848,
    2848
\__enumext_anskey_env_unknown:nn . 2848, 2850,
    2852
\l__enumext_anskey_level_int .. 16, 2807, 2808
\__enumext_anskey_safe_inner: . 85, 2780, 2786,
    2805
\__enumext_anskey_safe_inner:n ..... 85
\__enumext_anskey_safe_outer: . 85, 2767, 2786,
    2786
\__enumext_anskey_show_wrap_arg:n . 83, 2688,
    2688, 2717, 2732
\__enumext_anskey_show_wrap_left:n 84, 2633,
    2713, 2713
\__enumext_anskey_unknown:n 84, 2735, 2749, 2751
\__enumext_anskey_unknown:nn . 2735, 2753, 2755
\__enumext_anskey_wrapper:n ..... 2345, 2711
\l__enumext_anspic_above_int . 136, 4309, 4310,
    4312
\__enumext_anspic_args:nnn 113, 115, 4193, 4209,
    4287
\l__enumext_anspic_args_seq 113, 115, 136, 4207,
    4321, 4334
\l__enumext_anspic_below_int . 136, 4309, 4310,
    4313
\l__enumext_anspic_body_box ... 136, 4220, 4223
\__enumext_anspic_body_dim:n . 114, 4193, 4212,
    4264
\l__enumext_anspic_body_htdp_dim .. 114, 136,
    4221, 4275
__enumext_anspic_exec: ..... 4193
\__enumext_anspic_exec: ... 112, 115, 4162, 4330
\__enumext_anspic_label:nn 114, 4193, 4231, 4267,
    4282
\l__enumext_anspic_label_above_bool ... 136,
    4045, 4048, 4112, 4177, 4214, 4265, 4292
\l__enumext_anspic_label_box .. 136, 4115, 4118
\l__enumext_anspic_label_htdp_dim . 112, 136,
    4116, 4122, 4187, 4274
\__enumext_anspic_label_pos:nnn .. 114, 4193,
    4261, 4290
\l__enumext_anspic_label_sep_skip 4055, 4124,
    4188, 4277, 4294
\l__enumext_anspic_layout_style_tl 4057, 4332,
    4337
\l__enumext_anspic_mini_pos_str .. 136, 4046,
    4049, 4319
\l__enumext_anspic_mini_width_dim 136, 4233,
    4308, 4319
\__enumext_anspic_print:n 115, 4193, 4301, 4305,
    4334, 4337
\__enumext_anspic_row:n .. 115, 4193, 4303, 4306
\__enumext_anspic_start_list_tag: 3989, 4017,
    4289
\__enumext_anspic_stop_list_tag: . 3989, 4033,
    4299
\__enumext_anspic_stop_start_list_tag: 3989,
    4025, 4291
\__enumext_at_begin_document:n .. 38, 200, 200,
    370, 376
\l__enumext_base_line_fix_bool 50, 133, 963, 972,
    995, 5254, 5259
\__enumext_before_args_exec: 52, 104, 122, 1118,
    1118, 3732
\__enumext_before_args_exec_v: 1134, 1134, 3836
\__enumext_before_args_exec_vii: . 1150, 1150,
    4679
\__enumext_before_args_exec_viii: 1154, 4945
\__enumext_before_env:nn ..... 204, 208
\__enumext_before_keys_exec: .. 53, 1118, 1122,
    3797
\__enumext_before_keys_exec_v: 1134, 1138, 3930
\__enumext_before_keys_exec_vii ..... 1150
\__enumext_before_keys_exec_vii: . 1158, 4633
\__enumext_before_keys_exec_viii: 1162, 4895
\__enumext_before_list: .. 104, 3729, 3729, 3791
\__enumext_before_list_v: ... 3833, 3833, 3925
\__enumext_before_list_vii: ... 122, 4628, 4675,
    4675
\__enumext_before_list_viii: .. 127, 4891, 4942,
    4942
\l__enumext_before_no_starred_key_v_tl 1140
\l__enumext_before_no_starred_key_vii_-
    tl ..... 1160
\l__enumext_before_no_starred_key_viii_-

```

```

    tl ..... 1164
\l__enumext_before_starred_key_v_tl ... 1136
\l__enumext_before_starred_key_vii_tl . 1152
\l__enumext_before_starred_key_viii_tl 1156
\__enumext_calc_hspace:NNNNNN 100, 3509, 3509,
    3540, 3545, 3588
\__enumext_check_ans_active: 73, 104, 122, 2139,
    2139, 3733, 4678
\g__enumext_check_ans_item_tl ..... 91
\g__enumext_check_ans_key_bool 74, 75, 146, 345,
    2198, 2204, 2974
\l__enumext_check_ans_key_bool 74, 2124, 2129,
    2195, 2201
\__enumext_check_ans_key_hook: .. 74, 105, 122,
    2192, 2192, 3768, 4686
\__enumext_check_ans_level: 73, 2139, 2145, 2149
\__enumext_check_ans_log: 74, 75, 89, 2238, 2238,
    2978
\__enumext_check_ans_log_msg_greater: 2238,
    2244, 2257
\__enumext_check_ans_log_msg_less: 2238, 2242,
    2247
\__enumext_check_ans_log_msg_same_ok: 2238,
    2243, 2252
\__enumext_check_ans_msg_greater: 2214, 2220,
    2233
\__enumext_check_ans_msg_less: 2214, 2218, 2223
\__enumext_check_ans_msg_same_ok: 2214, 2219,
    2228
\__enumext_check_ans_show: .. 74, 89, 2214, 2214,
    2976
\l__enumext_check_answers_bool 71, 73, 85, 87, 93,
    94, 146, 2102, 2128, 2143, 2476, 2500, 2507, 2531,
    2769, 2898, 3092, 3208, 3242, 4797
\__enumext_check_starred_cmd:n 36, 75, 91, 126,
    2262, 2262, 3936, 4175, 4908
\g__enumext_check_starred_cmd_int .. 98, 146,
    2265, 2271, 2276, 3427, 4243, 5032
\l__enumext_check_start_line_env_tl . 36, 146,
    308, 316, 324, 2268, 2274, 2277
\l__enumext_columns_sep_v_dim 3854, 3856, 3864
\l__enumext_columns_sep_vii_dim .. 4342, 4344,
    4353, 4365, 4441, 4864
\l__enumext_columns_sep_viii_dim . 4373, 4375,
    4384, 4396, 4490, 5142
\l__enumext_columns_v_int 1495, 1513, 1684, 3852,
    3860, 3872, 3877
\l__enumext_columns_vii_int .. 4347, 4350, 4354,
    4363, 4405, 4409, 4412, 4418, 4424, 4428, 4858, 4872
\l__enumext_columns_viii_int . 4378, 4381, 4385,
    4394, 4454, 4458, 4461, 4467, 4473, 4477, 5136, 5151
\l__enumext_counter_i_tl ..... 32, 588
\l__enumext_counter_ii_tl ..... 32, 589
\l__enumext_counter_iii_tl ..... 32, 590
\l__enumext_counter_iv_tl ..... 32, 591
\c__enumext_counter_style_tl ..... 35, 224
\g__enumext_counter_styles_tl . 30, 43, 52, 599,
    617
\l__enumext_counter_v_tl ..... 32, 592
\l__enumext_counter_vi_tl ..... 32, 593
\l__enumext_counter_vii_tl ..... 32, 594
\l__enumext_counter_viii_tl ..... 32, 595
\l__enumext_current_widest_dim 30, 52, 623, 719,
    765, 832
\__enumext_def_meta_key:nnn ... 136, 5377, 5405,
    5411, 5425
\__enumext_default_item:n ... 3204, 3204, 3268
\__enumext_define_counters:Nn 30, 579, 579, 588,
    589, 590, 591, 592, 593, 594, 595
\__enumext_endminipage: . 38, 370, 379, 573, 4556,
    4852, 5130
\g__enumext_envir_name_tl 36, 22, 280, 294, 353,
    2072, 2077, 2087, 2226, 2231, 2236, 2250, 2255, 2260
\l__enumext_envir_name_tl 35, 36, 96, 22, 250, 260,
    307, 315, 323, 3346, 4080, 5789, 5792, 5799, 5802,
    5809, 5812, 5819, 5822, 5828, 5832, 5838, 5842, 5899,
    5903
\__enumext_execute_after_env: 37, 71, 74, 75, 89,
    2964, 2964, 3807, 4885
\__enumext_fake_item_indent: . 1041, 1041, 3572
\l__enumext_fake_item_indent_v_dim 1060, 1065
\l__enumext_fake_item_indent_v_tl 1062, 3411,
    3415, 3422
\__enumext_fake_item_indent_vii: . 1041, 1070,
    3605
\l__enumext_fake_item_indent_vii_dim . 1073,
    1077
\l__enumext_fake_item_indent_vii_tl .. 1075,
    4847
\__enumext_fake_item_indent_viii: 1041, 1082,
    3610
\l__enumext_fake_item_indent_viii_dim 1085,
    1089
\l__enumext_fake_item_indent_viii_tl . 1087,
    5121
\l__enumext_fake_item_indent_X_tl ..... 85
\__enumext_fake_make_label_vii:n . 124, 4782,
    4782, 4839
\__enumext_fake_make_label_viii:n 5062, 5081,
    5113
\__enumext_filter_first_level:n .. 134, 5274,
    5274, 5308, 5319
\__enumext_filter_first_level_key:n 134, 5274,
    5279, 5283
\__enumext_filter_first_level_pair:nn . 134,
    5274, 5280, 5292
\__enumext_filter_save_key:n .. 78, 2391, 2399,
    2422, 2428, 2430, 2430, 5193, 5199, 5205, 5211, 5217,
    5223
\__enumext_filter_save_key_key:n .. 78, 2430,
    2435, 2439
\__enumext_filter_save_key_pair:nn 79, 2430,
    2436, 2447
\__enumext_filter_series:n 66, 1829, 1829, 1867,
    1879, 1884
\__enumext_filter_series_key:n 66, 1829, 1834,
    1838
\__enumext_filter_series_pair:nn .. 66, 1829,
    1835, 1846
\__enumext_first_item_tmp_vii: 121, 123, 4638,
    4711, 4711
\__enumext_first_item_tmp_viii: .. 128, 4900,
    4954, 4954
\g__enumext_footnote_standar_arg_seq .. 165,
    447, 458, 461
\g__enumext_footnote_standar_int 165, 441, 444,
    446, 449
\g__enumext_footnote_standar_int_seq .. 165,
    449, 454, 457, 462

```


`\g__enumext_footnote_starred_arg_seq` .. [165](#),
[477](#), [488](#), [491](#)
`\g__enumext_footnote_starred_int` [165](#), [471](#), [474](#),
[476](#), [479](#)
`\g__enumext_footnote_starred_int_seq` .. [165](#),
[479](#), [484](#), [487](#), [492](#)
`__enumext_footnotes_key_bool` [38](#)
`\l__enumext_footnotes_key_bool` [33](#), [38](#), [155](#), [391](#),
[395](#), [402](#), [503](#), [519](#), [533](#), [546](#)
`__enumext_footnotetext:nn` .. [430](#), [430](#), [459](#), [489](#)
`__enumext_foreach_add_body:n` . [137](#), [5426](#), [5486](#),
[5489](#)
`\l__enumext_foreach_after_tl` [5430](#), [5498](#)
`\l__enumext_foreach_before_tl` [5428](#), [5493](#)
`\g__enumext_foreach_default_keys_tl` ... [137](#)
`\l__enumext_foreach_default_keys_tl` ... [115](#),
[5448](#), [5469](#)
`__enumext_foreach_keyans:nn` .. [137](#), [5426](#), [5465](#),
[5467](#)
`\l__enumext_foreach_name_prop_tl` . [115](#), [5471](#),
[5496](#)
`\l__enumext_foreach_print_seq` [115](#), [5481](#), [5487](#),
[5491](#)
`\l__enumext_foreach_sep_tl` [5440](#), [5487](#)
`\l__enumext_foreach_start_int` [5432](#), [5483](#)
`\l__enumext_foreach_step_int` [5436](#), [5484](#)
`\l__enumext_foreach_stop_int` . [5434](#), [5476](#), [5478](#),
[5485](#)
`__enumext_foreach_wrapper:n` [5438](#), [5494](#)
`__enumext_getkeyans:nn` .. [132](#), [5162](#), [5176](#), [5180](#)
`__enumext_getkeyans_aux:n` [132](#), [5162](#), [5164](#), [5167](#)
`\l__enumext_hyperref_bool` . [33](#), [38](#), [39](#), [155](#), [388](#),
[405](#), [422](#), [2678](#), [3080](#), [4791](#)
`__enumext_hypertarget:nn` [39](#), [381](#), [407](#), [411](#), [427](#)
`__enumext_if_is_int:n` [216](#)
`__enumext_if_is_int:nTF` [216](#), [863](#), [877](#)
`__enumext_internal_mini_page`: [41](#), [102](#), [121](#), [560](#),
[560](#), [3620](#), [4651](#)
`__enumext_is_not_nested`: . [30](#), [35](#), [102](#), [121](#), [244](#),
[244](#), [3619](#), [4650](#)
`__enumext_is_on_first_level`: . [30](#), [36](#), [102](#), [121](#),
[244](#), [270](#), [3626](#), [4663](#)
`\g__enumext_item_anskey_int` [85](#), [91](#), [146](#), [340](#), [367](#),
[368](#), [2211](#), [2627](#), [3094](#)
`__enumext_item_answer_diff`: .. [74](#), [75](#), [89](#), [2207](#),
[2207](#), [2971](#)
`\g__enumext_item_answer_diff_int` . [74](#), [75](#), [146](#),
[341](#), [2209](#), [2216](#), [2240](#)
`\l__enumext_item_column_pos_vii_int` [123](#), [4412](#),
[4418](#), [4424](#), [4428](#), [4435](#), [4722](#), [4858](#), [4861](#)
`\l__enumext_item_column_pos_viii_int` .. [128](#),
[4461](#), [4467](#), [4473](#), [4477](#), [4484](#), [4965](#), [5136](#), [5139](#)
`\l__enumext_item_column_pos_X_int` [171](#)
`\g__enumext_item_count_all_vii_int` [123](#), [4436](#),
[4723](#), [4872](#), [4880](#)
`\g__enumext_item_count_all_viii_int` [128](#), [4485](#),
[4966](#), [5150](#), [5159](#)
`\g__enumext_item_count_all_X_int` [171](#)
`\g__enumext_item_number_bool` [146](#)
`\l__enumext_item_number_bool` [73](#), [153](#), [2161](#), [2166](#),
[2170](#), [2174](#), [2187](#), [2812](#), [2935](#), [3211](#), [3245](#), [4800](#)
`\g__enumext_item_number_int` .. [73](#), [146](#), [339](#), [366](#),
[368](#), [2160](#), [2165](#), [2169](#), [2173](#), [2186](#), [2211](#), [3210](#), [3244](#),
[4799](#)
`__enumext_item_peek_args_vii`: [123](#), [4719](#), [4724](#),
[4726](#)
`__enumext_item_peek_args_viii`: .. [128](#), [4962](#),
[4967](#), [4969](#)
`__enumext_item_starred_exec`: . [94](#), [3223](#), [3250](#),
[3292](#), [3313](#)
`__enumext_item_starred_exec:nn` .. [3223](#), [3223](#),
[3266](#)
`\l__enumext_item_starred_vii_bool` [4741](#), [4755](#),
[4804](#)
`\l__enumext_item_starred_viii_bool` [4984](#), [4999](#),
[5091](#), [5122](#)
`\l__enumext_item_starred_X_bool` [171](#)
`__enumext_item_std:w` [38](#), [93](#), [94](#), [98](#), [370](#), [374](#), [3214](#),
[3220](#), [3248](#), [3411](#), [3415](#), [3422](#)
`\g__enumext_item_symbol_aux_tl` . [94](#), [119](#), [3228](#),
[3231](#), [3256](#), [3300](#), [3320](#)
`\g__enumext_item_symbol_aux_vii_tl` [4763](#), [4806](#),
[4809](#), [4813](#), [4815](#)
`\g__enumext_item_symbol_aux_X_tl` [171](#)
`\l__enumext_item_symbol_sep_vii_dim` .. [4771](#),
[4778](#), [4812](#), [4814](#)
`\l__enumext_item_symbol_vii_tl` [4809](#)
`\l__enumext_item_text_vii_box` [4831](#), [4856](#)
`\l__enumext_item_text_viii_box` ... [5105](#), [5134](#)
`\l__enumext_item_text_X_box` [171](#)
`\l__enumext_item_width_vii_dim` ... [4351](#), [4360](#),
[4439](#), [4447](#), [4448](#)
`\l__enumext_item_width_viii_dim` .. [4382](#), [4391](#),
[4488](#), [4496](#), [4497](#)
`\l__enumext_item_width_X_dim` [171](#)
`\l__enumext_item_wrap_key_bool` . [98](#), [146](#), [3164](#),
[3184](#), [3435](#), [3442](#), [3469](#), [4237](#), [4255](#), [4985](#), [5000](#), [5068](#)
`\l__enumext_itemindent_X_dim` [56](#)
`\l__enumext_itemsep_i_skip` ... [1356](#), [1363](#), [1366](#),
[1368](#), [1375](#), [1379](#), [1382](#), [1384](#), [1524](#), [1531](#), [1533](#), [1534](#),
[1539](#), [1543](#), [1545](#), [1546](#)
`\l__enumext_itemsep_ii_skip` .. [1396](#), [1403](#), [1406](#),
[1408](#), [1415](#), [1419](#), [1422](#), [1424](#)
`\l__enumext_itemsep_iii_skip` . [1435](#), [1442](#), [1445](#),
[1447](#), [1454](#), [1458](#), [1461](#), [1463](#)
`\l__enumext_itemsep_vii_skip` [4878](#)
`\l__enumext_itemsep_viii_skip` [5157](#)
`\l__enumext_joined_item_aux_vii_int` .. [4433](#),
[4434](#), [4435](#), [4436](#), [4442](#)
`\l__enumext_joined_item_aux_viii_int` . [4482](#),
[4483](#), [4484](#), [4485](#), [4491](#)
`\l__enumext_joined_item_aux_X_int` [171](#)
`__enumext_joined_item_vii:w` .. [123](#), [4719](#), [4729](#),
[4730](#), [4732](#)
`\l__enumext_joined_item_vii_int` .. [4404](#), [4405](#),
[4408](#), [4410](#), [4416](#), [4421](#), [4426](#), [4431](#), [4433](#), [4439](#)
`__enumext_joined_item_viii:w` . [128](#), [4962](#), [4972](#),
[4973](#), [4975](#)
`\l__enumext_joined_item_viii_int` . [4453](#), [4454](#),
[4457](#), [4459](#), [4465](#), [4470](#), [4475](#), [4480](#), [4482](#), [4488](#)
`\l__enumext_joined_item_X_int` [171](#)
`\l__enumext_joined_width_vii_dim` . [4437](#), [4444](#),
[4447](#), [4833](#), [4841](#)
`\l__enumext_joined_width_viii_dim` [4486](#), [4493](#),
[4496](#), [5107](#), [5115](#)
`\l__enumext_joined_width_X_dim` [171](#)
`__enumext_keyans_addto_prop:n` [89](#), [2983](#), [2983](#),
[3424](#), [4240](#)

__enumext_keyans_addto_seq:n . 91, 3056, 3056, 3426, 4242
 __enumext_keyans_addto_seq_link: 3056, 3074, 3076, 5031
 __enumext_keyans_default_item:n .. 97, 3406, 3406, 3443
 \l__enumext_keyans_env_bool 22, 3651, 3664, 3816, 3906
 __enumext_keyans_fake_item_indent: .. 1041, 1057, 3562
 \l__enumext_keyans_level_h_int .. 127, 16, 792, 816, 2796, 2924, 3034, 4657, 4917, 4918
 \l__enumext_keyans_level_int .. 16, 1644, 2792, 2920, 3029, 3174, 3815, 3820, 4203
 __enumext_keyans_make_label: . 98, 3447, 3447, 3560
 __enumext_keyans_make_label_box: 3447, 3451, 3456, 3493
 __enumext_keyans_make_label_std: 3447, 3459, 3481
 __enumext_keyans_mini_right_cmd:n 63, 1646, 1679, 1679
 __enumext_keyans_mini_set_vskip: 59
 __enumext_keyans_minipage_add_space: 1475, 1501, 3845
 __enumext_keyans_minipage_set_skip: . 1475, 1475, 1503
 __enumext_keyans_multi_addvspace: 1275, 1286, 3869
 __enumext_keyans_multi_set_vskip: 56, 1275, 1275, 1288
 __enumext_keyans_multicols_start: 3833, 3848, 3850
 __enumext_keyans_multicols_stop: 1683, 3833, 3875, 3904
 __enumext_keyans_name_and_start: 30, 36, 127, 301, 301, 3817, 4091, 4922
 __enumext_keyans_parse_keys:n 3829, 3829, 3924
 __enumext_keyans_pic_arg_two: 111, 4084, 4107, 4138
 \l__enumext_keyans_pic_level_int .. 16, 1625, 2800, 2928, 2986, 3024, 3059, 4086, 4087
 __enumext_keyans_pic_parse_keys:n 4084, 4093, 4137
 __enumext_keyans_pic_safe_exec: . 111, 4084, 4084, 4136
 __enumext_keyans_pic_skip_abs:N . 111, 4084, 4100, 4111
 __enumext_keyans_pos_mark_set: 92, 3130, 3130, 3167, 3199
 __enumext_keyans_pre_itemsep_skip: .. 1475, 1494, 1521
 __enumext_keyans_redefine_item: .. 98, 3429, 3429, 3559
 __enumext_keyans_ref: 47, 839, 854, 3561
 __enumext_keyans_ref:n 47, 836, 839, 839
 __enumext_keyans_safe_exec: . 3809, 3809, 3923
 __enumext_keyans_save_item_opt:n 91, 98, 3097, 3097, 3420, 4239
 __enumext_keyans_set_item_width: 108, 3910, 3910, 3932
 __enumext_keyans_show_ans: 92, 3130, 3159, 3486, 3501, 4244
 __enumext_keyans_show_item_opt: 91, 98, 3097, 3104, 3423, 4252
 __enumext_keyans_show_item_opt_viii: .. 92, 3097, 3117, 5124
 __enumext_keyans_show_pos: 93, 3130, 3172, 3487, 3502, 4245
 __enumext_keyans_starred_item:n .. 98, 3418, 3418, 3438
 __enumext_keyans_starred_item_star: .. 129, 4997, 5025, 5093
 __enumext_keyans_store_ref: .. 90, 3003, 3003, 3425, 4241, 5029
 __enumext_keyans_store_ref_aux_i: 90, 3003, 3015, 3018
 __enumext_keyans_store_ref_aux_ii: 90, 3003, 3044, 3046
 __enumext_keyans_unknown_keys:n . 3341, 3347, 3352, 4081
 __enumext_keyans_unknown_keys:nn 3341, 3354, 3356
 __enumext_keyans_wrapper_label:n 99
 __enumext_keyans_wrapper_label_viii:n 5062, 5062, 5098
 __enumext_keyans_wrapper_item_v:n 3470, 3473
 __enumext_keyans_wrapper_item_viii:n 5069, 5073
 __enumext_keyans_wrapper_label:n 3447, 3463, 3489, 3504, 4249
 __enumext_keyans_wrapper_opt_v:n 3112
 __enumext_keyans_wrapper_opt_viii:n .. 3125
 \l__enumext_label_copy_i_tl .. 2593, 3022, 3027, 3032, 3037
 \l__enumext_label_copy_v_tl 3032
 \l__enumext_label_copy_vi_tl 3027
 \l__enumext_label_copy_vii_tl 2569, 2580, 2609, 3022
 \l__enumext_label_copy_viii_tl 3037
 \l__enumext_label_copy_X_tl 157
 \l__enumext_label_fill_left_v_tl 3485
 \l__enumext_label_fill_left_X_tl 85
 \l__enumext_label_fill_right_v_tl 3490
 \l__enumext_label_fill_right_X_tl 85
 \l__enumext_label_font_style_v_tl 3488, 3503, 4248, 4256
 \l__enumext_label_font_style_vii_tl ... 4819
 \l__enumext_label_font_style_viii_tl .. 5097
 \l__enumext_label_i_tl 711
 \l__enumext_label_ii_tl 711
 \l__enumext_label_iii_tl 711
 \l__enumext_label_iv_tl 711
 __enumext_label_style:Nnn 30, 43, 612, 612, 627, 716, 762, 827, 829
 \l__enumext_label_v_tl 91, 824, 2991, 3064, 3133, 3927, 4115
 \l__enumext_label_vi_tl 91, 824, 2988, 3061, 4249, 4257
 \l__enumext_label_vii_tl . 757, 4750, 4773, 4780
 \l__enumext_label_viii_tl 757, 4994, 5023, 5027
 \l__enumext_label_width_by_box .. 52, 608, 609
 __enumext_label_width_by_box:Nn 43, 606, 606, 611, 623, 887, 3132
 \l__enumext_labelsep_v_dim ... 3153, 3859, 4127, 4251
 \l__enumext_labelsep_vii_dim . 2695, 4346, 4356, 4440, 4715, 4771, 4826, 4835
 \l__enumext_labelsep_viii_dim 4377, 4387, 4489,

4958, 5035, 5100, 5109
 \l__enumext_labelwidth_v_dim . 832, 3143, 3148,
 3169, 3201, 3499, 3859, 4127, 4246
 \l__enumext_labelwidth_vii_dim ... 2698, 4346,
 4355, 4440, 4715, 4817, 4834
 \l__enumext_labelwidth_viii_dim .. 4377, 4386,
 4489, 4958, 5042, 5059, 5095, 5108
 \l__enumext_leftmargin_tmp_v_bool . 112, 4109
 \l__enumext_leftmargin_tmp_X_bool 56
 \l__enumext_leftmargin_tmp_X_dim 56
 \l__enumext_leftmargin_X_dim 56
 __enumext_level: 212, 212, 741, 743, 752, 754, 1044,
 1048, 1052, 1120, 1124, 1128, 1132, 1215, 1217, 1219,
 1221, 1263, 1265, 1267, 1269, 1273, 1307, 1313, 1318,
 1320, 1323, 1326, 1339, 1342, 1653, 1657, 1663, 1726,
 1728, 1730, 1733, 1740, 1742, 1744, 1747, 2386, 2388,
 2390, 2418, 2419, 2421, 2478, 2486, 2490, 2494, 2705,
 2709, 3213, 3214, 3218, 3219, 3220, 3228, 3236, 3237,
 3240, 3247, 3248, 3252, 3255, 3257, 3291, 3293, 3294,
 3296, 3299, 3310, 3311, 3314, 3315, 3317, 3657, 3670,
 3677, 3685, 3688, 3690, 3692, 3693, 3694, 3695, 3698,
 3703, 3709, 3715, 3722, 3735, 3737, 3740, 3741, 3743,
 3747, 3753, 3778, 3783, 3794, 3796
 \l__enumext_level_h_int 121, 16, 253, 276, 289, 778,
 809, 1632, 2157, 2177, 2588, 3665, 4652, 4653
 \l__enumext_level_int . 102, 16, 214, 263, 275, 290,
 562, 1227, 1352, 1631, 2151, 2183, 2565, 2575, 2581,
 2587, 2594, 2603, 2608, 2966, 3576, 3621, 3622, 3633,
 3641, 3655, 3668, 3699, 3824, 4199, 4695, 4705, 4930,
 5829, 5833, 5839, 5843
 __enumext_list_arg_two_i: 3541
 __enumext_list_arg_two_ii: 3541
 __enumext_list_arg_two_iii: 3541
 __enumext_list_arg_two_iv: 3541
 __enumext_list_arg_two_v: . 98, 3541, 3929, 4110
 __enumext_list_arg_two_vii: 3582, 4632
 __enumext_list_arg_two_viii: 3582, 4894
 \l__enumext_listoffset_v_dim . 3861, 3915, 3918
 \l__enumext_listparindent_vii_dim 4842, 4846
 \l__enumext_listparindent_viii_dim 5116, 5120
 __enumext_log_answer_vars: . 37, 355, 363, 2973
 __enumext_log_global_vars: . 37, 355, 355, 2972
 __enumext_make_label: 95, 3271, 3271, 3570
 __enumext_make_label_box: ... 3271, 3275, 3280,
 3303
 __enumext_make_label_std: ... 3271, 3283, 3287
 \l__enumext_mark_answer_sym_tl 80, 2330, 2544,
 2721, 3155, 5039, 5046
 \l__enumext_mark_answer_sym_v_tl . 3155, 3187
 \l__enumext_mark_answer_sym_viii_tl ... 5039
 \l__enumext_mark_position_str 119, 2336, 2337,
 2338, 2542, 3157, 5040, 5057
 \l__enumext_mark_position_v_str .. 119, 3157
 \l__enumext_mark_position_viii_str 119, 5040,
 5057
 \l__enumext_mark_ref_sym_tl .. 2318, 2683, 3088
 \l__enumext_mark_sep_tmpa_dim 119, 3133, 3143,
 3148
 \l__enumext_mark_sep_tmppb_dim 119, 3138, 3142,
 3147, 3156
 \l__enumext_mark_sym_sep_dim . 2333, 2693, 2695,
 2698, 2701, 2703
 \l__enumext_mark_sym_sep_v_dim ... 3151, 3153,
 3156, 3169, 3201
 \l__enumext_mark_sym_sep_viii_dim 5033, 5035,
 5042, 5059
 \l__enumext_meta_path_tl . 115, 5401, 5402, 5404,
 5405
 \c__enumext_meta_paths_prop 136, 5377
 __enumext_mini_addvspace_vii: 62, 1611, 1611,
 4514
 __enumext_mini_addvspace_viii: 62, 1611, 1617,
 4579
 __enumext_mini_env* 560
 __enumext_mini_page 1663, 1690, 3747, 3846, 4516,
 4581, 4602
 __enumext_mini_right_cmd:n . 62, 63, 1648, 1650,
 1650
 __enumext_mini_set_vskip_vii: 61, 1554, 1554,
 1613
 __enumext_mini_set_vskip_viii: 61, 1554, 1576,
 1619
 __enumext_minipage:w 38, 370, 378, 567, 4539, 4841,
 5115
 \l__enumext_minipage_active_v_bool 3843, 3866,
 3891
 \g__enumext_minipage_active_vii_bool .. 119,
 4528, 4537, 4559
 \l__enumext_minipage_active_vii_bool . 4510,
 4521
 \g__enumext_minipage_active_viii_bool 4592,
 4600, 4619
 \l__enumext_minipage_active_viii_bool 4575,
 4586
 \g__enumext_minipage_active_X_bool ... 171
 \l__enumext_minipage_active_X_bool 72
 __enumext_minipage_add_space: . 57, 105, 1303,
 1329, 3745
 \g__enumext_minipage_after_skip 72, 1558, 1570,
 4557, 4617
 \l__enumext_minipage_after_skip .. 57, 105, 72,
 1316, 1356, 1358, 1363, 1366, 1370, 1375, 1379, 1382,
 1386, 1398, 1403, 1406, 1410, 1415, 1419, 1422, 1426,
 1437, 1442, 1445, 1449, 1454, 1458, 1461, 1465, 1477,
 1491, 1524, 1526, 1531, 1533, 1535, 1539, 1543, 1545,
 1547, 1578, 1591, 1605, 1659, 1686, 3901
 \g__enumext_minipage_center_vii_bool . 4543,
 4560
 \g__enumext_minipage_center_viii_bool 4604,
 4620
 \g__enumext_minipage_center_X_bool ... 171
 \l__enumext_minipage_hsep_v_dim 3841
 \l__enumext_minipage_hsep_vii_dim 4508
 \l__enumext_minipage_hsep_viii_dim ... 4573
 \l__enumext_minipage_left_skip 72, 1478, 1556,
 1561, 1565, 1579, 1583, 1597, 1615, 1621
 \l__enumext_minipage_left_v_dim .. 3839, 3846
 \l__enumext_minipage_left_vii_dim 4504, 4516
 \l__enumext_minipage_left_viii_dim 4569, 4581
 \l__enumext_minipage_left_X_dim 72
 \g__enumext_minipage_right_skip 72, 1557, 1562,
 1566, 4542, 4603
 \l__enumext_minipage_right_skip . 57, 72, 1305,
 1311, 1316, 1318, 1320, 1479, 1480, 1486, 1491, 1492,
 1493, 1498, 1580, 1587, 1601, 1665, 1692
 \l__enumext_minipage_right_v_dim . 1681, 1690,
 3837, 3841
 \g__enumext_minipage_right_vii_dim 119, 4512,
 4539, 4562

```

\l__enumext_minipage_right_vii_dim 119, 4502,
    4507, 4513
\g__enumext_minipage_right_viii_dim .. 4577,
    4602, 4622
\l__enumext_minipage_right_viii_dim .. 4567,
    4572, 4578
\g__enumext_minipage_right_X_dim ..... 171
\g__enumext_minipage_right_X_skip .... 171
\__enumext_minipage_set_skip: . 57, 1303, 1303,
    1331
\g__enumext_minipage_stat_int .. 105, 72, 1670,
    1697, 3744, 3755, 3760, 3844, 3893, 3898
\l__enumext_minipage_temp_skip 72, 1377, 1387,
    1390, 1417, 1427, 1430, 1456, 1466, 1469, 1541, 1548,
    1550
\l__enumext_miniright_code_vii_box 4550, 4554
\g__enumext_miniright_code_vii_tl 119, 4545,
    4552, 4561
\l__enumext_miniright_code_viii_box .. 4611,
    4615
\g__enumext_miniright_code_viii_tl 4606, 4613,
    4621
\l__enumext_miniright_code_X_box ..... 171
\l__enumext_mode_box_bool .... 632, 3278, 3454
\__enumext_multi_addvspace: 55, 104, 1258, 1258,
    3706
\__enumext_multi_set_vskip: 55, 1213, 1213, 1260
\l__enumext_multicols_above_ii_skip ... 1232
\l__enumext_multicols_above_iii_skip .. 1241
\l__enumext_multicols_above_iv_skip ... 1250
\l__enumext_multicols_above_v_skip 1277, 1291,
    1301, 1492
\l__enumext_multicols_above_X_skip .... 64
\l__enumext_multicols_below_ii_skip .. 1359,
    1368, 1372, 1384, 1389
\l__enumext_multicols_below_iii_skip . 1399,
    1408, 1412, 1424, 1429
\l__enumext_multicols_below_iv_skip .. 1438,
    1447, 1451, 1463, 1468
\l__enumext_multicols_below_v_skip 1281, 1295,
    1493, 1527, 1534, 1536, 1546, 1549, 3883
\l__enumext_multicols_below_X_skip .... 64
\g__enumext_multicols_right_X_skip .... 64
\__enumext_multicols_start: 103, 105, 3682, 3682,
    3749
\__enumext_multicols_stop: 104, 1655, 3712, 3712,
    3765
\__enumext_nested_base_line_fix: 50, 102, 961,
    967, 3637
\__enumext_newlabel:nn 33, 39, 82, 415, 415, 2619,
    3050
\l__enumext_newlabel_arg_one_tl 33, 39, 82, 90,
    157, 2612, 2620, 2682, 3039, 3051, 3086
\l__enumext_newlabel_arg_two_tl 33, 39, 81, 157,
    2568, 2578, 2591, 2606, 2621, 3026, 3031, 3036, 3052
\__enumext_parse_foreach_keys:n .. 5426, 5442,
    5459
\__enumext_parse_foreach_keys:nn . 5426, 5449,
    5461
\__enumext_parse_keys:n 50, 67, 3628, 3628, 3790
\__enumext_parse_keys_vii:n 67, 4627, 4665, 4665
\__enumext_parse_keys_viii:n . 4890, 4935, 4935
\__enumext_parse_save_key:n 78, 2411, 2416, 2416
\__enumext_parse_save_key_vii:n 78, 2406, 2416,
    2424
\__enumext_parse_series:n .. 67, 102, 122, 1855,
    1855, 3636, 4671
\__enumext_parse_store_keys:n ..... 102
\l__enumext_parsep_i_skip ..... 1230, 1234
\l__enumext_parsep_ii_skip ..... 1239, 1243
\l__enumext_parsep_iii_skip ..... 1248, 1252
\l__enumext_parsep_vii_skip ..... 4843
\l__enumext_parsep_viii_skip ..... 5117
\l__enumext_partopsep_v_skip . 1293, 1297, 1488,
    1511
\l__enumext_partopsep_viii_skip ..... 1589
\__enumext_phantomsection: 39, 381, 408, 412, 428
\__enumext_pre_itemsep_skip: 57, 58, 1321, 1350,
    1350
\__enumext_print_footnote: .. 430, 452, 516, 521
\__enumext_print_footnote_mini: 430, 482, 543,
    548
\__enumext_print_footnote_standar: 494, 510,
    574
\__enumext_print_footnote_starred: 494, 539,
    554, 558
\__enumext_print_keyans_box:NN 80, 2536, 2536,
    2549, 2697, 2708, 3168, 3200, 5041, 5058
\l__enumext_print_keyans_i_tl .... 5200, 5232
\l__enumext_print_keyans_ii_tl ... 5206, 5233
\l__enumext_print_keyans_iii_tl .. 5212, 5234
\l__enumext_print_keyans_iv_tl ... 5218, 5235
\l__enumext_print_keyans_star_bool . 50, 133,
    119, 973, 985, 5255, 5260
\l__enumext_print_keyans_starred_tl 132, 133,
    119, 5194, 5253
\l__enumext_print_keyans_vii_tl 132, 5224, 5236
\l__enumext_print_keyans_X_tl ..... 119
\__enumext_printkeyans:nnn 133, 5229, 5237, 5240
\__enumext_redefine_item: . 95, 3260, 3260, 3569
\l__enumext_ref_key_arg_tl 45, 37, 227, 733, 734,
    746, 777, 780, 788, 794, 802, 841, 842, 850
\l__enumext_ref_the_count_tl . 45, 37, 739, 745,
    785, 788, 799, 802, 847, 850
\__enumext_regex_counter_style: 35, 45, 222, 222
\__enumext_register_counter_style:Nn .. 596,
    596, 601, 602, 603, 604, 605
\__enumext_remove_extra_parsep_vii: .. 4645,
    4867, 4867
\__enumext_remove_extra_parsep_viii: . 4907,
    5145, 5145
\l__enumext_renew_counter_v_tl . 848, 856, 858
\l__enumext_renew_counter_vii_tl 786, 811, 813
\l__enumext_renew_counter_viii_tl . 800, 818,
    820
\l__enumext_renew_counter_X_tl ..... 37
\__enumext_renew_footnote: .. 430, 434, 500, 505
\__enumext_renew_footnote_mini: 430, 464, 530,
    535
\__enumext_renew_footnote_standar: 494, 494,
    566
\__enumext_renew_footnote_starred: 494, 526,
    4837, 5111
\__enumext_reset_global_bool: .. 331, 334, 343
\__enumext_reset_global_int: ... 331, 333, 337
\__enumext_reset_global_tl: .... 331, 335, 349
\__enumext_reset_global_vars: . 37, 89, 331, 331,
    2980

```

```

\l__enumext_resume_active_bool 67, 69, 46, 1859,
    1979
\__enumext_resume_counter: .. 68, 69, 1977, 1983,
    1990
\__enumext_resume_counter:n . 67, 69, 1948, 1953,
    1977, 1977, 2047, 2055
\__enumext_resume_counter_save_ans: .. 69, 70,
    1977, 1988, 2020
\__enumext_resume_counter_series: . 69, 1977,
    1986, 2003
\g__enumext_resume_int ... 46, 1900, 1994, 1995
\__enumext_resume_last:n .. 67, 1855, 1861, 1874
\l__enumext_resume_name_tl 46, 1896, 1904, 1907,
    1923, 1931, 1934, 1980, 1981, 2009, 2016
\__enumext_resume_save_counter: . 67, 105, 122,
    1887, 1887, 3771, 4689
\__enumext_resume_series:n . 68, 1823, 1944, 1944
\__enumext_resume_starred: . 70, 1824, 2041, 2041
\g__enumext_resume_vii_int 46, 1927, 1999, 2000
\l__enumext_rightmargin_vii_dim .. 4358, 4362,
    4367
\l__enumext_rightmargin_viii_dim . 4389, 4393,
    4398
\__enumext_safe_exec: .. 41, 102, 3617, 3617, 3789
\__enumext_safe_exec_vii: . 41, 4626, 4648, 4648
\__enumext_safe_exec_viii: 127, 4889, 4911, 4911
\__enumext_scan_tokens:n ... 88, 199, 199, 2961
\__enumext_second_part: .. 105, 3751, 3751, 3803
\__enumext_second_part_v: ... 3833, 3889, 3937
\l__enumext_series_name_tl ..... 69
\l__enumext_series_str . 67, 102, 122, 1821, 1857,
    1865, 1866, 1868, 1870, 1891, 1894, 1898, 1918, 1921,
    1925, 3632, 4669
\__enumext_set_error:nn ..... 5336, 5373, 5375
\__enumext_set_item_width: 105, 3773, 3773, 3799
\__enumext_set_parse:n ..... 5336, 5347, 5363
\l__enumext_setkey_tmpa_int ... 110, 5340, 5344
\l__enumext_setkey_tmpa_seq .. 110, 5338, 5348,
    5354, 5356, 5358, 5370
\l__enumext_setkey_tmpa_tl .... 110, 5346, 5350
\l__enumext_setkey_tmppb_seq .. 110, 5339, 5342,
    5346, 5347
\l__enumext_setkey_tmppb_tl 110, 5365, 5367, 5368
\l__enumext_show_answer_bool . 2305, 2324, 2715,
    3109, 3122, 3163, 3468, 5037, 5067
\__enumext_show_length:nnn .. 52, 230, 230, 5588,
    5589, 5590, 5591, 5592, 5593, 5594, 5595, 5596, 5597,
    5603, 5604, 5605, 5606, 5607, 5608, 5609, 5610, 5611,
    5612
\l__enumext_show_pos_tmp_int . 119, 3176, 3179,
    3194
\l__enumext_show_position_bool ... 2308, 2327,
    2719, 3110, 3123, 3183, 5044
\g__enumext_standar_bool 35, 102, 22, 252, 255, 274,
    346, 496, 512, 1889, 1954, 1966, 1992, 2005, 2043,
    2182, 2196, 2573, 2586, 2601, 3652
\l__enumext_standar_bool 102, 105, 22, 1639, 2574,
    3624, 3770, 4662
\l__enumext_standar_first_bool 36, 102, 22, 279,
    1876, 2023, 2085, 2092
\__enumext_standar_item_vii:w . 123, 4719, 4737,
    4739
\__enumext_standar_item_viii:w 128, 129, 4962,
    4980, 4982
\__enumext_standar_ref: .... 45, 731, 750, 3571
\__enumext_standar_ref:n .... 45, 723, 731, 731
\g__enumext_standar_series_tl . 46, 1878, 1879,
    2045, 2048
\__enumext_standar_unknown_keys:n 3384, 3388,
    3392
\__enumext_standar_unknown_keys:nn 3384, 3394,
    3396
\g__enumext_starred_bool 35, 121, 22, 262, 265, 288,
    347, 1638, 1916, 1959, 1970, 1997, 2012, 2051, 2156,
    2202, 2564, 3020, 4563
\l__enumext_starred_bool 121, 122, 127, 22, 2602,
    2637, 2643, 2691, 3625, 4661, 4688, 4923, 4927
\__enumext_starred_columns_set_vii: .. 4340,
    4340, 4636
\__enumext_starred_columns_set_viii: . 4340,
    4371, 4898
\l__enumext_starred_first_bool 36, 121, 22, 293,
    971, 984, 1881, 2032, 2085, 2092
\__enumext_starred_item_vii:w . 123, 124, 4719,
    4736, 4753
\__enumext_starred_item_vii_aux_i:w .. 4719,
    4758, 4761
\__enumext_starred_item_vii_aux_ii:w . 4719,
    4759, 4764, 4766
\__enumext_starred_item_vii_aux_iii:w 4719,
    4769, 4776
\__enumext_starred_item_viii:w 128, 129, 4979,
    4997, 4997
\__enumext_starred_item_viii_aux_i:w .. 129,
    4997, 5003, 5006
\__enumext_starred_item_viii_aux_ii:w . 129,
    4997, 5004, 5018, 5020
\__enumext_starred_joined_item_vii:n 117, 123,
    4402, 4402, 4734
\__enumext_starred_joined_item_viii:n . 117,
    128, 4402, 4451, 4977
\__enumext_starred_ref: .... 46, 775, 807, 3602
\__enumext_starred_ref:n .... 46, 769, 775, 775
\g__enumext_starred_series_tl . 46, 1883, 1884,
    2053, 2056
\__enumext_starred_unknown_keys:n 3366, 3368,
    3370
\__enumext_starred_unknown_keys:nn 3366, 3372,
    3374
\__enumext_start_from:NNn 47, 861, 861, 874, 896,
    902
\l__enumext_start_i_int ..... 1995, 2007, 2026
\__enumext_start_item_tmp_vii: 121, 4639, 4719,
    4719
\__enumext_start_item_tmp_viii: .. 4901, 4962,
    4962
\__enumext_start_item_vii:w 123, 125, 4745, 4750,
    4773, 4780, 4828, 4828
\__enumext_start_item_viii:w .. 129, 4989, 4994,
    5023, 5102, 5102
\g__enumext_start_line_tl 36, 22, 281, 295, 352,
    2226, 2231, 2236, 2250, 2255, 2260
\__enumext_start_list:nn . 38, 99, 370, 372, 3793,
    3926, 4630, 4892
\__enumext_start_list_tag:n .. 3939, 3965, 4838,
    5112
\__enumext_start_mini_vii: 122, 4500, 4500, 4680
\__enumext_start_mini_viii: ... 127, 4565, 4565,

```



```

4946
\__enumext_start_save_ans_msg: 71, 2069, 2069,
2094
\__enumext_start_store_level: . 103, 3646, 3646,
3792
\__enumext_start_store_level_vii: 122, 4629,
4691, 4691
\l__enumext_start_vii_int ... 2000, 2014, 2035
\l__enumext_start_X_int ..... 85
\__enumext_stop_item_tmp_vii: .. 121, 123, 125,
4638, 4644, 4721, 4830
\__enumext_stop_item_tmp_viii: 128, 4900, 4906,
4964, 5104
\__enumext_stop_item_vii: 125, 126, 4828, 4830,
4850
\__enumext_stop_item_viii: ... 5102, 5104, 5128
\__enumext_stop_list: 38, 119, 122, 370, 373, 3717,
3725, 3879, 3886, 4523, 4531, 4588, 4595
\__enumext_stop_list_tag:n ... 3939, 3981, 4853,
5131
\__enumext_stop_mini_vii: 119, 122, 4500, 4519,
4684
\__enumext_stop_mini_viii: 128, 4565, 4584, 4950
\__enumext_stop_save_ans_msg: . 71, 2069, 2074,
2970
\__enumext_stop_start_list_tag: .. 3939, 3973,
4840, 5114
\__enumext_stop_store_level: .. 103, 104, 3675,
3675, 3718, 3726
\__enumext_stop_store_level_vii: .. 119, 122,
4524, 4532, 4691, 4701
\l__enumext_store_active_bool . 31, 71, 97, 2024,
2033, 2101, 2788, 2916, 3650, 3663, 3811, 3819, 4195,
4693, 4703, 4913, 4929
\__enumext_store_active_keys:n 77, 78, 102, 2384,
2384, 3643
\__enumext_store_active_keys_vii:n 77, 78, 122,
2384, 2394, 4672
\__enumext_store_addto_prop:n 79, 89, 2460, 2460,
2468, 2628, 3001, 5028
\__enumext_store_addto_seq:n 79, 91, 2469, 2469,
2473, 2480, 2494, 2502, 2511, 2525, 2533, 2686, 3091
\__enumext_store_anskey_arg:n .. 82, 85, 87, 88,
2625, 2625, 2781, 2959
\l__enumext_store_anskey_arg_tl 32, 82, 83, 103,
2634, 2639, 2641, 2646, 2653, 2656, 2666, 2671, 2674,
2680, 2686
\__enumext_store_anskey_env:n . 88, 2910, 2914,
2944
\l__enumext_store_anskey_env_tl .. 32, 88, 103,
2946, 2948, 2950, 2953, 2961
\__enumext_store_anskey_safe_outer: .. 85, 88
\l__enumext_store_columns_break_bool . 2636,
2737, 2823
\l__enumext_store_current_label_tl 31, 89, 91,
129, 97, 2985, 2988, 2991, 2997, 2999, 3001, 3058,
3061, 3064, 3070, 3072, 3082, 3091, 5008, 5013, 5014,
5027, 5028, 5030
\l__enumext_store_current_label_tmp_tl . 31,
97
\l__enumext_store_current_opt_arg_tl . 31, 91,
129, 97, 3101, 3106, 3113, 3119, 3126, 5016
\__enumext_store_internal_ref: .. 81, 82, 2550,
2550, 2631
\l__enumext_store_item_join_int .. 2644, 2648,
2740, 2826
\l__enumext_store_item_star_bool . 2651, 2742,
2828
\l__enumext_store_item_symbol_sep_dim 2663,
2668, 2747, 2833
\l__enumext_store_item_symbol_tl . 2654, 2658,
2745, 2831
\l__enumext_store_keyans_item_opt_sep_v_-
tl ..... 2995, 2997, 3068, 3070
\l__enumext_store_keyans_item_opt_sep_-
viii_tl ..... 5011, 5013
\__enumext_store_level_close: . 79, 2474, 2498,
3679
\__enumext_store_level_close_vii: . 80, 2505,
2529, 4707
\__enumext_store_level_open: 79, 103, 2474, 2474,
3658, 3671
\__enumext_store_level_open_vii: .. 80, 2505,
2505, 4697
\g__enumext_store_name_tl . 31, 71, 97, 351, 358,
359, 360, 361, 2077, 2103, 2225, 2230, 2235, 2249,
2254, 2259, 2968
\l__enumext_store_name_tl . 31, 71, 73, 97, 1910,
1913, 1937, 1940, 2028, 2037, 2072, 2081, 2082, 2103,
2104, 2106, 2107, 2109, 2111, 2112, 2114, 2116, 2117,
2141, 2462, 2464, 2471, 2614, 2615, 2727, 3041, 3042,
3193, 5052
\l__enumext_store_ref_key_bool 82, 2321, 2629,
2677, 3005, 3079
\l__enumext_store_save_key_vii_bool .. 2396,
2426
\l__enumext_store_save_key_vii_tl 2398, 2399,
2427, 2428, 2509, 2517, 2521, 2525
\l__enumext_store_save_key_X_bool .. 77, 119
\l__enumext_store_save_key_X_tl .. 77, 78, 119
\l__enumext_store_upper_level_X_bool .. 119
\__enumext_storing_exec: .. 71, 2079, 2095, 2099
\__enumext_storing_set:n .. 71, 2064, 2079, 2079
\l__enumext_the_counter_v_tl ..... 847
\l__enumext_the_counter_vii_tl ..... 785
\l__enumext_the_counter_viii_tl ..... 799
\l__enumext_the_counter_X_tl ..... 37
\__enumext_tmp:n 32, 36, 39, 45, 56, 63, 64, 71, 79, 84,
85, 96, 128, 135, 160, 164, 171, 191, 628, 637, 1817,
1828, 2060, 2068, 2120, 2138, 2314, 2383, 2402, 2415,
2552, 2559, 2560, 2581, 2594, 2597, 2608, 3007, 3014,
3341, 3351, 3384, 3391, 3541, 3581, 3582, 3616
\__enumext_tmp:nn 638, 659, 660, 694, 695, 710, 891,
916, 997, 1019, 1020, 1040, 1094, 1102, 1103, 1117,
1182, 1198, 1199, 1212, 1706, 1722, 2279, 2313, 3325,
3340
\__enumext_tmp:nnn 711, 727, 728, 729, 730, 757, 773,
774
\__enumext_tmp:nnnnn 917, 942, 945, 948, 950, 952,
955, 958
\__enumext_tmp:w ..... 5173, 5176
\l__enumext_tmpa_vii_int 4350, 4353, 4362, 4393
\l__enumext_tmpa_viii_int ..... 4381, 4384
\l__enumext_tmpa_X_dim ..... 171
\l__enumext_tmpa_X_int ..... 171
\l__enumext_topsep_v_skip 1279, 1283, 1482, 4188
\l__enumext_topsep_vii_skip .. 1559, 1568, 1572
\l__enumext_topsep_viii_skip . 1581, 1603, 1607
\__enumext_unskip_unkern: .. 35, 236, 236, 1332,

```

1504, 3720, 3721, 3761, 3881, 3882, 3899, 4844, 4845, 5118, 5119	
\l__enumext_vspace_a_star_v_bool	1755
\l__enumext_vspace_a_star_vii_bool	1777
\l__enumext_vspace_a_star_viii_bool	1788
\l__enumext_vspace_a_star_X_bool	85
__enumext_vspace_above:	64, 104, 1723, 1723, 3731
__enumext_vspace_above_v:	64, 1751, 1751, 3835
\l__enumext_vspace_above_v_skip	1753, 1757, 1759
__enumext_vspace_above_vii:	65, 122, 1773, 1773, 4677
\l__enumext_vspace_above_vii_skip	1775, 1779, 1781
__enumext_vspace_above_viii:	65, 1773, 1784, 4944
\l__enumext_vspace_above_viii_skip	1786, 1790, 1792
\l__enumext_vspace_b_star_v_bool	1766
\l__enumext_vspace_b_star_vii_bool	1799
\l__enumext_vspace_b_star_viii_bool	1810
\l__enumext_vspace_b_star_X_bool	85
__enumext_vspace_below:	64, 105, 1737, 1737, 3769
__enumext_vspace_below_v:	65, 1762, 1762, 3908
\l__enumext_vspace_below_v_skip	1764, 1768, 1770
__enumext_vspace_below_vii:	65, 122, 1795, 1795, 4687
\l__enumext_vspace_below_vii_skip	1797, 1801, 1803
__enumext_vspace_below_viii:	65, 1795, 1806, 4952
\l__enumext_vspace_below_viii_skip	1808, 1812, 1814
__enumext_widest_from:nNNn	48, 875, 875, 890, 909
\g__enumext_widest_label_tl	30, 43, 52, 616, 620, 624
\l__enumext_wrap_label_opt_v_bool	3414
\l__enumext_wrap_label_opt_vii_bool	123, 4744
\l__enumext_wrap_label_opt_viii_bool	129, 4988
\l__enumext_wrap_label_opt_X_bool	85
\l__enumext_wrap_label_v_bool	3410, 3414, 3421, 3467, 3475, 4238
\l__enumext_wrap_label_vii_bool	123, 4744, 4748, 4756, 4820
\l__enumext_wrap_label_viii_bool	129, 4988, 4992, 5001, 5066, 5075
\l__enumext_wrap_label_X_bool	85
__enumext_wrapper_label_v:n	3473, 3477, 4257
__enumext_wrapper_label_vii:n	4822
__enumext_wrapper_label_viii:n	5073, 5077
\l__enumext_write_anskey_env_bool	32, 103, 2839, 2864
\l__enumext_write_anskey_env_file_iow	32, 103, 2889, 2890, 2891
\l__enumext_write_anskey_env_file_name_-tl	32, 103, 2840, 2950
\l__enumext_write_aux_file_tl	33, 82, 90, 157, 2617, 2623, 3048, 3054
enumext*	5, 4624
enumXi	579
enumXii	579

enumXiii	579
enumXiv	579
enumXv	579
enumXvi	579
enumXvii	579
enumXviii	579
Environments provide by enumext:	
anskey*	29, 31, 32, 34, 71, 76, 78, 81, 83, 84, 87, 103, 122, 132, 133, 138, 141
enumext*	29, 30, 33-35, 39-43, 46, 48-52, 54, 61, 62, 65-68, 70-73, 76-82, 84, 85, 89, 90, 96, 97, 101-103, 108, 116, 117, 119, 120, 122, 124-128, 130-134, 136, 139, 143, 144
enumext	29, 30, 34, 35, 39-43, 45-50, 52-57, 60, 62-64, 66-68, 70-73, 76-79, 81, 82, 84, 85, 89, 90, 93-97, 99, 100, 103, 106, 107, 111, 116, 119, 121, 122, 124, 127, 132, 134, 136, 139, 141, 143
keyans*	29-31, 33-36, 39-42, 46-52, 54, 61, 62, 65, 71, 72, 75, 76, 79, 88, 90, 92, 96, 101, 108, 117, 118, 126, 127, 139, 142, 144
keyanspic	29-31, 33, 36, 42, 47, 71, 72, 75, 79, 88-91, 96, 108-113, 115, 142
keyans	29-31, 33, 35, 36, 39, 40, 42, 43, 47-50, 52, 54, 56, 59, 62-65, 71, 72, 75, 76, 79, 88-91, 93, 96-100, 106, 108, 110-112, 114, 119, 128, 139, 142
Environments:	
center	116
description	95, 116
enumerate	116
flushleft	116
flushright	116
itemize	116
list	34, 38, 84, 95, 99, 100, 104, 106, 108, 110-112, 116, 119
lrbox	125
minipage	34, 38, 40, 41, 54, 56-58, 110, 113, 115, 116, 119, 125, 126
multicols	54-58, 62, 103-105
quotation	116
quote	116
tabbing	116
trivlist	116
verbatim	116
verse	116
exp commands:	
\exp_after:wN	5176
\exp_args:Ne	2958, 3640, 5164
\exp_args:NV	2753, 2850, 3354, 3372, 3394, 5461
\exp_not:N	43, 619, 745, 788, 802, 850, 1050, 1053, 1064, 1065, 1066, 1077, 1078, 1089, 1090, 2682, 2724, 2725, 3084, 3190, 3191, 5049, 5050, 5173
\exp_not:n	283, 297, 310, 318, 326, 685, 705, 745, 746, 788, 802, 850, 1051, 1844, 1853, 2292, 2341, 2445, 2458, 2620, 2648, 2658, 2668, 2682, 2683, 3051, 3086, 3088, 4052, 5290, 5300, 5493, 5498
F	
\fbox	2348
\fboxrule	2348
\fboxsep	2348
file commands:	
\file_if_exist:nTF	2866
\file_input_stop:	5913
first	1103
font	638
\footnote	39

`\footnote` 39, 436, 466
`\footnotemark` 446, 476
`\footnotesize` 2725, 3191, 5050
`\footnotetext` 432
`force-eol` 2821
`\foreachkeyans` 18, 137, 5426

G

`\getkeyans` 18, 132, 5162
group commands:
 `\group_begin:` 2723, 2768, 3189, 5048, 5231
 `\group_end:` 2730, 2784, 3197, 5055, 5238

H

`\hbadness` 4855, 5133
hbox commands:
 `\hbox_overlap_left:n` 2540, 3256, 4813
 `\hbox_set:Nn` 608, 4115
 `\hbox_set_end:` 4854, 5132
 `\hbox_set_to_wd:Nnw` 4831, 5105
`\hfill` 668, 673, 679, 680, 1662, 1689, 2682, 3084, 4527, 4591
hook commands:
 `\hook_gput_code:nnn` 5, 202, 206, 210, 381
 `\hook_gset_rule:nnnn` 382
`\hyperlink` 83, 91
`\hyperlink` 2682, 3084
`\hypertarget` 39
`\hypertarget` 407

I

`\IfDocumentMetadataTF` . . 498, 514, 528, 541, 3273, 3449, 3967, 3975, 3983, 4019, 4027, 4035, 4139, 4148, 4156, 4163, 4168, 4216, 4225, 4315, 4323, 4525, 4589, 4635, 4643, 4789, 4897, 4905
`\IfHyperBoolean` 389
`\IfPackageLoadedT` 385
`\IfPackageLoadedTF` 7, 397
`\ignorespaces` . . 1053, 1066, 1078, 1090, 4128, 4640, 4717, 4750, 4773, 4780, 4826, 4846, 4902, 4960, 4994, 5023, 5100, 5120
`\inputlineno` 283, 297, 310, 318, 326
int commands:
 `\int_add:Nn` 4435, 4484
 `\int_case:nn` . . . 1227, 1352, 2151, 2177, 2216, 2240
 `\int_case:nnTF` 238
 `\int_compare:nNnTF` . . 562, 778, 792, 809, 816, 1322, 1341, 1495, 1513, 1625, 1644, 1656, 1684, 2264, 2270, 2792, 2796, 2800, 2808, 2920, 2924, 2928, 2966, 2986, 3024, 3029, 3034, 3059, 3174, 3622, 3633, 3655, 3668, 3684, 3699, 3714, 3755, 3820, 3824, 3852, 3877, 3893, 4087, 4199, 4203, 4405, 4415, 4431, 4454, 4464, 4480, 4653, 4657, 4695, 4705, 4857, 4869, 4918, 4930, 5135, 5147, 5344, 5476
 `\int_compare_p:nNn` . . . 253, 263, 275, 276, 289, 290, 1631, 1632, 2157, 2183, 2565, 2575, 2587, 2588, 2603, 2644, 3665
 `\int_decr:N` 4434, 4483
 `\int_eval:n` . . 368, 904, 2464, 2615, 2725, 3042, 3191, 3556, 3601, 4423, 4472, 5050
 `\int_from_alph:n` 869, 883
 `\int_from_roman:n` 871, 885
 `\int_gadd:Nn` 4436, 4485
 `\int_gdecr:N` 2160, 2165, 2169, 2173, 2186
 `\int_gincr:N` 1994, 1999, 2627, 3094, 3210, 3244, 3427, 3744, 3844, 4243, 4723, 4799, 4966, 5032
 `\int_gset:Nn` 444, 474, 2209

`\int_gset_eq:NN` . . 441, 471, 1893, 1900, 1906, 1912, 1920, 1927, 1933, 1939
`\int_gzero:N` . 339, 340, 341, 1670, 1697, 2276, 3760, 3898, 4880, 5159
`\int_if_exist:N` 1868, 1904, 1910, 1931, 1937, 2114
`\int_incr:N` 2807, 3176, 3621, 3815, 4086, 4652, 4722, 4917, 4965
`\int_mod:nn` 4871, 5149
`\int_new:N` 16, 17, 18, 19, 20, 21, 46, 47, 72, 89, 112, 126, 138, 139, 150, 151, 152, 154, 165, 166, 174, 175, 176, 177, 178, 1870, 2117
`\int_set:Nn` 865, 869, 871, 2007, 2014, 2026, 2035, 4309, 4310, 4350, 4381, 4404, 4410, 4426, 4453, 4459, 4475, 4855, 5133, 5340, 5478
`\int_set_eq:NN` 1995, 2000, 4433, 4482
`\int_sign:n` 2211
`\int_step_function:nnN` 2581, 2594, 2608
`\int_step_function:nnnN` 5482
`\int_step_inline:nn` 5392
`\int_step_inline:nnn` 4311
`\int_to_roman:n` 214, 2561, 2598
`\int_use:N` 361, 366, 367, 1323, 1342, 1657, 2009, 2016, 2028, 2037, 3556, 3576, 3601, 3641, 3685, 3694, 3709, 3715, 4408, 4409, 4421, 4457, 4458, 4470, 5829, 5833, 5839, 5843
`\int_zero:N` 3179, 4861, 5139

iow commands:

`\iow_char:N` 2947, 2948
 `\iow_close:N` 2891
 `\iow_new:N` 107
 `\iow_now:Nn` 2890
 `\iow_open:Nn` 2889
`\item` . 93, 97, 123, 125, 128, 131, 374, 2482, 2488, 2513, 2519, 2641, 3061, 3064, 3262, 3431, 4143, 4144, 4637, 4639, 4899, 4901, 5030
`\item*` 5, 16, 75, 3429
`item-join` 2735, 2821
`item-pos*` 2735, 2821, 3325
`item-star` 2735, 2821
`item-sym*` 2735, 2821, 3325
`\itemindent` 100
`\itemindent` 100
`itemindent` 997
`\itemsep` 4132
`\itemwidth` . 578, 2348, 3775, 3781, 3912, 3918, 4444, 4448, 4493, 4497

K

`keyans` 15, 3921
`keyans*` 15, 4887
`keyanspic` 16, 4134
Keys for `\anskey` provide by **enumext**:
 `break-col` 82, 84
 `force-eol` 86
 `item-join` 82, 84
 `item-pos*` 83, 84
 `item-star` 83, 84
 `item-sym*` 83, 84
 `overwrite` 86
 `write-env` 86

Keys for `\anskey*` provide by **enumext**:

`break-col` 82, 84
 `force-eol` 86
 `item-join` 82, 84
 `item-pos*` 83, 84

item-star	83, 84
item-sym*	83, 84
overwrite	86
write-env	86
Keys for environments provide by enumext :	
above*	31, 50, 64, 65, 104, 122
above	31, 50, 64, 65, 104, 122, 127
after	52, 53, 105, 122, 128
align	31, 44, 92, 93, 95, 98, 124, 138
base-fix	49, 50, 66, 78, 102
before*	52, 104, 122, 127
before	52, 53
below*	31, 64, 65, 105, 122
below	31, 64, 65, 105, 122, 128
check-ans	33, 34, 36, 70-72, 74, 75, 79, 89, 91, 105, 106, 122, 126, 140
columns-sep	54, 103, 126
columns	31, 54, 63, 103
first	52, 53, 125
font	43, 95, 98, 114, 124
item-pos*	94, 96
item-sym*	32, 94, 96
itemindent	31, 50, 51, 93, 94, 97, 98, 125
itemsep	49, 101, 126
label-pos	110, 112, 114
label-sep	110
labelsep	43, 100, 124
labelwidth	42, 43, 45-48, 100, 124
label	30, 42, 43, 45, 47, 48, 112, 116
layout-sep	110
layout-sty	110, 115
layout-top	110
lisparindent	101
list-indent	30, 50, 51, 112
list-offset	50, 51, 105, 108
listparindent	50, 125
mark-ans*	75, 79, 92
mark-ans	76, 79, 84
mark-pos*	75, 79, 92
mark-pos	32, 76, 79, 138
mark-ref	76, 79, 81, 83
mark-sep*	75, 79, 92
mark-sep	32, 76, 79, 129
mini-env	31, 39-41, 54, 62, 63, 79, 104, 116, 119, 120, 122, 127
mini-right*	31, 34, 54, 79, 119, 120, 122
mini-right	31, 34, 54, 62, 79, 119, 120, 122
mini-sep	31, 54, 79, 104
mode-box	43, 93, 95, 98, 99
no-store	33, 70-73, 78, 85, 87, 93, 94
noitemsep	49
nosep	49
overwrite	32, 87
parindent	101
parsep	49, 101, 112, 125
partopsep	49
ref	30, 35, 45-47, 140
resume*	30, 66, 67, 70, 72, 78, 105, 122, 134
resume	30, 37, 66-70, 72, 78, 79, 105, 122, 134
rightmargin	50, 116
save-ans	31, 37, 66-71, 73, 74, 77-79, 85, 88, 89, 91, 97, 106, 113, 124, 127-129, 132, 134, 140
save-key	32, 66, 78, 79, 102, 122
save-pos	79
save-ref	33, 39, 76, 79, 81-83, 90, 91, 98, 129

save-sep	75, 79, 89, 129
series	30, 66-70, 79, 102, 105, 122, 134
show-ans	32, 75, 76, 79, 80, 82, 84, 91, 92, 114, 129
show-length	35, 52, 139
show-pos	32, 75, 76, 80, 82, 84, 91, 92, 114, 129
start*	31, 47, 48, 66
start	31, 35, 47, 48, 66
store-key	77
topsep	49, 50, 112
widest	30, 35, 48
wrap-ans*	33, 75, 79, 98, 99, 114
wrap-ans	42, 76, 79, 80, 83
wrap-label*	31, 43, 93, 95, 97-99, 123, 124, 129
wrap-label	31, 43, 93-95, 97-99, 112, 114, 123, 124, 129
wrap-opt	75, 79, 91, 92, 98, 114
wrap-sep	83
write-env	32, 87

keys commands:

\keys_define:nn	630, 640, 662, 697, 713, 759, 824, 893, 919, 961, 999, 1022, 1096, 1105, 1184, 1201, 1708, 1819, 2062, 2122, 2281, 2316, 2404, 2409, 2735, 2821, 3327, 3343, 3366, 3386, 4041, 5190, 5302, 5418, 5426
\keys_if_exist_p:nn	5414, 5415
\l_keys_key_str	84, 86, 2753, 2850, 3354, 3372, 3394, 5461, 5573
\keys_precompile:nnN	133, 197, 197, 5192, 5198, 5204, 5210, 5216, 5222, 5444
\keys_set:nn	654, 978, 990, 1207, 1713, 1718, 1956, 1961, 2048, 2056, 2352, 2353, 2357, 2358, 2362, 2363, 2367, 2368, 2372, 2373, 2377, 2378, 2773, 2902, 3635, 3640, 3831, 4059, 4061, 4063, 4065, 4067, 4069, 4071, 4073, 4075, 4077, 4097, 4670, 4939, 5306, 5311, 5312, 5313, 5314, 5317, 5322, 5323, 5324, 5325, 5326, 5327, 5328, 5360, 5470

keyval commands:

\keyval_parse:NNn	1833, 2434, 5278
-------------------	------------------

L

label	711, 757, 824
label-pos	4041
label-sep	4041

Labels provide by **enumext**:

\Alph*	42, 43
\Roman*	42, 43
\alph*	42, 43
\arabic*	35, 42, 43
\roman*	42, 43
labelsep	638
\labelwidth	43
labelwidth	638
\lastnodetype	238
layout-sep	4041
layout-sty	4041
layout-top	4041
\leftmargin	100
\leftmargin	100, 4127

legacy commands:

\legacy_if:nTF	4784, 4787, 5083, 5086
\legacy_if_gset_false:n	568, 4540
\legacy_if_set_false:n	4786, 5085
\legacy_if_set_true:n	4749, 4772, 4779, 4793, 4993, 5022
\linewidth	104
\linewidth	3739, 3775, 3841, 3912, 4308, 4353, 4384, 4506, 4571

`\list` 372
`list-indent` 997
`list-offset` 997
`\listparindent` 4130
`listparindent` 997

M

`\makebox` 116
`\makebox` 2542, 3309, 3499, 4233, 4246, 4817, 5095
`\makelabel` 93, 95, 98, 116
`\makelabel` 93, 97, 3289, 3305, 3483, 3495
`mark-ans` 2314, 4041
`mark-ans*` 2279, 2314
`mark-pos` 2314, 4041
`mark-pos*` 2279, 2314
`mark-ref` 2314
`mark-sep` 2314, 4041
`mark-sep*` 2279, 2314
`mini-env` 1182
`mini-sep` 1182
`\minipage` 378
`\miniright` 11, 62, 1623, 1674, 1701, 3758, 3896
`mode commands:`
`\mode_if_math:TF` 2816, 2939
`\mode_if_vertical:TF` 1261, 1289, 1309, 1333, 1484, 1505
`\mode_leave_vertical:` 976, 987, 1050, 1064, 2538, 3254, 4811
`mode-box` 628
`msg commands:`
`\msg_error:nn` .. 1676, 1703, 2777, 2810, 2814, 2906, 2937, 3822, 3826, 4089, 4146, 4201, 4655, 4920, 4932, 5329, 5388
`\msg_error:nnn` 736, 782, 796, 844, 1627, 1634, 1641, 1672, 1699, 1968, 1972, 2087, 2759, 2818, 2856, 2918, 2922, 2926, 2930, 2941, 3360, 3378, 3400, 4659, 4925, 5178, 5187, 5271, 5376, 5407, 5416, 5453, 5474
`\msg_error:nnnn` 2762, 2790, 2794, 2798, 2802, 2859, 3363, 3381, 3403, 3813, 4197, 4205, 4915, 5250, 5456
`\msg_error:nnnnn` 684, 704, 2291, 2340, 4051
`\msg_fatal:nn` 3623
`\msg_fatal:nnn` 582
`\msg_info:nnn` 9, 12, 387, 399
`\msg_line_context:` .. 5533, 5538, 5543, 5548, 5577, 5582, 5587, 5602, 5617, 5621, 5625, 5629, 5633, 5637, 5644, 5651, 5657, 5671, 5675, 5680, 5684, 5688, 5692, 5697, 5701, 5705, 5709, 5714, 5761, 5765, 5770, 5775, 5779, 5784, 5860, 5864, 5869, 5874, 5879, 5883, 5887, 5891, 5895, 5899, 5903, 5907, 5911
`\msg_log:nnn` 2106, 2111, 2116
`\msg_log:nnnnn` 365, 2249, 2254, 2259
`\msg_log:nnnnnn` 357
`\msg_new:nnn` 5501, 5505, 5509, 5513, 5518, 5531, 5535, 5540, 5545, 5550, 5559, 5567, 5571, 5575, 5580, 5585, 5600, 5615, 5619, 5623, 5627, 5631, 5635, 5639, 5648, 5654, 5660, 5664, 5668, 5673, 5678, 5682, 5686, 5690, 5695, 5699, 5703, 5707, 5712, 5747, 5751, 5755, 5759, 5763, 5768, 5773, 5777, 5782, 5858, 5862, 5867, 5872, 5877, 5881, 5885, 5889, 5893, 5897, 5901, 5905, 5909
`\msg_new:nnnn` .. 5522, 5717, 5726, 5735, 5741, 5786, 5796, 5806, 5816, 5826, 5836, 5846, 5852
`\msg_term:nnnn` . 2071, 2076, 3565, 3575, 3607, 3612
`\msg_term:nnnnn` 2230
`\msg_warning:nn` 3757, 3895
`\msg_warning:nnn` 2870, 2874, 2879

`\msg_warning:nnnn` 2267, 2273, 3513, 3518, 4407, 4420, 4456, 4469
`\msg_warning:nnnnn` 2225, 2235
`\multicolsep` 103
`\multicolsep` 1326, 1498, 3705, 3868

N

`\NeedsTeXFormat` 3
`\NewCommandCopy` 374
`\newcounter` 585
`\NewDocumentCommand` 1623, 2765, 4193, 5162, 5229, 5336, 5385, 5463
`\NewDocumentEnvironment` . 2895, 3787, 3921, 4134, 4624, 4887
`\newlabel` 39
`\newlabel` 419
`no-store` 2120
`\noindent` 3746, 4515, 4580, 4860, 5138
`\nointerlineskip` 1335, 1338, 1507, 1510, 1664, 1691, 4515, 4580
`noitemsep` 917
`\nopagebreak` 1272, 1300, 1335, 1338, 1507, 1510, 1614, 1620
`\normalfont` 2724, 3190, 5049
`nosep` 917

O

`\obeyedline` 2947, 2948
`overwrite` 2821

P

Packages:
`caption` 119
`enumext` 29, 42, 45, 70, 75, 95, 100, 110, 138
`enumitem` 42
`expl3` 116
`footnotehyper` 38, 40, 41
`hyperref` 33, 34, 38, 39, 83, 91, 124, 138
`latex-lab-block` 38
`ltxcmd` 38, 86
`ltsockets` 108
`lua-visual-debug` 57
`multicol` 29, 138
`scontents` 86
`shortlst` 116, 121, 125
`tagpdf` 108
`\par` .. 1272, 1300, 1338, 1510, 1614, 1620, 1659, 1664, 1686, 1691, 2690, 3722, 3883, 3901, 4179, 4182, 4328, 4542, 4557, 4603, 4617, 4860, 5138
`para commands:`
`\para_end:` 4877, 5156
`\parbox` 2348
`\parindent` 4842, 5116
`\parsep` 55, 111
`\parsep` 977, 3598, 4111, 4120
`parsep` 917
`\parskip` 4843, 5117
`\partopsep` 3599, 3899, 4131
`partopsep` 917
`peek commands:`
`\peek_meaning:NTF` 4728, 4742, 4757, 4768, 4971, 4986, 5002
`\peek_meaning_remove:NTF` 4735, 4978
`\peek_remove_spaces:n` 3436
`\phantomsection` 39
`\phantomsection` 408

prg commands:

\prg_do_nothing:	412
\prg_new_protected_conditional:Npnn	216, 2862
\prg_replicate:nn	233
\prg_return_false:	220, 2875, 2883
\prg_return_true:	219, 2871, 2880
\printkeyans	19, 132, 5229
prop commands:	
\prop_const_from_keyval:Nn	5377
\prop_count:N	359, 2464, 2615, 2727, 3042, 3193, 5052, 5479
\prop_get:NnNTF	5403
\prop_gput_if_not_in:Nnn	2462
\prop_if_exist:NTF	2104, 5182, 5472
\prop_item:Nn	5184, 5496
\prop_new:N	2107
\ProvidesExplPackage	4

R

\raggedcolumns	3708, 3871
\raisebox	4270
\ref	81, 90
ref	711, 757, 824
\refstepcounter	4796, 5088
regex commands:	
\regex_match:nnTF	218, 868, 870, 882, 884
\regex_replace_once:nnN	226
\renewcommand	745, 788, 802, 850
\RenewDocumentCommand	436, 466, 1674, 1701, 2947, 3262, 3289, 3305, 3431, 3483, 3495, 4144
\RequirePackage	13
resume	1817
resume*	1817
rightmargin	997
\Roman	43, 47, 48
\Roman	604
\roman	43, 47, 48
\roman	605, 729, 5214

S

save-ans	2060
save-key	2402
save-ref	2314
save-sep	2279, 2314, 4041
scan commands:	
\scan_stop:	4143, 4637, 4899, 5173, 5176
seq commands:	
\seq_clear:N	5338, 5481
\seq_const_from_clist:Nn	5331
\seq_count:N	360, 4334, 5342
\seq_gclear:N	461, 462, 491, 492
\seq_gput_right:Nn	447, 448, 477, 478, 2471
\seq_if_empty:NTF	454, 484, 5244, 5356
\seq_if_exist:NTF	2109, 5242
\seq_if_in:NnTF	5248
\seq_item:Nn	4321
\seq_map_function:NN	5347
\seq_map_inline:Nn	5257, 5265, 5357, 5358
\seq_map_pairwise_function:NNN	456, 486
\seq_new:N	113, 114, 116, 136, 167, 168, 169, 170, 2112
\seq_pop_left:NN	5346
\seq_put_right:Nn	4207, 5354, 5370, 5491
\seq_set_from_clist:Nn	5339
\seq_set_map_e:NNn	5348
\seq_use:Nn	197, 198, 5487

series	1817
\setcounter	879, 883, 885, 3556, 3601, 4176
\setenumext	6, 134, 5336
\setenumextmeta	6, 136, 5377
show-ans	2279, 2314, 4041
show-length	1094
show-pos	2279, 2314, 4041
skip commands:	

\skip_add:Nn	1232, 1241, 1250, 1263, 1267, 1291, 1295, 1311, 1369, 1371, 1385, 1388, 1409, 1411, 1425, 1428, 1448, 1450, 1464, 1467, 1486, 1535, 1536, 1547, 1549, 4120, 4129
\skip_gset:Nn	1562, 1566, 1570
\skip_gzero_new:N	1557, 1558
\skip_horizontal:N	1065, 1077, 1089, 4814, 4826, 4864, 5100, 5142
\skip_horizontal:n	1051, 2539, 2547, 3255, 3257, 4251, 4713, 4812, 4846, 4956, 5120
\skip_if_eq:nnTF	1230, 1239, 1248, 1355, 1395, 1435, 1523, 1559, 1581, 1725, 1739, 1753, 1764, 1775, 1786, 1797, 1808
\skip_new:N	66, 67, 68, 73, 74, 75, 76, 77, 78, 189
\skip_set:Nn	1215, 1219, 1277, 1281, 1305, 1358, 1359, 1377, 1398, 1399, 1417, 1437, 1438, 1456, 1480, 1526, 1527, 1541, 1561, 1565, 1583, 1587, 1591, 1597, 1601, 1605, 4104
\skip_set_eq:NN	1316, 1317, 1319, 1326, 1491, 1492, 1493, 1498, 3554, 3597, 3598, 4843, 5117
\skip_sub:Nn	1365, 1367, 1381, 1383, 1405, 1407, 1421, 1423, 1444, 1446, 1460, 1462, 1533, 1534, 1545, 1546
\skip_use:N	1217, 1221, 1265, 1269, 1273, 1293, 1297, 1307, 1313, 1726, 1730, 1733, 1740, 1744, 1747, 3722
\skip_vertical:N	569, 572, 989, 4541, 4555, 4879, 5158
\skip_vertical:n	988, 4878, 5157
\skip_zero:N	1325, 1339, 1477, 1478, 1479, 1497, 1511, 3599, 3705, 3868, 4131, 4132
\skip_zero_new:N	1556, 1578, 1579, 1580
\c_zero_skip	569, 572, 989, 1230, 1239, 1248, 1396, 1435, 1559, 1581, 1726, 1740, 1753, 1764, 1775, 1786, 1797, 1808, 4541, 4555, 4879, 5158
\small	5197, 5203, 5209, 5215, 5221, 5227
\smash	3307, 3497
socket commands:	
\socket_assign_plug:nn	3969, 3977, 3985, 4021, 4029, 4037
\socket_new:nn	3939, 3989
\socket_new_plug:nnn	3940, 3948, 3956, 3990, 3998, 4007
\socket_use:n	4022, 4030, 4038
\socket_use:nn	3970, 3978, 3986
start	891
start*	891
start-list-tags	3939, 3989
\stepcounter	440, 470, 4114, 4263
stop-list-tags	3939, 3989
stop-start-tags	3939, 3989
str commands:	
\c_backslash_str	2818, 5538, 5543, 5548, 5553, 5555, 5557, 5562, 5564, 5662, 5666, 5670, 5680, 5684, 5692, 5693, 5697, 5709, 5710, 5714, 5715, 5736, 5738, 5742, 5744, 5784, 5847, 5849, 5853, 5855, 5864, 5865, 5869, 5874, 5875, 5879, 5883, 5887
\c_circumflex_str	109

<code>\c_colon_str</code>	2614, 3041, 5173
<code>\c_left_brace_str</code>	5643, 5650, 5656
<code>\c_percent_str</code>	109
<code>\c_right_brace_str</code>	5643, 5650, 5656
<code>\str_case:nn</code>	246, 303, 3134
<code>\str_case:nnTF</code>	1840, 1848, 2441, 2449, 5285, 5294
<code>\str_clear:N</code>	3632, 4669
<code>\str_const:Nn</code>	108
<code>\str_count:n</code>	233
<code>\str_if_empty:NTF</code>	1857, 1898, 1925
<code>\str_if_eq:nnTF</code>	3557, 3603, 5387
<code>\str_if_in:nnTF</code>	5169
<code>\str_new:N</code>	69, 121, 122, 123, 141, 184
<code>\str_set:Nn</code>	669, 675, 681, 700, 701, 702, 2287, 2288, 2289, 2336, 2337, 2338, 4046, 4049
<code>\str_set_eq:NN</code>	3157, 5040, 5057
<code>\str_use:N</code>	3311
<code>\strut</code>	3307, 3497
<code>\strutbox</code>	1344, 1347, 1358, 1359, 1370, 1372, 1387, 1390, 1398, 1399, 1410, 1412, 1427, 1430, 1437, 1438, 1449, 1451, 1466, 1469, 1515, 1518, 1526, 1527, 1535, 1536, 1548, 1550, 1561, 1562, 1565, 1572, 1585, 1593, 1599, 1607, 4123, 4129, 4179, 4187, 4276

T

tag commands:

<code>\tag_mc_begin:n</code>	3946, 3996, 4005
<code>\tag_mc_begin_pop:n</code>	3962, 4014, 4171, 4173
<code>\tag_mc_end:</code>	3950, 4000, 4009
<code>\tag_mc_end_push:</code>	3943, 3993, 4159
<code>\tag_resume:n</code>	3942, 3992, 4150, 4158, 4227, 4325, 4525, 4589
<code>\tag_struct_begin:n</code>	3944, 3945, 3952, 3953, 3954, 3994, 3995, 4002, 4003, 4004, 4160
<code>\tag_struct_end:n</code>	3951, 3958, 3959, 3960, 3961, 4001, 4010, 4011, 4012, 4013, 4170, 4172, 4643, 4905
<code>\tag_suspend:n</code>	3963, 4015, 4141, 4152, 4165, 4218, 4317, 4635, 4897
<code>\tag_tool:n</code>	4151

TeX and LaTeX commands:

<code>\@auxout</code>	417
<code>\@currentenv</code>	246, 303
<code>\protected@write</code>	417

tex commands:

<code>\tex_scantokens:D</code>	199
--------------------------------	-----

text commands:

<code>\text_expand:n</code>	5165
<code>\textasteriskcentered</code>	2284, 2331
<code>\textborn</code>	3331
<code>\textreferencemark</code>	2319
<code>\thepage</code>	423

tl commands:

<code>\c_space_tl</code>	3113, 3126, 5587, 5602, 5625, 5629, 5828, 5829, 5838, 5839, 5899, 5903
<code>\tl_clear:N</code>	667, 674, 2277, 2388, 2398, 2419, 2427, 2634, 2985, 3058, 5008
<code>\tl_clear_new:N</code>	614
<code>\tl_const:Nn</code>	598
<code>\tl_gclear:N</code>	351, 352, 353, 1878, 1883, 3300, 3320, 4561, 4621, 4815
<code>\tl_gclear_new:N</code>	1865
<code>\tl_gput_right:Nn</code>	599
<code>\tl_greplace_all:Nnn</code>	620
<code>\tl_gset:Nn</code>	280, 281, 294, 295, 1866, 1879, 1884, 2103, 3231, 4763
<code>\tl_gset_eq:NN</code>	616, 3227, 4808

<code>\tl_if_blank:nTF</code>	2757, 2775, 2854, 2904, 3358, 3376, 3398, 4806, 5451
<code>\tl_if_empty:NTF</code>	734, 752, 780, 794, 811, 818, 842, 856, 1891, 1896, 1918, 1923, 1981, 2045, 2053, 2082, 2141, 2478, 2509, 2654, 2968, 2995, 3068, 3106, 3119, 3252, 4332, 5011, 5368
<code>\tl_if_empty:nTF</code>	1946
<code>\tl_if_exist:NTF</code>	1951
<code>\tl_if_novalue:nTF</code>	438, 468, 2771, 2900, 2993, 3066, 3099, 3206, 3225, 3233, 3408, 3630, 4095, 4667, 4937, 5009
<code>\tl_map_inline:Nn</code>	224, 617
<code>\tl_new:N</code>	29, 30, 31, 34, 37, 38, 41, 42, 48, 50, 51, 53, 54, 90, 91, 92, 98, 99, 100, 101, 102, 103, 104, 106, 110, 111, 115, 117, 118, 119, 127, 130, 131, 148, 157, 158, 159, 162, 183
<code>\tl_put_left:Nn</code>	2486, 2517, 2639, 4545, 4606, 5027, 5030
<code>\tl_put_right:Nn</code>	615, 848, 2490, 2521, 2568, 2578, 2591, 2606, 2612, 2617, 2641, 2646, 2653, 2656, 2666, 2671, 2674, 2680, 2953, 2988, 2991, 2997, 2999, 3026, 3031, 3036, 3039, 3048, 3061, 3064, 3070, 3072, 3082, 5013, 5014
<code>\tl_remove_all:Nn</code>	5367
<code>\tl_remove_once:Nn</code>	2556, 3011
<code>\tl_replace_all:Nnn</code>	619, 2948, 5402
<code>\tl_reverse:N</code>	2555, 2557, 3010, 3012
<code>\tl_set:Nn</code>	43, 250, 260, 307, 308, 315, 316, 323, 324, 584, 668, 673, 679, 680, 733, 743, 777, 786, 800, 841, 1048, 1062, 1075, 1087, 1980, 2081, 2389, 2399, 2420, 2428, 2721, 2840, 2946, 3101, 3187, 3346, 4080, 5016, 5046, 5365, 5401, 5471
<code>\tl_set_eq:NN</code>	625, 739, 785, 799, 847, 2554, 3009, 3022, 3155, 5039
<code>\tl_to_str:n</code>	1951, 1957, 1962, 5165
<code>\tl_trim_spaces:n</code>	615, 5354, 5365, 5371, 5387
<code>\tl_use:N</code>	621, 624, 754, 813, 820, 858, 1120, 1124, 1128, 1132, 1136, 1140, 1144, 1148, 1152, 1156, 1160, 1164, 1168, 1172, 1176, 1180, 2544, 2561, 2569, 2580, 2593, 2598, 2609, 3214, 3220, 3248, 3291, 3293, 3299, 3314, 3411, 3415, 3422, 3485, 3488, 3490, 3503, 3794, 3927, 4248, 4256, 4552, 4613, 4819, 4847, 4848, 5097, 5121, 5126, 5232, 5233, 5234, 5235, 5236, 5253, 5350, 5469

token commands:

<code>\token_to_str:N</code>	419
<code>\topsep</code>	3899, 4129
<code>topsep</code>	917
<code>\topskip</code>	1325, 1497

U

<code>\u</code>	227
<code>\unkern</code>	241
<code>unknown</code>	2735, 2821, 3341, 3366, 3384
<code>\unskip</code>	240
use commands:	
<code>\use:N</code>	234, 3296, 3317, 3796
<code>\use:n</code>	1831, 2432, 5171, 5276
<code>\use_none:nn</code>	411, 5408
<code>\usecounter</code>	3555, 3600

V

<code>\value</code>	1894, 1900, 1907, 1913, 1921, 1927, 1934, 1940
vbox commands:	
<code>\vbox_set:Nn</code>	4220
<code>\vbox_set_top:Nn</code>	4550, 4611

<code>\vspace</code>	977 , 1730 , 1733 , 1744 , 1747 , 1757 , 1759 , 1768 , 1770 , 1779 , 1781 , 1790 , 1792 , 1801 , 1803 , 1812 , 1814	<code>wrap-ans*</code>	2279 , 2314 , 4041
		<code>wrap-label</code>	638
W		<code>wrap-label*</code>	638
<code>widest</code>	891	<code>wrap-opt</code>	2279 , 2314 , 4041
<code>wrap-ans</code>	2314	<code>write-env</code>	2821