

# enumext

ENUMERATE EXERCISE SHEETS

V1.0 2024-09-25<sup>\*</sup>

©2024 by Pablo González<sup>†</sup>

CTAN: <https://www.ctan.org/pkg/enumext>

 <https://github.com/pablgonz/enumext>

## Abstract

This package provides “enumerated list” environments compatible with  $\LaTeX$  tagging PDF for creating “simple exercise sheets” along with “multiple choice questions”, storing the `(answers)` to these in memory using `multicol` and `scontents` packages and the `l3seq` and `l3prop` modules.

## Contents

<b>1</b>	<b>Introduction</b>	<b>1</b>	<b>6</b>	<b>The storage system</b>	<b>11</b>
1.1	Description and usage	2	6.1	Keys for storage system	11
1.2	The concept of left margin	3	6.1.1	Keys for label and ref	11
1.3	User interface	3	6.1.2	Keys for wrap and display	12
1.3.1	Internal counters	3	6.1.3	Keys for debug and checking	12
1.3.2	Public dimension	3	6.2	The command <code>\anskey</code>	12
1.3.3	Support for <code>multicol</code>	3	6.2.1	Keys for <code>\anskey</code>	12
1.3.4	Support for <code>minipage</code>	4	6.3	The environment <code>anskey*</code>	13
1.3.5	The <code>\label</code> and <code>\ref</code> system	4	6.3.1	Keys for <code>anskey*</code>	13
1.3.6	Support for <code>\footnote</code>	4	6.4	The environment <code>keyans</code>	14
<b>2</b>	<b>The environments provided</b>	<b>5</b>	6.4.1	The <code>\item*</code> in <code>keyans</code>	14
2.1	The environment <code>enumext</code>	5	6.5	The environment <code>keyanspic</code>	15
2.2	The environment <code>enumext*</code>	5	6.5.1	The command <code>\anspic</code>	15
2.3	The command <code>\item*</code>	5	6.6	Printing stored content	16
2.3.1	Keys for <code>\item*</code>	6	6.6.1	The command <code>\getkeyans</code>	16
2.4	The command <code>\item</code> in <code>enumext*</code>	6	6.6.2	The command <code>\foreachkeyans</code>	16
<b>3</b>	<b>The command <code>\setenumext</code></b>	<b>6</b>	6.6.3	The command <code>\printkeyans</code>	16
<b>4</b>	<b>The command <code>\setenumextmeta</code></b>	<b>6</b>	<b>7</b>	<b>Full examples</b>	<b>17</b>
<b>5</b>	<b>The keyval system</b>	<b>7</b>	<b>8</b>	<b>The way of non-enumerated lists</b>	<b>20</b>
5.1	Keys for label and ref	7	<b>9</b>	<b>References</b>	<b>22</b>
5.2	Keys for spaces	8	<b>10</b>	<b>Change history</b>	<b>22</b>
5.2.1	Vertical spaces	8	<b>11</b>	<b>Index of Documentation</b>	<b>23</b>
5.2.2	Horizontal spaces	9	<b>12</b>	<b>Implementation</b>	<b>25</b>
5.3	Keys for add code	9	<b>13</b>	<b>Index of Implementation</b>	<b>137</b>
5.4	Keys for start, series and resume	9			
5.5	Keys for <code>multicols</code>	10			
5.6	Keys for <code>minipage</code>	10			
5.6.1	The command <code>\miniright</code>	10			
5.6.2	The key <code>mini-right</code>	10			

## Motivation and acknowledgments

Usually it is enough to use the classic `enumerate` environment to generate “simple exercise sheets” or “multiple choice questions”, the basic idea behind `enumext` is to cover three points:

1. To have a simple interface to be able to write “lists of exercises” with “answers”.
2. To have a simple interface for writing “multiple choice questions”.
3. To have a simple interface for placing “columns” and “drawings” or “tables”.

This package would not be possible without Phelype Oleinik who has collaborated and adapted a large part of the code and all  $\LaTeX$  team for their great work and to the different members of the `TeX-SX` community who have provided great answers and ideas. Here a note of the main ones:

1. Answer given by Alan Munn in `\topsep`, `\itemsep`, `\partopsep`, `\parsep` - what do they each mean (and what about the bottom)?
2. Answer given by Enrico Gregorio in `Understanding minipages - aligning at top`
3. Answer given by Ulrich Diez in `Different mechanics of hyperlink vs. hyperref`
4. Answer given by Enrico Gregorio in `Minipage and multicols, vertical alignment`

<sup>\*</sup>This file describes a documentation for v1.0, last revised 2024-09-25.

<sup>†</sup>E-mail: [pablgonz@educarchile.cl](mailto:pablgonz@educarchile.cl).

License and Requirements

Permission is granted to copy, distribute and/or modify this software under the terms of the LaTeX Project Public License (lpp), version 1.3 or later (<https://www.latex-project.org/lpp1.txt>). The software has the status “maintained”.  
The enumext package loads and requires multicol[3] and scontents[4] packages, need to have a modern T<sub>E</sub>X distribution such as T<sub>E</sub>X Live or MiK<sub>T</sub>E<sub>X</sub>. It has been tested with the standard classes provided by L<sup>A</sup>T<sub>E</sub>X: book, report, article and letter on 10pt, 11pt and 12pt.

1 Introduction

In the L<sup>A</sup>T<sub>E</sub>X world there are many useful packages and classes for creating “lists of exercises”, “worksheets” or “multiple choice questions”, classes like exam[1] and packages like xsim[2] do the job perfectly, but they don’t always fit the basic day to day needs.

In my work (and in the work of many teachers) it is common to use “simple exercise sheets” also known as “informal lists of exercises”, as an example:

1. Factor  $x^2 - 2x + 1$

2. Factor  $3x + 3y + 3z$

3. True False

(a)  $\alpha > \delta$

(b) L<sup>A</sup>T<sub>E</sub>Xze is cool?

4. Related to Linux
- (a) You use linux?

(b) Usually uses the package manager?

(c) Rate the following package and class

i. xsim-exam

ii. xsim

iii. exsheets

Sometimes we are also interested in showing the “answers” along with the questions:

1. Factor  $x^2 - 2x + 1$ 

\* 

( $x - 1$ )<sup>2</sup>

2. Factor  $3x + 3y + 3z$ 

\* 

$3(x + y + z)$

3. True False

(a)  $\alpha > \delta$ 

\* 

False

(b) L<sup>A</sup>T<sub>E</sub>Xze is cool?

\* 

Very True!

4. Related to Linux
- (a) You use linux?

\* 

Yes

(b) Usually uses the package manager?

\* 

Yes, dnf

(c) Rate the following package and class

i. xsim-exam

\* 

doesn’t exist for now :(

ii. xsim

\* 

very good

iii. exsheets

\* 

obsolete

Or we are interested in referring to a specific question and its “answer”, for example:

The answer to 3.(b) is “Very True!” and the answer to 4.(c).ii is “very good”.

Or we are interested in printing all the “answers”:

1. ( $x - 1$ )<sup>2</sup>

2.  $3(x + y + z)$

3. (a) False

(b) Very True!

4. (a) Yes
- \* (b) Yes, dnf

\* (c) i. doesn’t exist for now :(

\* ii. very good

\* iii. obsolete

\*

Another very common thing to use in my work is “multiple choice questions”, for example:

1. First type of questions

A) value

C) value

B) correct

D) value

2. Second type of questions

I.  $2\alpha + 2\delta = 90^\circ$

II.  $\alpha = \delta$

III.  $\angle EDF = 45^\circ$

A) I only

D) I and III only

B) II only

E) I, II, and III

C) I and II only

★ 3. Third type of questions

(1)  $2\alpha + 2\delta = 90^\circ$

(2)  $\angle EDF = 45^\circ$

A) value

D) value

B) value

E) value

C) value
4. Question with image and label below:

A

A)

B


B)

A

C)

A

D)



E)

5. Question with image on left side:

A) value

B) value

C) value

D) correct

E) value

B
- Where what we are interested in the *label* and a “short note” that we leave as an explanation, and then print them:
- ©2024 by Pablo González L
- 2 / 152

1. B)  $x = 5$

2. D)

3. C) some note
- \* 4. E) A duck

\* 5. D) "other note"

\*

These “*simple worksheets*” or “*multiple choice questions*” appear to be easy to obtain using a combination of the `enumerate`, `minipage` and `multicols` environments, but like many things, what “*looks simple*” is not so simple.

The `enumext` package was created and designed to meet these small requirements in the creation of “*simple worksheets*” and “*multiple choice questions*”.

1.1 Description and usage

The `enumext` package defines enumerated environments using the `list` environment provided by  $\text{\LaTeX}$ , but “*does not redefine*” any internal commands associated with it such as `\list`, `\endlist` or `\item` outside of the “*scope*” in which they are defined.

- This package is NOT intend to replace the `enumerate` environment nor replace the powerful `enumitem`[6], the approach is intended to work without hindering either of them.

This package can be used with `xelatex`, `lualatex`, `pdflatex` and the classical `latex»dvips»ps2pdf` and is present in  $\text{\TeX}$  Live and  $\text{\MiKTeX}$ , use the package manager to install. For manual installation, download `enumext.zip` and unzip it, run `lualatex enumext.dtx` and move all files to appropriate locations, then run `mktexlsr`. To produce the documentation run `lualatex enumext.dtx` two times.

enumext.sty

enumext.pdf

README.md

enumext.dtx

»

»

»

»

TDS:tex/latex/enumext/

TDS:doc/latex/enumext/

TDS:doc/latex/enumext/

TDS:source/latex/enumext/

The package is loaded in the usual way:

\usepackage{enumext}

1.2 The concept of left margin

There is a direct relationship between the parameters `\leftmargin`, `\itemindent`, `\labelwidth` and `\labelsep` plus an “*extra space*” that makes it difficult to obtain the desired *horizontal spaces* in a `list` environment.

Usually we don’t want the `list` to go beyond the left margin of the page, but since these four values are related, that causes a problem. The `enumitem`[6] package adds the `\labelindent` parameter to solve some of these problems. A simplified representation of this in the figure 1.



Figure 1: Representation of horizontal lengths in `enumitem`.

The `enumext` package does NOT provide a user interface to set the values for `\leftmargin` and `\itemindent`, instead it provides the keys `list-offset` and `list-indent` which internally set the values for `\leftmargin` and `\itemindent`. The concepts of `\leftmargin` and `\itemindent` are different in `enumext`. The figure 2 shows the visual representation of idea.



Figure 2: Representation of horizontal lengths concept in `enumext`.

In this way we reduce a *little* the amount of parameters we have to pass. With the default values of keys `list-offset`, `list-indent`, `labelwidth` and `labelsep` the lists will have the (usually) expected output for “*simple worksheets*”. The figure 3 shows the visual representation.



Figure 3: Default horizontal lengths `list-offset=0pt`, `list-indent=\labelwidth+\labelsep` in `enumext`.

### 1.3 User interface

The user interface consists of two main list environments `enumext` (vertical) and `enumext*` (horizontal), the environment `anskey*` and the command `\anskey` to “store content” and the environments `keyans`, `keyans*` and `keyanspic` for multiple choice. It also provides the commands `\getkeyans` to print individual *stored content*, `\printkeyans` to print all *stored content*, `\miniright` for `minipage` and `\setenumext` to config all `[key = val]` options.

#### 1.3.1 Internal counters

The package `enumext` uses internally the `enumXi`, `enumXii`, `enumXiii`, `enumXiv` counters for the four nesting levels of the `enumext` environment, the `enumXv` counter for the `keyans` environment, the `enumXvi` counter for the `keyanspic` environment, the counter `enumXvii` for `enumext*` environment and the counter `enumXviii` for `keyans*` environment.

- If any package defines these counters or they are user-defined in the document, the package will return a fatal error and abort the load.

#### 1.3.2 Public dimension

The package `enumext` only provides a single public dimension `\itemwidth` and is intended for user convenience only and is not for internal use as such. The dimension `\itemwidth` is *rigid length* and contains the “width of the content” of each `\item` regardless of `labelwidth` and `labelsep`.

- If any package defines `\itemwidth` or they are user-defined `\itemwidth` in the document, the package will overwrite it without warning.

#### 1.3.3 Support for multicol

The package provides direct support for using the `multicol`[3] package. This allows to obtain directly a two-column output as shown in the figure 4.



Figure 4: Representation of the two column output for a nested level in `enumext` environment.

The “non starred” version of the `multicols` environment is always used together with the `\raggedcolumns` command and is controlled by `columns` and `columns-sep` keys. It can be used in all nesting levels of the environment `enumext` and the environment `keyans` and can together with the `mini-env` key. If you need to force a start a new column `\columnbreak` must be used (see §5.5).

- The `\columnseprule` command is not available as a key and is set to “zero” for the inner levels and the `keyans` environment. If the value of this is set inside the document, it will affect “all environments” that use the `columns` key.

#### 1.3.4 Support for minipage

The package provides direct support for `minipage` environment, this allows you to obtain an output like the one shown in figure 5.



Figure 5: Representation of the `mini-env` output for a nested level `enumext` environment.

The `minipage` environments on “left side” and “right side” is always used with “aligned on top” `[t]`. It can be used in all nesting levels of the environment `enumext` and the environment `keyans` and is controlled by `mini-env` and `mini-sep` keys. In order to switch from the “left” side `minipage` environment to the “right” side one must use the command `\miniright` (see §5.6).

#### 1.3.5 The \label and \ref system

This package provides a user interface like the `enumitem`[6] package to customize the references which is activated by the `ref` key (§5.1), the standard  $\TeX$  `\label` and `\ref` commands work as usual. It also provides an “internal reference” system for the “stored content” by means of the key `save-ref` (§6.1.1) when the key `save-ans` (§6.1) is active.

#### 1.3.6 Support for \footnote

This package provides an internal implementation for the `\footnote` command which is compatible with the `hyperref` package for the `enumext*` and `keyans*` environments, but will not produce the expected links, and if the `mini-env` key is used in `enumext` or `keyans` environments the output will look like the classic way they are displayed in the environment `minipage`.

The best way to solve this is to use Jean-François Burnol `footnotehyper`[9] package, it will support keeping the links if `hyperref` is loaded with the `hyperfootnotes=true` option (default) and will show the output numbered at the bottom of the page (as opposed to how it is displayed in the `minipage` environment). The way to load it is as follows:

```
\usepackage{footnotehyper}
\makesavenoteenv{enumext}
\makesavenoteenv{enumext*}
```

At the moment the `footnotehyper` package is not compatible with  $\text{\LaTeX}$  tagged PDF.

2 The environments provided

The package `enumext` provides two main list environments, the *vertical* environment `enumext` and the *horizontal* environment `enumext*`.

<code>enumext</code>	<code>\begin{enumext}[\langle keyval list \rangle]</code>	<code>\begin{enumext*}[\langle keyval list \rangle]</code>
<code>enumext*</code>	<code>\item \langle item content \rangle</code>	<code>\item \langle item content \rangle</code>
	<code>\item [\langle custom \rangle] \langle item content \rangle</code>	<code>\item [\langle custom \rangle] \langle item content \rangle</code>
	<code>\item*[\langle symbol \rangle][\langle offset \rangle] \langle item content \rangle</code>	<code>\item*[\langle symbol \rangle][\langle offset \rangle] \langle item content \rangle</code>
	<code>\end{enumext}</code>	<code>\end{enumext*}</code>

2.1 The environment enumext

The `enumext` is an environment that works in the same way as the standard `enumerate` environment provided by  $\text{\LaTeX}$ , `\item` and `\item[\langle custom \rangle]` commands work in the usual way. The environment can be nested with at most “four levels” and the options can be configured globally using `\setenumext` command and locally using `[\langle key = val \rangle]` in the environment.

Example with `columns=2`

1. This text is in the first level.
- A. This text is in the fourth level.
- (a) This text is in the second level.
- X This text is in the first level.
- i. This text is in the third level.
- ★ 2. This text is in the first level.

2.2 The environment enumext\*

The `enumext*` is a *horizontal list environment* similar to the `enumerate*` environment provided by the `enumitem` package or `task` environment provided by the `task` package, `\item` and `\item[\langle custom \rangle]` work as usual. The options can be configured globally using `\setenumext` command and locally using `[\langle key = val \rangle]` in the environment.

Some considerations to take into account for this environment:

- The environment cannot be nested within itself or in the environment `keyans*`, but it can be nested within `enumext` and vice versa.
- Each “item” in the environment is placed within a `minipage` environment whose *width* is stored in the dimension `\itemwidth` that NOT includes `labelwidth`, `labelsep`, only the *width of the content*.
- You cannot have floating environments like `figure` or `table` but `\footnote` with `hyperref` support is supported if the `footnotehyper` package is loaded.
- You cannot have any standard list environments like `itemize`, `enumerate`, `description`, `quote`, `quotation`, `verse`, `center`, `flushleft`, `flushright`, `verbatim`, `tabbing`, `trivlist`, `list` and all environments created with `\newtheorem`.

Example with `columns=2`

1. This text is in the first level.
2. This text is in the first level.
- X This text is in the first level.
- ★ 4. This text is in the first level.

2.3 The command \item\*

```
\item* \item*
\item*[\langle symbol \rangle]
\item*[\langle symbol \rangle][\langle offset \rangle]
```

The `\item*`, `\item*[\langle symbol \rangle]` and `\item*[\langle symbol \rangle][\langle offset \rangle]` works like the numbered `\item`, but placing a `\langle symbol \rangle` to the “left” of the `\langle label \rangle` separated from it by the `\langle offset \rangle` set by the the second optional argument. The default values for `\langle symbol \rangle` and `\langle offset \rangle` are `\$star$ ‘★’` and the value set by `labelsep` key.

The *starred argument* “★” cannot be separated by spaces ‘ ’ from the command, i.e. `\item*` and the first optional argument does “not support” verbatim content. Can be configure with the keys `item-sym*` and `item-pos*` locally in the environment or globally using `\setenumext` command (§3).

The behavior of `\item*` in the `enumext` and `enumext*` environments is NOT the same as in the `keyans` and `keyans*` environments.

2.3.1 Keys for \item\*

`item-sym*` = {<symbol>} default: \$star\$  
Sets the *symbol* to be displayed in the “left” of the box containing the current <label> set by `labelwidth` key for `\item*` in `enumext` and `enumext*`. The *symbol* can be in text or math mode, for example `item-sym*={$\ast$}`.

`item-pos*` = {<rigid length>} default: by levels  
Sets the *offset* between the box containing the current <label> defined by `labelwidth` key and the <symbol> set by `item-sym*` key. The default values are set by `labelsep` key at each level. If positive values are passed it will *offset to the left* and if negative values are passed it will *offset to the right*.

2.4 The command \item in enumext\*

The `\item` command for the `enumext*` environment provides an optional “first argument” `\item(<columns>)` which “joins items” between columns. Let’s consider the following examples adapted directly from the `task` package:

```
\begin{enumext*}[widest=10,columns=4]
  \item The first
  \item* The second
  \item The third
  \item The fourth
  \item(3)* The fifth item is way too long for this and needs three columns
  \item The sixth
  \item The seventh
  \item(2)[X] The eighth item is way too long for this and needs two columns
    (\the\itemwidth)
  \item The ninth
  \item[Z] The tenth (\the\itemwidth)
\end{enumext*}
```

1. The first
- ★ 2. The second
3. The third
4. The fourth
- ★ 5. The fifth item is way too long for this and needs three columns
6. The sixth
7. The seventh
- X 8. The eighth item is way too long for this and needs two columns (196.17749pt)
9. The ninth
- Z 10. The tenth (89.28171pt)

3 The command \setenumext

<u>\setenumext</u>	<code>\setenumext{&lt;key = val&gt;}</code>	<code>\setenumext[&lt;keyans*&gt;]{&lt;key = val&gt;}</code>
	<code>\setenumext[&lt;enumext, level&gt;]{&lt;key = val&gt;}</code>	<code>\setenumext[&lt;print, level&gt;]{&lt;key = val&gt;}</code>
	<code>\setenumext[&lt;enumext*&gt;]{&lt;key = val&gt;}</code>	<code>\setenumext[&lt;print, *&gt;]{&lt;key = val&gt;}</code>
	<code>\setenumext[&lt;keyans&gt;]{&lt;key = val&gt;}</code>	<code>\setenumext[&lt;print*&gt;]{&lt;key = val&gt;}</code>

The command `\setenumext` sets the <keys> on a global basis for environments `enumext`, `enumext*`, `keyans`, `keyans*` and the `\printkeyans` command. It can be used both in the preamble and in the body of the document as many times as desired.

The <keys> set in the optional arguments of environments and commands have the *highest precedence*, overriding both options passed by `\setenumext`. If the optional argument is not passed, the first level of the environment `enumext` will be taken by default.

- 🔴 The key `save-ans` that activate the “storage system” must NOT be passed through this command and must be passed directly in the optional argument of the “first level” of the environment in which they are executed.

4 The command \setenumextmeta

<u>\setenumextmeta</u>	<code>\setenumextmeta {&lt;key name&gt;}{&lt;key-one = val, key-two = val, ...&gt;}</code>
	<code>\setenumextmeta*{&lt;key name&gt;}{&lt;key-one = val, key-two = val, ...&gt;}</code>
	<code>\setenumextmeta [&lt;enumext*&gt;]{&lt;key name&gt;}{&lt;key-one = val, key-two = val, ...&gt;}</code>
	<code>\setenumextmeta [&lt;enumext, level&gt;]{&lt;key name&gt;}{&lt;key-one = val, key-two = val, ...&gt;}</code>

The command `\setenumextmeta` adds a new “meta-key” for the environments `enumext` and `enumext*`, the {<key name>} must be different from those defined by the package. If the optional argument is not passed, the new “meta-key” will be created for the first level of the environment `enumext`.

The starred version `*` will create the new “meta-key” for the environment `enumext*` and for all levels of the environment `enumext`.



## 5 The keyval system

The  $\langle key = val \rangle$  system used by the `enumext` package is implemented using `l3keys` so it must be taken into consideration that those keys marked as “*value forbidden*”, that is  $\langle key \rangle$  is different from  $\langle key = \rangle$ .

All  $\langle keys \rangle$  described in this section are available for the `enumext`, `enumext*`, `keyans` and `keyans*` environments with the exception of the keys `series`, `resume`, `resume*` which are only available for the “*first level*” of the environments `enumext` and `enumext*`; and the keys `mini-right`, `mini-right*` which are only available for the `enumext*` and `keyans*` environments.

All  $\langle keys \rangle$  related to vertical or horizontal spacing accept a “*skip*” or “*dim*” expression if passed between braces, i.e. you do not need to use `\dimeval` or `\dimexpr` to perform calculations.

- It should be kept in mind that using any  $\langle key \rangle$  that sets a *rubber lengths* or *rigid lengths* for vertical or horizontal space on a level will influence the vertical and horizontal space for *inners levels* and `keyans`, `keyans*` and `keyanspic` environments.

### 5.1 Keys for `label` and `ref`

`label = { $\langle \backslash alph* | \backslash Alph* | \backslash arabic* | \backslash roman* | \backslash Roman* \rangle$ }` default: *by levels*

Sets the  $\langle label \rangle$  that will be printed at the *current level*. The default value for the first level of the environments `enumext` and `enumext*` are `\arabic*`, for second level are  $\langle \backslash alph* \rangle$ , for third level are `\roman*`, and for fourth level are `\Alph*`. For `keyans` and `keyans*` environments the default value is `\Alph*`.

- This key is intended to give the basic structure with which the  $\langle label \rangle$  will be displayed, and the form in which it is used by standard “*label and ref*” and the “*internal reference*” system with the `save-ref` key. You cannot use commands with  $\langle label \rangle$  as an argument, for example `\emph{\langle alph* \rangle}` will return an error. For full customization of how  $\langle label \rangle$  is displayed use the `font` or `wrap-label` keys.

`ref = { $\langle code \{ \backslash alph* | \backslash Alph* | \backslash arabic* | \backslash roman* | \backslash Roman* \} more code \rangle$ }` default: *empty*

Modifies the way *cross references* are displayed. The `label` key sets the default form of the *cross references*, by using this key you can define a different format, for example: `ref=\emph{\langle alph* \rangle}` is valid.

Internally it renews the command associated with each counter when it is executed, i.e., in the environment `enumext` the command `\theenumxi` is modified when the key is executed at the first level, `\theenumxii` when it is executed at the second level and `\theenumxiii` together with `\theenumxiv` when it is executed at the third and fourth levels.

- This must be kept in mind, since the values set by the `label` and `ref` keys are not cumulative by levels, so if you have used the `ref` key in the first level and then want to associate the counter with `label` or `ref` in the second level you must use the direct commands, i.e. `\arabic{enumxi}` to indicate the count of the first level instead of using `\theenumxi`.

`labelsep = { $\langle rigid length \rangle$ }` default: *0.3333em*

Sets the *horizontal space* between the box containing the current  $\langle label \rangle$  defined by `label` key and the text of an item on the first line. Internally sets the value of `\labelsep` for the current level.

`labelwidth = { $\langle rigid length \rangle$ }` default: *by label*

Sets the *width* of the box containing the current  $\langle label \rangle$  set by `label` key. Internally sets the value of `\labelwidth` for the current level. The default values are calculated by means of the *width* of a box by setting a *value* to the current counter using ‘0’ for `\arabic*`, ‘M’ for `\Alph*`, ‘m’ for `\alph*`, ‘VIII’ for `\Roman*` and ‘viii’ for `\roman*`.

`widest = { $\langle integer | string \rangle$ }` default: *empty*

Sets the `labelwidth` key pass the  $\langle integer \rangle$  or converting the  $\langle string \rangle$  of the form `\Alph`, `\alph`, `\Roman` or `\roman` to a *value* for the current counter defined by `label` key, then calculating the *width* by means of a box. For example `widest={XXIII}` or `widest={23}` are equivalent. This key is useful when the default values of the `labelwidth` key are smaller than those actually used.

`font = { $\langle font commands \rangle$ }` default: *empty*

Sets the *font style* for the current  $\langle label \rangle$  defined by `label` key. For example `font={\bfseries\small}`.

`align = { $\langle left | right | center \rangle$ }` default: *left*

Sets the *aligned* of  $\langle label \rangle$  defined by `label` key on the current level in the label box.

`wrap-label = { $\langle code \{ \#1 \} more code \rangle$ }` default: *empty*

Wraps the *current*  $\langle label \rangle$  defined by `label` key referenced by  $\{ \#1 \}$ . The  $\{ \langle code \rangle \}$  must be passed between braces. This key does not modify the value set by the `labelwidth` key and is applied only on `\item` and `\item*`. When using it in the `\setenumext` command it is necessary to use the *double hash* ‘ $\{ \# \#1 \}$ ’. For example `wrap-label={\fbox{\#1}}` or you can create a command:

```
\NewDocumentCommand \labelbx { s +m }
{%
  \IfBooleanTF{\#1}
  {\strut\smash{\parbox[t]{\labelwidth}{\raggedright{\#2}}}}%
  {\strut\smash{\parbox[t]{\labelwidth}{\raggedleft{\#2}}}}%
}
```

and then pass it through the key `wrap-label={\labelbx{\#1}}` or `wrap-label={\labelbx*{\#1}}`.

`wrap-label* = { $\langle code \{ \#1 \} more code \rangle$ }` default: *empty*

The same as the `wrap-label` key but also applies on `\item[custom]`.

## 5.2 Keys for spaces

`show-length` = { $\langle true | false \rangle$ } default: *false*

Displays on the terminal the values for *all list parameters* at the current level. For *vertical spaces* show the values of `\topsep`, `\itemsep`, `\parsep` and `\partopsep`. For *horizontal spaces* show the values of `\labelwidth`, `\labelsep`, `\itemindent`, `\listparindent` and `\leftmargin`.

### 5.2.1 Vertical spaces

`topsep` = { $\langle rubber\ length | rigid\ length \rangle$ } default: *by levels*

Set the *vertical space* added to both the top and bottom of the list. Internally sets the value of `\topsep` for the current level. The default value for the first level of the environments `enumext` and `enumext*` are 8.0pt plus 2.0pt minus 4.0pt, for second level are 4.0pt plus 2.0pt minus 1.0pt, for third and fourth level are 2.0pt plus 1.0pt minus 1.0pt. For `keyans` and `keyans*` environments the default value is 4.0pt plus 2.0pt minus 1.0pt.

`parsep` = { $\langle rubber\ length | rigid\ length \rangle$ } default: *by levels*

Set the *vertical space* between paragraphs within an item. Internally sets the value of `\parsep` for the current level. The default value for the first level of the environments `enumext` and `enumext*` are 4.0pt plus 2.0pt minus 1.0pt, for second level are 2.0pt plus 1.0pt minus 1.0pt, for third and fourth level are 0pt. For `keyans` and `keyans*` environments the default value is 2.0pt plus 1.0pt minus 1.0pt.

`partopsep` = { $\langle rubber\ length | rigid\ length \rangle$ } default: *by levels*

Set the *vertical space* added, beyond `topsep`, to the “top” and “bottom” of the entire environment if the environment instance is preceded by a “blank line” or `\par` command. Internally sets the value of `\partopsep` for the current level. The default values for first and second level in environment `enumext` are 2.0pt plus 1.0pt minus 1.0pt, for third and fourth level are 1.0pt minus 1.0pt. For the `keyans` environment the default value is 2.0pt plus 1.0pt minus 1.0pt, and for the `keyans*` and `enumext*` environments it is available but *without* effect.

- The value of this parameter also affects the *inner levels* and the environments `keyans`, `keyanspic` and `keyans*`. Caution should be taken with “blank lines” or `\par` command “before” each environment or nested level when formatting the source code of document. T<sub>E</sub>X will enter  $\langle vertical\ mode \rangle$  and apply this value to the “top” and “bottom” the environment or nested level.

`itemsep` = { $\langle rubber\ length | rigid\ length \rangle$ } default: *by levels*

Set the *vertical space* between items, beyond the `parsep`. Internally sets the value of `\itemsep` for the current level. The default value for the first level of the environments `enumext` and `enumext*` are 4.0pt plus 2.0pt minus 1.0pt, for the rest of the levels are 2.0pt plus 1.0pt minus 1.0pt. For `keyans` and `keyans*` environments the default value is 4.0pt plus 2.0pt minus 1.0pt.

`noitemsep`  $\langle value\ forbidden \rangle$  default: *not used*

This is a “meta-key” that does not receive an argument. Set `itemsep` and `parsep` equal to 0pt the entire level of environment.

`nosep`  $\langle value\ forbidden \rangle$  default: *not used*

This is a “meta-key” that does not receive an argument. Sets all keys for vertical spacing equal to 0pt the entire level of environment.

`base-fix`  $\langle value\ forbidden \rangle$  default: *not used*

This is a “meta-key” that does not receive an argument available only for the *first level* of environment `enumext` and environment `enumext*`. Fix the *baseline* when an environment `enumext` is nested in `enumext*` or vice versa and there is no material between the `\item` and the start of the environment for example `\item \begin{enumext*}` within the environment `enumext`. Internally sets the keys `topsep`, `above` and `above*` at 0pt.

- The following  $\langle keys \rangle$  should be used with “caution”, they are intended to be used at the “top” and “bottom” of the environment when the `columns` or `mini-env` keys do not provide adequate *vertical spaces*. The values passed can be *rubber* or *rigid* lengths, the way they are applied is the way you differ, using the star ‘\*’  $\langle keys \rangle$  applies `\vspace*` so that T<sub>E</sub>X does *not discard* this space at page break.

`above` = { $\langle rubber\ length | rigid\ length \rangle$ } default: *not used*

Set the *extra vertical space* added, beyond `topsep`, to the top of the entire level of environment. This key is intended to give a “fine adjustment” of the vertical space on the “above” the environment without hindering the value of the `topsep` key. The space is added with `\vspace` so is “discardable”.

`above*` = { $\langle rubber\ length | rigid\ length \rangle$ } default: *not used*

Set the *extra vertical space* added, beyond `topsep`, to the top of the entire level of environment. This key is intended to give a “fine adjustment” of the vertical space on the “above” the environment without hindering the value of the `topsep` key. The space is added with `\vspace*` so is “not discardable”.

`below` = { $\langle rubber\ length | rigid\ length \rangle$ } default: *not used*

Set the *extra vertical space* space added, beyond `topsep`, to the bottom of the entire level of environment. This key is intended to give a “fine adjustment” of the vertical space on the “below” the environment without hindering the value of the `topsep` key. The space is added with `\vspace` so is “discardable”.



`below*` = { $\langle rubber\ length \mid rigid\ length \rangle$ } default: *not used*

Set the *extra vertical space* added, beyond `topsep`, to the bottom of the entire level of environment. This key is intended to give a “*fine adjustment*” of the vertical space on the “*below*” the environment without hindering the value of the `topsep` key. The space is added with `\vspace*` so is “*not discardable*”.

### 5.2.2 Horizontal spaces

`itemindent` = { $\langle rigid\ length \rangle$ } default: *0pt*

Extra *horizontal indentation*, beyond `labelsep`, of the “*first line*” off each item. This value is applied internally using `\hspace` and does not modify the value of `\itemindent`.

`rightmargin` = { $\langle rigid\ length \rangle$ } default: *0pt*

Set the *horizontal space* between the right margin of the environment and the right margin of the enclosing environment, the value it takes must be greater than or equal to *0pt*. Internally sets the value of `\rightmargin` for the current level.

`listparindent` = { $\langle rigid\ length \rangle$ } default: *0pt*

Sets the *horizontal space* indentation, beyond `list-indent`, for second and subsequent paragraphs within a list item. Internally sets the value of `\listparindent` for the current level.

`list-offset` = { $\langle rigid\ length \rangle$ } default: *0pt*

Sets the *horizontal translation* of the entire environment level from the left edge of the box defined by the `labelwidth` key. Internally sets the values of `\leftmargin` and `\itemindent` for the current level.

`list-indent` = { $\langle rigid\ length \rangle$ } default: *labelwidth + labelsep*

Sets the *indentation* of the whole environment under the box defined by `labelwidth` and `labelsep` keys. Internally sets the value of `\leftmargin` and `\itemindent` for the current level.

If `list-indent=0pt` is set in the environment `enumext` the  $\langle label \rangle$  will be part of the text, separated by the value of the `labelsep` key and the *first word*, in simple terms it will look like a “*common paragraph*”. This setting is equivalent (more or less) to the `wide` key provided by the `enumitem` package.

- For the `enumext*` and `keyans*` environments the keys `list-indent` and `list-offset` have the same effect.

## 5.3 Keys for add code

The following  $\langle keys \rangle$  should be used with “*caution*”, they are intended to inject  $\{\langle code \rangle\}$  into different parts of the defined environments. We must keep in mind that the defined environments are based on the `list` base environment provided by L<sup>A</sup>T<sub>E</sub>X which is defined (simplified) as plain form `\list{\langle arg one \rangle}{\langle arg two \rangle}`. Using the `before*` key does not allow access to the `list` parameters defined by  $[\langle key = val \rangle]$ .

`before` = { $\langle code \rangle$ } default: *not used*

Execute  $\{\langle code \rangle\}$  “*before*” the environment starts. The  $\{\langle code \rangle\}$  must be passed between braces, is executed “*after*” performing all calculations related to the *list parameters* in the environment and the parameters sets by  $[\langle key = val \rangle]$  that is, in the second argument of the list after setting all the parameters `\begin{list}{\langle arg one \rangle}{\langle arg two \rangle}\{\langle code \rangle\}`.

`before*` = { $\langle code \rangle$ } default: *not used*

Execute  $\{\langle code \rangle\}$  “*before*” the environment starts. The  $\{\langle code \rangle\}$  must be passed between braces, is executed “*before*” performing all calculations related to the *list parameters* and  $[\langle key = val \rangle]$  sets in the environment that is, before the arguments defining the environment are executed: `\{\langle code \rangle\}\begin{list}{\langle arg one \rangle}{\langle arg two \rangle}`.

`first` = { $\langle code \rangle$ } default: *not used*

Executes  $\{\langle code \rangle\}$  when “*starting*” the environment. The  $\{\langle code \rangle\}$  must be passed between braces, is executed right “*after*” all *list parameters* are done, after the second argument of list, just before the first occurrence of `\item: \begin{list}{\langle arg one \rangle}{\langle arg two \rangle}\{\langle code \rangle\}\item`.

- Keep in mind that the code set in this key will affect the entire “*body*” of the environment and therefore the inner levels of the list and the `keyans` environment. It is recommended to set this key per level.

`after` = { $\langle code \rangle$ } default: *not used*

Execute  $\{\langle code \rangle\}$  “*after*” finishing the environment. The  $\{\langle code \rangle\}$  must be passed between braces.

## 5.4 Keys for start, series and resume

`start` = { $\langle integer \mid integer\ expression \rangle$ } default: *1*

Sets the *start value* of the numbering on the current level. The  $\{\langle integer\ expression \rangle\}$  must be passed between braces, internally is evaluated and pass to the counter defined by `label` key on the current level, i.e. it is equivalent to enter `start={\dimeval{100*\value{chapter}}}` or `start={100*\value{chapter}}`.

`start*` = { $\langle integer \mid string \rangle$ } default: *not used*

Sets the *start value* of the numbering on the current level. Internally  $\langle string \rangle$  is converted and passed as value to the counter defined by `label` key on the current level, i.e. it is equivalent to enter `start=5`, `start=E` or `start=v`.

The following  $\langle keys \rangle$  are “*only*” available for the `enumext*` environment and the “*first level*” of the `enumext` environment and are ignored if set when nested within each other.

`series = {⟨series name⟩}` default: *not used*

Stores the *keys* of the optional argument of the “first level” of the environment in which it is executed in `{⟨series name⟩}` which is used as an argument in the key `resume`. The *⟨keys⟩* stored in `{⟨series name⟩}` are not cumulative and are overwritten if the same `{⟨series name⟩}` is used again.

`resume = {⟨series name⟩}` default: *not used*

Sets the *start value* and *options* for the “first level” continuing the numbering of the environment in which the `series={⟨series name⟩}` key was executed. If passed *without value* this will only set *start value* continue the numbering from the last environment in which `series={⟨series name⟩}` or `resume={⟨series name⟩}` is not present and if the `save-ans` key is active it will continue the numbering from the last environment in which it was executed. The *start value* can be overwritten using `start` or `start*` keys.

`resume*` *⟨value forbidden⟩* default: *not used*

Sets the *start value* and *options* for the “first level” continuing the numbering of the environment in which the `series={⟨series name⟩}` or `resume={⟨series name⟩}` keys are NOT present, if the `save-ans` key is active it will continue the numbering from the last environment in which it was executed. The *start value* can be overwritten using `start` or `start*` keys.

- For security reasons the `series` key will never save in `{⟨series name⟩}` the keys `series`, `resume`, `resume*`, `save-ans`, `save-key`, `start*` and `start`. When using the key `resume={⟨series name⟩}` it will have hierarchy in the *⟨keys⟩* that are saved in `{⟨series name⟩}`, in order to establish the value of a *⟨key⟩* already saved in `{⟨series name⟩}` it must be placed to the “right” of `resume={⟨series name⟩}`, the same thing happens with the `resume*` key, the exception is the `save-ans` key that must be placed on the “left” if you want to start the numbering with its value. The `resume` key passed “without value” must be exactly “without value”, i.e. `resume=` cannot be used and if executed before `resume*` it will affect the *start value*.

## 5.5 Keys for multicol

`columns = {⟨integer⟩}` default: **1**

Set the *number of columns* to be used by the `multicol` environment within the environment. The value must be a positive integer less than or equal to **10**.

`columns-sep = {⟨rigid length⟩}` default: *by level*

Set the *space between columns* used by the `multicol` environment within the environment. Internally sets the value of `\columnsep`, by default its value is equal to the sum of the values set in the keys `labelwidth` and `labelsep` of the current level.

- The `\footnote{⟨text⟩}` command in the nested levels of `multicol` will not work as expected, prefer the use of `\footnotemark[⟨number⟩]` inside the environment and `\footnotetext[⟨number⟩]{⟨text⟩}` outside the environment or via the *after* key.

## 5.6 Keys for minipage

`mini-env = {⟨rigid length⟩}` default: *not used*

Sets the *width* of the `minipage` environment on the “right side”. This value added to the value set by the `mini-sep` key to determines the *width* of the `minipage` environment on the “left side”, taking `\linewidth` as the maximum reference value.

`mini-sep = {⟨rigid length⟩}` default: **0.3333em**

Sets the *space between* the `minipage` environment on the “left side” and the `minipage` environment on the “right side”. This separation is applied together with `\hfill`.

### 5.6.1 The command \miniright

---

```
\miniright \begin{enumext}[mini-env=⟨rigid length⟩] ⟨item's before⟩ \item \miniright ⟨content⟩ \end{enumext}
\begin{enumext}[mini-env=⟨rigid length⟩] ⟨item's before⟩ \item \miniright*⟨content⟩ \end{enumext}
```

---

The `\miniright` command close the `minipage` environment on the “left side” and opens the `minipage` environment on the “right side” by starting it with the `\centering` command. It must be placed “after” the last `\item` of the current environment and “before” starting the material to be placed on the “right side”.

The *starred argument* “\*” inhibits the use of `\centering` command i.e. the usual  $\TeX$  justification is maintained in the `minipage` on the “right side”.

- The `\footnote{⟨text⟩}` command in `minipage` environment will work as usual. If you prefer the footnotes to be numbered (not lowercase) and outside the environment, use `\footnotemark[⟨number⟩]` inside the environment and `\footnotetext[⟨number⟩]{⟨text⟩}` outside the environment or via the *after* key (see §1.3.6 for full support).

### 5.6.2 The key mini-right

In the horizontal list environments `enumext*` and `keyans*` it is not possible to use the `\miniright` command and the `mini-right` key must be used instead.

`mini-right = {⟨content⟩}` default: *not used*

Set the *content* for the drawing or tabular to be placed in the `minipage` environment on the “right side” by starting it with `\centering`. The `{⟨content⟩}` must be passed between braces.

`mini-right* = {⟨content⟩}` default: *not used*

Same as above, but *without* starting with `\centering`.

## 6 The storage system

The entire mechanism for “*storing content*” it is activated according to `save-ans` key on the “*first level*” of `enumext` or `enumext*` environments and it is ignored if they are established when they are nested inside each other. Only when this  $\langle key \rangle$  is “*active*” the `\anskey` command and the environments `anskey*`, `keyans`, `keyans*` and `keyanspic` are available.

```
\begin{enumext}[save-ans={\langle store name \rangle}]
  \item Text \anskey{answer}
  \item Text
  \begin{keyans}
    ...
  \end{keyans}
\end{enumext}
```

```
\begin{enumext}[save-ans={\langle store name \rangle}]
  \item Text \anskey{answer}
  \item Text
  \begin{keyanspic}
    ...
  \end{keyanspic}
\end{enumext}
```

By executing the key `save-ans={\langle store name \rangle}` the entire structure of the environment (excluding the first level) including the optional arguments passed to the inner levels or the environment nested in it, along with the content passed to `\anskey`, the current  $\langle labels \rangle$  for `\item*` and `\anspic*` in the environments `keyans`, `keyans*` and `keyanspic` will be stored in a  $\langle sequence \rangle$  and at the same time will be stored (without the environment structure or optional arguments) in a  $\langle prop list \rangle$ .

The optional arguments of the inner levels or the nested environment are filtered by excluding all  $\langle keys \rangle$  related to the “*stored system*” along with the keys `series`, `resume` and `resume*` when storing in  $\langle sequence \rangle$ .

### 6.1 Keys for storage system

- The only  $\langle keys \rangle$  available for all levels of the `enumext` environment and the `enumext*` environment are `no-store` and `save-key`, the rest of the  $\langle keys \rangle$  described in this section must be passed directly in the optional argument of the “*first level*” of the environment in which the key `save-ans` is executed. The key `save-ans` should NOT be passed with the command `\setenumext`.

`save-ans = {\langle store name \rangle}` default: *not set*

Sets the *name* of the  $\langle sequence \rangle$  and  $\langle prop list \rangle$  in which the contents will be “*stored*” by `\anskey` and `anskey*` in `enumext` and `enumext*` environments, `\item*` in `keyans` and `keyans*` environments and `\anspic*` in `keyanspic` environment. If the  $\langle sequence \rangle$  or  $\langle prop list \rangle$  does not exist, it will be created globally and will not be overwritten if the key is used again.

`save-key = {\langle key list \rangle}` default: *not set*

This key *overrides* the default “*stored keys*” of the optional arguments of the inner levels or nested environment that will be passed to the  $\langle sequence \rangle$ . The  $\langle key list \rangle$  passed to this key ignores any  $\langle keys \rangle$  in the “*stored system*” and must be passed between braces. For example, if we execute at a second level:

```
\begin{enumext}[save-ans={\langle store name \rangle}]
  \item Text \anskey{answer}
  \item Text
  \begin{enumext}[nosep, columns=2, save-key={columns=3}]
    ...
  \end{enumext}
\end{enumext}
```

The  $\langle keys \rangle$  that will be stored by default in the  $\langle sequence \rangle$  would be `nosep`, `columns=2`, but using the key `save-key={columns=3}` will overwrite this and store it in the  $\langle sequence \rangle$  only the key `columns=3` ignoring all the others.

`save-sep = {\langle text symbol \rangle}` default: `{,}`

Sets the *text symbol* that will separate the current  $\langle label \rangle$  to the *optional argument* passed to the `\item*` and `\anspic*` in the `keyans`, `keyans*` and `keyanspic` environments and storing them in the  $\langle store name \rangle$  defined by the `save-ans` key. The  $\{\langle text symbol \rangle\}$  must always be passed between braces, whitespace ‘’ is preserved within the braces and only affects the “*stored content*” and not what is displayed when using the `show-ans` or `show-pos` keys.

#### 6.1.1 Keys for label and ref

`save-ref = {\langle true | false \rangle}` default: *false*

Activates the “*internal label and ref*” mechanism for referencing “*stored content*” in  $\langle store name \rangle$  set by `save-ans` key. To reference the location of the “*stored content*” within the environment you must use `\ref{\langle store name : position \rangle}`, where  $\langle position \rangle$  corresponds to the position occupied by the “*stored content*” in the  $\langle store name \rangle$  returned by the `show-pos` key. For example `\ref{test:4}` will return `3`. (b) which corresponds to the location of the “*stored content*” at position `4` within the environment in which the key `save-ans=test` was set.

`mark-ref = {\langle symbol \rangle}` default: `\textasteriskcentered`

Sets the *symbol* that will be displayed by the `\printkeyans` command only if the `hyperref` package is detected and the `save-ref` key are active. This “*symbol*” is used as a “*link*” between the environment in which the `save-ans` key was used and the place where the command is executed.

### 6.1.2 Keys for wrap and display

- `wrap-ans` = {`<code> {#1} more code`} default: `\fbox+\parbox{#1}`  
 Wraps the *argument* passed to the `\anskey` and the *body* in `anskey*` environment referenced by {#1} when using the `show-ans` or `show-pos` keys. The {`<code>`} must be passed between braces and only affects the *argument* or *body* and NOT the “stored content” in the *sequence* and *prop list* {`<store name>`} set by `save-ans` key. If this key is passed using `\setenumext` it is necessary to use double ‘{#1}’.
- `wrap-opt` = {`<code> {#1} more code`} default: `[{#1}]`  
 Wraps the *optional argument* passed to the `\item*` and `\anspic*` referenced by {#1} in the `keyans`, `keyans*` and `keyanspic` environments when using the `show-ans` or `show-pos` keys. The {`<code>`} must be passed between braces and only affects the current *optional argument* and NOT the “stored content” in the *sequence* and *prop list* {`<store name>`} set by `save-ans` key. If this key is passed using `\setenumext` it is necessary to use double ‘{#1}’.
- `show-ans` = {`<true> | <false>`} default: `false`  
 Displays the *argument* passed to the `\anskey`, the *body* for `anskey*` environment, the `<label>` for `\item*` and `\anspic*` at the place where it is executed. If the optional argument is present in `\item*` or `\anspic*` it will be shown using `wrap-opt` key.
- `mark-ans` = {`<symbol>`} default: `\textasteriskcentered`  
 Sets the *symbol* to be displayed in the left margin for `\anskey`, `anskey*`, `\item*` and `\anspic*` in the place where they are executed when using the key `show-ans`.
- `mark-pos` = {`<left> | <right>`} default: `left`  
 Sets the *aligned* of the symbol defined by `mark-ans` key. The “symbol” is aligned in a box with the same dimensions of the label box defined by `labelwidth` key on the current level and separated by the value of the `labelsep` key.

### 6.1.3 Keys for debug and checking

- `show-pos` = {`<true> | <false>`} default: `false`  
 Displays the *position* occupied by the “stored content” by `\anskey`, `anskey*`, `\item*` and `\anspic*` in the *prop list* {`<store name>`} set by `save-ans` key. This position is used by the `\getkeyans` command and by the `\ref` command if the `save-ref` key is active.
- `check-ans` = {`<true> | <false>`} default: `false`  
 Enables the *checking answer* mechanism displaying an appropriate message on the terminal. This key works under the logic that each `\item` or `\item*` that does not open an inner level or nested environment contains “only one answer” or “only one execution” of the `\anskey` or `anskey*`. It is intended to be used in conjunction with the `no-store` key.
- `no-store` `<value forbidden>` default: `not used`  
 This is a *meta-key* that does not receive an argument and disables the structure stored in the *sequence* {`<store name>`} set by `save-ans` key at the entire level or a nested environment in which it runs. This key is intended for use in internal levels or nested `enumext` or `enumext*` environments in which you want to use `enumext` or `enumext*` but “without” using the `\anskey`, “without” use `anskey*`, “without” interfering with the `check-ans` key and “without” storing an unwanted structure in the *sequence* {`<store name>`}.

## 6.2 The command `\anskey`

---

`\anskey` `\anskey[<keys>]{<content>}`

---

The command `\anskey` takes a mandatory non empty argument {`<content>`} and “stores” it in the *sequence* and *prop list* {`<store name>`} set by `save-ans` key. By design the command cannot be nested or passed *verbatim material* in the argument and it is assumed that each *numbered* `\item` or `\item*` within the environment in which it is active it has a “single execution” of `\anskey` unless `\item` or `\item*` open a nested level or use the `no-store` key.

If `save-ref` key are active and the `hyperref`[8] package is detected, `\hyperlink` and `\hypertarget` will be used, otherwise the usual “label and ref” system provided by L<sup>A</sup>T<sub>E</sub>X will be used.

The `\anskey` command is available for all levels of the `enumext` environment and the `enumext*` environment, but is disabled for the `keyans`, `keyans*` and `keyanspic` environments.

### 6.2.1 Keys for `\anskey`

By default the {`<content>`} passed to `\anskey` when “storing” in the *sequence* {`<store name>`} has the form `\item<content>`, the following `<keys>` allow modifying the way in which it is “stored” in the *sequence*.

- `break-col` `<value forbidden>` default: `not used`  
 Stores {`<content>`} in the *sequence* {`<store name>`} of the form `\columnbreak\item<content>`.
- `item-join` = {`<columns>`} default: `not set`  
 Set the *number of columns* to be used for `\item(<columns>)` and stores {`<content>`} in the *sequence* {`<store name>`} of the form `\item(<columns>)<content>`.
- `item-star` `<value forbidden>` default: `not used`  
 Stores {`<content>`} in the *sequence* {`<store name>`} of the form `\item*<content>`.



`item-sym*` = {*symbol*} default:  $\$star$   
 Sets the *symbol* for `\item*` when using the key `item-star` and stores {*content*} in the *sequence* {*store name*} of the form `\item*[symbol] content`. The *symbol* can be in text or math mode, for example `item-sym*={\ast}` stores `\item*{\ast} content`.

`item-pos*` = {*rigid length*} default: *not set*  
 Sets the *offset* for `\item*` when using the keys `item-star` and `item-sym*` and stores {*content*} in the *sequence* {*store name*} of the form `\item*[symbol][offset] content`.

### Example

```
\begin{enumext}[save-ans=test,show-ans=true]
  \item* Text containing our instructions or questions. \anskey{first answer}
  \item Text containing our instructions or questions.
    \begin{enumext}
      \item Question.\anskey{second answer}
    \end{enumext}
  \item Text containing our instructions or questions. \anskey{third answer}
  \item Text containing our instructions or questions. \anskey{fourth answer}
\end{enumext}
```

- |  |   |
|--|---|
| * 1. Text containing our instructions or questions.<br>* <input type="text" value="first answer"/><br>2. Text containing our instructions or questions.<br>(a) Question.<br>* <input type="text" value="second answer"/> | 3. Text containing our instructions or questions.<br>* <input type="text" value="third answer"/><br>4. Text containing our instructions or questions.<br>* <input type="text" value="fourth answer"/> |
|--|---|

## 6.3 The environment `anskey*`

`anskey*` `\begin{anskey*}[key = val] body content \end{anskey*}`

The environment `anskey*` takes a mandatory {*body content*} and “stores” it in the *sequence* and *prop list* {*store name*} set by `save-ans` key. If `save-ref` key are active and the `hyperref`[8] package is detected, `\hyperlink` and `\hypertarget` will be used, otherwise the usual “*label and ref*” system provided by L<sup>A</sup>T<sub>E</sub>X will be used.

By design the environment cannot be nested but full supports “*verbatim material*” in the body and it is assumed that each numbered `\item` or `\item*` within the environment in which it is active it has a “*single execution*” unless `\item` or `\item*` open a nested level or use the `no-store` key.

The `anskey*` environment is implemented using the `scontents` package, for the correct operation `\begin{anskey*}` and `\end{anskey*}` must be in different lines, all {*keys*} must be passed separated by commas and “without separation” of the start of the environment. Comments “%” or “any character” after `\begin{anskey*}` or `[key = val]` on the same line are NOT supported, the package `scontents` will return an “error” message if this happens. In a similar way comments “%” or “any character” after `\end{anskey*}` on the same line the package `scontents` will return a “warning” message.

### 6.3.1 Keys for `anskey*`

The `anskey*` environment uses the same {*keys*} as the `\anskey` command next to the keys inherited from package `scontents`. The environment is available for all levels of the `enumext` environment and the `enumext*` environment, but it is disabled for the `keyans`, `keyans*` and `keyanspic` environments.

`write-env` = {*file.ext*} default: *not used*  
 Sets the name of the {*external file*} in which the {*contents*} of the environment will be written. The {*file.ext*} will be created in the working directory, relative or absolute paths are not supported. If {*file.ext*} does not exist, it will be created or overwritten if the `overwrite` key is used.

`overwrite` = {*true* | *false*} default: *false*  
 Sets whether the {*file.ext*} generated by `write-env` from the `anskey*` environment will be rewritten.

`force-eol` = {*true* | *false*} default: *false*  
 Sets if the *end of line* for the {*stored content*} is hidden or not. This key is necessary only if the last line is the closing of some environment defined by the `fancyvrb` package as `\end{Verbatim}` or another environment that does not support a comments “%” after closing `\end{Verbatim}%`.

🔒 For security reasons the keys `store-env`, `print-env` and `write-out` they have been left disabled. It is recommended that you review the `scontents`[4] documentation to understand how the keys described here work.

### Example

```
\begin{enumext}[save-ans=test,show-pos=true,start=5]
  \item* Text containing our instructions or questions.
    \begin{anskey*}[item-star]
      {first answer}
    \end{anskey*}
\end{enumext}
```

```

\item Text containing our instructions or questions.
\begin{enumext}
  \item Question.
  \begin{anskey*}
    \langle second answer \rangle
  \end{anskey*}
\end{enumext}
\item Text containing our instructions or questions.
\begin{anskey*}
  \langle third answer \rangle
\end{anskey*}
\item Text containing our instructions or questions.
\begin{anskey*}
  \langle fourth answer \rangle
\end{anskey*}
\end{enumext}

```

- |   |  |
|---|--|
| <p>★ 5. Text containing our instructions or questions.</p> <p>[5] <input type="text" value="First answer with verbatim"/></p> <p>6. Text containing our instructions or questions.</p> <p>(a) Question.</p> <p>[6] <input type="text" value="second answer"/></p> | <p>7. Text containing our instructions or questions.</p> <p>[7] <input type="text" value="third answer"/></p> <p>8. Text containing our instructions or questions.</p> <p>[8] <input type="text" value="fourth answer"/></p> |
|---|--|

## 6.4 The environments `keyans` and `keyans*`

```

keyans \begin{keyans}[\langle key = val \rangle] \item \item[\langle custom \rangle] \item* \item*[\langle content \rangle] \end{keyans}
keyans* \begin{keyans*}[\langle key = val \rangle] \item \item[\langle custom \rangle] \item* \item*[\langle content \rangle] \end{keyans*}

```

The `keyans` and `keyans*` environments are “*enumerated list*” environments designed for “*multiple choice*” questions activated by the `save-ans` key. This environments can NOT be nested and must always be at the “*first level*” of the `enumext` environment, the commands `\item` and `\item[\langle custom \rangle]` work in the usual and the command `\item(\langle columns \rangle)` is available for the `keyans*` environment.

<pre> \begin{enumext}[save-ans=test]   \item \langle item content \rangle   \begin{keyans}[\langle key = val \rangle]     \item \langle item content \rangle     \item [\langle custom \rangle] \langle item content \rangle     \item* \langle item content \rangle     \item*[\langle content \rangle] \langle item content \rangle   \end{keyans} \end{enumext} </pre>	<pre> \begin{enumext}[save-ans=test]   \item \langle item content \rangle   \begin{keyans*}[\langle key = val \rangle]     \item \langle item content \rangle     \item [\langle custom \rangle] \langle item content \rangle     \item* \langle item content \rangle     \item*[\langle content \rangle] \langle item content \rangle   \end{keyans*} \end{enumext} </pre>
---	---

The `\keys` set in the optional argument of the environment are the same (almost) as those of the `enumext` and `enumext*` environments and have higher precedence than those set by `\setenumext[\langle keyans \rangle]{\langle key = val \rangle}` or `\setenumext[\langle keyans* \rangle]{\langle key = val \rangle}`. If the optional argument is not passed or the `\keys` are not set by `\setenumext`, the default values will be the same as the second level of the `enumext` environment with the difference in the `\label` which will be set to `label=\Alph*`.

### 6.4.1 The `\item*` in `keyans` and `keyans*`

```

\item* \item*
\item*[\langle content \rangle]

```

The `\item*` and `\item*[\langle content \rangle]` command “store” the current `\label` set by `label` key next to the `\content` (if it is present) in *sequence* and *prop list* `{\langle store name \rangle}` set by `save-ans` key in the “*first level*” of the `enumext` or `enumext*` environments.

The *starred argument* “`*`” cannot be separated by spaces ‘`␣`’ from the command, i.e. `\item*` and the optional argument does “*not support*” verbatim content. By design it is assumed that the `\item*` will only appear “*once*” within the environment.

- The behavior of `\item*` in `keyans` and `keyans*` environments is NOT the same as in the `enumext` or `enumext*` environments.

### Example


```

\begin{enumext}[save-ans=test,columns=2,show-ans=true]
  \item Text containing a question.
  \begin{keyans*}[nosep,columns=2]
    \item Choice
    \item* Correct choice
    \item Choice
    \item Choice
    \item Choice
  \end{keyans*}
\end{enumext}

```



```
\end{keyans*}
\item Text containing a question and image.
\begin{keyans}[nosep,mini-env={0.4\linewidth}]
\item Choice
\item Choice
\item Choice
\item Choice
\item*[\textit{note}] Correct choice
\miniright
\includegraphics[scale=0.25]{example-image-a}
Some text
\end{keyans}
\end{enumext}
```

1. Text containing a question.  
A) Choice  
C) Choice  
E) Choice
- \* B) Correct choice  
D) Choice
2. Text containing a question and image.  
A) Choice  
B) Choice  
C) Choice  
D) Choice  
\* E) [note] Correct choice
-   
Some text

6.5 The environment keyanspic

```
keyanspic \begin{keyanspic}*[\textit{n}^{\circ} above, \textit{n}^{\circ} below]\anspic{\textit{drawing}}\anspic*[\textit{content}]{\textit{drawing}}
```

The `keyanspic` is a “fake enumerated list” environment that which uses the `\anspic` command instead of `\item`. It is activated by the `save-ans` key and has the same settings as the `keyans` environment. It is intended for placing “drawings” or “tabular” with an *in-line* or *above* and *below* layout. A representation of the output can be seen in the figure 6.

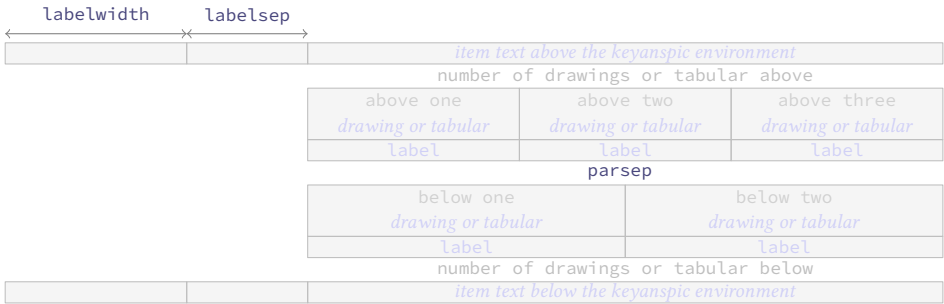


Figure 6: Representation of the `keyanspic` environment with optional argument [3,2] in `enumext`.

The *starred argument* ‘`*`’ places `\label` “above” the drawings or tabular, the optional argument determines the number drawings or tabular “above” and “below” within the environment. The vertical separation between “above” and “below” is controlled by the values set by `parsep` key passed to `keyans` environment. If the optional argument or the second part of it is omitted the drawings or tabular will be put on a *single line*.

6.5.1 The command \anspic

```
\anspic \anspic{\textit{drawing or tabular}}
\anspic*[\textit{content}]{\textit{drawing or tabular}}
```

The `\anspic` command take three arguments, the *starred argument* ‘`*`’ store the current `\label` next to the `\content` (if it is present) in *sequence* and *prop list* `{\textit{store name}}` set by `save-ans` key.

The *starred argument* ‘`*`’ cannot be separated by spaces ‘`␣`’ from the command, i.e. `\anspic*` and the optional argument does “not support” verbatim content. By design it is assumed that the *starred argument* ‘`*`’ will only appear “once” within the environment.


Example

```
\begin{enumext}[save-ans=test,show-ans,nosep]
\item Question with images.
\begin{keyanspic}[3,2]
\anspic{\includegraphics[scale=0.15]{example-image-a}}
\anspic{\includegraphics[scale=0.15]{example-image-b}}
\anspic{\includegraphics[scale=0.15]{example-image-a}}
\anspic{\includegraphics[scale=0.15]{example-image-a}}
\anspic*[\textit{note}]{\includegraphics[scale=0.15]{example-image-a}}
\end{keyanspic}
\end{enumext}
```

1. Question with images.



A)



B)



C)



D)



\* E)[note]

## 6.6 Printing stored content

### 6.6.1 The command `\getkeyans`

---

```
\getkeyans \getkeyans{<store name> : <position>}
```

---

The command `\getkeyans` prints the “stored content” in *prop list* `{<store name>}` defined by `save-ans` key in the `<position>` returned by the `show-pos` key. The “stored content” can only be accessed *after* it is stored, if `{<store name>}` does not exist the command will return an error.

The form taken by the argument `{<store name> : <position>}` is the same as that used to generate the “internal label and ref” system when `save-ref` key are active, so to refer to a “stored content”. For example `\getkeyans{test:4}` will return the “stored content” at position 4 of the environment in which the key `save-ans=test` was set.

### 6.6.2 The command `\foreachkeyans`

---

```
\foreachkeyans \foreachkeyans[<key = val>]{<store name>}
```

---

The command `\foreachkeyans` goes through and executes the command `\getkeyans` on the contents in *prop list* `{<store name>}`. If you pass without options run `\getkeyans` on all contents in *prop list* `{<store name>}`.

#### Options for command

`sep = {<code>}` default: *empty*  
 Establishes the separation between *each* content stored in *prop list* `{<store name>}`. For example, you can use `sep={\ [10pt]}` for vertical separation of stored contents.

`step = {<integer>}` default: *1*  
 Sets the increment (`<step>`) applied to the value set by key `start` for each element stored in *prop list* `{<store name>}`. The value must be a *positive integer*.

`start = {<integer>}` default: *1*  
 Sets the *position* of the *prop list* `{<store name>}` from which execution will start. The value must be a *positive integer*.

`stop = {<integer>}` default: *0*  
 Sets the *position* of the *prop list* `{<store name>}` from which execution it will finish executing. The value must be a *positive integer*.

`before = {<code>}` default: *empty*  
 Sets the `{<code>}` that will be executed *before* each content stored in *prop list* `{<store name>}`. The `{<code>}` must be passed between braces.

`after = {<code>}` default: *empty*  
 Sets the `{<code>}` that will be executed *after* each content stored in *prop list* `{<store name>}`. The `{<code>}` must be passed between braces.

`wrapper = {<code> {#1} more code}` default: *empty*  
 Wraps the content stored in *prop list* `{<store name>}` referenced by `{#1}`. The `{<code>}` must be passed between braces. For example `\foreachkeyans[wrapper={\makebox[1em][l]{#1}}]{<store name>}`.

### 6.6.3 The command `\printkeyans`

---

```
\printkeyans \printkeyans*[{<keys>}]{<store name>}
```

---

The command `\printkeyans` prints “all stored content” in *sequence* `{<store name>}` defined by `save-ans` key placing this inside the `enumext` environment or the `enumext*` environment if the *starred argument* “\*” is used. The “stored content” can only be accessed *after* it is stored in the *sequence*, if `{<store name>}` does not exist the command will return an error.

The optional argument allows managing the `<keys>` in the “first level” of the environment in which the “stored content” of the *sequence* `{<store name>}` will be printed, if the *starred argument* “\*” is used it will be `enumext*` otherwise `enumext`.

The default values for the “first level” are the same as the default values for the `enumext` and `enumext*` environments along with the keys `nosep`, `first=\small`, `font=\small` and `columns=2`. For the inner levels of the environment `enumext` saved in the *sequence* `{<store name>}` the default values are the same as those established for the second, third and fourth levels plus the keys `nosep`, `first=\small`, `font=\small`. If the

environment `enumext*` is saved within the *sequence*  $\{\langle store\ name\rangle\}$  it will have the same default values plus the keys `nosep`, `first=\small`, `font=\small`.

Since the command encapsulates by default the `enumext` environment or the `enumext*` environment, we must take some considerations:

- If we execute `\printkeyans*\langle store\ name\rangle` and the *sequence*  $\{\langle store\ name\rangle\}$  already contains any `enumext*` environment an error will be returned as we cannot nest.
- If we execute `\printkeyans*\langle store\ name\rangle` and the *sequence*  $\{\langle store\ name\rangle\}$  contains any `enumext` environments, they will start with the  $\langle keys\rangle$  set for the first level unless they are set in the optional argument or `save-key` is used to modify it.
- If we execute `\printkeyans\langle store\ name\rangle` and the *sequence*  $\{\langle store\ name\rangle\}$  contains any environment `enumext*`, they will start with the  $\langle keys\rangle$  set by default unless they are set in the optional argument or `save-key` is used to modify it.

The default values for the “first level” of `\printkeyans` commands and `\printkeyans*` are established using `\setenumext[\langle print\rangle,\langle i\rangle]\{\langle keys\rangle\}` and `\setenumext[\langle print*\rangle]\{\langle keys\rangle\}`. If we need to set the  $\langle keys\rangle$  for the environment `enumext` “saved” in the *sequence*  $\{\langle store\ name\rangle\}$  we will use `\setenumext[\langle print\rangle,\langle level\rangle]\{\langle keys\rangle\}` and if we need to set the  $\langle keys\rangle$  for the environment `enumext*` “saved” in the *sequence*  $\{\langle store\ name\rangle\}$  we will use `\setenumext[\langle print\rangle,\langle *\rangle]\{\langle keys\rangle\}`.

Example

```
\begin{enumext}[save-ans=sample,columns=2,show-pos=true,nosep,save-ref=true]
  \item Factor  $3x+3y+3z$ . \anskey{$3(x+y+z)$}
  \item True False

  \begin{enumext}[nosep]
    \item \LaTeXe\ is cool? \anskey{Very True!}
  \end{enumext}

  \item Related to Linux

  \begin{enumext}[nosep]
    \item You use linux? \anskey{Yes}
    \item Rate the following package and class
      \begin{enumext}[nosep]
        \item \texttt{xsim} \anskey{very good}
        \item \texttt{exsheets} \anskey{obsolete}
      \end{enumext}
    \end{enumext}
  \end{enumext}
```

The answer to `\ref{sample:4}` is `\getkeyans{sample:4}` and the answers to all the worksheets are as follows:

```
\printkeyans{sample}
```

1. Factor  $3x + 3y + 3z$ .

[1]  $3(x + y + z)$

2. True False

(a) ~~LaTeXe~~ is cool?

[2] Very True!

3. Related to Linux

(a) You use linux?

[3] Yes

(b) Rate the following package and class

i. `xsim`

[4] very good

ii. `exsheets`

[5] obsolete

The answer to 3.(b).i is very good and the answers to all the worksheets are as follows:

1.  $3(x + y + z)$

2. (a) Very True!

3. (a) Yes

(b) i. very good

ii. obsolete
- \*

\*

\*

\*

\*

7 Full examples

Here I will leave as an example some adaptations questions taken from `TeX-SX`. The examples are attached to this documentation and can be extracted from your PDF viewer or from the command line by running:

```
$ pdfdetach -saveall enumext.pdf
```



- II.  $\alpha = \delta$

III.  $\angle EDF = 45^\circ$

A I only

B II only

C I and II only
- D I and III only

E I, II, and III
3. Third type of questions
- (1)  $2\alpha + 2\delta = 90^\circ$


(2)  $\angle EDF = 45^\circ$

A value

B value

C value
- D value

E value
4. Question with image and label below:

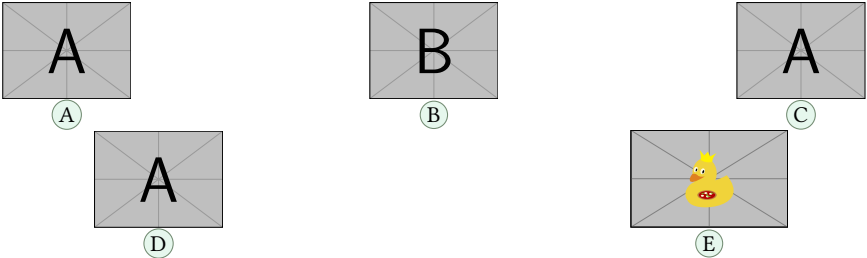

5. Question with image on left side:
- A value

B value

C value

D correct

E value



Test keys

1. B,  $x = 5$

2. D

3. C, some note
- \* 4. E, A duck

\* 5. D, other note

\*

Example 4

A “simple worksheet” using ducks :)

Factor  $x^2 - 2x + 1$

Factor  $3x + 3y + 3z$

The following questions need to be cuaqtified :)

True False

- (a)  $\alpha > \delta$
- (b) ~~TeX~~ze is cool?

Related to Linux

- (a) You use linux?
- (b) Usually uses the package manager?
- (c) Rate the following package and class
- i. `xsim-exam`

ii. `xsim`

iii. `exsheets`

The answer to 1 is  $(x - 1)^2$  and the answer to 3.(a) is False.

1.  $(x - 1)^2$

2.  $3(x + y + z)$

3. (a) False

(b) Very True!

4. (a) Yes
- \* (b) Yes, dnf

\* (c) i. doesn't exist for now :(

\* ii. very good

\* iii. obsolete

\*

Example 5

Adapted from the response given by Stephen in SAT like question format

- 1

Which choice best describes what happens in the passage?

A) One character argues with another character who intrudes on her home.

B) One character receives a surprising request from another character.
- C) One character reminisces about choices she has made over the years.

D) One character criticizes another character for pursuing an unexpected course of action.
- 2

Which choice best describes what happens in the

- passage?
- A) One character argues with another character who intrudes on her home.
  - B) One character receives a surprising request from another character.
  - C) One character reminisces about choices she has made over the years.
  - D) One character criticizes another character for pursuing an unexpected course of action.

3

Which choice best describes what happens in the passage?

- A) One character argues with another character who intrudes on her home.
- B) One character receives a surprising request from another character.

- C) One character reminisces about choices she has made over the years.
  - D) One character criticizes another character for pursuing an unexpected course of action.
- 4
- Which choice best describes what happens in the passage?
- A) One character argues with another character who intrudes on her home.
  - B) One character receives a surprising request from another character.
  - C) One character reminisces about choices she has made over the years.
  - D) One character criticizes another character for pursuing an unexpected course of action.

1. A)
2. C)
3. B)
4. D)

8 The way of non-enumerated lists

It is possible to use (or abuse) the `enumext` environment to mimic *non-enumerated* list environments such as `itemize` and `description`, clearly the `(keys)` to “store answers”, the `keyans` and `keyanspic` environments lose their sense and it is not the focus of the main of this package, but, why not to do it? Here I leave as an example other uses of the `enumext` environment that can be helpful for specific purposes. The “trick” to generate these *fake environments* is set `label={}` or `label={\some}` and play with the `list-indent`, `list-offset`, `font` and `wrap-label` keys.

Fake itemize environment

Here we set the `label` key using the default settings in `TEX` for the four levels `\textbullet`, `\textendash`, `\textasteriskcentered` and `\textperiodcentered` together with the `nosep` key to reduce the vertical spaces in the left side example and set the `label` key in *mathematical mode* for the right side as `\ast`, `\diamond`, `\circ` and `\star` for the four levels together with the `nosep` key

- First level item
    - Second level item
      - \* Third level item
        - Fourth level item
  - First level item
- \* First level item
    - ◊ Second level item
      - Third level item
        - ★ Fourth level item
  - \* First level item


Fake description environment

Here we set `label={}` and `list-indent=2.5em`, `font=\bfseries`.

**SomeThing** A short one-line description.  
This is an entry *without* a label.  
**Something** A short *one-line* description text.  
**Something long** A much *longer* description text may take more than one line or more than one paragraph.  
Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua.

If we add `list-indent=0pt` you get *widest style*:

**SomeThing** A short one-line description.  
This is an entry *without* a label.  
**Something** A short *one-line* description text.  
**Something long** A much *longer* description text may take more than one line or more than one paragraph.  
Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua.

 The small space at the beginning of the “unlabeled entry” corresponds to `\labelsep` and can be removed using `\hspace{-\labelsep}` at the beginning of the line.

Description indented by label

Here we set `label={}` and we will give a convenient value to `labelsep` and `labelwidth`, for example we can take as reference our *longest label* and pass it as value using:

```
\newlength{\descitemwd}  
\settowidth{\descitemwd}{\textbf{Something long}}
```

and then use `labelsep=4pt`, `labelwidth=\descitemwd`, `font=\bfseries`.



<b>Something</b>	A short one-line description. This is an entry <i>without</i> a label.
<b>Something</b>	A short one-line description.
<b>Something long</b>	A much longer description. Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris.

The environment can be translated so that the `<labels>` are on the left margin calculating the value passed to the `list-offset` key, in this case it will be equal to the sum of the values set by the `labelwidth` and `labelsep` keys finally resulting as `list-offset={-\descitemwd - 4pt}`.

<b>Something</b>	A short one-line description. This is an entry <i>without</i> a label.
<b>Something</b>	A short one-line description.
<b>Something long</b>	A much longer description. Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris.

If we add `align=right` it will look like this:

<b>Something</b>	A short one-line description. This is an entry <i>without</i> a label.
<b>Something</b>	A short one-line description.
<b>Something long</b>	A much longer description. Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris.

At this point we have used `list-offset={-\descitemwd - 4pt}` instead of `list-offset={-\labelwidth - \labelsep}`, this is because the parameters `\labelwidth` and `\labelsep` take the default values, as if we had not set `label`.

Description with multi-line labels

The `label` key does not accept *multiline material*, this is where the `wrap-label*` key comes into play. Unlike the `enumitem` package, the `align` key only supports three options, so what we will do is create a command in the style `\parleft` of `enumitem` that allows us to place *multiline labels* using `\parbox`.

```
\NewDocumentCommand \labelbx { s +m }
{%
  \IfBooleanTF{#1}
  {\strut\smash{\parbox[t]{\labelwidth}{\raggedright{#2}}}}%
  {\strut\smash{\parbox[t]{\labelwidth}{\raggedleft{#2}}}}%
}
```

Now we just need to set `wrap-label*={\labelbx{#1}}`.

<b>Something</b>	A short one-line description. This is an entry <i>without</i> a label.
<b>Something</b>	A short one-line description.
<b>Something long</b>	A much longer description. Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris.
<b>SoMeThInG</b>	A much longer description. Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris.

Final notes

The original implementation (if you can call it that) of the ideas that led to the creation of `enumext` were some macros using the `enumerate[5]` package for personal use created in early 2003, the code was quite questionable, but functional for these simple requirements.

With the great answers given by Christian Hupfer in [Create a fake label ref using list](#) and the answer given by David Carlisle in [Change the use of label ref by data save in an array \(list\)](#) I managed to create a more solid code than the original version, now using the `l3prop[11]` and `l3seq[11]` modules together with the `hyperref[8]` and `enumitem[6]` packages, which did the job, but with some limitations.

As time went by I took these limitations as a personal challenge which I called “*reinventing the wheel*”, since there were packages and classes that did more or less what I was looking for, but did not fit my simple requirements. This “*reinventing the wheel*” finally ended up becoming `enumext`.

Why list environments?

The answer is simple, first I love the beauty of its syntax and many of what I had already written used the `enumerate` environment or lists created using the `enumitem` package. In my mind I thought: how complicated could it be to write a package that looked like `enumitem`? It seemed simple enough, of course I didn’t have in mind the mess I was getting into working with `list` environments, `minipage` and adding support for the `multicol` and `hyperref` packages.

Of course, seeing the final result of the experiment “*reinventing the wheel*” I am quite satisfied.

## Why not random questions and other utilities

The “*random*” type questions I love and hate them at the same time, although they simplify a lot the work when creating a multiple choice test, but you lose the beauty of typesetting a document with  $\text{\LaTeX}$ , that is to say the output does not always look as nice as it should, even if they are only alternatives these must follow a certain order when presented either numerical or presentation, that said handling that using *nested lists* is quite complicated so I do not classify to be implemented.

## 9 References

- [1] HIRSCHHORN, PHILIP. “Using the exam document class”. Available from CTAN, <https://www.ctan.org/pkg/exam>, 2023.
- [2] NIEDERBERGER, CLEMENS. “xsim – eXercise Sheets IMproved”. Available from CTAN, <https://www.ctan.org/pkg/xsim>, 2023.
- [3] MITTELBACH, FRANK. “An environment for multicolumn output”. Available from CTAN, <https://www.ctan.org/pkg/multicol>, 2024.
- [4] GONZÁLEZ, PABLO. “scontents - Stores  $\text{\LaTeX}$  contents in memory or files”. Available from CTAN, <https://www.ctan.org/pkg/scontents>, 2022.
- [5] The  $\text{\LaTeX}$  Project. “enumerate – Enumerate with redefinable labels”. Available from CTAN, <https://www.ctan.org/pkg/enumerate>, 2024.
- [6] BEZOS, JAVIER. “Customizing lists with the enumitem package”. Available from CTAN, <https://www.ctan.org/pkg/enumitem>, 2019.
- [7] BERRY, KARL. “ $\text{\LaTeX} 2_{\epsilon}$ : An Unofficial Reference Manual”. Available from CTAN, <https://ctan.org/pkg/latex2e-help-texinfo>, 2024.
- [8] The  $\text{\LaTeX}$  Project. “Extensive support for hypertext in  $\text{\LaTeX}$ ”. Available from CTAN, <https://www.ctan.org/pkg/hyperref>, 2024.
- [9] BURNOL, JEAN-FRANÇOIS. “The footnotehyper package”. Available from CTAN, <https://www.ctan.org/pkg/footnotehyper>, 2021.
- [10] The  $\text{\LaTeX}$  Project. “The expl3 package”. Available from CTAN, <https://www.ctan.org/pkg/l3kernel>, 2024.
- [11] The  $\text{\LaTeX}$  Project. “The  $\text{\LaTeX} 3$  Interfaces”. Available from CTAN, <https://www.ctan.org/pkg/l3kernel>, 2024.
- [12] The  $\text{\LaTeX}$  Project. “The  $\text{\LaTeX} 2_{\epsilon}$  sources”. Available from CTAN, <https://ctan.org/tex-archive/macros/latex/base>, 2024.
- [13] The  $\text{\LaTeX}$  Project. “ $\text{\LaTeX}$  for authors current version”. Available from CTAN, <https://ctan.org/pkg/latex-base>, 2024.
- [14] GUNDLACH, PATRICK. “The lua-visual-debug package”. Available from CTAN, <https://www.ctan.org/pkg/lua-visual-debug>, 2023.
- [15] LEMVIG, MOGENS. “The shortlst package”. Available from CTAN, <https://www.ctan.org/pkg/shortlst>, 1998.
- [16] NIEDERBERGER, CLEMENS. “tasks – Horizontally columned lists”. Available from CTAN, <https://www.ctan.org/pkg/tasks>, 2022.

## 10 Change history

**v1.0** 2024-09-25 – First public release.

11 Index of Documentation

The italic numbers denote the pages where the corresponding entry is described.

<b>C</b>		<b>I</b>	
Document class:		\itemsep .....	8
article .....	2	<b>K</b>	
book .....	2	Keys for \anskey provide by enumext:	
exam .....	2	break-col .....	12
letter .....	2	item-join .....	12
report .....	2	item-pos* .....	13
\columnbreak .....	4, 12	item-star .....	12, 13
\columnsep .....	10	item-sym* .....	13
Commands provide by enumext:		Keys for \foreachkeyans provide by enumext:	
\anskey .....	11-13	after .....	16
\anspic .....	11, 12, 15	before .....	16
\foreachkeyans .....	16	sep .....	16
\getkeyans .....	12, 16	start .....	16
\item* .....	5-7, 11, 12, 14, 15	step .....	16
\item .....	5-7, 9, 10, 12, 14	stop .....	16
\miniright .....	10	wrapper .....	16
\printkeyans .....	6, 11, 16	Keys for anskey* provide by enumext:	
\setenumextmeta .....	6	break-col .....	12
\setenumext .....	5-7, 11, 12, 14, 17	force-eol .....	13
Counters defined by enumext:		item-join .....	12
enumXiii .....	4	item-pos* .....	13
enumXii .....	4	item-star .....	12, 13
enumXiv .....	4	item-sym* .....	13
enumXi .....	4	overwrite .....	13
enumXviii .....	4	write-env .....	13
enumXvii .....	4	Keys for environments provide by enumext:	
enumXvi .....	4	above* .....	8
enumXv .....	4	above .....	8
<b>E</b>		after .....	9, 10
Environments provide by enumext:		align .....	7, 21
anskey* .....	11-13	base-fix .....	8
enumext* .....	4-14, 16, 17	before* .....	9
enumext .....	4-9, 11-14, 16, 17, 20	before .....	9
keyans* .....	4-14	below* .....	9
keyanspic .....	4, 7, 8, 11-13, 15, 20	below .....	8
keyans .....	4-9, 11-15, 20	check-ans .....	12
Environments:		columns-sep .....	4, 10
Verbatim .....	13	columns .....	4, 8, 10
center .....	5	first .....	9
description .....	5	font .....	7
enumerate .....	1, 3, 5, 21	item-pos* .....	5, 6
figure .....	5	item-sym* .....	5, 6
flushleft .....	5	itemindent .....	9
flushright .....	5	itemsep .....	8
itemize .....	5	labelsep .....	3-7, 9, 10, 12, 20, 21
list .....	3, 5, 9, 21	labelwidth .....	3, 4, 6, 7, 9, 10, 12, 20, 21
minipage .....	3-5, 10, 21	labelwith .....	5
multicols .....	3, 4, 10	label .....	7, 9, 14, 20, 21
quotation .....	5	list-indent .....	3, 9
quote .....	5	list-offset .....	3, 9, 21
tabbing .....	5	listparindent .....	9
table .....	5	mark-ans .....	12
task .....	5	mark-pos .....	12
trivlist .....	5	mark-ref .....	11
verbatim .....	5	mini-env .....	4, 8, 10
verse .....	5	mini-right* .....	7, 10
<b>F</b>		mini-right .....	7, 10
\footnote .....	5	mini-sep .....	4, 10
		no-store .....	11-13

noitemsep .....	8	\alph* .....	7
nosep .....	8, 20	\arabic* .....	7
overwrite .....	13	\roman* .....	7
parsep .....	8, 15	\labelsep .....	3, 7
partopsep .....	8	\labelwidth .....	3, 7
ref .....	4, 7	\linewidth .....	10
resume* .....	7, 10, 11	\listparindent .....	9
resume .....	7, 10, 11		
rightmargin .....	9	<b>P</b>	
save-ans .....	4, 6, 10–16	Packages:	
save-key .....	10, 11, 17	enumerate .....	21
save-ref .....	4, 7, 11–13, 16	enumext .....	1–5, 7, 15, 21
save-sep .....	11	enumitem .....	3–5, 9, 21
series .....	7, 10, 11	fancyvrb .....	13
show-ans .....	11, 12	footnotehyper .....	5
show-length .....	8	hyperref .....	4, 5, 11–13, 21
show-pos .....	11, 12, 16	l3keys .....	7
start* .....	9, 10	l3prop .....	1, 21
start .....	9, 10	l3seq .....	1, 21
topsep .....	8, 9	multicol .....	1, 2, 4, 21
widest .....	7	scontents .....	1, 2, 13
wrap-ans .....	12	task .....	5, 6
wrap-label* .....	7, 21	xsim .....	2
wrap-label .....	7	\parsep .....	8
wrap-opt .....	12	\partopsep .....	8
write-env .....	13		
		<b>R</b>	
<b>L</b>		\raggedcolumns .....	4
\label .....	4	\ref .....	4
Labels provide by enumext:		\rightmargin .....	9
\Alph* .....	7, 14		
\Roman* .....	7	<b>T</b>	
		\topsep .....	8

## 12 Implementation

The most recent publicly released version of `enumext` is available at CTAN: <https://www.ctan.org/pkg/enumext>. While general feedback via email is welcomed, specific bugs or feature requests should be reported through the issue tracker: <https://github.com/pablgonz/enumext/issues>.

- The documentation presented here is far from professional, it contains a lot of obvious information that to the eye of a TeXpert are superfluous, but, after so many years developing this project is the only way to remember what does what.

### 12.1 General conventions

Variables containing `i`, `ii`, `iii` and `iv` are associated by level with the `enumext` environment, variables containing `v` are associated with the `keyans` environment, variables containing `vi` are associated with the `keyanspic` environment, variables containing `vii` are associated with the `enumext*` environment and variables containing `viii` are associated with the `keyans*` environment.

To simplify writing and documentation some variables and functions that are common to the different levels of the environments are described using a capital “X”.

The temporary function `\__enumext_tmp:n` is used in different parts of the package code for variable creation or execution of other functions that are grouped into this one.

All variables and functions defined in this package are private and are NOT intended to work or be used by another package or module.

### 12.2 Initial set up

Start the DocStrip guards.

```
1 <{*package>
```

Identify the internal prefix (L<sup>A</sup>T<sub>E</sub>X3 DocStrip convention) for l3doc class.

```
2 <@@=enumext>
```

### 12.3 Declaration of the package

First we will make sure we have a minimum (super updated) version of L<sup>A</sup>T<sub>E</sub>X to work correctly.

```
3 \NeedsTeXFormat{LaTeX2e}[2024-06-01]
```

Now declare the `enumext` package.

```
4 \ProvidesExplPackage
5   {enumext}
6   {2024-09-25}
7   {1.0}
8   {Enumerate exercise sheets}
```

Finally check if the `multicol` and `scontents` packages are loaded, if not we load it.

```
9 \hook_gput_code:nnn {begindocument} {enumext}
10 {
11   \IfPackageLoadedTF { multicol }
12   {
13     \msg_info:nnn { enumext } { package-load } { multicol }
14   }
15   {
16     \msg_info:nnn { enumext } { package-not-load } { multicol }
17     \RequirePackage{multicol}[2024-05-23]
18   }
19   \IfPackageLoadedTF { scontents }
20   {
21     \msg_info:nnn { enumext } { package-load } { scontents }
22   }
23   {
24     \msg_info:nnn { enumext } { package-not-load } { scontents }
25     \RequirePackage{scontents}
26   }
27 }
```

### 12.4 Definition of variables

Variables that do not appear in this section are created by means of `\keys_define:nn` or some function described below.

```

\l__enumext_level_int
\l__enumext_level_h_int
\l__enumext_anskey_level_int
\l__enumext_keyans_level_int
\l__enumext_keyans_level_h_int
\l__enumext_keyans_pic_level_int

```

Integer variables will control the nesting levels of the environments and `\anskey` command.

```

28 \int_new:N \l__enumext_level_int
29 \int_new:N \l__enumext_level_h_int
30 \int_new:N \l__enumext_anskey_level_int
31 \int_new:N \l__enumext_keyans_level_int
32 \int_new:N \l__enumext_keyans_level_h_int
33 \int_new:N \l__enumext_keyans_pic_level_int

```

(End of definition for `\l__enumext_level_int` and others.)

```

\l__enumext_starred_bool
\g__enumext_starred_bool
\l__enumext_starred_first_bool
\l__enumext_standar_bool
\g__enumext_standar_bool
\l__enumext_standar_first_bool
\l__enumext_anskey_env_bool
\l__enumext_keyans_env_bool
\g__enumext_start_line_tl
\g__enumext_envir_name_tl
\l__enumext_envir_name_tl

```

Internal variables used by functions `\__enumext_is_not_nested:`, `\__enumext_is_on_first_level:` and `\__enumext_keyans_name_and_start:` (§12.5.1).

```

34 \bool_new:N \l__enumext_starred_bool
35 \bool_new:N \g__enumext_starred_bool
36 \bool_new:N \l__enumext_starred_first_bool
37 \bool_new:N \l__enumext_standar_bool
38 \bool_new:N \g__enumext_standar_bool
39 \bool_new:N \l__enumext_standar_first_bool
40 \bool_new:N \l__enumext_anskey_env_bool
41 \bool_new:N \l__enumext_keyans_env_bool
42 \tl_new:N \g__enumext_start_line_tl
43 \tl_new:N \g__enumext_envir_name_tl
44 \tl_new:N \l__enumext_envir_name_tl

```

(End of definition for `\l__enumext_starred_bool` and others.)

```

\l__enumext_counter_i_tl
\l__enumext_counter_ii_tl
\l__enumext_counter_iii_tl
\l__enumext_counter_iv_tl
\l__enumext_counter_v_tl
\l__enumext_counter_vi_tl
\l__enumext_counter_vii_tl
\l__enumext_counter_viii_tl

```

Variables to store the “*name of the counters*” `enumXi`, `enumXii`, `enumXiii` and `enumXiv` for `enumext` environment, `enumXv` for `keyans` environment and `enumXvi` for the `keyanspic` environment. The counters `enumXvii` and `enumXviii` are used by `enumext*` and `keyans*` environments.

The initial values of these variables are set by the function `\__enumext_define_counters:Nn` (§12.10) and then modified by the function `\__enumext_label_style:Nnn` used by `label` key (§12.13).

```

45 \cs_set_protected:Npn \__enumext_tmp:n #1
46 {
47   \tl_new:c { l__enumext_counter_#1_tl }
48 }
49 \clist_map_inline:nn { i, ii, iii, iv, v, vi, vii, viii } { \__enumext_tmp:n {#1} }

```

(End of definition for `\l__enumext_counter_i_tl` and others.)

```

\c__enumext_counter_style_tl
\l__enumext_ref_key_arg_tl
\l__enumext_ref_the_count_tl
\l__enumext_the_counter_X_tl
\l__enumext_renew_the_count_X_tl

```

Internal variables used by `ref` key (§12.13).

```

50 \tl_const:Nn \c__enumext_counter_style_tl
51 { { arabic } { roman } { Roman } { alph } { Alph } }
52 \tl_new:N \l__enumext_ref_key_arg_tl
53 \tl_new:N \l__enumext_ref_the_count_tl
54 \cs_set_protected:Npn \__enumext_tmp:n #1
55 {
56   \tl_new:c { l__enumext_renew_the_count_#1_tl }
57   \tl_new:c { l__enumext_the_counter_#1_tl }
58   \tl_set:ce { l__enumext_the_counter_#1_tl } { \exp_not:c { theenumX#1 } }
59 }
60 \clist_map_inline:nn { i, ii, iii, iv, v, vi, vii, viii } { \__enumext_tmp:n {#1} }

```

(End of definition for `\c__enumext_counter_style_tl` and others.)

```

\g__enumext_resume_int
\g__enumext_resume_vii_int
\l__enumext_resume_name_tl
\l__enumext_resume_active_bool
\g__enumext_starred_series_tl
\g__enumext_standar_series_tl

```

Internal variables used by `resume`, `resume*` and `series` keys (§12.24).

```

61 \int_new:N \g__enumext_resume_int
62 \int_new:N \g__enumext_resume_vii_int
63 \tl_new:N \l__enumext_resume_name_tl
64 \bool_new:N \l__enumext_resume_active_bool
65 \tl_new:N \g__enumext_standar_series_tl
66 \tl_new:N \g__enumext_starred_series_tl

```

(End of definition for `\g__enumext_resume_int` and others.)

```

\l__enumext_current_widest_dim
\g__enumext_counter_styles_tl
\g__enumext_widest_label_tl
\l__enumext_label_width_by_box

```

The variable `\l__enumext_current_widest_dim` stores the current label width, the variable `\g__enumext_counter_styles_tl` stores the default *label style* and the variable `\g__enumext_widest_label_tl` the label width. These variables are used by `widest` (§12.14) and `label` (§12.12) keys.

```

67 \dim_new:N \l__enumext_current_widest_dim
68 \tl_new:N \g__enumext_counter_styles_tl
69 \tl_new:N \g__enumext_widest_label_tl
70 \box_new:N \l__enumext_label_width_by_box

```



(End of definition for `\l__enumext_current_widest_dim` and others.)

```
\l__enumext_leftmargin_tmp_X_bool
\l__enumext_leftmargin_tmp_X_dim
\l__enumext_leftmargin_X_dim
\l__enumext_itemindent_X_dim
```

The boolean variable `\l__enumext_leftmargin_tmp_X_bool` and the dimensional variable `\l__enumext_leftmargin_tmp_X_dim` are used by the `list-indent` key (§12.17). The variables `\l__enumext_leftmargin_X_dim` and `\l__enumext_itemindent_X_dim` are used and set by the function `\__enumext_calc_hspace`:NNNNNNNNNN (§12.37.1).

```
71 \cs_set_protected:Npn \__enumext_tmp:n #1
72 {
73   \bool_new:c { \l__enumext_leftmargin_tmp_#1_bool }
74   \dim_new:c { \l__enumext_leftmargin_tmp_#1_dim }
75   \dim_new:c { \l__enumext_leftmargin_#1_dim }
76   \dim_new:c { \l__enumext_itemindent_#1_dim }
77 }
78 \clist_map_inline:nn { i, ii, iii, iv, v, vi, vii, viii } { \__enumext_tmp:n {#1} }
```

(End of definition for `\l__enumext_leftmargin_tmp_X_bool` and others.)

```
\l__enumext_multicols_above_X_skip
\l__enumext_multicols_below_X_skip
\g__enumext_multicols_right_X_skip
\l__enumext_align_label_pos_X_str
```

Internal variables used by `columns` key (§12.21) and `align` key (§12.12).

```
79 \cs_set_protected:Npn \__enumext_tmp:n #1
80 {
81   \skip_new:c { \l__enumext_multicols_above_#1_skip }
82   \skip_new:c { \l__enumext_multicols_below_#1_skip }
83   \skip_new:c { \g__enumext_multicols_right_#1_skip }
84   \str_new:c { \l__enumext_align_label_pos_#1_str }
85 }
86 \clist_map_inline:nn { i, ii, iii, iv, v } { \__enumext_tmp:n {#1} }
```

(End of definition for `\l__enumext_multicols_above_X_skip` and others.)

```
\g__enumext_minipage_stat_int
\l__enumext_minipage_temp_skip
\l__enumext_minipage_left_skip
\l__enumext_minipage_right_skip
\l__enumext_minipage_after_skip
\g__enumext_minipage_right_skip
\g__enumext_minipage_after_skip
\l__enumext_minipage_left_X_dim
\l__enumext_minipage_active_X_bool
```

Internal variables used by `\miniright` command (§12.22.4) and the keys `mini-right`, `mini-right*`, `mini-env` and `mini-sep` (§12.20, §12.22).

```
87 \int_new:N \g__enumext_minipage_stat_int
88 \skip_new:N \l__enumext_minipage_temp_skip
89 \skip_new:N \l__enumext_minipage_left_skip
90 \skip_new:N \l__enumext_minipage_right_skip
91 \skip_new:N \l__enumext_minipage_after_skip
92 \skip_new:N \g__enumext_minipage_right_skip
93 \skip_new:N \g__enumext_minipage_after_skip
94 \cs_set_protected:Npn \__enumext_tmp:n #1
95 {
96   \dim_new:c { \l__enumext_minipage_left_#1_dim }
97   \bool_new:c { \l__enumext_minipage_active_#1_bool }
98 }
99 \clist_map_inline:nn { i, ii, iii, iv, v, vii, viii } { \__enumext_tmp:n {#1} }
```

(End of definition for `\g__enumext_minipage_stat_int` and others.)

```
\l__enumext_wrap_label_X_bool
\l__enumext_wrap_label_opt_X_bool
\l__enumext_start_X_int
\l__enumext_fake_item_indent_X_tl
\l__enumext_label_fill_left_X_tl
\l__enumext_label_fill_right_X_tl
\l__enumext_vspace_a_star_X_bool
\l__enumext_vspace_b_star_X_bool
```

The bool vars `\l__enumext_wrap_label_X_bool` and `\l__enumext_wrap_label_opt_X_bool` are used by `wrap-label` and `wrap-label*` keys (§12.12), the integer `\l__enumext_start_X_int` are used by the `start` and `start*` keys (§12.14), the token list `\l__enumext_fake_item_indent_X_tl` is used by `itemindent` key (§12.17.1), the variables `\l__enumext_label_fill_left_X_tl` and `\l__enumext_label_fill_right_X_tl` are used by the `align` key (§12.12). The boolean vars `\l__enumext_vspace_a_star_X_bool`, `\l__enumext_vspace_b_star_X_bool` are used by `above`, `above*`, `below` and `below*` keys (§12.19).

```
100 \cs_set_protected:Npn \__enumext_tmp:n #1
101 {
102   \bool_new:c { \l__enumext_wrap_label_#1_bool }
103   \bool_new:c { \l__enumext_wrap_label_opt_#1_bool }
104   \int_new:c { \l__enumext_start_#1_int }
105   \tl_new:c { \l__enumext_fake_item_indent_#1_tl }
106   \tl_new:c { \l__enumext_label_fill_left_#1_tl }
107   \tl_new:c { \l__enumext_label_fill_right_#1_tl }
108   \bool_new:c { \l__enumext_vspace_a_star_#1_bool }
109   \bool_new:c { \l__enumext_vspace_b_star_#1_bool }
110 }
111 \clist_map_inline:nn { i, ii, iii, iv, v, vii, viii } { \__enumext_tmp:n {#1} }
```

(End of definition for `\l__enumext_wrap_label_X_bool` and others.)

```

\l__enumext_store_active_bool
\l__enumext_store_name_tl
\g__enumext_store_name_tl
\l__enumext_store_anskey_arg_tl
\l__enumext_store_anskey_env_tl
\l__enumext_store_anskey_opt_tl
\l__enumext_store_current_label_tl
\l__enumext_store_current_opt_arg_tl
\l__enumext_store_current_label_tmp_tl

```

The variable `\l__enumext_store_active_bool` setting by `save-ans` key (§12.25.1) activates all the mechanism related to `\anskey`, `anskey*`, `keyans`, `keyans*` and `keyanspic` environments.

The variable `\l__enumext_store_name_tl` saves the `{⟨store name⟩}` set by the `save-ans` key of the *sequence* and *prop list* in which we will store, the variable `\g__enumext_store_name_tl` it's just a global copy of `{⟨store name⟩}` used by different functions.

The variable `\l__enumext_store_anskey_arg_tl` save the *argument* of `\anskey` (§12.29) and the variables `\l__enumext_store_anskey_env_tl` and `\l__enumext_store_anskey_opt_tl` save the *⟨body⟩* and the *⟨keys⟩* of the environment `anskey*` (§12.30).

The variables `\l__enumext_store_current_label_tl` and `\l__enumext_store_current_opt_arg_tl` save the *current label* and *optional argument* of `\item*` (§12.36) and `\anspic*` (§12.41.2) for the `keyans`, `keyans*` and `keyanspic` environments.

The variable `\l__enumext_store_current_label_tmp_tl` is a temporary variable used by `keyans`, `keyans*` and `keyanspic` at various points.

```

112 \bool_new:N \l__enumext_store_active_bool
113 \tl_new:N \l__enumext_store_name_tl
114 \tl_new:N \g__enumext_store_name_tl
115 \tl_new:N \l__enumext_store_anskey_arg_tl
116 \tl_new:N \l__enumext_store_anskey_env_tl
117 \tl_new:N \l__enumext_store_anskey_opt_tl
118 \tl_new:N \l__enumext_store_current_label_tl
119 \tl_new:N \l__enumext_store_current_opt_arg_tl
120 \tl_new:N \l__enumext_store_current_label_tmp_tl

```

(End of definition for `\l__enumext_store_active_bool` and others.)

```

\l__enumext_setkey_tmpa_tl
\l__enumext_setkey_tmpb_tl
\l__enumext_setkey_tmpa_int
\l__enumext_setkey_tmpa_seq
\l__enumext_setkey_tmpb_seq

```

Internal variables used by the command `\setenumext` (§12.47).

```

121 \tl_new:N \l__enumext_setkey_tmpa_tl
122 \tl_new:N \l__enumext_setkey_tmpb_tl
123 \int_new:N \l__enumext_setkey_tmpa_int
124 \seq_new:N \l__enumext_setkey_tmpa_seq
125 \seq_new:N \l__enumext_setkey_tmpb_seq

```

(End of definition for `\l__enumext_setkey_tmpa_tl` and others.)

```

\l__enumext_meta_path_tl
\l__enumext_foreach_print_seq
\l__enumext_foreach_name_prop_tl
\g__enumext_foreach_default_keys_tl

```

Internal variables used by the `\printkeyans` command (§12.46) and `\foreachkeyans` command (§12.49).

```

126 \tl_new:N \l__enumext_meta_path_tl
127 \seq_new:N \l__enumext_foreach_print_seq
128 \tl_new:N \l__enumext_foreach_name_prop_tl
129 \tl_new:N \g__enumext_foreach_default_keys_tl

```

(End of definition for `\l__enumext_meta_path_tl` and others.)

```

\l__enumext_print_keyans_starred_tl
\l__enumext_mark_position_str
\g__enumext_item_symbol_aux_tl
\l__enumext_print_keyans_X_tl
\l__enumext_store_save_key_X_tl
\l__enumext_store_save_key_X_bool
\l__enumext_store_upper_level_X_bool

```

Internal variables used by command `\printkeyans` (§12.46), `show-pos` key (§12.26), `item-sym*` key (§12.34), `save-key` key (§12.26.2) and “*storage level system*”.

```

130 \tl_new:N \l__enumext_print_keyans_starred_tl
131 \str_new:N \l__enumext_mark_position_str
132 \tl_new:N \g__enumext_item_symbol_aux_tl
133 \cs_set_protected:Npn \__enumext_tmp:n #1
134 {
135   \tl_new:c { \l__enumext_print_keyans_#1_tl }
136   \tl_new:c { \l__enumext_store_save_key_#1_tl }
137   \bool_new:c { \l__enumext_store_save_key_#1_bool }
138   \bool_new:c { \l__enumext_store_upper_level_#1_bool }
139 }
140 \clist_map_inline:nn { i, ii, iii, iv, vii } { \__enumext_tmp:n {#1} }

```

(End of definition for `\l__enumext_print_keyans_starred_tl` and others.)

```

\l__enumext_keyans_pic_body_seq
\l__enumext_keyans_pic_width_dim
\l__enumext_keyans_pic_above_int
\l__enumext_keyans_pic_below_int
\l__enumext_keyans_pic_star_bool
\l__enumext_keyans_pic_label_pos_str
\g__enumext_keyans_pic_parsep_skip
\l__enumext_anspic_label_box
\l__enumext_anspic_body_box
\l__enumext_anspic_label_htdp_dim
\l__enumext_anspic_body_htdp_dim

```

Internal variables used by `keyanspic` environment and `\anspic` command (§12.41.1).

```

141 \seq_new:N \l__enumext_keyans_pic_body_seq
142 \dim_new:N \l__enumext_keyans_pic_width_dim
143 \int_new:N \l__enumext_keyans_pic_above_int
144 \int_new:N \l__enumext_keyans_pic_below_int
145 \bool_new:N \l__enumext_keyans_pic_star_bool
146 \str_new:N \l__enumext_keyans_pic_label_pos_str
147 \skip_new:N \g__enumext_keyans_pic_parsep_skip
148 \box_new:N \l__enumext_anspic_label_box
149 \box_new:N \l__enumext_anspic_body_box
150 \dim_new:N \l__enumext_anspic_label_htdp_dim
151 \dim_new:N \l__enumext_anspic_body_htdp_dim

```

(End of definition for `\l__enumext_keyans_pic_body_seq` and others.)

Internal variables used by “*internal check answer*” mechanism (§12.25.3) used by the `check-ans` and `no-store` keys and check for starred commands `\item*` in `keyans` and `keyans*` environments and `\anspic*` in `keyanspic` environment.

```

152 \bool_new:N \l__enumext_check_answers_bool
153 \bool_new:N \g__enumext_check_ans_key_bool
154 \tl_new:N \l__enumext_check_start_line_env_tl
155 \int_new:N \g__enumext_check_starred_cmd_int
156 \int_new:N \g__enumext_item_anskey_int
157 \int_new:N \g__enumext_item_number_int
158 \bool_new:N \l__enumext_item_number_bool
159 \int_new:N \g__enumext_item_answer_diff_int

```

(End of definition for `\l__enumext_check_answers_bool` and others.)

The boolean variable `\l__enumext_hyperref_bool` will determine if the `hyperref` package is present or load in memory (§12.8). The boolean variable `\l__enumext_footnotes_key_bool` determine if `hyperref` is load with key `hyperfootnotes=true`.

```

160 \bool_new:N \l__enumext_hyperref_bool
161 \bool_new:N \l__enumext_footnotes_key_bool

```

(End of definition for `\l__enumext_hyperref_bool` and `\l__enumext_footnotes_key_bool`.)

Internal variables used by `save-ref` key (§12.26). The variables `\l__enumext_label_copy_X_tl` correspond to temporary copies of the  $\langle labels \rangle$  defined by level on which operations will be performed.

The variables `\l__enumext_newlabel_arg_one_tl` and `\l__enumext_newlabel_arg_two_tl` will be used to form the arguments passed to the function `\__enumext_newlabel:nn` (§12.8) and the variable `\l__enumext_write_aux_file_tl` will be in charge of executing the writing code in the `.aux` file.

```

162 \tl_new:N \l__enumext_newlabel_arg_one_tl
163 \tl_new:N \l__enumext_newlabel_arg_two_tl
164 \tl_new:N \l__enumext_write_aux_file_tl
165 \cs_set_protected:Npn \__enumext_tmp:n #1
166 {
167   \tl_new:c { l__enumext_label_copy_#1_tl }
168 }
169 \clist_map_inline:nn { i, ii, iii, iv, v, vi, vii, viii } { \__enumext_tmp:n {#1} }

```

(End of definition for `\l__enumext_newlabel_arg_one_tl` and others.)

Internal variables used for redefinition of `\footnote` (§12.42.4).

```

170 \int_new:N \g__enumext_footnote_int
171 \seq_new:N \g__enumext_footnote_arg_seq
172 \seq_new:N \g__enumext_footnote_int_seq

```

(End of definition for `\g__enumext_footnote_int`, `\g__enumext_footnote_arg_seq`, and `\g__enumext_footnote_int_seq`.)

Internal variables used by `enumext*` and `keyans*` environments.

```

173 \cs_set_protected:Npn \__enumext_tmp:n #1
174 {
175   \bool_new:c { l__enumext_item_starred_#1_bool }
176   \int_new:c { l__enumext_item_column_pos_#1_int }
177   \int_new:c { g__enumext_item_count_all_#1_int }
178   \int_new:c { l__enumext_joined_item_#1_int }
179   \int_new:c { l__enumext_joined_item_aux_#1_int }
180   \int_new:c { l__enumext_tmpa_#1_int }
181   \dim_new:c { l__enumext_tmpa_#1_dim }
182   \box_new:c { l__enumext_item_text_#1_box }
183   \dim_new:c { l__enumext_joined_width_#1_dim }
184   \dim_new:c { l__enumext_item_width_#1_dim }
185   \tl_new:c { g__enumext_item_symbol_aux_#1_tl }
186   \str_new:c { l__enumext_align_label_#1_str }
187   \bool_new:c { g__enumext_minipage_active_#1_bool }
188   \box_new:c { l__enumext_miniright_code_#1_box }
189   \bool_new:c { g__enumext_minipage_center_#1_bool }
190   \dim_new:c { g__enumext_minipage_right_#1_dim }
191   \skip_new:c { g__enumext_minipage_right_#1_skip }
192 }
193 \clist_map_inline:nn { vii, viii } { \__enumext_tmp:n {#1} }

```

(End of definition for `\l__enumext_item_starred_X_bool` and others.)

`\c__enumext_all_envs_clist` An internal `clist-var` variable to run with `\__enumext_tmp:n`.

```
194 \clist_const:Nn \c__enumext_all_envs_clist
195 {
196   {level-1}{i}, {level-2}{ii}, {level-3}{iii}, {level-4}{iv},
197   {keyans}{v}, {enumext*}{vii}, {keyans*}{viii}
198 }
```

(End of definition for `\c__enumext_all_envs_clist`.)

## 12.5 Some utility functions

`\keys_precompile:neN` Non-standard kernel variants used by the `\printkeyans` command (§12.46) and `\foreachkeyans` command (§12.49).

`\seq_use:NV`

```
199 \cs_generate_variant:Nn \keys_precompile:nnN { neN }
200 \cs_generate_variant:Nn \seq_use:Nn { NV }
```

(End of definition for `\keys_precompile:neN` and `\seq_use:NV`.)

`\__enumext_at_begin_document:n` A internal “hook” function used for copying plain `list` and `minipage` environments definition and `hyperref` detection.

```
201 \cs_new_protected:Npn \__enumext_at_begin_document:n #1
202 {
203   \hook_gput_code:nnn {begindocument} {enumext} { #1 }
204 }
```

(End of definition for `\__enumext_at_begin_document:n`.)

`\__enumext_after_env:nn` A internal “hook” functions for execute code `mini-right` and `mini-right*` keys outside the `enumext*` and `keyans*` environments and print `check-ans` outside the `enumext` and `enumext*` environments.

`\__enumext_before_env:nn`

```
205 \cs_new_protected:Npn \__enumext_after_env:nn #1 #2
206 {
207   \hook_gput_code:nnn {env/#1/after} {enumext} {#2}
208 }
209 \cs_new_protected:Npn \__enumext_before_env:nn #1 #2
210 {
211   \hook_gput_code:nnn {env/#1/before} {enumext} {#2}
212 }
```

(End of definition for `\__enumext_after_env:nn` and `\__enumext_before_env:nn`.)

`\__enumext_level:` Function for check current level in `enumext`.

```
213 \cs_new:Nn \__enumext_level:
214 {
215   \int_to_roman:n { \l__enumext_level_int }
216 }
```

(End of definition for `\__enumext_level:`.)

`\__enumext_if_is_int:nT` A conditional function to know if the variable we are passing is an integer used by `start` and `widest` keys.

`\__enumext_if_is_int:nF`

`\__enumext_if_is_int:nTF`

This function is taken directly from the answer given by Henri Menke in [How to test if an expl3 function argument is an integer expression?](#).

```
217 \prg_new_protected_conditional:Npnn \__enumext_if_is_int:n #1 { T, F, TF }
218 {
219   \regex_match:nnTF { ^[\+-]?[\d]+$ } {#1} % $
220   { \prg_return_true: }
221   { \prg_return_false: }
222 }
```

(End of definition for `\__enumext_if_is_int:nT`, `\__enumext_if_is_int:nF`, and `\__enumext_if_is_int:nTF`.)

`\__enumext_regex_counter_style:`

The internal function `\__enumext_regex_counter_style:` replace the ‘\*’ with the actual counter of the running level and is used by the `ref` key. It loops through the defined counter styles in `\c__enumext_counter_style_tl` and replace ‘\*’ by real command, for example, looking for `\arabic*` and replacing that by `\arabic{<counter>}` defined on the current level.

```
223 \cs_new_protected:Nn \__enumext_regex_counter_style:
224 {
225   \tl_map_inline:Nn \c__enumext_counter_style_tl
226   {
227     \regex_replace_once:nnN { \c{##1}\* }
228     { \c{##1}\cB{\u{l__enumext_ref_the_count_tl}\cE} } \l__enumext_ref_key_arg_tl
229   }
230 }
```

(End of definition for `\__enumext_regex_counter_style:`.)

`\__enumext_show_length:nnn`

Internal function used by `show-length` key to show “*all lengths*” calculated and use in `enumext`, `enumext*`, `keyans` and `keyans*` environments.

```

231 \cs_new:Npn \__enumext_show_length:nnn #1 #2 #3
232 {
233   * ~ #2
234   \prg_replicate:nn { 14 - \str_count:n {#2} } { ~ }
235   = ~ \use:c { #1_use:c } { \__enumext_#2_#3_#1 } \\
236 }

```

(End of definition for `\__enumext_show_length:nnn`.)

`\__enumext_unskip_unkern:`

The function `\__enumext_unskip_unkern:` will remove the last `<skip>` or `<kern>` at execution time using the values `11` and `12` of `\lastnodetype` to apply `\unskip` or `\unkern` according to the case.

```

237 \cs_new_protected:Npn \__enumext_unskip_unkern:
238 {
239   \int_case:nnT { \lastnodetype }
240   {
241     { 11 }
242     {
243       % \typeout{SKIP} \typeout{\the\lastskip}
244       \unskip
245     }
246     { 12 }
247     {
248       % \typeout{KERN} \typeout{\the\lastkern}
249       \unkern
250     }
251   }
252 }

```

(End of definition for `\__enumext_unskip_unkern:`.)

### 12.5.1 Utilities for environments and levels

`\__enumext_is_not_nested:`

The function `\__enumext_is_not_nested:` set the variables `\g__enumext_standar_bool` and `\g__enumext_starred_bool` to “*true*” only if the environments `enumext` and `enumext*` are nested in each other and save the environment name in `\l__enumext_envir_name_tl`.

`\__enumext_is_on_first_level:`

```

253 \cs_new_protected:Nn \__enumext_is_not_nested:
254 {
255   \str_case:en { \@currenvir }
256   {
257     {enumext}
258     {
259       \tl_set:Nn \l__enumext_envir_name_tl { enumext }
260       \bool_lazy_and:nnT
261       { \bool_not_p:n { \g__enumext_standar_bool } }
262       { \int_compare_p:nNn { \l__enumext_level_h_int } = { 0 } }
263       {
264         \bool_gset_true:N \g__enumext_standar_bool
265       }
266     }
267     {enumext*}
268     {
269       \tl_set:Nn \l__enumext_envir_name_tl { enumext* }
270       \bool_lazy_and:nnT
271       { \bool_not_p:n { \g__enumext_starred_bool } }
272       { \int_compare_p:nNn { \l__enumext_level_int } = { 0 } }
273       {
274         \bool_gset_true:N \g__enumext_starred_bool
275       }
276     }
277   }
278 }

```

The function `\__enumext_is_on_first_level:` will set the variables `\l__enumext_standar_first_bool` (§12.25.1), `\l__enumext_starred_first_bool` (§12.25.1) and `\l__enumext_anskey_env_bool` (§12.30) to “*true*” only if the environment is not nested and we are in the “*first level*” of it . We will also save the *start line number* of each environment in the variable `\g__enumext_start_line_tl` and the *name* of each environment in the variable `\g__enumext_envir_name_tl` to use in messages related to the `check-ans` key and `.log` file.

```

279 \cs_new_protected:Nn \__enumext_is_on_first_level:
280 {
281   \bool_lazy_all:nT
282   {
283     { \bool_if_p:N \g__enumext_standar_bool }
284     { \int_compare_p:nNn { \l__enumext_level_int } = { 1 } }
285     { \int_compare_p:nNn { \l__enumext_level_h_int } = { 0 } }
286   }
287   {
288     \bool_set_true:N \l__enumext_standar_first_bool
289     \bool_set_true:N \l__enumext_anskey_env_bool
290     \tl_gset:Nn \g__enumext_envir_name_tl { enumext }
291     \tl_gset:Ne \g__enumext_start_line_tl
292       {
293         on ~ line ~ \exp_not:V \inputlineno
294       }
295   }
296   \bool_lazy_all:nT
297   {
298     { \bool_if_p:N \g__enumext_starred_bool }
299     { \int_compare_p:nNn { \l__enumext_level_h_int } = { 1 } }
300     { \int_compare_p:nNn { \l__enumext_level_int } = { 0 } }
301   }
302   {
303     \bool_set_true:N \l__enumext_starred_first_bool
304     \bool_set_true:N \l__enumext_anskey_env_bool
305     \tl_gset:Nn \g__enumext_envir_name_tl { enumext* }
306     \tl_gset:Ne \g__enumext_start_line_tl
307       {
308         on ~ line ~ \exp_not:V \inputlineno
309       }
310   }
311 }

```

(End of definition for \\_\_enumext\_is\_not\_nested: and \\_\_enumext\_is\_on\_first\_level:.)

\\_\_enumext\_keyans\_name\_and\_start:

The function \\_\_enumext\_keyans\_name\_and\_start: will save the start line number and name of the environments `keyans`, `keyans*` and `keyanspic` in the variables `\l__enumext_check_start_line_env_tl` and `\l__enumext_envir_name_tl` to use in the `\__enumext_check_starred_cmd:n` function.

```

312 \cs_new_protected:Nn \__enumext_keyans_name_and_start:
313 {
314   \str_case:en { \@currenvir }
315   {
316     {keyans}
317     {
318       \tl_set:Nn \l__enumext_envir_name_tl { keyans }
319       \tl_set:Ne \l__enumext_check_start_line_env_tl
320         {
321           in ~ 'keyans' ~ start ~ on ~ line ~ \exp_not:V \inputlineno
322         }
323     }
324     {keyans*}
325     {
326       \tl_set:Nn \l__enumext_envir_name_tl { keyans* }
327       \tl_set:Ne \l__enumext_check_start_line_env_tl
328         {
329           in ~ 'keyans*' ~ start ~ on ~ line ~ \exp_not:V \inputlineno
330         }
331     }
332     {keyanspic}
333     {
334       \tl_set:Nn \l__enumext_envir_name_tl { keyanspic }
335       \tl_set:Ne \l__enumext_check_start_line_env_tl
336         {
337           in ~ 'keyanspic' ~ start ~ on ~ line ~ \exp_not:V \inputlineno
338         }
339     }
340   }
341 }

```

(End of definition for \\_\_enumext\_keyans\_name\_and\_start:.)



### 12.5.2 Utilities for log and terminal

The function `\__enumext_reset_global_vars:` will be passed to the function `\__enumext_execute_after_env:` and will return the global variables to their default values after being used.

```

342 \cs_new_protected:Nn \__enumext_reset_global_vars:
343 {
344   \__enumext_reset_global_int:
345   \__enumext_reset_global_bool:
346   \__enumext_reset_global_tl:
347 }
348 \cs_new_protected:Nn \__enumext_reset_global_int:
349 {
350   \int_gzero:N \g__enumext_item_number_int
351   \int_gzero:N \g__enumext_item_anskey_int
352   \int_gzero:N \g__enumext_item_answer_diff_int
353 }
354 \cs_new_protected:Nn \__enumext_reset_global_bool:
355 {
356   \bool_gset_false:N \g__enumext_check_ans_key_bool
357   \bool_gset_false:N \g__enumext_standar_bool
358   \bool_gset_false:N \g__enumext_starred_bool
359 }
360 \cs_new_protected:Nn \__enumext_reset_global_tl:
361 {
362   \tl_gclear:N \g__enumext_store_name_tl
363   \tl_gclear:N \g__enumext_start_line_tl
364   \tl_gclear:N \g__enumext_envir_name_tl
365 }

```

(End of definition for `\__enumext_reset_global_vars:` and others.)

The function `\__enumext_log_global_vars:` will be passed to the function `\__enumext_execute_after_env:` and write to the `.log` file the number of elements saved in the *(prop list)* and *(sequence)* created by the `save-ans` key along with the value of the integer variable created for the `resume` key.

```

366 \cs_new_protected:Nn \__enumext_log_global_vars:
367 {
368   \msg_log:nneeee { enumext } { prop-seq-int-hook }
369   { \g__enumext_store_name_tl }
370   { \prop_count:c { g__enumext_ \g__enumext_store_name_tl _prop } }
371   { \seq_count:c { g__enumext_ \g__enumext_store_name_tl _seq } }
372   { \int_use:c { g__enumext_resume_ \g__enumext_store_name_tl _int } }
373 }

```

The function `\__enumext_log_answer_vars:` will be passed to the function `\__enumext_execute_after_env:` and write to the `.log` file the number of items and answers along with the difference between them.

```

374 \cs_new_protected:Nn \__enumext_log_answer_vars:
375 {
376   \msg_log:nneee { enumext } { item-answer-hook }
377   { \int_use:N \g__enumext_item_number_int }
378   { \int_use:N \g__enumext_item_anskey_int }
379   { \int_eval:n { \g__enumext_item_number_int - \g__enumext_item_anskey_int } }
380 }

```

(End of definition for `\__enumext_log_global_vars:` and `\__enumext_log_answer_vars:`.)

## 12.6 Copying list and minipage environments

The `list` environment provided by  $\text{\LaTeX}$  has the following plain form:

```

\list{⟨arg one⟩}{⟨arg two⟩}
  \item[⟨opt⟩]
\endlist

```

As a precaution we copy them using `\__enumext_at_begin_document:n` in case any package redefines the `list` environment or a related command.

◆ For compatibility with  $\text{\LaTeX}$  tagged PDF we should use `\NewCommandCopy` and not `\cs_new_eq:NN`. When tagged PDF is active `\item` is redefined using `\ltxcmd` (see `latex-lab-block`).

The functions `\__enumext_start_list:nn`, `\__enumext_stop_list:` and `\__enumext_item_std:w` correspond to copies of `\list`, `\endlist` and `\item` from plain definition of `list` environment.

```

381 \__enumext_at_begin_document:n

```

```

382 {
383   \cs_new_eq:NN   \__enumext_start_list:nn \list
384   \cs_new_eq:NN   \__enumext_stop_list:  \endlist
385   \NewCommandCopy \__enumext_item_std:w \item
386 }

```

(End of definition for `\__enumext_start_list:nn`, `\__enumext_stop_list:`, and `\__enumext_item_std:w`.)

The `minipage` environment provided by L<sup>A</sup>T<sub>E</sub>X has the following (simplified) plain form:

```

\minipage[⟨pos⟩][⟨height⟩][⟨inner-pos⟩]{⟨width⟩}
⟨internal implement⟩
\endminipage

```

As a precaution we copy them using `\__enumext_at_begin_document:n` in case any package redefines the `minipage` environment or a related command.

```

\__enumext_minipage:w
\__enumext_endminipage:

```

The functions `\__enumext_minipage:w`, `\__enumext_endminipage:` and correspond to copies of `\minipage`, `\endminipage` from plain definition of `minipage` environment.

```

387 \__enumext_at_begin_document:n
388 {
389   \cs_new_eq:NN \__enumext_minipage:w \minipage
390   \cs_new_eq:NN \__enumext_endminipage: \endminipage
391 }

```

(End of definition for `\__enumext_minipage:w` and `\__enumext_endminipage:.`)

## 12.7 The internal minipage environment

```

\__enumext_internal_mini_page:
__enumext_mini_env*

```

The function `\__enumext_internal_mini_page:` creates a internal `__enumext_mini_page` environment (custom version of `minipage`) setting the `\if@minipage` switch to “false” to allow spaces at the “above” of the environment, plus we will add `\skip_vertical:N \c_zero_skip` to maintain alignment on “top” in the first part and `\skip_vertical:N \c_zero_skip` in the second part to allow spaces “below”. This environment will be used internally by the `mini-env` key, it is not documented in the user interface and is for internal use only. This function is passed to the function `\__enumext_safe_exec:` in the `enumext` environment definition (§12.38) and `\__enumext_safe_exec_vii:` in the `enumext*` environment definition (§12.43)

```

392 \cs_new_protected:Nn \__enumext_internal_mini_page:
393 {
394   \int_compare:nNnT { \l__enumext_level_int } = { 0 }
395   {
396     \DeclareDocumentEnvironment{__enumext_mini_page}{ m }
397     {
398       \__enumext_minipage:w [ t ] { ##1 }
399       \legacy_if_gset_false:n { @minipage }
400       \skip_vertical:N \c_zero_skip
401     }
402     {
403       \skip_vertical:N \c_zero_skip
404       \__enumext_endminipage:
405     }
406   }
407 }

```

(End of definition for `\__enumext_internal_mini_page:` and `__enumext_mini_env*`.)

## 12.8 Compatibility with hyperref and footnotehyper

First we define the necessary rules using “hooks” to determine if the `hyperref` package is loaded.

```

408 \hook_gput_code:nnn { begindocument } { enumext } { \__enumext_after_hyperref: }
409 \hook_gset_rule:nnnn { begindocument } { enumext } { after } { hyperref }

```

```

\__enumext_after_hyperref:
\__enumext_hypertarget:nn
\__enumext_phantomsection:

```

The function `\__enumext_after_hyperref:` sets the state of the boolean variable `\l__enumext_hypertext_bool` to “true” if the package is loaded. At this point we will use the public macro `\IfHyperBoolean` to determine if the `hyperfootnotes=true` key is present, if so, we set the state of the boolean variable `\__enumext_footnotes_key_bool` to “true”.

```

410 \cs_new_protected:Nn \__enumext_after_hyperref:
411 {
412   \IfPackageLoadedTF { hyperref }
413   {
414     \msg_info:nnn { enumext } { package-load } { hyperref }
415     \bool_set_true:N \l__enumext_hypertext_bool

```

```

416     \IfHyperBoolean{hyperfootnotes}
417     {
418         % \typeout{hyperfootnotes=true}
419         \bool_set_true:N \l__enumext_footnotes_key_bool
420     }
421     {
422         % \typeout{hyperfootnotes=false}
423     }
424 }
425 { }

```

If the state of the variable `\l__enumext_footnotes_key_bool` is true we will check if the package `footnotehyper` is loaded, in case it is not present, we will set the value of `\l__enumext_footnotes_key_bool` to false and we will redefine `\footnote`.

```

426 \bool_if:NT \l__enumext_footnotes_key_bool
427 {
428     \IfPackageLoadedTF { footnotehyper }
429     {
430         \msg_info:nnn { enumext } { package-load } { footnotehyper }
431     }
432     {
433         % \typeout{No ~ footnotehyper ~ load}
434         % \typeout{Load ~ and ~ use ~ \string\makesavenoteenv{enumext*}}
435         \bool_set_false:N \l__enumext_footnotes_key_bool
436     }
437 }

```

The functions `\__enumext_hypertarget:nn` and `\__enumext_phantomsection:` correspond to the internal copies of `\hypertarget` and `\phantomsection`. If the boolean variable `\l__enumext_hyperref_bool` is false the functions `\__enumext_hypertarget:nn` and `\__enumext_phantomsection:` will be disabled.

```

438 \bool_if:NTF \l__enumext_hyperref_bool
439 {
440     \cs_new_eq:NN \__enumext_hypertarget:nn \hypertarget
441     \cs_new_eq:NN \__enumext_phantomsection: \phantomsection
442 }
443 {
444     \cs_new_eq:NN \__enumext_hypertarget:nn \use_none:nn
445     \cs_new_eq:NN \__enumext_phantomsection: \prg_do_nothing:
446 }
447 }

```

(End of definition for `\__enumext_after_hyperref:`, `\__enumext_hypertarget:nn`, and `\__enumext_phantomsection:`.)

`\__enumext_newlabel:nn`

The function `\__enumext_newlabel:nn` write the information to the `.aux` file when using the `save-ref` key. The arguments taken by the function are:

#1: `\l__enumext_newlabel_arg_one_tl`  
 #2: `\l__enumext_newlabel_arg_two_tl`

🔗 The trick here is to manage the number of arguments passed to `\newlabel{#1}{#2}` according to the presence of the `hyperref` package.

```

448 \cs_new_protected:Npn \__enumext_newlabel:nn #1 #2
449 {
450     \protected@write \@auxout { }
451     {
452         \token_to_str:N \newlabel {#1}
453         {
454             {#2}
455             \bool_if:NT \l__enumext_hyperref_bool
456             { { \thepage } {#2} {#1} }
457             { }
458         }
459     }
460     \__enumext_hypertarget:nn {#1} { }
461     \__enumext_phantomsection:
462 }

```

(End of definition for `\__enumext_newlabel:nn`.)

## 12.9 Definition of public dimension

The package `enumext` only provides a single public dimension `\itemwidth` and is intended for user convenience only and is not for internal use as such. This dimension is set in all environments and is only used by the `wrap-ans` key at its default value.

```
463 \dim_zero_new:N \itemwidth
```

### 12.10 Definition of counters

```
\__enumext_define_counters:Nn
\__enumext_define_counters:cn
```

To create the necessary “counters” we must first make sure that they are not already defined by the user or a package such as `enumitem`, otherwise a error will be returned and the package loading will be aborted. The arguments taken by the function are:

#1 : A token list `\__enumext_counter_X_tl` for “store” the counter’s name.

#2 : The counter’s name.

```
464 \cs_new_protected:Npn \__enumext_define_counters:Nn #1 #2
465 {
466   \cs_if_exist:cTF { c@ #2 }
467   { \msg_fatal:nnn { enumext } { counters } { #2 } }
468   {
469     \tl_set:Nn #1 { #2 }
470     \newcounter { #2 }
471   }
472 }
```

(End of definition for `\__enumext_define_counters:Nn`.)

The counters created here are `enumXi`, `enumXii`, `enumXiii` and `enumXiv` for `enumext` environment, `enumXv` for `keyans` environment, `enumXvi` for `keyanspic` environment, `enumXvii` for `enumext*` and `enumXviii` for the `keyans*` environments.

```
enumXi 473 \__enumext_define_counters:Nn \__enumext_counter_i_tl { enumXi }
enumXv 474 \__enumext_define_counters:Nn \__enumext_counter_ii_tl { enumXii }
enumXvi 475 \__enumext_define_counters:Nn \__enumext_counter_iii_tl { enumXiii }
enumXvii 476 \__enumext_define_counters:Nn \__enumext_counter_iv_tl { enumXiv }
enumXviii 477 \__enumext_define_counters:Nn \__enumext_counter_v_tl { enumXv }
478 \__enumext_define_counters:Nn \__enumext_counter_vi_tl { enumXvi }
479 \__enumext_define_counters:Nn \__enumext_counter_vii_tl { enumXvii }
480 \__enumext_define_counters:Nn \__enumext_counter_viii_tl { enumXviii }
```

(End of definition for `enumXi` and others.)

### 12.11 Definition of labels

This part of the code is inspired by the `enumitem` package. The idea is to be able to access the counters using `\arabic*`, `\Alph*`, `\alph*`, `\Roman*` and `\roman*` to use them in the `label` key.

```
\__enumext_register_counter_style:Nn
```

These `<counters>` will be used as default `<labels>` if the `label` key is not used for the different levels of the `enumext` environment and the `keyans` environment, so it is necessary to get a default value for `labelwidth` from these `<labels>` at the same time.

```
481 \cs_new_protected:Npn \__enumext_register_counter_style:Nn #1 #2
482 {
483   \tl_const:cn { c__enumext_widest_ \cs_to_str:N #1 _tl } {#2}
484   \tl_gput_right:Nn \g__enumext_counter_styles_tl {#1}
485 }
486 \__enumext_register_counter_style:Nn \arabic { 0 }
487 \__enumext_register_counter_style:Nn \Alph { M }
488 \__enumext_register_counter_style:Nn \alph { m }
489 \__enumext_register_counter_style:Nn \Roman { VIII }
490 \__enumext_register_counter_style:Nn \roman { viii }
```

(End of definition for `\__enumext_register_counter_style:Nn`.)

```
\__enumext_label_width_by_box:Nn
\__enumext_label_width_by_box:cv
```

The function `\__enumext_label_width_by_box:Nn` set the default `\labelwidth` using a box width if no `labelwidth` key is passed.

```
491 \cs_new_protected:Npn \__enumext_label_width_by_box:Nn #1 #2
492 {
493   \hbox_set:Nn \__enumext_label_width_by_box {#2}
494   \dim_set:Nn #1 { \box_wd:N \__enumext_label_width_by_box }
495 }
496 \cs_generate_variant:Nn \__enumext_label_width_by_box:Nn { cv }
```

(End of definition for `\__enumext_label_width_by_box:Nn`.)

\\_\_enumext\_label\_style:Nnn  
 \\_\_enumext\_label\_style:cvn

The function `\__enumext_label_style:Nnn` is used by the `label` key to creates the variables containing the `<label style>` and will allow to use `\arabic*`, `\Alph*`, `\alph*`, `\Roman*` and `\roman*` as arguments. It loops through the defined counter styles in `\g__enumext_counter_styles_tl` (`\arabic`, `\alph`, `\Alph`, `\roman`, and `\Roman`) for example, looking for `\roman*` and replacing that by `\roman{<counter>}`, and doing the same for the `\g__enumext_widest_label_tl` to keep both in sync.

```

497 \cs_new_protected:Npn \__enumext_label_style:Nnn #1 #2 #3
498 {
499   \tl_clear_new:N #1
500   \tl_put_right:Ne #1 { \tl_trim_spaces:n {#3} }
501   \tl_gset_eq:NN \g__enumext_widest_label_tl #1
502   \tl_map_inline:Nn \g__enumext_counter_styles_tl
503     {
504       \tl_replace_all:Nne #1 { ##1* } { \exp_not:N ##1 {#2} }
505       \tl_greplace_all:Nne \g__enumext_widest_label_tl { ##1* }
506         { \tl_use:c { c__enumext_widest_ \cs_to_str:N ##1 _tl } }
507     }
508   \__enumext_label_width_by_box:Nn \__enumext_current_widest_dim
509     { \tl_use:N \g__enumext_widest_label_tl }
510   \tl_set_eq:cN { the #2 } #1
511 }
512 \cs_generate_variant:Nn \__enumext_label_style:Nnn { cvn }

```

(End of definition for `\__enumext_label_style:Nnn`.)

## 12.12 Setting keys associated with label

font  
 labelsep  
 labelwidth  
 wrap-label  
 wrap-label\*

Definition of keys `font`, `labelsep`, `labelwidth`, `wrap-label` and `wrap-label*` keys for `enumext` and `keyans` environments.

```

513 \cs_set_protected:Npn \__enumext_tmp:nn #1 #2
514 {
515   \keys_define:nn { enumext / #1 }
516   {
517     font      .tl_set:c   = { l__enumext_label_font_style_#2_tl },
518     font      .value_required:n = true,
519     labelsep   .dim_set:c   = { l__enumext_labelsep_#2_dim },
520     labelsep   .initial:n   = {0.3333em},
521     labelsep   .value_required:n = true,
522     labelwidth .dim_set:c   = { l__enumext_labelwidth_#2_dim },
523     labelwidth .value_required:n = true,
524     wrap-label .cs_set_protected:cp = { __enumext_wrapper_label_#2:n } ##1,
525     wrap-label .initial:n   = {##1},
526     wrap-label .value_required:n = true,
527     wrap-label* .code:n = {
528       \bool_set_true:c { l__enumext_wrap_label_opt_#2_bool }
529       \keys_set:nn { enumext / #1 } { wrap-label = {##1} }
530     },
531     wrap-label* .value_required:n = true,
532   }
533 }
534 \clist_map_inline:Nn \c__enumext_all_envs_clist { \__enumext_tmp:nn #1 }

```

(End of definition for `font` and others.)

- In this point, the following are set `\__enumext_wrapper_label_X:n` which will be used by `\__enumext_make_label:` for the different levels of the `enumext` environment and is set to `\__enumext_wrapper_label_v:n` which will be used by `\__enumext_keyans_make_label:` for `keyans` and `keyanspic` environments.

`align` The `align` key is implemented differently for “starred” and “non starred” environments.

```

535 \cs_set_protected:Npn \__enumext_tmp:nn #1 #2
536 {
537   \keys_define:nn { enumext / #1 }
538   {
539     align .choice:,
540     align / left .code:n =
541       {
542         \tl_clear:c { l__enumext_label_fill_left_#2_tl }
543         \tl_set:cn { l__enumext_label_fill_right_#2_tl } { \hfill }
544         \str_set:cn { l__enumext_align_label_pos_#2_str } { l }
545       },
546     align / right .code:n =
547       {
548         \tl_set:cn { l__enumext_label_fill_left_#2_tl } { \hfill }

```

```

549         \tl_clear:c { l__enumext_label_fill_right_#2_tl }
550         \str_set:cn { l__enumext_align_label_pos_#2_str } { r }
551     },
552     align / center .code:n =
553     {
554         \tl_set:cn { l__enumext_label_fill_left_#2_tl } { \hfill }
555         \tl_set:cn { l__enumext_label_fill_right_#2_tl } { \hfill }
556         \str_set:cn { l__enumext_align_label_pos_#2_str } { c }
557     },
558     align / unknown .code:n =
559         \msg_error:nneee { enumext } { unknown-choice }
560         { align } { left, ~ right, ~ center } { \exp_not:n {##1} },
561     align .initial:n = left,
562     align .value_required:n = true,
563 }
564 }
565 \clist_map_inline:nn
566 {
567     {level-1}{i}, {level-2}{ii}, {level-3}{iii}, {level-4}{iv}, {keyans}{v}
568 }
569 { \__enumext_tmp:nn #1 }

```

For compatibility with  $\text{\LaTeX}$  tagged PDF we must set `\l__enumext_align_label_pos_X_str`. When tagged PDF is active `\makelabel` is redefined and the only way to get the align key to work correctly is by using `\makebox`.

```

570 \cs_set_protected:Npn \__enumext_tmp:nn #1 #2
571 {
572     \keys_define:nn { enumext / #1 }
573     {
574         align .choice:,
575         align / left .code:n = \str_set:cn { l__enumext_align_label_#2_str } { l },
576         align / right .code:n = \str_set:cn { l__enumext_align_label_#2_str } { r },
577         align / center .code:n = \str_set:cn { l__enumext_align_label_#2_str } { c },
578         align / unknown .code:n =
579             \msg_error:nneee { enumext } { unknown-choice }
580             { align } { left, ~ right, ~ center } { \exp_not:n {##1} },
581         align .initial:n = left,
582         align .value_required:n = true,
583     }
584 }
585 \clist_map_inline:nn { {enumext*}{vii}, {keyans*}{viii} } { \__enumext_tmp:nn #1 }

```

(End of definition for align.)

## 12.13 Setting label and ref keys

The implementation of the keys `label` and `ref` are part of the core of the package `enumext`, here the default values for  $\langle label \rangle$ , the value of the variables `\l__enumext_label_X_tl`, the default values for `\labelwidth` and the “label and ref” system.

### 12.13.1 Define and set label and ref keys for enumext environment

Here we set the default  $\langle labels \rangle$  of the *four levels* of `enumext` environment, along with the default value for `labelwidth` key and `ref` key.

```

\l__enumext_label_i_tl
\l__enumext_label_ii_tl
\l__enumext_label_iii_tl
\l__enumext_label_iv_tl
586 \cs_set_protected:Npn \__enumext_tmp:nnn #1 #2 #3
587 {
588     \keys_define:nn { enumext / #1 }
589     {
590         label .code:n = {
591             \__enumext_label_style:cnv { l__enumext_label_#2_tl }
592             { l__enumext_counter_#2_tl } {##1}
593             \dim_set_eq:cN { l__enumext_labelwidth_#2_dim }
594             \l__enumext_current_widest_dim
595         },
596         label .initial:n = #3,
597         label .value_required:n = true,
598         ref .code:n = \__enumext_standar_ref:n {##1},
599         ref .value_required:n = true,
600     }
601 }
602 \__enumext_tmp:nnn { level-1 } { i } { \arabic*. }
603 \__enumext_tmp:nnn { level-2 } { ii } { (\alph*. ) }
604 \__enumext_tmp:nnn { level-3 } { iii } { \roman*. }
605 \__enumext_tmp:nnn { level-4 } { iv } { \Alph*. }

```



(End of definition for `label` and others.)

`\__enumext_standar_ref:n`  
`\__enumext_standar_ref:`

The `\__enumext_standar_ref:n` first we will pass the key argument to `\__enumext_ref_key_arg_tl` and we will analyze its state, if it is not *empty* we will make a copy of the current counter in `\__enumext_ref_the_count_tl` and we will execute the function `\__enumext_regex_counter_style:` which will return the modified `\__enumext_ref_key_arg_tl` and we make the value of `\__enumext_ref_the_count_tl` the same as that `\__enumext_the_counter_X_tl` which contains `\theenumX` and finally we set `\__enumext_renew_the_count_X_tl` with the renewed command.

```

606 \cs_new_protected:Npn \__enumext_standar_ref:n #1
607 {
608   \tl_set:Nn \__enumext_ref_key_arg_tl {#1}
609   \tl_if_empty:NTF \__enumext_ref_key_arg_tl
610   {
611     \msg_error:nnn { enumext } { key-ref-empty } { enumext }
612   }
613   {
614     \tl_set_eq:Nc
615       \__enumext_ref_the_count_tl { \__enumext_counter_ \__enumext_level: _tl }
616     \__enumext_regex_counter_style:
617     \tl_set_eq:Nc
618       \__enumext_ref_the_count_tl { \__enumext_the_counter_ \__enumext_level: _tl }
619     \tl_put_right:ce { \__enumext_renew_the_count_ \__enumext_level: _tl }
620     {
621       \exp_not:N \renewcommand { \exp_not:V \__enumext_ref_the_count_tl }
622       { \exp_not:V \__enumext_ref_key_arg_tl }
623     }
624   }
625 }

```

Finally the function `\__enumext_standar_ref:` will execute the modification for the reference system in the second argument of the environment definition `enumext`.

```

626 \cs_new_protected:Nn \__enumext_standar_ref:
627 {
628   \tl_if_empty:cF { \__enumext_renew_the_count_ \__enumext_level: _tl }
629   {
630     \tl_use:c { \__enumext_renew_the_count_ \__enumext_level: _tl }
631   }
632 }

```

(End of definition for `\__enumext_standar_ref:n` and `\__enumext_standar_ref:`.)

### 12.13.2 Define and set `label` and `ref` keys for `enumext*` and `keyans*` environments

`label`  
`ref`

Here we set the default *⟨labels⟩* for `enumext*` and `keyans*` environments, along with the default value for `labelwidth` key and `ref` key.

`\__enumext_label_vii_tl`  
`\__enumext_label_viii_tl`

```

633 \cs_set_protected:Npn \__enumext_tmp:nnn #1 #2 #3
634 {
635   \keys_define:nn { enumext / #1 }
636   {
637     label .code:n = {
638       \__enumext_label_style:cvn { \__enumext_label_#2_tl }
639       { \__enumext_counter_#2_tl } {##1}
640       \dim_set_eq:cN { \__enumext_labelwidth_#2_dim }
641       \__enumext_current_widest_dim
642     },
643     label .initial:n = #3,
644     label .value_required:n = true,
645     ref .code:n = \__enumext_starred_ref:n {##1},
646     ref .value_required:n = true,
647   }
648 }
649 \__enumext_tmp:nnn { enumext* } { vii } { \arabic*. }
650 \__enumext_tmp:nnn { keyans* } { viii } { \Alph*. }

```

(End of definition for `label` and others.)

`\__enumext_starred_ref:n`  
`\__enumext_starred_ref:`

The implementation of `\__enumext_starred_ref:n` is the same as that used for the environment `enumext`.

```

651 \cs_new_protected:Npn \__enumext_starred_ref:n #1
652 {
653   \tl_set:Nn \__enumext_ref_key_arg_tl {#1}
654   \int_compare:nNnT { \__enumext_level_h_int } = { 1 }
655   {

```

```

656 \tl_if_empty:NTF \l__enumext_ref_key_arg_tl
657 {
658   \msg_error:nnn { enumext } { key-ref-empty } { enumext* }
659 }
660 {
661   \tl_set_eq:NN \l__enumext_ref_the_count_tl \l__enumext_counter_vii_tl
662   \__enumext_regex_counter_style:
663   \tl_set_eq:NN \l__enumext_ref_the_count_tl \l__enumext_the_counter_vii_tl
664   \tl_put_right:Ne \l__enumext_renew_the_count_vii_tl
665   {
666     \exp_not:N \renewcommand { \exp_not:V \l__enumext_ref_the_count_tl }
667     { \exp_not:V \l__enumext_ref_key_arg_tl }
668   }
669 }
670 }
671 \int_compare:nNnT { \l__enumext_keyans_level_h_int } = { 1 }
672 {
673   \tl_if_empty:NTF \l__enumext_ref_key_arg_tl
674   {
675     \msg_error:nnn { enumext } { key-ref-empty } { keyans* }
676   }
677   {
678     \tl_set_eq:NN \l__enumext_ref_the_count_tl \l__enumext_counter_viii_tl
679     \__enumext_regex_counter_style:
680     \tl_set_eq:NN \l__enumext_ref_the_count_tl \l__enumext_the_counter_viii_tl
681     \tl_put_right:Ne \l__enumext_renew_the_count_viii_tl
682     {
683       \exp_not:N \renewcommand { \exp_not:V \l__enumext_ref_the_count_tl }
684       { \exp_not:V \l__enumext_ref_key_arg_tl }
685     }
686   }
687 }
688 }

```

Finally the function `\__enumext_starred_ref:` will execute the modification for the reference system in the second argument of the `enumext*` and `keyans*` environment definition.

```

689 \cs_new_protected:Nn \__enumext_starred_ref:
690 {
691   \int_compare:nNnT { \l__enumext_level_h_int } = { 1 }
692   {
693     \tl_if_empty:NF \l__enumext_renew_the_count_vii_tl
694     {
695       \tl_use:N \l__enumext_renew_the_count_vii_tl
696     }
697   }
698   \int_compare:nNnT { \l__enumext_keyans_level_h_int } = { 1 }
699   {
700     \tl_if_empty:NF \l__enumext_renew_the_count_viii_tl
701     {
702       \tl_use:N \l__enumext_renew_the_count_viii_tl
703     }
704   }
705 }

```

(End of definition for `\__enumext_starred_ref:n` and `\__enumext_starred_ref:`.)

### 12.13.3 Define and set label and ref keys for keyans and keyanspic environments

Here we set the default `<label>` for `keyans` and `keyanspic` environment, along with the default value for `labelwidth` and `ref` key. The `keyanspic` environment use the same `<label>` as the `keyans` environment.

```

\l__enumext_label_v_tl
\l__enumext_label_vi_tl
706 \keys_define:nn { enumext / keyans }
707 {
708   label .code:n = {
709     \__enumext_label_style:cvn { \l__enumext_label_v_tl }
710     { \l__enumext_counter_v_tl } {#1}
711     \dim_set_eq:cN { \l__enumext_labelwidth_v_dim }
712     \l__enumext_current_widest_dim
713     \__enumext_label_style:cvn { \l__enumext_label_vi_tl }
714     { \l__enumext_counter_vi_tl } {#1}
715     \dim_set_eq:cN { \l__enumext_labelwidth_v_dim }
716     \l__enumext_current_widest_dim
717   },

```

```

718     label .initial:n = \Alph*),
719     label .value_required:n = true,
720     ref .code:n = \__enumext_keyans_ref:n {#1},
721     ref .value_required:n = true,
722 }

```

(End of definition for `label` and others.)

The implementation of `\__enumext_keyans_ref:n` is the same as that used for the environment `enumext`.

```

\__enumext_keyans_ref:n
\__enumext_keyans_ref:
723 \cs_new_protected:Npn \__enumext_keyans_ref:n #1
724 {
725   \tl_set:Nn \l__enumext_ref_key_arg_tl {#1}
726   \tl_if_empty:NTF \l__enumext_ref_key_arg_tl
727   {
728     \msg_error:nnn { enumext } { key-ref-empty } { keyans }
729   }
730   {
731     \tl_set_eq:NN \l__enumext_ref_the_count_tl \l__enumext_counter_v_tl
732     \__enumext_regex_counter_style:
733     \tl_set_eq:NN \l__enumext_ref_the_count_tl \l__enumext_the_counter_v_tl
734     \tl_put_right:Ne \l__enumext_renew_the_count_v_tl
735     {
736       \exp_not:N \renewcommand { \exp_not:V \l__enumext_ref_the_count_tl }
737       { \exp_not:V \l__enumext_ref_key_arg_tl }
738     }
739   }
740 }

```

Finally the function `\__enumext_keyans_ref:` will execute the modification for the reference system in the second argument of the `keyans*` environment definition.

```

741 \cs_new_protected:Nn \__enumext_keyans_ref:
742 {
743   \tl_if_empty:NF \l__enumext_renew_the_count_v_tl
744   {
745     \tl_use:N \l__enumext_renew_the_count_v_tl
746   }
747 }

```

(End of definition for `\__enumext_keyans_ref:n` and `\__enumext_keyans_ref:`.)

## 12.14 Setting `start`, `start*` and widest keys

```

\__enumext_start_from:NNn
\__enumext_start_from:ccn
\__enumext_start_from:cce

```

The function `\__enumext_start_from:NNn` used by `start` and `start*` keys take three arguments:

#1: `\l__enumext_label_X_tl`  
 #2: `\l__enumext_start_X_int`  
 #3: *⟨integer or string⟩*

The first argument of this function are the “*counter style*” set by `label` key, the second argument is returned by the function, the third argument can be an *⟨integer⟩* or *⟨string⟩* of the form `\Alph`, `\alph`, `\Roman` or `\roman`. This effectively allows `start=A` or `start=1` to be used.

```

748 \cs_new_protected:Npn \__enumext_start_from:NNn #1 #2 #3
749 {
750   \__enumext_if_is_int:nTF { #3 }
751   {
752     \int_set:Nn #2 {#3}
753   }
754   {
755     \regex_match:nVT { \c{Alph} | \c{alph} } {#1}
756     { \int_set:Nn #2 { \int_from_alph:n {#3} } }
757     \regex_match:nVT { \c{Roman} | \c{roman} } {#1}
758     { \int_set:Nn #2 { \int_from_roman:n {#3} } }
759   }
760 }
761 \cs_generate_variant:Nn \__enumext_start_from:NNn { ccn, cce }

```

(End of definition for `\__enumext_start_from:NNn`.)

```

\__enumext_widest_from:nNNn
\__enumext_widest_from:nccn

```

The function `\__enumext_widest_from:nNNn` used by the `widest` key take four arguments:

#1: The counter associated with the environment level  
 #2: `\l__enumext_label_X_tl`  
 #3: `\l__enumext_labelwidth_X_dim`  
 #4: *⟨integer or string⟩*

The second and third arguments of this function are the values set by `label` and `labelwidth` keys, the four argument can be an *integer* or *string* of the form `\Alph`, `\alph`, `\Roman` or `\roman`. The value of the four argument is set temporarily for the identified counter in this point (level), then the value is expanded into a “box” and the “width” of the “box” is returned.

```

762 \cs_new_protected:Npn \__enumext_widest_from:nNNn #1 #2 #3 #4
763 {
764   \__enumext_if_is_int:nTF {#4}
765   {
766     \setcounter{enumX#1} { #4 }
767   }
768   {
769     \regex_match:nVT { \c{Alph} | \c{alph} } {#2}
770     { \setcounter{enumX#1} { \int_from_alph:n {#4} } }
771     \regex_match:nVT { \c{Roman} | \c{roman} } {#2}
772     { \setcounter{enumX#1} { \int_from_roman:n {#4} } }
773   }
774   \__enumext_label_width_by_box:cv
775   { l__enumext_labelwidth_#1_dim } { l__enumext_label_#1_tl }
776 }
777 \cs_generate_variant:Nn \__enumext_widest_from:nNNn { nccn }

```

(End of definition for `\__enumext_widest_from:nNNn`.)

Now define and set `start*`, `start` and `widest` keys for `enumext`, `enumext*`, `keyans` and `keyans*` environments.

```

778 \cs_set_protected:Npn \__enumext_tmp:nn #1 #2
779 {
780   \keys_define:nn { enumext / #1 }
781   {
782     start* .code:n = {
783       \__enumext_start_from:ccn
784       { l__enumext_label_#2_tl }
785       { l__enumext_start_#2_int } {##1}
786     },
787     start* .value_required:n = true,
788     start .code:n = {
789       \__enumext_start_from:cce
790       { l__enumext_label_#2_tl }
791       { l__enumext_start_#2_int } { \int_eval:n {##1} }
792     },
793     start .initial:n = 1,
794     start .value_required:n = true,
795     widest .code:n = {
796       \__enumext_widest_from:nccn {#2}
797       { l__enumext_label_#2_tl }
798       { l__enumext_labelwidth_#2_dim } {##1}
799     },
800     widest .value_required:n = true,
801   }
802 }
803 \clist_map_inline:Nn \c__enumext_all_envs_clist { \__enumext_tmp:nn #1 }

```

(End of definition for `start`, `start*`, and `widest`.)

## 12.15 Setting keys for vertical spaces

Define and set `topsep`, `partopsep`, `parsep`, `itemsep`, `noitemsep` and `nosep` keys for `enumext`, `enumext*`, `keyans` and `keyans*` environments.

```

804 \cs_set_protected:Npn \__enumext_tmp:nnnnnn #1 #2 #3 #4 #5 #6
805 {
806   \keys_define:nn { enumext / #1 }
807   {
808     topsep .skip_set:c = { l__enumext_topsep_#2_skip },
809     topsep .initial:n = {#3},
810     topsep .value_required:n = true,
811     partopsep .skip_set:c = { l__enumext_partopsep_#2_skip },
812     partopsep .initial:n = {#4},
813     partopsep .value_required:n = true,
814     parsep .skip_set:c = { l__enumext_parsep_#2_skip },
815     parsep .initial:n = {#5},
816     parsep .value_required:n = true,

```

```

817     itemsep .skip_set:c = { l__enumext_itemsep_#2_skip },
818     itemsep .initial:n = {#6},
819     itemsep .value_required:n = true,
820     noitemsep .meta:n = { itemsep = 0pt, parsep = 0pt },
821     noitemsep .value_forbidden:n = true,
822     nosepe .meta:n = {
823         itemsep = 0pt, parsep= 0pt,
824         topsep = 0pt, partopsep = 0pt,
825     },
826     nosepe .value_forbidden:n = true,
827 }
828 }

```

Now we set the values based on standard `article` class in 10pt.

```

829 \__enumext_tmp:nnnnnn { level-1 } { i } { 8.0pt plus 2.0pt minus 4.0pt }
830 { 2.0pt plus 1.0pt minus 1.0pt } { 4.0pt plus 2.0pt minus 1.0pt }
831 { 4.0pt plus 2.0pt minus 1.0pt }
832 \__enumext_tmp:nnnnnn { level-2 } { ii } { 4.0pt plus 2.0pt minus 1.0pt }
833 { 2.0pt plus 1.0pt minus 1.0pt } { 2.0pt plus 1.0pt minus 1.0pt }
834 { 2.0pt plus 1.0pt minus 1.0pt }
835 \__enumext_tmp:nnnnnn { level-3 } { iii } { 2.0pt plus 1.0pt minus 1.0pt }
836 { 1.0pt minus 1.0pt } { 0pt } { 2.0pt plus 1.0pt minus 1.0pt }
837 \__enumext_tmp:nnnnnn { level-4 } { iv } { 2.0pt plus 1.0pt minus 1.0pt }
838 { 1.0pt minus 1.0pt } { 0pt } { 2.0pt plus 1.0pt minus 1.0pt }
839 \__enumext_tmp:nnnnnn { keyans } { v } { 4.0pt plus 2.0pt minus 1.0pt }
840 { 2.0pt plus 1.0pt minus 1.0pt } { 2.0pt plus 1.0pt minus 1.0pt }
841 { 2.0pt plus 1.0pt minus 1.0pt }
842 \__enumext_tmp:nnnnnn { enumext* } { vii } { 8.0pt plus 2.0pt minus 4.0pt }
843 { 2.0pt plus 1.0pt minus 1.0pt } { 4.0pt plus 2.0pt minus 1.0pt }
844 { 4.0pt plus 2.0pt minus 1.0pt }
845 \__enumext_tmp:nnnnnn { keyans* } { viii } { 4.0pt plus 2.0pt minus 1.0pt }
846 { 2.0pt plus 1.0pt minus 1.0pt } { 2.0pt plus 1.0pt minus 1.0pt }
847 { 2.0pt plus 1.0pt minus 1.0pt }

```

(End of definition for topsep and others.)

## 12.16 Setting base-fix key

When nesting starting right after `\item` (without material between them) there is a problem with the alignment of the baseline between the two environments. One way to get around this problem is to place `\mode_leave_vertical:` and then apply `\vspace{-\baselineskip}` and set `topsep=0pt` for the “first level” of the nested `enumext` or `enumext*` environments.

We define the key `base-fix` only for the “first level” of `enumext` and `enumext*`.

```

base-fix \__enumext_nested_base_line_fix:
848 \cs_set_protected:Npn \__enumext_tmp:n #1
849 {
850     \keys_define:nn { enumext / #1 }
851     {
852         base-fix .bool_set:N = \l__enumext_base_line_fix_bool,
853         base-fix .initial:n = false,
854         base-fix .value_forbidden:n = true,
855     }
856 }
857 \clist_map_inline:nn { level-1, enumext* } { \__enumext_tmp:n {#1} }

```

The function `\__enumext_nested_base_line_fix:` will be in charge of applying the baseline correction and adjusting the *(keys)*. This function is passed to the function `\__enumext_parse_keys:n` in the `enumext` environment definition (§12.38) and to the function `\__enumext_parse_keys_vii:n` in the `enumext*` environment definition (§12.43)

🔗 This key is enabled by default in the command `\printkeyans` (§12.46).

```

858 \cs_new_protected:Nn \__enumext_nested_base_line_fix:
859 {
860     \bool_lazy_and:nnT
861     { \bool_if_p:N \l__enumext_standar_first_bool }
862     { \bool_if_p:N \l__enumext_base_line_fix_bool }
863     {
864         \mode_leave_vertical:
865         \vspace { -\baselineskip }
866         \keys_set:nn { enumext / level-1 }
867         {
868             topsep = 0pt, above = 0pt, above* = 0pt,
869         }
870     }
871 }

```

```

870     }
871     \bool_lazy_and:nnT
872     { \bool_if_p:N \__enumext_starred_first_bool }
873     { \bool_if_p:N \__enumext_base_line_fix_bool }
874     {
875         \mode_leave_vertical:
876         \vspace { -\baselineskip }
877         \keys_set:nn { enumext / enumext* }
878         {
879             topsep = 0pt, above = 0pt, above* = 0pt,
880         }
881     }
882     \bool_set_false:N \__enumext_base_line_fix_bool
883 }

```

(End of definition for `base-fix` and `\__enumext_nested_base_line_fix:.`)

## 12.17 Setting keys for horizontal spaces

Define and set `itemindent`, `rightmargin`, `listparindent`, `list-offset` and `list-indent` keys for `enumext`, `enumext*`, `keyans` and `keyans*` environments.

```

884 \cs_set_protected:Npn \__enumext_tmp:nn #1 #2
885 {
886     \keys_define:nn { enumext / #1 }
887     {
888         itemindent .dim_set:c = { l__enumext_fake_item_indent_#2_dim },
889         itemindent .value_required:n = true,
890         rightmargin .dim_set:c = { l__enumext_rightmargin_#2_dim },
891         rightmargin .value_required:n = true,
892         listparindent .dim_set:c = { l__enumext_listparindent_#2_dim },
893         listparindent .value_required:n = true,
894         list-offset .dim_set:c = { l__enumext_listoffset_#2_dim },
895         list-offset .value_required:n = true,
896         list-indent .code:n =
897             \bool_set_true:c { l__enumext_leftmargin_tmp_#2_bool }
898             \dim_set:cn { l__enumext_leftmargin_tmp_#2_dim } {##1},
899         list-indent .value_required:n = true,
900     }
901 }
902 \clist_map_inline:nn
903 {
904     {level-1}{i}, {level-2}{ii}, {level-3}{iii}, {level-4}{iv}, {keyans}{v}
905 }
906 { \__enumext_tmp:nn #1 }

```

(End of definition for `itemindent` and others.)

For `enumext*` and `keyans*` environments the situation is a bit different, the `list-indent` key behaves like the `list-offset` key.

```

907 \cs_set_protected:Npn \__enumext_tmp:nn #1 #2
908 {
909     \keys_define:nn { enumext / #1 }
910     {
911         itemindent .dim_set:c = { l__enumext_fake_item_indent_#2_dim },
912         itemindent .value_required:n = true,
913         rightmargin .dim_set:c = { l__enumext_rightmargin_#2_dim },
914         rightmargin .value_required:n = true,
915         listparindent .dim_set:c = { l__enumext_listparindent_#2_dim },
916         listparindent .value_required:n = true,
917         list-offset .dim_set:c = { l__enumext_listoffset_#2_dim },
918         list-offset .value_required:n = true,
919         list-indent .meta:n = { list-offset = ##1 },
920         list-indent .value_required:n = true,
921     }
922 }
923 \clist_map_inline:nn
924 {
925     {enumext*}{vii}, {keyans*}{viii}
926 }
927 { \__enumext_tmp:nn #1 }

```



### 12.17.1 Functions for setting the fake itemindent

The `itemindent` key does not set the value of `\itemindent`, it only sets the value of the *horizontal space* applied using `\skip_horizontal:N`. We will store this value in the variable and only apply it when it is greater than `\opt`. Here I will need to place `\mode_leave_vertical:` and the plain TeX macro `\ignorespaces` to avoid unwanted extra space when using the `itemindent` key.

```

928 \cs_set_protected:Nn \__enumext_fake_item:
929 {
930   \dim_compare:nNnT
931     { \dim_use:c { \__enumext_fake_item_indent_ \__enumext_level: _dim } }
932     >
933     { \c_zero_dim }
934   {
935     \tl_set:ce { \__enumext_fake_item_indent_ \__enumext_level: _tl }
936     {
937       \exp_not:N \mode_leave_vertical:
938       \exp_not:n { \skip_horizontal:n }
939       { \dim_use:c { \__enumext_fake_item_indent_ \__enumext_level: _dim } }
940       \ignorespaces
941     }
942   }
943 }
944 \cs_set_protected:Nn \__enumext_keyans_fake_item:
945 {
946   \dim_compare:nNnT
947     { \l__enumext_fake_item_indent_v_dim } > { \c_zero_dim }
948   {
949     \tl_set:Ne \l__enumext_fake_item_indent_v_tl
950     {
951       \exp_not:N \mode_leave_vertical:
952       \exp_not:N \skip_horizontal:N \l__enumext_fake_item_indent_v_dim
953       \ignorespaces
954     }
955   }
956 }
957 \cs_set_protected:Nn \__enumext_fake_item_vii:
958 {
959   \dim_compare:nNnT
960     { \l__enumext_fake_item_indent_vii_dim } > { \c_zero_dim }
961   {
962     \tl_set:Ne \l__enumext_fake_item_indent_vii_tl
963     {
964       \exp_not:N \mode_leave_vertical:
965       \exp_not:N \skip_horizontal:N \l__enumext_fake_item_indent_vii_dim
966       \ignorespaces
967     }
968   }
969 }
970 \cs_set_protected:Nn \__enumext_fake_item_viii:
971 {
972   \dim_compare:nNnT
973     { \l__enumext_fake_item_indent_viii_dim } > { \c_zero_dim }
974   {
975     \tl_set:Ne \l__enumext_fake_item_indent_viii_tl
976     {
977       \exp_not:N \mode_leave_vertical:
978       \exp_not:N \skip_horizontal:N \l__enumext_fake_item_indent_viii_dim
979       \ignorespaces
980     }
981   }
982 }

```

(End of definition for `\__enumext_fake_item:` and others.)

### 12.18 Setting show-length key

show-length

Define and set `show-length` key for `enumext`, `enumext*`, `keyans` and `keyans*` environments. The function sets the boolean variable `\l__enumext_show_length_X_bool` used in the definition of all environments to “true” and calls the function `\__enumext_show_length:nnn` which prints all the values of the “vertical” and “horizontal” parameters calculated and used.

```

983 \cs_set_protected:Npn \__enumext_tmp:nn #1 #2
984 {

```

```

985     \keys_define:nn { enumext / #1 }
986     {
987         show-length .bool_set:c = { l__enumext_show_length_#2_bool },
988         show-length .initial:n = false,
989     }
990 }
991 \clist_map_inline:Nn \c__enumext_all_envs_clist { \__enumext_tmp:nn #1 }

```

(End of definition for show-length.)

## 12.19 Setting before, after and first keys

Define and set `before`, `before*`, `after` and `first` keys for `enumext`, `enumext*`, `keyans` and `keyans*` environments.

```

992 \cs_set_protected:Npn \__enumext_tmp:nn #1 #2
993 {
994     \keys_define:nn { enumext / #1 }
995     {
996         before .tl_set:c = { l__enumext_before_no_starred_key_#2_tl },
997         before .value_required:n = true,
998         before* .tl_set:c = { l__enumext_before_starred_key_#2_tl },
999         before* .value_required:n = true,
1000         after .tl_set:c = { l__enumext_after_stop_list_#2_tl },
1001         after .value_required:n = true,
1002         first .tl_set:c = { l__enumext_after_list_args_#2_tl },
1003         first .value_required:n = true,
1004     }
1005 }
1006 \clist_map_inline:Nn \c__enumext_all_envs_clist { \__enumext_tmp:nn #1 }

```

(End of definition for before and others.)

### 12.19.1 Functions for before, after and first keys in enumext

The function `\__enumext_before_args_exec:` executes the `{⟨code⟩}` set by the `before*` key “before” the `enumext` environment is started. The `{⟨code⟩}` is executed “without” knowing any definition of the `{⟨arg two⟩}` of the list: `{⟨code⟩}\list{⟨arg one⟩}{⟨arg two⟩}`.

```

1007 \cs_new_protected:Nn \__enumext_before_args_exec:
1008 {
1009     \tl_use:c { l__enumext_before_starred_key_ \__enumext_level: _tl }
1010 }

```

The function `\__enumext_before_keys_exec:` executes the `{⟨code⟩}` set by the `before` key “before” the `enumext` environment is started in *second argument* of the list. The `{⟨code⟩}` is executed “knowing” all definition and values provides by `⟨keys⟩: \list{⟨arg one⟩}{⟨arg two⟩}{⟨code⟩}`

```

1011 \cs_new_protected:Nn \__enumext_before_keys_exec:
1012 {
1013     \tl_use:c { l__enumext_before_no_starred_key_ \__enumext_level: _tl }
1014 }

```

The function `\__enumext_after_stop_list:` executes the `{⟨code⟩}` set by the `after` key “after” the `enumext` environment has finished: `\endlist{⟨code⟩}`.

```

1015 \cs_new_protected:Nn \__enumext_after_stop_list:
1016 {
1017     \tl_use:c { l__enumext_after_stop_list_ \__enumext_level: _tl }
1018 }

```

The function `\__enumext_after_args_exec:` executes the `{⟨code⟩}` set by the `first` key after the end of the second argument of the list defining the `enumext` environment, just before the first occurrence of `\item: \list{⟨arg one⟩}{⟨arg two⟩}{⟨code⟩}\item.`

```

1019 \cs_new_protected:Nn \__enumext_after_args_exec:
1020 {
1021     \tl_use:c { l__enumext_after_list_args_ \__enumext_level: _tl }
1022 }

```

(End of definition for \\_\_enumext\_before\_args\_exec: and others.)

### 12.19.2 Functions for before, after and first keys in keyans

```

__enumext_before_args_exec_v:
__enumext_before_keys_exec_v:
__enumext_after_stop_list_v:
__enumext_after_args_exec_v:

```

Same implementation as the one used in the [enumext](#) environment.

```

1023 \cs_new_protected:Nn __enumext_before_args_exec_v:
1024 {
1025     \tl_use:N \l__enumext_before_starred_key_v_tl
1026 }
1027 \cs_new_protected:Nn __enumext_before_keys_exec_v:
1028 {
1029     \tl_use:N \l__enumext_before_no_starred_key_v_tl
1030 }
1031 \cs_new_protected:Nn __enumext_after_stop_list_v:
1032 {
1033     \tl_use:N \l__enumext_after_stop_list_v_tl
1034 }
1035 \cs_new_protected:Nn __enumext_after_args_exec_v:
1036 {
1037     \tl_use:N \l__enumext_after_list_args_v_tl
1038 }

```

(End of definition for `__enumext_before_args_exec_v:` and others.)

### 12.19.3 Functions for before, after and first keys in enumext\* and keyans\*

```

__enumext_before_args_exec_vii:
__enumext_before_keys_exec_vii
__enumext_after_stop_list_vii:
__enumext_after_args_exec_vii:

```

Same implementation as the one used in the [enumext](#) environment.

```

1039 \cs_new_protected:Nn __enumext_before_args_exec_vii:
1040 {
1041     \tl_use:N \l__enumext_before_starred_key_vii_tl
1042 }
1043 \cs_new_protected:Nn __enumext_before_args_exec_viii:
1044 {
1045     \tl_use:N \l__enumext_before_starred_key_viii_tl
1046 }
1047 \cs_new_protected:Nn __enumext_before_keys_exec_vii:
1048 {
1049     \tl_use:N \l__enumext_before_no_starred_key_vii_tl
1050 }
1051 \cs_new_protected:Nn __enumext_before_keys_exec_viii:
1052 {
1053     \tl_use:N \l__enumext_before_no_starred_key_viii_tl
1054 }
1055 \cs_new_protected:Nn __enumext_after_stop_list_vii:
1056 {
1057     \tl_use:N \l__enumext_after_stop_list_vii_tl
1058 }
1059 \cs_new_protected:Nn __enumext_after_stop_list_viii:
1060 {
1061     \tl_use:N \l__enumext_after_stop_list_viii_tl
1062 }
1063 \cs_new_protected:Nn __enumext_after_args_exec_vii:
1064 {
1065     \tl_use:N \l__enumext_after_list_args_vii_tl
1066 }
1067 \cs_new_protected:Nn __enumext_after_args_exec_viii:
1068 {
1069     \tl_use:N \l__enumext_after_list_args_viii_tl
1070 }

```

(End of definition for `__enumext_before_args_exec_vii:` and others.)

## 12.20 Setting keys for multicols and minipage

```

mini-env
mini-sep
columns-sep
columns

```

The default value of the `columns-sep` key is handled by the state of the boolean variable `\l__enumext_columns_sep_X_bool` which is handled in the internal definition of the [enumext](#) and [keyans](#) environments. Define and set `mini-env`, `mini-sep`, `columns-sep` and `columns` keys for [enumext](#), [enumext\\*](#), [keyans](#) and [keyans\\*](#) environments.

```

1071 \cs_set_protected:Npn __enumext_tmp:nn #1 #2
1072 {
1073     \keys_define:nn { enumext / #1 }
1074     {
1075         mini-env    .dim_set:c = { l__enumext_minipage_right_#2_dim },
1076         mini-env    .value_required:n = true,
1077         mini-sep    .dim_set:c = { l__enumext_minipage_hsep_#2_dim },

```

```

1078     mini-sep .initial:n = 0.3333em,
1079     mini-sep .value_required:n = true,
1080     columns-sep .dim_set:c = { l__enumext_columns_sep_#2_dim },
1081     columns-sep .value_required:n = true,
1082     columns .int_set:c = { l__enumext_columns_#2_int },
1083     columns .initial:n = 1,
1084     columns .value_required:n = true,
1085   }
1086 }
1087 \clist_map_inline:Nn \c__enumext_all_envs_clist { \__enumext_tmp:nn #1 }

```

For `enumext*` and `keyans*` environments the situation is a bit different, the command `\miniright` is not available, so we will add the keys `mini-right` and `mini-right*` to implement support for `minipage` environment.

```

1088 \cs_set_protected:Npn \__enumext_tmp:nn #1 #2
1089 {
1090   \keys_define:nn { enumext / #1 }
1091   {
1092     mini-right .tl_gset:c = { g__enumext_miniright_code_#2_tl },
1093     mini-right .value_required:n = true,
1094     mini-right* .code:n = {
1095       \bool_gset_true:c { g__enumext_minipage_center_#2_bool }
1096       \keys_set:nn { enumext / #1 } { mini-right = {##1} }
1097     },
1098     mini-right* .value_required:n = true,
1099   }
1100 }
1101 \clist_map_inline:nn { {enumext*}{vii}, {keyans*}{viii} } { \__enumext_tmp:nn #1 }

```

(End of definition for `mini-env` and others.)

## 12.21 Adjustment of vertical spaces for multicols

When nesting a “list environment” inside the `multicols` environment, the values of the “vertical spaces” are lost, basically the `multicols` environment takes control over them. Graphically it can be seen like in the figure 7.

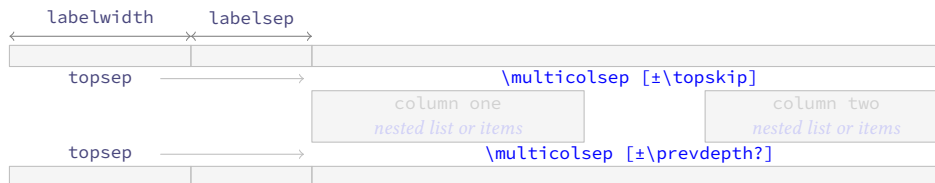


Figure 7: Representation of the vertical space in `multicols` for a nested level.

To keep the desired spaces *above* and *below* in the “list environment” (`\topsep` + `[\partopsep]`) it is necessary to “adjust” the spaces added by the `multicols` environment. The most appropriate option in this case is to use a “context sensitive” vertical space with `\addvspace`.

❗ I should make it clear that the implementation here is a “bit questionable”. At first glance doing `\multicolsep=\topsep` seemed right, but the results were not always as expected. An almost *imperceptible* detail is that in some cases the `\itemsep` values of are “stretched”, possibly due to the use of `\raggedcolumns` and this affects the lower space when closing the environment, which is “smaller” than expected. My attempts to find the correct values using `\showoutput` and `\showboxdepth` absolutely failed.

### 12.21.1 Adjustment of vertical spaces for multicols in enumext

`\__enumext_multi_set_vskip:` The function `\__enumext_multi_set_vskip:` will take care of determining the “adjusted spaces” that we will apply “above” and “below” the `multicols` environment in `enumext`.

We will set the default values taking into account that  $\TeX$  is in *horizontal mode*, then we will make the settings for the *vertical mode* in which `\partopsep` comes into play.

Set the values of `\l__enumext_multicols_above_X_skip` and `\l__enumext_multicols_below_X_skip` equal to the value of `\topsep` in the *current level*.

```

1102 \cs_new_protected:Nn \__enumext_multi_set_vskip:
1103 {
1104   \skip_set:cn { l__enumext_multicols_above_ \__enumext_level: _skip }
1105   {
1106     \skip_use:c { l__enumext_topsep_ \__enumext_level: _skip }
1107   }
1108   \skip_set:cn { l__enumext_multicols_below_ \__enumext_level: _skip }
1109   {
1110     \skip_use:c { l__enumext_topsep_ \__enumext_level: _skip }
1111   }

```

```

1112   \__enumext_add_pre_parsep:
1113   }

```

(End of definition for \\_\_enumext\_multi\_set\_vskip:.)

\\_\_enumext\_add\_pre\_parsep: The function \\_\_enumext\_add\_pre\_parsep: “adjusted” the value of \l\_\_enumext\_multicols\_above\_X\_skip detecting the value of \parsep from the previous level. This is necessary since \parsep from the previous level affects the *vertical spaces*.

```

1114 \cs_new_protected:Nn \__enumext_add_pre_parsep:
1115 {
1116   \int_case:nn { \l__enumext_level_int }
1117   {
1118     { 2 }{
1119       \skip_if_eq:nnF { \l__enumext_parsep_i_skip } { \c_zero_skip }
1120       {
1121         \skip_add:Nn \l__enumext_multicols_above_ii_skip
1122         {
1123           \l__enumext_parsep_i_skip
1124         }
1125       }
1126     }
1127     { 3 }{
1128       \skip_if_eq:nnF { \l__enumext_parsep_ii_skip } { \c_zero_skip }
1129       {
1130         \skip_add:Nn \l__enumext_multicols_above_iii_skip
1131         {
1132           \l__enumext_parsep_ii_skip
1133         }
1134       }
1135     }
1136     { 4 }{
1137       \skip_if_eq:nnF { \l__enumext_parsep_iii_skip } { \c_zero_skip }
1138       {
1139         \skip_add:Nn \l__enumext_multicols_above_iv_skip
1140         {
1141           \l__enumext_parsep_iii_skip
1142         }
1143       }
1144     }
1145   }
1146 }

```

(End of definition for \\_\_enumext\_add\_pre\_parsep:.)

\\_\_enumext\_multi\_addvspace: The function \\_\_enumext\_multi\_addvspace: will apply the spaces set using \addvspace “above” the multicols environment in enumext, taking into account whether TeX is in *horizontal mode* or *vertical mode*.

```

1147 \cs_new_protected:Nn \__enumext_multi_addvspace:
1148 {
1149   \__enumext_multi_set_vskip:
1150   \mode_if_vertical:T
1151   {
1152     \skip_add:cn { \l__enumext_multicols_above_ \l__enumext_level: _skip }
1153     {
1154       \skip_use:c { \l__enumext_partopsep_ \l__enumext_level: _skip }
1155     }
1156     \skip_add:cn { \l__enumext_multicols_below_ \l__enumext_level: _skip }
1157     {
1158       \skip_use:c { \l__enumext_partopsep_ \l__enumext_level: _skip }
1159     }
1160   }
1161   \__enumext_unskip_unkern: % revisar
1162   \par\nopagebreak
1163   \addvspace{ \skip_use:c { \l__enumext_multicols_above_ \l__enumext_level: _skip } }
1164 }

```

(End of definition for \\_\_enumext\_multi\_addvspace:.)

### 12.21.2 Adjustment of vertical spaces for multicol in keyans

`\__enumext_keyans_multi_set_vskip:`  
`\__enumext_keyans_multi_addvspace:`

The function `\__enumext_keyans_multi_set_vskip:` will take care of determining the “adjusted spaces” that we will apply “above” and “below” the `multicol` environment in `keyans`. The implementation of this function is the same as the one used in `enumext`.

```

1165 \cs_new_protected:Nn \__enumext_keyans_multi_set_vskip:
1166 {
1167   \skip_set:Nn \l__enumext_multicol_above_v_skip
1168   {
1169     \l__enumext_topsep_v_skip
1170   }
1171   \skip_set:Nn \l__enumext_multicol_below_v_skip
1172   {
1173     \l__enumext_topsep_v_skip
1174   }
1175 }
1176 \cs_new_protected:Nn \__enumext_keyans_multi_addvspace:
1177 {
1178   \__enumext_keyans_multi_set_vskip:
1179   \mode_if_vertical:T
1180   {
1181     \skip_add:Nn \l__enumext_multicol_above_v_skip
1182     {
1183       \skip_use:N \l__enumext_partopsep_v_skip
1184     }
1185     \skip_add:Nn \l__enumext_multicol_below_v_skip
1186     {
1187       \skip_use:N \l__enumext_partopsep_v_skip
1188     }
1189   }
1190   \__enumext_unskip_unkern:
1191   \par\nopagebreak
1192   \addvspace{ \l__enumext_multicol_above_v_skip }
1193 }

```

(End of definition for `\__enumext_keyans_multi_set_vskip:` and `\__enumext_keyans_multi_addvspace:`.)

### 12.22 Adjustment of vertical spaces for minipage

When nesting a “list environment” within the `minipage` environment, the values of the “vertical spaces” are lost. Graphically it can be seen like in the figure 8.



Figure 8: Representation of the `minipage` spacing adjustment for a nested level.

Since we want to keep the “left” and “right” environments “aligned on top”, preserving the `\baselineskip` and keep the desired “spaces” (`\topsep` + `[\partopsep]`) it is necessary to “adjust” the “vertical spaces” for `minipage` environments.

Here there are several complications that we must circumvent, the `minipage` environment eliminates the “top” spaces, the `multicol` environment can be nested in the `minipage` environment, the “top” and “bottom” spaces are affected when `topsep=0pt` and to this is added the `\partopsep` parameter that comes into action according to whether  $\text{\TeX}$  is in  $\langle\text{horizontal mode}\rangle$  or  $\langle\text{vertical mode}\rangle$ . Depending on these cases, small adjustments must be made using `\vspace` and `\addvspace` to obtain the “desired vertical spacing”.

- Again I must make clear that the implementation here is a “bit questionable”, but hunting the spaces (`glue`) produced by the `minipage` environment is quite complicated, even more if `multicol` is nested. The setting of the values was more “trial and error” (aprox to `\strutbox`), using the help of the `lua-visual-debug`[14] package, again my attempts to find the correct values using `\showoutput` and `\showboxdepth` absolutely failed.

#### 12.22.1 Adjustment of vertical spaces for minipage in enumext

`\__enumext_minipage_set_skip:`  
`\__enumext_minipage_add_space:`

The function `\__enumext_minipage_set_skip:` will take care of determining the “adjust” spaces that we will apply “above” and “below” the `__enumext_mini_page` environment in `enumext`.

First we will set the value of `\l__enumext_minipage_right_skip` equal to `\topsep`, then we will see if  $\text{\TeX}$  is in  $\langle\text{vertical mode}\rangle$  and we will add `\partopsep`, followed by that we set the value of `\l__enumext_minipage_after_skip`.

```

1194 \cs_new_protected:Nn \__enumext_minipage_set_skip:
1195 {

```



```

1196 \skip_set:Nn \l__enumext_minipage_right_skip
1197 {
1198   \skip_use:c { l__enumext_topsep_ \__enumext_level: _skip }
1199 }
1200 \mode_if_vertical:T
1201 {
1202   \skip_add:Nn \l__enumext_minipage_right_skip
1203   {
1204     \skip_use:c { l__enumext_partopsep_ \__enumext_level: _skip }
1205   }
1206 }
1207 \skip_set_eq:NN \l__enumext_minipage_after_skip \l__enumext_minipage_right_skip

```

We will adjust the values `\l__enumext_multicols_above_X_skip` and `\l__enumext_multicols_below_X_skip` and call the function `\__enumext_pre_itemsep_skip:`.

```

1208 \skip_set_eq:cN
1209 { l__enumext_multicols_above_ \__enumext_level: _skip } \l__enumext_minipage_right_skip
1210 \skip_set_eq:cN
1211 { l__enumext_multicols_below_ \__enumext_level: _skip } \l__enumext_minipage_right_skip
1212 \__enumext_pre_itemsep_skip:

```

If the environment `multicols` is active, we set `\topskip=0pt` and then we make `\multicolsep` have the same value as `\l__enumext_multicols_above_X_skip`.

```

1213 \int_compare:nNnT
1214 { \int_use:c { l__enumext_columns_ \__enumext_level: _int } } > { 1 }
1215 {
1216   \skip_zero:N \topskip
1217   \skip_set_eq:Nc \multicolsep { l__enumext_multicols_above_ \__enumext_level: _skip }
1218 }
1219 }

```

The function `\__enumext_minipage_add_space:` will apply the spaces on the “left side” using `\addvspace` “above” the `\__enumext_minipage` environment, taking into account whether T<sub>E</sub>X is in *horizontal mode* or *vertical mode*. Here we use the plain T<sub>E</sub>X macro `\nointerlineskip` to prevent baseline “glue” being added between the next pair of boxes in a *vertical list*. For the latter we will make some adjustments since the `\partopsep` parameter comes into play and this affects the *vertical spacing*.

```

1220 \cs_new_protected:Nn \__enumext_minipage_add_space:
1221 {
1222   \__enumext_minipage_set_skip:
1223   \__enumext_unskip_unkern:
1224   \mode_if_vertical:TF
1225   {
1226     \nopagebreak\nointerlineskip
1227   }
1228   {
1229     \par\nopagebreak\nointerlineskip
1230     \skip_zero:c { l__enumext_partopsep_ \__enumext_level: _skip }
1231   }
1232   \int_compare:nNnTF
1233   { \int_use:c { l__enumext_columns_ \__enumext_level: _int } } > { 1 }
1234   {
1235     \addvspace{ 0.445\box_ht:N \strutbox }
1236   }
1237   {
1238     \addvspace{ 0.250\box_ht:N \strutbox }
1239   }
1240 }

```

(End of definition for `\__enumext_minipage_set_skip:` and `\__enumext_minipage_add_space:`)

`\__enumext_pre_itemsep_skip:`

The function `\__enumext_pre_itemsep_skip:` will adjust the spaces below the environment `minipage` and the environment `multicols` if it is nested in it, taking into account the value of `\itemsep` from the previous level.

```

1241 \cs_new_protected:Nn \__enumext_pre_itemsep_skip:
1242 {
1243   \int_case:nn { \l__enumext_level_int }
1244   {
1245     { 2 }{
1246       \skip_if_eq:nnTF
1247       { \l__enumext_itemsep_i_skip } { \l__enumext_minipage_after_skip }
1248       {
1249         \skip_set:Nn \l__enumext_minipage_after_skip { 0.150\box_ht:N \strutbox }
1250       }
1251     }
1252   }

```

```

1250         \skip_set:Nn \l__enumext_multicols_below_ii_skip { 0.350\box_ht:N \strutbox }
1251     }
1252     {
1253         \dim_compare:nNnT
1254         { \l__enumext_itemsep_i_skip } < { \l__enumext_minipage_after_skip }
1255         {
1256             \skip_sub:Nn
1257             \l__enumext_minipage_after_skip { \l__enumext_itemsep_i_skip }
1258             \skip_sub:Nn
1259             \l__enumext_multicols_below_ii_skip { \l__enumext_itemsep_i_skip }
1260             \skip_add:Nn
1261             \l__enumext_minipage_after_skip { 0.150\box_ht:N \strutbox }
1262             \skip_add:Nn
1263             \l__enumext_multicols_below_ii_skip { 0.350\box_ht:N \strutbox }
1264         }
1265         \dim_compare:nNnT
1266         { \l__enumext_itemsep_i_skip } > { \l__enumext_minipage_after_skip }
1267         {
1268             \skip_set:Nn \l__enumext_minipage_temp_skip
1269             {
1270                 \l__enumext_itemsep_i_skip - \l__enumext_minipage_after_skip
1271             }
1272             \skip_sub:Nn
1273             \l__enumext_minipage_after_skip { \l__enumext_itemsep_i_skip }
1274             \skip_sub:Nn
1275             \l__enumext_multicols_below_ii_skip { \l__enumext_itemsep_i_skip }
1276             \skip_add:Nn
1277             \l__enumext_minipage_after_skip
1278             { 0.150\box_ht:N \strutbox + \l__enumext_minipage_temp_skip }
1279             \skip_add:Nn
1280             \l__enumext_multicols_below_ii_skip
1281             { 0.350\box_ht:N \strutbox + \l__enumext_minipage_temp_skip }
1282         }
1283     }
1284 }
1285 { 3 }{
1286     \skip_if_eq:nNnTF
1287     { \l__enumext_itemsep_ii_skip } { \c_zero_skip }
1288     {
1289         \skip_set:Nn \l__enumext_minipage_after_skip { 0.150\box_ht:N \strutbox }
1290         \skip_set:Nn \l__enumext_multicols_below_iii_skip { 0.350\box_ht:N \strutbox }
1291     }
1292     {
1293         \dim_compare:nNnT
1294         { \l__enumext_itemsep_ii_skip } < { \l__enumext_minipage_after_skip }
1295         {
1296             \skip_sub:Nn
1297             \l__enumext_minipage_after_skip { \l__enumext_itemsep_ii_skip }
1298             \skip_sub:Nn
1299             \l__enumext_multicols_below_iii_skip { \l__enumext_itemsep_ii_skip }
1300             \skip_add:Nn
1301             \l__enumext_minipage_after_skip { 0.150\box_ht:N \strutbox }
1302             \skip_add:Nn
1303             \l__enumext_multicols_below_iii_skip { 0.350\box_ht:N \strutbox }
1304         }
1305         \dim_compare:nNnT
1306         { \l__enumext_itemsep_ii_skip } > { \l__enumext_minipage_after_skip }
1307         {
1308             \skip_set:Nn \l__enumext_minipage_temp_skip
1309             {
1310                 \l__enumext_itemsep_ii_skip - \l__enumext_minipage_after_skip
1311             }
1312             \skip_sub:Nn
1313             \l__enumext_minipage_after_skip { \l__enumext_itemsep_ii_skip }
1314             \skip_sub:Nn
1315             \l__enumext_multicols_below_iii_skip { \l__enumext_itemsep_ii_skip }
1316             \skip_add:Nn
1317             \l__enumext_minipage_after_skip
1318             { 0.150\box_ht:N \strutbox + \l__enumext_minipage_temp_skip }
1319             \skip_add:Nn
1320             \l__enumext_multicols_below_iii_skip

```

```

1321         { 0.350\box_ht:N \strutbox + \l__enumext_minipage_temp_skip }
1322     }
1323 }
1324 }
1325 { 4 }{
1326     \skip_if_eq:nnTF { \l__enumext_itemsep_iii_skip } { \c_zero_skip }
1327     {
1328         \skip_set:Nn \l__enumext_minipage_after_skip { 0.150\box_ht:N \strutbox }
1329         \skip_set:Nn \l__enumext_multicols_below_iv_skip { 0.350\box_ht:N \strutbox }
1330     }
1331     {
1332         \dim_compare:nNnT
1333         { \l__enumext_itemsep_iii_skip } < { \l__enumext_minipage_after_skip }
1334         {
1335             \skip_sub:Nn
1336             \l__enumext_minipage_after_skip { \l__enumext_itemsep_iii_skip }
1337             \skip_sub:Nn
1338             \l__enumext_multicols_below_iv_skip { \l__enumext_itemsep_iii_skip }
1339             \skip_add:Nn
1340             \l__enumext_minipage_after_skip { 0.150\box_ht:N \strutbox }
1341             \skip_add:Nn
1342             \l__enumext_multicols_below_iv_skip { 0.350\box_ht:N \strutbox }
1343         }
1344         \dim_compare:nNnT
1345         { \l__enumext_itemsep_iii_skip } > { \l__enumext_minipage_after_skip }
1346         {
1347             \skip_set:Nn \l__enumext_minipage_temp_skip
1348             {
1349                 \l__enumext_itemsep_iii_skip - \l__enumext_minipage_after_skip
1350             }
1351             \skip_sub:Nn
1352             \l__enumext_minipage_after_skip { \l__enumext_itemsep_iii_skip }
1353             \skip_sub:Nn
1354             \l__enumext_multicols_below_iv_skip { \l__enumext_itemsep_iii_skip }
1355             \skip_add:Nn
1356             \l__enumext_minipage_after_skip
1357             { 0.150\box_ht:N \strutbox + \l__enumext_minipage_temp_skip }
1358             \skip_add:Nn
1359             \l__enumext_multicols_below_iv_skip
1360             { 0.350\box_ht:N \strutbox + \l__enumext_minipage_temp_skip }
1361         }
1362     }
1363 }
1364 }
1365 }

```

(End of definition for `\__enumext_pre_itemsep_skip:`)

### 12.22.2 Adjustment of vertical spaces for minipage in keyans

```

\__enumext_keyans_minipage_set_skip:
\__enumext_keyans_minipage_add_space:
\__enumext_keyans_pre_itemsep_skip:

```

The function `\__enumext_keyans_mini_set_vskip:` will take care of determining the “adjusted” spaces that we will apply “*above*” and “*below*” the `\__enumext_mini_page` environment in *keyans*. The implementation of this function is the same as the one used in *enumext*.

```

1366 \cs_new_protected:Nn \__enumext_keyans_minipage_set_skip:
1367 {
1368     \skip_zero:N \l__enumext_minipage_after_skip
1369     \skip_zero:N \l__enumext_minipage_left_skip
1370     \skip_zero:N \l__enumext_minipage_right_skip
1371     \skip_set:Nn \l__enumext_minipage_right_skip
1372     {
1373         \l__enumext_topsep_v_skip
1374     }
1375     \mode_if_vertical:T
1376     {
1377         \skip_add:Nn \l__enumext_minipage_right_skip
1378         {
1379             \l__enumext_partopsep_v_skip
1380         }
1381     }
1382     \skip_set_eq:NN \l__enumext_minipage_after_skip \l__enumext_minipage_right_skip
1383     \skip_set_eq:NN \l__enumext_multicols_above_v_skip \l__enumext_minipage_right_skip
1384     \skip_set_eq:NN \l__enumext_multicols_below_v_skip \l__enumext_minipage_right_skip

```

```

1385     \__enumext_keyans_pre_itemsep_skip:
1386     \int_compare:nNnT { \l__enumext_columns_v_int } > { 1 }
1387     {
1388         \skip_zero:N \topskip
1389         \skip_set_eq:NN \multicolsep \l__enumext_minipage_right_skip
1390     }
1391 }
1392 \cs_new_protected:Nn \__enumext_keyans_minipage_add_space:
1393 {
1394     \__enumext_keyans_minipage_set_skip:
1395     \__enumext_unskip_unkern:
1396     \mode_if_vertical:TF
1397     {
1398         \nopagebreak\nointerlineskip
1399     }
1400     {
1401         \par\nopagebreak\nointerlineskip
1402         \skip_zero:N \l__enumext_partopsep_v_skip
1403     }
1404     \int_compare:nNnTF { \l__enumext_columns_v_int } > { 1 }
1405     {
1406         \addvspace{ 0.445\box_ht:N \strutbox }
1407     }
1408     {
1409         \addvspace{ 0.250\box_ht:N \strutbox }
1410     }
1411 }
1412 \cs_new_protected:Nn \__enumext_keyans_pre_itemsep_skip:
1413 {
1414     \skip_if_eq:nnTF
1415     { \l__enumext_itemsep_i_skip } { \l__enumext_minipage_after_skip }
1416     {
1417         \skip_set:Nn \l__enumext_minipage_after_skip { 0.150\box_ht:N \strutbox }
1418         \skip_set:Nn \l__enumext_multicols_below_v_skip { 0.350\box_ht:N \strutbox }
1419     }
1420     {
1421         \dim_compare:nNnT
1422         { \l__enumext_itemsep_i_skip } < { \l__enumext_minipage_after_skip }
1423         {
1424             \skip_sub:Nn \l__enumext_minipage_after_skip { \l__enumext_itemsep_i_skip }
1425             \skip_sub:Nn \l__enumext_multicols_below_v_skip { \l__enumext_itemsep_i_skip }
1426             \skip_add:Nn \l__enumext_minipage_after_skip { 0.150\box_ht:N \strutbox }
1427             \skip_add:Nn \l__enumext_multicols_below_v_skip { 0.350\box_ht:N \strutbox }
1428         }
1429         \dim_compare:nNnT
1430         { \l__enumext_itemsep_i_skip } > { \l__enumext_minipage_after_skip }
1431         {
1432             \skip_set:Nn \l__enumext_minipage_temp_skip
1433             {
1434                 \l__enumext_itemsep_i_skip - \l__enumext_minipage_after_skip
1435             }
1436             \skip_sub:Nn \l__enumext_minipage_after_skip { \l__enumext_itemsep_i_skip }
1437             \skip_sub:Nn \l__enumext_multicols_below_v_skip { \l__enumext_itemsep_i_skip }
1438             \skip_add:Nn \l__enumext_minipage_after_skip
1439             { 0.150\box_ht:N \strutbox + \l__enumext_minipage_temp_skip }
1440             \skip_add:Nn \l__enumext_multicols_below_v_skip
1441             { 0.350\box_ht:N \strutbox + \l__enumext_minipage_temp_skip }
1442         }
1443     }
1444 }

```

(End of definition for `\__enumext_keyans_minipage_set_skip:`, `\__enumext_keyans_minipage_add_space:`, and `\__enumext_keyans_pre_itemsep_skip:`.)

### 12.22.3 Adjustment of vertical spaces for minipage in enumext\* and keyans\*

`\__enumext_mini_set_vskip_vii:`  
`\__enumext_mini_set_vskip_viii:`

The functions `\__enumext_mini_set_vskip_vii:` and `\__enumext_mini_set_vskip_viii:` will take care of determining the “adjusted” spaces that we will apply “above” and “below” the `\__enumext_mini_page` environment in `enumext*` and `keyans*`.

```

1445 \cs_new_protected:Nn \__enumext_mini_set_vskip_vii:
1446 {
1447     \skip_zero_new:N \l__enumext_minipage_left_skip

```

```

1448 \skip_gzero_new:N \g__enumext_minipage_right_skip
1449 \skip_gzero_new:N \g__enumext_minipage_after_skip
1450 \skip_if_eq:nnTF { \l__enumext_topsep_vii_skip } { \c_zero_skip }
1451 {
1452   \skip_set:Nn \l__enumext_minipage_left_skip { 0.5\box_dp:N \strutbox }
1453   \skip_gset:Nn \g__enumext_minipage_right_skip { 0.325\box_dp:N \strutbox }
1454 }
1455 {
1456   \skip_set:Nn \l__enumext_minipage_left_skip { 0.5875\box_dp:N \strutbox }
1457   \skip_gset:Nn \g__enumext_minipage_right_skip
1458   {
1459     \l__enumext_topsep_vii_skip
1460   }
1461   \skip_gset:Nn \g__enumext_minipage_after_skip
1462   {
1463     0.325\box_dp:N \strutbox + \l__enumext_topsep_vii_skip
1464   }
1465 }
1466 }
1467 \cs_new_protected:Nn \__enumext_mini_set_vskip_viii:
1468 {
1469   \skip_zero_new:N \l__enumext_minipage_after_skip
1470   \skip_zero_new:N \l__enumext_minipage_left_skip
1471   \skip_zero_new:N \l__enumext_minipage_right_skip
1472   \skip_if_eq:nnTF { \l__enumext_topsep_viii_skip } { \c_zero_skip }
1473   {
1474     \skip_set:Nn \l__enumext_minipage_left_skip
1475     {
1476       0.5\box_dp:N \strutbox
1477     }
1478     \skip_set:Nn \l__enumext_minipage_right_skip
1479     {
1480       \l__enumext_partopsep_viii_skip
1481     }
1482     \skip_set:Nn \l__enumext_minipage_after_skip
1483     {
1484       1.6\box_dp:N \strutbox
1485     }
1486   }
1487   {
1488     \skip_set:Nn \l__enumext_minipage_left_skip
1489     {
1490       0.5875\box_dp:N \strutbox
1491     }
1492     \skip_set:Nn \l__enumext_minipage_right_skip
1493     {
1494       \l__enumext_topsep_viii_skip
1495     }
1496     \skip_set:Nn \l__enumext_minipage_after_skip
1497     {
1498       0.325\box_dp:N \strutbox + \l__enumext_topsep_viii_skip
1499     }
1500   }
1501 }

```

(End of definition for \\_\_enumext\_mini\_set\_vskip\_vii: and \\_\_enumext\_mini\_set\_vskip\_viii:.)

\\_\_enumext\_mini\_addvspace\_vii:  
 \\_\_enumext\_mini\_addvspace\_viii:

The functions \\_\_enumext\_mini\_addvspace\_vii: and \\_\_enumext\_mini\_addvspace\_viii: will apply the vertical space “only above” the \\_\_enumext\_mini\_page environment on the *left side* when the mini-right key is active in the *enumext\** and *keyans\** environments.

Here we will NOT take into account whether TeX is in *horizontal mode* or *vertical mode*, since \partopsep is equal to 0pt in both environments.

```

1502 \cs_new_protected:Nn \__enumext_mini_addvspace_vii:
1503 {
1504   \__enumext_mini_set_vskip_vii:
1505   \par\nopagebreak
1506   \addvspace { \l__enumext_minipage_left_skip }
1507 }
1508 \cs_new_protected:Nn \__enumext_mini_addvspace_viii:
1509 {
1510   \__enumext_mini_set_vskip_viii:

```

```

1511 \par\nopagebreak
1512 \addvspace { \l__enumext_minipage_left_skip }
1513 }

```

(End of definition for \\_\_enumext\_mini\_addvspace\_vii: and \\_\_enumext\_mini\_addvspace\_viii:.)

#### 12.22.4 The command \miniright

The command `\miniright` will close the `\__enumext_mini_page` environment on the “left side”, open the `\__enumext_mini_page` environment on the “right side” adding the *adjusted vertical space*. By default we will add `\centering` when starting the “right side” environment. The *starred argument* ‘\*’ inhibits the use of `\centering` command i.e. the usual L<sup>A</sup>T<sub>E</sub>X justification is maintained in the `\__enumext_mini_page` on the “right side”.

`\miniright`

First we will perform some checks to prevent the command from being executed outside the `enumext` environment or somewhere inappropriate then we will call the internal functions to execute it in the `enumext` and `keyans` environments.

```

1514 \NewDocumentCommand \miniright { s }
1515 {
1516   \int_compare:nNt { \l__enumext_keyans_pic_level_int } = { 1 }
1517   {
1518     \msg_error:nnn { enumext } { wrong-miniright-place }
1519   }
1520   % outside
1521   \bool_lazy_and:nnT
1522   { \int_compare_p:nNn { \l__enumext_level_int } = { 0 } }
1523   { \int_compare_p:nNn { \l__enumext_level_h_int } = { 0 } }
1524   {
1525     \msg_error:nnn { enumext } { wrong-miniright-place }
1526   }
1527   % starred env
1528   \bool_if:NT \l__enumext_starred_bool
1529   {
1530     \msg_error:nnn { enumext } { wrong-miniright-starred }
1531   }
1532   \int_compare:nNtF { \l__enumext_keyans_level_int } = { 1 }
1533   {
1534     \__enumext_keyans_mini_right_cmd:n {#1}
1535   }
1536   { \__enumext_mini_right_cmd:n {#1} }
1537 }

```

(End of definition for \miniright. This function is documented on page 10.)

`\__enumext_mini_right_cmd:n`

The function `\__enumext_mini_right_cmd:n` takes as argument the *starred* ‘\*’ of the `\miniright` command in the `enumext` environment. We check if the `mini-env` key is active via the variable `\l__enumext_minipage_right_X_dim`, if so we close the `\multicols` environment with the `\__enumext_mini_page` environment on the “left side”, then we open the `\__enumext_mini_page` environment on the “right side”, apply our adjusted “vertical spaces”, followed by adding the `\centering` command when the starred argument ‘\*’ is not present and set zero `\g__enumext_minipage_stat_int`, otherwise we return an error.

```

1538 \cs_new_protected:Npn \__enumext_mini_right_cmd:n #1
1539 {
1540   \dim_compare:nNtF
1541   { \dim_use:c { \l__enumext_minipage_right_ \l__enumext_level: _dim } } > { \c_zero_dim }
1542   {
1543     \__enumext_multicols_stop:
1544     \int_compare:nNtF
1545     { \int_use:c { \l__enumext_columns_ \l__enumext_level: _int } } = { 1 }
1546     {
1547       \par\addvspace{ \l__enumext_minipage_after_skip }
1548     }
1549     \end__enumext_mini_page
1550     \hfill
1551     \__enumext_mini_page{ \dim_use:c { \l__enumext_minipage_right_ \l__enumext_level: _dim } }
1552     \par\nointerlineskip
1553     \addvspace { \l__enumext_minipage_right_skip }
1554     \bool_if:nF {#1}
1555     {
1556       \centering
1557     }
1558     \int_gzero:N \g__enumext_minipage_stat_int

```



```

1559     }
1560     { \msg_error:nnn { enumext } { wrong-miniright-use } }
1561 % paranoia
1562 \RenewDocumentCommand \miniright { s }
1563 {
1564     \msg_error:nn { enumext } { many-miniright-used }
1565 }
1566 }

```

(End of definition for `\__enumext_mini_right_cmd:n`.)

`\__enumext_keyans_mini_right_cmd:n`

The function `\__enumext_keyans_mini_right_cmd:n` takes as argument the starred `'*` of the `\miniright` command in the `keyans` environment. The implementation of this function is the same as that of the `\__enumext_mini_right_cmd:n` function of the `enumext` environment.

```

1567 \cs_new_protected:Npn \__enumext_keyans_mini_right_cmd:n #1
1568 {
1569     \dim_compare:nNnTF { \__enumext_minipage_right_v_dim } > { \c_zero_dim }
1570     {
1571         \__enumext_keyans_multicols_stop:
1572         \int_compare:nNnT { \__enumext_columns_v_int } = { 1 }
1573         {
1574             \par\addvspace{ \__enumext_minipage_after_skip }
1575         }
1576         \end__enumext_mini_page
1577         \hfill
1578         \__enumext_mini_page{ \__enumext_minipage_right_v_dim }
1579         \par\nointerlineskip
1580         \addvspace { \__enumext_minipage_right_skip }
1581         \bool_if:nF {#1}
1582         {
1583             \centering
1584         }
1585         \int_gzero:N \g__enumext_minipage_stat_int
1586     }
1587     { \msg_error:nnn { enumext } { wrong-miniright-use } }
1588 % paranoia
1589 \RenewDocumentCommand \miniright { s }
1590 {
1591     \msg_error:nn { enumext } { many-miniright-used }
1592 }
1593 }

```

(End of definition for `\__enumext_keyans_mini_right_cmd:n`.)

## 12.23 Setting above and below keys

While having controlled the *vertical spaces* within the `enumext` and `keyans` environments when using the `columns` or `mini-env` keys, sometimes the “vertical spaces above” or “vertical spaces below” the environments are not as expected and it is necessary to be able to apply a “fine correction” to these. As I have not been able to correct these *glitches*, the best option is to leave a couple of *keys* dedicated to this purpose, in this case it is best to use `\vspace` or `\vspace*` when convenient.

Define `above`, `above*`, `below` and `below*` keys for `enumext` and `keyans` environments.

```

above* 1594 \cs_set_protected:Npn \__enumext_tmp:nn #1 #2
below 1595 {
below* 1596     \keys_define:nn { enumext / #1 }
1597     {
1598         above .skip_set:c = { \__enumext_vspace_above_#2_skip },
1599         above .value_required:n = true,
1600         above* .code:n      = \bool_set_true:c { \__enumext_vspace_a_star_#2_bool }
1601             \keys_set:nn { enumext / #1 } { above = {#1} },
1602         above* .value_required:n = true,
1603         below .skip_set:c = { \__enumext_vspace_below_#2_skip },
1604         below .value_required:n = true,
1605         below* .code:n      = \bool_set_true:c { \__enumext_vspace_b_star_#2_bool }
1606             \keys_set:nn { enumext / #1 } { below = {#1} },
1607         below* .value_required:n = true,
1608     }
1609 }
1610 \clist_map_inline:Nn \c__enumext_all_envs_clist { \__enumext_tmp:nn #1 }

```

(End of definition for `above` and others.)

### 12.23.1 Functions for above and below keys in enumext

`\__enumext_vspace_above:` The function `\__enumext_vspace_above:` apply the *vertical space above* the `enumext` environment set by the *above\** and *above* keys.

```

1611 \cs_new_protected:Nn \__enumext_vspace_above:
1612 {
1613   \skip_if_eq:nnF
1614   { \skip_use:c { \__enumext_vspace_above_ \__enumext_level: _skip } } { \c_zero_skip }
1615   {
1616     \bool_if:cTF { \__enumext_vspace_a_star_ \__enumext_level: _bool }
1617     {
1618       \vspace*{ \skip_use:c { \__enumext_vspace_above_ \__enumext_level: _skip } }
1619     }
1620     {
1621       \vspace { \skip_use:c { \__enumext_vspace_above_ \__enumext_level: _skip } }
1622     }
1623   }
1624 }

```

(End of definition for `\__enumext_vspace_above:`.)

`\__enumext_vspace_below:` The function `\__enumext_vspace_below:` apply the *vertical space below* the `enumext` environment set by the *below\** and *below* keys.

```

1625 \cs_new_protected:Nn \__enumext_vspace_below:
1626 {
1627   \skip_if_eq:nnF
1628   { \skip_use:c { \__enumext_vspace_below_ \__enumext_level: _skip } } { \c_zero_skip }
1629   {
1630     \bool_if:cTF { \__enumext_vspace_b_star_ \__enumext_level: _bool }
1631     {
1632       \vspace*{ \skip_use:c { \__enumext_vspace_below_ \__enumext_level: _skip } }
1633     }
1634     {
1635       \vspace { \skip_use:c { \__enumext_vspace_below_ \__enumext_level: _skip } }
1636     }
1637   }
1638 }

```

(End of definition for `\__enumext_vspace_below:`.)

### 12.23.2 Functions for above and below keys in keyans

`\__enumext_vspace_above_v:` The function `\__enumext_vspace_above_v:` apply the *vertical space above* the `keyans` environment set by the *above* and *above\** keys.

```

1639 \cs_new_protected:Nn \__enumext_vspace_above_v:
1640 {
1641   \skip_if_eq:nnF { \l__enumext_vspace_above_v_skip } { \c_zero_skip }
1642   {
1643     \bool_if:NTF \l__enumext_vspace_a_star_v_bool
1644     {
1645       \vspace*{ \l__enumext_vspace_above_v_skip }
1646     }
1647     { \vspace { \l__enumext_vspace_above_v_skip } }
1648   }
1649 }

```

(End of definition for `\__enumext_vspace_above_v:`.)

`\__enumext_vspace_below_v:` The function `\__enumext_vspace_below_v:` apply the *vertical space below* the `keyans` environment set by the *below\** and *below* keys.

```

1650 \cs_new_protected:Nn \__enumext_vspace_below_v:
1651 {
1652   \skip_if_eq:nnF { \l__enumext_vspace_below_v_skip } { \c_zero_skip }
1653   {
1654     \bool_if:NTF \l__enumext_vspace_b_star_v_bool
1655     {
1656       \vspace*{ \l__enumext_vspace_below_v_skip }
1657     }
1658     { \vspace { \l__enumext_vspace_below_v_skip } }
1659   }
1660 }

```

(End of definition for `\__enumext_vspace_below_v:`.)

### 12.23.3 Functions for above and below keys in enumext\* keyans\*

The functions `\__enumext_vspace_above_vii:` and `\__enumext_vspace_above_viii:` apply the *vertical space above* the `enumext*` and `keyans*` environments set by the `above` and `above*` keys.

```

1661 \cs_new_protected:Nn \__enumext_vspace_above_vii:
1662 {
1663   \skip_if_eq:nnF { \l__enumext_vspace_above_vii_skip } { \c_zero_skip }
1664   {
1665     \bool_if:NTF \l__enumext_vspace_a_star_vii_bool
1666     {
1667       \vspace*{ \l__enumext_vspace_above_vii_skip }
1668     }
1669     { \vspace { \l__enumext_vspace_above_vii_skip } }
1670   }
1671 }
1672 \cs_new_protected:Nn \__enumext_vspace_above_viii:
1673 {
1674   \skip_if_eq:nnF { \l__enumext_vspace_above_viii_skip } { \c_zero_skip }
1675   {
1676     \bool_if:NTF \l__enumext_vspace_a_star_viii_bool
1677     {
1678       \vspace*{ \l__enumext_vspace_above_viii_skip }
1679     }
1680     { \vspace { \l__enumext_vspace_above_viii_skip } }
1681   }
1682 }

```

(End of definition for `\__enumext_vspace_above_vii:` and `\__enumext_vspace_above_viii:`.)

The functions `\__enumext_vspace_below_vii:` and `\__enumext_vspace_below_viii:` apply the *vertical space below* the `enumext*` and `keyans*` environments set by the `below` and `below` keys.

```

1683 \cs_new_protected:Nn \__enumext_vspace_below_vii:
1684 {
1685   \skip_if_eq:nnF { \l__enumext_vspace_below_vii_skip } { \c_zero_skip }
1686   {
1687     \bool_if:NTF \l__enumext_vspace_b_star_vii_bool
1688     {
1689       \vspace*{ \l__enumext_vspace_below_vii_skip }
1690     }
1691     { \vspace { \l__enumext_vspace_below_vii_skip } }
1692   }
1693 }
1694 \cs_new_protected:Nn \__enumext_vspace_below_viii:
1695 {
1696   \skip_if_eq:nnF { \l__enumext_vspace_below_viii_skip } { \c_zero_skip }
1697   {
1698     \bool_if:NTF \l__enumext_vspace_b_star_viii_bool
1699     {
1700       \vspace*{ \l__enumext_vspace_below_viii_skip }
1701     }
1702     { \vspace { \l__enumext_vspace_below_viii_skip } }
1703   }
1704 }

```

(End of definition for `\__enumext_vspace_below_vii:` and `\__enumext_vspace_below_viii:`.)

## 12.24 Setting series, resume and resume\* keys

The `series` key is responsible for the whole process of the `resume` and `resume*` keys. The idea behind this is to be able to absorb the `<keys>` passed to the optional argument of the “*first level*” of the environments `enumext` and `enumext*`, but, discarding some specific `<keys>`. This implementation is adapted directly from the code provided by Jonathan P. Spratte (@Skillmon) in `chat-Tex-SX`

```

series We define the keys series, resume and resume* only for the “first level” of enumext and enumext*.
resume
resume*
1705 \cs_set_protected:Npn \__enumext_tmp:n #1
1706 {
1707   \keys_define:nn { enumext / #1 }
1708   {
1709     series .str_set:N = \l__enumext_series_str,
1710     series .value_required:n = true,
1711     resume .code:n = \__enumext_resume_series:n {##1},
1712     resume* .code:n = \__enumext_resume_starred:,

```

```

1713         resume* .value_forbidden:n = true,
1714     }
1715 }
1716 \clist_map_inline:nn { level-1, enumext* } { \__enumext_tmp:n {#1} }

```

(End of definition for `series`, `resume`, and `resume*`.)

#### 12.24.1 Internal functions for series key

The function `\__enumext_filter_series:n` will be in charge of filtering the *⟨keys⟩* we want to store where `{#1}` represents the optional value passed to the environment.

```

\__enumext_filter_series:n
  \__enumext_filter_series_key:n
  \__enumext_filter_series_pair:nn
1717 \cs_new:Npn \__enumext_filter_series:n #1
1718 {
1719     \use:e
1720     {
1721         \keyval_parse:NNn
1722         \__enumext_filter_series_key:n
1723         \__enumext_filter_series_pair:nn {#1}
1724     }
1725 }

```

The function `\__enumext_filter_series_key:n` will be responsible for filtering the *⟨keys⟩* that are passed “without value” by excluding the `resume`, `resume*` and `base-fix` keys.

```

1726 \cs_new:Npn \__enumext_filter_series_key:n #1
1727 {
1728     \str_case:nnF {#1}
1729     {
1730         { resume } {} { resume* } {} { base-fix } {}
1731     }
1732     { , { \exp_not:n {#1} } }
1733 }

```

The function `\__enumext_filter_series_pair:nn` will be responsible for filtering the *⟨keys⟩* that are passed “with value” by excluding the `series`, `resume`, `start`, `start*`, `save-ans` and `save-key` keys.

```

1734 \cs_new:Npn \__enumext_filter_series_pair:nn #1#2
1735 {
1736     \str_case:nnF {#1}
1737     {
1738         { series } {} { resume } {} { start } {}
1739         { start* } {} { save-ans } {} { save-key } {}
1740     }
1741     { , { \exp_not:n {#1} } } = { \exp_not:n {#2} } }
1742 }

```

(End of definition for `\__enumext_filter_series:n`, `\__enumext_filter_series_key:n`, and `\__enumext_filter_series_pair:nn`.)

The function `\__enumext_parse_series:n` will be responsible for storing the filtered *⟨keys⟩* in the global variable `\g__enumext_series_⟨series name⟩_tl` along with the creation of the integer variable `\g__enumext_series_⟨series name⟩_int` when the key is passed as an argument; otherwise, it will check the state of the boolean variable `\l__enumext_resume_active_bool` set by the keys `resume` and `resume*` and will call the function `\__enumext_resume_last:n`.

- The value of boolean variable `\l__enumext_resume_active_bool` is set to true by the function `\__enumext_resume_counter:n` which is used by the keys `resume` and `resume*`, in this case we must Make sure it is set to false so that it does not overwrite the default filtered *⟨keys⟩*. This function is passed to the function `\__enumext_parse_keys:n` in the `enumext` environment definition (§12.38) and to the function `\__enumext_parse_keys_vii:n` in the `enumext*` environment definition (§12.43).

```

1743 \cs_new_protected:Npn \__enumext_parse_series:n #1
1744 {
1745     \str_if_empty:NTF \l__enumext_series_str
1746     {
1747         \bool_if:NF \l__enumext_resume_active_bool
1748         {
1749             \__enumext_resume_last:n {#1}
1750         }
1751     }
1752     {
1753         \tl_gclear_new:c { g__enumext_series_ \l__enumext_series_str _tl }
1754         \tl_gset:ce { g__enumext_series_ \l__enumext_series_str _tl }
1755             { \__enumext_filter_series:n {#1} }
1756         \int_if_exist:cF { g__enumext_series_ \l__enumext_series_str _int }
1757         {

```

```

1758         \int_new:c { g__enumext_series_ \l__enumext_series_str _int }
1759     }
1760 }
1761 }

```

The function `\__enumext_resume_last:n` will be in charge of saving the filtering (*keys*) when the *series* key is *not used* and will save them in the variable `\g__enumext_standar_series_tl` for the `enumext` environment and in the variable `\g__enumext_starred_series_tl` for the `enumext*` environment. Here we must use `\bool_lazy_all:nT` to make sure that the default values are not overwritten when the environment is nested and the *series* key is not being used.

```

1762 \cs_new_protected:Npn \__enumext_resume_last:n #1
1763 {
1764     \bool_if:NT \l__enumext_standar_first_bool
1765     {
1766         \tl_gclear:N \g__enumext_standar_series_tl
1767         \tl_gset:Ne \g__enumext_standar_series_tl { \__enumext_filter_series:n {#1} }
1768     }
1769     \bool_if:NT \l__enumext_starred_first_bool
1770     {
1771         \tl_gclear:N \g__enumext_starred_series_tl
1772         \tl_gset:Ne \g__enumext_starred_series_tl { \__enumext_filter_series:n {#1} }
1773     }
1774 }

```

(End of definition for `\__enumext_parse_series:n` and `\__enumext_resume_last:n`)

### 12.24.2 Internal function to save counter value

`\__enumext_resume_save_counter:` The `\__enumext_resume_save_counter:` function will save the last counter value to `\g__enumext_series_⟨series name⟩_int` if the `series={⟨series name⟩}` key has been passed, to `\g__enumext_resume_⟨series name⟩_int` if it has passed the key `resume without value` and the key `series` is not active, in `\g__enumext_series_⟨series name⟩_int` if the key `resume={⟨series name⟩}` has been passed and in `\g__enumext_series_⟨store name⟩_int` if the key has been passed `save-ans={⟨store name⟩}`.

🔗 The variables `\l__enumext_series_str` and `\l__enumext__resume_name_tl` contain the same `{⟨series name⟩}` but are executed at different moments, the integer variable with `\l__enumext_series_str` sets the value when execute `series={⟨series name⟩}` and the integer variable with `\l__enumext__resume_name_tl` sets the subsequent values when use `resume={⟨series name⟩}`. This function is passed to the `enumext` environment definition (§12.38) and the `enumext*` environment definition (§12.43).

```

1775 \cs_new_protected:Npn \__enumext_resume_save_counter:
1776 {
1777     \bool_if:NT \g__enumext_standar_bool
1778     {
1779         \tl_if_empty:NF \l__enumext_series_str
1780         {
1781             \int_gset_eq:cN
1782             { g__enumext_series_ \l__enumext_series_str _int } \value{enumXi}
1783         }
1784         \tl_if_empty:NTF \l__enumext_resume_name_tl
1785         {
1786             \str_if_empty:NT \l__enumext_series_str
1787             {
1788                 \int_gset_eq:NN \g__enumext_resume_int \value{enumXi}
1789             }
1790         }
1791         {
1792             \int_if_exist:cT { g__enumext_series_ \l__enumext_resume_name_tl _int }
1793             {
1794                 \int_gset_eq:cN
1795                 { g__enumext_series_ \l__enumext_resume_name_tl _int } \value{enumXi}
1796             }
1797         }
1798         \int_if_exist:cT { g__enumext_resume_ \l__enumext_store_name_tl _int }
1799         {
1800             \int_gset_eq:cN
1801             { g__enumext_resume_ \l__enumext_store_name_tl _int } \value{enumXi}
1802         }
1803     }
1804     \bool_if:NT \g__enumext_starred_bool
1805     {
1806         \tl_if_empty:NF \l__enumext_series_str
1807         {

```

```

1808         \int_gset_eq:cN
1809         { g__enumext_series_ \l__enumext_series_str_int } \value{enumXvii}
1810     }
1811     \tl_if_empty:NTF \l__enumext_resume_name_tl
1812     {
1813         \str_if_empty:NT \l__enumext_series_str
1814         {
1815             \int_gset_eq:NN \g__enumext_resume_vii_int \value{enumXvii}
1816         }
1817     }
1818     {
1819         \int_if_exist:cT { g__enumext_series_ \l__enumext_resume_name_tl_int }
1820         {
1821             \int_gset_eq:cN
1822             { g__enumext_series_ \l__enumext_resume_name_tl_int } \value{enumXvii}
1823         }
1824     }
1825     \int_if_exist:cT { g__enumext_resume_ \l__enumext_store_name_tl_int }
1826     {
1827         \int_gset_eq:cN
1828         { g__enumext_resume_ \l__enumext_store_name_tl_int } \value{enumXvii}
1829     }
1830 }
1831 }

```

(End of definition for `\__enumext_resume_save_counter:`.)

### 12.24.3 Internal functions for resume key

`\__enumext_resume_series:n`

The function `\__enumext_resume_series:n` will handle the argument passed to the `resume` key in `enumext` and `enumext*` environments. If the key is passed *without value* the function `\__enumext_resume_counter:` is executed which will set the counter according to the numbering of the last `enumext` or `enumext*` environments in which `series={⟨series name⟩}` key is not present, if the `save-ans` key is active it will set the counter according to the value of the integer variable created by that key, otherwise it will verify that the `\g__enumext_series_⟨series name⟩_tl` variable set by the `series` key exists, if so it will pass these keys to the *first level* of the environment, otherwise it will return an error.

```

1832 \cs_new_protected:Npn \__enumext_resume_series:n #1
1833 {
1834     \tl_if_empty:NTF {#1}
1835     {
1836         \__enumext_resume_counter:n { }
1837     }
1838     {
1839         \tl_if_exist:cTF { g__enumext_series_ \tl_to_str:n {#1} _tl }
1840         {
1841             \__enumext_resume_counter:n {#1}
1842             \bool_if:NT \g__enumext_standar_bool
1843             {
1844                 \keys_set:nv { enumext / level-1 }
1845                 { g__enumext_series_ \tl_to_str:n {#1} _tl }
1846             }
1847             \bool_if:NT \g__enumext_starred_bool
1848             {
1849                 \keys_set:nv { enumext / enumext* }
1850                 { g__enumext_series_ \tl_to_str:n {#1} _tl }
1851             }
1852         }
1853     }
1854     \bool_if:NT \g__enumext_standar_bool
1855     {
1856         \msg_error:nnn { enumext } { unknown-series } {#1}
1857     }
1858     \bool_if:NT \g__enumext_starred_bool
1859     {
1860         \msg_error:nnn { enumext } { unknown-series } {#1}
1861     }
1862 }
1863 }
1864 }

```

(End of definition for `\__enumext_resume_series:n`.)

```

\__enumext_resume_counter:n
\__enumext_resume_counter:
  \__enumext_resume_counter_series:
  \__enumext_resume_counter_save_ans:

```

The function `\__enumext_resume_counter:n` will set the variable `\l__enumext_resume_active_bool` to true and pass the value of the key `resume` to the variable `\l__enumext_series_name_tl` which will contain the `{\series name}`. If the variable `\l__enumext_series_name_tl` is empty, that is, we are passing the key `resume` *without value*, we will execute the function `\__enumext_resume_counter:`; otherwise, when we pass `resume={\series name}` we will execute the function `\__enumext_resume_counter_series:`, finally we will execute the function `\__enumext_resume_counter_save_ans:` which is associated with the key `save-ans`.

```

1865 \cs_new_protected:Npn \__enumext_resume_counter:n #1
1866 {
1867   \bool_set_true:N \l__enumext_resume_active_bool
1868   \tl_set:Nn \l__enumext_resume_name_tl {#1}
1869   \tl_if_empty:NTF \l__enumext_resume_name_tl
1870   {
1871     \__enumext_resume_counter:
1872   }
1873   {
1874     \__enumext_resume_counter_series:
1875   }
1876   \__enumext_resume_counter_save_ans:
1877 }

```

The `\__enumext_resume_counter:` function is executed when the `resume` key is used *without value*, only the counters for the “*first level*” of the environments will be set.

```

1878 \cs_new_protected:Nn \__enumext_resume_counter:
1879 {
1880   \bool_if:NT \g__enumext_standar_bool
1881   {
1882     \int_gincr:N \g__enumext_resume_int
1883     \int_set_eq:NN \l__enumext_start_i_int \g__enumext_resume_int
1884   }
1885   \bool_if:NT \g__enumext_starred_bool
1886   {
1887     \int_gincr:N \g__enumext_resume_vii_int
1888     \int_set_eq:NN \l__enumext_start_vii_int \g__enumext_resume_vii_int
1889   }
1890 }

```

The function `\__enumext_resume_counter_series:` will be executed when the `resume={\series name}` key is active, setting the counters for the “*first level*” of the environments according to the value of the integer variables created by the `series` key.

```

1891 \cs_new_protected:Nn \__enumext_resume_counter_series:
1892 {
1893   \bool_if:NT \g__enumext_standar_bool
1894   {
1895     \int_set:Nn \l__enumext_start_i_int
1896     {
1897       \int_use:c { g__enumext_series_ \l__enumext_resume_name_tl _int } + 1
1898     }
1899   }
1900   \bool_if:NT \g__enumext_starred_bool
1901   {
1902     \int_set:Nn \l__enumext_start_vii_int
1903     {
1904       \int_use:c { g__enumext_series_ \l__enumext_resume_name_tl _int } + 1
1905     }
1906   }
1907 }

```

The function `\__enumext_resume_counter_save_ans:` will be executed when the `save-ans` key is active along with the `resume` key, setting the counters for the “*first level*” of the environments according to the value of the integer variables created by the `save-ans` key.

```

1908 \cs_new_protected:Nn \__enumext_resume_counter_save_ans:
1909 {
1910   \bool_lazy_and:nnT
1911   { \bool_if_p:N \l__enumext_standar_first_bool }
1912   { \bool_if_p:N \l__enumext_store_active_bool }
1913   {
1914     \int_set:Nn \l__enumext_start_i_int
1915     {
1916       \int_use:c { g__enumext_resume_ \l__enumext_store_name_tl _int } + 1
1917     }

```



```

1918     }
1919     \bool_lazy_and:nnT
1920     { \bool_if_p:N \l__enumext_starred_first_bool }
1921     { \bool_if_p:N \l__enumext_store_active_bool }
1922     {
1923         \int_set:Nn \l__enumext_start_vii_int
1924         {
1925             \int_use:c { g__enumext_resume_ \l__enumext_store_name_tl _int } + 1
1926         }
1927     }
1928 }

```

(End of definition for `\__enumext_resume_counter:n` and others.)

#### 12.24.4 Internal function for resume\* key

`\__enumext_resume_starred:`

The function `\__enumext_resume_starred:` will handle the `resume*` key in the `enumext` and `enumext*` environments. This function will execute the filtered `<keys>` in the last one and will continue with the numbering according to the last execution of the environment `enumext` or `enumext*` in which the keys `resume={<series name>}` or `series={<series name>}` were not active.

```

1929 \cs_new_protected:Nn \__enumext_resume_starred:
1930 {
1931     \bool_if:NT \g__enumext_standar_bool
1932     {
1933         \tl_if_empty:NF \g__enumext_standar_series_tl
1934         {
1935             \__enumext_resume_counter:n { }
1936             \keys_set:nV { enumext / level-1 } \g__enumext_standar_series_tl
1937         }
1938     }
1939     \bool_if:NT \g__enumext_starred_bool
1940     {
1941         \tl_if_empty:NF \g__enumext_starred_series_tl
1942         {
1943             \__enumext_resume_counter:n { }
1944             \keys_set:nV { enumext / enumext* } \g__enumext_starred_series_tl
1945         }
1946     }
1947 }

```

(End of definition for `\__enumext_resume_starred:`.)

### 12.25 Setting save-ans, check-ans and no-store keys

The key `save-ans` is directly associated with the keys `check-ans`, `no-store`, `resume` and `resume*`, this will activate the entire “storage system” in the `enumext` package.

#### 12.25.1 Setting save-ans key

`save-ans`

We define the keys `save-ans` only for the “first level” of `enumext` and `enumext*`.

```

1948 \cs_set_protected:Npn \__enumext_tmp:n #1
1949 {
1950     \keys_define:nn { enumext / #1 }
1951     {
1952         save-ans .code:n = \__enumext_storing_set:n {##1},
1953         save-ans .value_required:n = true,
1954     }
1955 }
1956 \clist_map_inline:nn { level-1, enumext* } { { \__enumext_tmp:n {#1} } }

```

(End of definition for `save-ans`.)

#### 12.25.2 Internal functions for save-ans key

`\__enumext_start_save_ans_msg:`

`\__enumext_stop_save_ans_msg:`

The functions `\__enumext_start_save_ans_msg:` and `\__enumext_stop_save_ans_msg:` will display in the terminal and `.log` file the environment in which the `save-ans` key was executed along with the line at the beginning and end of it. The function `\__enumext_start_save_ans_msg:` will be passed to `\__enumext_storing_set:n` and the function `\__enumext_stop_save_ans_msg:` will be passed to the function `\__enumext_execute_after_env:`.

```

1957 \cs_new_protected:Nn \__enumext_start_save_ans_msg:
1958 {
1959     \msg_term:nnVV { enumext } { save-ans-log }
1960     \g__enumext_envir_name_tl \l__enumext_store_name_tl
1961 }

```

```

1962 \cs_new_protected:Nn \__enumext_stop_save_ans_msg:
1963 {
1964     \msg_term:nnVV { enumext } { save-ans-log-hook }
1965     \g__enumext_envir_name_tl \g__enumext_store_name_tl
1966 }

```

(End of definition for \\_\_enumext\_start\_save\_ans\_msg: and \\_\_enumext\_stop\_save\_ans\_msg:.)

```

\__enumext_storing_set:n
\__enumext_storing_exec:

```

The function \\_\_enumext\_storing\_set:n first pass the value of the `save-ans` key to the variable \l\_\_enumext\_store\_name\_tl which will contain the “store name” of the *sequence* and *prop list* we will use. If \l\_\_enumext\_store\_name\_tl is *empty* we return an error message, otherwise will return the appropriate message \\_\_enumext\_start\_save\_ans\_msg: and proceed to execute the function \\_\_enumext\_storing\_exec: for `enumext` and `enumext*` environments.

```

1967 \cs_new_protected:Npn \__enumext_storing_set:n #1
1968 {
1969     \tl_set:Nx \l__enumext_store_name_tl {#1}
1970     \tl_if_empty:NTF \l__enumext_store_name_tl
1971     {
1972         \bool_lazy_or:nnT
1973         { \l__enumext_standar_first_bool } { \l__enumext_starred_first_bool }
1974         {
1975             \msg_error:nnV { enumext } { save-ans-empty } \g__enumext_envir_name_tl
1976         }
1977     }
1978     {
1979         \bool_lazy_or:nnT
1980         { \l__enumext_standar_first_bool } { \l__enumext_starred_first_bool }
1981         {
1982             \__enumext_start_save_ans_msg:
1983             \__enumext_storing_exec:
1984         }
1985     }
1986 }

```

The function \\_\_enumext\_storing\_exec: will set to true the variable \l\_\_enumext\_store\_active\_bool which activates the use of the `\anskey` command and the `keyans`, `keyans*` and `keyanspic` environments and will set to true the variable \l\_\_enumext\_check\_answers\_bool used for checking answers by the `check-ans` and `no-store` keys, copy {*store name*} into the global variable \g\_\_enumext\_store\_name\_tl and execute the function \\_\_enumext\_anskey\_env\_make:V creating the environment `anskey*` (§12.30). The *prop list* \g\_\_enumext\_series\_<store name>\_prop and the *sequence* \g\_\_enumext\_series\_<store name>\_seq will be created globally to “store content” in case they do not exist together with the integer variable \g\_\_enumext\_series\_<store name>\_int used by the keys `resume` and `resume*`.

```

1987 \cs_new_protected:Nn \__enumext_storing_exec:
1988 {
1989     \bool_set_true:N \l__enumext_store_active_bool
1990     \bool_set_true:N \l__enumext_check_answers_bool
1991     \tl_gset:NV \g__enumext_store_name_tl \l__enumext_store_name_tl
1992     \__enumext_anskey_env_make:V \l__enumext_store_name_tl
1993     \prop_if_exist:cF { g__enumext_ \l__enumext_store_name_tl _prop }
1994     {
1995         \msg_log:nnV { enumext } { store-prop } \l__enumext_store_name_tl
1996         \prop_new:c { g__enumext_ \l__enumext_store_name_tl _prop }
1997     }
1998     \seq_if_exist:cF { g__enumext_ \l__enumext_store_name_tl _seq }
1999     {
2000         \msg_log:nnV { enumext } { store-seq } \l__enumext_store_name_tl
2001         \seq_new:c { g__enumext_ \l__enumext_store_name_tl _seq }
2002     }
2003     \int_if_exist:cF { g__enumext_resume_ \l__enumext_store_name_tl _int }
2004     {
2005         \msg_log:nnV { enumext } { store-int } \l__enumext_store_name_tl
2006         \int_new:c { g__enumext_resume_ \l__enumext_store_name_tl _int }
2007     }
2008 }

```

(End of definition for \\_\_enumext\_storing\_set:n and \\_\_enumext\_storing\_exec:.)

### 12.25.3 The check answer mechanism

The mechanism for checking that all questions are answered follows this logic:

If the line begins with `\item` or `\item*` and does NOT *open a nested environment*, each `\item` or `\item*` must contain a *single* execution of the `\anskey` command, i.e. the counter of the executions of the `\anskey` command must be equal to the counter associated with the sum of executions of `\item` and `\item*`.

If the line begins with `\item` or `\item*` and *opens a nested environment* each `\item` or `\item*` in the nested environment must have a *single* execution of the `\anskey` command and the counter associated to the sum of `\item` and `\item*` executions must decrementing by “one” to maintain equality.

In order for the mechanism for the check-answer to work (not counting `keyans`, `keyans*` and `keyanspic`) we need:

1. We must keep track of the total number of `\item` and `\item*` (enumerated) that appear within the environment including the nested levels.
2. We must keep track of the total number of `\item` and `\item*` (enumerated) that appear per level of nesting.
3. Keeping track of the number of times the environment nests.

The integer variable associated to the sum of each `\item` and `\item*` in the environment `\g__enumext_item_number_int` must match the integer variable `\g__enumext_item_anskey_int` associated to the execution of the command `\anskey`. We analyze the cases:

- a) If the list only has one level the number of `\item` + `\item*` = `\anskey`
- b) If the list has *nested levels*, for each level of nesting we need to decrementing by one (for the `\item` or `\item*` that opens the nest) so that the account remains the same.

With `keyans`, `keyans*` and `keyanspic` it is enough to increase in one the integer of `\anskey`. The integers created must be global if they are not lost in the interior levels of nesting and to execute the test we will use a “hook” function after closing the first level of the environment.

#### 12.25.4 Setting check-ans and no-store keys

Now we define the keys `check-ans` and `no-store` for all levels of `enumext` and `enumext*` environments.

```

2009 \cs_set_protected:Npn \__enumext_tmp:n #1
2010 {
2011   \keys_define:nn { enumext / #1 }
2012   {
2013     check-ans .bool_set:N = \__enumext_check_ans_key_bool,
2014     check-ans .initial:n = false,
2015     check-ans .value_required:n = true,
2016     no-store .code:n = {
2017       \bool_set_false:N \__enumext_check_answers_bool
2018       \bool_set_false:N \__enumext_check_ans_key_bool
2019     },
2020     no-store .value_forbidden:n = true,
2021   }
2022 }
2023 \clist_map_inline:nn
2024 {
2025   level-1, level-2, level-3, level-4, enumext*
2026 }
2027 { \__enumext_tmp:n {#1} }
```

(End of definition for `check-ans` and `no-store`.)

#### 12.25.5 Set-up check answer mechanism

The function `\__enumext_check_ans_active:` will first check the state of the variable `\l__enumext_store_name_tl`, that is, the `save-ans` key is active, if so it will check the state of the variable `\l__enumext_check_answers_bool` handled by the key `no-store` and will execute the function `\__enumext_check_ans_level:` only if “true”, i.e. the key `no-store` is not active.

```

2028 \cs_new_protected:Nn \__enumext_check_ans_active:
2029 {
2030   \tl_if_empty:NF \l__enumext_store_name_tl
2031   {
2032     \bool_if:NT \l__enumext_check_answers_bool
2033     {
2034       \__enumext_check_ans_level:
2035     }
2036   }
2037 }
```

The function `\__enumext_check_ans_level:` will decrement by “one” the value of the variable `\g__enumext_item_number_int` which keeps track of the executions of `\item` and `\item*` for each level of nesting of the environment `enumext`, taking into account whether it is nested within `enumext*` or the opposite and set `\l__enumext_item_number_bool` to “false”.

```

2038 \cs_new_protected:Nn \__enumext_check_ans_level:
2039 {
2040   \int_case:nn { \l__enumext_level_int }
2041   {
2042     { 1 }{
2043       \bool_lazy_all:nT
2044       {
2045         { \bool_if_p:N \g__enumext_starred_bool }
2046         { \int_compare_p:nNn { \l__enumext_level_h_int } = { 1 } }
2047       }
2048       {
2049         \int_gdecr:N \g__enumext_item_number_int
2050         \bool_set_false:N \l__enumext_item_number_bool
2051       }
2052     }
2053     { 2 }{
2054       \int_gdecr:N \g__enumext_item_number_int
2055       \bool_set_false:N \l__enumext_item_number_bool
2056     }
2057     { 3 }{
2058       \int_gdecr:N \g__enumext_item_number_int
2059       \bool_set_false:N \l__enumext_item_number_bool
2060     }
2061     { 4 }{
2062       \int_gdecr:N \g__enumext_item_number_int
2063       \bool_set_false:N \l__enumext_item_number_bool
2064     }
2065   }

```

We should only execute this if `enumext*` is nested in the first level of `enumext`, for the rest of the cases the value of `\g__enumext_item_number_int` is already decreased.

```

2066   \int_case:nn { \l__enumext_level_h_int }
2067   {
2068     { 1 }{
2069       \bool_lazy_all:nT
2070       {
2071         { \bool_if_p:N \g__enumext_standar_bool }
2072         { \int_compare_p:nNn { \l__enumext_level_int } = { 1 } }
2073       }
2074       {
2075         \int_gdecr:N \g__enumext_item_number_int
2076         \bool_set_false:N \l__enumext_item_number_bool
2077       }
2078     }
2079   }
2080 }

```

(End of definition for `\__enumext_check_ans_active:` and `\__enumext_check_ans_level:`)

`\__enumext_check_ans_key_hook:`

The function `\__enumext_check_ans_key_hook:` will *export* the status of the local variable `\l__enumext_check_ans_key_bool` to the global variable `\g__enumext_check_ans_key_bool` only if the key `check-ans` is active.

```

2081 \cs_new_protected:Nn \__enumext_check_ans_key_hook:
2082 {
2083   \bool_lazy_and:nnT
2084   { \bool_if_p:N \l__enumext_check_ans_key_bool }
2085   { \bool_if_p:N \g__enumext_standar_bool }
2086   {
2087     \bool_gset_true:N \g__enumext_check_ans_key_bool
2088   }
2089   \bool_lazy_and:nnT
2090   { \bool_if_p:N \l__enumext_check_ans_key_bool }
2091   { \bool_if_p:N \g__enumext_starred_bool }
2092   {
2093     \bool_gset_true:N \g__enumext_check_ans_key_bool
2094   }
2095 }

```

(End of definition for `\__enumext_check_ans_key_hook:`.)

`\__enumext_item_answer_diff:` The function `\__enumext_item_answer_diff:` will set the value of the variable `\g__enumext_item_answer_diff_int` which is used by the functions `\__enumext_check_ans_show:` for the key `save-ans` and by the function `\__enumext_check_ans_log:` by the internal “*check answer*” mechanism. This function will be passed to the function `\__enumext_execute_after_env:`.

```
2096 \cs_new_protected:Nn \__enumext_item_answer_diff:
2097 {
2098     \int_gset:Nn \g__enumext_item_answer_diff_int
2099     {
2100         \int_sign:n { \g__enumext_item_number_int - \g__enumext_item_anskey_int }
2101     }
2102 }
```

(End of definition for `\__enumext_item_answer_diff:`.)

`\__enumext_check_ans_show:` The function `\__enumext_check_ans_show:` will be executed within the function `\__enumext_execute_after_env:` when the key `check-ans` is active, that is, when `\g__enumext_check_ans_key_bool` is “*true*” and will return the appropriate message according to the value of `\g__enumext_item_answer_diff_int` set by the function `\__enumext_item_answer_diff:`.

```
2103 \cs_new_protected:Nn \__enumext_check_ans_show:
2104 {
2105     \int_case:nn { \g__enumext_item_answer_diff_int }
2106     {
2107         { -1 } { \__enumext_check_ans_msg_less: }
2108         { 0 } { \__enumext_check_ans_msg_same_ok: }
2109         { 1 } { \__enumext_check_ans_msg_greater: }
2110     }
2111 }
2112 \cs_new_protected:Nn \__enumext_check_ans_msg_less:
2113 {
2114     \msg_warning:nnee { enumext } { item-less-answer } { \g__enumext_store_name_tl }
2115     { \g__enumext_envir_name_tl } { \g__enumext_start_line_tl }
2116 }
2117 \cs_new_protected:Nn \__enumext_check_ans_msg_same_ok:
2118 {
2119     \msg_term:nnee { enumext } { items-same-answer } { \g__enumext_store_name_tl }
2120     { \g__enumext_envir_name_tl } { \g__enumext_start_line_tl }
2121 }
2122 \cs_new_protected:Nn \__enumext_check_ans_msg_greater:
2123 {
2124     \msg_warning:nnee { enumext } { item-greater-answer } { \g__enumext_store_name_tl }
2125     { \g__enumext_envir_name_tl } { \g__enumext_start_line_tl }
2126 }
```

(End of definition for `\__enumext_check_ans_show:` and others.)

`\__enumext_check_ans_log:` The function `\__enumext_check_ans_log:` will be executed within the function `\__enumext_execute_after_env:` when the key `check-ans` is not active, that is, when `\g__enumext_check_ans_key_bool` is “*false*” and write in the log the appropriate message according to the value of `\g__enumext_item_answer_diff_int` set by the function `\__enumext_item_answer_diff:`.

```
2127 \cs_new_protected:Nn \__enumext_check_ans_log:
2128 {
2129     \int_case:nn { \g__enumext_item_answer_diff_int }
2130     {
2131         { -1 } { \__enumext_check_ans_log_msg_less: }
2132         { 0 } { \__enumext_check_ans_log_msg_same_ok: }
2133         { 1 } { \__enumext_check_ans_log_msg_greater: }
2134     }
2135 }
2136 \cs_new_protected:Nn \__enumext_check_ans_log_msg_less:
2137 {
2138     \msg_log:nnee { enumext } { item-less-answer } { \g__enumext_store_name_tl }
2139     { \g__enumext_envir_name_tl } { \g__enumext_start_line_tl }
2140 }
2141 \cs_new_protected:Nn \__enumext_check_ans_log_msg_same_ok:
2142 {
2143     \msg_log:nnee { enumext } { items-same-answer } { \g__enumext_store_name_tl }
2144     { \g__enumext_envir_name_tl } { \g__enumext_start_line_tl }
2145 }
```

```

2146 \cs_new_protected:Nn \__enumext_check_ans_log_msg_greater:
2147 {
2148   \msg_log:nneee { enumext } { item-greater-answer } { \g__enumext_store_name_tl }
2149   { \g__enumext_envir_name_tl } { \g__enumext_start_line_tl }
2150 }

```

(End of definition for `\__enumext_check_ans_log:` and others.)

### 12.25.6 Check for `\item*` and `\anspic*` commands

`\__enumext_check_starred_cmd:n`

The function `\__enumext_check_starred_cmd:n` performs an extra check for the `keyans`, `keyans*` and `keyanspic` environments. Unlike the check executed by `check-ans` key this one is not controlled by any key, it is intended to prevent the forgetting of `\item*` or `\anspic*` in these environments.

```

2151 \cs_new_protected:Npn \__enumext_check_starred_cmd:n #1
2152 {
2153   \int_compare:nNnT
2154     { \g__enumext_check_starred_cmd_int } = { 0 }
2155   {
2156     \msg_warning:nnnV
2157       { enumext } { missing-starred } { #1 } \l__enumext_check_start_line_env_tl
2158   }
2159   \int_compare:nNnT
2160     { \g__enumext_check_starred_cmd_int } > { 1 }
2161   {
2162     \msg_warning:nnnV
2163       { enumext } { many-starred } { #1 } \l__enumext_check_start_line_env_tl
2164   }
2165   \int_gzero:N \g__enumext_check_starred_cmd_int
2166   \tl_clear:N \l__enumext_check_start_line_env_tl
2167 }

```

(End of definition for `\__enumext_check_starred_cmd:n`.)

## 12.26 Keys and functions associated with storage

wrap-ans  
wrap-opt  
save-sep  
mark-ans  
mark-pos  
show-ans  
mark-ref  
save-ref

We add the keys `wrap-ans`, `wrap-opt`, `save-sep`, `mark-ans`, `mark-pos`, `show-ans`, `show-pos`, `mark-ref` and `save-ref` related to the “*storage system*” and internal mechanism of “*label and ref*” only at the *first level* of `enumext` and `enumext*`.

```

2168 \cs_set_protected:Npn \__enumext_tmp:n #1
2169 {
2170   \keys_define:nn { enumext / #1 }
2171   {
2172     wrap-ans .cs_set_protected:Np = \__enumext_anskey_wrapper:n ##1,
2173     wrap-ans .initial:n =
2174       {
2175         \fbox{\parbox[t]{\dimeval{\itemwidth -2\fboxsep -2\fboxrule}}{##1}}
2176       },
2177     wrap-ans .value_required:n = true,
2178     wrap-opt .cs_set_protected:Np = \__enumext_keyans_wrapper_opt:n ##1,
2179     wrap-opt .initial:n = [{##1}],
2180     wrap-opt .value_required:n = true,
2181     save-sep .tl_set:N = \l__enumext_store_keyans_item_opt_sep_tl,
2182     save-sep .initial:n = {, ~ },
2183     save-sep .value_required:n = true,
2184     mark-ans .tl_set:N = \l__enumext_mark_answer_sym_tl,
2185     mark-ans .initial:n = \textasteriskcentered,
2186     mark-ans .value_required:n = true,
2187     mark-pos .choice:,
2188     mark-pos / left .code:n = \str_set:Nn \l__enumext_mark_position_str { l },
2189     mark-pos / right .code:n = \str_set:Nn \l__enumext_mark_position_str { r },
2190     mark-pos / unknown .code:n =
2191       \msg_error:nneee { enumext } { unknown-choice }
2192       { mark-pos } { left, ~ right } { \exp_not:n {##1} },
2193     mark-pos .initial:n = right,
2194     mark-pos .value_required:n = true,
2195     show-ans .bool_set:N = \l__enumext_show_answer_bool,
2196     show-ans .initial:n = false,
2197     show-ans .value_required:n = true,
2198     show-pos .bool_set:N = \l__enumext_show_position_bool,
2199     show-pos .initial:n = false,
2200     show-pos .value_required:n = true,
2201     mark-ref .tl_set:N = \l__enumext_mark_ref_sym_tl,

```

```

2202         mark-ref      .initial:n = \textasteriskcentered,
2203         mark-ref      .value_required:n = true,
2204         save-ref      .bool_set:N = \l__enumext_store_ref_key_bool,
2205         save-ref      .initial:n = false,
2206         save-ref      .value_required:n = true,
2207     }
2208 }
2209 \clist_map_inline:nn { level-1, enumext* } { \l__enumext_tmp:n {#1} }

```

(End of definition for wrap-ans and others.)

mark-pos For the `keyans` and `keyans*` environments we will only add the keys mark-pos, show-ans and show-pos.

```

show-ans 2210 \cs_set_protected:Npn \l__enumext_tmp:n #1
show-pos 2211 {
2212     \keys_define:nn { enumext / #1 }
2213     {
2214         mark-pos .choice:,
2215         mark-pos / left .code:n = \str_set:Nn \l__enumext_mark_position_str { l },
2216         mark-pos / right .code:n = \str_set:Nn \l__enumext_mark_position_str { r },
2217         mark-pos .initial:n = right,
2218         mark-pos .value_required:n = true,
2219         show-ans .bool_set:N = \l__enumext_show_answer_bool,
2220         show-ans .initial:n = false,
2221         show-ans .value_required:n = true,
2222         show-pos .bool_set:N = \l__enumext_show_position_bool,
2223         show-pos .initial:n = false,
2224         show-pos .value_required:n = true,
2225     }
2226 }
2227 \clist_map_inline:nn { keyans, keyans* } { \l__enumext_tmp:n {#1} }

```

(End of definition for mark-pos, show-ans, and show-pos.)

### 12.26.1 Store optional arguments of the environments

The idea behind “storing” in the *sequence* is to have a copy of the structure of the environment in which the key `save-ans` is being executed so we must capture the optional arguments passed to the levels of the environment in which it is executed and “storing” them.

```

\__enumext_store_active_keys:n
\__enumext_store_active_keys_vii:n

```

The functions `\__enumext_store_active_keys:n` and `\__enumext_store_active_keys_vii:n` will be responsible for “storing” the *keys* filtered from the optional arguments of the environment in which the key `save-ans` is executed and the levels within this for the `enumext` and `enumext*` environments. We will execute this function only if the variable `\l__enumext_store_save_key_X_bool` is false, that is, the key `store-key` is not active, establishing the variable `\l__enumext_store_save_key_X_tl` with the filtered *keys*.

```

2228 \cs_new_protected:Npn \__enumext_store_active_keys:n #1
2229 {
2230     \bool_if:cF { l__enumext_store_save_key_ \__enumext_level: _bool }
2231     {
2232         \tl_clear:c { l__enumext_save_key_ \__enumext_level: _tl }
2233         \tl_set:ce
2234             { l__enumext_store_save_key_ \__enumext_level: _tl }
2235             { \__enumext_filter_save_key:n {#1} }
2236     }
2237 }
2238 \cs_new_protected:Npn \__enumext_store_active_keys_vii:n #1
2239 {
2240     \bool_if:NF \l__enumext_store_save_key_vii_bool
2241     {
2242         \tl_clear:N \l__enumext_store_save_key_vii_tl
2243         \tl_set:Ne \l__enumext_store_save_key_vii_tl { \__enumext_filter_save_key:n {#1} }
2244     }
2245 }

```

(End of definition for `\__enumext_store_active_keys:n` and `\__enumext_store_active_keys_vii:n`.)



### 12.26.2 Setting save-key key

Since this list structure will be stored in the *sequence* established by the `save-ans` key when executing `\anskey`, we will not be able to modify it. The best thing here is to have a key that allows you to modify the optional argument of the list stored in the *sequence*.

`save-key` The values set by this key passed in the optional arguments of the `enumext` and `enumext*` environments will override the values of the `\l__enumext_store_save_key_X_tl` variable set by the functions `\__enumext_store_active_keys:n` and `\__enumext_store_active_keys_vii:n`.

Define the key `save-key` for all levels of `enumext` and `enumext*` environments.

```

2246 \cs_set_protected:Npn \__enumext_tmp:n #1
2247 {
2248   \keys_define:nn { enumext / enumext* }
2249   {
2250     save-key .code:n = \__enumext_parse_save_key_vii:n {##1},
2251     save-key .value_required:n = true,
2252   }
2253   \keys_define:nn { enumext / #1 }
2254   {
2255     save-key .code:n = \__enumext_parse_save_key:n {##1},
2256     save-key .value_required:n = true,
2257   }
2258 }
2259 \clist_map_inline:nn { level-1, level-2, level-3, level-4 } { \__enumext_tmp:n {#1} }

```

(End of definition for `save-key`.)

```

\__enumext_parse_save_key:n
\__enumext_parse_save_key_vii:n

```

The functions `\__enumext_parse_save_key:n` and `\__enumext_parse_save_key_vii:n` will be responsible for storing the filtered *keys* in the variable `\l__enumext_store_save_key_X_tl` for `enumext` and `enumext*`.

```

2260 \cs_new_protected:Npn \__enumext_parse_save_key:n #1
2261 {
2262   \bool_set_true:c { l__enumext_store_save_key_ \__enumext_level: _bool }
2263   \tl_clear:c { l__enumext_save_key_ \__enumext_level: _tl }
2264   \tl_set:ce
2265   { l__enumext_store_save_key_ \__enumext_level: _tl }
2266   { \__enumext_filter_save_key:n {#1} }
2267 }
2268 \cs_new_protected:Npn \__enumext_parse_save_key_vii:n #1
2269 {
2270   \bool_set_true:N \l__enumext_store_save_key_vii_bool
2271   \tl_clear:N \l__enumext_store_save_key_vii_tl
2272   \tl_set:Ne \l__enumext_store_save_key_vii_tl { \__enumext_filter_save_key:n {#1} }
2273 }

```

(End of definition for `\__enumext_parse_save_key:n` and `\__enumext_parse_save_key_vii:n`.)

### 12.26.3 Internal functions to store optional arguments

```

\__enumext_filter_save_key:n
\__enumext_filter_save_key_key:n
\__enumext_filter_save_key_pair:n

```

The function `\__enumext_filter_save_key:n` will be in charge of filtering the *keys* we want to store in *sequence* where `{#1}` represents the optional value passed to the environment.

```

2274 \cs_new:Npn \__enumext_filter_save_key:n #1
2275 {
2276   \use:e
2277   {
2278     \keyval_parse:NNn
2279     \__enumext_filter_save_key_key:n
2280     \__enumext_filter_save_key_pair:n {#1}
2281   }
2282 }

```

The function `\__enumext_filter_save_key_key:n` will be responsible for filtering the *keys* that are passed “without value” by excluding the `resume`, `resume*`, `no-store` and `base-fix` keys.

```

2283 \cs_new:Npn \__enumext_filter_save_key_key:n #1
2284 {
2285   \str_case:nnF {#1}
2286   {
2287     { resume } {} { resume* } {} { no-store } {} { base-fix } {}
2288   }
2289   { , { \exp_not:n {#1} } }
2290 }

```

The function `\__enumext_filter_save_key_pair:nn` will be responsible for filtering the *keys* that are passed “with value” by excluding the `series`, `resume`, `save-ans`, `save-ref`, `check-ans`, `show-ans`, `save-pos`, `wrap-ans`, `mark-ans`, `wrap-opt`, `save-sep`, `mark-ref`, `mini-env`, `mini-sep`, `mini-right` and `mini-right*` keys.

```

2291 \cs_new:Npn \__enumext_filter_save_key_pair:nn #1#2
2292 {
2293   \str_case:nnF {#1}
2294   {
2295     { series } {} { resume } {} { save-ans } {} { save-ref } {}
2296     { save-key } {} { check-ans } {} { show-ans } {} { show-pos } {}
2297     { wrap-ans } {} { mark-ans } {} { wrap-opt } {} { save-sep } {}
2298     { mark-ref } {} { mini-env } {} { mini-sep } {} { mini-right } {}
2299     { mini-right* } {}
2300   }
2301   { , { \exp_not:n {#1} } = { \exp_not:n {#2} } }
2302 }

```

(End of definition for `\__enumext_filter_save_key:n`, `\__enumext_filter_save_key_key:n`, and `\__enumext_filter_save_key_pair:nn`.)

#### 12.26.4 Function for storing content in prop list

```

\__enumext_store_addto_prop:n
\__enumext_store_addto_prop:V

```

The function `\__enumext_store_addto_prop:n` stores the content in *prop list* defined by `save-ans` key. The “stored content” is retrieved by means of the `\getkeyans` command.

The form in which the content is “stored” in the *prop list* is  $\{\langle position \rangle\}\{\langle content \rangle\}$ . This function is used by `\anskey` in `enumext` and `enumext*` environments, `\item*` in `keyans` and `keyans*` environments and `\anspic*` in `keyanspic` environment.

```

2303 \cs_new_protected:Npn \__enumext_store_addto_prop:n #1
2304 {
2305   \prop_gput_if_not_in:cen { g__enumext_ \__enumext_store_name_tl _prop }
2306   {
2307     \int_eval:n { \prop_count:c { g__enumext_ \__enumext_store_name_tl _prop } + 1 }
2308   }
2309   { #1 }
2310 }
2311 \cs_generate_variant:Nn \__enumext_store_addto_prop:n { V, e }

```

(End of definition for `\__enumext_store_addto_prop:n`.)

#### 12.26.5 Function for storing content in sequence

```

\__enumext_store_addto_seq:n
\__enumext_store_addto_seq:v
\__enumext_store_addto_seq:V

```

The function `\__enumext_store_addto_seq:n` stores the content in *sequence* defined by `save-ans` key. This function is used by `\anskey` in `enumext`, `\item*` in `keyans` and `\anspic` in `keyanspic`.

The form in which the content is stored in *sequence* is in a internal `enumext` or `enumext*` environments with the *same structure* in which the command was executed.

The “stored content” is retrieved by means of the `\printkeyans` command.

```

2312 \cs_new_protected:Npn \__enumext_store_addto_seq:n #1
2313 {
2314   \seq_gput_right:cn { g__enumext_ \__enumext_store_name_tl _seq } { #1 }
2315 }
2316 \cs_generate_variant:Nn \__enumext_store_addto_seq:n { v, V, e }

```

(End of definition for `\__enumext_store_addto_seq:n`.)

#### 12.26.6 Functions for storing the list structure in the sequence

```

\__enumext_store_level_open:
\__enumext_store_level_close:

```

The memorization structure of the list is handled by the functions `\__enumext_store_level_open:` and `\__enumext_store_level_close:` which are executed per level within the `enumext` environment.

```

2317 \cs_new_protected:Nn \__enumext_store_level_open:
2318 {
2319   \bool_if:NT \__enumext_check_answers_bool
2320   {
2321     \tl_if_empty:cTF { l__enumext_store_save_key_ \__enumext_level: _tl }
2322     {
2323       \__enumext_store_addto_seq:n
2324       {
2325         \item \begin{enumext}
2326       }
2327     }
2328     {
2329       \tl_put_left:cn { l__enumext_store_save_key_ \__enumext_level: _tl }
2330       {

```

```

2331         \item \begin{enumext} [
2332         ]
2333         \tl_put_right:cn { l__enumext_store_save_key_ \__enumext_level: _tl }
2334         {
2335         ]
2336         }
2337         \__enumext_store_addto_seq:v { l__enumext_store_save_key_ \__enumext_level: _tl }
2338     }
2339 }
2340 }
2341 \cs_new_protected:Nn \__enumext_store_level_close:
2342 {
2343     \bool_if:NT \l__enumext_check_answers_bool
2344     {
2345         \__enumext_store_addto_seq:n { \end{enumext} }
2346     }
2347 }

```

(End of definition for \\_\_enumext\_store\_level\_open: and \\_\_enumext\_store\_level\_close:.)

\\_\_enumext\_store\_level\_open\_vii:  
 \\_\_enumext\_store\_level\_close\_vii:

The memorization structure of the list is handled by the functions \\_\_enumext\_store\_level\_open\_vii: and \\_\_enumext\_store\_level\_close\_vii: which are executed in the `enumext*` environment.

```

2348 \cs_new_protected:Nn \__enumext_store_level_open_vii:
2349 {
2350     \bool_if:NT \l__enumext_check_answers_bool
2351     {
2352         \tl_if_empty:NTF \l__enumext_store_save_key_vii_tl
2353         {
2354             \__enumext_store_addto_seq:n
2355             {
2356                 \item \begin{enumext*}
2357             }
2358         }
2359         {
2360             \tl_put_left:Nn \l__enumext_store_save_key_vii_tl
2361             {
2362                 \item \begin{enumext*}[
2363             }
2364             \tl_put_right:Nn \l__enumext_store_save_key_vii_tl
2365             {
2366             ]
2367             }
2368             \__enumext_store_addto_seq:V \l__enumext_store_save_key_vii_tl
2369         }
2370     }
2371 }
2372 \cs_new_protected:Nn \__enumext_store_level_close_vii:
2373 {
2374     \bool_if:NT \l__enumext_check_answers_bool
2375     {
2376         \__enumext_store_addto_seq:n { \end{enumext*} }
2377     }
2378 }

```

(End of definition for \\_\_enumext\_store\_level\_open\_vii: and \\_\_enumext\_store\_level\_close\_vii:.)

### 12.26.7 Function for show marks and position

\\_\_enumext\_print\_keyans\_box:NN  
 \\_\_enumext\_print\_keyans\_box:cc

The function \\_\_enumext\_print\_keyans\_box:NN print a box in the left margin with \l\_\_enumext\_mark\_answer\_sym\_tl used by the `wrap-ans`, `show-ans` and `show-pos` keys. The function takes two arguments:

#1: \l\_\_enumext\_labelwidth\_X\_dim  
 #2: \l\_\_enumext\_labelsep\_X\_dim

```

2379 \cs_new_protected:Nn \__enumext_print_keyans_box:NN
2380 {
2381     \mode_leave_vertical:
2382     \skip_horizontal:n { -\dim_use:N #2 }
2383     \makebox[0pt][ r ]
2384     {
2385         \makebox[ \dim_use:N #1 ] [ \l__enumext_mark_position_str ]
2386         {
2387             \tl_use:N \l__enumext_mark_answer_sym_tl

```

```

2388     }
2389   }
2390   \skip_horizontal:n { \dim_use:N #2 }
2391 }
2392 \cs_generate_variant:Nn \__enumext_print_keyans_box:NN { cc }

```

(End of definition for \\_\_enumext\_print\_keyans\_box:NN.)

## 12.27 The internal label and ref

The function \\_\_enumext\_store\_internal\_ref: handles the internal “*label and ref*” system used by the `save-ref` and `mark-ref` keys for \anskey will allow to execute `\ref{⟨store name : position⟩}` and will return 1.(a).i.A.

\\_\_enumext\_store\_internal\_ref:

First we will remove the dots “.” from the current `⟨labels⟩`, we do not want to get double dots in our references, then we will place this in the variable \l\_\_enumext\_newlabel\_arg\_two\_tl.

```

2393 \cs_new_protected:Nn \__enumext_store_internal_ref:
2394 {
2395   \cs_set_protected:Npn \__enumext_tmp:n ##1
2396   {
2397     \tl_set_eq:cc { l__enumext_label_copy_##1_tl } { l__enumext_label_##1_tl }
2398     \tl_reverse:c { l__enumext_label_copy_##1_tl }
2399     \tl_remove_once:cn { l__enumext_label_copy_##1_tl } { . }
2400     \tl_reverse:c { l__enumext_label_copy_##1_tl }
2401   }
2402   \clist_map_inline:nn { i, ii, iii, iv, vii } { \__enumext_tmp:n {##1} }
2403   \cs_set:Npn \__enumext_tmp:n ##1
2404   { . \tl_use:c { l__enumext_label_copy_ \int_to_roman:n {##1} _tl } }

```

Here we need to analyse the cases where the environment is started with `enumext*` and if \anskey or `anskey*` is running alone in it or if it is running in a nested `enumext` environment within the starting environment.

```

2405   \bool_lazy_all:nT
2406   {
2407     { \bool_if_p:N \g__enumext_starred_bool }
2408     { \int_compare_p:nNn { \l__enumext_level_int } = { 0 } }
2409   }
2410   {
2411     \tl_put_right:Ne \l__enumext_newlabel_arg_two_tl
2412     { \tl_use:N \l__enumext_label_copy_vii_tl }
2413   }
2414   \bool_lazy_all:nT
2415   {
2416     { \bool_not_p:n { \g__enumext_standar_bool } }
2417     { \bool_if_p:N \l__enumext_standar_bool }
2418     { \int_compare_p:nNn { \l__enumext_level_int } > { 0 } }
2419   }
2420   {
2421     \tl_put_right:Ne \l__enumext_newlabel_arg_two_tl
2422     {
2423       \tl_use:N \l__enumext_label_copy_vii_tl
2424       \int_step_function:nnN { 1 } { \l__enumext_level_int } \__enumext_tmp:n
2425     }
2426   }

```

If started with `enumext` and if \anskey or `anskey*` is running alone in it or if it is running in a nested `enumext*` environment within the starting environment.

```

2427   \bool_lazy_all:nT
2428   {
2429     { \bool_if_p:N \g__enumext_standar_bool }
2430     { \int_compare_p:nNn { \l__enumext_level_int } > { 0 } }
2431     { \int_compare_p:nNn { \l__enumext_level_h_int } = { 0 } }
2432   }
2433   {
2434     \tl_put_right:Ne \l__enumext_newlabel_arg_two_tl
2435     {
2436       \tl_use:N \l__enumext_label_copy_i_tl
2437       \int_step_function:nnN { 2 } { \l__enumext_level_int } \__enumext_tmp:n
2438     }
2439   }
2440   \cs_set:Npn \__enumext_tmp:n ##1
2441   { \tl_use:c { l__enumext_label_copy_ \int_to_roman:n {##1} _tl } . }
2442   \bool_lazy_all:nT

```

```

2443 {
2444   { \bool_if_p:N \g__enumext_standar_bool }
2445   { \bool_if_p:N \l__enumext_starred_bool }
2446   { \int_compare_p:nNn { \l__enumext_level_int } > { 0 } }
2447 }
2448 {
2449   \tl_put_right:Ne \l__enumext_newlabel_arg_two_tl
2450   {
2451     \int_step_function:nnN { 1 } { \l__enumext_level_int } \l__enumext_tmp:n
2452     \tl_use:N \l__enumext_label_copy_vii_tl
2453   }
2454 }

```

Now we set the variable `\l__enumext_newlabel_arg_one_tl` which will contain  $\langle \textit{store name} : \textit{position} \rangle$ .

```

2455 \tl_put_right:Ne \l__enumext_newlabel_arg_one_tl
2456 {
2457   \l__enumext_store_name_tl \c_colon_str
2458   \int_eval:n { \prop_count:c { g__enumext_ \l__enumext_store_name_tl _prop } }
2459 }

```

Now execute the function `\__enumext_newlabel:nn` and save the result in the variable `\l__enumext_write_aux_file_tl` and finally we write in the `.aux` file.

```

2460 \tl_put_right:Ne \l__enumext_write_aux_file_tl
2461 {
2462   \__enumext_newlabel:nn
2463   { \exp_not:V \l__enumext_newlabel_arg_one_tl }
2464   { \l__enumext_newlabel_arg_two_tl }
2465 }
2466 \l__enumext_write_aux_file_tl
2467 }

```

(End of definition for `\__enumext_store_internal_ref:`)

## 12.28 Common functions for `\anskey` and `\anskey*` environment

`\__enumext_store_anskey_code:n`

The internal function `\__enumext_store_anskey_code:n` first we pass the  $\langle \textit{argument} \rangle$  to the  $\langle \textit{prop list} \rangle$ , then checks the state of the variable `\l__enumext_store_ref_key_bool` handled by the `save-ref` key and will call the function `\__enumext_store_internal_ref:` for the internal “*label and ref*” system. Followed by this if the `show-ans` or `show-pos` keys are active we will show the “*wrapped*”  $\langle \textit{argument} \rangle$ .

```

2468 \cs_new_protected:Npn \__enumext_store_anskey_code:n #1
2469 {
2470   \int_gincr:N \g__enumext_item_anskey_int
2471   \__enumext_store_addto_prop:n {#1}
2472   \bool_if:NT \l__enumext_store_ref_key_bool
2473   {
2474     \__enumext_store_internal_ref:
2475   }
2476   \__enumext_anskey_show_wrap_left:n { #1 }

```

Now we start processing the  $[(key = val)]$  passed to the command to build our `\item` in the variable `\l__enumext_store_anskey_arg_tl` which we will “*store*” in the  $\langle \textit{sequence} \rangle$ . First we clear the variable `\l__enumext_store_anskey_arg_tl` and process the  $\langle \textit{keys} \rangle$ , if the `break-col` key is present and the command is running under `enumext` (not in `enumext*`) we will add `\columnbreak` and then `\item`.

```

2477 \tl_clear:N \l__enumext_store_anskey_arg_tl
2478 \bool_lazy_and:nnT
2479 { \bool_if_p:N \l__enumext_store_columns_break_bool }
2480 { \bool_not_p:n { \l__enumext_starred_bool } }
2481 {
2482   \tl_put_left:Nn \l__enumext_store_anskey_arg_tl { \columnbreak }
2483 }
2484 \tl_put_right:Nn \l__enumext_store_anskey_arg_tl { \item }

```

If the `item-join` key is present and the command is running under `enumext*` we will add  $\langle \textit{number} \rangle$  to `\l__enumext_store_anskey_arg_tl`.

```

2485 \bool_lazy_and:nnT
2486 { \bool_not_p:n { \l__enumext_starred_bool } }
2487 { \int_compare_p:nNn { \l__enumext_store_item_join_int } > { 1 } }
2488 {
2489   \tl_put_right:Ne \l__enumext_store_anskey_arg_tl
2490   {
2491     ( \exp_not:V \l__enumext_store_item_join_int )
2492   }
2493 }

```

And now we will review the keys `item-star`, `item-sym*` and `item-pos*` and pass them to `\l__enumext_store_anskey_arg_tl` along with the  $\langle argument \rangle$  for `\anskey` or  $\langle body \rangle$  for `anskey*`.

```

2494   \bool_if:NTF \l__enumext_store_item_star_bool
2495   {
2496     \tl_put_right:Nn \l__enumext_store_anskey_arg_tl { * }
2497     \tl_if_empty:NF \l__enumext_store_item_symbol_tl
2498     {
2499       \tl_put_right:Ne \l__enumext_store_anskey_arg_tl
2500       {
2501         [ \exp_not:V \l__enumext_store_item_symbol_tl ]
2502       }
2503     }
2504     \dim_compare:nT
2505     {
2506       \l__enumext_store_item_symbol_sep_dim != \c_zero_dim
2507     }
2508     {
2509       \tl_put_right:Ne \l__enumext_store_anskey_arg_tl
2510       {
2511         [ \exp_not:V \l__enumext_store_item_symbol_sep_dim ]
2512       }
2513     }
2514     \tl_put_right:Nn \l__enumext_store_anskey_arg_tl {#1}
2515   }
2516   {
2517     \tl_put_right:Nn \l__enumext_store_anskey_arg_tl {#1}
2518   }

```

Finally we check if the `save-ref` key are active along with the `hyperref` package load, if both conditions are met, it will create the `\hyperlink` with `symbol` set by `mark-ref` key and then store in  $\langle sequence \rangle$ .

```

2519   \bool_lazy_and:nnT
2520   { \bool_if_p:N \l__enumext_store_ref_key_bool }
2521   { \bool_if_p:N \l__enumext_hyperref_bool }
2522   {
2523     \tl_put_right:Ne \l__enumext_store_anskey_arg_tl
2524     {
2525       \hfill \exp_not:N \hyperlink { \exp_not:V \l__enumext_newlabel_arg_one_tl }
2526       { \exp_not:V \l__enumext_mark_ref_sym_tl }
2527     }
2528   }
2529   \__enumext_store_addto_seq:V \l__enumext_store_anskey_arg_tl
2530   }

```

(End of definition for `\__enumext_store_anskey_code:n`.)

`\__enumext_anskey_show_wrap_arg:n`

The function `\__enumext_anskey_show_wrap_arg:n` “wraps” the  $\langle argument \rangle$  passed to `\anskey` and the  $\langle body \rangle$  for `anskey*` when using the `wrap-ans` key.

```

2531   \cs_new_protected:Npn \__enumext_anskey_show_wrap_arg:n #1
2532   {
2533     \par
2534     \bool_if:NTF \l__enumext_starred_bool
2535     {
2536       \__enumext_print_keyans_box:NN \l__enumext_labelwidth_vii_dim \l__enumext_labelsep_vii_dim
2537     }
2538     {
2539       \__enumext_print_keyans_box:cc
2540       { \l__enumext_labelwidth_ \l__enumext_level: _dim }
2541       { \l__enumext_labelsep_ \l__enumext_level: _dim }
2542     }
2543     \__enumext_anskey_wrapper:n { #1 }
2544   }

```

(End of definition for `\__enumext_anskey_show_wrap_arg:n`.)

`\__enumext_anskey_show_wrap_left:n`

The function `\__enumext_anskey_show_wrap_left:n` will show the “*mark*” defined by the `mark-ans` key or the “*position*” of the content stored in the  $\langle prop list \rangle$  when using the `show-pos` key on the left margin next to the “wraps”  $\langle argument \rangle$  passed to `\anskey` and the  $\langle body \rangle$  in `anskey*` on the right side when using the `show-ans` key.

```

2545   \cs_new_protected:Npn \__enumext_anskey_show_wrap_left:n #1
2546   {
2547     \bool_if:NNT \l__enumext_show_answer_bool

```

```

2548     {
2549         \__enumext_anskey_show_wrap_arg:n { #1 }
2550     }
2551     \bool_if:NT \l__enumext_show_position_bool
2552     {
2553         \tl_set:Nx \l__enumext_mark_answer_sym_tl
2554         {
2555             \group_begin:
2556             \exp_not:N \normalfont
2557             \exp_not:N \footnotesize [ \int_eval:n
2558                 {
2559                     \prop_count:c { g__enumext_ \l__enumext_store_name_tl _prop }
2560                 }
2561             ]
2562             \group_end:
2563         }
2564         \__enumext_anskey_show_wrap_arg:n { #1 }
2565     }
2566 }

```

(End of definition for \\_\_enumext\_anskey\_show\_wrap\_left:n.)

## 12.29 The command \anskey

Since we will be “*storing content*” in a list environment within *(sequences)* and can (more or less) manage the options passed to each level, it is necessary that we have a little more control over \item when storing.

The \anskey command will cover this point and give it similar behaviour to that of \item in the enumext and enumext\* environments executed as follows \anskey[⟨key = val⟩]{⟨content⟩}.

First we’ll add the keys break-col, item-join, item-star, item-sym\* and item-pos\*.

```

\__enumext_anskey_unknown:n
\__enumext_anskey_unknown:nn
2567 \keys_define:nn { enumext / anskey }
2568 {
2569     break-col .bool_set:N = \l__enumext_store_columns_break_bool,
2570     break-col .default:n = true,
2571     break-col .value_forbidden:n = true,
2572     item-join .int_set:N = \l__enumext_store_item_join_int,
2573     item-join .value_required:n = true,
2574     item-star .bool_set:N = \l__enumext_store_item_star_bool,
2575     item-star .default:n = true,
2576     item-star .value_forbidden:n = true,
2577     item-sym* .tl_set:N = \l__enumext_store_item_symbol_tl,
2578     item-sym* .value_required:n = true,
2579     item-pos* .dim_set:N = \l__enumext_store_item_symbol_sep_dim,
2580     item-pos* .value_required:n = true,
2581     unknown .code:n = { \__enumext_anskey_unknown:n {#1} },
2582 }

```

The *(keys)* are stored in \l\_keys\_key\_str and the value (if any) is passed as an argument to the function \\_\_enumext\_anskey\_unknown:n.

```

2583 \cs_new_protected:Npn \__enumext_anskey_unknown:n #1
2584 {
2585     \exp_args:NV \__enumext_anskey_unknown:nn \l_keys_key_str {#1}
2586 }
2587 \cs_new_protected:Npn \__enumext_anskey_unknown:nn #1 #2
2588 {
2589     \tl_if_blank:nTF {#2}
2590     {
2591         \msg_error:nnn { enumext } { anskey-cmd-key-unknown } {#1}
2592     }
2593     {
2594         \msg_error:nnnn { enumext } { anskey-cmd-key-value-unknown } {#1} {#2}
2595     }
2596 }

```

(End of definition for \\_\_enumext\_anskey\_unknown:n and \\_\_enumext\_anskey\_unknown:nn.)

🟢 The \anskey command will only be present when using the save-ans key in enumext and enumext\* environments, otherwise it will return an error.

**\anskey** We will first call the function \\_\_enumext\_anskey\_safe\_outer: to be sure where we execute the command, then we will check the state of the variable \l\_\_enumext\_check\_answers\_bool set by the key no-store, if is true we will increment \g\_\_enumext\_item\_anskey\_int for the internal “*check answer*” system and execute the function \\_\_enumext\_anskey\_safe\_inner:n to ensure that the command is not nested and



that the argument is not empty, finally search the  $\langle key = val \rangle$  and call the function `\__enumext_store_anskey_code:n`.

```

2597 \NewDocumentCommand \anskey { o +m }
2598 {
2599   \__enumext_anskey_safe_outer:
2600   \group_begin:
2601     \bool_if:NT \l__enumext_check_answers_bool
2602     {
2603       \tl_if_novalue:nF {#1}
2604       {
2605         \keys_set:nn { enumext / anskey } {#1}
2606       }
2607       \tl_if_blank:nTF {#2}
2608       {
2609         \msg_error:nn { enumext } { anskey-empty-arg }
2610       }
2611       {
2612         \__enumext_anskey_safe_inner:
2613         \__enumext_store_anskey_code:n {#2}
2614       }
2615     }
2616   \group_end:
2617 }

```

(End of definition for `\anskey`. This function is documented on page 12.)

### 12.29.1 Internal functions for the command

`\__enumext_anskey_safe_outer:`  
`\__enumext_anskey_safe_inner:`

The `\__enumext_store_anskey_safe_outer:` function will return the appropriate messages when the command is executed outside the environment in which the `save-ans` key was activated.

```

2618 \cs_new_protected:Nn \__enumext_anskey_safe_outer:
2619 {
2620   \bool_if:NF \l__enumext_store_active_bool
2621   {
2622     \msg_error:nnnn { enumext } { anskey-wrong-place } { anskey } { enumext }
2623   }
2624   \int_compare:nNnT { \l__enumext_keyans_level_int } = { 1 }
2625   {
2626     \msg_error:nnnn { enumext } { command-wrong-place } { anskey } { keyans }
2627   }
2628   \int_compare:nNnT { \l__enumext_keyans_level_h_int } = { 1 }
2629   {
2630     \msg_error:nnnn { enumext } { command-wrong-place } { anskey } { keyans* }
2631   }
2632   \int_compare:nNnT { \l__enumext_keyans_pic_level_int } = { 1 }
2633   {
2634     \msg_error:nnnn { enumext } { command-wrong-place } { anskey } { keyanspic }
2635   }
2636 }

```

The `\__enumext_anskey_safe_inner:` function will first check if the command is nested, if preceded by a not numbered `\item` or if it is in *math mode* returning the appropriate messages.

```

2637 \cs_new_protected:Nn \__enumext_anskey_safe_inner:
2638 {
2639   \int_incr:N \l__enumext_anskey_level_int
2640   \int_compare:nNnT { \l__enumext_anskey_level_int } > { 1 }
2641   {
2642     \msg_error:nn { enumext } { anskey-nested }
2643   }
2644   \bool_if:NF \l__enumext_item_number_bool
2645   {
2646     \msg_error:nn { enumext } { anskey-unnumber-item }
2647   }
2648   \mode_if_math:T
2649   {
2650     \msg_error:nne { enumext } { anskey-math-mode } { \c_backslash_str anskey }
2651   }
2652 }

```

(End of definition for `\__enumext_anskey_safe_outer:` and `\__enumext_anskey_safe_inner:`)

### 12.30 The environment anskey\*

Managing *verbatim content* in an environment is quite complicated, I learned that when creating the `scontents` package, so to be able to have support at this point it is best to play a little with the internal code of `scontents` and `hooks`. Some considerations I should have here before implementing this:

- If some package, class or user has defined the environment with the same name somewhere in the document it would be a problem, you would not know what argument has been passed to `store-env`, if you are using the key `print-env` or the `write-out` key, sure, I can detect and modify it within the `enumext` and `enumext*` environments, but it would look strange not to have some keys available when running within these environments.
- A better (perhaps a bit paranoid) option is to define it within the environment in which the `save-ans` key is executed. and have it available only when that key is executed, here I would have absolute control of the `(keys)` and I make sure that `write-out` is not used, then using `hooks after` I undefine it and using `hook before` I check if it has been created by any package, class or user and I return a error, then the user will have to see how to solve the problem.

`\__enumext_undefine_anskey_env:` The function `\__enumext_undefine_anskey_env:` will undefine the environment `anskey*` and will be passed to the function `\__enumext_execute_after_env:` (§12.31) which is executed after the environment in which the key `save-ans` is active.

```
2653 \cs_new_protected:Nn \__enumext_undefine_anskey_env:
2654 {
2655   \cs_undefine:c { anskey* }
2656   \cs_undefine:c { endanskey* }
2657   \cs_undefine:c { __scontents_anskey*_env_begin: }
2658   \cs_undefine:c { __scontents_anskey*_env_end: }
2659 }
```

Detection of the `anskey*` environment outside the `enumext` and `enumext*` environments.

```
2660 \__enumext_before_env:nn { enumext }
2661 {
2662   \bool_lazy_and:nnT
2663     { \int_compare_p:nNn { \__enumext_level_int } = { 0 } }
2664     { \int_compare_p:nNn { \__enumext_level_h_int } = { 0 } }
2665     {
2666       \cs_if_free:cF { __scontents_anskey*_env_begin: }
2667       {
2668         \msg_error:nnn { enumext } { anskey-env-error } { anskey* }
2669       }
2670     }
2671 }
2672 \__enumext_before_env:nn { enumext* }
2673 {
2674   \bool_lazy_and:nnT
2675     { \int_compare_p:nNn { \__enumext_level_int } = { 0 } }
2676     { \int_compare_p:nNn { \__enumext_level_h_int } = { 0 } }
2677     {
2678       \cs_if_free:cF { __scontents_anskey*_env_begin: }
2679       {
2680         \msg_error:nnn { enumext } { anskey-env-error } { anskey* }
2681       }
2682     }
2683 }
```

Detection of the `anskey*` environment inside the `keyans`, `keyans*` and `keyanspic` environments, if preceded by a not numbered `\item` or if it is in *math mode* returning the appropriate messages.

```
2684 \__enumext_before_env:nn { anskey* }
2685 {
2686   \int_compare:nNnT { \__enumext_keyans_level_int } = { 1 }
2687   {
2688     \msg_error:nnn { enumext } { anskey-env-wrong } { keyans }
2689   }
2690   \int_compare:nNnT { \__enumext_keyans_level_h_int } = { 1 }
2691   {
2692     \msg_error:nnn { enumext } { anskey-env-wrong } { keyans* }
2693   }
2694   \int_compare:nNnT { \__enumext_keyans_pic_level_int } = { 1 }
2695   {
2696     \msg_error:nnn { enumext } { anskey-env-wrong } { keyanspic }
2697   }
2698   \bool_if:NF \__enumext_item_number_bool
2699   {
```

```

2700         \msg_error:nn { enumext } { anskey-unnumber-item }
2701     }
2702     \mode_if_math:T
2703     {
2704         \msg_error:nnn { enumext } { anskey-math-mode } { anskey* }
2705     }
2706 }

```

(End of definition for `\__enumext_undefine_anskey_env:`)

**anskey\***

The function `\__enumext_anskey_env_make:n` creates the environment **anskey\*** (custom version of **scontents** environment) by setting the initial keys `store-env={⟨store name⟩}` and `print-env=false`.

To maintain the *scope* of the environment and that it is only active when the key `save-ans` is active we will pass this function to the function `\__enumext_storing_exec:` (§12.25.1) and we will execute it only if the variable `\l__enumext_anskey_env_bool` is true, with this we prevent it from being executed again when the environment is nested and the key `save-ans` is active, which returns an error for part of the package **scontents**.

```

2707 \cs_new_protected:Npn \__enumext_anskey_env_make:n #1
2708 {
2709     \bool_if:NT \l__enumext_anskey_env_bool
2710     {
2711         \newenvsc{anskey*}[store-env=#1,print-env=false]
2712         \__enumext_anskey_env_exec:
2713     }
2714 }
2715 \cs_generate_variant:Nn \__enumext_anskey_env_make:n { V }

```

The function `\__enumext_anskey_env_define_keys:` will add the keys `break-col`, `item-join`, `item-join`, `item-star`, `item-sym*` and `item-pos*` and will leave the keys `print-env`, `store-env` and `write-out` undefined. We will apply this function using the *hook* function `\__enumext_before_env:nn`.

```

2716 \cs_new_protected:Nn \__enumext_anskey_env_define_keys:
2717 {
2718     \keys_define:nn { scontents / scontents }
2719     {
2720         break-col .bool_gset:N = \g__enumext_store_columns_break_bool,
2721         break-col .default:n   = true,
2722         break-col .value_forbidden:n = true,
2723         item-join .int_gset:N   = \g__enumext_store_item_join_int,
2724         item-join .value_required:n = true,
2725         item-star .bool_gset:N = \g__enumext_store_item_star_bool,
2726         item-star .default:n   = true,
2727         item-star .value_forbidden:n = true,
2728         item-sym* .tl_gset:N   = \g__enumext_store_item_symbol_tl,
2729         item-sym* .value_required:n = true,
2730         item-pos* .dim_gset:N   = \g__enumext_store_item_symbol_sep_dim,
2731         item-pos* .value_required:n = true,
2732         print-env .undefine:,
2733         store-env .undefine:,
2734         write-out .undefine:,
2735         unknown   .code:n      = { \__enumext_anskey_env_unknown:n {##1} },
2736     }
2737 }

```

The *⟨keys⟩* are stored in `\l_keys_key_str` and the value (if any) is passed as an argument to the function `\__enumext_anskey_env_unknown:n`.

```

2738 \cs_new_protected:Npn \__enumext_anskey_env_unknown:n #1
2739 {
2740     \exp_args:NV \__enumext_anskey_env_unknown:nn \l_keys_key_str {#1}
2741 }
2742 \cs_new_protected:Npn \__enumext_anskey_env_unknown:nn #1#2
2743 {
2744     \tl_if_blank:nTF {#2}
2745     {
2746         \msg_error:nnn { enumext } { anskey-env-key-unknown } {#1}
2747     }
2748     {
2749         \msg_error:nnnn { enumext } { anskey-env-key-value-unknown } {#1} {#2}
2750     }
2751 }

```

The function `\__enumext_anskey_env_reset_keys:` will leave the keys `break-col`, `item-join`, `item-join`, `item-star`, `item-sym*` and `item-pos*` undefined. We will apply this function using the *hook* function `\__enumext_after_env:nn`.

```

2752 \cs_new_protected:Nn \__enumext_anskey_env_reset_keys:
2753 {
2754   \keys_define:nn { scontents / scontents }
2755   {
2756     break-col .undefine:,
2757     item-join .undefine:,
2758     item-star .undefine:,
2759     item-sym* .undefine:,
2760     item-pos* .undefine:,
2761     write-out .code:n = {
2762       \bool_set_false:N \l__scontents_storing_bool
2763       \bool_set_true:N \l__scontents_writing_bool
2764       \tl_set:Nn \l__scontents_fname_out_tl {##1}
2765     },
2766     write-out .value_required:n = true,
2767     print-env .meta:nn = { scontents } { print-env = ##1 },
2768     print-env .default:n = true,
2769     store-env .meta:nn = { scontents } { store-env = ##1 },
2770     unknown .code:n = { \__scontents_parse_environment_keys:n {##1} },
2771   }
2772 }

```

The function `\__enumext_rescan_anskey_env:n` will be responsible for bringing the *(body)* of the environment saved in the sequence `\g__scontents_name_⟨store name⟩_seq` to pass it to our *sequence* and *prop list*.

```

2773 \cs_new_protected:Npn \__enumext_rescan_anskey_env:n #1
2774 {
2775   \group_begin:
2776   \int_set:Nn \tex_newlinechar:D { `^^J }
2777   \__scontents_rescan_tokens:x
2778   {
2779     \endgroup % This assumes \catcode`\=0... Things might go off otherwise.
2780     #1
2781   }
2782 }

```

(End of definition for *anskey\** and others. This function is documented on page 13.)

`\__enumext_anskey_env_exec:` The function `\__enumext_anskey_env_exec:` will be responsible for processing all the code necessary for the execution of the environment. The first thing will be to add our *(keys)*.

```

2783 \cs_new_protected:Nn \__enumext_anskey_env_exec:
2784 {
2785   \__enumext_before_env:nn { anskey* }
2786   {
2787     \__enumext_anskey_env_define_keys:
2788   }

```

Now we will execute our actions after the *anskey\** environment is closed. We'll fetch the contents of the *environment body* that is now saved in `\g__scontents_name_⟨store name⟩_seq` and store it in the variable `\l__enumext_store_anskey_env_tl` then we execute the rest of the functions.

```

2789   \hook_if_empty:nF {env/anskey*/after}
2790   {
2791     \hook_gremove_code:nn {env/anskey*/after} { * }
2792   }
2793   \__enumext_after_env:nn { anskey* }
2794   {
2795     \__enumext_anskey_env_save_keys:
2796     \tl_clear:N \l__enumext_store_anskey_env_tl
2797     \tl_clear:N \l__enumext_store_anskey_opt_tl
2798     \bool_if:NT \l__enumext_check_answers_bool
2799     {
2800       \tl_gset:Ne \l__enumext_store_anskey_env_tl
2801       {
2802         \seq_item:ce { g__scontents_name_ \l__enumext_store_name_tl _seq } { -1 }
2803       }
2804       \regex_match:nVTF
2805       { ^\s* \z | ^\s* \u{c__scontents_hidden_space_str} \z }
2806       \l__enumext_store_anskey_env_tl

```

```

2807         {
2808             \msg_error:nn { enumext } { anskey-empty-arg }
2809         }
2810         {
2811             \__enumext_anskey_env_store:
2812         }
2813     }
2814     \__enumext_anskey_env_clean_vars:
2815     \__enumext_anskey_env_reset_keys:
2816 }
2817 }

```

• The use of `\hook_gremove_code:nn` is necessary here, otherwise the `{code}` passed to `\__enumext_after_env:nn{anskey*}` will be accumulated for each execution. The last function `\__enumext_anskey_env_reset_keys:` is necessary so as not to hinder any `scontents` environment running within `enumext` or `enumext*`.

(End of definition for `\__enumext_anskey_env_exec:.`)

```

\__enumext_anskey_env_save_keys:
\__enumext_anskey_env_store:
\__enumext_anskey_env_clean_vars:

```

The function `\__enumext_anskey_env_save_keys:` processing the `[key = val]` passed to the environment and save this in the variable `\l__enumext_store_anskey_opt_tl`. If the `break-col` key is present and the environment is running under `enumext` (not in `enumext*`) we will add the key `break-col`.

```

2818 \cs_new_protected:Nn \__enumext_anskey_env_save_keys:
2819 {
2820     \bool_lazy_and:nnT
2821     { \bool_if_p:N \g__enumext_store_columns_break_bool }
2822     { \bool_not_p:n { \l__enumext_starred_bool } }
2823     {
2824         \tl_put_left:Ne \l__enumext_store_anskey_opt_tl { ,break-col, }
2825     }

```

If the `item-join` key is present and the command is running under `enumext*` we will add to `\l__enumext_store_anskey_opt_tl`.

```

2826     \bool_lazy_and:nnT
2827     { \bool_not_p:n { \l__enumext_starred_bool } }
2828     { \int_compare_p:nNn { \g__enumext_store_item_join_int } > { 1 } }
2829     {
2830         \tl_put_left::Ne \l__enumext_store_anskey_opt_tl
2831         {
2832             ,item-join = \exp_not:V \g__enumext_store_item_join_int,
2833         }
2834     }

```

And now we will review the keys `item-star`, `item-sym*` and `item-pos*` and pass them to `\l__enumext_store_anskey_opt_tl`.

```

2835     \bool_if:NT \g__enumext_store_item_star_bool
2836     {
2837         \tl_put_left:Ne \l__enumext_store_anskey_opt_tl
2838         {
2839             ,item-star,
2840         }
2841         \tl_if_empty:NF \g__enumext_store_item_symbol_tl
2842         {
2843             \tl_put_left:Ne \l__enumext_store_anskey_opt_tl
2844             {
2845                 ,item-sym* = \exp_not:V \g__enumext_store_item_symbol_tl,
2846             }
2847         }
2848         \dim_compare:nT
2849         {
2850             \g__enumext_store_item_symbol_sep_dim != \c_zero_dim
2851         }
2852         {
2853             \tl_put_left:Ne \l__enumext_store_anskey_opt_tl
2854             {
2855                 ,item-pos* = \exp_not:V \g__enumext_store_item_symbol_sep_dim,
2856             }
2857         }
2858     }
2859 }

```

The function `\__enumext_anskey_env_store:` will be responsible for storing the content of the environment using the functions `\__enumext_store_anskey_code:n` and `\__enumext_rescan_anskey_env:n`.

```

2860 \cs_new_protected:Nn \__enumext_anskey_env_store:

```

```

2861 {
2862     \group_begin:
2863     \tl_if_empty:NTF \l__enumext_store_anskey_opt_tl
2864     {
2865         \exp_args:Ne
2866         \__enumext_store_anskey_code:n
2867         {
2868             \__enumext_rescan_anskey_env:n { \l__enumext_store_anskey_env_tl }
2869         }
2870     }
2871     {
2872         \keys_set_known:nV { enumext / anskey } \l__enumext_store_anskey_opt_tl
2873         \exp_args:Ne
2874         \__enumext_store_anskey_code:n
2875         {
2876             \__enumext_rescan_anskey_env:n { \l__enumext_store_anskey_env_tl }
2877         }
2878     }
2879     \group_end:
2880 }

```

The function `\__enumext_anskey_env_clean_vars:` will return the global variables used by the `(keys)` to their initial state.

```

2881 \cs_new_protected:Nn \__enumext_anskey_env_clean_vars:
2882 {
2883     \bool_gset_false:N \g__enumext_store_columns_break_bool
2884     \int_gzero:N \g__enumext_store_item_join_int
2885     \bool_gset_false:N \g__enumext_store_item_star_bool
2886     \tl_gclear:N \g__enumext_store_item_symbol_tl
2887     \dim_gzero:N \g__enumext_store_item_symbol_sep_dim
2888 }

```

(End of definition for `\__enumext_anskey_env_save_keys:`, `\__enumext_anskey_env_store:`, and `\__enumext_anskey_env_clean_vars:`.)

### 12.31 Executing anskey\*, check-ans and write .log

`\__enumext_execute_after_env:`

The `\__enumext_execute_after_env:` function will first return the appropriate message for the end of the environment in which the `save-ans` key is being executed, then call the `\__enumext_item_answer_diff:` function and then will write the values of the global variables used to the `.log` file. If the key `check-ans` is active it will execute the function `\__enumext_check_ans_show:` and show the result in the terminal, otherwise it will execute the function `\__enumext_check_ans_log:` and write the results in the `.log` file, undefine the environment `anskey*` (§12.30) through the function `\__enumext_undefine_anskey_env:` and finally we execute the function `\__enumext_reset_global_vars:` returning the used variables to their original state.

```

2889 \cs_new_protected:Nn \__enumext_execute_after_env:
2890 {
2891     \int_compare:nNnT { \l__enumext_level_int } = { 0 }
2892     {
2893         \tl_if_empty:NF \g__enumext_store_name_tl
2894         {
2895             \__enumext_stop_save_ans_msg:
2896             \__enumext_item_answer_diff:
2897             \__enumext_log_global_vars:
2898             \__enumext_log_answer_vars:
2899             \bool_if:NTF \g__enumext_check_ans_key_bool
2900             {
2901                 \__enumext_check_ans_show:
2902             }
2903             { \__enumext_check_ans_log: }
2904             \__enumext_undefine_anskey_env:
2905         }
2906         \__enumext_reset_global_vars:
2907     }
2908 }

```

(End of definition for `\__enumext_execute_after_env:`.)

- This function is passed to the function `\__enumext_after_env:nn` for the environments `enumext` (§12.38) and `enumext*` (§12.43) and it is executed only when the environments are not nested or at some level of these..

## 12.32 Common functions for keyans, keyans\* and keyanspic

### 12.32.1 Storing content in prop list

`\__enumext_keyans_addto_prop:n`

The function `\__enumext_keyans_addto_prop:n` will pass the contents of the current  $\langle label \rangle$  `\l__enumext_label_v_tl` for the `keyans` environment and the current  $\langle label \rangle$  `\l__enumext_label_vi_tl` for the `keyanspic` environment when using `\item*` and `\anspic*`, followed by the *contents* of the optional argument of both commands to the `\l__enumext_store_current_label_tl` variable, which will be passed to the  $\langle prop list \rangle$  defined by the `save-ans` key using the `\__enumext_store_addto_prop:V`.

```

2909 \cs_new_protected:Npn \__enumext_keyans_addto_prop:n #1
2910 {
2911   \tl_clear:N \l__enumext_store_current_label_tl
2912   \int_compare:nNnTF { \l__enumext_keyans_pic_level_int } = { 1 }
2913   {
2914     \tl_put_right:Ne \l__enumext_store_current_label_tl { \l__enumext_label_vi_tl }
2915   }
2916   {
2917     \tl_put_right:Ne \l__enumext_store_current_label_tl { \l__enumext_label_v_tl }
2918   }
2919   \tl_if_novalue:nF { #1 }
2920   {
2921     % Set save-sep
2922     \tl_if_empty:NF \l__enumext_store_keyans_item_opt_sep_tl
2923     {
2924       \tl_put_right:Ne \l__enumext_store_current_label_tl { \l__enumext_store_keyans_item_opt_sep_tl }
2925     }
2926     \tl_put_right:Ne \l__enumext_store_current_label_tl { #1 }
2927   }
2928   \__enumext_store_addto_prop:V \l__enumext_store_current_label_tl
2929 }

```

(End of definition for `\__enumext_keyans_addto_prop:n`.)

### 12.32.2 The save-ref key for keyans, keyans\* and keyanspic

The “*internal label and ref*” system for the `keyans`, `keyans*` and `keyanspic` environments has slight differences with the one implemented for the `\anskey` command, basically because in this environments we are interested in the current  $\langle label \rangle$ . The mechanism defined here will allow to execute `\ref{\langle store name : position \rangle}` and will return `1.(A)`.

`\__enumext_keyans_store_ref:`  
`\__enumext_keyans_store_ref_aux_i:`  
`\__enumext_keyans_store_ref_aux_ii:`

The function `\__enumext_keyans_store_ref:` handles the internal “*label and ref*” system used by the `save-ref` key for `\item*` and `\anspic*` commands. First we will create copies of the current  $\langle labels \rangle$  and remove the dots “.” from them, we do not want to get double dots in our references.

```

2930 \cs_new_protected:Nn \__enumext_keyans_store_ref:
2931 {
2932   \bool_if:NT \l__enumext_store_ref_key_bool
2933   {
2934     \cs_set_protected:Npn \__enumext_tmp:n ##1
2935     {
2936       \tl_set_eq:cc { \l__enumext_label_copy_##1_tl } { \l__enumext_label_##1_tl }
2937       \tl_reverse:c { \l__enumext_label_copy_##1_tl }
2938       \tl_remove_once:cn { \l__enumext_label_copy_##1_tl } { . }
2939       \tl_reverse:c { \l__enumext_label_copy_##1_tl }
2940     }
2941     \clist_map_inline:nn { i, v, vi, vii, viii } { \__enumext_tmp:n {##1} }
2942     \__enumext_keyans_store_ref_aux_i:
2943   }
2944 }

```

The auxiliary function `\__enumext_keyans_store_ref_aux_i:` set the variable `\l__enumext_newlabel_arg_one_tl` which will contain  $\{\langle store name : position \rangle\}$  analyzing whether the environment in which they are executed is `enumext*` or `enumext`.

```

2945 \cs_new_protected:Nn \__enumext_keyans_store_ref_aux_i:
2946 {
2947   \bool_if:NT \g__enumext_starred_bool
2948   {
2949     \tl_set_eq:NN \l__enumext_label_copy_i_tl \l__enumext_label_copy_vii_tl
2950   }
2951   \int_compare:nNnT { \l__enumext_keyans_pic_level_int } = { 1 }
2952   {
2953     \tl_put_right:Ne \l__enumext_newlabel_arg_two_tl
2954     { \l__enumext_label_copy_i_tl . \l__enumext_label_copy_vi_tl }

```



```

2955     }
2956     \int_compare:nNt { \l__enumext_keyans_level_int } = { 1 }
2957     {
2958         \tl_put_right:Ne \l__enumext_newlabel_arg_two_tl
2959         { \l__enumext_label_copy_i_tl . \l__enumext_label_copy_v_tl }
2960     }
2961     \int_compare:nNt { \l__enumext_keyans_level_h_int } = { 1 }
2962     {
2963         \tl_put_right:Ne \l__enumext_newlabel_arg_two_tl
2964         { \l__enumext_label_copy_i_tl . \l__enumext_label_copy_viii_tl }
2965     }
2966     \tl_put_right:Ne \l__enumext_newlabel_arg_one_tl
2967     {
2968         \l__enumext_store_name_tl \c_colon_str
2969         \int_eval:n { \prop_count:c { g__enumext_ \l__enumext_store_name_tl _prop } }
2970     }
2971     \__enumext_keyans_store_ref_aux_ii:
2972 }

```

Now auxiliary function `\__enumext_keyans_store_ref_aux_ii:` save the result in the variable `\l__enumext_write_aux_file_tl` and finally we write in the `.aux` file.

```

2973 \cs_new_protected:Nn \__enumext_keyans_store_ref_aux_ii:
2974 {
2975     \tl_put_right:Ne \l__enumext_write_aux_file_tl
2976     {
2977         \__enumext_newlabel:nn
2978         { \exp_not:V \l__enumext_newlabel_arg_one_tl }
2979         { \l__enumext_newlabel_arg_two_tl }
2980     }
2981     \l__enumext_write_aux_file_tl
2982 }

```

(End of definition for `\__enumext_keyans_store_ref:`, `\__enumext_keyans_store_ref_aux_i:`, and `\__enumext_keyans_store_ref_aux_ii:`.)

### 12.32.3 Storing content in sequence

```

\__enumext_keyans_addto_seq:n
\__enumext_keyans_addto_seq_link:

```

The function `\__enumext_keyans_addto_seq:n` will pass the contents of the current *⟨label⟩* `\l__enumext_label_v_tl` for the *keyans* environment and the `\l__enumext_label_vi_tl` for the *keyanspic* environment when using *⟨item⟩* and *⟨anspic⟩*, followed by the *⟨contents⟩* of the optional argument of both commands to the `\l__enumext_store_current_label_tl` variable to the sequence defined by the *save-ans* key.

```

2983 \cs_new_protected:Npn \__enumext_keyans_addto_seq:n #1
2984 {
2985     \tl_clear:N \l__enumext_store_current_label_tl
2986     \int_compare:nNtF { \l__enumext_keyans_pic_level_int } = { 1 }
2987     {
2988         \tl_put_right:Ne \l__enumext_store_current_label_tl { \item \l__enumext_label_vi_tl }
2989     }
2990     {
2991         \tl_put_right:Ne \l__enumext_store_current_label_tl { \item \l__enumext_label_v_tl }
2992     }
2993     \tl_if_novalue:nF { #1 }
2994     {
2995         \tl_if_empty:NF \l__enumext_store_keyans_item_opt_sep_tl
2996         {
2997             \tl_put_right:Ne \l__enumext_store_current_label_tl
2998             {
2999                 \l__enumext_store_keyans_item_opt_sep_tl
3000             }
3001         }
3002         \tl_put_right:Ne \l__enumext_store_current_label_tl { #1 }
3003     }
3004     \__enumext_keyans_addto_seq_link:
3005 }

```

Checks if the *save-ref* key is active along with the *hyperref* package load, if both conditions are met, it will create the *⟨hyperlink⟩* and then store using the `\__enumext_store_addto_seq:V` function. Finally, copy the contents of the variable `\l__enumext_store_current_label_tl` into the global variable `\g__enumext_check_ans_item_tl` to be used by the function `\__enumext_check_starred_cmd:n` and increment the value of the integer variable `\g__enumext_item_anskey_int` handled by the *check-ans* key.

```

3006 \cs_new_protected:Nn \__enumext_keyans_addto_seq_link:
3007 {
3008   \bool_lazy_and:nnT
3009     { \bool_if_p:N \l__enumext_store_ref_key_bool }
3010     { \bool_if_p:N \l__enumext_hyperref_bool }
3011   {
3012     \tl_put_right:Ne \l__enumext_store_current_label_tl
3013     {
3014       \hfill \exp_not:N \hyperlink
3015       {
3016         \exp_not:V \l__enumext_newlabel_arg_one_tl
3017       }
3018       { \exp_not:V \l__enumext_mark_ref_sym_tl }
3019     }
3020   }
3021   \__enumext_store_addto_seq:V \l__enumext_store_current_label_tl
3022   \bool_if:NT \l__enumext_check_answers_bool
3023   {
3024     \int_gincr:N \g__enumext_item_anskey_int
3025   }
3026 }

```

(End of definition for `\__enumext_keyans_addto_seq:n` and `\__enumext_keyans_addto_seq_link:.`)

### 12.32.4 The show-ans and show-pos keys for keyans and keyanspic

The code is very similar to the `\anskey` code, but, if I change the order of the operations the counter off `\label` are incorrect.

```

\__enumext_keyans_show_left:n
\__enumext_keyans_show_ans:
\__enumext_keyans_show_pos:
\__enumext_keyans_show_item_opt:

```

Common function to show *starred commands* `\item*` and `\position` of stored content in `\prop list` for `keyans` and `keyanspic`. Need add `1` to `\g__enumext_<store name>_prop` for show-pos key.

```

3027 \cs_new_protected:Npn \__enumext_keyans_show_left:n #1
3028 {
3029   \tl_if_novalue:nF { #1 }
3030   {
3031     \tl_set:Ne \l__enumext_store_current_opt_arg_tl { #1 }
3032   }
3033   \bool_if:NT \l__enumext_show_answer_bool
3034   {
3035     \__enumext_keyans_show_ans:
3036   }
3037   \bool_if:NT \l__enumext_show_position_bool
3038   {
3039     \__enumext_keyans_show_pos:
3040   }
3041 }
3042 \cs_new_protected:Nn \__enumext_keyans_show_item_opt:
3043 {
3044   \tl_if_empty:NF \l__enumext_store_current_opt_arg_tl
3045   {
3046     \bool_lazy_or:nnT
3047       { \bool_if_p:N \l__enumext_show_answer_bool }
3048       { \bool_if_p:N \l__enumext_show_position_bool }
3049     {
3050       \__enumext_keyans_wrapper_opt:n { \l__enumext_store_current_opt_arg_tl } \c_space_tl
3051     }
3052   }
3053 }
3054 \cs_new_protected:Nn \__enumext_keyans_show_ans:
3055 {
3056   \bool_if:NT \l__enumext_starred_bool
3057   {
3058     \dim_set_eq:NN \l__enumext_labelwidth_i_dim \l__enumext_labelwidth_vii_dim
3059     \dim_set_eq:NN \l__enumext_labelsep_i_dim \l__enumext_labelsep_vii_dim
3060   }
3061   \tl_put_left:Nn \l__enumext_label_v_tl
3062   {
3063     \__enumext_print_keyans_box:NN
3064     \l__enumext_labelwidth_i_dim \l__enumext_labelsep_i_dim
3065   }
3066 }
3067 \cs_new_protected:Nn \__enumext_keyans_show_pos:

```

```

3068 {
3069   \bool_if:NT \l__enumext_starred_bool
3070   {
3071     \dim_set_eq:NN \l__enumext_labelwidth_i_dim \l__enumext_labelwidth_vii_dim
3072     \dim_set_eq:NN \l__enumext_labelsep_i_dim \l__enumext_labelsep_vii_dim
3073   }
3074   \int_compare:nNnTF { \l__enumext_keyans_pic_level_int } = { 1 }
3075   {
3076     \tl_set:Ne \l__enumext_mark_answer_sym_tl
3077     {
3078       \group_begin:
3079       \exp_not:N \normalfont
3080       \exp_not:N \footnotesize [ \int_eval:n
3081         {
3082           \prop_count:c { g__enumext_ \l__enumext_store_name_tl _prop }
3083         }
3084       ]
3085       \group_end:
3086     }
3087   }
3088   {
3089     \tl_set:Ne \l__enumext_mark_answer_sym_tl
3090     {
3091       \group_begin:
3092       \exp_not:N \normalfont
3093       \exp_not:N \footnotesize [ \int_eval:n
3094         {
3095           \prop_count:c { g__enumext_ \l__enumext_store_name_tl _prop } + 1
3096         }
3097       ]
3098       \group_end:
3099     }
3100   }
3101   \tl_put_left:Nn \l__enumext_label_v_tl
3102   {
3103     \__enumext_print_keyans_box:NN
3104     \l__enumext_labelwidth_i_dim \l__enumext_labelsep_i_dim
3105   }
3106 }

```

(End of definition for `\__enumext_keyans_show_left:n` and others.)

### 12.33 Redefining `\item` and `\makeLabel` in enumext

Redefining the `\item` command is not as simple as I thought. This command works in conjunction with the `\makeLabel` command so I have to redefine both of them, in addition to this, we will have to use a couple of *global* variables to pass the values from one command to the other.

The `\item` and `\item[⟨custom⟩]` commands work in the usual way on `enumext` and we will add `\item*`, `\item*[⟨symbol⟩]` and `\item*[⟨symbol⟩][⟨offset⟩]`.

`\__enumext_default_item:n` First we will see if the optional argument is present, if it is NOT present we will check the state of the variable `\l__enumext_check_answers_bool` set by the key `no-store`, set the boolean variable `\l__enumext_wrap_label_X_bool` to “true” for the key `wrap-label` and execute `\__enumext_item_std:w` and the key `itemindent`, otherwise we will check the state of the boolean variable `\l__enumext_wrap_label_opt_X_bool` set by the key `wrap-label*` and execute `\__enumext_item_std:w` with the optional argument and the key `itemindent`.

```

3107 \cs_new_protected:Npn \__enumext_default_item:n #1
3108 {
3109   \tl_if_novalue:nTF {#1}
3110   {
3111     \bool_if:NT \l__enumext_check_answers_bool
3112     {
3113       \int_gincr:N \g__enumext_item_number_int
3114       \bool_set_true:N \l__enumext_item_number_bool
3115     }
3116     \bool_set_true:c { \l__enumext_wrap_label_ \__enumext_level: _bool }
3117     \__enumext_item_std:w \tl_use:c { \l__enumext_fake_item_indent_ \__enumext_level: _tl }
3118   }
3119   {
3120     \bool_set_eq:cc
3121     { \l__enumext_wrap_label_ \__enumext_level: _bool }

```

```

3122         { \__enumext_wrap_label_opt_ \__enumext_level: _bool }
3123         \__enumext_item_std:w [#1] \tl_use:c { \__enumext_fake_item_indent_ \__enumext_level: _tl
3124     }
3125 }

```

(End of definition for \\_\_enumext\_default\_item:n.)

\\_\_enumext\_starred\_item:nn  
\\_\_enumext\_item\_star\_exec:

The `\item*`, `\item*[\langle symbol \rangle]` and `\item*[\langle symbol \rangle][\langle offset \rangle]` works like the *numbered* `\item`, but placing a `\langle symbol \rangle` to the “left” of the *label* separated from it by the value the second optional argument `\langle offset \rangle`.

#1: \\_\_enumext\_item\_symbol\_X\_tl

#2: \\_\_enumext\_item\_symbol\_sep\_X\_dim

First we will make a copy of `\__enumext_item_symbol_X_tl` which is set by the key `item-sym*` or passed as “first” optional argument in the global variable `\g__enumext_item_symbol_aux_tl`, followed by setting the variable `\__enumext_item_symbol_sep_X_dim` set by the key `item-pos*` or by the “second” optional argument, then we will see the state of the variable `\__enumext_check_answers_bool` set by the key `no-store`, set the boolean variable `\__enumext_wrap_label_X_bool` to “true” for the key `wrap-label` and execute `\__enumext_item_std:w` and the key `itemindent`.

```

3126 \cs_new_protected:Npn \__enumext_starred_item:nn #1 #2
3127 {
3128     \tl_if_novalue:nTF {#1}
3129     {
3130         \tl_gset_eq:Nc
3131         \g__enumext_item_symbol_aux_tl { \__enumext_item_symbol_ \__enumext_level: _tl }
3132     }
3133     {
3134         \tl_gset:Nn \g__enumext_item_symbol_aux_tl {#1}
3135     }
3136     \tl_if_novalue:nTF {#2}
3137     {
3138         \dim_set_eq:cc
3139         { \__enumext_item_symbol_sep_ \__enumext_level: _dim }
3140         { \__enumext_labelsep_ \__enumext_level: _dim }
3141     }
3142     {
3143         \dim_set:cn { \__enumext_item_symbol_sep_ \__enumext_level: _dim } {#2}
3144     }
3145     \bool_if:NT \__enumext_check_answers_bool
3146     {
3147         \int_gincr:N \g__enumext_item_number_int
3148         \bool_set_true:N \__enumext_item_number_bool
3149     }
3150     \bool_set_true:c { \__enumext_wrap_label_ \__enumext_level: _bool }
3151     \__enumext_item_std:w \tl_use:c { \__enumext_fake_item_indent_ \__enumext_level: _tl }
3152 }

```

The function `\__enumext_item_star_exec:` will be responsible for executing `\item*` for the `enumext` environment.

```

3153 \cs_new_protected:Nn \__enumext_item_star_exec:
3154 {
3155     \tl_if_empty:cF { \__enumext_item_symbol_ \__enumext_level: _tl }
3156     {
3157         \mode_leave_vertical:
3158         \skip_horizontal:n { -\dim_use:c { \__enumext_item_symbol_sep_ \__enumext_level: _dim } }
3159         \hbox_overlap_left:n { \g__enumext_item_symbol_aux_tl }
3160         \skip_horizontal:n { \dim_use:c { \__enumext_item_symbol_sep_ \__enumext_level: _dim } }
3161     }
3162 }

```

(End of definition for \\_\_enumext\_starred\_item:nn and \\_\_enumext\_item\_star\_exec:.)

\\_\_enumext\_redefine\_item:

The function `\__enumext_redefine_item:` will redefine the `\item` command in the `enumext` environment adding `\item*`.

```

3163 \cs_new_protected:Nn \__enumext_redefine_item:
3164 {
3165     \RenewDocumentCommand \item { s o o }
3166     {
3167         \bool_if:nTF {##1}
3168         {
3169             \__enumext_starred_item:nn {##2} {##3}

```

```

3170     }
3171     { \__enumext_default_item:n {##2} }
3172   }
3173 }

```

(End of definition for \\_\_enumext\_redefine\_item:.)

\\_\_enumext\_make\_label:  
 \\_\_enumext\_make\_label\_std:  
 \\_\_enumext\_make\_label\_box:

The function \\_\_enumext\_make\_label: redefine \makeLabel for the keys align, font, wrap-label, wrap-label\* and \item\* for enumext environment.

```

3174 \cs_new_protected:Nn \__enumext_make_label:
3175 {
3176   \IfDocumentMetadataTF
3177   {
3178     \__enumext_make_label_box:
3179   }
3180   { \__enumext_make_label_std: }
3181 }
3182 \cs_new_protected:Nn \__enumext_make_label_std:
3183 {
3184   \RenewDocumentCommand \makeLabel { m }
3185   {
3186     \tl_use:c { l__enumext_label_fill_left_ \__enumext_level: _tl }
3187     \tl_use:c { l__enumext_label_font_style_ \__enumext_level: _tl }
3188     \bool_if:cTF { l__enumext_wrap_label_ \__enumext_level: _bool }
3189     {
3190       \__enumext_item_star_exec:
3191       \use:c { __enumext_wrapper_label_ \__enumext_level: :n } { ##1 }
3192     }
3193     { ##1 }
3194     \tl_use:c { l__enumext_label_fill_right_ \__enumext_level: _tl }
3195     \tl_gclear:N \g__enumext_item_symbol_aux_tl
3196   }
3197 }
3198 \cs_new_protected:Nn \__enumext_make_label_box:
3199 {
3200   \RenewDocumentCommand \makeLabel { m }
3201   {
3202     \makebox
3203     [ \dim_use:c { l__enumext_labelwidth_ \__enumext_level: _dim } ]
3204     [ \str_use:c { l__enumext_align_label_pos_ \__enumext_level: _str } ]
3205     {
3206       \tl_use:c { l__enumext_label_font_style_ \__enumext_level: _tl }
3207       \bool_if:cTF { l__enumext_wrap_label_ \__enumext_level: _bool }
3208       {
3209         \__enumext_item_star_exec:
3210         \use:c { __enumext_wrapper_label_ \__enumext_level: :n } { ##1 }
3211       }
3212       { ##1 }
3213       \tl_gclear:N \g__enumext_item_symbol_aux_tl
3214     }
3215   }
3216 }

```

(End of definition for \\_\_enumext\_make\_label:, \\_\_enumext\_make\_label\_std:, and \\_\_enumext\_make\_label\_box:.)

🔗 This functions are passed to \\_\_enumext\_list\_arg\_two\_X: used in the definition of the enumext environment (§12.38).

## 12.34 Setting item-sym\* and item-pos\* keys

In order to have a cleaner implementation of \item\* for the enumext and enumext\* environments it is best to define a couple of keys that allow us to control and set by default the ⟨symbol⟩ and its ⟨offset⟩.

item-sym\*  
 item-pos\*

Define and set item-sym\* and item-pos\* keys for enumext and enumext\*.

```

3217 \cs_set_protected:Npn \__enumext_tmp:nn #1 #2
3218 {
3219   \keys_define:nn { enumext / #1 }
3220   {
3221     item-sym* .tl_set:c = { l__enumext_item_symbol_#2_tl },
3222     item-sym* .value_required:n = true,
3223     item-sym* .initial:n = {${\star$}},
3224     item-pos* .dim_set:c = { l__enumext_item_symbol_sep_#2_dim },
3225     item-pos* .value_required:n = true,
3226   }

```

```

3227     }
3228 \clist_map_inline:nn
3229     {
3230         {level-1}{i}, {level-2}{ii}, {level-3}{iii}, {level-4}{iv}, {enumext*}{vii}
3231     }
3232 { \__enumext_tmp:nn #1 }

```

(End of definition for `item-sym*` and `item-pos*`.)

## 12.35 Handling unknown keys

At this point in the code I already know that I will not add more `⟨keys⟩` and since I have already been quite *paranoid and restrictive* with the definitions of environments and commands, the only thing left to do is do it with the `⟨keys⟩` (you have to be consistent in life).

### 12.35.1 Handling unknown keys for `keyans` and `keyans*`

Define and set `unknown` key for `keyans` and `keyans*` environments.

```

unknown
\__enumext_keyans_unknown_keys:n
\__enumext_keyans_unknown_keys:nn
3233 \cs_set_protected:Npn \__enumext_tmp:n #1
3234 {
3235     \keys_define:nn { enumext / #1 }
3236     {
3237         unknown .code:n = { \__enumext_keyans_unknown_keys:n {#1} }
3238     }
3239 }
3240 \clist_map_inline:nn { keyans, keyans* } { \__enumext_tmp:n {#1} }

```

Internal functions for handling `unknown` key.

```

3241 \cs_new_protected:Npn \__enumext_keyans_unknown_keys:n #1
3242 {
3243     \exp_args:NV \__enumext_keyans_unknown_keys:nn \l_keys_key_str {#1}
3244 }
3245 \cs_new_protected:Npn \__enumext_keyans_unknown_keys:nn #1#2
3246 {
3247     \tl_if_blank:nTF {#2}
3248     {
3249         \msg_error:nnn { enumext } { keyans-unknown-key } {#1}
3250     }
3251     {
3252         \msg_error:nnnn { enumext } { keyans-unknown-key-value } {#1} {#2}
3253     }
3254 }

```

(End of definition for `unknown`, `\__enumext_keyans_unknown_keys:n`, and `\__enumext_keyans_unknown_keys:nn`.)

### 12.35.2 Handling unknown keys for `enumext*`

Define and set `unknown` key for `enumext*` environment.

```

unknown
\__enumext_starred_unknown_keys:n
\__enumext_starred_unknown_keys:nn
3255 \keys_define:nn { enumext / enumext* }
3256 {
3257     unknown .code:n = { \__enumext_starred_unknown_keys:n {#1} }
3258 }

```

Internal functions for handling `unknown` key.

```

3259 \cs_new_protected:Npn \__enumext_starred_unknown_keys:n #1
3260 {
3261     \exp_args:NV \__enumext_starred_unknown_keys:nn \l_keys_key_str {#1}
3262 }
3263 \cs_new_protected:Npn \__enumext_starred_unknown_keys:nn #1#2
3264 {
3265     \tl_if_blank:nTF {#2}
3266     {
3267         \msg_error:nnn { enumext } { starred-unknown-key } {#1}
3268     }
3269     {
3270         \msg_error:nnnn { enumext } { starred-unknown-key-value } {#1} {#2}
3271     }
3272 }

```

(End of definition for `unknown`, `\__enumext_starred_unknown_keys:n`, and `\__enumext_starred_unknown_keys:nn`.)

### 12.35.3 Handling unknown keys for enumext

unknown Defines and set the key `unknown` for `enumext` environment.

```

3273 \cs_set_protected:Npn \__enumext_tmp:n #1
3274 {
3275   \keys_define:nn { enumext / #1 }
3276   {
3277     unknown .code:n = { \__enumext_standar_unknown_keys:n {##1} }
3278   }
3279 }
3280 \clist_map_inline:nn { level-1,level-2,level-3,level-4 } { \__enumext_tmp:n {#1} }

```

Internal functions for handling `unknown` key.

```

3281 \cs_new_protected:Npn \__enumext_standar_unknown_keys:n #1
3282 {
3283   \exp_args:NV \__enumext_standar_unknown_keys:nn \l_keys_key_str {#1}
3284 }
3285 \cs_new_protected:Npn \__enumext_standar_unknown_keys:nn #1#2
3286 {
3287   \tl_if_blank:nTF {#2}
3288   {
3289     \msg_error:nnn { enumext } { standar-unknown-key } {#1}
3290   }
3291   {
3292     \msg_error:nnnn { enumext } { standar-unknown-key-value } {#1} {#2}
3293   }
3294 }

```

(End of definition for `unknown`, `\__enumext_standar_unknown_keys:n`, and `\__enumext_standar_unknown_keys:nn`.)

### 12.36 Redefining `\item` and `\makeLabel` in keyans

The `\item` and `\item[⟨custom⟩]` commands work in the usual way in `keyans`, but the `\item*` and `\item*[⟨content⟩]` commands *store* the current `⟨label⟩` next to the `⟨content⟩` if it is present in the `⟨sequence⟩` and `⟨prop list⟩` defined by `save-ans` key.

`\__enumext_keyans_default_item:n` The function `\__enumext_keyans_default_item:n` executes the original behavior of the `\item`.

```

3295 \cs_new_protected:Npn \__enumext_keyans_default_item:n #1
3296 {
3297   \tl_if_novalue:nTF { #1 }
3298   {
3299     \bool_set_true:N \__enumext_wrap_label_v_bool
3300     \__enumext_item_std:w \tl_use:N \__enumext_fake_item_indent_v_tl
3301   }
3302   {
3303     \bool_set_eq:NN \__enumext_wrap_label_v_bool \__enumext_wrap_label_opt_v_bool
3304     \__enumext_item_std:w [ #1 ] \tl_use:N \__enumext_fake_item_indent_v_tl
3305   }
3306 }

```

(End of definition for `\__enumext_keyans_default_item:n`.)

`\__enumext_keyans_starred_item:n` The function `\__enumext_keyans_starred_item:n` which will make a temporary copy of the current `⟨label⟩`, execute the `show-ans` or `show-pos` keys using the function `\__enumext_keyans_show_left:n` and will display the contents of that item using the internal copy `\__enumext_item_std:w`, this is necessary to prevent incrementing the current “*counter*” of the original `⟨label⟩`.

```

3307 \cs_new_protected:Npn \__enumext_keyans_starred_item:n #1
3308 {
3309   \tl_set_eq:NN \__enumext_store_current_label_tmp_tl \__enumext_label_v_tl
3310   \__enumext_keyans_show_left:n { #1 }
3311   \bool_set_true:N \__enumext_wrap_label_v_bool
3312   \__enumext_item_std:w \tl_use:N \__enumext_fake_item_indent_v_tl \__enumext_keyans_show_item

```

Recover the original value of the current `⟨label⟩` and *store* it first in the `⟨prop list⟩` (including the optional argument), run the internal “*label and ref*” system if the `save-ref` key is active and finally *store* it in the `⟨sequence⟩`.

```

3313   \tl_set_eq:NN \__enumext_label_v_tl \__enumext_store_current_label_tmp_tl
3314   \__enumext_keyans_addto_prop:n { #1 }
3315   \__enumext_keyans_store_ref:
3316   \__enumext_keyans_addto_seq:n { #1 }
3317   \int_gincr:N \g__enumext_check_starred_cmd_int
3318 }

```



(End of definition for `\__enumext_keyans_starred_item:n`.)

`\item*` The function `\__enumext_keyans_redefine_item:` is responsible for adding the *starred* and *optional* argument by the `\__enumext_list_arg_two_v:` function in the definition of the `keyans` environment. Here we need to use `\peek_remove_spaces:n` to prevent an unwanted space when using `\item*` in conjunction with the `itemindent` key.

```

3319 \cs_new_protected:Nn \__enumext_keyans_redefine_item:
3320 {
3321   \RenewDocumentCommand \item { s o }
3322   {
3323     \bool_if:nTF {##1}
3324     {
3325       \peek_remove_spaces:n
3326       {
3327         \__enumext_keyans_starred_item:n {##2}
3328       }
3329     }
3330     {
3331       \__enumext_keyans_default_item:n {##2}
3332     }
3333   }
3334 }

```

(End of definition for `\item*` and `\__enumext_keyans_redefine_item:`. This function is documented on page 14.)

`\__enumext_keyans_make_label:` The function `\__enumext_keyans_make_label:` redefine `\makeLabel` for the keys `align`, `font`, `wrap-label`, `wrap-label*` and `\item*` for `keyans` environment.

```

\__enumext_keyans_make_label_std:
\__enumext_keyans_make_label_box:
3335 \cs_new_protected:Nn \__enumext_keyans_make_label:
3336 {
3337   \IfDocumentMetadataTF
3338   {
3339     \__enumext_keyans_make_label_box:
3340   }
3341   { \__enumext_keyans_make_label_std: }
3342 }
3343 \cs_new_protected:Nn \__enumext_keyans_make_label_std:
3344 {
3345   \RenewDocumentCommand \makeLabel { m }
3346   {
3347     \tl_use:N \__enumext_label_fill_left_v_tl
3348     \tl_use:N \__enumext_label_font_style_v_tl
3349     \bool_if:NTF \__enumext_wrap_label_v_bool
3350     {
3351       \__enumext_wrapper_label_v:n { ##1 }
3352     }
3353     { ##1 }
3354     \tl_use:N \__enumext_label_fill_right_v_tl
3355   }
3356 }
3357 \cs_new_protected:Nn \__enumext_keyans_make_label_box:
3358 {
3359   \RenewDocumentCommand \makeLabel { m }
3360   {
3361     \makebox[ \__enumext_labelwidth_v_dim ][ \__enumext_align_label_pos_v_str ]
3362     {
3363       \tl_use:N \__enumext_label_font_style_v_tl
3364       \bool_if:NTF \__enumext_wrap_label_v_bool
3365       {
3366         \__enumext_wrapper_label_v:n { ##1 }
3367       }
3368       { ##1 }
3369     }
3370   }
3371 }

```

(End of definition for `\__enumext_keyans_make_label:`, `\__enumext_keyans_make_label_std:`, and `\__enumext_keyans_make_label_box:`.)

- This functions are passed to `\__enumext_list_arg_two_v:` used in the definition of the `keyans` environment (§12.37.2).

### 12.37 Second argument of the lists

At this point of the code we have already programmed most the necessary tools to create a custom `list` environment, remember that the function `\__enumext_start_list:nn` takes two arguments, the first one we have ready, the second one we will define for all the levels of the environment `enumext` and the environment `keyans`.

#### 12.37.1 Calculation of `\leftmargin` and `\itemindent`

Consider the figure 9 where the default margins (on the left) of a list are represented.

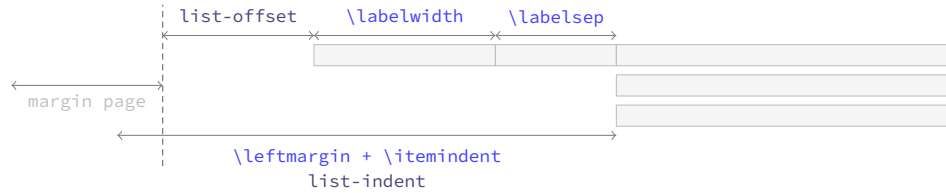


Figure 9: Representation of standard horizontal lengths in `list` environment.

The idea is to have control over these margins so that our list does not overlap the left margin of the page. The key relationship is that the right edge of the `\labelsep` equals the right edge of the `\itemindent`, so that the left edge of the *label box* is at `\leftmargin + \itemindent` minus `\labelwidth + \labelsep`. Thus, the handling of the margins by the package will be as shown in the figure 10.

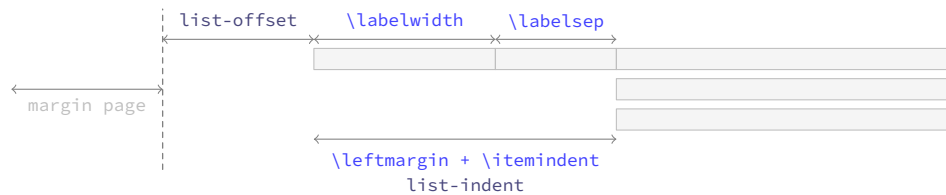


Figure 10: Representation of horizontal lengths concept in list in `enumext`.

Where the default values will look like in the figure 11.

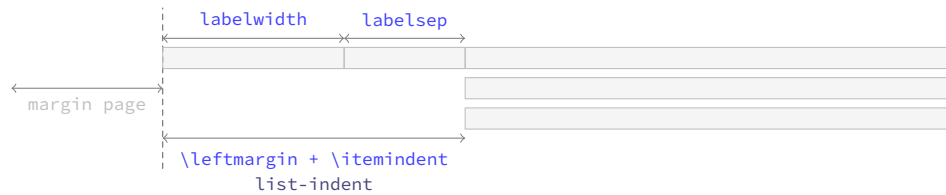


Figure 11: Default horizontal lengths in `enumext`.

```
\__enumext_calc_hspace:NNNNNNN
\__enumext_calc_hspace:ccccccc
```

The function `\__enumext_calc_hspace:NNNNNNN` takes seven arguments to be able to determine horizontal spaces for all list environment:

```
#1: \l__enumext_labelwidth_X_dim      #2: \l__enumext_labelsep_X_dim
#3: \l__enumext_listoffset_X_dim     #4: \l__enumext_leftmargin_tmp_X_dim
#5: \l__enumext_leftmargin_X_dim      #6: \l__enumext_itemindent_X_dim
#7: \l__enumext_leftmargin_tmp_X_bool
```

And returns the “adjusted” values of `\leftmargin` and `\itemindent`.

This function is passed to `\__enumext_list_arg_two_X:` which is used in the definition of the `enumext` and `keyans` environments (§12.37.2).

```
3372 \cs_new_protected:Npn \__enumext_calc_hspace:NNNNNNN #1 #2 #3 #4 #5 #6 #7
3373 {
3374   \dim_compare:nNt { #1 } < { \c_zero_dim }
3375   {
3376     \msg_warning:nnnV { enumext } { width-non-positive } { labelwidth } { #1 }
3377     \dim_set:Nn #1 { \dim_abs:n { #1 } }
3378   }
3379   \dim_compare:nNt { #2 } < { \c_zero_dim }
3380   {
3381     \msg_warning:nnnV { enumext } { width-negative } { labelsep } { #2 }
3382     \dim_set:Nn #2 { \dim_abs:n { #2 } }
3383   }
3384 }
```

If no value has been passed to the `labelwidth` and `labelsep` keys we set the default values for `\l__enumext_leftmargin_tmp_X_dim`.

```
3384 \bool_if:nF #7 { \dim_set:Nn #4 { #1 + #2 } }
```

We now analyze the cases and set the values for `\leftmargin` and `\itemindent`.

```

3385 \dim_compare:nNnTF { #4 } < { \c_zero_dim }
3386 {
3387   \dim_set:Nn #6 { #1 + #2 - #4 }
3388   \dim_set:Nn #5 { #1 + #2 + #3 - #6 }
3389 }
3390 {
3391   \dim_compare:nNnT { #4 } = { #1 + #2 }
3392   { \dim_set:Nn #6 { \c_zero_dim } }
3393   \dim_compare:nNnT { #4 } < { #1 + #2 }
3394   { \dim_set:Nn #6 { #1 + #2 - #4 } }
3395   \dim_compare:nNnT { #4 } > { #1 + #2 }
3396   {
3397     \dim_set:Nn #6 { -#1 - #2 + #4 }
3398     \dim_set:Nn #6 { #6*-1 }
3399   }
3400   \dim_set:Nn #5 { #1 + #2 + #3 - #6 }
3401 }
3402 }
3403 \cs_generate_variant:Nn \__enumext_calc_hspace:NNNNNNN { cccccc }

```

(End of definition for `\__enumext_calc_hspace:NNNNNNN`.)

### 12.37.2 Setting second argument of the lists

We will “not set” `\leftmargini`, `\leftmarginii`, `\leftmarginiii` or `\leftmarginiv`, in this case, we will directly set the parameters for vertical and horizontal list spacing per level.

```

3404 \cs_set_protected:Npn \__enumext_tmp:n #1
3405 {
3406   \cs_new_protected:cpn { \__enumext_list_arg_two_#1: }
3407   {
3408     \__enumext_calc_hspace:ccccc
3409     { \__enumext_labelwidth_#1_dim } { \__enumext_labelsep_#1_dim }
3410     { \__enumext_listoffset_#1_dim } { \__enumext_leftmargin_tmp_#1_dim }
3411     { \__enumext_leftmargin_#1_dim } { \__enumext_itemindent_#1_dim }
3412     { \__enumext_leftmargin_tmp_#1_bool }
3413     \clist_map_inline:nn
3414     { labelsep, labelwidth, itemindent, leftmargin, rightmargin, listparindent }
3415     { \dim_set_eq:cc {####1} { \__enumext_####1_#1_dim } }
3416     \clist_map_inline:nn { topsep, parsep, partopsep, itemsep }
3417     { \skip_set_eq:cc {####1} { \__enumext_####1_#1_skip } }
3418     \usecounter { enumX#1 }
3419     \setcounter { enumX#1 } { \int_eval:n { \int_use:c { \__enumext_start_#1_int } - 1 } }
3420     \str_if_eq:nnTF {#1} { v }
3421     {
3422       \__enumext_keyans_redefine_item:
3423       \__enumext_keyans_make_label:
3424       \__enumext_keyans_ref:
3425       \__enumext_keyans_fake_item:
3426       \bool_if:cT { \__enumext_show_length_#1_bool }
3427       {
3428         \msg_term:nnnn { enumext } { list-lengths-not-nested } { v } { keyans }
3429       }
3430     }
3431     {
3432       \__enumext_redefine_item:
3433       \__enumext_make_label:
3434       \__enumext_standar_ref:
3435       \__enumext_fake_item:
3436       \bool_if:cT { \__enumext_show_length_#1_bool }
3437       {
3438         \msg_term:nnne { enumext } { list-lengths } {#1} { \int_use:N \__enumext_level_int }
3439       }
3440     }
3441   }
3442 }
3443 \clist_map_inline:nn { i, ii, iii, iv, v } { \__enumext_tmp:n {#1} }

```

(End of definition for `\__enumext_list_arg_two_i: and others`.)

For the horizontal environments `enumext*` and `keyans*` the implementation is similar, but, the value of `\partopsep` is always `0pt`. At this point we will modify the `parsep` key to make it take the value of the

`itemsep` key and later, in the environment definition, we will modify `parindent` to make it set the value of `listparindent` and `parsep` to set the value of `\parskip` locally.

```

3444 \cs_set_protected:Npn \__enumext_tmp:n #1
3445 {
3446   \cs_new_protected:cpn { \__enumext_list_arg_two_#1: }
3447   {
3448     \bool_set_true:c { l__enumext_leftmargin_tmp_#1_bool }
3449     \dim_zero:c { l__enumext_leftmargin_tmp_#1_dim }
3450     \__enumext_calc_hspace:ccccc
3451     { l__enumext_labelwidth_#1_dim } { l__enumext_labelsep_#1_dim }
3452     { l__enumext_listoffset_#1_dim } { l__enumext_leftmargin_tmp_#1_dim }
3453     { l__enumext_leftmargin_#1_dim } { l__enumext_itemindent_#1_dim }
3454     { l__enumext_leftmargin_tmp_#1_bool }
3455     \clist_map_inline:nn
3456       { labelsep, labelwidth, itemindent, leftmargin, rightmargin, listparindent }
3457       { \dim_set_eq:cc {###1} { l__enumext_###1_#1_dim } }
3458     \clist_map_inline:nn { topsep, parsep, partopsep, itemsep }
3459       { \skip_set_eq:cc {###1} { l__enumext_###1_#1_skip } }
3460     \skip_set_eq:Nc \parsep { l__enumext_itemsep_#1_skip }
3461     \skip_zero:N \partopsep
3462     \usecounter { enumX#1 }
3463     \setcounter { enumX#1 } { \int_eval:n { \int_use:c { l__enumext_start_#1_int } - 1 } }
3464     \__enumext_starred_ref:
3465     \str_if_eq:nnTF {#1} { vii }
3466       {
3467         \__enumext_fake_item_vii:
3468         \bool_if:cT { l__enumext_show_length_vii_bool }
3469           { \msg_term:nnnn { enumext } { list-lengths-not-nested } { vii } { enumext* } }
3470       }
3471       {
3472         \__enumext_fake_item_viii:
3473         \bool_if:cT { l__enumext_show_length_#1_bool }
3474           { \msg_term:nnnn { enumext } { list-lengths-not-nested } { #1 } { keyans* } }
3475       }
3476   }
3477 }
3478 \clist_map_inline:nn { vii, viii } { \__enumext_tmp:n {#1} }

```

(End of definition for `\__enumext_list_arg_two_vii:` and `\__enumext_list_arg_two_viii:`)

## 12.38 The environment `enumext`

`enumext` We create the `enumext` environment based on `list` environment by levels.

```

3479 \NewDocumentEnvironment{enumext}{0}{}
3480 {
3481   \__enumext_safe_exec:
3482   \__enumext_parse_keys:n {#1}
3483   \__enumext_before_list:
3484   \__enumext_start_store_level:
3485   \__enumext_start_list:nn
3486     { \tl_use:c { l__enumext_label_ \__enumext_level: _tl } }
3487     {
3488       \use:c { \__enumext_list_arg_two_ \__enumext_level: : }
3489       \__enumext_before_keys_exec:
3490     }
3491   \__enumext_set_item_width:
3492   \__enumext_after_args_exec:
3493 }
3494 {
3495   \__enumext_after_list:
3496 }

```

(End of definition for `enumext`. This function is documented on page 5.)

`\__enumext_set_item_width:` The function `\__enumext_set_item_width:` will set the value of `\itemwidth` taking into account the value established by the `list-offset` key for each level of the environment.

```

3497 \cs_new_protected:Nn \__enumext_set_item_width:
3498 {
3499   \dim_set:Nn \itemwidth
3500   {
3501     \linewidth

```

```

3502     }
3503     \dim_compare:nT
3504     {
3505         \dim_use:c { \__enumext_listoffset_ \__enumext_level: _dim } != \c_zero_dim
3506     }
3507     {
3508         \dim_sub:Nn \itemwidth
3509         {
3510             \dim_use:c { \__enumext_listoffset_ \__enumext_level: _dim }
3511         }
3512     }
3513 }

```

(End of definition for \\_\_enumext\_set\_item\_width:.)

`\__enumext_safe_exec:` The `\__enumext_safe_exec:` function first call the function `\__enumext_internal_mini_page:` to create the environment `__enumext_mini_page`, then the function `\__enumext_is_not_nested:` which sets `\g__enumext_standar_bool` to “true” if we are not nested within `enumext*`, we will increment `\l__enumext_level_int` to restrict nesting of the environment, set `\l__enumext_standar_bool` to “true” and finally call the function `\__enumext_is_on_first_level:` which sets `\l__enumext_standar_first_bool` to “true” only if the environment is not nested and we are at the “first level”.

```

3514 \cs_new_protected:Nn \__enumext_safe_exec:
3515 {
3516     \__enumext_internal_mini_page:
3517     \__enumext_is_not_nested:
3518     \int_incr:N \l__enumext_level_int
3519     \int_compare:nNnT { \l__enumext_level_int } > { 4 }
3520     { \msg_fatal:nn { enumext } { list-too-deep } }
3521     \bool_set_true:N \l__enumext_standar_bool
3522     \bool_set_false:N \l__enumext_starred_bool
3523     \__enumext_is_on_first_level:
3524 }

```

(End of definition for \\_\_enumext\_safe\_exec:.)

`\__enumext_parse_keys:n` The `\__enumext_parse_store_keys:n` function first we will clear the variable `\l__enumext_series_str` used by the key `series` and then we check if we are at the “first level”, if so we process the `⟨keys⟩` and then execute the function `\__enumext_parse_series:n` used by the key `series` and call the function `\__enumext_nested_base_line_fix:` used by the key `base-fix`, otherwise we will pass the `⟨keys⟩` to the inner levels of the environment then we execute the function `\__enumext_store_active_keys:n` and reprocess the `⟨keys⟩` to pass them to the storage `⟨sequence⟩` if the key `save-key` is not active.

```

3525 \cs_new_protected:Npn \__enumext_parse_keys:n #1
3526 {
3527     \tl_if_novalue:nF {#1}
3528     {
3529         \str_clear:N \l__enumext_series_str
3530         \int_compare:nNnTF { \l__enumext_level_int } = { 1 }
3531         {
3532             \keys_set:nn { enumext / level-1 } {#1}
3533             \__enumext_parse_series:n {#1}
3534             \__enumext_nested_base_line_fix:
3535         }
3536         {
3537             \exp_args:Ne \keys_set:nn
3538             { enumext / level-\int_use:N \l__enumext_level_int } {#1}
3539         }
3540         \__enumext_store_active_keys:n {#1}
3541     }
3542 }

```

(End of definition for \\_\_enumext\_parse\_keys:n.)

`\__enumext_start_store_level:` The `\__enumext_start_store_level:` and `\__enumext_stop_store_level:` functions activate the level saving mechanism for storage in `⟨sequence⟩` for the command `\anskey` and the environment `anskey*`.

```

3543 \cs_new_protected:Nn \__enumext_start_store_level:
3544 {
3545     \bool_lazy_all:nT
3546     {
3547         { \bool_if_p:N \l__enumext_store_active_bool }
3548         { \bool_not_p:n { \l__enumext_keyans_env_bool } }

```

```

3549     { \bool_if_p:N \g__enumext_standar_bool }
3550   }
3551   {
3552     \int_compare:nNnT { \l__enumext_level_int } > { 1 }
3553     {
3554       \bool_set_true:c { l__enumext_store_upper_level_ \__enumext_level: _bool }
3555       \__enumext_store_level_open:
3556     }
3557   }

```

If `enumext` are nested in `enumext*` add `\__enumext_store_level_open:` to preserve the stored structure.

```

3558   \bool_lazy_all:nT
3559   {
3560     { \bool_if_p:N \l__enumext_store_active_bool }
3561     { \bool_not_p:n { \l__enumext_keyans_env_bool } }
3562     { \int_compare_p:nNn { \l__enumext_level_h_int } = { 1 } }
3563   }
3564   {
3565     \int_compare:nNnT { \l__enumext_level_int } > { 0 }
3566     {
3567       \bool_set_true:c { l__enumext_store_upper_level_ \__enumext_level: _bool }
3568       \__enumext_store_level_open:
3569     }
3570   }
3571 }

```

Close the stored structure.

```

3572 \cs_new_protected:Nn \__enumext_stop_store_level:
3573 {
3574   \bool_if:cT { l__enumext_store_upper_level_ \__enumext_level: _bool }
3575   {
3576     \__enumext_store_level_close:
3577   }
3578 }

```

(End of definition for `\__enumext_start_store_level:` and `\__enumext_stop_store_level:.`)

`\__enumext_before_list:` The function `\__enumext_before_list:` first calls the function `\__enumext_vspace_above:` used by the keys `above` and `above*`, then calls the function `\__enumext_before_args_exec:` used by the key `before*` and finally execute the function `\__enumext_check_ans_active:` for the check answer mechanism.

```

3579 \cs_new_protected:Nn \__enumext_before_list:
3580 {
3581   \__enumext_vspace_above:
3582   \__enumext_before_args_exec:
3583   \__enumext_check_ans_active:

```

When the `mini-env` key is active it will set the value of the `\l__enumext_minipage_right_X_dim` to be the *width* of the `\__enumext_mini_page` environment on the “right side”, using this value together with the value of the `\l__enumext_minipage_hsep_X_dim` set by the `mini-sep` key, the value of `\l__enumext_minipage_left_X_dim` will be set, which will be the *width* of `\__enumext_mini_page` environment on the “left side”, always having a current `\linewidth` as *maximum width* between them.

```

3584   \dim_compare:nNnT
3585   { \dim_use:c { l__enumext_minipage_right_ \__enumext_level: _dim } } > { \c_zero_dim }
3586   {
3587     \dim_set:cn { l__enumext_minipage_left_ \__enumext_level: _dim }
3588     {
3589       \linewidth
3590       - \dim_use:c { l__enumext_minipage_right_ \__enumext_level: _dim }
3591       - \dim_use:c { l__enumext_minipage_hsep_ \__enumext_level: _dim }
3592     }

```

The boolean variable `\l__enumext_minipage_active_X_bool` will be activated and the integer variable `\g__enumext_minipage_stat_int` used by the `\miniright` command will be incremented, then the function `\__enumext_minipage_add_space:` is called and the `\__enumext_mini_page` environment on the “left side” will be initialized followed by the “vertical spacing” applied to preserve the “baseline” between the *left* and *right* side environments. After these actions, the function `\__enumext_multicols_start:` is called to handle the `multicols` environment.

```

3593   \bool_set_true:c { l__enumext_minipage_active_ \__enumext_level: _bool }
3594   \int_gincr:N \g__enumext_minipage_stat_int
3595   \__enumext_minipage_add_space:
3596   \noindent
3597   \__enumext_mini_page{ \dim_use:c { l__enumext_minipage_left_ \__enumext_level: _dim } }

```

```

3598     }
3599     \__enumext_multicols_start:
3600 }

```

(End of definition for \\_\_enumext\_before\_list:.)

`\__enumext_multicols_start:` The function `\__enumext_multicols_start:` will start the `multicols` environment according to the value passed by the `columns` key, then set the default value for `\columnsep` when `columns-sep=0pt` and set the value of `\multicolsep` equal to zero and leave `\columnseprule` equal to zero for inner levels.

```

3601 \cs_new_protected:Nn \__enumext_multicols_start:
3602 {
3603   \int_compare:nNnT
3604   { \int_use:c { l__enumext_columns_ \__enumext_level: _int } } > { 1 }
3605   {
3606     \dim_compare:nNnT
3607     { \dim_use:c { l__enumext_columns_sep_ \__enumext_level: _dim } } = { \c_zero_dim }
3608     {
3609       \dim_set:cn { l__enumext_columns_sep_ \__enumext_level: _dim }
3610       {
3611         ( \dim_use:c { l__enumext_labelwidth_ \__enumext_level: _dim }
3612         + \dim_use:c { l__enumext_labelsep_ \__enumext_level: _dim }
3613         ) / \int_use:c { l__enumext_columns_ \__enumext_level: _int }
3614         - \dim_use:c { l__enumext_listoffset_ \__enumext_level: _dim }
3615       )
3616     }
3617     \dim_set_eq:Nc \columnsep { l__enumext_columns_sep_ \__enumext_level: _dim }
3618     \int_compare:nNnT { \l__enumext_level_int } > { 1 }
3619     {
3620       \dim_zero:N \columnseprule
3621     }
3622   }
3623 }

```

We will calculate the *vertical spacing* settings for the `multicols` environment using the function `\__enumext_multi_addvspace:`, apply our “vertical adjust spacing”, then start the `multicols` environment.

```

3622   \bool_if:cF { l__enumext_minipage_active_ \__enumext_level: _bool }
3623   {
3624     \skip_zero:N \multicolsep
3625     \__enumext_multi_addvspace:
3626   }
3627   \raggedcolumns
3628   \begin{multicols}{ \int_use:c { l__enumext_columns_ \__enumext_level: _int } }
3629 }
3630 }

```

(End of definition for \\_\_enumext\_multicols\_start:.)

`\__enumext_multicols_stop:` The function `\__enumext_multicols_stop:` will stop the `multicols` environment and apply our “vertical adjust” spacing.

```

3631 \cs_new_protected:Nn \__enumext_multicols_stop:
3632 {
3633   \int_compare:nNnTF
3634   { \int_use:c { l__enumext_columns_ \__enumext_level: _int } } > { 1 }
3635   {
3636     \__enumext_stop_list:
3637     \__enumext_stop_store_level:
3638     \end{multicols}
3639     \__enumext_unskip_unkern:
3640     \__enumext_unskip_unkern:
3641     \par\addvspace{ \skip_use:c { l__enumext_multicols_below_ \__enumext_level: _skip } }
3642   }
3643   {
3644     \__enumext_stop_list:
3645     \__enumext_stop_store_level:
3646   }
3647 }

```

(End of definition for \\_\_enumext\_multicols\_stop:.)

`\__enumext_after_list:` The function `\__enumext_after_list:` first check the state of the boolean variable `\l__enumext_minipage_active_X_bool`, if it is “true” a small test will be executed to check if we have omitted the



use of `\miniright` (the `__enumext_mini_page` environment has not been closed), then close `__enumext-mini_page` and add the *adjusted vertical space* `\l__enumext_minipage_after_skip`, otherwise we will close the `multicols` environment.

```

3648 \cs_new_protected:Nn \__enumext_after_list:
3649 {
3650   \bool_if:cTF { \l__enumext_minipage_active_ \__enumext_level: _bool }
3651   {
3652     \int_compare:nNt { \g__enumext_minipage_stat_int } = { 1 }
3653     {
3654       \msg_warning:nn { enumext } { missing-miniright }
3655       \miniright
3656     }
3657     \int_gzero:N \g__enumext_minipage_stat_int
3658     \__enumext_unskip_unkern: % remove topsep + [partopsep]
3659     \end__enumext_mini_page
3660   }
3661   {
3662     \__enumext_multicols_stop:
3663   }

```

Now we will execute the functions `\__enumext_after_stop_list:` used by the key `after`, `\__enumext-check_ans_key_hook:` used by the key `check-ans`, `\__enumext_vspace_below:` used by the keys `below` and `below*`. Finally set `\l__enumext_standar_bool` to false and call the function `\__enumext_resume-save_counter:` used by the `series`, `resume` and `resume*` keys.

```

3664   \__enumext_after_stop_list:
3665   \__enumext_check_ans_key_hook:
3666   \__enumext_vspace_below:
3667   \bool_set_false:N \l__enumext_standar_bool
3668   \__enumext_resume_save_counter:
3669 }

```

As we don't want our check to be executed `check-ans` by levels but on the complete list, we will take it out of the `enumext` environment using the “hook” function `\__enumext_after_env:nn`.

```

3670 \__enumext_after_env:nn {enumext} { \__enumext_execute_after_env: }

```

(End of definition for `\__enumext_after_list:.`)

## 12.39 The environment `keyans`

The environment `keyans` also based on lists. The main differences with the `enumext` environment are the *nesting* and the way the *answers* (choice) will be stored and checked, this environment is intended exclusively for “multiple choice questions”.

**keyans** Now we define the environment `keyans` also based on lists.

```

3671 \NewDocumentEnvironment{keyans}{0}{}
3672 {
3673   \__enumext_keyans_safe_exec:
3674   \__enumext_keyans_parse_keys:n {#1}
3675   \__enumext_before_list_v:
3676   \__enumext_start_list:nn
3677   { \tl_use:N \l__enumext_label_v_tl }
3678   {
3679     \__enumext_list_arg_two_v:
3680     \__enumext_before_keys_exec_v:
3681   }
3682   \__enumext_keyans_set_item_width:
3683   \__enumext_after_args_exec_v:
3684 }
3685 {
3686   \__enumext_check_starred_cmd:n { item }
3687   \__enumext_after_list_v:
3688 }

```

(End of definition for `keyans`. This function is documented on page 14.)

`\__enumext_keyans_set_item_width:`

The function `\__enumext_keyans_set_item_width:` will set the value of `\itemwidth` taking into account the value established by the `list-offset` key.

```

3689 \cs_new_protected:Nn \__enumext_keyans_set_item_width:
3690 {
3691   \dim_set:Nn \itemwidth
3692   {
3693     \linewidth

```

```

3694     }
3695     \dim_compare:nT
3696     {
3697         \l__enumext_listoffset_v_dim != \c_zero_dim
3698     }
3699     {
3700         \dim_sub:Nn \itemwidth
3701         {
3702             \l__enumext_listoffset_v_dim
3703         }
3704     }
3705 }

```

(End of definition for `\__enumext_keyans_set_item_width:`)

`\__enumext_keyans_safe_exec:`

The `keyans` environment will only be available if the `save-ans` key is active and can only be used at the “first level” within the `enumext` environment. We do not want the environment to be nested, so we will set a maximum at this point. If the conditions are not met, an error message will be returned.

```

3706 \cs_new_protected:Nn \__enumext_keyans_safe_exec:
3707 {
3708     \bool_if:NF \l__enumext_store_active_bool
3709     {
3710         \msg_error:nnnn { enumext } { wrong-place } { keyans } { save-ans }
3711     }
3712     \int_incr:N \l__enumext_keyans_level_int
3713     \bool_set_true:N \l__enumext_keyans_env_bool
3714     \__enumext_keyans_name_and_start:
3715     % Set false for interfering with enumext nested in keyans (yes, its possible and crayze)
3716     \bool_set_false:N \l__enumext_store_active_bool
3717     \int_compare:nNnT { \l__enumext_keyans_level_int } > { 1 }
3718     {
3719         \msg_error:nn { enumext } { keyans-nested }
3720     }
3721     \int_compare:nNnT { \l__enumext_level_int } > { 1 }
3722     {
3723         \msg_error:nn { enumext } { keyans-wrong-level }
3724     }
3725 }

```

(End of definition for `\__enumext_keyans_safe_exec:`)

`\__enumext_keyans_parse_keys:n`

Parse [`<key = val>`] for `keyans` environment.

```

3726 \cs_new_protected:Npn \__enumext_keyans_parse_keys:n #1
3727 {
3728     \keys_set:nn { enumext / keyans } {#1}
3729 }

```

(End of definition for `\__enumext_keyans_parse_keys:n`)

`\__enumext_before_list_v:`  
`\__enumext_keyans_multicols_start:`  
`\__enumext_keyans_multicols_stop:`  
`\__enumext_after_list_v:`

Same implementation as the one used in the `enumext` environment.

```

3730 \cs_new_protected:Nn \__enumext_before_list_v:
3731 {
3732     \__enumext_vspace_above_v:
3733     \__enumext_before_args_exec_v:
3734     \dim_compare:nNnT { \l__enumext_minipage_right_v_dim } > { \c_zero_dim }
3735     {
3736         \dim_set:Nn \l__enumext_minipage_left_v_dim
3737         {
3738             \linewidth - \l__enumext_minipage_right_v_dim - \l__enumext_minipage_hsep_v_dim
3739         }
3740         \bool_set_true:N \l__enumext_minipage_active_v_bool
3741         \int_gincr:N \g__enumext_minipage_stat_int
3742         \__enumext_keyans_minipage_add_space:
3743         \__enumext_mini_page{ \l__enumext_minipage_left_v_dim }
3744     }
3745     \__enumext_keyans_multicols_start:
3746 }
3747 \cs_new_protected:Nn \__enumext_keyans_multicols_start:
3748 {
3749     \int_compare:nNnT { \l__enumext_columns_v_int } > { 1 }
3750     {

```

```

3751 \dim_compare:nNnT { \l__enumext_columns_sep_v_dim } = { \c_zero_dim }
3752 {
3753   \dim_set:Nn \l__enumext_columns_sep_v_dim
3754   {
3755     (
3756       \l__enumext_labelwidth_v_dim + \l__enumext_labelsep_v_dim
3757     ) / \l__enumext_columns_v_int
3758     - \l__enumext_listoffset_v_dim
3759   }
3760 }
3761 \dim_set_eq:NN \columnsep \l__enumext_columns_sep_v_dim
3762 \dim_zero:N \columnseprule % no rule here
3763 \bool_if:NF \l__enumext_minipage_active_v_bool
3764 {
3765   \skip_zero:N \multicolsep
3766   \__enumext_keyans_multi_addvspace:
3767 }
3768 \raggedcolumns
3769 \begin{multicols}{\l__enumext_columns_v_int}
3770 }
3771 }
3772 \cs_new_protected:Nn \__enumext_keyans_multicols_stop:
3773 {
3774   \int_compare:nNnTF { \l__enumext_columns_v_int } > { 1 }
3775   {
3776     \__enumext_stop_list:
3777     \end{multicols}
3778     \__enumext_unskip_unkern:
3779     \__enumext_unskip_unkern:
3780     \par\addvspace{ \l__enumext_multicols_below_v_skip }
3781   }
3782   {
3783     \__enumext_stop_list:
3784   }
3785 }
3786 \cs_new_protected:Nn \__enumext_after_list_v:
3787 {
3788   \bool_if:NTF \l__enumext_minipage_active_v_bool
3789   {
3790     \int_compare:nNnT { \g__enumext_minipage_stat_int } = { 1 }
3791     {
3792       \msg_warning:nn { enumext } { missing-miniright }
3793       \miniright
3794     }
3795     \int_gzero:N \g__enumext_minipage_stat_int
3796     \__enumext_unskip_unkern: % remove \topsep + [\partopsep]
3797     \end__enumext_mini_page
3798     \par\addvspace{ \l__enumext_minipage_after_skip }
3799   }
3800   {
3801     \__enumext_keyans_multicols_stop:
3802   }
3803   \bool_set_false:N \l__enumext_keyans_env_bool
3804   \__enumext_after_stop_list_v:
3805   \__enumext_vspace_below_v:
3806 }

```

(End of definition for `\__enumext_before_list_v:` and others.)

## 12.40 Tagging PDF support for non-standart list environments

The  $\LaTeX$  release 2022-06-01 brings automatic support for tagPDF in several aspects, including the standart *list environments* and the `list` environment. Unfortunately non-standard *list environments* like `keyanspic` or the horizontal list environments `enumext*` and `keyans*` are not structured in a nice way, i.e. the expected result in the PDF file is the expected one, but the underlying structure is not correct. In simple terms, for tagPDF a list environment is a list environment, no matter what it looks like in the PDF file.

To maintain a correct `list` structure when `\DocumentMetadata` is active, it is necessary to do some things manually. This implementation is an adaptation of my answer thanks to Ulrike Fischer's comments in [How can I modify my `\item` redefinition to be compatible with tagging-pdf.](#)

### 12.40.1 Socket for tagging support in enumext\* and keyans\*

```
start-list-tags
stop-start-tags
stop-list-tags
__enumext_start_list_tag:n
  __enumext_stop_start_list_tag:
__enumext_stop_list_tag:n
```

We will first define the necessary sockets and their behavior for `enumext*` and `keyans*`.

```
3807 \socket_new:nn {tagsupport/enumext/starred}{ 1 }
3808 \socket_new_plug:nnn {tagsupport/enumext/starred} {start-list-tags}
3809 {
3810   \tag_resume:n {#1}
3811   \tag_struct_begin:n {tag=LI}
3812   \tag_struct_begin:n {tag=Lbl}
3813   \tag_mc_begin:n {tag=Lbl}
3814 }
3815 \socket_new_plug:nnn {tagsupport/enumext/starred} {stop-start-tags}
3816 {
3817   \tag_mc_end:
3818   \tag_struct_end:n {tag=Lbl}
3819   \tag_struct_begin:n {tag=LBody}
3820   \tag_struct_begin:n {tag=text-unit}
3821   \tag_struct_begin:n {tag=text}
3822 }
3823 \socket_new_plug:nnn {tagsupport/enumext/starred} {stop-list-tags}
3824 {
3825   \tag_struct_end:n {tag=text}
3826   \tag_struct_end:n {tag=text-unit}
3827   \tag_struct_end:n {tag=LBody}
3828   \tag_struct_end:n {tag=LI}
3829   \tag_suspend:n {#1}
3830 }
```

And now we'll wrap them so that they're only active when `\DocumentMetadata` is present.

```
3831 \cs_new_protected_nopar:Npn __enumext_start_list_tag:n #1
3832 {
3833   \IfDocumentMetadataTF
3834   {
3835     \socket_assign_plug:nn {tagsupport/enumext/starred} {start-list-tags}
3836     \socket_use:n {tagsupport/enumext/starred} {#1}
3837   } {}
3838 }
3839 \cs_new_protected_nopar:Nn __enumext_stop_start_list_tag:
3840 {
3841   \IfDocumentMetadataTF
3842   {
3843     \socket_assign_plug:nn {tagsupport/enumext/starred} {stop-start-tags}
3844     \socket_use:nn {tagsupport/enumext/starred} { }
3845   } {}
3846 }
3847 \cs_new_protected_nopar:Npn __enumext_stop_list_tag:n #1
3848 {
3849   \IfDocumentMetadataTF
3850   {
3851     \socket_assign_plug:nn {tagsupport/enumext/starred} {stop-list-tags}
3852     \socket_use:nn {tagsupport/enumext/starred} {#1}
3853   } {}
3854 }
```

*(End of definition for start-list-tags and others.)*

### 12.40.2 Socket for tagging support in keyanspic

```
start-list-tags
stop-start-tags
stop-list-tags
__enumext_anspic_start_list_tag:
__enumext_anspic_stop_start_list_tag:
__enumext_anspic_stop_list_tag:
```

We will first define the necessary sockets and their behavior for `keyanspic`.

```
3855 \socket_new:nn {tagsupport/enumext/keyanspic}{ 0 }
3856 \socket_new_plug:nnn {tagsupport/enumext/keyanspic} {start-list-tags}
3857 {
3858   \tag_resume:n {keyanspic}
3859   \tag_struct_begin:n {tag=LI}
3860   \tag_struct_begin:n {tag=Lbl}
3861   \tag_mc_begin:n {tag=Lbl}
3862 }
3863 \socket_new_plug:nnn {tagsupport/enumext/keyanspic} {stop-start-tags}
3864 {
3865   \tag_mc_end:
3866   \tag_struct_end:n {tag=Lbl}
3867   \tag_struct_begin:n {tag=LBody}
3868   \tag_struct_begin:n {tag=text-unit}
```

```
3869 \tag_struct_begin:n {tag=text}
3870 \tag_mc_begin:n {tag=text}
3871 }
3872 \socket_new_plug:nnn {tagsupport/enumext/keyanspic} {stop-list-tags}
3873 {
3874 \tag_mc_end:
3875 \tag_struct_end:n {tag=text-unit}
3876 \tag_struct_end:n {tag=text}
3877 \tag_struct_end:n {tag=LBody}
3878 \tag_struct_end:n {tag=LI}
3879 \tag_suspend:n {keyanspic}
3880 }
```

And now we'll wrap them so that they're only active when \DocumentMetadata is present.

```
3881 \cs_new_protected_nopar:Nn \__enumext_anspic_start_list_tag:
3882 {
3883 \IfDocumentMetadataTF
3884 {
3885 \socket_assign_plug:nn {tagsupport/enumext/keyanspic} {start-list-tags}
3886 \socket_use:n {tagsupport/enumext/keyanspic}
3887 } {}
3888 }
3889 \cs_new_protected_nopar:Nn \__enumext_anspic_stop_start_list_tag:
3890 {
3891 \IfDocumentMetadataTF
3892 {
3893 \socket_assign_plug:nn {tagsupport/enumext/keyanspic} {stop-start-tags}
3894 \socket_use:nn {tagsupport/enumext/keyanspic}
3895 } {}
3896 }
3897 \cs_new_protected_nopar:Nn \__enumext_anspic_stop_list_tag:
3898 {
3899 \IfDocumentMetadataTF
3900 {
3901 \socket_assign_plug:nn {tagsupport/enumext/keyanspic} {stop-list-tags}
3902 \socket_use:nn {tagsupport/enumext/keyanspic}
3903 } {}
3904 }
```

(End of definition for start-list-tags and others.)

12.41 The environment keyanspic and \anspic

The `keyanspic` environment is a list-based environment that uses the same configuration for “spacing” and `<label>` as the `keyans` environment, but it does not use `\item`. The `<contents>` are passed to the environment by means of the `\anspic` command and are placed inside `minipage` environments, with the `<label>` underneath, adjusting widths according to the options passed to the environment.

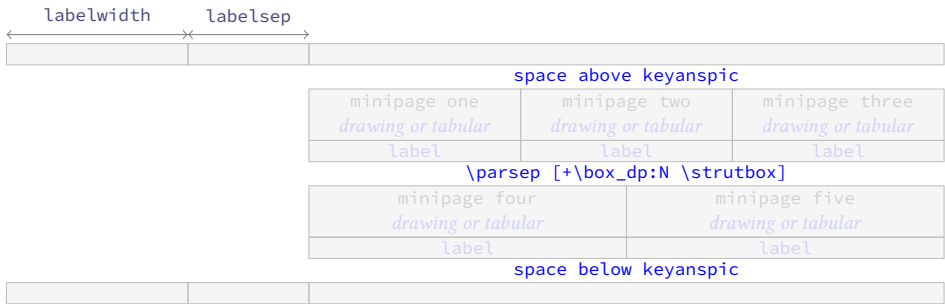


Figure 12: Representation of the `keyanspic` spacing in `enumext`.

This implementation is adapted from the answer given by Enrico Gregorio in [How to process the body of an environment and divide it by a \macro?](#).

12.41.1 The environment keyanspic

The environment we wish to build will be based on the `list` environment and will take two optional arguments, the *starred argument* `*` will set the position of the `<label>` to the top if present and bottom otherwise, the second optional argument will process the number of `drawing` or `tabular` that will be on top, bottom or inline when present or not.

The function `\__enumext_keyans_pic_safe_exec:n` check the starred argument and nested level position inside the `enumext` environment. We will set the state of the variable `\l__enumext_keyans_pic_star_bool` along with the value of the variable `\l__enumext_keyans_pic_label_pos_str` according to the presence of the starred argument.

```

3905 \cs_new_protected:Npn \__enumext_keyans_pic_safe_exec:n #1
3906 {
3907   \int_incr:N \l__enumext_keyans_pic_level_int
3908   \int_compare:nNnT { \l__enumext_keyans_pic_level_int } > { 1 }
3909   {
3910     \msg_error:nn { enumext } { keyanspic-nested }
3911   }
3912   \__enumext_keyans_name_and_start:
3913   \bool_if:nTF { #1 }
3914   {
3915     \bool_set_true:N \l__enumext_keyans_pic_star_bool
3916     \str_set:Nn \l__enumext_keyans_pic_label_pos_str { t }
3917   }
3918   {
3919     \str_set:Nn \l__enumext_keyans_pic_label_pos_str { b }
3920   }
3921 }

```

(End of definition for \\_\_enumext\_keyans\_pic\_safe\_exec:n.)

\\_\_enumext\_keyans\_pic\_skip\_abs:N The function \\_\_enumext\_keyans\_pic\_skip\_abs:N will return a positive value \parsep.

```

3922 \cs_new_protected:Npn \__enumext_keyans_pic_skip_abs:N #1
3923 {
3924   \dim_compare:nNnT { #1 } < { \c_zero_dim }
3925   {
3926     \skip_set:Nn #1 { -#1 }
3927   }
3928 }

```

(End of definition for \\_\_enumext\_keyans\_pic\_skip\_abs:N.)

\\_\_enumext\_keyans\_pic\_arg\_two: The \\_\_enumext\_keyans\_pic\_arg\_two: function will be used in the second argument of the list environment that defines the `keyanspic` environment, with this we will take the configuration of the spaces and the keys `label` and `wrap-label` from the `keyans` environment.

The first thing we need to do is set the boolean variable `\l__enumext_leftmargin_tmp_v_bool` handled by the `list-indent` key to false, then copy the definition of the second list argument from the `keyans` environment and make sure that `\parsep` does not have a negative value.

```

3929 \cs_new_protected:Nn \__enumext_keyans_pic_arg_two:
3930 {
3931   \bool_set_false:N \l__enumext_leftmargin_tmp_v_bool
3932   \__enumext_list_arg_two_v:
3933   \__enumext_keyans_pic_skip_abs:N \parsep

```

Now we increment the `enumXv` counter of the `keyans` environment and save the total height of our `\label` in `\l__enumext_anspic_label_htdp_dim` and we will adjust the values of `\parsep` only if the starred argument is NOT present (default version).

```

3934   \bool_if:NF \l__enumext_keyans_pic_star_bool
3935   {
3936     \stepcounter { enumXv }
3937     \hbox_set:Nn \l__enumext_anspic_label_box { \l__enumext_label_v_tl }
3938     \dim_set:Nn \l__enumext_anspic_label_htdp_dim
3939     {
3940       \box_ht_plus_dp:N \l__enumext_anspic_label_box
3941     }
3942     \skip_add:Nn \parsep
3943     {
3944       \l__enumext_anspic_label_htdp_dim + \box_dp:N \strutbox
3945     }
3946     \skip_gset_eq:NN \g__enumext_keyans_pic_parsep_skip \parsep
3947   }

```

Finally we adjust the value of `\leftmargin` and `\topsep` then set `\labelwidth`, `\labelsep`, `\partopsep` and `\itemsep` to zero so that the horizontal and vertical space is not affected.

```

3948   \dim_add:Nn \leftmargin { -\labelwidth - \labelsep }
3949   \skip_add:Nn \topsep { 0.5\box_dp:N \strutbox }
3950   \dim_zero:N \labelwidth
3951   \dim_zero:N \listparindent
3952   \dim_zero:N \labelsep
3953   \skip_zero:N \partopsep
3954   \skip_zero:N \itemsep
3955 }

```

(End of definition for `\__enumext_keyans_pic_arg_two:`.)

`keyanspic` Now we define the environment `keyanspic` based on list. The starred argument will determine whether the *labels* will be displayed “above” or “below” the drawing or tabular. The second optional argument [*number above, number below*] will determine the number of `minipage` environments that will be above and below separated by `\parsep` within it.

```

3956 \NewDocumentEnvironment{keyanspic}{ s o }
3957 {
3958   \__enumext_keyans_pic_safe_exec:n { #1 }
3959   \begin{list} { } { \__enumext_keyans_pic_arg_two: }
3960   \IfDocumentMetadataTF
3961   {
3962     \tag_suspend:n {list}
3963   }{}
3964   \item[] \scan_stop:
3965   % paranoia
3966   \RenewDocumentCommand \item {}
3967   {
3968     \msg_error:nn { enumext } { keyanspic-item-cmd }
3969   }
3970   \IfDocumentMetadataTF
3971   {
3972     \tag_resume:n {keyanspic}
3973     \tag_tool:n {para/tagging=false}
3974     \tag_suspend:n {keyanspic}
3975   } { }
3976 }

```

If the optional argument is not present, the number of times the `\anspic` command appears will be counted from `\l__enumext_keyans_pic_body_seq` and placed in `minipage` environments on a single line. Finally we check if `\anspic*` has been used, set the counter to zero and apply our “adjusted” vertical space below the environment.

```

3977 {
3978   \IfDocumentMetadataTF
3979   {
3980     \tag_resume:n {keyanspic}
3981     \tag_struct_begin:n {tag=L,attribute=enumerate}
3982   } { }
3983   \tl_if_novalue:nTF { #2 }
3984   {
3985     \__enumext_keyans_pic_do:e { \seq_count:N \l__enumext_keyans_pic_body_seq }
3986   }
3987   { \__enumext_keyans_pic_do:n { #2 } }
3988   \IfDocumentMetadataTF
3989   {
3990     \tag_suspend:n {keyanspic}
3991   } { }
3992   \end{list}
3993   \IfDocumentMetadataTF { \tag_struct_end: \tag_struct_end: } { }
3994   \__enumext_check_starred_cmd:n { anspic }
3995   \setcounter { enumXvi } { 0 }
3996   \bool_if:NTF \l__enumext_keyans_pic_star_bool
3997   {
3998     \par\addvspace{ 0.5\box_dp:N \strutbox }
3999   }
4000   {
4001     \par\addvspace{ \g__enumext_keyans_pic_parsep_skip }
4002   }
4003   %\bool_set_false:N \l__enumext_store_active_bool
4004 }

```

(End of definition for `keyanspic`. This function is documented on page 15.)

`\__enumext_keyans_pic_do:n` The optional argument is split by comma and is handled directly by the function `\__enumext_keyans_pic_do:n` and passed to the function `\__enumext_keyans_pic_row:n`.

```

4005 \cs_new_protected:Nn \__enumext_keyans_pic_do:n
4006 {
4007   \clist_map_function:nN { #1 } \__enumext_keyans_pic_row:n
4008 }
4009 \cs_generate_variant:Nn \__enumext_keyans_pic_do:n { e }

```



(End of definition for `\__enumext_keyans_pic_do:n`.)

`\__enumext_keyans_pic_row:n`

The function `\__enumext_keyans_pic_row:n` will set the widths for the `minipage` environments and place the content `⟨stored⟩` by `\anspic*` in the `\l__enumext_keyans_pic_body_seq` sequence inside them.

```

4010 \cs_new_protected:Nn \__enumext_keyans_pic_row:n
4011 {
4012   \dim_set:Nn \l__enumext_keyans_pic_width_dim { \linewidth / #1 }
4013   \int_set:Nn \l__enumext_keyans_pic_above_int { \l__enumext_keyans_pic_below_int }
4014   \int_set:Nn \l__enumext_keyans_pic_below_int { \l__enumext_keyans_pic_above_int + #1 }
4015   \int_step_inline:nnn
4016     { \l__enumext_keyans_pic_above_int + 1 }
4017     { \l__enumext_keyans_pic_below_int }
4018     {
4019       \IfDocumentMetadataTF
4020       {
4021         \tag_suspend:n {minipage}
4022       } { }
4023       \begin{minipage}[ \l__enumext_keyans_pic_label_pos_str ]{ \l__enumext_keyans_pic_width_dim }
4024         \centering
4025         \seq_item:Nn \l__enumext_keyans_pic_body_seq { ##1 }
4026       \end{minipage}
4027       \IfDocumentMetadataTF
4028       {
4029         \tag_resume:n {minipage}
4030       } { }
4031     }
4032   \par
4033 }

```

(End of definition for `\__enumext_keyans_pic_row:n`.)

#### 12.41.2 The command `\anspic`

`\anspic`

The `\anspic` command take three arguments, the starred (\*) versions `\anspic*` and `\anspic* [⟨content⟩]` store the current `⟨label⟩` next to the `[⟨content⟩]` if it is present in the `⟨sequence⟩` and `⟨prop list⟩` defined by `save-ans` key. This command is used as a replacement for `\item` in the `keyanspic` environment.

```

4034 \NewDocumentCommand \anspic { s o +m }
4035 {

```

We check that the command is active in the `keyanspic` environment only if the `save-ans` key is present, otherwise we return an error.

```

4036   \bool_if:NF \l__enumext_store_active_bool
4037   {
4038     \msg_error:nnnn { enumext } { wrong-place }{ keyanspic }{ save-ans }
4039   }
4040   \int_compare:nNnT { \l__enumext_level_int } > { 1 }
4041   {
4042     \msg_error:nn { enumext } { keyanspic-wrong-level }
4043   }
4044   \int_compare:nNnT { \l__enumext_keyans_level_int } = { 1 }
4045   {
4046     \msg_error:nnnn { enumext } { command-wrong-place }{ anspic }{ keyans }
4047   }

```

The three arguments are handled by the function `\__enumext_keyans_anspic_code:nnn` and stored in the sequence `\l__enumext_keyans_pic_body_seq` which is processed by the `keyanspic` environment.

```

4048   \seq_put_right:Nn \l__enumext_keyans_pic_body_seq
4049   {
4050     \__enumext_keyans_anspic_code:nnn { #1 } { #2 } { #3 }
4051   }
4052 }

```

(End of definition for `\anspic`. This function is documented on page 15.)

`\__enumext_anspic_box_set_dim:n`

`\__enumext_keyans_anspic_label:nnn`

`\__enumext_keyans_anspic_code:nnn`

The function `\__enumext_keyans_anspic_code:nnn` will be in charge of handling the “counter” and `⟨label⟩`, which will have the same configuration as the `keyans` environment.

```

4053 \cs_new_protected:Npn \__enumext_anspic_box_set_dim:n #1
4054 {
4055   \bool_if:NF \l__enumext_keyans_pic_star_bool
4056   {
4057     \IfDocumentMetadataTF
4058     {

```

```

4059         \tag_suspend:n {keyanspic}
4060     } { }
4061     \vbox_set:Nn \l__enumext_anspic_body_box { #1 }
4062     \dim_set:Nn \l__enumext_anspic_body_htdp_dim
4063     {
4064         \box_ht_plus_dp:N \l__enumext_anspic_body_box
4065     }
4066     \IfDocumentMetadataTF
4067     {
4068         \tag_resume:n {keyanspic}
4069     } { }
4070 }
4071 }
4072 % process label
4073 \cs_new_protected:Npn \__enumext_anspic_label:nn #1 #2
4074 {
4075     \makebox[ \l__enumext_keyans_pic_width_dim ][ c ]
4076     {
4077         \bool_if:nT { #1 }
4078         {
4079             \__enumext_keyans_addto_prop:n { #2 }
4080             \__enumext_keyans_store_ref:
4081             \__enumext_keyans_addto_seq:n { #2 }
4082             \int_gincr:N \g__enumext_check_starred_cmd_int
4083             \bool_lazy_or:nnT
4084             { \bool_if_p:N \l__enumext_show_answer_bool }
4085             { \bool_if_p:N \l__enumext_show_position_bool }
4086             {
4087                 \tl_set_eq:NN \l__enumext_label_v_tl \l__enumext_label_vi_tl
4088                 \__enumext_keyans_show_left:n { #2 }
4089                 \tl_set_eq:NN \l__enumext_label_vi_tl \l__enumext_label_v_tl
4090             }
4091         }
4092         \tl_use:N \l__enumext_label_font_style_v_tl
4093         \__enumext_wrapper_label_v:n { \l__enumext_label_vi_tl }
4094         \__enumext_keyans_show_item_opt:
4095     }
4096 }
4097 \cs_new_protected:Npn \__enumext_keyans_anspic_label:nnn #1 #2 #3
4098 {
4099     \stepcounter { enumXvi }
4100     \__enumext_anspic_box_set_dim:n { #3 }
4101     \bool_if:NTF \l__enumext_keyans_pic_star_bool
4102     {
4103         \__enumext_anspic_label:nn { #1 } { #2 }
4104     }
4105     {
4106         \raisebox
4107         {
4108             -\dim_eval:n
4109             {
4110                 \l__enumext_anspic_label_htdp_dim
4111                 + \l__enumext_anspic_body_htdp_dim
4112                 + \box_dp:N \strutbox
4113             }
4114         }
4115         [ opt ] [ opt ]
4116         {
4117             \__enumext_anspic_label:nn { #1 } { #2 }
4118         }
4119     }
4120 }
4121 \cs_new_protected:Nn \__enumext_keyans_anspic_code:nnn
4122 {
4123     \__enumext_anspic_start_list_tag:
4124     \__enumext_keyans_anspic_label:nnn { #1 } { #2 } { #3 }
4125     \__enumext_anspic_stop_start_list_tag:
4126     \\ #3
4127     \__enumext_anspic_stop_list_tag:
4128 }

```

(End of definition for \\_\_enumext\_anspic\_box\_set\_dim:n, \\_\_enumext\_keyans\_anspic\_label:nnn, and \\_\_enumext\_keyans\_

*anspic\_code:nnn.)*

## 12.42 The horizontal environments

Generating *horizontal list environments* is NOT as simple as standard  $\TeX$  list environments. The fundamental part of the code is adapted from the `shortlst` package to a more modern version using `expl3`. It is not possible to redefine `\item` and `\makelabel` as in the vertical *non starred* versions.

### 12.42.1 Functions for item box width

To achieve the horizontal list environment we will capture the `\item` command and the  $\langle content \rangle$  of this in *horizontal box* using `\makebox` for the `label` and a `minipage` environment for the  $\langle content \rangle$  passed to `\item`, we will also add the optional argument ( $\langle number \rangle$ ) to `\item` to be able to *join columns* horizontally, in simple terms, we want `\item` to behave in the same way as in the `enumext` environment but adding an optional first argument ( $\langle number \rangle$ ).

We set the default value for the *width of the box* containing the  $\langle content \rangle$  of the items for `enumext*` environment.

`\__enumext_starred_columns_set_vii:`  
`\__enumext_starred_columns_set_viii:`

```

4129 \cs_new_protected:Nn \__enumext_starred_columns_set_vii:
4130 {
4131   \dim_compare:nNnT { \__enumext_columns_sep_vii_dim } = { \c_zero_dim }
4132   {
4133     \dim_set:Nn \__enumext_columns_sep_vii_dim
4134     {
4135       ( \__enumext_labelwidth_vii_dim + \__enumext_labelsep_vii_dim )
4136       / \__enumext_columns_vii_int
4137     }
4138   }
4139   \int_set:Nn \__enumext_tmpa_vii_int { \__enumext_columns_vii_int - 1 }
4140   \dim_set:Nn \__enumext_item_width_vii_dim
4141   {
4142     ( \linewidth - \__enumext_columns_sep_vii_dim * \__enumext_tmpa_vii_int )
4143     / \__enumext_columns_vii_int
4144     - \__enumext_labelwidth_vii_dim
4145     - \__enumext_labelsep_vii_dim
4146   }

```

When the key `rightmargin` is active we must adjust the values.

```

4147   \dim_compare:nNnT { \__enumext_rightmargin_vii_dim } > { \c_zero_dim }
4148   {
4149     \dim_sub:Nn \__enumext_item_width_vii_dim
4150     {
4151       ( \__enumext_rightmargin_vii_dim * \__enumext_tmpa_vii_int )
4152       / \__enumext_columns_vii_int
4153     }
4154     \dim_add:Nn \__enumext_columns_sep_vii_dim
4155     {
4156       \__enumext_rightmargin_vii_dim
4157     }
4158   }
4159 }

```

Same implementation for the `keyans*` environment.

```

4160 \cs_new_protected:Nn \__enumext_starred_columns_set_viii:
4161 {
4162   \dim_compare:nNnT { \__enumext_columns_sep_viii_dim } = { \c_zero_dim }
4163   {
4164     \dim_set:Nn \__enumext_columns_sep_viii_dim
4165     {
4166       ( \__enumext_labelwidth_viii_dim + \__enumext_labelsep_viii_dim )
4167       / \__enumext_columns_viii_int
4168     }
4169   }
4170   \int_set:Nn \__enumext_tmpa_viii_int { \__enumext_columns_viii_int - 1 }
4171   \dim_set:Nn \__enumext_item_width_viii_dim
4172   {
4173     ( \linewidth - \__enumext_columns_sep_viii_dim * \__enumext_tmpa_viii_int )
4174     / \__enumext_columns_viii_int
4175     - \__enumext_labelwidth_viii_dim
4176     - \__enumext_labelsep_viii_dim
4177   }
4178   \dim_compare:nNnT { \__enumext_rightmargin_viii_dim } > { \c_zero_dim }
4179   {
4180     \dim_sub:Nn \__enumext_item_width_viii_dim

```

```

4181         {
4182             ( \l__enumext_rightmargin_viii_dim * \l__enumext_tmpa_vii_int )
4183             / \l__enumext_columns_viii_int
4184         }
4185     \dim_add:Nn \l__enumext_columns_sep_viii_dim
4186     {
4187         \l__enumext_rightmargin_viii_dim
4188     }
4189 }
4190 }

```

(End of definition for \l\_\_enumext\_starred\_columns\_set\_vii: and \l\_\_enumext\_starred\_columns\_set\_viii:.)

### 12.42.2 Functions for join item columns

\l\_\_enumext\_starred\_joined\_item\_vii:n  
 \l\_\_enumext\_starred\_joined\_item\_viii:n

The functions \l\_\_enumext\_starred\_joined\_item\_vii:n and \l\_\_enumext\_starred\_joined\_item\_viii:n will set the *width* of the box in which the *⟨content⟩* passed to \item(*⟨columns⟩*) will be stored together with the value of \itemwidth for the enumext\* environment.

```

4191 \cs_new_protected:Npn \l__enumext_starred_joined_item_vii:n #1
4192 {
4193     \int_set:Nn \l__enumext_joined_item_vii_int {#1}
4194     \int_compare:nNnT { \l__enumext_joined_item_vii_int } > { \l__enumext_columns_vii_int }
4195     {
4196         \msg_warning:nnee { enumext } { item-joined }
4197         { \int_use:N \l__enumext_joined_item_vii_int }
4198         { \int_use:N \l__enumext_columns_vii_int }
4199         \int_set:Nn \l__enumext_joined_item_vii_int
4200         {
4201             \l__enumext_columns_vii_int - \l__enumext_item_column_pos_vii_int + 1
4202         }
4203     }
4204     \int_compare:nNnT
4205     { \l__enumext_joined_item_vii_int }
4206     >
4207     { \l__enumext_columns_vii_int - \l__enumext_item_column_pos_vii_int + 1 }
4208     {
4209         \msg_warning:nnee { enumext } { item-joined-columns }
4210         { \int_use:N \l__enumext_joined_item_vii_int }
4211         {
4212             \int_eval:n
4213             { \l__enumext_columns_vii_int - \l__enumext_item_column_pos_vii_int + 1 }
4214         }
4215         \int_set:Nn \l__enumext_joined_item_vii_int
4216         {
4217             \l__enumext_columns_vii_int - \l__enumext_item_column_pos_vii_int + 1
4218         }
4219     }
4220     \int_compare:nNnTF { \l__enumext_joined_item_vii_int } > { 1 }
4221     {
4222         \int_set_eq:NN \l__enumext_joined_item_aux_vii_int \l__enumext_joined_item_vii_int
4223         \int_decr:N \l__enumext_joined_item_aux_vii_int
4224         \int_add:Nn \l__enumext_item_column_pos_viii_int { \l__enumext_joined_item_aux_vii_int }
4225         \int_gadd:Nn \g__enumext_item_count_all_vii_int { \l__enumext_joined_item_aux_vii_int }
4226         \dim_set:Nn \l__enumext_joined_width_vii_dim
4227         {
4228             \l__enumext_item_width_vii_dim * \l__enumext_joined_item_vii_int
4229             + ( \l__enumext_labelwidth_vii_dim + \l__enumext_labelsep_vii_dim
4230               + \l__enumext_columns_sep_vii_dim
4231               ) * \l__enumext_joined_item_aux_vii_int
4232         }
4233         \dim_set_eq:NN \itemwidth \l__enumext_joined_width_vii_dim
4234     }
4235     {
4236         \dim_set_eq:NN \l__enumext_joined_width_vii_dim \l__enumext_item_width_vii_dim
4237         \dim_set_eq:NN \itemwidth \l__enumext_item_width_vii_dim
4238     }
4239 }

```

Same implementation for the keyans\* environment.

```

4240 \cs_new_protected:Npn \l__enumext_starred_joined_item_viii:n #1
4241 {
4242     \int_set:Nn \l__enumext_joined_item_viii_int {#1}

```

```

4243 \int_compare:nNt { \l__enumext_joined_item_viii_int } > { \l__enumext_columns_viii_int }
4244 {
4245   \msg_warning:nnee { enumext } { item-joined }
4246   { \int_use:N \l__enumext_joined_item_viii_int }
4247   { \int_use:N \l__enumext_columns_viii_int }
4248   \int_set:Nn \l__enumext_joined_item_viii_int
4249   {
4250     \l__enumext_columns_viii_int - \l__enumext_item_column_pos_viii_int + 1
4251   }
4252 }
4253 \int_compare:nNt
4254 { \l__enumext_joined_item_viii_int }
4255 >
4256 { \l__enumext_columns_viii_int - \l__enumext_item_column_pos_viii_int + 1 }
4257 {
4258   \msg_warning:nnee { enumext } { item-joined-columns }
4259   { \int_use:N \l__enumext_joined_item_viii_int }
4260   {
4261     \int_eval:n
4262     { \l__enumext_columns_viii_int - \l__enumext_item_column_pos_viii_int + 1 }
4263   }
4264   \int_set:Nn \l__enumext_joined_item_viii_int
4265   {
4266     \l__enumext_columns_viii_int - \l__enumext_item_column_pos_viii_int + 1
4267   }
4268 }
4269 \int_compare:nNtF { \l__enumext_joined_item_viii_int } > { 1 }
4270 {
4271   \int_set_eq:NN \l__enumext_joined_item_aux_viii_int \l__enumext_joined_item_viii_int
4272   \int_decr:N \l__enumext_joined_item_aux_viii_int
4273   \int_add:Nn \l__enumext_item_column_pos_viii_int { \l__enumext_joined_item_aux_viii_int }
4274   \int_gadd:Nn \g__enumext_item_count_all_viii_int { \l__enumext_joined_item_aux_viii_int }
4275   \dim_set:Nn \l__enumext_joined_width_viii_dim
4276   {
4277     \l__enumext_item_width_viii_dim * \l__enumext_joined_item_viii_int
4278     + ( \l__enumext_labelwidth_viii_dim + \l__enumext_labelsep_viii_dim
4279         + \l__enumext_columns_sep_viii_dim
4280         ) * \l__enumext_joined_item_aux_viii_int
4281   }
4282   \dim_set_eq:NN \itemwidth \l__enumext_joined_width_viii_dim
4283 }
4284 {
4285   \dim_set_eq:NN \l__enumext_joined_width_viii_dim \l__enumext_item_width_viii_dim
4286   \dim_set_eq:NN \itemwidth \l__enumext_item_width_viii_dim
4287 }
4288 }

```

(End of definition for `\__enumext_starred_joined_item_vii:n` and `\__enumext_starred_joined_item_viii:n`)

### 12.42.3 Functions for mini-env, mini-right and mini-right\* keys

To have compatibility with the tagPDF we close the environment according to the presence or not of the `mini-right` key.

```

\__enumext_start_mini_vii:
\__enumext_stop_mini_vii:

```

The implementation of the `mini-env` key support is almost identical to the one used in the `enumext` and `keyans` environments, the difference is that the `\__enumext_mini_page` environment on the “right side” is executed “after” closing the environment, so it is necessary to make a global copy of the variable `\__enumext_minipage_right_vii_dim` in the variable `\g__enumext_minipage_right_vii_dim`.

```

4289 \cs_new_protected:Nn \__enumext_start_mini_vii:
4290 {
4291   \dim_compare:nNt { \l__enumext_minipage_right_vii_dim } > { \c_zero_dim }
4292   {
4293     \dim_set:Nn \l__enumext_minipage_left_vii_dim
4294     {
4295       \linewidth
4296       - \l__enumext_minipage_right_vii_dim
4297       - \l__enumext_minipage_hsep_vii_dim
4298     }
4299     \bool_set_true:N \l__enumext_minipage_active_vii_bool
4300     \dim_gset_eq:NN
4301     \g__enumext_minipage_right_vii_dim
4302     \l__enumext_minipage_right_vii_dim

```

```

4303     \__enumext_mini_addvspace_vii:
4304     \nointerlineskip\noindent
4305     \__enumext_mini_page{ \l__enumext_minipage_left_vii_dim }
4306   }
4307 }

```

The function `\__enumext_stop_mini_vii:` closes the `\__enumext_mini_page` environment on the “*left side*”, applies `\hfill` and set the variable `\g__enumext_minipage_active_vii_bool` to “*true*” which will be used in the function `\__enumext_after_env:nn` to execute the `minipage` on the “*right side*”.

```

4308 \cs_new_protected:Nn \__enumext_stop_mini_vii:
4309 {
4310   \bool_if:NTF \l__enumext_minipage_active_vii_bool
4311   {
4312     \__enumext_stop_list:
4313     \__enumext_stop_store_level_vii:
4314     \IfDocumentMetadataTF { \tag_resume:n {enumext*} } { }
4315     \end__enumext_mini_page
4316     \hfill
4317     \bool_gset_true:N \g__enumext_minipage_active_vii_bool
4318   }
4319   {
4320     \__enumext_stop_list:
4321     \__enumext_stop_store_level_vii:
4322   }
4323 }

```

Finally we execute the `{\code}` passed to the `mini-right` or `mini-right*` keys stored in the variable `\g__enumext_miniright_code_vii_tl` in the `minipage` environment on the “*right side*”. For compatibility with the `caption` package and possibly other `{\code}` passed to this key, we will pass it to a box and then print it.

```

4324 \__enumext_after_env:nn {enumext*}
4325 {
4326   \bool_if:NT \g__enumext_minipage_active_vii_bool
4327   {
4328     \__enumext_minipage:w [ t ] { \g__enumext_minipage_right_vii_dim }
4329     \legacy_if_gset_false:n { @minipage }
4330     \skip_vertical:N \c_zero_skip
4331     \par\addvspace { \g__enumext_minipage_right_skip }
4332     \bool_if:NF \g__enumext_minipage_center_vii_bool
4333     {
4334       \tl_put_left:Nn \g__enumext_miniright_code_vii_tl
4335       {
4336         \centering
4337       }
4338     }
4339     \vbox_set_top:Nn \l__enumext_miniright_code_vii_box
4340     {
4341       \tl_use:N \g__enumext_miniright_code_vii_tl
4342     }
4343     \box_use_drop:N \l__enumext_miniright_code_vii_box
4344     \skip_vertical:N \c_zero_skip
4345     \__enumext_endminipage:
4346     \par\addvspace{ \g__enumext_minipage_after_skip }
4347   }
4348   \bool_gset_false:N \g__enumext_minipage_active_vii_bool
4349   \bool_gset_true:N \g__enumext_minipage_center_vii_bool
4350   \tl_gclear:N \g__enumext_miniright_code_vii_tl
4351   \dim_gzero:N \g__enumext_minipage_right_vii_dim
4352   \bool_gset_false:N \g__enumext_starred_bool
4353 }

```

(End of definition for `\__enumext_start_mini_vii:` and `\__enumext_stop_mini_vii:.`)

`\__enumext_start_mini_viii:` The implementation of the `mini-env`, `mini-right` and `mini-right*` keys is identical to the one used in the `enumext*` environment.

```

4354 \cs_new_protected:Nn \__enumext_start_mini_viii:
4355 {
4356   \dim_compare:nNnT { \l__enumext_minipage_right_viii_dim } > { \c_zero_dim }
4357   {
4358     \dim_set:Nn \l__enumext_minipage_left_viii_dim
4359     {

```

```

4360         \linewidth
4361         - \l__enumext_minipage_right_viii_dim
4362         - \l__enumext_minipage_hsep_viii_dim
4363     }
4364     \bool_set_true:N \l__enumext_minipage_active_viii_bool
4365     \dim_gset_eq:NN
4366         \g__enumext_minipage_right_viii_dim
4367         \l__enumext_minipage_right_viii_dim
4368     \__enumext_mini_addvspace_viii:
4369     \nointerlineskip\noindent
4370     \__enumext_mini_page{ \l__enumext_minipage_left_viii_dim }
4371 }
4372 }
4373 \cs_new_protected:Nn \__enumext_stop_mini_viii:
4374 {
4375     \bool_if:NTF \l__enumext_minipage_active_viii_bool
4376     {
4377         \__enumext_stop_list:
4378         \IfDocumentMetadataTF { \tag_resume:n {keyans*} } { }
4379         \end__enumext_mini_page
4380         \hfill
4381         \bool_gset_true:N \g__enumext_minipage_active_viii_bool
4382     }
4383     {
4384         \__enumext_stop_list:
4385     }
4386 }
4387 \__enumext_after_env:nn {keyans*}
4388 {
4389     \bool_if:NT \g__enumext_minipage_active_viii_bool
4390     {
4391         \__enumext_mini_page{ \g__enumext_minipage_right_viii_dim }
4392         \par\addvspace { \g__enumext_minipage_right_skip }
4393         \bool_if:NF \g__enumext_minipage_center_viii_bool
4394         {
4395             \tl_put_left:Nn \g__enumext_miniright_code_viii_tl
4396             {
4397                 \centering
4398             }
4399         }
4400         \vbox_set_top:Nn \l__enumext_miniright_code_viii_box
4401         {
4402             \tl_use:N \g__enumext_miniright_code_viii_tl
4403         }
4404         \box_use_drop:N \l__enumext_miniright_code_viii_box
4405         \end__enumext_mini_page
4406         \par\addvspace{ \g__enumext_minipage_after_skip }
4407     }
4408     \bool_gset_false:N \g__enumext_minipage_active_viii_bool
4409     \bool_gset_true:N \g__enumext_minipage_center_viii_bool
4410     \tl_gclear:N \g__enumext_miniright_code_viii_tl
4411     \dim_gzero:N \g__enumext_minipage_right_viii_dim
4412 }

```

(End of definition for \\_\_enumext\_start\_mini\_viii: and \\_\_enumext\_stop\_mini\_viii:.)

#### 12.42.4 Redefining \footnote command

```

\__enumext_footnotetext:nn
\__enumext_renew_footnote:
\__enumext_print_footnote:

```

To keep the correct numbering of \footnote and to make it work correctly in the `enumext*` and `keyans*` environments, it is necessary to redefine the command. This implementation is adapted from the answer given by Clea F. Rees (@cfr) in [footnotes in boxes compatible with hyperref](#).

```

4413 \cs_new_protected:Nn \__enumext_footnotetext:nn
4414 {
4415     \footnotetext[#1]{#2}
4416 }
4417 \cs_new_protected:Nn \__enumext_renew_footnote:
4418 {
4419     \seq_gclear:N \g__enumext_footnote_arg_seq
4420     \seq_gclear:N \g__enumext_footnote_int_seq
4421     \RenewDocumentCommand \footnote { o +m }
4422     {
4423         \tl_if_novalue:nTF {##1}

```



```

4424         {
4425             \stepcounter{footnote}
4426             \int_gset_eq:Nc \g__enumext_footnote_int { c@footnote }
4427         }
4428         {
4429             \int_gset:Nn \g__enumext_footnote_int { ##1 }
4430         }
4431         \footnotemark [ \g__enumext_footnote_int ]
4432         \seq_gput_right:Nn \g__enumext_footnote_arg_seq { ##2 }
4433         \seq_gput_right:NV \g__enumext_footnote_int_seq \g__enumext_footnote_int
4434     }
4435 }
4436 \cs_new_protected:Nn \__enumext_print_footnote:
4437 {
4438     \seq_if_empty:NF \g__enumext_footnote_int_seq
4439     {
4440         \seq_map_pairwise_function:NNN
4441         \g__enumext_footnote_int_seq
4442         \g__enumext_footnote_arg_seq
4443         \__enumext_footnotetext:nn
4444     }
4445 }

```

(End of definition for \\_\_enumext\_footnotetext:nn, \\_\_enumext\_renew\_footnote:, and \\_\_enumext\_print\_footnote:.)

### 12.43 The environment enumext\*

**enumext\*** First we will generate the environment and we will give a temporary definition to \\_\_enumext\_stop\_item\_tmp\_vii: equal to \\_\_enumext\_first\_item\_tmp\_vii: and next to \item equal to \\_\_enumext\_start\_item\_tmp\_vii: which we will redefine later. Unlike the implementation used by the **shortlst** package, we will not set the values of \rightskip and \@rightskip equal to \@flushglue whose value is 0.0pt plus 1.0 fil, in the tests I have performed this fails in some circumstances and different results are obtained when using pdfTeX and LuaTeX.

```

4446 \NewDocumentEnvironment{enumext*}{o }
4447 {
4448     \__enumext_safe_exec_vii:
4449     \__enumext_parse_keys_vii:n {#1}
4450     \__enumext_before_list_vii:
4451     \__enumext_start_store_level_vii:
4452     \__enumext_start_list:nn { }
4453     {
4454         \__enumext_list_arg_two_vii:
4455         \__enumext_before_keys_exec_vii:
4456     }
4457     % Stop tagging
4458     \IfDocumentMetadataTF { \tag_suspend:n {enumext*} } { { }
4459     \__enumext_starred_columns_set_vii:
4460     \item[] \scan_stop:
4461     \cs_set_eq:NN \__enumext_stop_item_tmp_vii: \__enumext_first_item_tmp_vii:
4462     \cs_set_eq:NN \item \__enumext_start_item_tmp_vii:
4463     \ignorespaces
4464 }
4465 {
4466     \IfDocumentMetadataTF { \tag_struct_end:n {tag=text-unit} } { { }
4467     \__enumext_stop_item_tmp_vii:
4468     \__enumext_remove_extra_parsep_vii:
4469     \__enumext_after_list_vii:
4470 }

```

(End of definition for enumext\*. This function is documented on page 5.)

\\_\_enumext\_safe\_exec\_vii: We will first call the function \\_\_enumext\_internal\_mini\_page: to create the environment \\_\_enumext-mini\_page, then the function \\_\_enumext\_is\_not\_nested: which sets \g\_\_enumext\_starred\_bool to true if we are not nested within **enumext**, we will increment \l\_\_enumext\_level\_h\_int to restrict nesting of the environment, set \l\_\_enumext\_starred\_bool to true and finally call the function \\_\_enumext\_is\_on\_first\_level: which sets \l\_\_enumext\_starred\_first\_bool to true if we are not nested, allowing the “storage system” to be used.

```

4471 \cs_new_protected:Nn \__enumext_safe_exec_vii:
4472 {
4473     \__enumext_internal_mini_page:
4474     \__enumext_is_not_nested:

```

```

4475 \int_incr:N \l__enumext_level_h_int
4476 \int_compare:nNtT { \l__enumext_level_h_int } > { 1 }
4477 {
4478   \msg_error:nn { enumext } { nested }
4479 }
4480 \int_compare:nNtT { \l__enumext_keyans_level_h_int } = { 1 }
4481 {
4482   \msg_error:nnn { enumext } { nested-horizontal } { keyans*}
4483 }
4484 \bool_set_true:N \l__enumext_starred_bool
4485 \bool_set_false:N \l__enumext_standar_bool
4486 \__enumext_is_on_first_level:
4487 }

```

(End of definition for \\_\_enumext\_safe\_exec\_vii:.)

\\_\_enumext\_parse\_keys\_vii:n

First we will clear the variable \l\_\_enumext\_series\_str used by the key `series`, process the environment [`key = val`] and execute the function \\_\_enumext\_parse\_series:n and used by the key `series`, then we execute the function \\_\_enumext\_store\_active\_keys\_vii:n and reprocess the `keys` to pass them to the storage `sequence` if the key `save-key` is not active and finally we call the function \\_\_enumext\_nested\_base\_line\_fix: used by the key `base-fix`.

```

4488 \cs_new_protected:Npn \__enumext_parse_keys_vii:n #1
4489 {
4490   \tl_if_novalue:nF {#1}
4491   {
4492     \str_clear:N \l__enumext_series_str
4493     \keys_set:nn { enumext / enumext* } {#1}
4494     \__enumext_parse_series:n {#1}
4495     \__enumext_store_active_keys_vii:n {#1}
4496     \__enumext_nested_base_line_fix:
4497   }
4498 }

```

(End of definition for \\_\_enumext\_parse\_keys\_vii:n.)

\\_\_enumext\_before\_list\_vii:

The function \\_\_enumext\_before\_list\_vii: first calls the function \\_\_enumext\_vspace\_above\_vii: used by the keys `above` and `above*`, then calls the function \\_\_enumext\_check\_ans\_active: for the check answer mechanism and finally calls the functions \\_\_enumext\_before\_args\_exec: and \\_\_enumext\_start\_mini\_vii: used by the keys `before*`, `mini-env`, `mini-right` and `mini-right*`.

```

4499 \cs_new_protected:Nn \__enumext_before_list_vii:
4500 {
4501   \__enumext_vspace_above_vii:
4502   \__enumext_check_ans_active:
4503   \__enumext_before_args_exec_vii:
4504   \__enumext_start_mini_vii:
4505 }

```

(End of definition for \\_\_enumext\_before\_list\_vii:.)

\\_\_enumext\_after\_list\_vii:

The function \\_\_enumext\_after\_list\_vii: first calls the function \\_\_enumext\_stop\_mini\_vii: used by the keys `mini-env`, `mini-right` and `mini-right*`, then to the functions \\_\_enumext\_after\_stop\_list\_vii: used by the key `after`, \\_\_enumext\_check\_ans\_key\_hook: used by the key `check-ans`, \\_\_enumext\_vspace\_below\_vii: used by the keys `below` and `below*`. Finally set \l\_\_enumext\_starred\_bool to false and call the \\_\_enumext\_resume\_save\_counter: function used by the `series`, `resume` and `resume*` keys.

```

4506 \cs_new_protected:Nn \__enumext_after_list_vii:
4507 {
4508   \__enumext_stop_mini_vii:
4509   \__enumext_after_stop_list_vii:
4510   \__enumext_check_ans_key_hook:
4511   \__enumext_vspace_below_vii:
4512   \bool_set_false:N \l__enumext_starred_bool
4513   \__enumext_resume_save_counter:
4514 }

```

(End of definition for \\_\_enumext\_after\_list\_vii:.)

\\_\_enumext\_start\_store\_level\_vii:  
 \\_\_enumext\_stop\_store\_level\_vii:

The \\_\_enumext\_start\_store\_level\_vii: and \\_\_enumext\_stop\_store\_level\_vii: functions activate the level saving mechanism for storage in *sequence* of the \anskey command and anskey\* environment if enumext\* are nested in enumext.

```

4515 \cs_new_protected:Nn \__enumext_start_store_level_vii:
4516 {
4517   \bool_if:NT \l__enumext_store_active_bool
4518   {
4519     \int_compare:nNnT { \l__enumext_level_int } > { 0 }
4520     {
4521       \__enumext_store_level_open_vii:
4522     }
4523   }
4524 }
4525 \cs_new_protected:Nn \__enumext_stop_store_level_vii:
4526 {
4527   \bool_if:NT \l__enumext_store_active_bool
4528   {
4529     \int_compare:nNnT { \l__enumext_level_int } > { 0 }
4530     {
4531       \__enumext_store_level_close_vii:
4532     }
4533   }
4534 }
```

(End of definition for \\_\_enumext\_start\_store\_level\_vii: and \\_\_enumext\_stop\_store\_level\_vii:.)

#### 12.43.1 The command \item in enumext\*

\\_\_enumext\_first\_item\_tmp\_vii:

The \\_\_enumext\_first\_item\_tmp\_vii: function will remove horizontal space equal to \labelwidth plus \labelsep to the left of the first \item in the environment at the point of execution of this function, where it is equal to the \\_\_enumext\_stop\_item\_tmp\_vii: function inside the environment body definition.

```

4535 \cs_new_protected_nopar:Nn \__enumext_first_item_tmp_vii:
4536 {
4537   \skip_horizontal:n { -\l__enumext_labelwidth_vii_dim - \l__enumext_labelsep_vii_dim }
4538 }
```

(End of definition for \\_\_enumext\_first\_item\_tmp\_vii:.)

\\_\_enumext\_start\_item\_tmp\_vii:

First we will call the function \\_\_enumext\_stop\_item\_tmp\_vii: that we will redefine later, we will increment the value of \l\_\_enumext\_item\_column\_pos\_vii\_int that will count the item's by rows and the value of \g\_\_enumext\_item\_count\_all\_vii\_int that will count the total of item's in the environment. After that we will call the function \\_\_enumext\_item\_peek\_args\_vii: that will handle the arguments passed to \item.

```

4539 \cs_new_protected_nopar:Nn \__enumext_start_item_tmp_vii:
4540 {
4541   \__enumext_stop_item_tmp_vii:
4542   \int_incr:N \l__enumext_item_column_pos_vii_int
4543   \int_gincr:N \g__enumext_item_count_all_vii_int
4544   \__enumext_item_peek_args_vii:
4545 }
```

(End of definition for \\_\_enumext\_start\_item\_tmp\_vii:.)

\\_\_enumext\_item\_peek\_args\_vii:

The function \\_\_enumext\_item\_peek\_args\_vii: will handle the \item(*number*). Look for the argument “(”, if it is present we will call the function \\_\_enumext\_joined\_item\_vii:w(*number*), which is in charge of joining the item's in the same row, in case they are not present we will set the default value (1).

```

4546 \cs_new_protected:Nn \__enumext_item_peek_args_vii:
4547 {
4548   \peek_meaning:NTF (
4549     { \__enumext_joined_item_vii:w }
4550     { \__enumext_joined_item_vii:w (1) }
4551   }
```

(End of definition for \\_\_enumext\_item\_peek\_args\_vii:.)

\\_\_enumext\_joined\_item\_vii:w

The function \\_\_enumext\_joined\_item\_vii:w will first call the function \\_\_enumext\_starred\_joined\_item\_vii:n in charge of setting the *width* of the box that will store the content passed to \item. Then we will look for the argument “\*”, if it is present we will call the function \\_\_enumext\_starred\_item\_vii:w otherwise we will call the function \\_\_enumext\_standard\_item\_vii:w.

```

4552 \cs_new_protected:Npn \__enumext_joined_item_vii:w (#1)
4553 {
```

```

4554     \__enumext_starred_joined_item_vii:n {#1}
4555     \peek_meaning_remove:NTF *
4556     { \__enumext_starred_item_vii:w }
4557     { \__enumext_standar_item_vii:w }
4558 }

```

(End of definition for \\_\_enumext\_joined\_item\_vii:w.)

\\_\_enumext\_standar\_item\_vii:w

The function \\_\_enumext\_standar\_item\_vii:w will first look for the argument “[”, if present it will set the state of the variable \l\_\_enumext\_wrap\_label\_opt\_vii\_bool equal to the state of the variable \l\_\_enumext\_wrap\_label\_opt\_vii\_bool handled by the key `wrap-label*` and finally execute the *non-enumerated* version \item[⟨*custom*⟩] by means of the function \\_\_enumext\_start\_item\_vii:w, otherwise we will set the value of the variable \l\_\_enumext\_wrap\_label\_vii\_bool handled by the `wrap-label` key to true and set the switch \if@noitemarg to true to execute the enumerated version of \item by means of the function \\_\_enumext\_start\_item\_vii:w [ \l\_\_enumext\_label\_vii\_tl ].

```

4559 \cs_new_protected:Npn \__enumext_standar_item_vii:w
4560 {
4561     \bool_set_false:N \l__enumext_item_starred_vii_bool
4562     \peek_meaning:NTF [
4563     {
4564         \bool_set_eq:NN \l__enumext_wrap_label_vii_bool \l__enumext_wrap_label_opt_vii_bool
4565         \__enumext_start_item_vii:w
4566     }
4567     {
4568         \bool_set_true:N \l__enumext_wrap_label_vii_bool
4569         \legacy_if_set_true:n { @noitemarg }
4570         \__enumext_start_item_vii:w [ \l__enumext_label_vii_tl ]
4571     }
4572 }

```

(End of definition for \\_\_enumext\_standar\_item\_vii:w.)

\\_\_enumext\_starred\_item\_vii:w

The function \\_\_enumext\_starred\_item\_vii:w together with the specified auxiliary functions `aux_i:w`, `aux_ii:w`, and `aux_iii:w` execute \item\*, \item\*[⟨*symbol*⟩] and \item\*[⟨*symbol*⟩][⟨*offset*⟩].

\\_\_enumext\_starred\_item\_vii\_aux\_i:w

\\_\_enumext\_starred\_item\_vii\_aux\_ii:w

\\_\_enumext\_starred\_item\_vii\_aux\_iii:w

```

4573 \cs_new_protected:Npn \__enumext_starred_item_vii:w
4574 {
4575     \bool_set_true:N \l__enumext_item_starred_vii_bool
4576     \bool_set_true:N \l__enumext_wrap_label_vii_bool
4577     \peek_meaning:NTF [
4578     { \__enumext_starred_item_vii_aux_i:w }
4579     { \__enumext_starred_item_vii_aux_ii:w }
4580 }
4581 \cs_new_protected:Npn \__enumext_starred_item_vii_aux_i:w {#1}
4582 {
4583     \tl_gset:Nn \g__enumext_item_symbol_aux_vii_tl {#1}
4584     \__enumext_starred_item_vii_aux_ii:w
4585 }
4586 \cs_new_protected:Npn \__enumext_starred_item_vii_aux_ii:w
4587 {
4588     \peek_meaning:NTF [
4589     { \__enumext_starred_item_vii_aux_iii:w }
4590     {
4591         \dim_set_eq:NN \l__enumext_item_symbol_sep_vii_dim \l__enumext_labelsep_vii_dim
4592         \legacy_if_set_true:n { @noitemarg }
4593         \__enumext_start_item_vii:w [ \l__enumext_label_vii_tl ]
4594     }
4595 }
4596 \cs_new_protected:Npn \__enumext_starred_item_vii_aux_iii:w {#1}
4597 {
4598     \dim_set:Nn \l__enumext_item_symbol_sep_vii_dim {#1}
4599     \legacy_if_set_true:n { @noitemarg }
4600     \__enumext_start_item_vii:w [ \l__enumext_label_vii_tl ]
4601 }

```

(End of definition for \\_\_enumext\_starred\_item\_vii:w and others.)

\\_\_enumext\_fake\_make\_label\_vii:n

The \\_\_enumext\_fake\_make\_label\_vii:n function will be in charge of handling our definition of \item. First we increment the counter `enumxvii` for the enumerated items and activate support for the *check answers* mechanism, followed by support for \item\*[⟨*symbol*⟩][⟨*offset*⟩] if present, then the `wrap-label` and `wrap-label*` keys which we execute using \makebox whose width will be given by the `labelwidth` key and

position by the `align` key, inside the argument of this we will execute the `font` key together with the function defined by the `wrap-label` or `wrap-label*` keys. Finally we execute the `labelsep` key applying a *horizontal space*.

```

4602 \cs_new_protected_nopar:Npn \__enumext_fake_make_label_vii:n #1
4603 {
4604   \legacy_if:nT { @noitemarg }
4605   {
4606     \legacy_if_set_false:n { @noitemarg }
4607     \legacy_if:nT { @nmbrrlist }
4608     {
4609       \refstepcounter{enumXvii}
4610       \bool_if:NT \l__enumext_check_answers_bool
4611       {
4612         \int_gincr:N \g__enumext_item_number_int
4613         \bool_set_true:N \l__enumext_item_number_bool
4614       }
4615     }
4616   }
4617   \bool_if:NT \l__enumext_item_starred_vii_bool
4618   {
4619     \tl_if_blank:VT \g__enumext_item_symbol_aux_vii_tl
4620     {
4621       \tl_gset_eq:NN
4622       \g__enumext_item_symbol_aux_vii_tl \l__enumext_item_symbol_vii_tl
4623     }
4624     \mode_leave_vertical:
4625     \skip_horizontal:n { -\l__enumext_item_symbol_sep_vii_dim }
4626     \hbox_overlap_left:n { \g__enumext_item_symbol_aux_vii_tl }
4627     \skip_horizontal:N \l__enumext_item_symbol_sep_vii_dim
4628     \tl_gclear:N \g__enumext_item_symbol_aux_vii_tl
4629   }
4630   \makebox[ \l__enumext_labelwidth_vii_dim ][ \l__enumext_align_label_vii_str ]
4631   {
4632     \tl_use:N \l__enumext_label_font_style_vii_tl
4633     \bool_if:NTF \l__enumext_wrap_label_vii_bool
4634     {
4635       \__enumext_wrapper_label_vii:n {#1}
4636     }
4637     { #1 }
4638   }
4639   \skip_horizontal:N \l__enumext_labelsep_vii_dim
4640 }

```

(End of definition for `\__enumext_fake_make_label_vii:n`.)

### 12.43.2 Real definition of `\item` in `enumext*`

The functions `\__enumext_start_item_vii:w` and `\__enumext_stop_item_vii:` executing the true definition of `\item` inside the `enumext*` environment, unlike the implementation in `shortlst` we will NOT use an extra group and the plain form of the `lrbox` environment.

`\__enumext_start_item_vii:w` The first thing we will do is set the value of `\__enumext_stop_item_tmp_vii:` equal to `\__enumext_stop_item_vii:` which we will define later, after that we will start capturing `\item` and its *contents* in a *horizontal box* where the width will be `\itemwidth` plus `\labelwidth` plus `\labelsep`.

```

4641 \cs_new_protected_nopar:Npn \__enumext_start_item_vii:w [#1]
4642 {
4643   \cs_set_eq:NN \__enumext_stop_item_tmp_vii: \__enumext_stop_item_vii:
4644   \hbox_set_to_wd:Nnw \l__enumext_item_text_vii_box
4645   {
4646     \l__enumext_joined_width_vii_dim
4647     + \l__enumext_labelwidth_vii_dim
4648     + \l__enumext_labelsep_vii_dim
4649   }

```

If `\DocumentMetadata` is not active and the state of the variable `\l__enumext_footnotes_key_bool` is false, we will redefine the `\footnote` command.

```

4650   \IfDocumentMetadataTF { }
4651   {
4652     \bool_if:NF \l__enumext_footnotes_key_bool
4653     {
4654       \__enumext_renew_footnote:

```

```

4655     }
4656 }

```

Now we insert our *sockets* for *tagging* PDF support and print `\item`.

```

4657     \__enumext_start_list_tag:n {enumext*}
4658     \__enumext_fake_make_label_vii:n {#1}
4659     \__enumext_stop_start_list_tag:

```

Finally we open the `minipage` environment capture the  $\langle item\ content \rangle$  and execute `first` and `itemindent` keys, then `listparindent` key which will be equal to `\parindent`, then `parsep` key which will be equal to `\parskip`.

```

4660     \__enumext_minipage:w [ t ]{ \__enumext_joined_width_vii_dim }
4661     \tl_use:N \l__enumext_after_list_args_vii_tl
4662     \tl_use:N \l__enumext_fake_item_indent_vii_tl
4663     \dim_set_eq:NN \parindent \l__enumext_listparindent_vii_dim
4664     \skip_set_eq:NN \parskip \l__enumext_parsep_vii_skip
4665 }

```

(End of definition for `\__enumext_start_item_vii:w`.)

`\__enumext_stop_item_vii:`

The `\__enumext_stop_item_vii:` function will finish the fetching `\item` and its  $\langle content \rangle$  by closing the `minipage` environment, the *sockets* for *tagging* PDF and the *horizontal box*.

```

4666 \cs_new_protected_nopar:Nn \__enumext_stop_item_vii:
4667 {
4668     \__enumext_endminipage:
4669     \__enumext_stop_list_tag:n {enumext*}
4670     \hbox_set_end:

```

Here we will reduce the *warnings* a bit by setting the value of `\hbadness` to `10000`, print the  $\langle contents \rangle$  of the *box* along with `\footnote`.

```

4671     \int_set:Nn \hbadness { 10000 }
4672     \box_use_drop:N \l__enumext_item_text_vii_box
4673     \IfDocumentMetadataTF { }
4674     {
4675         \bool_if:NF \l__enumext_footnotes_key_bool
4676         {
4677             \__enumext_print_footnote:
4678         }
4679     }

```

Finally set the *vertical* and *horizontal* spaces between rows and columns.

```

4680     \int_compare:nNnTF
4681     { \l__enumext_item_column_pos_vii_int } = { \l__enumext_columns_vii_int }
4682     {
4683         \par\noindent
4684         \int_zero:N \l__enumext_item_column_pos_vii_int
4685     }
4686     {
4687         \skip_horizontal:N \l__enumext_columns_sep_vii_dim
4688     }
4689 }

```

(End of definition for `\__enumext_stop_item_vii:`.)

`\__enumext_remove_extra_parsep_vii:`

Finally we will remove the vertical space equal to `\parsep=itemsep` when the total number of items is divisible by the number of items in the last row of the environment. Here the use of `\unskip` or `\removeatlastskip` fails and does not obtain the expected result, using `\vspace` is the option and in this case, we can use a simplified version since we are always in  $\langle vertical\ mode \rangle$ .

```

4690 \cs_new_protected:Nn \__enumext_remove_extra_parsep_vii:
4691 {
4692     \int_compare:nNnT
4693     {
4694         \int_mod:nn
4695         { \g__enumext_item_count_all_vii_int } { \l__enumext_columns_vii_int }
4696     }
4697     =
4698     { 0 }
4699     {
4700         \para_end:
4701         \skip_vertical:n { -\l__enumext_itemsep_vii_skip }
4702         \skip_vertical:N \c_zero_skip
4703         \int_gzero:N \g__enumext_item_count_all_vii_int

```

```

4704     }
4705 }

```

As we don't want our check to be executed `check-ans` by levels but on the complete list, we will take it out of the `enumext*` environment using the “hook” function `\__enumext_after_env:nn`.

```

4706 \__enumext_after_env:nn {enumext*}
4707 {
4708     \__enumext_execute_after_env:
4709 }

```

(End of definition for `\__enumext_remove_extra_parsep_viii:`)

## 12.44 The environment `keyans*`

**keyans\*** First we will generate the environment and we will give a temporary definition to `\__enumext_stop_item_tmp_viii:` equal to `\__enumext_first_item_tmp_viii:` and next to `\item` equal to `\__enumext_start_item_tmp_viii:` which we will redefine later. The implementation of this environment is the same as that used by the `enumext*` environment except for the `\__enumext_check_starred_cmd:n` function added in the second part.

```

4710 \NewDocumentEnvironment{keyans*}{o}{
4711 {
4712     \__enumext_safe_exec_viii:
4713     \__enumext_parse_keys_viii:n {#1}
4714     \__enumext_before_list_viii:
4715     \__enumext_start_list:nn { }
4716     {
4717         \__enumext_list_arg_two_viii:
4718         \__enumext_before_keys_exec_viii:
4719     }
4720     % Stop tagging
4721     \IfDocumentMetadataTF { \tag_suspend:n {keyans*} } { }
4722     \__enumext_starred_columns_set_viii:
4723     \item[] \scan_stop:
4724     \cs_set_eq:NN \__enumext_stop_item_tmp_viii: \__enumext_first_item_tmp_viii:
4725     \cs_set_eq:NN \item \__enumext_start_item_tmp_viii:
4726     \ignorespaces
4727 }
4728 {
4729     \IfDocumentMetadataTF { \tag_struct_end:n {tag=text-unit} } { }
4730     \__enumext_stop_item_tmp_viii:
4731     \__enumext_remove_extra_parsep_viii:
4732     \__enumext_check_starred_cmd:n { \item }
4733     \__enumext_after_list_viii:
4734 }

```

(End of definition for `keyans*`. This function is documented on page 14.)

`\__enumext_safe_exec_viii:` The `\__enumext_safe_exec_viii:` function will first check if the `save-ans` key is active and only when this is true the environment will be available, it will increment the value of `\l__enumext_keyans_level_h_int` and return an error message when we are nesting the environment, then it will call the `\__enumext_keyans_name_and_start:` function in charge of saving the name of the environment and the line it is running on, then it will check if we are trying to nest `keyans*` in `enumext*` returning an error and we will set `\l__enumext_starred_bool` to true, finally we will check if we are within the appropriate level within the `enumext` environment.

```

4735 \cs_new_protected:Nn \__enumext_safe_exec_viii:
4736 {
4737     \bool_if:NF \l__enumext_store_active_bool
4738     {
4739         \msg_error:nnnn { enumext } { wrong-place } { keyans* } { save-ans }
4740     }
4741     \int_incr:N \l__enumext_keyans_level_h_int
4742     \int_compare:nNt { \l__enumext_keyans_level_h_int } > { 1 }
4743     {
4744         \msg_error:nn { enumext } { nested }
4745     }
4746     \__enumext_keyans_name_and_start:
4747     \bool_if:NT \l__enumext_starred_bool
4748     {
4749         \msg_error:nnn { enumext } { nested-horizontal } { enumext* }
4750     }
4751     \bool_set_true:N \l__enumext_starred_bool

```



```

4752 % Set false for interfering with enumext nested in keyans* (yes, its possible and crayze)
4753 \bool_set_false:N \l__enumext_store_active_bool
4754 \int_compare:nNtT { \l__enumext_level_int } > { 1 }
4755 {
4756   \msg_error:nn { enumext } { keyans-wrong-level }
4757 }
4758 }

```

(End of definition for \\_\_enumext\_safe\_exec\_viii:.)

\\_\_enumext\_parse\_keys\_viii:n Parse [*key* = *val*] for *keyans\**.

```

4759 \cs_new_protected:Npn \__enumext_parse_keys_viii:n #1
4760 {
4761   \tl_if_novalue:nF {#1}
4762   {
4763     \keys_set:nn { enumext / keyans* } {#1}
4764   }
4765 }

```

(End of definition for \\_\_enumext\_parse\_keys\_viii:n.)

\\_\_enumext\_before\_list\_viii: The function \\_\_enumext\_before\_list\_viii: will add the vertical spacing on the environment if the *above* key is active next to the *{code}* defined by the *before\** key if it is active, the call the function \\_\_enumext\_start\_mini\_viii: handle by *mini-env*.

```

4766 \cs_new_protected:Nn \__enumext_before_list_viii:
4767 {
4768   \__enumext_vspace_above_viii:
4769   \__enumext_before_args_exec_viii:
4770   \__enumext_start_mini_viii:
4771 }

```

(End of definition for \\_\_enumext\_before\_list\_viii:.)

\\_\_enumext\_after\_list\_viii: The function \\_\_enumext\_after\_list: first call the function \\_\_enumext\_stop\_mini\_viii:, then apply the *{code}* handled by the *after* key together with the *vertical space* handled by the *below* key if they are present.

```

4772 \cs_new_protected:Nn \__enumext_after_list_viii:
4773 {
4774   \__enumext_stop_mini_viii:
4775   \__enumext_after_stop_list_viii:
4776   \__enumext_vspace_below_viii:
4777 }

```

(End of definition for \\_\_enumext\_after\_list\_viii:.)

#### 12.44.1 The command \item in keyans\*

The idea here is to make the *\item* command behave in the same way as in the *keyans* environment with the difference of the optional argument (*number*) which works in the same way as in the *enumext\** environment.

In simple terms we want to store the *label* next to the [*content*] if it is present in the *sequence* and *prop list* defined by *save-ans* key for *\item\**, *\item\*[{content}]*, *\item(number)\** and *\item(number)\*[{content}]* commands.

\\_\_enumext\_first\_item\_tmp\_viii: The \\_\_enumext\_first\_item\_tmp\_viii: function will remove horizontal space equal to *\labelwidth* plus *\labelsep* to the left of the first *\item* in the environment at the point of execution of this function, where it is equal to the \\_\_enumext\_stop\_item\_tmp\_viii: function inside the environment body definition.

```

4778 \cs_new_protected_nopar:Nn \__enumext_first_item_tmp_viii:
4779 {
4780   \skip_horizontal:n { -\l__enumext_labelwidth_viii_dim - \l__enumext_labelsep_viii_dim }
4781 }

```

(End of definition for \\_\_enumext\_first\_item\_tmp\_viii:.)

\\_\_enumext\_start\_item\_tmp\_viii: First we will call the function \\_\_enumext\_stop\_item\_tmp\_viii: that we will redefine later, we will increment the value of *\l\_\_enumext\_item\_column\_pos\_viii\_int* that will count the item's by rows and the value of *\g\_\_enumext\_item\_count\_all\_viii\_int* that will count the total of item's in the environment. After that we will call the function \\_\_enumext\_item\_peek\_args\_viii: that will handle the arguments passed to *\item*.

```

4782 \cs_new_protected_nopar:Nn \__enumext_start_item_tmp_viii:
4783 {

```

```

4784     \__enumext_stop_item_tmp_viii:
4785     \int_incr:N \l__enumext_item_column_pos_viii_int
4786     \int_gincr:N \g__enumext_item_count_all_viii_int
4787     \__enumext_item_peek_args_viii:
4788 }

```

(End of definition for \\_\_enumext\_start\_item\_tmp\_viii:.)

\\_\_enumext\_item\_peek\_args\_viii:

The function \\_\_enumext\_item\_peek\_args\_viii: will handle the \item(<number>). Look for the argument “(”, if it is present we will call the function \\_\_enumext\_joined\_item\_viii:w (<number>), which is in charge of joining the item’s in the same row, in case they are not present we will set the default value (1).

```

4789 \cs_new_protected:Nn \__enumext_item_peek_args_viii:
4790 {
4791     \peek_meaning:NTF (
4792     { \__enumext_joined_item_viii:w }
4793     { \__enumext_joined_item_viii:w (1) }
4794 }

```

(End of definition for \\_\_enumext\_item\_peek\_args\_viii:.)

\\_\_enumext\_joined\_item\_viii:w

The function \\_\_enumext\_joined\_item\_viii:w will first call the function \\_\_enumext\_starred\_joined\_item\_viii:n in charge of setting the *width* of the box that will store the content passed to \item. Then we will look for the argument “\*”, if it is present we will call the function \\_\_enumext\_starred\_item\_viii:w otherwise we will call the function \\_\_enumext\_standar\_item\_viii:w.

```

4795 \cs_new_protected:Npn \__enumext_joined_item_viii:w (#1)
4796 {
4797     \__enumext_starred_joined_item_viii:n {#1}
4798     \peek_meaning_remove:NTF *
4799     { \__enumext_starred_item_viii:w }
4800     { \__enumext_standar_item_viii:w }
4801 }

```

(End of definition for \\_\_enumext\_joined\_item\_viii:w.)

\\_\_enumext\_standar\_item\_viii:w

The function \\_\_enumext\_standar\_item\_viii:w will first look for the argument “[”, if present it will set the state of the variable \l\_\_enumext\_wrap\_label\_opt\_viii\_bool equal to the state of the variable \l\_\_enumext\_wrap\_label\_opt\_viii\_bool handled by the key `wrap-label*` and finally execute the *non-enumerated* version \item[<custom>] by means of the function \\_\_enumext\_start\_item\_viii:w, otherwise we will set the value of the variable \l\_\_enumext\_wrap\_label\_viii\_bool handled by the `wrap-label` key to true and set the switch \if@noitemarg to true to execute the enumerated version of \item by means of the function \\_\_enumext\_start\_item\_viii:w [ \l\_\_enumext\_label\_viii\_tl ].

```

4802 \cs_new_protected:Npn \__enumext_standar_item_viii:w
4803 {
4804     \bool_set_false:N \l__enumext_item_starred_viii_bool
4805     \peek_meaning:NTF [
4806     {
4807         \bool_set_eq:NN \l__enumext_wrap_label_viii_bool \l__enumext_wrap_label_opt_viii_bool
4808         \__enumext_start_item_viii:w
4809     }
4810     {
4811         \bool_set_true:N \l__enumext_wrap_label_viii_bool
4812         \legacy_if_set_true:n { @noitemarg }
4813         \__enumext_start_item_viii:w [ \l__enumext_label_viii_tl ]
4814     }
4815 }

```

(End of definition for \\_\_enumext\_standar\_item\_viii:w.)

\\_\_enumext\_starred\_item\_viii:w

The function \\_\_enumext\_starred\_item\_viii:w together with the specified auxiliary functions `aux_i:w` and `aux_ii:w` execute \item\* and \item\* [<content>].

```

4816 \cs_new_protected:Npn \__enumext_starred_item_viii:w
4817 {
4818     \bool_set_true:N \l__enumext_item_starred_viii_bool
4819     \bool_set_true:N \l__enumext_wrap_label_viii_bool
4820     \peek_meaning:NTF [
4821     { \__enumext_starred_item_viii_aux_i:w }
4822     { \__enumext_starred_item_viii_aux_ii:w }
4823 }

```

The function `\__enumext_starred_item_viii_aux_i:w` will save the optional argument to `\item*` in `\l__enumext_store_current_opt_arg_tl` and will save this argument along with the spacing set by the key `save-sep` in variable `\l__enumext_store_current_label_tl` if present, then call the function `\__enumext_starred_item_viii_aux_ii:w`.

```

4824 \cs_new_protected:Npn \__enumext_starred_item_viii_aux_i:w [#1]
4825 {
4826   \tl_clear:N \l__enumext_store_current_label_tl
4827   \tl_if_novalue:nF { #1 }
4828   {
4829     \tl_if_empty:NF \l__enumext_store_keyans_item_opt_sep_tl
4830     {
4831       \tl_put_right:Ne \l__enumext_store_current_label_tl
4832       {
4833         \l__enumext_store_keyans_item_opt_sep_tl
4834       }
4835       \tl_put_right:Ne \l__enumext_store_current_label_tl { #1 }
4836     }
4837     \tl_set:Ne \l__enumext_store_current_opt_arg_tl { #1 }
4838   }
4839   \__enumext_starred_item_viii_aux_ii:w
4840 }
4841 \cs_new_protected:Npn \__enumext_starred_item_viii_aux_ii:w
4842 {
4843   \legacy_if_set_true:n { @noitemarg }
4844   \__enumext_start_item_viii:w [ \l__enumext_label_viii_tl ]
4845 }

```

(End of definition for `\__enumext_starred_item_viii:w`, `\__enumext_starred_item_viii_aux_i:w`, and `\__enumext_starred_item_viii_aux_ii:w`.)

`\__enumext_starred_item_exec:`

The function `\__enumext_starred_item_exec:` will be in charge of storing the current `<label>` for `\item*` followed by the `[<content>]` for `\item*``[<content>]` if present in the `<sequence>` and `<prop list>` set by the `save-ans` key. In this same function the keys `show-ans`, `show-pos` and `save-ref` are implemented.

```

4846 \cs_new_protected:Nn \__enumext_starred_item_exec:
4847 {
4848   \tl_put_left:Ne \l__enumext_store_current_label_tl { \l__enumext_label_viii_tl }
4849   \__enumext_store_addto_prop:V \l__enumext_store_current_label_tl
4850   \__enumext_keyans_store_ref:
4851   \tl_put_left:Ne \l__enumext_store_current_label_tl { \item }
4852   \__enumext_keyans_addto_seq_link:
4853   \int_gincr:N \g__enumext_check_starred_cmd_int
4854   \bool_if:NT \l__enumext_show_answer_bool
4855   {
4856     \__enumext_print_keyans_box:NN \l__enumext_labelwidth_i_dim \l__enumext_labelsep_i_dim
4857   }
4858   \bool_if:NT \l__enumext_show_position_bool
4859   {
4860     \tl_set:Ne \l__enumext_mark_answer_sym_tl
4861     {
4862       \group_begin:
4863       \exp_not:N \normalfont
4864       \exp_not:N \footnotesize [ \int_eval:n
4865       {
4866         \prop_count:c { g__enumext_ \l__enumext_store_name_tl _prop }
4867       }
4868       ]
4869       \group_end:
4870     }
4871     \__enumext_print_keyans_box:NN \l__enumext_labelwidth_i_dim \l__enumext_labelsep_i_dim
4872   }
4873 }

```

(End of definition for `\__enumext_starred_item_exec:`.)

`\__enumext_fake_make_label_viii:n`

The implementation at this is very similar to that of the `enumext*` environment.

```

4874 \cs_new_protected_nopar:Npn \__enumext_fake_make_label_viii:n #1
4875 {
4876   \legacy_if:nT { @noitemarg }
4877   {
4878     \legacy_if_set_false:n { @noitemarg }
4879     \legacy_if:nT { @nmbrrlist }

```

```

4880         {
4881             \refstepcounter{enumXviii}
4882         }
4883     }
4884     \bool_if:NT \l__enumext_item_starred_viii_bool
4885     {
4886         \__enumext_starred_item_exec:
4887     }
4888     \makebox[ \l__enumext_labelwidth_viii_dim ][ \l__enumext_align_label_viii_str ]
4889     {
4890         \tl_use:N \l__enumext_label_font_style_viii_tl
4891         \bool_if:NTF \l__enumext_wrap_label_viii_bool
4892         {
4893             \__enumext_wrapper_label_viii:n {#1}
4894         }
4895         { #1 }
4896     }
4897     \skip_horizontal:N \l__enumext_labelsep_viii_dim
4898 }

```

(End of definition for \\_\_enumext\_fake\_make\_label\_viii:n.)

#### 12.44.2 Real definition of \item in keyans\*

The implementation at this is very similar to that of the `enumext*` environment.

```

4899 \cs_new_protected_nopar:Npn \__enumext_start_item_viii:w [#1]
4900 {
4901     \cs_set_eq:NN \__enumext_stop_item_tmp_viii: \__enumext_stop_item_viii:
4902     \hbox_set_to_wd:Nnw \l__enumext_item_text_viii_box
4903     {
4904         \l__enumext_joined_width_viii_dim
4905         + \l__enumext_labelwidth_viii_dim
4906         + \l__enumext_labelsep_viii_dim
4907     }
4908     \IfDocumentMetadataTF { }
4909     {
4910         \bool_if:NF \l__enumext_footnotes_key_bool
4911         {
4912             \__enumext_renew_footnote:
4913         }
4914     }
4915     \__enumext_start_list_tag:n {keyans*}
4916     \__enumext_fake_make_label_viii:n {#1}
4917     \__enumext_stop_start_list_tag:
4918     \__enumext_minipage:w [ t ]{ \l__enumext_joined_width_viii_dim }
4919     \tl_use:N \l__enumext_after_list_args_viii_tl
4920     \bool_if:NT \l__enumext_item_starred_viii_bool
4921     {
4922         \tl_use:N \l__enumext_fake_item_indent_viii_tl
4923         \__enumext_keyans_show_item_opt:
4924         \skip_horizontal:n { -\l__enumext_fake_item_indent_viii_dim - \l__enumext_labelsep_viii_dim }
4925     }
4926     {
4927         \tl_use:N \l__enumext_fake_item_indent_viii_tl
4928     }
4929     \dim_set_eq:NN \parindent \l__enumext_listparindent_viii_dim
4930     \skip_set_eq:NN \parskip \l__enumext_parsep_viii_skip
4931 }

```

(End of definition for \\_\_enumext\_start\_item\_viii:w.)

\\_\_enumext\_stop\_item\_viii: The \\_\_enumext\_stop\_item\_viii: function will finish the fetching `\item` and its *content* by closing the `minipage` environment and the *horizontal box*. Here we will reduce the *warnings* a bit by setting the value of `\hbadness` to `10000`, print the *contents* of the *box* along with `\footnote` and finally set the vertical and horizontal spaces between rows and columns.

```

4932 \cs_new_protected_nopar:Nn \__enumext_stop_item_viii:
4933 {
4934     \__enumext_endminipage:
4935     \__enumext_stop_list_tag:n {keyans*}
4936     \hbox_set_end:
4937     \int_set:Nn \hbadness { 10000 }
4938     \box_use_drop:N \l__enumext_item_text_viii_box

```

```

4939 \IfDocumentMetadataTF { }
4940 {
4941   \bool_if:NF \__enumext_footnotes_key_bool
4942   {
4943     \__enumext_print_footnote:
4944   }
4945 }
4946 \int_compare:nNnTF
4947 { \l__enumext_item_column_pos_viii_int } = { \l__enumext_columns_viii_int }
4948 {
4949   \par\noindent
4950   \int_zero:N \l__enumext_item_column_pos_viii_int
4951 }
4952 {
4953   \skip_horizontal:N \l__enumext_columns_sep_viii_dim
4954 }
4955 }

```

(End of definition for \\_\_enumext\_stop\_item\_viii:.)

\\_\_enumext\_remove\_extra\_parsep\_viii:

Finally we will remove the *vertical space* equal to `\parsep` when the total number of items is divisible by the number of items in the last row of the environment.

```

4956 \cs_new_protected:Nn \__enumext_remove_extra_parsep_viii:
4957 {
4958   \int_compare:nNnT
4959   {
4960     \int_mod:nn
4961     { \g__enumext_item_count_all_viii_int }
4962     { \l__enumext_columns_viii_int }
4963   }
4964   =
4965   { 0 }
4966   {
4967     \para_end:
4968     \skip_vertical:n { -\l__enumext_itemsep_viii_skip }
4969     \skip_vertical:N \c_zero_skip
4970     \int_gzero:N \g__enumext_item_count_all_viii_int
4971   }
4972 }

```

(End of definition for \\_\_enumext\_remove\_extra\_parsep\_viii:.)

## 12.45 The command \getkeyans

\getkeyans

The `\getkeyans` command takes a mandatory argument of the form  $\langle \textit{store name} : \textit{position} \rangle$ . Retrieve a “single” content stored by `\anskey`, `\anspic*` and `\item*` from  $\langle \textit{prop list} \rangle$  defined by `save-ans` key.

```

4973 \NewDocumentCommand \getkeyans { m }
4974 {
4975   \exp_args:Ne \__enumext_getkeyans_aux:n
4976   { \tl_to_str:e { \text_expand:n {#1} } }
4977 }

```

(End of definition for \getkeyans. This function is documented on page 16.)

\\_\_enumext\_getkeyans\_aux:n

The internal function `\__enumext_getkeyans_aux:n` is in charge of *splitting* the  $\langle \textit{argument} \rangle$  using “.”. If “.” is omitted it will return an error.

```

4978 \cs_new_protected:Npn \__enumext_getkeyans_aux:n #1
4979 {
4980   \str_if_in:nnTF {#1} { : }
4981   {
4982     \use:e
4983     {
4984       \cs_set:Npn \exp_not:N \__enumext_tmp:w ##1 \c_colon_str ##2 \scan_stop:
4985       { {##1} {##2} }
4986     }
4987     \exp_after:wN \__enumext_getkeyans:nn \__enumext_tmp:w #1 \scan_stop:
4988   }
4989   { \msg_error:nnn { enumext } { missing-colon } {#1} }
4990 }

```

(End of definition for \\_\_enumext\_getkeyans\_aux:n.)

`\__enumext_getkeyans:nn` The internal function `\__enumext_getkeyans:nn` will check for the existence of the *prop list*, if it does not exist it will return an error message, then it will fetch the content specified by the second *argument* from *prop list*.

```

4991 \cs_new_protected:Npn \__enumext_getkeyans:nn #1 #2
4992 {
4993   \prop_if_exist:cTF { g__enumext_#1_prop }
4994   {
4995     \prop_item:cn { g__enumext_#1_prop }{#2}
4996   }
4997   {
4998     \msg_error:nnn { enumext } { undefined-storage-anskey } {#1}
4999   }
5000 }

```

(End of definition for `\__enumext_getkeyans:nn`.)

## 12.46 The command `\printkeyans`

The `\printkeyans` command prints “all stored content” in the *sequence* defined by the `save-ans` key. The first thing we will do is define a set of *filtered keys* with which we will control the options of the different nesting levels for the environment `enumext` and `enumext*` by storing their values in the list of tokens `\l__enumext_print_keyans_X_tl`.

The variable `\l__enumext_print_keyans_starred_tl` will have the default *keys* for `\printkeyans*` and will be set by `\setenumext[⟨print*⟩]` and the variable `\l__enumext_print_keyans_vii_tl` will have the default keys for the environment `enumext*` nested within the *sequence* and will be set by `\setenumext[⟨print,*⟩]`, the rest of the variables will be for the environment `enumext` and will be set by `\setenumext[⟨print,level⟩]`.

```

5001 \keys_define:nn { enumext / print }
5002 {
5003   print* .code:n      = \keys_precompile:neN { enumext / enumext* }
5004               { \__enumext_filter_save_key:n {#1} }
5005               \l__enumext_print_keyans_starred_tl, % starred cmd
5006   print* .initial:n   = { nosep, label=\arabic*, columns=2, first=\small, font=\small },
5007   print-1 .code:n     = \keys_precompile:neN { enumext / level-1 }
5008               { \__enumext_filter_save_key:n {#1} }
5009               \l__enumext_print_keyans_i_tl,
5010   print-1 .initial:n  = { nosep, label=\arabic*, columns=2, first=\small, font=\small },
5011   print-2 .code:n     = \keys_precompile:neN { enumext / level-2 }
5012               { \__enumext_filter_save_key:n {#1} }
5013               \l__enumext_print_keyans_ii_tl,
5014   print-2 .initial:n  = { nosep, label=(\alph*), first=\small, font=\small },
5015   print-3 .code:n     = \keys_precompile:neN { enumext / level-3 }
5016               { \__enumext_filter_save_key:n {#1} }
5017               \l__enumext_print_keyans_iii_tl,
5018   print-3 .initial:n  = { nosep, label=\roman*, first=\small, font=\small },
5019   print-4 .code:n     = \keys_precompile:neN { enumext / level-4 }
5020               { \__enumext_filter_save_key:n {#1} }
5021               \l__enumext_print_keyans_iv_tl,
5022   print-4 .initial:n  = { nosep, label=\Alph*, first=\small, font=\small },
5023   print-* .code:n     = \keys_precompile:neN { enumext / enumext* }
5024               { \__enumext_filter_save_key:n {#1} }
5025               \l__enumext_print_keyans_vii_tl, % starred nested
5026   print-* .initial:n  = { nosep, label=\arabic*, first=\small, font=\small },
5027 }

```

- The reason for storing *keys* in token lists using `\keys_precompile:neN` is because the keys are set via `\setenumext` but are later executed by running the command `\printkeyans` and they are not handled directly by its optional argument, except those related to the first opening level.

`\printkeyans` Create a user command to print “all stored content” in *sequence* for `\anskey`, `anskey*`, `\item*` and `\anspic*`. Within a group we will run our “precompiled keys” and then call the internal function `\__enumext_printkeyans:nnn`.

```

5028 \NewDocumentCommand \printkeyans { s O{} m }
5029 {
5030   \group_begin:
5031     \tl_use:N \l__enumext_print_keyans_i_tl
5032     \tl_use:N \l__enumext_print_keyans_ii_tl
5033     \tl_use:N \l__enumext_print_keyans_iii_tl
5034     \tl_use:N \l__enumext_print_keyans_iv_tl
5035     \tl_use:N \l__enumext_print_keyans_vii_tl

```

```

5036     \__enumext_printkeyans:nnn { #1 } { #2 } { #3 }
5037     \group_end:
5038 }

```

(End of definition for `\printkeyans`. This function is documented on page 16.)

`\__enumext_printkeyans:nnn`

The internal function `\__enumext_printkeyans:nnn` will check for the existence of the *sequence*, if it does not exist it will return an error message, then it will check if not empty.

```

5039 \cs_new_protected:Npn \__enumext_printkeyans:nnn #1 #2 #3
5040 {
5041     \seq_if_exist:cTF { g__enumext_#3_seq }
5042     {
5043         \seq_if_empty:cF { g__enumext_#3_seq }
5044         {

```

If the starred argument is present we will check that the environment `enumext*` is not saved in the *sequence*, then execute the variable `\l__enumext_print_keyans_starred_tl` that contains the default *keys* for the environment `enumext*`, it will open the environment `enumext*` passing the optional argument to the “first level”, set the key `base-fix` and then will map the *sequence*.

```

5045         \bool_if:nTF {#1}
5046         {
5047             \seq_if_in:cnTF { g__enumext_#3_seq } { \end{enumext*} }
5048             {
5049                 \msg_error:nnnn { enumext } { print-starred } {#3} { enumext* }
5050             }
5051             {
5052                 \tl_use:N \l__enumext_print_keyans_starred_tl
5053                 \begin{enumext*}[#2]
5054                     \keys_set:nn { enumext / level-1 }{ base-fix }
5055                     \seq_map_inline:cn { g__enumext_#3_seq } { ##1 }
5056                     \end{enumext*}
5057                 }
5058             }

```

Otherwise it will open the environment `enumext` passing the optional argument to the “first level”, set the key `base-fix` and then map the *sequence*.

```

5059             {
5060                 \begin{enumext}[#2]
5061                     \keys_set:nn { enumext / enumext* }{ base-fix }
5062                     \seq_map_inline:cn { g__enumext_#3_seq } { ##1 }
5063                     \end{enumext}
5064             }
5065         }
5066     }
5067     {
5068         \msg_error:nnn { enumext } { undefined-storage-anskey } {#3}
5069     }
5070 }

```

(End of definition for `\__enumext_printkeyans:nnn`.)

## 12.47 The command `\setenumext`

The command `\setenumext` will be in charge of managing the *keys* passed to all environments and to the `\printkeyans` command. We must take precautions with the `enumext*` environment and “first level” of the `enumext` environment so as not to capture *keys* that complicate us.

`\__enumext_filter_first_level:n`  
`\__enumext_filter_first_level_key:n`  
`\__enumext_filter_first_level_pair:nn`

The function `\__enumext_filter_first_level:n` will be in charge of filtering the *keys* passed to the environment `enumext*` and “first level” of the environment `enumext`.

```

5071 \cs_new:Npn \__enumext_filter_first_level:n #1
5072 {
5073     \use:e
5074     {
5075         \keyval_parse:NNn
5076         \__enumext_filter_first_level_key:n
5077         \__enumext_filter_first_level_pair:nn {#1}
5078     }
5079 }

```



The function `\__enumext_filter_first_level_key:n` will be responsible for filtering the *⟨keys⟩* that are passed “without value” by excluding the keys `resume` and `resume*`.

```
5080 \cs_new:Npn \__enumext_filter_first_level_key:n #1
5081 {
5082   \str_case:nnF {#1}
5083   {
5084     { resume } {}
5085     { resume* } {}
5086   }
5087   { , { \exp_not:n {#1} } }
5088 }
```

The function `\__enumext_filter_first_level_pair:nn` will be responsible for filtering the *⟨keys⟩* that are passed “with value” by excluding the `series`, `resume` and `save-ans` keys.

```
5089 \cs_new:Npn \__enumext_filter_first_level_pair:nn #1#2
5090 {
5091   \str_case:nnF {#1}
5092   {
5093     { series } {}
5094     { resume } {}
5095     { save-ans } {}
5096   }
5097   { , { \exp_not:n {#1} } = { \exp_not:n {#2} } }
5098 }
```

(End of definition for `\__enumext_filter_first_level:n`, `\__enumext_filter_first_level_key:n`, and `\__enumext_filter_first_level_pair:nn`.)

Now define a “meta families” of *⟨keys⟩* to access from `\setenumext`.

```
5099 \keys_define:nn { enumext / meta-families }
5100 {
5101   enumext-1 .code:n =
5102   {
5103     \keys_set:ne { enumext / level-1 }
5104     {
5105       \__enumext_filter_first_level:n {#1}
5106     }
5107   } ,
5108   enumext-2 .code:n = { \keys_set:nn { enumext / level-2 } {#1} } ,
5109   enumext-3 .code:n = { \keys_set:nn { enumext / level-3 } {#1} } ,
5110   enumext-4 .code:n = { \keys_set:nn { enumext / level-4 } {#1} } ,
5111   keyans .code:n = { \keys_set:nn { enumext / keyans } {#1} } ,
5112   enumext* .code:n =
5113   {
5114     \keys_set:ne { enumext / enumext* }
5115     {
5116       \__enumext_filter_first_level:n {#1}
5117     }
5118   } ,
5119   keyans* .code:n = { \keys_set:nn { enumext / keyans* } {#1} } ,
5120   print* .code:n = { \keys_set:nn { enumext / print } { print* = {#1} } } ,
5121   print-1 .code:n = { \keys_set:nn { enumext / print } { print-1 = {#1} } } ,
5122   print-2 .code:n = { \keys_set:nn { enumext / print } { print-2 = {#1} } } ,
5123   print-3 .code:n = { \keys_set:nn { enumext / print } { print-3 = {#1} } } ,
5124   print-4 .code:n = { \keys_set:nn { enumext / print } { print-4 = {#1} } } ,
5125   print-* .code:n = { \keys_set:nn { enumext / print } { print-* = {#1} } } ,
5126   unknown .code:n = { \msg_error:nn { enumext } { unknown-key-family } } ,
5127 }
```

We store them in the constant sequence `\c__enumext_all_families_seq` separated by commas.

```
5128 \seq_const_from_clist:Nn \c__enumext_all_families_seq
5129 {
5130   enumext-1, enumext-2, enumext-3, enumext-4, keyans, enumext*,
5131   keyans*, print-1, print-2, print-3, print-4, print-*, print*,
5132 }
```

`\setenumext` Now we define the user command `\setenumext`.

```
5133 \NewDocumentCommand \setenumext { 0{enumext,1} +m }
5134 {
5135   \seq_clear:N \l__enumext_setkey_tmpa_seq
5136   \seq_set_from_clist:Nn \l__enumext_setkey_tmpb_seq {#1}
5137   \int_set:Nn \l__enumext_setkey_tmpa_int
```

```

5138     {
5139         \seq_count:N \l__enumext_setkey_tmpb_seq
5140     }
5141     \int_compare:nNnTF { \l__enumext_setkey_tmpa_int } > { 1 }
5142     {
5143         \seq_pop_left:NN \l__enumext_setkey_tmpb_seq \l__enumext_setkey_tmpa_tl
5144         \seq_map_function:NN \l__enumext_setkey_tmpb_seq \__enumext_set_parse:n
5145         \seq_set_map_e:Nn \l__enumext_setkey_tmpa_seq \l__enumext_setkey_tmpa_seq
5146         {
5147             \tl_use:N \l__enumext_setkey_tmpa_tl - ##1
5148         }
5149     }
5150     {
5151         \seq_put_right:Ne \l__enumext_setkey_tmpa_seq { \tl_trim_spaces:n {#1} }
5152     }
5153     \seq_if_empty:NNTF \l__enumext_setkey_tmpa_seq
5154     { \seq_map_inline:Nn \c__enumext_all_families_seq }
5155     { \seq_map_inline:Nn \l__enumext_setkey_tmpa_seq }
5156     {
5157         \keys_set:nn { enumext / meta-families } { ##1 = {#2} }
5158     }
5159 }

```

(End of definition for `\setenumext`. This function is documented on page 6.)

`\__enumext_set_parse:n`  
`\__enumext_set_error:nn`

Internal functions used by the `\setenumext` command.

```

5160 \cs_new_protected:Npn \__enumext_set_parse:n #1
5161 {
5162     \tl_set:Ne \l__enumext_setkey_tmpb_tl { \tl_trim_spaces:n {#1} }
5163     \clist_map_inline:nn { 0, 1, 2, 3, 4, * } % <- max level
5164     { \tl_remove_all:Nn \l__enumext_setkey_tmpb_tl {##1} }
5165     \tl_if_empty:NNTF \l__enumext_setkey_tmpb_tl
5166     {
5167         \seq_put_right:Ne \l__enumext_setkey_tmpa_seq
5168         { \tl_trim_spaces:n {#1} }
5169     }
5170     { \__enumext_set_error:nn {#1} { } }
5171 }
5172 \cs_new_protected:Npn \__enumext_set_error:nn #1 #2
5173 { \msg_error:nnn { enumext } { invalid-key } {#1} {#2} }

```

(End of definition for `\__enumext_set_parse:n` and `\__enumext_set_error:nn`.)

## 12.48 The command `\setenumextmeta`

The command `\setenumextmeta` will be responsible for adding new “meta-keys” for the `enumext` and `enumext*` environments. The implementation code was given by Jonathan P. Spratte (@Skillmon) answer in [Add .meta key to existing keys \(l3keys\)](#).

`\setenumextmeta`

First we will create a prop list `\c__enumext_meta_paths_prop` to handle the optional argument.

`\c__enumext_meta_paths_prop`  
`\__enumext_add_meta_key:nnn`  
`\__enumext_def_meta_key:nnn`  
`\__enumext_def_meta_key:Vnn`

```

5174 \prop_const_from_keyval:Nn \c__enumext_meta_paths_prop
5175 {
5176     {enumext,1} = level-1,
5177     {enumext,2} = level-2,
5178     {enumext,3} = level-3,
5179     {enumext,4} = level-4,
5180     {enumext*} = enumext*
5181 }

```

Now we create the user command taking care that unknown cannot be passed as an argument.

```

5182 \NewDocumentCommand \setenumextmeta { s O{enumext,1} m +m }
5183 {
5184     \str_if_eq:eeTF { \tl_trim_spaces:n {#3} } { unknown }
5185     { \msg_error:nn { enumext } { prohibited-unknown } }
5186     {
5187         \bool_if:nTF {#1}
5188         {
5189             \int_step_inline:nn { 4 }
5190             { \__enumext_add_meta_key:nnn { enumext, ##1 } {#3} {#4} }
5191             \__enumext_add_meta_key:nnn { enumext* } {#3} {#4}
5192         }
5193         { \__enumext_add_meta_key:nnn {#2} {#3} {#4} }

```

```

5194     }
5195 }

```

The internal functions `\__enumext_add_meta_key:nnn` and `\__enumext_def_meta_key:nnn` will check the optional argument and create the “*meta-key*”.

```

5196 \cs_new_protected:Npn \__enumext_add_meta_key:nnn #1
5197 {
5198   \tl_set:Nn \l__enumext_meta_path_tl {#1}
5199   \tl_replace_all:Nnn \l__enumext_meta_path_tl { ~ } {}
5200   \prop_get:NVNTF
5201     \c__enumext_meta_paths_prop \l__enumext_meta_path_tl \l__enumext_meta_path_tl
5202     { \__enumext_def_meta_key:Vnn \l__enumext_meta_path_tl }
5203     {
5204       \msg_error:nnn { enumext } { unknown-set } {#1}
5205       \use_none:nn
5206     }
5207 }
5208 \cs_new_protected:Npn \__enumext_def_meta_key:nnn #1#2#3
5209 {
5210   \bool_lazy_or:nnTF
5211     { \keys_if_exist_p:nn { enumext / #1 } {#2} }
5212     { \keys_if_exist_p:nn { enumext / enumext* } {#2} }
5213     { \msg_error:nnn { enumext } { already-defined } {#2} }
5214     {
5215       \keys_define:nn { enumext / #1 }
5216       {
5217         #2 .meta:n = {#3},
5218         #2 .value_forbidden:n = true
5219       }
5220     }
5221 }
5222 \cs_generate_variant:Nn \__enumext_def_meta_key:nnn { V }

```

(End of definition for `\setenumextmeta` and others. This function is documented on page 6.)

## 12.49 The command `\foreachkeyans`

The command `\foreachkeyans` will execute a *loop* over the `<prop list>` and return its contents. The implementation code is adapted from the answer provided by Enrico Gregorio (@egreg) in [Expand a .cs defined by key inside the function](#).

`\foreachkeyans`

```

\__enumext_parse_foreach_keys:nn
\__enumext_parse_foreach_keys:n
\__enumext_foreach_keyans:nn
\__enumext_foreach_add_body:n

```

We define a set of `<keys>` for command and we will save the default values of these in `\g__enumext_foreach_default_keys_tl` to avoid the use of group.

```

5223 \keys_define:nn { enumext / foreach }
5224 {
5225   before .tl_set:N = \l__enumext_foreach_before_tl,
5226   before .value_required:n = true,
5227   after .tl_set:N = \l__enumext_foreach_after_tl,
5228   after .value_required:n = true,
5229   start .int_set:N = \l__enumext_foreach_start_int,
5230   start .value_required:n = true,
5231   stop .int_set:N = \l__enumext_foreach_stop_int,
5232   stop .value_required:n = true,
5233   step .int_set:N = \l__enumext_foreach_step_int,
5234   step .value_required:n = true,
5235   wrapper .cs_set_protected:Np = \__enumext_foreach_wrapper:n #1,
5236   wrapper .value_required:n = true,
5237   sep .tl_set:N = \l__enumext_foreach_sep_tl,
5238   sep .value_required:n = true,
5239   unknown .code:n = { \__enumext_parse_foreach_keys:n {#1} }
5240 }
5241 \keys_precompile:nnN { enumext / foreach }
5242 {
5243   before={},after={},start=1,step=1,stop=0,wrapper=#1,sep=
5244 }
5245 \g__enumext_foreach_default_keys_tl

```

Functions for handling unknown `<keys>`.

```

5246 \cs_new_protected:Npn \__enumext_parse_foreach_keys:nn #1#2
5247 {
5248   \tl_if_blank:nTF {#2}
5249   {
5250     \msg_error:nnn { enumext } { for-key-unknown } {#1}

```

```

5251     }
5252     {
5253         \msg_error:nnnn { enumext } { for-key-value-unknown } {#1} {#2}
5254     }
5255 }
5256 \cs_new_protected:Npn \__enumext_parse_foreach_keys:n #1
5257 {
5258     \exp_args:NV \__enumext_parse_foreach_keys:nn \l_keys_key_str {#1}
5259 }

```

We create the command.

```

5260 \NewDocumentCommand \foreachkeyans { +0{ } m }
5261 {
5262     \__enumext_foreach_keyans:nn {#1} {#2}
5263 }

```

Finally the internal functions `\__enumext_foreach_keyans:nn` and `\__enumext_foreach_add_body:n` will loop through the prop list and print the contents.

```

5264 \cs_new_protected:Npn \__enumext_foreach_keyans:nn #1 #2
5265 {
5266     \tl_use:N \g__enumext_foreach_default_keys_tl
5267     \keys_set:nn { enumext / foreach } {#1}
5268     \tl_set:Nn \l__enumext_foreach_name_prop_tl {#2}
5269     \prop_if_exist:cF { g__enumext_#2_prop }
5270     {
5271         \msg_error:nnn { enumext } { undefined-storage-anskey } {#2}
5272     }
5273     \int_compare:nNt { \l__enumext_foreach_stop_int } = { 0 }
5274     {
5275         \int_set:Nn \l__enumext_foreach_stop_int
5276         { \prop_count:c { g__enumext_#2_prop } }
5277     }
5278     \seq_clear:N \l__enumext_foreach_print_seq
5279     \int_step_function:nnnN
5280     { \l__enumext_foreach_start_int }
5281     { \l__enumext_foreach_step_int }
5282     { \l__enumext_foreach_stop_int }
5283     \__enumext_foreach_add_body:n
5284     \seq_use:NV \l__enumext_foreach_print_seq \l__enumext_foreach_sep_tl
5285 }
5286 \cs_new_protected:Npn \__enumext_foreach_add_body:n #1
5287 {
5288     \seq_put_right:Ne \l__enumext_foreach_print_seq
5289     {
5290         \exp_not:V \l__enumext_foreach_before_tl
5291         \__enumext_foreach_wrapper:n
5292         {
5293             \prop_item:cn { g__enumext_ \l__enumext_foreach_name_prop_tl _prop } {#1}
5294         }
5295         \exp_not:V \l__enumext_foreach_after_tl
5296     }
5297 }

```

(End of definition for `\foreachkeyans` and others. This function is documented on page 16.)

## 12.50 Messages

Message used by package-load for `multicol` and `hyperref` packages.

```

5298 \msg_new:nnn { enumext } { package-load }
5299 {
5300     The ~ '#1' ~ package ~ is ~ already ~ loaded.
5301 }
5302 \msg_new:nnn { enumext } { package-not-load }
5303 {
5304     The ~ '#1' ~ package ~ will ~ be ~ loaded ~ as ~ a ~ dependency.
5305 }
5306 \msg_new:nnn { enumext } { package-load-foot }
5307 {
5308     The ~ '#1' ~ package ~ is ~ loaded ~ with ~ the ~ option ~ '#2'.
5309 }

```

Message used in the creation of counters by `enumext` package.

```

5310 \msg_new:nnn { enumext } { counters }

```

```

5311 {
5312     The ~ counter ~ '#1' ~ is ~ already ~ defined ~ by ~ some ~ \\
5313     package ~ or ~ macro, ~ it ~ cannot ~ be ~ continued.
5314 }

```

Message used by `align` and `mark-pos` keys.

```

5315 \msg_new:nnn { enumext } { unknown-choice }
5316 {
5317     The ~ value ~ '#3' ~ for ~ '#1' ~ key ~ is ~ invalid ~ use ~ ('#2').
5318 }

```

Message used by reserved `anskey*` environment by `enumext` package.

```

5319 \msg_new:nnnn { enumext } { anskey-env-error }
5320 {
5321     The ~ '#1' ~ environment ~is~ reserved ~ by ~\\
5322     'enumext' ~ package, ~ It~ is~ already~ defined.
5323 }
5324 {
5325     The ~ anskey* ~ environment ~ is ~ defined ~ internally ~
5326     for ~ the ~ 'save-ans' ~ key.\\
5327 }

```

Message used in the creation of `(prop list)` by `enumext` package.

```

5328 \msg_new:nnn { enumext } { store-prop }
5329 {
5330     * ~ Package ~ enumext: ~ Creating ~
5331     \c_backslash_str g__enumext_#1_prop ~ \msg_line_context:.
5332 }
5333 \msg_new:nnn { enumext } { store-seq }
5334 {
5335     * ~ Package ~ enumext: ~ Creating ~
5336     \c_backslash_str g__enumext_#1_seq ~ \msg_line_context:.
5337 }
5338 \msg_new:nnn { enumext } { store-int }
5339 {
5340     * ~ Package ~ enumext: ~ Creating ~
5341     \c_backslash_str g__enumext_resume_#1_int ~ \msg_line_context:.
5342 }
5343 \msg_new:nnn { enumext } { prop-seq-int-hook }
5344 {
5345     * ~ Package ~ enumext: ~ Elements ~ in ~
5346     \c_backslash_str g__enumext_#1_prop ~ = ~ #2.\\
5347     * ~ Package ~ enumext: ~ Elements ~ in ~
5348     \c_backslash_str g__enumext_#1_seq ~ = ~ #3.\\
5349     * ~ Package ~ enumext: ~ Value ~ off ~
5350     \c_backslash_str g__enumext_resume_#1_int ~ = ~ #4.
5351 }
5352 \msg_new:nnn { enumext } { item-answer-hook }
5353 {
5354     * ~ Package ~ enumext: ~ Value ~ off ~
5355     \c_backslash_str g__enumext_item_number_int ~ = ~ #1.\\
5356     * ~ Package ~ enumext: ~ Value ~ off ~
5357     \c_backslash_str g__enumext_item_anskey_int ~ = ~ #2.\\
5358     * ~ Package ~ enumext: ~ Difference ~ item_number_int ~ - ~ item_anskey_int ~ = ~ #3.
5359 }

```

Message used by `[key = val]` system and `\setenumext` command.

```

5360 \msg_new:nnn { enumext } { invalid-key }
5361 {
5362     The ~ key ~ '#1' ~ is ~ not ~ know ~ the ~ level ~ #2.
5363 }
5364 \msg_new:nnn { enumext } { unknown-key-family }
5365 {
5366     Unknown~key~family~`\l_keys_key_str'~for~enumext.
5367 }

```

Messages used in length calculation.

```

5368 \msg_new:nnn { enumext } { width-negative }
5369 {
5370     Ignoring ~ negative ~ value ~ '#1=#2' ~ \msg_line_context:.\\
5371     The ~ key ~ '#1'~ accepts ~ values ~ >= ~ #2.
5372 }
5373 \msg_new:nnn { enumext } { width-zero }

```

```

5374 {
5375     Invalid ~ '#1=#2' ~ \msg_line_context:.\
5376     The ~ key ~ '#1'~ accepts ~ values ~ > ~ 0pt.
5377 }

```

Messages used by `show-length` key in `enumext`.

```

5378 \msg_new:nnn { enumext } { list-lengths }
5379 {
5380     **** ~ Lengths ~ used ~ by ~ '#2' ~ level ~ '#2' ~ \msg_line_context:~\c_space_tl ****\\
5381     \__enumext_show_length:nnn { dim } { labelsep } {#1}
5382     \__enumext_show_length:nnn { dim } { labelwidth } {#1}
5383     \__enumext_show_length:nnn { dim } { itemindent } {#1}
5384     \__enumext_show_length:nnn { dim } { leftmargin } {#1}
5385     \__enumext_show_length:nnn { dim } { rightmargin } {#1}
5386     \__enumext_show_length:nnn { dim } { listparindent } {#1}
5387     \__enumext_show_length:nnn { skip } { topsep } {#1}
5388     \__enumext_show_length:nnn { skip } { parsep } {#1}
5389     \__enumext_show_length:nnn { skip } { partopsep } {#1}
5390     \__enumext_show_length:nnn { skip } { itemsep } {#1}
5391     *****
5392 }

```

Messages used by `show-length` key in `enumext*`, `keyans*` and `keyans`.

```

5393 \msg_new:nnn { enumext } { list-lengths-not-nested }
5394 {
5395     **** ~ Lengths ~ used ~ by ~ '#2' ~ environment ~ \msg_line_context:~\c_space_tl ****\\
5396     \__enumext_show_length:nnn { dim } { labelsep } {#1}
5397     \__enumext_show_length:nnn { dim } { labelwidth } {#1}
5398     \__enumext_show_length:nnn { dim } { itemindent } {#1}
5399     \__enumext_show_length:nnn { dim } { leftmargin } {#1}
5400     \__enumext_show_length:nnn { dim } { rightmargin } {#1}
5401     \__enumext_show_length:nnn { dim } { listparindent } {#1}
5402     \__enumext_show_length:nnn { skip } { topsep } {#1}
5403     \__enumext_show_length:nnn { skip } { parsep } {#1}
5404     \__enumext_show_length:nnn { skip } { partopsep } {#1}
5405     \__enumext_show_length:nnn { skip } { itemsep } {#1}
5406     *****
5407 }

```

Messages used by `ref` key.

```

5408 \msg_new:nnn { enumext } { key-ref-empty }
5409 {
5410     Key ~ 'ref' ~ need ~ a ~ value ~ in ~ '#1'~ \msg_line_context:.
5411 }

```

Messages used by `save-ans` key.

```

5412 \msg_new:nnn { enumext } { save-ans-empty }
5413 {
5414     Key ~ 'save-ans' ~ need ~ a ~ value ~ in ~ '#1'~ \msg_line_context:.
5415 }
5416 \msg_new:nnn { enumext } { save-ans-log }
5417 {
5418     * ~ Package ~ enumext: ~ Start ~ #1\c_space_tl with ~ save-ans=#2 ~ \msg_line_context:.
5419 }
5420 \msg_new:nnn { enumext } { save-ans-log-hook }
5421 {
5422     * ~ Package ~ enumext: ~ Stop ~ #1\c_space_tl with ~ save-ans=#2 ~ \msg_line_context:.
5423 }
5424 \msg_new:nnn { enumext } { save-ans-hook }
5425 {
5426     Stop ~ storing ~ for ~ 'save-ans=#1' ~ \msg_line_context:.
5427 }

```

Messages used by the internal system to check answer used by `check-ans` key.

```

5428 \msg_new:nnn { enumext } { need-save-ans }
5429 {
5430     Key ~ '#1'~ works ~ only ~ with ~ the ~ 'save-ans' ~ key ~ in ~ '#2'~ \msg_line_context:.
5431 }
5432 \msg_new:nnn { enumext } { items-same-answer }
5433 {
5434     *****\\
5435     * ~ Package ~ enumext: ~ Checking ~ answers ~ in ~ '#1' ~
5436     for ~ \c_left_brace_str #2 \c_right_brace_str\\

```

```

5437 * ~ started ~ #3 ~ and ~ close ~ \msg_line_context: : ~
5438 'OK', ~ all ~ items ~ with ~ answer.\\
5439 *****
5440 }
5441 \msg_new:nnn { enumext } { item-greater-answer }
5442 {
5443   Checking ~ answers ~ in ~ '#1' ~ for ~ \c_left_brace_str #2 \c_right_brace_str\\
5444   started ~ #3 ~ and ~ close ~ \msg_line_context: : ~'NOT ~ OK'\\
5445   Items ~ > ~ Answers.
5446 }
5447 \msg_new:nnn { enumext } { item-less-answer }
5448 {
5449   Checking ~ answers ~ in ~ '#1' ~ for ~ \c_left_brace_str #2 \c_right_brace_str\\
5450   started ~ #3 ~ and ~ close ~ \msg_line_context: : ~'NOT ~ OK'\\
5451   Items ~ < ~ Answers.
5452 }

```

Messages used by the internal system to check for “starred” `\item*` and `\anspic*` commands.

```

5453 \msg_new:nnn { enumext } { missing-starred }
5454 {
5455   Missing ~ '\c_backslash_str #1*' ~ #2.
5456 }
5457 \msg_new:nnn { enumext } { many-starred }
5458 {
5459   Many ~ '\c_backslash_str #1*' ~ #2.
5460 }

```

Messages used by `\printkeyans*` command.

```

5461 \msg_new:nnn { enumext } { print-starred }
5462 {
5463   \c_backslash_str printkeyans*:~ The ~ sequence ~ '#1' ~ already ~ contains ~
5464   #2 ~ environment ~ \msg_line_context:.
5465 }

```

Message for the nesting depth of the environment `enumext`.

```

5466 \msg_new:nnn { enumext } { list-too-deep }
5467 {
5468   Too ~ deep ~ nesting ~ for ~ 'enumext' ~ \msg_line_context:~ \\
5469   The ~ maximum ~ level ~ of ~ nesting ~ is ~ 4.
5470 }

```

Messages used by `\anskey`, `anskey*` and `\anspic` commands.

```

5471 \msg_new:nnn { enumext } { anskey-unnumber-item }
5472 {
5473   Can't ~ store ~ with ~ a ~ unnumbered ~ \c_backslash_str item ~ \msg_line_context:.
5474 }
5475 \msg_new:nnn { enumext } { anskey-already-stored }
5476 {
5477   Content ~ already ~ stored ~ for ~ this ~ \c_backslash_str item ~ \msg_line_context:.
5478 }
5479 \msg_new:nnn { enumext } { anskey-empty-arg }
5480 {
5481   Can't ~ store ~ empty ~ content ~ \msg_line_context:.
5482 }
5483 \msg_new:nnn { enumext } { anskey-wrong-place }
5484 {
5485   Wrong ~ place ~ for ~ command ~ '\c_backslash_str #1' ~ \msg_line_context:~ \\
5486   '\c_backslash_str #1' ~ works ~ in ~ the ~ environment ~ '#2'.
5487 }
5488 \msg_new:nnn { enumext } { anskey-nested }
5489 {
5490   The ~ command ~ \c_backslash_str anskey~ can't ~ be ~ nested ~ \msg_line_context:.
5491 }
5492 \msg_new:nnn { enumext } { anskey-math-mode }
5493 {
5494   #1 ~ can't ~ work ~ in ~ math ~ mode ~ \msg_line_context:.
5495 }
5496 \msg_new:nnn { enumext } { anskey-env-wrong }
5497 {
5498   The ~ environment ~ anskey* ~ cannot ~ use ~ in ~ '#1' ~ \msg_line_context:.
5499 }
5500 \msg_new:nnn { enumext } { anspic-wrong-place }
5501 {

```



```

5502     Wrong ~ place ~ for ~ command ~ '\c_backslash_str #1' ~ \msg_line_context:~ \\
5503     '\c_backslash_str #1' ~ works ~ in ~ the ~ environment ~ '#2'.
5504 }
5505 \msg_new:nnn { enumext } { command-wrong-place }
5506 {
5507     Wrong ~ place ~ for ~ command ~ '\c_backslash_str #1' ~ \msg_line_context:~ \\
5508     '\c_backslash_str #1' ~ works ~ outside ~ the ~ environment ~ '#2'.
5509 }
5510 \msg_new:nnnn { enumext } { anskey-env-key-unknown }
5511 {
5512     The ~ key ~ '#1' ~ is ~ unknown ~ by ~ environment~
5513     'anskey*' ~ and ~ is ~ being ~ ignored.
5514 }
5515 {
5516     The ~ environment ~ 'anskey*' ~ does ~ not ~ have ~ a ~ key ~ called ~'#1'.\\
5517     Check ~ that ~ you ~ have ~ spelled ~ the ~ key ~ name ~ correctly.
5518 }
5519 \msg_new:nnnn { enumext } { anskey-env-key-value-unknown }
5520 {
5521     The ~ key ~ '#1=#2' ~ is ~ unknown ~ by ~ environment ~
5522     'anskey*' ~ and ~ is ~ being ~ ignored.
5523 }
5524 {
5525     The ~ environment ~ 'anskey*' ~ does ~ not ~ have ~ a ~ key ~ called ~'#1'.\\
5526     Check ~ that ~ you ~ have ~ spelled ~ the ~ key ~ name ~ correctly.
5527 }
5528 \msg_new:nnnn { enumext } { anskey-cmd-key-unknown }
5529 { The ~ key ~ '#1' ~ is ~ unknown ~ by ~ '\c_backslash_str anskey' ~ and ~ is ~ being ~ ignored.}
5530 {
5531     The ~ command ~'\c_backslash_str anskey' ~ does ~ not ~ have ~ a ~ key ~ called ~'#1'.\\
5532     Check ~ that ~ you ~ have ~ spelled ~ the ~ key ~ name ~ correctly.
5533 }
5534 \msg_new:nnnn { enumext } { anskey-cmd-key-value-unknown }
5535 { The ~ key ~ '#1=#2' ~ is ~ unknown ~ by ~ '\c_backslash_str anskey' ~ and ~ is ~ being ~ ignored.}
5536 {
5537     The ~ command ~ '\c_backslash_str anskey' ~ does ~ not ~ have ~ a ~ key ~ called ~'#1'.\\
5538     Check ~ that ~ you ~ have ~ spelled ~ the ~ key ~ name ~ correctly.
5539 }

```

Messages used by `keyans`, `keyans*` and `keyanspic` environment.

```

5540 \msg_new:nnn { enumext } { keyans-nested }
5541 {
5542     The ~ environment ~ 'keyans' ~ can't ~ be ~ nested ~ \msg_line_context:.
5543 }
5544 \msg_new:nnn { enumext } { keyans-wrong-level }
5545 {
5546     Wrong ~ level ~ position ~ for ~ 'keyans' ~ \msg_line_context:~ \\
5547     The ~ environment ~ 'keyans' ~ can ~ only ~ be ~ in ~ the ~ first ~ level.
5548 }
5549 \msg_new:nnn { enumext } { wrong-place }
5550 {
5551     Wrong ~ place ~ for ~ '#1' ~ environment ~\msg_line_context:~ \\
5552     '#1' ~ is ~ only ~ found ~ with ~ '#2' ~ in ~ 'enumext.
5553 }
5554 \msg_new:nnn { enumext } { keyanspic-nested }
5555 {
5556     The ~ environment ~ 'keyanspic' ~ can't ~ be ~ nested~ \msg_line_context:~.
5557 }
5558 \msg_new:nnn { enumext } { keyanspic-wrong-level }
5559 {
5560     Wrong ~ level ~ position ~ for ~ 'keyanspic' ~ \msg_line_context:~ \\
5561     The ~ environment ~ 'keyans' ~ can ~ only ~ be ~ in ~ the ~ first ~ level.
5562 }
5563 \msg_new:nnn { enumext } { keyanspic-item-cmd }
5564 {
5565     Can't ~ use ~ \c_backslash_str item ~ in ~ keyanspic ~ \msg_line_context:.
5566 }
5567 \msg_new:nnnn { enumext } { keyans-unknown-key }
5568 {
5569     The ~ key ~ '#1' ~ is ~ unknown ~ by ~ environment~
5570     '\_enumext_envir_name_tl' ~ and ~ is ~ being ~ ignored.
5571 }

```

```

5572 {
5573     The ~ environment ~ '\l__enumext_envir_name_tl' ~ does ~ not
5574     ~ have ~ a ~ key ~ called ~ '#1'.\\
5575     Check ~ that ~ you ~ have ~ spelled ~ the ~ key ~ name ~ correctly.
5576 }
5577 \msg_new:nnnn { enumext } { keyans-unknown-key-value }
5578 {
5579     The ~ key ~ '#1=#2' ~ is ~ unknown ~ by ~ environment ~
5580     '\l__enumext_envir_name_tl' ~ and ~ is ~ being ~ ignored.
5581 }
5582 {
5583     The ~ environment ~ '\l__enumext_envir_name_tl' ~ does ~ not
5584     ~ have ~ a ~ key ~ called ~ '#1'.\\
5585     Check ~ that ~ you ~ have ~ spelled ~ the ~ key ~ name ~ correctly.
5586 }

```

Message used by unknown *⟨keys⟩* in enumext\*. environment.

```

5587 \msg_new:nnnn { enumext } { starred-unknown-key }
5588 {
5589     The ~ key ~ '#1' ~ is ~ unknown ~ by ~ environment~
5590     '\l__enumext_envir_name_tl' ~ and ~ is ~ being ~ ignored.
5591 }
5592 {
5593     The ~ environment ~ '\l__enumext_envir_name_tl' ~ does ~ not
5594     ~ have ~ a ~ key ~ called ~ '#1'.\\
5595     Check ~ that ~ you ~ have ~ spelled ~ the ~ key ~ name ~ correctly.
5596 }
5597 \msg_new:nnnn { enumext } { starred-unknown-key-value }
5598 {
5599     The ~ key ~ '#1=#2' ~ is ~ unknown ~ by ~ environment ~
5600     '\l__enumext_envir_name_tl' ~ and ~ is ~ being ~ ignored.
5601 }
5602 {
5603     The ~ environment ~ '\l__enumext_envir_name_tl' ~ does ~ not
5604     ~ have ~ a ~ key ~ called ~ '#1'.\\
5605     Check ~ that ~ you ~ have ~ spelled ~ the ~ key ~ name ~ correctly.
5606 }

```

Message used by unknown *⟨keys⟩* in enumext environment.

```

5607 \msg_new:nnnn { enumext } { standar-unknown-key }
5608 {
5609     The ~ key ~ '#1' ~ is ~ unknown ~ by ~ environment ~ '\l__enumext_envir_name_tl' \c_space_tl
5610     ~ on ~ level ~ \int_use:N \l__enumext_level_int \c_space_tl and ~ is ~ being ~ ignored.
5611 }
5612 {
5613     The ~ environment ~ '\l__enumext_envir_name_tl' ~ does ~ not
5614     ~ have ~ a ~ key ~ called ~ '#1' ~ on ~ level ~ \int_use:N \l__enumext_level_int.\\
5615     Check ~ that ~ you ~ have ~ spelled ~ the ~ key ~ name ~ correctly.
5616 }
5617 \msg_new:nnnn { enumext } { standar-unknown-key-value }
5618 {
5619     The ~ key ~ '#1=#2' ~ is ~ unknown ~ by ~ environment ~ '\l__enumext_envir_name_tl' \c_space_
5620     ~ on ~ level ~ \int_use:N \l__enumext_level_int \c_space_tl and ~ is ~ being ~ ignored.
5621 }
5622 {
5623     The ~ environment ~ '\l__enumext_envir_name_tl' ~ does ~ not
5624     ~ have ~ a ~ key ~ called ~ '#1' ~ on ~ level ~ \int_use:N \l__enumext_level_int.\\
5625     Check ~ that ~ you ~ have ~ spelled ~ the ~ key ~ name ~ correctly.
5626 }

```

Message used by unknown *⟨keys⟩* in \foreachkeyans.

```

5627 \msg_new:nnnn { enumext } { for-key-unknown }
5628 { The~key~'#1'~is~unknown~by~'\c_backslash_str foreachkeyans'~and~is~being~ignored.}
5629 {
5630     The~command~'\c_backslash_str foreachkeyans'~does~not~have~a~key~called~'#1'.\\
5631     Check~that~you~have~spelled~the~key~name~correctly.
5632 }
5633 \msg_new:nnnn { enumext } { for-key-value-unknown }
5634 { The~key~'#1=#2'~is~unknown~by~'\c_backslash_str foreachkeyans'~and~is~being~ignored. }
5635 {
5636     The~command~'\c_backslash_str foreachkeyans'~does~not~have~a~key~called~'#1'.\\
5637     Check~that~you~have~spelled~the~key~name~correctly.
5638 }

```

Messages used by `\getkeyans` command.

```
5639 \msg_new:nnn { enumext } { undefined-storage-anskey }
5640 {
5641   Storage ~ named ~ '#1' ~ is ~ not ~ defined ~ \msg_line_context:.
5642 }
```

Messages used by `\miniright` command.

```
5643 \msg_new:nnn { enumext } { missing-miniright }
5644 {
5645   Missing ~ '\c_backslash_str miniright' ~ in ~ \msg_line_context:.\
5646   The ~ key ~ 'mini-env' ~ need ~ '\c_backslash_str miniright'.
5647 }
5648 \msg_new:nnn { enumext } { wrong-miniright-place }
5649 {
5650   Wrong ~ place ~ for ~ '\c_backslash_str miniright' ~ \msg_line_context:~ \
5651   Works ~ in ~ 'enumext' ~ and ~ 'keyans' ~ with ~ key ~ 'mini-env'.
5652 }
5653 \msg_new:nnn { enumext } { wrong-miniright-use }
5654 {
5655   Wrong ~ use ~ for ~ '\c_backslash_str miniright' ~ \msg_line_context:~ \
5656   '\c_backslash_str miniright' ~ need ~ a ~ key ~ 'mini-env'.
5657 }
5658 \msg_new:nnn { enumext } { wrong-miniright-starred }
5659 {
5660   Can't ~ use ~ \c_backslash_str miniright ~ in ~ starred ~ environments ~ \msg_line_context:.
5661 }
5662 \msg_new:nnn { enumext } { many-miniright-used }
5663 {
5664   Can't ~ use ~ \c_backslash_str miniright ~ more ~ than ~ once ~ \msg_line_context:.
5665 }
```

Messages used by `\setenumextmeta` command.

```
5666 \msg_new:nnn { enumext } { unknown-set }
5667 {
5668   Argument ~ [#1] ~ is ~ unknown ~ by ~ \c_backslash_str setenumextmeta ~ \msg_line_context:.
5669 }
5670 \msg_new:nnn { enumext } { already-defined }
5671 {
5672   The ~ key ~ '#1' ~ is ~ already ~ defined ~ \msg_line_context:.
5673 }
5674 \msg_new:nnn { enumext } { prohibited-unknown }
5675 {
5676   The ~ name ~ 'unknown' ~ can't ~ be ~ chosen~ for ~ a ~ meta ~ key ~ \msg_line_context:.
5677 }
```

Messages used by `enumext*` and `keyans*` environments.

```
5678 \msg_new:nnn { enumext } { nested }
5679 {
5680   The ~ environment ~ \l__enumext_envir_name_tl \c_space_tl can't ~ be ~ nested ~ \msg_line_context:.
5681 }
5682 \msg_new:nnn { enumext } { nested-horizontal }
5683 {
5684   The ~ environment ~ \l__enumext_envir_name_tl \c_space_tl can't ~ be ~ nested ~ in ~ '#1' ~ \
5685 }
5686 \msg_new:nnn { enumext } { item-joined }
5687 {
5688   Items ~ joined ~ (#1) ~ > ~ #2 ~ columns ~ \msg_line_context:.
5689 }
5690 \msg_new:nnn { enumext } { item-joined-columns }
5691 {
5692   Not ~ space ~ to ~ join ~ items ~ (#1) ~ > ~ #2 ~ \msg_line_context:.
5693 }
```

## 12.51 Finish package

Finish package implementation.

```
5694 \file_input_stop:
5695 </package>
```

### 13 Index of Implementation

The *italic* numbers denote the pages where the corresponding entry is described, the numbers underlined and all others indicate the line on which they are implemented in the package code.

Symbols	
<code>\*</code>	227
<code>\+</code>	219
<code>\-</code>	219
<code>\\</code>	235, 2779, 4126, 5312, 5321, 5326, 5346, 5348, 5355, 5357, 5370, 5375, 5380, 5395, 5434, 5436, 5438, 5443, 5444, 5449, 5450, 5468, 5485, 5502, 5507, 5516, 5525, 5531, 5537, 5546, 5551, 5560, 5574, 5584, 5594, 5604, 5614, 5624, 5630, 5636, 5645, 5650, 5655
A	
<code>above</code>	1594
<code>above*</code>	1594
<code>\addvspace</code>	1163, 1192, 1235, 1238, 1406, 1409, 1506, 1512, 1547, 1553, 1574, 1580, 3641, 3780, 3798, 3998, 4001, 4331, 4346, 4392, 4406
<code>after</code>	992
<code>align</code>	535
<code>\Alph</code>	37, 41, 42
<code>\Alph</code>	487, 605, 650, 718, 5022
<code>\alph</code>	37, 41, 42
<code>\alph</code>	488, 603, 5014
<code>\anskey</code>	12, 75, 77, 2597
<code>anskey*</code>	13, 2707
<code>\anspic</code>	15, 103, 106, 4034
<code>\anspic*</code>	69
<code>\arabic</code>	30, 37
<code>\arabic</code>	486, 602, 649, 5006, 5010, 5026
B	
<code>base-fix</code>	848
<code>\baselineskip</code>	50
<code>\baselineskip</code>	865, 876
<code>before</code>	992
<code>before*</code>	992
<code>below</code>	1594
<code>below*</code>	1594
bool commands:	
<code>\bool_gset_false:N</code>	356, 357, 358, 2883, 2885, 4348, 4352, 4408
<code>\bool_gset_true:N</code>	264, 274, 1095, 2087, 2093, 4317, 4349, 4381, 4409
<code>\bool_if:NTF</code>	426, 438, 455, 1528, 1616, 1630, 1643, 1654, 1665, 1676, 1687, 1698, 1747, 1764, 1769, 1777, 1804, 1842, 1847, 1854, 1858, 1880, 1885, 1893, 1900, 1931, 1939, 2032, 2230, 2240, 2319, 2343, 2350, 2374, 2472, 2494, 2534, 2547, 2551, 2601, 2620, 2644, 2698, 2709, 2798, 2835, 2899, 2932, 2947, 3022, 3033, 3037, 3056, 3069, 3111, 3145, 3188, 3207, 3349, 3364, 3426, 3436, 3468, 3473, 3574, 3622, 3650, 3708, 3763, 3788, 3934, 3996, 4036, 4055, 4101, 4310, 4326, 4332, 4375, 4389, 4393, 4517, 4527, 4610, 4617, 4633, 4652, 4675, 4737, 4747, 4854, 4858, 4884, 4891, 4910, 4920, 4941
<code>\bool_if:nTF</code>	1554, 1581, 3167, 3323, 3384, 3913, 4077, 5045, 5187
<code>\bool_if_p:N</code>	283, 298, 861, 862, 872, 873, 1911, 1912, 1920, 1921, 2045, 2071, 2084, 2085, 2090, 2091, 2407, 2417, 2429, 2444, 2445, 2479, 2520, 2521, 2821, 3009, 3010, 3047, 3048, 3547, 3549, 3560, 4084, 4085
<code>\bool_lazy_all:nTF</code>	281, 296, 2043, 2069, 2405, 2414, 2427, 2442, 3545, 3558
<code>\bool_lazy_and:nnTF</code>	260, 270, 860, 871, 1521, 1910, 1919, 2083, 2089, 2478, 2485, 2519, 2662, 2674, 2820, 2826, 3008
<code>\bool_lazy_or:nnTF</code>	1972, 1979, 3046, 4083, 5210
<code>\bool_new:N</code>	34, 35, 36, 37, 38, 39, 40, 41, 64, 73, 97, 102, 103, 108, 109, 112, 137, 138, 145, 152, 153, 158, 160, 161, 175, 187, 189
<code>\bool_not_p:n</code>	261, 271, 2416, 2480, 2486, 2822, 2827, 3548, 3561
<code>\bool_set_eq:NN</code>	3120, 3303, 4564, 4807
<code>\bool_set_false:N</code>	435, 882, 2017, 2018, 2050, 2055, 2059, 2063, 2076, 2762, 3522, 3667, 3716, 3803, 3931, 4003, 4485, 4512, 4561, 4753, 4804
<code>\bool_set_true:N</code>	288, 289, 303, 304, 415, 419, 528, 897, 1600, 1605, 1867, 1989, 1990, 2262, 2270, 2763, 3114, 3116, 3148, 3150, 3299, 3311, 3448, 3521, 3554, 3567, 3593, 3713, 3740, 3915, 4299, 4364, 4484, 4568, 4575, 4576, 4613, 4751, 4811, 4818, 4819
box commands:	
<code>\box_dp:N</code>	1452, 1453, 1456, 1463, 1476, 1484, 1490, 1498, 3944, 3949, 3998, 4112
<code>\box_ht:N</code>	1235, 1238, 1249, 1250, 1261, 1263, 1278, 1281, 1289, 1290, 1301, 1303, 1318, 1321, 1328, 1329, 1340, 1342, 1357, 1360, 1406, 1409, 1417, 1418, 1426, 1427, 1439, 1441
<code>\box_ht_plus_dp:N</code>	3940, 4064
<code>\box_new:N</code>	70, 148, 149, 182, 188
<code>\box_use_drop:N</code>	4343, 4404, 4672, 4938
<code>\box_wd:N</code>	494
C	
<code>\c</code>	227, 228, 755, 757, 769, 771
<code>\catcode</code>	2779
<code>\cB</code>	228
<code>\cE</code>	228
<code>\centering</code>	1556, 1583, 4024, 4336, 4397
<code>check-ans</code>	2009
Document class:	
<code>article</code>	43
clist commands:	
<code>\clist_const:Nn</code>	194
<code>\clist_map_function:nN</code>	4007
<code>\clist_map_inline:Nn</code>	534, 803, 991, 1006, 1087, 1610
<code>\clist_map_inline:nn</code>	49, 60, 78, 86, 99, 111, 140, 169, 193, 565, 585, 857, 902, 923, 1101, 1716, 1956, 2023, 2209, 2227, 2259, 2402, 2941, 3228, 3240, 3280, 3413, 3416, 3443, 3455, 3458, 3478, 5163
<code>\columnbreak</code>	75
<code>\columnbreak</code>	2482
<code>columns</code>	1071
<code>columns-sep</code>	1071
<code>\columnsep</code>	98
<code>\columnsep</code>	3617, 3761
<code>\columnseprule</code>	98
<code>\columnseprule</code>	3620, 3762
Commands provide by <b>enumext</b> :	
<code>\anskey</code>	28, 65, 66, 71, 72, 74, 76, 77, 84, 86, 96, 115, 124,

125, 133

\anspic\* . . . . 28, 29, 69, 72, 84, 85, 105, 106, 124, 125

\anspic . . . . . 28, 72, 103, 105, 106, 133

\foreachkeyans . . . . . 129, 135

\getkeyans . . . . . 72, 124, 136

\item\* 28, 29, 69, 72, 84, 85, 87, 88, 91, 116, 121, 122, 124, 125

\item . . . . . 87, 91, 109, 115–117, 120, 121

\miniright . . . . . 27, 48, 56, 57, 97, 99, 136

\printkeyans\* . . . . . 125

\printkeyans . . . . . 28, 72, 125

\setenumextmeta . . . . . 128, 136

\setenumext . . . . . 28, 125, 127, 128, 131

Counters defined by [enumext](#):

enumXiii . . . . . 26, 36

enumXii . . . . . 26, 36

enumXiv . . . . . 26, 36

enumXi . . . . . 26, 36

enumXviii . . . . . 26, 36

enumXvii . . . . . 26, 36, 116

enumXvi . . . . . 26, 36

enumXv . . . . . 26, 36

cs commands:

\cs\_generate\_variant:Nn . 199, 200, 496, 512, 761, 777, 2311, 2316, 2392, 2715, 3403, 4009, 5222

\cs\_if\_exist:NTF . . . . . 466

\cs\_if\_free:NTF . . . . . 2666, 2678

\cs\_new:Nn . . . . . 213

\cs\_new:Npn . 231, 1717, 1726, 1734, 2274, 2283, 2291, 5071, 5080, 5089

\cs\_new\_eq:NN . 383, 384, 389, 390, 440, 441, 444, 445

\cs\_new\_protected:Nn . 223, 253, 279, 312, 342, 348, 354, 360, 366, 374, 392, 410, 626, 689, 741, 858, 1007, 1011, 1015, 1019, 1023, 1027, 1031, 1035, 1039, 1043, 1047, 1051, 1055, 1059, 1063, 1067, 1102, 1114, 1147, 1165, 1176, 1194, 1220, 1241, 1366, 1392, 1412, 1445, 1467, 1502, 1508, 1611, 1625, 1639, 1650, 1661, 1672, 1683, 1694, 1775, 1878, 1891, 1908, 1929, 1957, 1962, 1987, 2028, 2038, 2081, 2096, 2103, 2112, 2117, 2122, 2127, 2136, 2141, 2146, 2317, 2341, 2348, 2372, 2379, 2393, 2618, 2637, 2653, 2716, 2752, 2783, 2818, 2860, 2881, 2889, 2930, 2945, 2973, 3006, 3042, 3054, 3067, 3153, 3163, 3174, 3182, 3198, 3319, 3335, 3343, 3357, 3497, 3514, 3543, 3572, 3579, 3601, 3631, 3648, 3689, 3706, 3730, 3747, 3772, 3786, 3929, 4005, 4010, 4121, 4129, 4160, 4289, 4308, 4354, 4373, 4413, 4417, 4436, 4471, 4499, 4506, 4515, 4525, 4546, 4690, 4735, 4766, 4772, 4789, 4846, 4956

\cs\_new\_protected:Npn 201, 205, 209, 237, 448, 464, 481, 491, 497, 606, 651, 723, 748, 762, 1538, 1567, 1743, 1762, 1832, 1865, 1967, 2151, 2228, 2238, 2260, 2268, 2303, 2312, 2468, 2531, 2545, 2583, 2587, 2707, 2738, 2742, 2773, 2909, 2983, 3027, 3107, 3126, 3241, 3245, 3259, 3263, 3281, 3285, 3295, 3307, 3372, 3406, 3446, 3525, 3726, 3905, 3922, 4053, 4073, 4097, 4191, 4240, 4488, 4552, 4559, 4573, 4581, 4586, 4596, 4759, 4795, 4802, 4816, 4824, 4841, 4978, 4991, 5039, 5160, 5172, 5196, 5208, 5246, 5256, 5264, 5286

\cs\_new\_protected\_nopar:Nn . . 3839, 3881, 3889, 3897, 4535, 4539, 4666, 4778, 4782, 4932

\cs\_new\_protected\_nopar:Npn . . 3831, 3847, 4602, 4641, 4874, 4899

\cs\_set:Npn . . . . . 2403, 2440, 4984

\cs\_set\_eq:NN . . 4461, 4462, 4643, 4724, 4725, 4901

\cs\_set\_protected:Nn . . . . . 928, 944, 957, 970

\cs\_set\_protected:Npn 45, 54, 71, 79, 94, 100, 133, 165, 173, 513, 535, 570, 586, 633, 778, 804, 848, 884, 907, 983, 992, 1071, 1088, 1594, 1705, 1948, 2009, 2168, 2210, 2246, 2395, 2934, 3217, 3233, 3273, 3404, 3444

\cs\_to\_str:N . . . . . 483, 506

\cs\_undefine:N . . . . . 2655, 2656, 2657, 2658

## D

\d . . . . . 219

\DeclareDocumentEnvironment . . . . . 396

dim commands:

\dim\_abs:n . . . . . 3377, 3382

\dim\_add:Nn . . . . . 3948, 4154, 4185

\dim\_compare:nNnTF . 930, 946, 959, 972, 1253, 1265, 1293, 1305, 1332, 1344, 1421, 1429, 1540, 1569, 3374, 3379, 3385, 3391, 3393, 3395, 3584, 3606, 3734, 3751, 3924, 4131, 4147, 4162, 4178, 4291, 4356

\dim\_compare:nTF . . . . . 2504, 2848, 3503, 3695

\dim\_eval:n . . . . . 4108

\dim\_gset\_eq:NN . . . . . 4300, 4365

\dim\_gzero:N . . . . . 2887, 4351, 4411

\dim\_new:N . 67, 74, 75, 76, 96, 142, 150, 151, 181, 183, 184, 190

\dim\_set:Nn . . 494, 898, 3143, 3377, 3382, 3384, 3387, 3388, 3392, 3394, 3397, 3398, 3400, 3499, 3587, 3609, 3691, 3736, 3753, 3938, 4012, 4062, 4133, 4140, 4164, 4171, 4226, 4275, 4293, 4358, 4598

\dim\_set\_eq:NN 593, 640, 711, 715, 3058, 3059, 3071, 3072, 3138, 3415, 3457, 3617, 3761, 4233, 4236, 4237, 4282, 4285, 4286, 4591, 4663, 4929

\dim\_sub:Nn . . . . . 3508, 3700, 4149, 4180

\dim\_use:N 931, 939, 1541, 1551, 2382, 2385, 2390, 3158, 3160, 3203, 3505, 3510, 3585, 3590, 3591, 3597, 3607, 3611, 3612, 3614

\dim\_zero:N . . . . 3449, 3620, 3762, 3950, 3951, 3952

\dim\_zero\_new:N . . . . . 463

\c\_zero\_dim 933, 947, 960, 973, 1541, 1569, 2506, 2850, 3374, 3379, 3385, 3392, 3505, 3585, 3607, 3697, 3734, 3751, 3924, 4131, 4147, 4162, 4178, 4291, 4356

\dimeval . . . . . 2175

## E

\end . . . 2345, 2376, 3638, 3777, 3992, 4026, 5047, 5056, 5063

end internal commands:

\end\_\_enumext\_mini\_page . 1549, 1576, 3659, 3797, 4315, 4379, 4405

\endgroup . . . . . 2779

\endlist . . . . . 384

\endminipage . . . . . 390

enumext . . . . . 5, 3479

enumext internal commands:

\l\_\_enumext\_\_ref\_the\_count\_tl . . . . . 39

\l\_\_enumext\_\_resume\_name\_tl . . . . . 61

\\_\_enumext\_add\_meta\_key:nnn . . 129, 5174, 5190, 5191, 5193, 5196

\\_\_enumext\_add\_pre\_parsep: . 49, 1112, 1114, 1114

\\_\_enumext\_after\_args\_exec: 46, 1007, 1019, 3492

\\_\_enumext\_after\_args\_exec\_v: 1023, 1035, 3683

\\_\_enumext\_after\_args\_exec\_viii: . . 1039, 1063

\\_\_enumext\_after\_args\_exec\_viii: . . . . 1067

\\_\_enumext\_after\_env:nn 81–83, 99, 111, 119, 205, 205, 2793, 3670, 4324, 4387, 4706

\\_\_enumext\_after\_hyperref: . . 34, 408, 410, 410

\\_\_enumext\_after\_list: . 98, 120, 3495, 3648, 3648

```

\l__enumext_after_list_args_v_tl . . . . . 1037
\l__enumext_after_list_args_vii_tl 1065, 4661
\l__enumext_after_list_args_viii_tl . . 1069,
    4919
\__enumext_after_list_v: . . . . 3687, 3730, 3786
\__enumext_after_list_vii: 114, 4469, 4506, 4506
\__enumext_after_list_viii: . . 4733, 4772, 4772
\__enumext_after_stop_list: . 46, 99, 1007, 1015,
    3664
\__enumext_after_stop_list_v: 1023, 1031, 3804
\l__enumext_after_stop_list_v_tl . . . . . 1033
\__enumext_after_stop_list_vii: . . 114, 1039,
    1055, 4509
\l__enumext_after_stop_list_vii_tl . . . 1057
\__enumext_after_stop_list_viii: . 1059, 4775
\l__enumext_after_stop_list_viii_tl . . . 1061
\l__enumext_align_label_pos_v_str . . . . 3361
\l__enumext_align_label_pos_X_str . . . . . 79
\l__enumext_align_label_vii_str . . . . . 4630
\l__enumext_align_label_viii_str . . . . . 4888
\l__enumext_align_label_X_str . . . . . 173
\c__enumext_all_envs_clist . . 194, 534, 803, 991,
    1006, 1087, 1610
\c__enumext_all_families_seq . . 127, 5128, 5154
\l__enumext_anskey_env_bool 31, 80, 34, 289, 304,
    2709
\__enumext_anskey_env_clean_vars: . 83, 2814,
    2818, 2881
\__enumext_anskey_env_define_keys: 80, 2707,
    2716, 2787
\__enumext_anskey_env_exec: 81, 2712, 2783, 2783
\__enumext_anskey_env_make:n 65, 80, 1992, 2707,
    2707, 2715
\__enumext_anskey_env_reset_keys: 81, 82, 2752,
    2815
\__enumext_anskey_env_reset_keys:\__-
    enumext_rescan_anskey_env:n . . . . . 2707
\__enumext_anskey_env_save_keys: . . 82, 2795,
    2818, 2818
\__enumext_anskey_env_store: . . 82, 2811, 2818,
    2860
\__enumext_anskey_env_unknown:n 80, 2735, 2738
\__enumext_anskey_env_unknown:nn . 2740, 2742
\l__enumext_anskey_level_int . . 28, 2639, 2640
\__enumext_anskey_safe_inner: . 78, 2612, 2618,
    2637
\__enumext_anskey_safe_inner:n . . . . . 77
\__enumext_anskey_safe_outer: . 77, 2599, 2618,
    2618
\__enumext_anskey_show_wrap_arg:n . 76, 2531,
    2531, 2549, 2564
\__enumext_anskey_show_wrap_left:n 76, 2476,
    2545, 2545
\__enumext_anskey_unknown:n 77, 2567, 2581, 2583
\__enumext_anskey_unknown:nn . 2567, 2585, 2587
\__enumext_anskey_wrapper:n . . . . . 2172, 2543
\l__enumext_anspic_body_box . . 141, 4061, 4064
\l__enumext_anspic_body_htdp_dim . 141, 4062,
    4111
\__enumext_anspic_box_set_dim:n . . 4053, 4053,
    4100
\__enumext_anspic_label:nn . . 4073, 4103, 4117
\l__enumext_anspic_label_box . . 141, 3937, 3940
\l__enumext_anspic_label_htdp_dim . 104, 141,
    3938, 3944, 4110
\__enumext_anspic_start_list_tag: 3855, 3881,
    4123
\__enumext_anspic_stop_list_tag: . 3855, 3897,
    4127
\__enumext_anspic_stop_start_list_tag: 3855,
    3889, 4125
\__enumext_at_begin_document:n 33, 34, 201, 201,
    381, 387
\l__enumext_base_line_fix_bool . 852, 862, 873,
    882
\__enumext_before_args_exec: . 46, 97, 114, 1007,
    1007, 3582
\__enumext_before_args_exec_v: 1023, 1023, 3733
\__enumext_before_args_exec_vii: . 1039, 1039,
    4503
\__enumext_before_args_exec_viii: 1043, 4769
\__enumext_before_env:nn 80, 205, 209, 2660, 2672,
    2684, 2785
\__enumext_before_keys_exec: . . 46, 1007, 1011,
    3489
\__enumext_before_keys_exec_v: 1023, 1027, 3680
\__enumext_before_keys_exec_vii . . . . . 1039
\__enumext_before_keys_exec_vii: . 1047, 4455
\__enumext_before_keys_exec_viii: 1051, 4718
\__enumext_before_list: . . 97, 3483, 3579, 3579
\__enumext_before_list_v: . . 3675, 3730, 3730
\__enumext_before_list_vii: . . 114, 4450, 4499,
    4499
\__enumext_before_list_viii: . . 120, 4714, 4766,
    4766
\l__enumext_before_no_starred_key_v_tl 1029
\l__enumext_before_no_starred_key_vii_-
    tl . . . . . 1049
\l__enumext_before_no_starred_key_viii_-
    tl . . . . . 1053
\l__enumext_before_starred_key_v_tl . . 1025
\l__enumext_before_starred_key_vii_tl . 1041
\l__enumext_before_starred_key_viii_tl 1045
\__enumext_calc_hspace:NNNNNNN 93, 3372, 3372,
    3403, 3408, 3450
\__enumext_check_ans_active: . 66, 97, 114, 2028,
    2028, 3583, 4502
\g__enumext_check_ans_item_tl . . . . . 85
\g__enumext_check_ans_key_bool 67, 68, 152, 356,
    2087, 2093, 2899
\l__enumext_check_ans_key_bool 67, 2013, 2018,
    2084, 2090
\__enumext_check_ans_key_hook: 67, 99, 114, 2081,
    2081, 3665, 4510
\__enumext_check_ans_level: . 66, 67, 2028, 2034,
    2038
\__enumext_check_ans_log: 68, 83, 2127, 2127, 2903
\__enumext_check_ans_log_msg_greater: 2127,
    2133, 2146
\__enumext_check_ans_log_msg_less: 2127, 2131,
    2136
\__enumext_check_ans_log_msg_same_ok: 2127,
    2132, 2141
\__enumext_check_ans_msg_greater: 2103, 2109,
    2122
\__enumext_check_ans_msg_less: 2103, 2107, 2112
\__enumext_check_ans_msg_same_ok: 2103, 2108,
    2117

```



\\_\_enumext\_check\_ans\_show: . . 68, 83, 2103, 2103, 2901  
 \l\_\_enumext\_check\_answers\_bool 65, 66, 77, 87, 88, 152, 1990, 2017, 2032, 2319, 2343, 2350, 2374, 2601, 2798, 3022, 3111, 3145, 4610  
 \\_\_enumext\_check\_starred\_cmd:n 32, 69, 85, 119, 2151, 2151, 3686, 3994, 4732  
 \g\_\_enumext\_check\_starred\_cmd\_int 152, 2154, 2160, 2165, 3317, 4082, 4853  
 \l\_\_enumext\_check\_start\_line\_env\_tl . 32, 152, 319, 327, 335, 2157, 2163, 2166  
 \l\_\_enumext\_columns\_sep\_v\_dim 3751, 3753, 3761  
 \l\_\_enumext\_columns\_sep\_vii\_dim . . 4131, 4133, 4142, 4154, 4230, 4687  
 \l\_\_enumext\_columns\_sep\_viii\_dim . 4162, 4164, 4173, 4185, 4279, 4953  
 \l\_\_enumext\_columns\_v\_int 1386, 1404, 1572, 3749, 3757, 3769, 3774  
 \l\_\_enumext\_columns\_vii\_int . . 4136, 4139, 4143, 4152, 4194, 4198, 4201, 4207, 4213, 4217, 4681, 4695  
 \l\_\_enumext\_columns\_viii\_int . 4167, 4170, 4174, 4183, 4243, 4247, 4250, 4256, 4262, 4266, 4947, 4962  
 \l\_\_enumext\_counter\_i\_tl . . . . . 45, 473  
 \l\_\_enumext\_counter\_ii\_tl . . . . . 45, 474  
 \l\_\_enumext\_counter\_iii\_tl . . . . . 45, 475  
 \l\_\_enumext\_counter\_iv\_tl . . . . . 45, 476  
 \c\_\_enumext\_counter\_style\_tl . . . . . 30, 50, 225  
 \g\_\_enumext\_counter\_styles\_tl . 26, 37, 67, 484, 502  
 \l\_\_enumext\_counter\_v\_tl . . . . . 45, 477, 731  
 \l\_\_enumext\_counter\_vi\_tl . . . . . 45, 478  
 \l\_\_enumext\_counter\_vii\_tl . . . . . 45, 479, 661  
 \l\_\_enumext\_counter\_viii\_tl . . . . . 45, 480, 678  
 \l\_\_enumext\_current\_widest\_dim 26, 67, 508, 594, 641, 712, 716  
 \\_\_enumext\_def\_meta\_key:nnn . . . 129, 5174, 5202, 5208, 5222  
 \\_\_enumext\_default\_item:n . . . 3107, 3107, 3171  
 \\_\_enumext\_define\_counters:Nn 26, 464, 464, 473, 474, 475, 476, 477, 478, 479, 480  
 \\_\_enumext\_endminipage: . 34, 387, 390, 404, 4345, 4668, 4934  
 \g\_\_enumext\_envir\_name\_tl 31, 34, 290, 305, 364, 1960, 1965, 1975, 2115, 2120, 2125, 2139, 2144, 2149  
 \l\_\_enumext\_envir\_name\_tl . 31, 32, 34, 259, 269, 318, 326, 334, 5570, 5573, 5580, 5583, 5590, 5593, 5600, 5603, 5609, 5613, 5619, 5623, 5680, 5684  
 \\_\_enumext\_execute\_after\_env: 33, 64, 68, 79, 83, 2889, 2889, 3670, 4708  
 \\_\_enumext\_fake\_item: . . . . . 928, 928, 3435  
 \l\_\_enumext\_fake\_item\_indent\_v\_dim 947, 952  
 \l\_\_enumext\_fake\_item\_indent\_v\_tl 949, 3300, 3304, 3312  
 \l\_\_enumext\_fake\_item\_indent\_vii\_dim 960, 965  
 \l\_\_enumext\_fake\_item\_indent\_vii\_tl 962, 4662  
 \l\_\_enumext\_fake\_item\_indent\_viii\_dim . 973, 978, 4924  
 \l\_\_enumext\_fake\_item\_indent\_viii\_tl . . 975, 4922, 4927  
 \l\_\_enumext\_fake\_item\_indent\_X\_tl . . . . 100  
 \\_\_enumext\_fake\_item\_vii: . . . . 928, 957, 3467  
 \\_\_enumext\_fake\_item\_viii: . . . . 928, 970, 3472  
 \\_\_enumext\_fake\_make\_label\_vii:n . 116, 4602, 4602, 4658  
 \\_\_enumext\_fake\_make\_label\_viii:n 4874, 4874, 4916  
 \\_\_enumext\_filter\_first\_level:n . . 126, 5071, 5071, 5105, 5116  
 \\_\_enumext\_filter\_first\_level\_key:n 127, 5071, 5076, 5080  
 \\_\_enumext\_filter\_first\_level\_pair:nn . 127, 5071, 5077, 5089  
 \\_\_enumext\_filter\_save\_key:n . . 71, 2235, 2243, 2266, 2272, 2274, 2274, 5004, 5008, 5012, 5016, 5020, 5024  
 \\_\_enumext\_filter\_save\_key\_key:n . . 71, 2274, 2279, 2283  
 \\_\_enumext\_filter\_save\_key\_pair:nn 72, 2274, 2280, 2291  
 \\_\_enumext\_filter\_series:n 60, 1717, 1717, 1755, 1767, 1772  
 \\_\_enumext\_filter\_series\_key:n 60, 1717, 1722, 1726  
 \\_\_enumext\_filter\_series\_pair:nn . . 60, 1717, 1723, 1734  
 \\_\_enumext\_first\_item\_tmp\_vii: 113, 115, 4461, 4535, 4535  
 \\_\_enumext\_first\_item\_tmp\_viii: 119, 120, 4724, 4778, 4778  
 \g\_\_enumext\_footnote\_arg\_seq . 170, 4419, 4432, 4442  
 \g\_\_enumext\_footnote\_int . 170, 4426, 4429, 4431, 4433  
 \g\_\_enumext\_footnote\_int\_seq . 170, 4420, 4433, 4438, 4441  
 \\_\_enumext\_footnotes\_key\_bool . . . . . 34  
 \l\_\_enumext\_footnotes\_key\_bool 29, 35, 117, 160, 419, 426, 435, 4652, 4675, 4910, 4941  
 \\_\_enumext\_footnotetext:nn . . . 4413, 4413, 4443  
 \\_\_enumext\_foreach\_add\_body:n . 130, 5223, 5283, 5286  
 \l\_\_enumext\_foreach\_after\_tl . . . . . 5227, 5295  
 \l\_\_enumext\_foreach\_before\_tl . . . . 5225, 5290  
 \g\_\_enumext\_foreach\_default\_keys\_tl 129, 126, 5245, 5266  
 \\_\_enumext\_foreach\_keyans:nn . . 130, 5223, 5262, 5264  
 \l\_\_enumext\_foreach\_name\_prop\_tl . 126, 5268, 5293  
 \l\_\_enumext\_foreach\_print\_seq 126, 5278, 5284, 5288  
 \l\_\_enumext\_foreach\_sep\_tl . . . . . 5237, 5284  
 \l\_\_enumext\_foreach\_start\_int . . . . 5229, 5280  
 \l\_\_enumext\_foreach\_step\_int . . . . 5233, 5281  
 \l\_\_enumext\_foreach\_stop\_int . 5231, 5273, 5275, 5282  
 \\_\_enumext\_foreach\_wrapper:n . . . . 5235, 5291  
 \\_\_enumext\_getkeyans:nn . . 125, 4987, 4991, 4991  
 \\_\_enumext\_getkeyans\_aux:n 124, 4975, 4978, 4978  
 \l\_\_enumext\_hyperref\_bool . 29, 34, 35, 160, 415, 438, 455, 2521, 3010  
 \\_\_enumext\_hypertarget:nn 35, 410, 440, 444, 460  
 \\_\_enumext\_if\_is\_int:n . . . . . 217  
 \\_\_enumext\_if\_is\_int:nTF . . . . . 217, 750, 764  
 \\_\_enumext\_internal\_mini\_page: 34, 96, 113, 392, 392, 3516, 4473  
 \\_\_enumext\_is\_not\_nested: 26, 31, 96, 113, 253, 253, 3517, 4474



```

\__enumext_is_on_first_level: . 26, 31, 96, 113,
    253, 279, 3523, 4486
\g__enumext_item_anskey_int 77, 85, 152, 351, 378,
    379, 2100, 2470, 3024
\__enumext_item_answer_diff: 68, 83, 2096, 2096,
    2896
\g__enumext_item_answer_diff_int 68, 152, 352,
    2098, 2105, 2129
\l__enumext_item_column_pos_vii_int 115, 4201,
    4207, 4213, 4217, 4224, 4542, 4681, 4684
\l__enumext_item_column_pos_viii_int .. 120,
    4250, 4256, 4262, 4266, 4273, 4785, 4947, 4950
l__enumext_item_column_pos_X_int ..... 173
\g__enumext_item_count_all_vii_int 115, 4225,
    4543, 4695, 4703
\g__enumext_item_count_all_viii_int 120, 4274,
    4786, 4961, 4970
\g__enumext_item_count_all_X_int ..... 173
\g__enumext_item_number_bool ..... 152
\l__enumext_item_number_bool 67, 158, 2050, 2055,
    2059, 2063, 2076, 2644, 2698, 3114, 3148, 4613
\g__enumext_item_number_int .. 67, 152, 350, 377,
    379, 2049, 2054, 2058, 2062, 2075, 2100, 3113, 3147,
    4612
\__enumext_item_peek_args_vii: 115, 4544, 4546,
    4546
\__enumext_item_peek_args_viii: 120, 121, 4787,
    4789, 4789
\__enumext_item_star_exec: 88, 3126, 3153, 3190,
    3209
\l__enumext_item_starred_vii_bool 4561, 4575,
    4617
\l__enumext_item_starred_viii_bool 4804, 4818,
    4884, 4920
\l__enumext_item_starred_X_bool ..... 173
\__enumext_item_std:w 33, 87, 88, 91, 381, 385, 3117,
    3123, 3151, 3300, 3304, 3312
\g__enumext_item_symbol_aux_tl . 88, 130, 3131,
    3134, 3159, 3195, 3213
\g__enumext_item_symbol_aux_vii_tl 4583, 4619,
    4622, 4626, 4628
\g__enumext_item_symbol_aux_X_tl ..... 173
\l__enumext_item_symbol_sep_vii_dim .. 4591,
    4598, 4625, 4627
\l__enumext_item_symbol_vii_tl ..... 4622
\l__enumext_item_text_vii_box .... 4644, 4672
\l__enumext_item_text_viii_box ... 4902, 4938
\l__enumext_item_text_X_box ..... 173
\l__enumext_item_width_vii_dim ... 4140, 4149,
    4228, 4236, 4237
\l__enumext_item_width_viii_dim .. 4171, 4180,
    4277, 4285, 4286
\l__enumext_item_width_X_dim ..... 173
\l__enumext_itemindent_X_dim ..... 71
\l__enumext_itemsep_i_skip ... 1247, 1254, 1257,
    1259, 1266, 1270, 1273, 1275, 1415, 1422, 1424, 1425,
    1430, 1434, 1436, 1437
\l__enumext_itemsep_ii_skip .. 1287, 1294, 1297,
    1299, 1306, 1310, 1313, 1315
\l__enumext_itemsep_iii_skip . 1326, 1333, 1336,
    1338, 1345, 1349, 1352, 1354
\l__enumext_itemsep_vii_skip ..... 4701
\l__enumext_itemsep_viii_skip ..... 4968
\l__enumext_itemsep_joined_item_aux_vii_int .. 4222,
    4223, 4224, 4225, 4231
\l__enumext_joined_item_aux_viii_int . 4271,
    4272, 4273, 4274, 4280
\l__enumext_joined_item_aux_X_int .... 173
\__enumext_joined_item_vii:w .. 115, 4549, 4550,
    4552, 4552
\l__enumext_joined_item_vii_int .. 4193, 4194,
    4197, 4199, 4205, 4210, 4215, 4220, 4222, 4228
\__enumext_joined_item_viii:w . 121, 4792, 4793,
    4795, 4795
\l__enumext_joined_item_viii_int . 4242, 4243,
    4246, 4248, 4254, 4259, 4264, 4269, 4271, 4277
\l__enumext_joined_item_X_int ..... 173
\l__enumext_joined_width_vii_dim . 4226, 4233,
    4236, 4646, 4660
\l__enumext_joined_width_viii_dim 4275, 4282,
    4285, 4904, 4918
\l__enumext_joined_width_X_dim ..... 173
\__enumext_keyans_addto_prop:n 84, 2909, 2909,
    3314, 4079
\__enumext_keyans_addto_seq:n . 85, 2983, 2983,
    3316, 4081
\__enumext_keyans_addto_seq_link: 2983, 3004,
    3006, 4852
\__enumext_keyans_anspic_code:nnn 106, 4050,
    4053, 4121
\__enumext_keyans_anspic_label:nnn 4053, 4097,
    4124
\__enumext_keyans_default_item:n .. 91, 3295,
    3295, 3331
\l__enumext_keyans_env_bool 34, 3548, 3561, 3713,
    3803
\__enumext_keyans_fake_item: .. 928, 944, 3425
\l__enumext_keyans_level_h_int .. 119, 28, 671,
    698, 2628, 2690, 2961, 4480, 4741, 4742
\l__enumext_keyans_level_int .. 28, 1532, 2624,
    2686, 2956, 3712, 3717, 4044
\__enumext_keyans_make_label: 37, 92, 3335, 3335,
    3423
\__enumext_keyans_make_label_box: 3335, 3339,
    3357
\__enumext_keyans_make_label_std: 3335, 3341,
    3343
\__enumext_keyans_mini_right_cmd:n 57, 1534,
    1567, 1567
\__enumext_keyans_mini_set_vskip: ..... 53
\__enumext_keyans_minipage_add_space: 1366,
    1392, 3742
\__enumext_keyans_minipage_set_skip: . 1366,
    1366, 1394
\__enumext_keyans_multi_addvspace: 1165, 1176,
    3766
\__enumext_keyans_multi_set_vskip: 50, 1165,
    1165, 1178
\__enumext_keyans_multicols_start: 3730, 3745,
    3747
\__enumext_keyans_multicols_stop: 1571, 3730,
    3772, 3801
\__enumext_keyans_name_and_start: 26, 32, 119,
    312, 312, 3714, 3912, 4746
\__enumext_keyans_parse_keys:n 3674, 3726, 3726
\l__enumext_keyans_pic_above_int . 141, 4013,
    4014, 4016
\__enumext_keyans_pic_arg_two: 104, 3929, 3929,

```

3959  
 \l\_\_enumext\_keyans\_pic\_below\_int . 141, 4013, 4014, 4017  
 \l\_\_enumext\_keyans\_pic\_body\_seq 105, 106, 141, 3985, 4025, 4048  
 \\_\_enumext\_keyans\_pic\_do:n 105, 3985, 3987, 4005, 4005, 4009  
 \l\_\_enumext\_keyans\_pic\_label\_pos\_str .. 103, 141, 3916, 3919, 4023  
 \l\_\_enumext\_keyans\_pic\_level\_int .. 28, 1516, 2632, 2694, 2912, 2951, 2986, 3074, 3907, 3908  
 \g\_\_enumext\_keyans\_pic\_parsep\_skip 141, 3946, 4001  
 \\_\_enumext\_keyans\_pic\_row:n 105, 106, 4007, 4010, 4010  
 \\_\_enumext\_keyans\_pic\_safe\_exec:n 103, 3905, 3905, 3958  
 \\_\_enumext\_keyans\_pic\_skip\_abs:N . 104, 3922, 3922, 3933  
 \l\_\_enumext\_keyans\_pic\_star\_bool .. 103, 141, 3915, 3934, 3996, 4055, 4101  
 \l\_\_enumext\_keyans\_pic\_width\_dim . 141, 4012, 4023, 4075  
 \\_\_enumext\_keyans\_pre\_itemsep\_skip: .. 1366, 1385, 1412  
 \\_\_enumext\_keyans\_redefine\_item: .. 92, 3319, 3319, 3422  
 \\_\_enumext\_keyans\_ref: ..... 41, 723, 741, 3424  
 \\_\_enumext\_keyans\_ref:n ..... 41, 720, 723, 723  
 \\_\_enumext\_keyans\_safe\_exec: . 3673, 3706, 3706  
 \\_\_enumext\_keyans\_set\_item\_width: . 99, 3682, 3689, 3689  
 \\_\_enumext\_keyans\_show\_ans: .. 3027, 3035, 3054  
 \\_\_enumext\_keyans\_show\_item\_opt: . 3027, 3042, 3312, 4094, 4923  
 \\_\_enumext\_keyans\_show\_left:n . 91, 3027, 3027, 3310, 4088  
 \\_\_enumext\_keyans\_show\_pos: .. 3027, 3039, 3067  
 \\_\_enumext\_keyans\_starred\_item:n .. 91, 3307, 3307, 3327  
 \\_\_enumext\_keyans\_store\_ref: .. 84, 2930, 2930, 3315, 4080, 4850  
 \\_\_enumext\_keyans\_store\_ref\_aux\_i: 84, 2930, 2942, 2945  
 \\_\_enumext\_keyans\_store\_ref\_aux\_ii: 85, 2930, 2971, 2973  
 \\_\_enumext\_keyans\_unknown\_keys:n . 3233, 3237, 3241  
 \\_\_enumext\_keyans\_unknown\_keys:nn 3233, 3243, 3245  
 \\_\_enumext\_keyans\_wrapper\_opt:n .. 2178, 3050  
 \l\_\_enumext\_label\_copy\_i\_tl .. 2436, 2949, 2954, 2959, 2964  
 \l\_\_enumext\_label\_copy\_v\_tl ..... 2959  
 \l\_\_enumext\_label\_copy\_vi\_tl ..... 2954  
 \l\_\_enumext\_label\_copy\_vii\_tl 2412, 2423, 2452, 2949  
 \l\_\_enumext\_label\_copy\_viii\_tl ..... 2964  
 \l\_\_enumext\_label\_copy\_X\_tl ..... 162  
 \l\_\_enumext\_label\_fill\_left\_v\_tl ..... 3347  
 \l\_\_enumext\_label\_fill\_left\_X\_tl ..... 100  
 \l\_\_enumext\_label\_fill\_right\_v\_tl ..... 3354  
 \l\_\_enumext\_label\_fill\_right\_X\_tl ..... 100  
 \l\_\_enumext\_label\_font\_style\_v\_tl 3348, 3363, 4092  
 \l\_\_enumext\_label\_font\_style\_vii\_tl ... 4632  
 \l\_\_enumext\_label\_font\_style\_viii\_tl .. 4890  
 \l\_\_enumext\_label\_i\_tl ..... 586  
 \l\_\_enumext\_label\_ii\_tl ..... 586  
 \l\_\_enumext\_label\_iii\_tl ..... 586  
 \l\_\_enumext\_label\_iv\_tl ..... 586  
 \\_\_enumext\_label\_style:Nnn 26, 37, 497, 497, 512, 591, 638, 709, 713  
 \l\_\_enumext\_label\_v\_tl .. 84, 85, 706, 2917, 2991, 3061, 3101, 3309, 3313, 3677, 3937, 4087, 4089  
 \l\_\_enumext\_label\_vi\_tl . 84, 85, 706, 2914, 2988, 4087, 4089, 4093  
 \l\_\_enumext\_label\_vii\_tl . 633, 4570, 4593, 4600  
 \l\_\_enumext\_label\_viii\_tl 633, 4813, 4844, 4848  
 \l\_\_enumext\_label\_width\_by\_box .. 67, 493, 494  
 \\_\_enumext\_label\_width\_by\_box:Nn 36, 491, 491, 496, 508, 774  
 \l\_\_enumext\_labelsep\_i\_dim ... 3059, 3064, 3072, 3104, 4856, 4871  
 \l\_\_enumext\_labelsep\_v\_dim ..... 3756  
 \l\_\_enumext\_labelsep\_vii\_dim . 2536, 3059, 3072, 4135, 4145, 4229, 4537, 4591, 4639, 4648  
 \l\_\_enumext\_labelsep\_viii\_dim 4166, 4176, 4278, 4780, 4897, 4906, 4924  
 \l\_\_enumext\_labelwidth\_i\_dim . 3058, 3064, 3071, 3104, 4856, 4871  
 \l\_\_enumext\_labelwidth\_v\_dim ..... 3361, 3756  
 \l\_\_enumext\_labelwidth\_vii\_dim ... 2536, 3058, 3071, 4135, 4144, 4229, 4537, 4630, 4647  
 \l\_\_enumext\_labelwidth\_viii\_dim .. 4166, 4175, 4278, 4780, 4888, 4905  
 \l\_\_enumext\_leftmargin\_tmp\_v\_bool . 104, 3931  
 \l\_\_enumext\_leftmargin\_tmp\_X\_bool ..... 71  
 \l\_\_enumext\_leftmargin\_tmp\_X\_dim ..... 71  
 \l\_\_enumext\_leftmargin\_X\_dim ..... 71  
 \\_\_enumext\_level: 213, 213, 615, 618, 619, 628, 630, 931, 935, 939, 1009, 1013, 1017, 1021, 1104, 1106, 1108, 1110, 1152, 1154, 1156, 1158, 1163, 1198, 1204, 1209, 1211, 1214, 1217, 1230, 1233, 1541, 1545, 1551, 1614, 1616, 1618, 1621, 1628, 1630, 1632, 1635, 2230, 2232, 2234, 2262, 2263, 2265, 2321, 2329, 2333, 2337, 2540, 2541, 3116, 3117, 3121, 3122, 3123, 3131, 3139, 3140, 3143, 3150, 3151, 3155, 3158, 3160, 3186, 3187, 3188, 3191, 3194, 3203, 3204, 3206, 3207, 3210, 3486, 3488, 3505, 3510, 3554, 3567, 3574, 3585, 3587, 3590, 3591, 3593, 3597, 3604, 3607, 3609, 3611, 3612, 3613, 3614, 3617, 3622, 3628, 3634, 3641, 3650  
 \l\_\_enumext\_level\_h\_int 113, 28, 262, 285, 299, 654, 691, 1523, 2046, 2066, 2431, 2664, 2676, 3562, 4475, 4476  
 \l\_\_enumext\_level\_int . 96, 28, 215, 272, 284, 300, 394, 1116, 1243, 1522, 2040, 2072, 2408, 2418, 2424, 2430, 2437, 2446, 2451, 2663, 2675, 2891, 3438, 3518, 3519, 3530, 3538, 3552, 3565, 3618, 3721, 4040, 4519, 4529, 4754, 5610, 5614, 5620, 5624  
 \\_\_enumext\_list\_arg\_two\_i: ..... 3404  
 \\_\_enumext\_list\_arg\_two\_ii: ..... 3404  
 \\_\_enumext\_list\_arg\_two\_iii: ..... 3404  
 \\_\_enumext\_list\_arg\_two\_iv: ..... 3404  
 \\_\_enumext\_list\_arg\_two\_v: . 92, 3404, 3679, 3932  
 \\_\_enumext\_list\_arg\_two\_vii: ..... 3444, 4454  
 \\_\_enumext\_list\_arg\_two\_viii: .... 3444, 4717  
 \l\_\_enumext\_listoffset\_v\_dim . 3697, 3702, 3758  
 \l\_\_enumext\_listparindent\_vii\_dim .... 4663

```

\l__enumext_listparindent_viii_dim ... 4929
\__enumext_log_answer_vars: . 33, 366, 374, 2898
\__enumext_log_global_vars: . 33, 366, 366, 2897
\__enumext_make_label: . 37, 89, 3174, 3174, 3433
\__enumext_make_label_box: ... 3174, 3178, 3198
\__enumext_make_label_std: ... 3174, 3180, 3182
\l__enumext_mark_answer_sym_tl 73, 2184, 2387,
    2553, 3076, 3089, 4860
\l__enumext_mark_position_str 130, 2188, 2189,
    2215, 2216, 2385
\l__enumext_mark_ref_sym_tl .. 2201, 2526, 3018
\l__enumext_meta_path_tl . 126, 5198, 5199, 5201,
    5202
\c__enumext_meta_paths_prop ..... 128, 5174
\__enumext_mini_addvspace_vii: 55, 1502, 1502,
    4303
\__enumext_mini_addvspace_viii: 55, 1502, 1508,
    4368
__enumext_mini_env* ..... 392
\__enumext_mini_page 1551, 1578, 3597, 3743, 4305,
    4370, 4391
\__enumext_mini_right_cmd:n . 56, 57, 1536, 1538,
    1538
\__enumext_mini_set_vskip_vii: 54, 1445, 1445,
    1504
\__enumext_mini_set_vskip_viii: 54, 1445, 1467,
    1510
\__enumext_minipage:w 34, 387, 389, 398, 4328, 4660,
    4918
\l__enumext_minipage_active_v_bool 3740, 3763,
    3788
\g__enumext_minipage_active_vii_bool .. 111,
    4317, 4326, 4348
\l__enumext_minipage_active_vii_bool . 4299,
    4310
\g__enumext_minipage_active_viii_bool 4381,
    4389, 4408
\l__enumext_minipage_active_viii_bool 4364,
    4375
\g__enumext_minipage_active_X_bool ... 173
\l__enumext_minipage_active_X_bool .... 87
\__enumext_minipage_add_space: .. 51, 97, 1194,
    1220, 3595
\g__enumext_minipage_after_skip 87, 1449, 1461,
    4346, 4406
\l__enumext_minipage_after_skip .. 50, 99, 87,
    1207, 1247, 1249, 1254, 1257, 1261, 1266, 1270, 1273,
    1277, 1289, 1294, 1297, 1301, 1306, 1310, 1313, 1317,
    1328, 1333, 1336, 1340, 1345, 1349, 1352, 1356, 1368,
    1382, 1415, 1417, 1422, 1424, 1426, 1430, 1434, 1436,
    1438, 1469, 1482, 1496, 1547, 1574, 3798
\g__enumext_minipage_center_vii_bool . 4332,
    4349
\g__enumext_minipage_center_viii_bool 4393,
    4409
\g__enumext_minipage_center_X_bool ... 173
\l__enumext_minipage_hsep_v_dim ..... 3738
\l__enumext_minipage_hsep_vii_dim .... 4297
\l__enumext_minipage_hsep_viii_dim ... 4362
\l__enumext_minipage_left_skip 87, 1369, 1447,
    1452, 1456, 1470, 1474, 1488, 1506, 1512
\l__enumext_minipage_left_v_dim .. 3736, 3743
\l__enumext_minipage_left_vii_dim 4293, 4305
\l__enumext_minipage_left_viii_dim 4358, 4370
\l__enumext_minipage_left_X_dim ..... 87
\g__enumext_minipage_right_skip 87, 1448, 1453,
    1457, 4331, 4392
\l__enumext_minipage_right_skip . 50, 87, 1196,
    1202, 1207, 1209, 1211, 1370, 1371, 1377, 1382, 1383,
    1384, 1389, 1471, 1478, 1492, 1553, 1580
\l__enumext_minipage_right_v_dim . 1569, 1578,
    3734, 3738
\g__enumext_minipage_right_vii_dim 110, 4301,
    4328, 4351
\l__enumext_minipage_right_vii_dim 110, 4291,
    4296, 4302
\g__enumext_minipage_right_viii_dim .. 4366,
    4391, 4411
\l__enumext_minipage_right_viii_dim .. 4356,
    4361, 4367
\g__enumext_minipage_right_X_dim ..... 173
\g__enumext_minipage_right_X_skip .... 173
\__enumext_minipage_set_skip: . 50, 1194, 1194,
    1222
\g__enumext_minipage_stat_int 97, 87, 1558, 1585,
    3594, 3652, 3657, 3741, 3790, 3795
\l__enumext_minipage_temp_skip 87, 1268, 1278,
    1281, 1308, 1318, 1321, 1347, 1357, 1360, 1432, 1439,
    1441
\l__enumext_miniright_code_vii_box 4339, 4343
\g__enumext_miniright_code_vii_tl 111, 4334,
    4341, 4350
\l__enumext_miniright_code_viii_box .. 4400,
    4404
\g__enumext_miniright_code_viii_tl 4395, 4402,
    4410
\l__enumext_miniright_code_X_box ..... 173
\__enumext_multi_addvspace: . 49, 98, 1147, 1147,
    3625
\__enumext_multi_set_vskip: 48, 1102, 1102, 1149
\l__enumext_multicols_above_ii_skip ... 1121
\l__enumext_multicols_above_iii_skip .. 1130
\l__enumext_multicols_above_iv_skip ... 1139
\l__enumext_multicols_above_v_skip 1167, 1181,
    1192, 1383
\l__enumext_multicols_above_X_skip .... 79
\l__enumext_multicols_below_ii_skip .. 1250,
    1259, 1263, 1275, 1280
\l__enumext_multicols_below_iii_skip . 1290,
    1299, 1303, 1315, 1320
\l__enumext_multicols_below_iv_skip .. 1329,
    1338, 1342, 1354, 1359
\l__enumext_multicols_below_v_skip 1171, 1185,
    1384, 1418, 1425, 1427, 1437, 1440, 3780
\l__enumext_multicols_below_X_skip .... 79
\g__enumext_multicols_right_X_skip .... 79
\__enumext_multicols_start: . 97, 98, 3599, 3601,
    3601
\__enumext_multicols_stop: 98, 1543, 3631, 3631,
    3662
\__enumext_nested_base_line_fix: . 43, 96, 114,
    848, 858, 3534, 4496
\__enumext_newlabel:nn 29, 35, 75, 448, 448, 2462,
    2977
\l__enumext_newlabel_arg_one_tl 29, 35, 75, 84,
    162, 2455, 2463, 2525, 2966, 2978, 3016
\l__enumext_newlabel_arg_two_tl 29, 35, 74, 162,
    2411, 2421, 2434, 2449, 2464, 2953, 2958, 2963, 2979

```

```

\__enumext_parse_foreach_keys:n . . 5223, 5239,
    5256
\__enumext_parse_foreach_keys:nn . 5223, 5246,
    5258
\__enumext_parse_keys:n 43, 60, 3482, 3525, 3525
\__enumext_parse_keys_vii:n . 43, 60, 4449, 4488,
    4488
\__enumext_parse_keys_viii:n . 4713, 4759, 4759
\__enumext_parse_save_key:n 71, 2255, 2260, 2260
\__enumext_parse_save_key_vii:n 71, 2250, 2260,
    2268
\__enumext_parse_series:n 60, 96, 114, 1743, 1743,
    3533, 4494
\__enumext_parse_store_keys:n . . . . . 96
\l__enumext_parsep_i_skip . . . . . 1119, 1123
\l__enumext_parsep_ii_skip . . . . . 1128, 1132
\l__enumext_parsep_iii_skip . . . . . 1137, 1141
\l__enumext_parsep_vii_skip . . . . . 4664
\l__enumext_parsep_viii_skip . . . . . 4930
\l__enumext_partopsep_v_skip . 1183, 1187, 1379,
    1402
\l__enumext_partopsep_viii_skip . . . . . 1480
\__enumext_phantomsection: 35, 410, 441, 445, 461
\__enumext_pre_itemsep_skip: . . 51, 1212, 1241,
    1241
\__enumext_print_footnote: . . 4413, 4436, 4677,
    4943
\__enumext_print_keyans_box:NN 73, 2379, 2379,
    2392, 2536, 2539, 3063, 3103, 4856, 4871
\l__enumext_print_keyans_i_tl . . . 5009, 5031
\l__enumext_print_keyans_ii_tl . . 5013, 5032
\l__enumext_print_keyans_iii_tl . . 5017, 5033
\l__enumext_print_keyans_iv_tl . . 5021, 5034
\l__enumext_print_keyans_starred_tl 125, 126,
    130, 5005, 5052
\l__enumext_print_keyans_vii_tl 125, 5025, 5035
\l__enumext_print_keyans_X_tl . . . . . 130
\__enumext_printkeyans:nnn 125, 126, 5036, 5039,
    5039
\__enumext_redefine_item: . 88, 3163, 3163, 3432
\l__enumext_ref_key_arg_tl 39, 50, 228, 608, 609,
    622, 653, 656, 667, 673, 684, 725, 726, 737
\l__enumext_ref_the_count_tl . 39, 50, 615, 618,
    621, 661, 663, 666, 678, 680, 683, 731, 733, 736
\__enumext_regex_counter_style: . . 30, 39, 223,
    223, 616, 662, 679, 732
\__enumext_register_counter_style:Nn . . 481,
    481, 486, 487, 488, 489, 490
\__enumext_remove_extra_parsep_vii: . . 4468,
    4690, 4690
\__enumext_remove_extra_parsep_viii: . 4731,
    4956, 4956
\__enumext_renew_footnote: . . 4413, 4417, 4654,
    4912
\l__enumext_renew_the_count_v_tl 734, 743, 745
\l__enumext_renew_the_count_vii_tl 664, 693,
    695
\l__enumext_renew_the_count_viii_tl 681, 700,
    702
\l__enumext_renew_the_count_X_tl . . . . . 50
\__enumext_rescan_anskey_env:n . . 81, 82, 2773,
    2868, 2876
\__enumext_reset_global_bool: . . 342, 345, 354
\__enumext_reset_global_int: . . 342, 344, 348
\__enumext_reset_global_tl: . . . 342, 346, 360
\__enumext_reset_global_vars: . 33, 83, 342, 342,
    2906
\l__enumext_resume_active_bool 60, 63, 61, 1747,
    1867
\__enumext_resume_counter: . . 62, 63, 1865, 1871,
    1878
\__enumext_resume_counter:n . 60, 63, 1836, 1841,
    1865, 1865, 1935, 1943
\__enumext_resume_counter_save_ans: 63, 1865,
    1876, 1908
\__enumext_resume_counter_series: . 63, 1865,
    1874, 1891
\g__enumext_resume_int . . . 61, 1788, 1882, 1883
\__enumext_resume_last:n 60, 61, 1743, 1749, 1762
\l__enumext_resume_name_tl 61, 1784, 1792, 1795,
    1811, 1819, 1822, 1868, 1869, 1897, 1904
\__enumext_resume_save_counter: . . 61, 99, 114,
    1775, 1775, 3668, 4513
\__enumext_resume_series:n . 62, 1711, 1832, 1832
\__enumext_resume_starred: . 64, 1712, 1929, 1929
\g__enumext_resume_vii_int 61, 1815, 1887, 1888
\l__enumext_rightmargin_vii_dim . . 4147, 4151,
    4156
\l__enumext_rightmargin_viii_dim . 4178, 4182,
    4187
\__enumext_safe_exec: . . 34, 96, 3481, 3514, 3514
\__enumext_safe_exec_vii: . 34, 4448, 4471, 4471
\__enumext_safe_exec_viii: 119, 4712, 4735, 4735
\l__enumext_series_name_tl . . . . . 63
\l__enumext_series_str . . 61, 96, 114, 1709, 1745,
    1753, 1754, 1756, 1758, 1779, 1782, 1786, 1806, 1809,
    1813, 3529, 4492
\__enumext_set_error:nn . . . . . 5160, 5170, 5172
\__enumext_set_item_width: . 95, 3491, 3497, 3497
\__enumext_set_parse:n . . . . . 5144, 5160, 5160
\l__enumext_setkey_tmpa_int . . 121, 5137, 5141
\l__enumext_setkey_tmpa_seq . . 121, 5135, 5145,
    5151, 5153, 5155, 5167
\l__enumext_setkey_tmpa_tl . . . 121, 5143, 5147
\l__enumext_setkey_tmpb_seq . . 121, 5136, 5139,
    5143, 5144
\l__enumext_setkey_tmpb_tl 121, 5162, 5164, 5165
\l__enumext_show_answer_bool . 2195, 2219, 2547,
    3033, 3047, 4084, 4854
\__enumext_show_length:nnn . . 45, 231, 231, 5381,
    5382, 5383, 5384, 5385, 5386, 5387, 5388, 5389, 5390,
    5396, 5397, 5398, 5399, 5400, 5401, 5402, 5403, 5404,
    5405
\l__enumext_show_position_bool . . 2198, 2222,
    2551, 3037, 3048, 4085, 4858
\g__enumext_standar_bool 31, 96, 34, 261, 264, 283,
    357, 1777, 1842, 1854, 1880, 1893, 1931, 2071, 2085,
    2416, 2429, 2444, 3549
\l__enumext_standar_bool . 96, 99, 34, 2417, 3521,
    3667, 4485
\l__enumext_standar_first_bool 31, 96, 34, 288,
    861, 1764, 1911, 1973, 1980
\__enumext_standar_item_vii:w . 115, 116, 4557,
    4559, 4559
\__enumext_standar_item_viii:w 121, 4800, 4802,
    4802
\__enumext_standar_ref: . . . 39, 606, 626, 3434
\__enumext_standar_ref:n . . . 39, 598, 606, 606

```

`\g__enumext_standar_series_tl` . [61](#), [1766](#), [1767](#), [1933](#), [1936](#)  
`\__enumext_standar_unknown_keys:n` [3273](#), [3277](#), [3281](#)  
`\__enumext_standar_unknown_keys:nn` [3273](#), [3283](#), [3285](#)  
`\g__enumext_starred_bool` [31](#), [113](#), [34](#), [271](#), [274](#), [298](#), [358](#), [1804](#), [1847](#), [1858](#), [1885](#), [1900](#), [1939](#), [2045](#), [2091](#), [2407](#), [2947](#), [4352](#)  
`\l__enumext_starred_bool` [113](#), [114](#), [119](#), [34](#), [1528](#), [2445](#), [2480](#), [2486](#), [2534](#), [2822](#), [2827](#), [3056](#), [3069](#), [3522](#), [4484](#), [4512](#), [4747](#), [4751](#)  
`\__enumext_starred_columns_set_vii:` . [4129](#), [4129](#), [4459](#)  
`\__enumext_starred_columns_set_viii:` . [4129](#), [4160](#), [4722](#)  
`\l__enumext_starred_first_bool` [31](#), [113](#), [34](#), [303](#), [872](#), [1769](#), [1920](#), [1973](#), [1980](#)  
`\__enumext_starred_item:nn` . . . [3126](#), [3126](#), [3169](#)  
`\__enumext_starred_item_exec:` . [122](#), [4846](#), [4846](#), [4886](#)  
`\__enumext_starred_item_vii:w` . [115](#), [116](#), [4556](#), [4573](#), [4573](#)  
`\__enumext_starred_item_vii_aux_i:w` . . [4573](#), [4578](#), [4581](#)  
`\__enumext_starred_item_vii_aux_ii:w` . [4573](#), [4579](#), [4584](#), [4586](#)  
`\__enumext_starred_item_vii_aux_iii:w` [4573](#), [4589](#), [4596](#)  
`\__enumext_starred_item_viii:w` [121](#), [4799](#), [4816](#), [4816](#)  
`\__enumext_starred_item_viii_aux_i:w` . . [122](#), [4816](#), [4821](#), [4824](#)  
`\__enumext_starred_item_viii_aux_ii:w` . [122](#), [4816](#), [4822](#), [4839](#), [4841](#)  
`\__enumext_starred_joined_item_vii:n` [109](#), [115](#), [4191](#), [4191](#), [4554](#)  
`\__enumext_starred_joined_item_viii:n` . [109](#), [121](#), [4191](#), [4240](#), [4797](#)  
`\__enumext_starred_ref:` . . . . [40](#), [651](#), [689](#), [3464](#)  
`\__enumext_starred_ref:n` . . . . [39](#), [645](#), [651](#), [651](#)  
`\g__enumext_starred_series_tl` . [61](#), [1771](#), [1772](#), [1941](#), [1944](#)  
`\__enumext_starred_unknown_keys:n` [3255](#), [3257](#), [3259](#)  
`\__enumext_starred_unknown_keys:nn` [3255](#), [3261](#), [3263](#)  
`\__enumext_start_from:NNn` [41](#), [748](#), [748](#), [761](#), [783](#), [789](#)  
`\l__enumext_start_i_int` . . . . . [1883](#), [1895](#), [1914](#)  
`\__enumext_start_item_tmp_vii:` [113](#), [4462](#), [4539](#), [4539](#)  
`\__enumext_start_item_tmp_viii:` . . [119](#), [4725](#), [4782](#), [4782](#)  
`\__enumext_start_item_vii:w` [116](#), [117](#), [4565](#), [4570](#), [4593](#), [4600](#), [4641](#), [4641](#)  
`\__enumext_start_item_viii:w` . . [121](#), [4808](#), [4813](#), [4844](#), [4899](#), [4899](#)  
`\g__enumext_start_line_tl` [31](#), [34](#), [291](#), [306](#), [363](#), [2115](#), [2120](#), [2125](#), [2139](#), [2144](#), [2149](#)  
`\__enumext_start_list:nn` . [33](#), [93](#), [381](#), [383](#), [3485](#), [3676](#), [4452](#), [4715](#)  
`\__enumext_start_list_tag:n` . . [3807](#), [3831](#), [4657](#), [4915](#)  
`\__enumext_start_mini_vii:` [114](#), [4289](#), [4289](#), [4504](#)  
`\__enumext_start_mini_viii:` . . . [120](#), [4354](#), [4354](#), [4770](#)  
`\__enumext_start_save_ans_msg:` . . [64](#), [65](#), [1957](#), [1957](#), [1982](#)  
`\__enumext_start_store_level:` . [96](#), [3484](#), [3543](#), [3543](#)  
`\__enumext_start_store_level_vii:` [115](#), [4451](#), [4515](#), [4515](#)  
`\l__enumext_start_vii_int` . . . [1888](#), [1902](#), [1923](#)  
`\l__enumext_start_X_int` . . . . . [100](#)  
`\__enumext_stop_item_tmp_vii:` . . [113](#), [115](#), [117](#), [4461](#), [4467](#), [4541](#), [4643](#)  
`\__enumext_stop_item_tmp_viii:` [119](#), [120](#), [4724](#), [4730](#), [4784](#), [4901](#)  
`\__enumext_stop_item_vii:` [117](#), [118](#), [4643](#), [4666](#), [4666](#)  
`\__enumext_stop_item_viii:` [123](#), [4901](#), [4932](#), [4932](#)  
`\__enumext_stop_list:` . . [33](#), [381](#), [384](#), [3636](#), [3644](#), [3776](#), [3783](#), [4312](#), [4320](#), [4377](#), [4384](#)  
`\__enumext_stop_list_tag:n` . . . [3807](#), [3847](#), [4669](#), [4935](#)  
`\__enumext_stop_mini_vii:` [111](#), [114](#), [4289](#), [4308](#), [4508](#)  
`\__enumext_stop_mini_viii:` [120](#), [4354](#), [4373](#), [4774](#)  
`\__enumext_stop_save_ans_msg:` . [64](#), [1957](#), [1962](#), [2895](#)  
`\__enumext_stop_start_list_tag:` . . [3807](#), [3839](#), [4659](#), [4917](#)  
`\__enumext_stop_store_level:` . . [96](#), [3543](#), [3572](#), [3637](#), [3645](#)  
`\__enumext_stop_store_level_vii:` . [115](#), [4313](#), [4321](#), [4515](#), [4525](#)  
`\l__enumext_store_active_bool` [28](#), [65](#), [112](#), [1912](#), [1921](#), [1989](#), [2620](#), [3547](#), [3560](#), [3708](#), [3716](#), [4003](#), [4036](#), [4517](#), [4527](#), [4737](#), [4753](#)  
`\__enumext_store_active_keys:n` [70](#), [71](#), [96](#), [2228](#), [2228](#), [3540](#)  
`\__enumext_store_active_keys_vii:n` [70](#), [71](#), [114](#), [2228](#), [2238](#), [4495](#)  
`\__enumext_store_addto_prop:n` [72](#), [84](#), [2303](#), [2303](#), [2311](#), [2471](#), [2928](#), [4849](#)  
`\__enumext_store_addto_seq:n` [72](#), [85](#), [2312](#), [2312](#), [2316](#), [2323](#), [2337](#), [2345](#), [2354](#), [2368](#), [2376](#), [2529](#), [3021](#)  
`\l__enumext_store_anskey_arg_tl` [28](#), [75](#), [76](#), [112](#), [2477](#), [2482](#), [2484](#), [2489](#), [2496](#), [2499](#), [2509](#), [2514](#), [2517](#), [2523](#), [2529](#)  
`\__enumext_store_anskey_code:n` [75](#), [78](#), [82](#), [2468](#), [2468](#), [2613](#), [2866](#), [2874](#)  
`\l__enumext_store_anskey_env_tl` . . [28](#), [81](#), [112](#), [2796](#), [2800](#), [2806](#), [2868](#), [2876](#)  
`\l__enumext_store_anskey_opt_tl` . . [28](#), [82](#), [112](#), [2797](#), [2824](#), [2830](#), [2837](#), [2843](#), [2853](#), [2863](#), [2872](#)  
`\__enumext_store_anskey_safe_outer:` . . . . [78](#)  
`\g__enumext_store_columns_break_bool` . [2720](#), [2821](#), [2883](#)  
`\l__enumext_store_columns_break_bool` . [2479](#), [2569](#)  
`\l__enumext_store_current_label_tl` [28](#), [84](#), [85](#), [122](#), [112](#), [2911](#), [2914](#), [2917](#), [2924](#), [2926](#), [2928](#), [2985](#), [2988](#), [2991](#), [2997](#), [3002](#), [3012](#), [3021](#), [4826](#), [4831](#), [4835](#), [4848](#), [4849](#), [4851](#)  
`\l__enumext_store_current_label_tmp_tl` . [28](#), [112](#), [3309](#), [3313](#)  
`\l__enumext_store_current_opt_arg_tl` [28](#), [122](#), [112](#), [3031](#), [3044](#), [3050](#), [4837](#)



`\__enumext_store_internal_ref:` .. 74, 75, [2393](#),  
[2393](#), [2474](#)  
`\g__enumext_store_item_join_int` .. 2723, 2828,  
[2832](#), [2884](#)  
`\l__enumext_store_item_join_int` .. 2487, 2491,  
[2572](#)  
`\g__enumext_store_item_star_bool` . 2725, 2835,  
[2885](#)  
`\l__enumext_store_item_star_bool` . 2494, 2574  
`\g__enumext_store_item_symbol_sep_dim` 2730,  
[2850](#), [2855](#), [2887](#)  
`\l__enumext_store_item_symbol_sep_dim` 2506,  
[2511](#), [2579](#)  
`\g__enumext_store_item_symbol_tl` . 2728, 2841,  
[2845](#), [2886](#)  
`\l__enumext_store_item_symbol_tl` . 2497, 2501,  
[2577](#)  
`\l__enumext_store_keyans_item_opt_sep_-  
tl` .... 2181, 2922, 2924, 2995, 2999, 4829, 4833  
`\__enumext_store_level_close:` . 72, [2317](#), 2341,  
[3576](#)  
`\__enumext_store_level_close_vii:` . 73, [2348](#),  
[2372](#), [4531](#)  
`\__enumext_store_level_open:` 72, 97, [2317](#), 2317,  
[3555](#), [3568](#)  
`\__enumext_store_level_open_vii:` .. 73, [2348](#),  
[2348](#), [4521](#)  
`\g__enumext_store_name_tl` 28, 65, [112](#), 362, 369,  
370, 371, 372, 1965, 1991, 2114, 2119, 2124, 2138,  
[2143](#), [2148](#), [2893](#)  
`\l__enumext_store_name_tl` 28, 65, 66, [112](#), 1798,  
1801, 1825, 1828, 1916, 1925, 1960, 1969, 1970, 1991,  
1992, 1993, 1995, 1996, 1998, 2000, 2001, 2003, 2005,  
2006, 2030, 2305, 2307, 2314, 2457, 2458, 2559, 2802,  
2968, 2969, 3082, 3095, 4866  
`\l__enumext_store_ref_key_bool` 75, 2204, 2472,  
[2520](#), [2932](#), 3009  
`\l__enumext_store_save_key_vii_bool` .. 2240,  
[2270](#)  
`\l__enumext_store_save_key_vii_tl` 2242, 2243,  
[2271](#), [2272](#), 2352, 2360, 2364, 2368  
`\l__enumext_store_save_key_X_bool` .. 70, [130](#)  
`\l__enumext_store_save_key_X_tl` .. 70, 71, [130](#)  
`\l__enumext_store_upper_level_X_bool` .. [130](#)  
`\__enumext_storing_exec:` 65, 80, [1967](#), 1983, 1987  
`\__enumext_storing_set:n` 64, 65, 1952, [1967](#), 1967  
`\l__enumext_the_counter_v_tl` ..... 733  
`\l__enumext_the_counter_vii_tl` ..... 663  
`\l__enumext_the_counter_viii_tl` ..... 680  
`\l__enumext_the_counter_X_tl` ..... [50](#)  
`\__enumext_tmp:n` 45, 49, 54, 60, 71, 78, 79, 86, 94, 99,  
100, 111, 133, 140, 165, 169, 173, 193, 848, 857, 1705,  
1716, 1948, 1956, 2009, 2027, 2168, 2209, 2210, 2227,  
2246, 2259, 2395, 2402, 2403, 2424, 2437, 2440, 2451,  
2934, 2941, 3233, 3240, 3273, 3280, 3404, 3443, 3444,  
[3478](#)  
`\__enumext_tmp:nn` 513, 534, 535, 569, 570, 585, 778,  
803, 884, 906, 907, 927, 983, 991, 992, 1006, 1071,  
1087, 1088, 1101, 1594, 1610, 3217, 3232  
`\__enumext_tmp:nnn` 586, 602, 603, 604, 605, 633, 649,  
[650](#)  
`\__enumext_tmp:nnnnnn` 804, 829, 832, 835, 837, 839,  
[842](#), [845](#)  
`\__enumext_tmp:w` ..... 4984, 4987  
`\l__enumext_tmpa_vii_int` 4139, 4142, 4151, 4182  
`\l__enumext_tmpa_viii_int` ..... 4170, 4173  
`\l__enumext_tmpa_X_dim` ..... [173](#)  
`\l__enumext_tmpa_X_int` ..... [173](#)  
`\l__enumext_topsep_v_skip` ... 1169, 1173, 1373  
`\l__enumext_topsep_vii_skip` .. 1450, 1459, 1463  
`\l__enumext_topsep_viii_skip` . 1472, 1494, 1498  
`\__enumext_undefine_anskey_env:` . 79, 83, [2653](#),  
[2653](#), 2904  
`\__enumext_unskip_unkern:` .. 31, 237, 237, 1161,  
1190, 1223, 1395, 3639, 3640, 3658, 3778, 3779, 3796  
`\l__enumext_vspace_a_star_v_bool` ..... 1643  
`\l__enumext_vspace_a_star_vii_bool` ... 1665  
`\l__enumext_vspace_a_star_viii_bool` ... 1676  
`\l__enumext_vspace_a_star_X_bool` ..... [100](#)  
`\__enumext_vspace_above:` 58, 97, [1611](#), 1611, 3581  
`\__enumext_vspace_above_v:` . 58, [1639](#), 1639, 3732  
`\l__enumext_vspace_above_v_skip` .. 1641, 1645,  
[1647](#)  
`\__enumext_vspace_above_vii:` 59, 114, [1661](#), 1661,  
[4501](#)  
`\l__enumext_vspace_above_vii_skip` 1663, 1667,  
[1669](#)  
`\__enumext_vspace_above_viii:` . 59, [1661](#), 1672,  
[4768](#)  
`\l__enumext_vspace_above_viii_skip` 1674, 1678,  
[1680](#)  
`\l__enumext_vspace_b_star_v_bool` ..... 1654  
`\l__enumext_vspace_b_star_vii_bool` ... 1687  
`\l__enumext_vspace_b_star_viii_bool` ... 1698  
`\l__enumext_vspace_b_star_X_bool` ..... [100](#)  
`\__enumext_vspace_below:` 58, 99, [1625](#), 1625, 3666  
`\__enumext_vspace_below_v:` . 58, [1650](#), 1650, 3805  
`\l__enumext_vspace_below_v_skip` .. 1652, 1656,  
[1658](#)  
`\__enumext_vspace_below_vii:` 59, 114, [1683](#), 1683,  
[4511](#)  
`\l__enumext_vspace_below_vii_skip` 1685, 1689,  
[1691](#)  
`\__enumext_vspace_below_viii:` . 59, [1683](#), 1694,  
[4776](#)  
`\l__enumext_vspace_below_viii_skip` 1696, 1700,  
[1702](#)  
`\__enumext_widest_from:nnnn` .. 41, [762](#), 762, 777,  
[796](#)  
`\g__enumext_widest_label_tl` 26, 37, [67](#), 501, 505,  
[509](#)  
`\l__enumext_wrap_label_opt_v_bool` .... 3303  
`\l__enumext_wrap_label_opt_vii_bool` [116](#), 4564  
`\l__enumext_wrap_label_opt_viii_bool` .. [121](#),  
[4807](#)  
`\l__enumext_wrap_label_opt_X_bool` .... [100](#)  
`\l__enumext_wrap_label_v_bool` 3299, 3303, 3311,  
[3349](#), [3364](#)  
`\l__enumext_wrap_label_vii_bool` .. [116](#), 4564,  
[4568](#), [4576](#), [4633](#)  
`\l__enumext_wrap_label_viii_bool` . [121](#), 4807,  
[4811](#), [4819](#), [4891](#)  
`\l__enumext_wrap_label_X_bool` ..... [100](#)  
`\__enumext_wrapper_label_v:n` . 3351, 3366, 4093  
`\__enumext_wrapper_label_vii:n` ..... 4635  
`\__enumext_wrapper_label_viii:n` ..... 4893  
`\l__enumext_write_aux_file_tl` . 29, 75, 85, [162](#),  
[2460](#), [2466](#), 2975, 2981  
`enumext*` ..... 5, [4446](#)  
`enumXi` ..... [473](#)

enumXii ..... 473

enumXiii ..... 473

enumXiv ..... 473

enumXv ..... 473

enumXvi ..... 473

enumXvii ..... 473

enumXviii ..... 473

Environments provide by enumext:

anskey\* 28, 65, 74, 76, 79-81, 83, 96, 115, 125, 131, 133

enumext\* .. 25, 26, 29-31, 34, 36, 39, 40, 42-48, 54, 55, 59-62, 64-67, 69-75, 77, 79, 82-84, 89, 90, 94, 96, 97, 101, 102, 108, 109, 111, 112, 115, 117, 119, 120, 122, 123, 125, 126, 128, 132, 135, 136

enumext 25, 26, 30, 31, 34, 36-39, 41-50, 53, 56-62, 64-67, 69-72, 74, 75, 77, 79, 82-84, 87-89, 91, 93, 95, 97, 99, 100, 103, 108, 110, 113, 115, 119, 125, 126, 128, 132, 133, 135

keyans\* 25, 26, 28-32, 36, 39-42, 44-48, 54, 55, 59, 65, 66, 69, 70, 72, 79, 84, 90, 94, 101, 102, 108, 109, 112, 119, 120, 132, 134, 136

keyanspic 25, 26, 28, 29, 32, 36, 37, 40, 65, 66, 69, 72, 79, 84-86, 101-106, 134

keyans 25, 26, 28, 29, 31, 32, 36, 37, 40, 42, 44-47, 50, 53, 56-58, 65, 66, 69, 70, 72, 79, 84-86, 90-93, 99, 100, 103, 104, 106, 110, 120, 132, 134

Environments:

list ..... 30, 33, 93, 95, 101, 103

lrbox ..... 117

minipage 30, 34, 48, 50, 51, 103, 105, 106, 108, 111, 118, 123

multicols ..... 48-51, 56, 97-99

scontents ..... 80, 82

exp commands:

\exp\_after:wN ..... 4987

\exp\_args:Ne ..... 2865, 2873, 3537, 4975

\exp\_args:NV ... 2585, 2740, 3243, 3261, 3283, 5258

\exp\_not:N . 58, 504, 621, 666, 683, 736, 937, 951, 952, 964, 965, 977, 978, 2525, 2556, 2557, 3014, 3079, 3080, 3092, 3093, 4863, 4864, 4984

\exp\_not:n 293, 308, 321, 329, 337, 560, 580, 621, 622, 666, 667, 683, 684, 736, 737, 938, 1732, 1741, 2192, 2289, 2301, 2463, 2491, 2501, 2511, 2525, 2526, 2832, 2845, 2855, 2978, 3016, 3018, 5087, 5097, 5290, 5295

F

\fbox ..... 2175

\fboxrule ..... 2175

\fboxsep ..... 2175

file commands:

\file\_input\_stop: ..... 5694

first ..... 992

font ..... 513

\footnote ..... 112

\footnote ..... 112, 4421

\footnotemark ..... 4431

\footnotesize ..... 2557, 3080, 3093, 4864

\footnotetext ..... 4415

\foreachkeyans ..... 16, 129, 5223

G

\getkeyans ..... 16, 124, 4973

group commands:

\group\_begin: .. 2555, 2600, 2775, 2862, 3078, 3091, 4862, 5030

\group\_end: 2562, 2616, 2879, 3085, 3098, 4869, 5037

H

\hbadness ..... 4671, 4937

hbox commands:

\hbox\_overlap\_left:n ..... 3159, 4626

\hbox\_set:Nn ..... 493, 3937

\hbox\_set\_end: ..... 4670, 4936

\hbox\_set\_to\_wd:Nnw ..... 4644, 4902

\hfill 543, 548, 554, 555, 1550, 1577, 2525, 3014, 4316, 4380

hook commands:

\hook\_gput\_code:nnn ..... 9, 203, 207, 211, 408

\hook\_gremove\_code:nn ..... 82, 2791

\hook\_gset\_rule:nnnn ..... 409

\hook\_if\_empty:nTF ..... 2789

\hyperlink ..... 76, 85

\hyperlink ..... 2525, 3014

\hypertarget ..... 35

\hypertarget ..... 440

I

\IfDocumentMetadataTF 3176, 3337, 3833, 3841, 3849, 3883, 3891, 3899, 3960, 3970, 3978, 3988, 3993, 4019, 4027, 4057, 4066, 4314, 4378, 4458, 4466, 4650, 4673, 4721, 4729, 4908, 4939

\IfHyperBoolean ..... 416

\IfPackageLoadedTF ..... 11, 19, 412, 428

\ignorespaces ..... 940, 953, 966, 979, 4463, 4726

\inputlineno ..... 293, 308, 321, 329, 337

int commands:

\int\_add:Nn ..... 4224, 4273

\int\_case:nn ... 1116, 1243, 2040, 2066, 2105, 2129

\int\_case:nnTF ..... 239

\int\_compare:nNnTF .. 394, 654, 671, 691, 698, 1213, 1232, 1386, 1404, 1516, 1532, 1544, 1572, 2153, 2159, 2624, 2628, 2632, 2640, 2686, 2690, 2694, 2891, 2912, 2951, 2956, 2961, 2986, 3074, 3519, 3530, 3552, 3565, 3603, 3618, 3633, 3652, 3717, 3721, 3749, 3774, 3790, 3908, 4040, 4044, 4194, 4204, 4220, 4243, 4253, 4269, 4476, 4480, 4519, 4529, 4680, 4692, 4742, 4754, 4946, 4958, 5141, 5273

\int\_compare\_p:nNn ... 262, 272, 284, 285, 299, 300, 1522, 1523, 2046, 2072, 2408, 2418, 2430, 2431, 2446, 2487, 2663, 2664, 2675, 2676, 2828, 3562

\int\_decr:N ..... 4223, 4272

\int\_eval:n .. 379, 791, 2307, 2458, 2557, 2969, 3080, 3093, 3419, 3463, 4212, 4261, 4864

\int\_from\_alph:n ..... 756, 770

\int\_from\_roman:n ..... 758, 772

\int\_gadd:Nn ..... 4225, 4274

\int\_gdecr:N ..... 2049, 2054, 2058, 2062, 2075

\int\_gincr:N 1882, 1887, 2470, 3024, 3113, 3147, 3317, 3594, 3741, 4082, 4543, 4612, 4786, 4853

\int\_gset:Nn ..... 2098, 4429

\int\_gset\_eq:NN 1781, 1788, 1794, 1800, 1808, 1815, 1821, 1827, 4426

\int\_gzero:N . 350, 351, 352, 1558, 1585, 2165, 2884, 3657, 3795, 4703, 4970

\int\_if\_exist:Ntf 1756, 1792, 1798, 1819, 1825, 2003

\int\_incr:N 2639, 3518, 3712, 3907, 4475, 4542, 4741, 4785

\int\_mod:nn ..... 4694, 4960

\int\_new:N . 28, 29, 30, 31, 32, 33, 61, 62, 87, 104, 123, 143, 144, 155, 156, 157, 159, 170, 176, 177, 178, 179, 180, 1758, 2006

\int\_set:Nn 752, 756, 758, 1895, 1902, 1914, 1923, 2776, 4013, 4014, 4139, 4170, 4193, 4199, 4215, 4242, 4248, 4264, 4671, 4937, 5137, 5275



`\int_set_eq:NN` ..... 1883, 1888, 4222, 4271  
`\int_sign:n` ..... 2100  
`\int_step_function:nnN` ..... 2424, 2437, 2451  
`\int_step_function:nnnN` ..... 5279  
`\int_step_inline:nn` ..... 5189  
`\int_step_inline:nnn` ..... 4015  
`\int_to_roman:n` ..... 215, 2404, 2441  
`\int_use:N` 372, 377, 378, 1214, 1233, 1545, 1897, 1904,  
1916, 1925, 3419, 3438, 3463, 3538, 3604, 3613, 3628,  
3634, 4197, 4198, 4210, 4246, 4247, 4259, 5610, 5614,  
5620, 5624  
`\int_zero:N` ..... 4684, 4950  
`\item` . 87, 91, 115, 117, 120, 123, 385, 2325, 2331, 2356, 2362,  
2484, 2988, 2991, 3165, 3321, 3964, 3966, 4460, 4462,  
4723, 4725, 4851  
`\item*` ..... 5, 14, 69, 3319  
`item-pos*` ..... 3217  
`item-sym*` ..... 3217  
`\itemindent` ..... 94  
`\itemindent` ..... 93  
`itemindent` ..... 884  
`\itemsep` ..... 3954  
`\itemwidth` . 463, 2175, 3499, 3508, 3691, 3700, 4233, 4237,  
4282, 4286

K

`keyans` ..... 14, 3671  
`keyans*` ..... 14, 4710  
`keyanspic` ..... 15, 3956

Keys for `\anskey` provide by `enumext`:

`break-col` ..... 75, 77, 80–82  
`item-join` ..... 75, 77, 80–82  
`item-pos*` ..... 76, 77, 80–82  
`item-star` ..... 76, 77, 80–82  
`item-sym*` ..... 76, 77, 80–82

Keys for `anskey*` provide by `enumext`:

`break-col` ..... 75, 77, 80–82  
`item-join` ..... 75, 77, 80–82  
`item-pos*` ..... 76, 77, 80–82  
`item-star` ..... 76, 77, 80–82  
`item-sym*` ..... 76, 77, 80–82

Keys for environments provide by `enumext`:

`above*` ..... 27, 57–59, 97, 114  
`above` ..... 27, 57–59, 97, 114, 120  
`after` ..... 46, 99, 114, 120  
`align` ..... 27, 37, 38, 89, 92, 117, 131  
`base-fix` ..... 43, 60, 71, 96, 114, 126  
`before*` ..... 46, 97, 114, 120  
`before` ..... 46  
`below*` ..... 27, 57–59, 99, 114  
`below` ..... 27, 57–59, 99, 114, 120  
`check-ans` .. 29–31, 64–69, 72, 83, 85, 99, 114, 119, 132  
`columns-sep` ..... 47, 98  
`columns` ..... 27, 47, 57, 98  
`first` ..... 46, 118  
`font` ..... 37, 89, 92, 117  
`item-pos*` ..... 88, 89  
`item-sym*` ..... 28, 88, 89  
`itemindent` ..... 27, 44, 45, 87, 88, 92, 118  
`itemsep` ..... 42, 95  
`labelsep` ..... 37, 93, 117  
`labelwidth` ..... 36–40, 42, 93, 116  
`label` ..... 26, 36–38, 41, 42, 104, 108  
`lisparindent` ..... 95  
`list-indent` ..... 27, 44, 104

`list-offset` ..... 44, 95, 99  
`listparindent` ..... 44, 118  
`mark-ans` ..... 69, 72, 76  
`mark-pos` ..... 69, 70, 131  
`mark-ref` ..... 69, 72, 74, 76  
`mini-env` .. 27, 34, 47, 56, 57, 72, 97, 110, 111, 114, 120  
`mini-right*` ..... 27, 30, 48, 72, 111, 114  
`mini-right` ..... 27, 30, 48, 55, 72, 110, 111, 114  
`mini-sep` ..... 27, 47, 72, 97  
`no-store` ..... 29, 64–66, 71, 77, 87, 88  
`noitemsep` ..... 42  
`nosep` ..... 42  
`parindent` ..... 95  
`parsep` ..... 42, 94, 95, 118  
`partopsep` ..... 42  
`ref` ..... 26, 30, 38–40, 132  
`resume*` ..... 26, 59, 60, 64, 65, 71, 99, 114, 127  
`resume` ..... 26, 33, 59–65, 71, 72, 99, 114, 127  
`rightmargin` ..... 44, 108  
`save-ans` 28, 33, 60–66, 68, 70–72, 77–80, 83–85, 91, 100,  
106, 119, 120, 122, 124, 125, 127, 132  
`save-key` ..... 28, 60, 71, 96, 114  
`save-pos` ..... 72  
`save-ref` ..... 29, 35, 69, 72, 74–76, 84, 85, 91, 122  
`save-sep` ..... 69, 72, 122  
`series` ..... 26, 59–64, 72, 96, 99, 114, 127  
`show-ans` ..... 69, 70, 72, 73, 75, 76, 91, 122  
`show-length` ..... 31, 45, 132  
`show-pos` ..... 28, 69, 70, 73, 75, 76, 86, 91, 122  
`start*` ..... 27, 41, 42, 60  
`start` ..... 27, 30, 41, 42, 60  
`store-key` ..... 70  
`topsep` ..... 42  
`widest` ..... 26, 30, 41, 42  
`wrap-ans` ..... 36, 69, 72, 73, 76  
`wrap-label*` ..... 27, 37, 87, 89, 92, 116, 117, 121  
`wrap-label` ..... 27, 37, 87–89, 92, 104, 116, 117, 121  
`wrap-opt` ..... 69, 72

keys commands:

`\keys_define:nn` 515, 537, 572, 588, 635, 706, 780, 806,  
850, 886, 909, 985, 994, 1073, 1090, 1596, 1707, 1950,  
2011, 2170, 2212, 2248, 2253, 2567, 2718, 2754, 3219,  
3235, 3255, 3275, 5001, 5099, 5215, 5223  
`\keys_if_exist_p:nn` ..... 5211, 5212  
`\l_keys_key_str` 77, 80, 2585, 2740, 3243, 3261, 3283,  
5258, 5366  
`\keys_precompile:nnN` .. 125, 199, 199, 5003, 5007,  
5011, 5015, 5019, 5023, 5241  
`\keys_set:nn` . 529, 866, 877, 1096, 1601, 1606, 1844,  
1849, 1936, 1944, 2605, 3532, 3537, 3728, 4493, 4763,  
5054, 5061, 5103, 5108, 5109, 5110, 5111, 5114, 5119,  
5120, 5121, 5122, 5123, 5124, 5125, 5157, 5267  
`\keys_set_known:nn` ..... 2872

keyval commands:

`\keyval_parse:NNn` ..... 1721, 2278, 5075

L

`label` ..... 586, 633, 706  
Labels provide by `enumext`:  
`\Alpha*` ..... 36, 37  
`\Roman*` ..... 36, 37  
`\alph*` ..... 36, 37  
`\arabic*` ..... 30, 36, 37  
`\roman*` ..... 36, 37  
`\labelsep` ..... 3948, 3952  
`labelsep` ..... 513

<code>\labelwidth</code>	36
<code>\labelwidth</code>	3948, 3950
<code>labelwidth</code>	513
<code>\lastkern</code>	248
<code>\lastnodetype</code>	239
<code>\lastskip</code>	243
<code>\leftmargin</code>	94
<code>\leftmargin</code>	93, 3948
legacy commands:	
<code>\legacy_if:nTF</code>	4604, 4607, 4876, 4879
<code>\legacy_if_gset_false:n</code>	399, 4329
<code>\legacy_if_set_false:n</code>	4606, 4878
<code>\legacy_if_set_true:n</code>	4569, 4592, 4599, 4812, 4843
<code>\linewidth</code>	97
<code>\linewidth</code>	3501, 3589, 3693, 3738, 4012, 4142, 4173, 4295, 4360
<code>\list</code>	383
<code>list-indent</code>	884
<code>list-offset</code>	884
<code>\listparindent</code>	3951
<code>listparindent</code>	884

M

<code>\makebox</code>	108
<code>\makebox</code>	2383, 2385, 3202, 3361, 4075, 4630, 4888
<code>\makelabel</code>	87, 89, 92, 108
<code>\makelabel</code>	87, 91, 3184, 3200, 3345, 3359
<code>\makesavenoteenv</code>	434
<code>mark-ans</code>	2168
<code>mark-pos</code>	2168, 2210
<code>mark-ref</code>	2168
<code>mini-env</code>	1071
<code>mini-sep</code>	1071
<code>\minipage</code>	389
<code>\miniright</code>	10, 56, 1514, 1562, 1589, 3655, 3793

mode commands:

<code>\mode_if_math:TF</code>	2648, 2702
<code>\mode_if_vertical:TF</code>	1150, 1179, 1200, 1224, 1375, 1396
<code>\mode_leave_vertical:</code>	864, 875, 937, 951, 964, 977, 2381, 3157, 4624

msg commands:

<code>\msg_error:nn</code>	1564, 1591, 2609, 2642, 2646, 2700, 2808, 3719, 3723, 3910, 3968, 4042, 4478, 4744, 4756, 5126, 5185
<code>\msg_error:nnn</code>	611, 658, 675, 728, 1518, 1525, 1530, 1560, 1587, 1856, 1860, 1975, 2591, 2650, 2668, 2680, 2688, 2692, 2696, 2704, 2746, 3249, 3267, 3289, 4482, 4749, 4989, 4998, 5068, 5173, 5204, 5213, 5250, 5271
<code>\msg_error:nnnn</code>	2594, 2622, 2626, 2630, 2634, 2749, 3252, 3270, 3292, 3710, 4038, 4046, 4739, 5049, 5253
<code>\msg_error:nnnnn</code>	559, 579, 2191
<code>\msg_fatal:nn</code>	3520
<code>\msg_fatal:nnn</code>	467
<code>\msg_info:nnn</code>	13, 16, 21, 24, 414, 430
<code>\msg_line_context:</code>	5331, 5336, 5341, 5370, 5375, 5380, 5395, 5410, 5414, 5418, 5422, 5426, 5430, 5437, 5444, 5450, 5464, 5468, 5473, 5477, 5481, 5485, 5490, 5494, 5498, 5502, 5507, 5542, 5546, 5551, 5556, 5560, 5565, 5641, 5645, 5650, 5655, 5660, 5664, 5668, 5672, 5676, 5680, 5684, 5688, 5692
<code>\msg_log:nnn</code>	1995, 2000, 2005
<code>\msg_log:nnnnn</code>	376, 2138, 2143, 2148
<code>\msg_log:nnnnnn</code>	368

<code>\msg_new:nnn</code>	5298, 5302, 5306, 5310, 5315, 5328, 5333, 5338, 5343, 5352, 5360, 5364, 5368, 5373, 5378, 5393, 5408, 5412, 5416, 5420, 5424, 5428, 5432, 5441, 5447, 5453, 5457, 5461, 5466, 5471, 5475, 5479, 5483, 5488, 5492, 5496, 5500, 5505, 5540, 5544, 5549, 5554, 5558, 5563, 5639, 5643, 5648, 5653, 5658, 5662, 5666, 5670, 5674, 5678, 5682, 5686, 5690
<code>\msg_new:nnnn</code>	5319, 5510, 5519, 5528, 5534, 5567, 5577, 5587, 5597, 5607, 5617, 5627, 5633
<code>\msg_term:nnnn</code>	1959, 1964, 3428, 3438, 3469, 3474
<code>\msg_term:nnnnn</code>	2119
<code>\msg_warning:nn</code>	3654, 3792
<code>\msg_warning:nnnn</code>	2156, 2162, 3376, 3381, 4196, 4209, 4245, 4258
<code>\msg_warning:nnnnn</code>	2114, 2124
<code>\multicolsep</code>	98
<code>\multicolsep</code>	1217, 1389, 3624, 3765

N

<code>\NeedsTeXFormat</code>	3
<code>\NewCommandCopy</code>	385
<code>\newcounter</code>	470
<code>\NewDocumentCommand</code>	1514, 2597, 4034, 4973, 5028, 5133, 5182, 5260
<code>\NewDocumentEnvironment</code>	3479, 3671, 3956, 4446, 4710
<code>\newenvsc</code>	2711
<code>\NewLabel</code>	35
<code>\NewLabel</code>	452
<code>no-store</code>	2009
<code>\noindent</code>	3596, 4304, 4369, 4683, 4949
<code>\nointerlineskip</code>	1226, 1229, 1398, 1401, 1552, 1579, 4304, 4369
<code>noitemsep</code>	804
<code>\nopagebreak</code>	1162, 1191, 1226, 1229, 1398, 1401, 1505, 1511
<code>\normalfont</code>	2556, 3079, 3092, 4863
<code>nosep</code>	804

P

Packages:

<code>caption</code>	111
<code>enumext</code>	25, 36, 38, 64, 93, 103, 130, 131
<code>enumitem</code>	36
<code>expl3</code>	108
<code>footnotehyper</code>	35
<code>hyperref</code>	29, 30, 34, 35, 76, 85, 130
<code>ltxcmd</code>	33
<code>lua-visual-debug</code>	50
<code>multicol</code>	25, 130
<code>scontents</code>	25, 79, 80
<code>shortlst</code>	108, 113, 117
<code>\par</code>	1162, 1191, 1229, 1401, 1505, 1511, 1547, 1552, 1574, 1579, 2533, 3641, 3780, 3798, 3998, 4001, 4032, 4331, 4346, 4392, 4406, 4683, 4949

para commands:

<code>\para_end:</code>	4700, 4967
<code>\parbox</code>	2175
<code>\parindent</code>	4663, 4929
<code>\parsep</code>	49, 104, 105
<code>\parsep</code>	3460, 3933, 3942, 3946
<code>parsep</code>	804
<code>\parskip</code>	4664, 4930
<code>\partopsep</code>	3461, 3796, 3953
<code>partopsep</code>	804

peek commands:

<code>\peek_meaning:NTF</code>	4548, 4562, 4577, 4588, 4791, 4805, 4820
--------------------------------	--

\peek\_meaning\_remove:NTF ..... 4555, 4798  
 \peek\_remove\_spaces:n ..... 3325  
 \phantomsection ..... 35  
 \phantomsection ..... 441  
 prg commands:  
   \prg\_do\_nothing: ..... 445  
   \prg\_new\_protected\_conditional:Npnn ... 217  
   \prg\_replicate:nn ..... 234  
   \prg\_return\_false: ..... 221  
   \prg\_return\_true: ..... 220  
 \printkeyans ..... 16, 125, 5028  
 prop commands:  
   \prop\_const\_from\_keyval:Nn ..... 5174  
   \prop\_count:N 370, 2307, 2458, 2559, 2969, 3082, 3095,  
     4866, 5276  
   \prop\_get:NnNTF ..... 5200  
   \prop\_gput\_if\_not\_in:Nnn ..... 2305  
   \prop\_if\_exist:NTF ..... 1993, 4993, 5269  
   \prop\_item:Nn ..... 4995, 5293  
   \prop\_new:N ..... 1996  
 \ProvidesExplPackage ..... 4

## R

\raggedcolumns ..... 3627, 3768  
 \raisebox ..... 4106  
 \ref ..... 74, 84  
 ref ..... 586, 633, 706  
 \refstepcounter ..... 4609, 4881  
 regex commands:  
   \regex\_match:nnTF .. 219, 755, 757, 769, 771, 2804  
   \regex\_replace\_once:nnN ..... 227  
 \renewcommand ..... 621, 666, 683, 736  
 \RenewDocumentCommand 1562, 1589, 3165, 3184, 3200, 3321,  
   3345, 3359, 3966, 4421  
 \RequirePackage ..... 17, 25  
 resume ..... 1705  
 resume\* ..... 1705  
 rightmargin ..... 884  
 \Roman ..... 37, 41, 42  
 \Roman ..... 489  
 \roman ..... 37, 41, 42  
 \roman ..... 490, 604, 5018

## S

\s ..... 2805  
 save-ans ..... 1948  
 save-key ..... 2246  
 save-ref ..... 2168  
 save-sep ..... 2168  
 scan commands:  
   \scan\_stop: ..... 3964, 4460, 4723, 4984, 4987  
 scontents internal commands:  
   \l\_scontents\_fname\_out\_tl ..... 2764  
   \\_\_scontents\_parse\_environment\_keys:n . 2770  
   \\_\_scontents\_rescan\_tokens:n ..... 2777  
   \l\_scontents\_storing\_bool ..... 2762  
   \l\_scontents\_writing\_bool ..... 2763  
 seq commands:  
   \seq\_clear:N ..... 5135, 5278  
   \seq\_const\_from\_clist:Nn ..... 5128  
   \seq\_count:N ..... 371, 3985, 5139  
   \seq\_gclear:N ..... 4419, 4420  
   \seq\_gput\_right:Nn ..... 2314, 4432, 4433  
   \seq\_if\_empty:NTF ..... 4438, 5043, 5153  
   \seq\_if\_exist:NTF ..... 1998, 5041

\seq\_if\_in:NnTF ..... 5047  
 \seq\_item:Nn ..... 2802, 4025  
 \seq\_map\_function:NN ..... 5144  
 \seq\_map\_inline:Nn ..... 5055, 5062, 5154, 5155  
 \seq\_map\_pairwise\_function:NNN ..... 4440  
 \seq\_new:N ..... 124, 125, 127, 141, 171, 172, 2001  
 \seq\_pop\_left:NN ..... 5143  
 \seq\_put\_right:Nn ..... 4048, 5151, 5167, 5288  
 \seq\_set\_from\_clist:Nn ..... 5136  
 \seq\_set\_map\_e:NNn ..... 5145  
 \seq\_use:Nn ..... 199, 200, 5284  
 series ..... 1705  
 \setcounter ..... 766, 770, 772, 3419, 3463, 3995  
 \setenumext ..... 6, 126, 5133  
 \setenumextmeta ..... 6, 128, 5174  
 show-ans ..... 2168, 2210  
 show-length ..... 983  
 show-pos ..... 2210  
 skip commands:  
   \skip\_add:Nn 1121, 1130, 1139, 1152, 1156, 1181, 1185,  
     1202, 1260, 1262, 1276, 1279, 1300, 1302, 1316, 1319,  
     1339, 1341, 1355, 1358, 1377, 1426, 1427, 1438, 1440,  
     3942, 3949  
   \skip\_gset:Nn ..... 1453, 1457, 1461  
   \skip\_gset\_eq:NN ..... 3946  
   \skip\_gzero\_new:N ..... 1448, 1449  
   \skip\_horizontal:N 952, 965, 978, 4627, 4639, 4687,  
     4897, 4953  
   \skip\_horizontal:n ... 938, 2382, 2390, 3158, 3160,  
     4537, 4625, 4780, 4924  
   \skip\_if\_eq:nnTF 1119, 1128, 1137, 1246, 1286, 1326,  
     1414, 1450, 1472, 1613, 1627, 1641, 1652, 1663, 1674,  
     1685, 1696  
   \skip\_new:N 81, 82, 83, 88, 89, 90, 91, 92, 93, 147, 191  
   \skip\_set:Nn 1104, 1108, 1167, 1171, 1196, 1249, 1250,  
     1268, 1289, 1290, 1308, 1328, 1329, 1347, 1371, 1417,  
     1418, 1432, 1452, 1456, 1474, 1478, 1482, 1488, 1492,  
     1496, 3926  
   \skip\_set\_eq:NN 1207, 1208, 1210, 1217, 1382, 1383,  
     1384, 1389, 3417, 3459, 3460, 4664, 4930  
   \skip\_sub:Nn 1256, 1258, 1272, 1274, 1296, 1298, 1312,  
     1314, 1335, 1337, 1351, 1353, 1424, 1425, 1436, 1437  
   \skip\_use:N 1106, 1110, 1154, 1158, 1163, 1183, 1187,  
     1198, 1204, 1614, 1618, 1621, 1628, 1632, 1635, 3641  
   \skip\_vertical:N . 400, 403, 4330, 4344, 4702, 4969  
   \skip\_vertical:n ..... 4701, 4968  
   \skip\_zero:N 1216, 1230, 1368, 1369, 1370, 1388, 1402,  
     3461, 3624, 3765, 3953, 3954  
   \skip\_zero\_new:N ..... 1447, 1469, 1470, 1471  
   \c\_zero\_skip . 400, 403, 1119, 1128, 1137, 1287, 1326,  
     1450, 1472, 1614, 1628, 1641, 1652, 1663, 1674, 1685,  
     1696, 4330, 4344, 4702, 4969  
 \small ..... 5006, 5010, 5014, 5018, 5022, 5026  
 socket commands:  
   \socket\_assign\_plug:nn .. 3835, 3843, 3851, 3885,  
     3893, 3901  
   \socket\_new:nn ..... 3807, 3855  
   \socket\_new\_plug:nnn 3808, 3815, 3823, 3856, 3863,  
     3872  
   \socket\_use:n ..... 3836, 3886  
   \socket\_use:nn ..... 3844, 3852, 3894, 3902  
 \star ..... 3223  
 start ..... 778  
 start\* ..... 778  
 start-list-tags ..... 3807, 3855

\stepcounter .....	3936, 4099, 4425
stop-list-tags .....	<u>3807</u> , <u>3855</u>
stop-start-tags .....	<u>3807</u> , <u>3855</u>
str commands:	
\c_backslash_str .....	2650, 5331, 5336, 5341, 5346, 5348, 5350, 5355, 5357, 5455, 5459, 5463, 5473, 5477, 5485, 5486, 5490, 5502, 5503, 5507, 5508, 5529, 5531, 5535, 5537, 5565, 5628, 5630, 5634, 5636, 5645, 5646, 5650, 5655, 5656, 5660, 5664, 5668
\c_colon_str .....	2457, 2968, 4984
\c_left_brace_str .....	5436, 5443, 5449
\c_right_brace_str .....	5436, 5443, 5449
\str_case:nn .....	255, 314
\str_case:nnTF .....	1728, 1736, 2285, 2293, 5082, 5091
\str_clear:N .....	3529, 4492
\str_count:n .....	234
\str_if_empty:NTF .....	1745, 1786, 1813
\str_if_eq:nnTF .....	3420, 3465, 5184
\str_if_in:nnTF .....	4980
\str_new:N .....	84, 131, 146, 186
\str_set:Nn .....	544, 550, 556, 575, 576, 577, 2188, 2189, 2215, 2216, 3916, 3919
\str_use:N .....	3204
\string .....	434
\strutbox .....	1235, 1238, 1249, 1250, 1261, 1263, 1278, 1281, 1289, 1290, 1301, 1303, 1318, 1321, 1328, 1329, 1340, 1342, 1357, 1360, 1406, 1409, 1417, 1418, 1426, 1427, 1439, 1441, 1452, 1453, 1456, 1463, 1476, 1484, 1490, 1498, 3944, 3949, 3998, 4112

T

tag commands:	
\tag_mc_begin:n .....	3813, 3861, 3870
\tag_mc_end: .....	3817, 3865, 3874
\tag_resume:n .....	3810, 3858, 3972, 3980, 4029, 4068, 4314, 4378
\tag_struct_begin:n .....	3811, 3812, 3819, 3820, 3821, 3859, 3860, 3867, 3868, 3869, 3981
\tag_struct_end: .....	3993
\tag_struct_end:n .....	3818, 3825, 3826, 3827, 3828, 3866, 3875, 3876, 3877, 3878, 4466, 4729
\tag_suspend:n .....	3829, 3879, 3962, 3974, 3990, 4021, 4059, 4458, 4721
\tag_tool:n .....	3973

TeX and L<sup>A</sup>T<sub>E</sub>X 2<sub>ε</sub> commands:

\@auxout .....	450
\@currentenv .....	255, 314
\protected@write .....	450

tex commands:	
\tex_newlinechar:D .....	2776

text commands:	
\text_expand:n .....	4976
\textasteriskcentered .....	2185, 2202
\the .....	243, 248
\thepage .....	456

tl commands:	
\c_space_tl .....	3050, 5380, 5395, 5418, 5422, 5609, 5610, 5619, 5620, 5680, 5684
\tl_clear:N .....	542, 549, 2166, 2232, 2242, 2263, 2271, 2477, 2796, 2797, 2911, 2985, 4826
\tl_clear_new:N .....	499
\tl_const:Nn .....	50, 483
\tl_gclear:N .....	362, 363, 364, 1766, 1771, 2886, 3195, 3213, 4350, 4410, 4628
\tl_gclear_new:N .....	1753

\tl_gput_right:Nn .....	484
\tl_greplace_all:Nnn .....	505
\tl_gset:Nn .....	290, 291, 305, 306, 1754, 1767, 1772, 1991, 2800, 3134, 4583
\tl_gset_eq:NN .....	501, 3130, 4621
\tl_if_blank:nTF .....	2589, 2607, 2744, 3247, 3265, 3287, 4619, 5248
\tl_if_empty:NTF .....	609, 628, 656, 673, 693, 700, 726, 743, 1779, 1784, 1806, 1811, 1869, 1933, 1941, 1970, 2030, 2321, 2352, 2497, 2841, 2863, 2893, 2922, 2995, 3044, 3155, 4829, 5165
\tl_if_empty:nTF .....	1834
\tl_if_exist:NTF .....	1839
\tl_if_novalue:nTF .....	2603, 2919, 2993, 3029, 3109, 3128, 3136, 3297, 3527, 3983, 4423, 4490, 4761, 4827
\tl_map_inline:Nn .....	225, 502
\tl_new:N .....	42, 43, 44, 47, 52, 53, 56, 57, 63, 65, 66, 68, 69, 105, 106, 107, 113, 114, 115, 116, 117, 118, 119, 120, 121, 122, 126, 128, 129, 130, 132, 135, 136, 154, 162, 163, 164, 167, 185
\tl_put_left::Ne .....	2830
\tl_put_left:Nn .....	2329, 2360, 2482, 2824, 2837, 2843, 2853, 3061, 3101, 4334, 4395, 4848, 4851
\tl_put_right:Nn .....	500, 619, 664, 681, 734, 2333, 2364, 2411, 2421, 2434, 2449, 2455, 2460, 2484, 2489, 2496, 2499, 2509, 2514, 2517, 2523, 2914, 2917, 2924, 2926, 2953, 2958, 2963, 2966, 2975, 2988, 2991, 2997, 3002, 3012, 4831, 4835
\tl_remove_all:Nn .....	5164
\tl_remove_once:Nn .....	2399, 2938
\tl_replace_all:Nnn .....	504, 5199
\tl_reverse:N .....	2398, 2400, 2937, 2939
\tl_set:Nn .....	58, 259, 269, 318, 319, 326, 327, 334, 335, 469, 543, 548, 554, 555, 608, 653, 725, 935, 949, 962, 975, 1868, 1969, 2233, 2243, 2264, 2272, 2553, 2764, 3031, 3076, 3089, 4837, 4860, 5162, 5198, 5268
\tl_set_eq:NN .....	510, 614, 617, 661, 663, 678, 680, 731, 733, 2397, 2936, 2949, 3309, 3313, 4087, 4089
\tl_to_str:n .....	1839, 1845, 1850, 4976
\tl_trim_spaces:n .....	500, 5151, 5162, 5168, 5184
\tl_use:N .....	506, 509, 630, 695, 702, 745, 1009, 1013, 1017, 1021, 1025, 1029, 1033, 1037, 1041, 1045, 1049, 1053, 1057, 1061, 1065, 1069, 2387, 2404, 2412, 2423, 2436, 2441, 2452, 3117, 3123, 3151, 3186, 3187, 3194, 3206, 3300, 3304, 3312, 3347, 3348, 3354, 3363, 3486, 3677, 4092, 4341, 4402, 4632, 4661, 4662, 4890, 4919, 4922, 4927, 5031, 5032, 5033, 5034, 5035, 5052, 5147, 5266

token commands:	
\token_to_str:N .....	452
\topsep .....	3796, 3949
topsep .....	<u>804</u>
\topskip .....	1216, <u>1388</u>
\typeout .....	243, 248, 418, 422, 433, 434

U

\u .....	228, 2805
\unkern .....	249
unknown .....	<u>3233</u> , <u>3255</u> , <u>3273</u>
\unskip .....	244
use commands:	
\use:N .....	235, 3191, 3210, 3488
\use:n .....	1719, 2276, 4982, 5073
\use_none:nn .....	444, 5205
\usecounter .....	3418, 3462

V

\value . . . . 1782, 1788, 1795, 1801, 1809, 1815, 1822, 1828

vbox commands:

    \ vbox\_set:Nn . . . . . 4061

    \ vbox\_set\_top:Nn . . . . . 4339, 4400

\vspace . 865, 876, 1618, 1621, 1632, 1635, 1645, 1647, 1656,  
          1658, 1667, 1669, 1678, 1680, 1689, 1691, 1700, 1702

W

widest . . . . . 778

wrap-ans . . . . . 2168

wrap-label . . . . . 513

wrap-label\* . . . . . 513

wrap-opt . . . . . 2168

Z

\z . . . . . 2805