

enumext

ENUMERATE EXERCISE SHEETS

V1.0 2024-05-02^{*}

©2024 by Pablo González[†]

CTAN: <https://www.ctan.org/pkg/enumext>

 <https://github.com/pablgonz/enumext>

Abstract

This package provides “*enumerated list*” environments for creating “*simple exercise sheets*” along with “*multiple choice questions*”, storing the *(answers)* to these in memory using the **multicol** package and the **l3seq** and **l3prop** modules.

Contents

1 Introduction	2	4 The storage system	9
1.1 Description and usage	3	4.1 Keys for storage	10
1.2 The concept of left margin	3	4.2 Keys for internal label and ref	10
1.3 User interface	3	4.3 Keys for check answers	10
1.3.1 Internal counters	3	4.4 The command <code>\anskey</code>	10
1.3.2 Support for multicol	4	4.5 The environment keyans	11
1.3.3 Support for minipage	4	4.5.1 The <code>\item*</code> in keyans	11
1.3.4 The <code>\label</code> and <code>\ref</code> system	4	4.6 The environment keyanspic	12
1.3.5 Support for <code>\footnote</code>	4	4.6.1 The command <code>\anspic</code>	12
2 The environment enumext	4	4.7 Printing stored content	13
2.1 The <code>\item*</code> in enumext	5	4.7.1 The command <code>\getkeyans</code>	13
2.1.1 Keys for <code>\item*</code> in enumext	5	4.7.2 The command <code>\printkeyans</code>	13
3 The command <code>\setenumext</code>	5	5 Full examples	14
3.1 Keys for label and ref	6	6 The way of non-enumerated lists	16
3.2 Keys for spaces	6	7 References	18
3.2.1 Vertical spaces	7	8 Change history	18
3.2.2 Horizontal spaces	8	9 Index of Documentation	19
3.3 Keys for add code	8	10 Implementation	21
3.4 Keys for start and resume	9	11 Index of Implementation	102
3.5 Keys for multicol	9		
3.6 Keys for minipage	9		
3.6.1 The command <code>\miniright</code>	9		

Motivation and acknowledgments

Usually it is enough to use the classic **enumerate** environment to generate “*simple exercise sheets*” or “*multiple choice questions*”, the basic idea behind **enumext** is to cover three points:

1. To have a simple interface to be able to write “*lists of exercises*” with “*answers*”.
2. To have a simple interface for writing “*multiple choice questions*”.
3. To have a simple interface for placing “*columns*” and “*drawings*” or “*tables*”.

This package would not be possible without Phelype Oleinik who has collaborated and adapted a large part of the code and all \TeX team for their great work and to the different members of the **TeX-SX** community who have provided great answers and ideas. Here a note of the main ones:

1. Answer given by Alan Munn in `\topsep`, `\itemsep`, `\partopsep`, `\parsep` - what do they each mean (and what about the bottom)?
2. Answer given by Enrico Gregorio in Understanding minipages - aligning at top
3. Answer given by Ulrich Diez in Different mechanics of hyperlink vs. hyperref
4. Answer given by Enrico Gregorio in Minipage and multicol, vertical alignment

License and Requirements

Permission is granted to copy, distribute and/or modify this software under the terms of the LaTeX Project Public License (lpl), version 1.3 or later (<https://www.latex-project.org/lpl.txt>). The software has the status “maintained”.

The **enumext** package loads and requires **multicol**[3] package, need to have a modern \TeX distribution such as \TeX Live or Mi \TeX . It has been tested with the standard classes provided by \TeX : **book**, **report**, **article** and **letter** on 10pt, 11pt and 12pt.

^{*}This file describes a documentation for v1.0, last revised 2024-05-02.

[†]E-mail: pablgonz@educarchile.cl.

1 Introduction

In the \LaTeX world there are many useful packages and classes for creating “lists of exercises”, “worksheets” or “multiple choice questions”, classes like `exam[1]` and packages like `xsim[2]` do the job perfectly, but they don’t always fit the basic day to day needs.

In my work (and in the work of many teachers) it is common to use “simple exercise sheets” also known as “informal lists of exercises”, as an example:

1. Factor $x^2 - 2x + 1$

2. Factor $3x + 3y + 3z$

3. True False

(a) $\alpha > \delta$

(b) \LaTeX 2e is cool?

4. Related to Linux
- (a) You use linux?

(b) Usually uses the package manager?

(c) Rate the following package and class

i. `xsim-exam`

ii. `xsim`

iii. `exsheets`

Sometimes we are also interested in showing the “answers” along with the questions:

1. Factor $x^2 - 2x + 1$

* $(x - 1)^2$

2. Factor $3x + 3y + 3z$

* $3(x + y + z)$

3. True False

(a) $\alpha > \delta$

* False

(b) \LaTeX 2e is cool?

* Very True!

4. Related to Linux
- (a) You use linux?

* Yes

(b) Usually uses the package manager?

* Yes, dnf

(c) Rate the following package and class

i. `xsim-exam`

* doesn’t exist for now :(

ii. `xsim`

* very good

iii. `exsheets`

* obsolete

Or we are interested in referring to a specific question and its “answer”, for example:

The answer to 3.(b) is “Very True!” and the answer to 4.(c).ii is “very good”.

Or we are interested in printing all the “answers”:

1. (a) $(x - 1)^2$

* ii. Yes, dnf

*

(b) $3(x + y + z)$

* iii. A. doesn’t exist

(c) i. False

* for now :(

ii. Very True!

* B. very good

(d) i. Yes

* C. obsolete
- Another very common thing to use in my work is “multiple choice questions”, for example:
1. First type of questions

(A) value

(C) value

(B) correct

(D) value

2. Second type of questions

I. $2\alpha + 2\delta = 90^\circ$

II. $\alpha = \delta$

III. $\angle EDF = 45^\circ$

(A) I only

(D) I and III only

(B) II only

(E) I, II, and III

(C) I and II only

★ 3. Third type of questions

(1) $2\alpha + 2\delta = 90^\circ$

(2) $\angle EDF = 45^\circ$

(A) value


(D) value

(B) value


(E) value

(C) value


4. Question with image and label below:




(A)




(B)



(C)



(D)



(E)

5. Question with image on left side:


(A) value

(B) value

(C) value

(D) correct

(E) value



Where what we are interested in the `<label>` and a “short note” that we leave as an explanation, and then print them:

1. (a) (B) $x = 5$

* (e) (C) some note

*

(b)

(f) (B)

(c) (D)

(g) (D) “other note”

(d)

These “simple worksheets” or “multiple choice questions” appear to be easy to obtain using a combination of the `enumerate`, `minipage` and `multicols` environments, but like many things, what “looks simple” is not so simple.

The `enumext` package was created and designed to meet these small requirements in the creation of “simple worksheets” and “multiple choice questions”.

©2024 by Pablo González L

2 / 113

1.1 Description and usage

The `enumext` package defines enumerated environments using the `list` environment provided by \LaTeX , but “does not redefine” any internal commands associated with it such as `\list`, `\endlist` or `\item` outside of the “scope” in which they are defined.

- This package is NOT intend to replace the `enumerate` environment nor replace the powerful `enumitem`[5], the approach is intended to work without hindering either of them.
This package can be used with `xelatex`, `lualatex`, `pdflatex` and the classical `latex>dvips>ps2pdf` and is present in \TeX Live and \MiKTeX , use the package manager to install. For manual installation, download `enumext.zip` and unzip it, run `lualatex enumext.dtx` and move all files to appropriate locations, then run `mktxlsr`. To produce the documentation run `lualatex enumext.dtx` two times.

```
enumext.sty  » TDS:tex/latex/enumext/
enumext.pdf  » TDS:doc/latex/enumext/
README.md   » TDS:doc/latex/enumext/
enumext.dtx  » TDS:source/latex/enumext/
```

The package is loaded in the usual way:

```
\usepackage{enumext}
```

1.2 The concept of left margin

There is a direct relationship between the parameters `\leftmargin`, `\itemindent`, `\labelwidth` and `\labelsep` plus an “extra space” that makes it difficult to obtain the desired *horizontal spaces* in a `list` environment.

Usually we don’t want the `list` to go beyond the left margin of the page, but since these four values are related, that causes a problem. The `enumitem`[5] package adds the `\labelindent` parameter to solve some of these problems. A simplified representation of this in the figure 1.

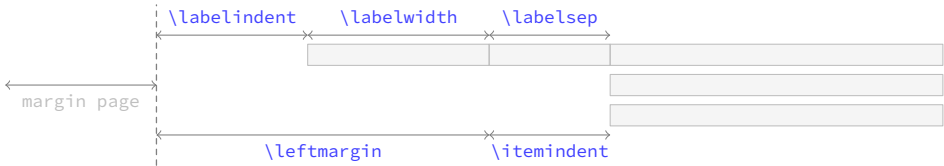


Figure 1: Representation of horizontal lengths in `enumitem`.

The `enumext` package does NOT provide a user interface to set the values for `\leftmargin` and `\itemindent`, instead it provides the keys `list-offset` and `list-indent` which internally set the values for `\leftmargin` and `\itemindent`. The concepts of `\leftmargin` and `\itemindent` are different in `enumext`. The figure 2 shows the visual representation of idea.

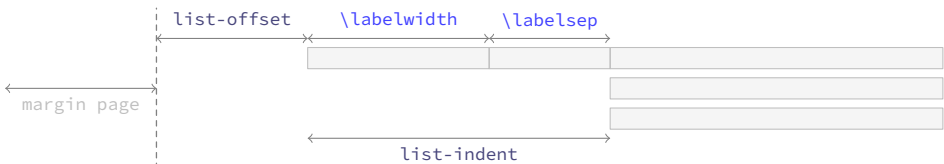


Figure 2: Representation of horizontal lengths concept in `enumext`.

In this way we reduce a *little* the amount of parameters we have to pass. With the default values of keys `list-offset`, `list-indent`, `labelwidth` and `labelsep` the lists will have the (usually) expected output for “*simple worksheets*”. The figure 3 shows the visual representation.



Figure 3: Default horizontal lengths `list-offset=0pt`, `list-indent=\labelwidth+\labelsep` in `enumext`.

1.3 User interface

The user interface consists in `enumext`, `enumext*`, `keyans`, `keyans*` and `keyanspic` environments, `\anskey`, `\item*` and `\anspic*` commands to \langle stored content \rangle , `\getkeyans` command to get the individual \langle stored content \rangle , `\printkeyans` to print all \langle stored content \rangle , `\miniright` for `minipage` and `\setenumext` to config all $[\langle key = val \rangle]$ options.

1.3.1 Internal counters

The package `enumext` uses internally the `enumXi`, `enumXii`, `enumXiii`, `enumXiv` counters for the four nesting levels of the `enumext` environment, the `enumXv` counter for the `keyans` environment, the `enumXvi` counter for the `keyanspic` environment, the counter `enumXvii` for `enumext*` environment and the counter `enumXviii` for `keyans*` environment.

- If any package defines these counters or they are user-defined in the document, the package will return a missing error and abort the load.

1.3.2 Support for multicol

The package provides direct support for using the `multicol`[3] package. This allows to obtain directly a two-column output as shown in the figure 4.

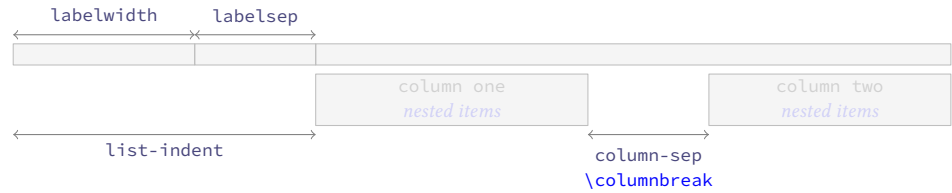


Figure 4: Representation of the two column output for a nested level in `enumext` environment.

The “non starred” version of the `multicols` environment is always used together with the `\raggedcolumns` command and is controlled by `columns` and `columns-sep` keys. The environment is available for all nesting levels, and can can together with the `mini-env` key. If you need to force a start a new column `\columnbreak` must be used (see §3.5).

- The `\columnseprule` command is not available as a key and is set to “zero” for the inner levels and the `keyans` environment. If the value of this is set inside the document, it will affect “all environments” that use the `columns` key.

1.3.3 Support for minipage

The package provides direct support for `minipage` environment, this allows you to obtain an output like the one shown in figure 5.



Figure 5: Representation of the `mini-env` output for a nested level `enumext` environment.

The `minipage` environments (left and right) is always used with “aligned on top” [`t`], the `minipage` environment on the “right side” always starts with `\centering`. It can be used at all nesting levels and is controlled by `mini-env` and `mini-sep` keys. In order to switch from the “left” side `minipage` environment to the “right” side one must use the command `\mini-right` (see §3.6).

1.3.4 The \label and \ref system

This package provides a user interface like the `enumitem`[5] package to customize the references which is activated by the `ref` key (§3.1), the standard \TeX `\label` and `\ref` commands work as usual. It also provides an “internal reference” system for the “stored content” by means of the key `store-ref` (§4.2) when the key `save-ans`(§4.1) is active.

- The implementation of `\label` and `\ref` together with the `store-ref` key are compatible with the `hyperref`[7] package.

1.3.5 Support for \footnote

This package provides an internal implementation for the `\footnote` command which is compatible with the `hyperref` package, but, it will not produce the expected links, and when using the `mini-env` key or the starred environments `enumext*` and `keyans*` the output will look like the classic way they are displayed in the `minipage` environment.

The best way to solve this is to use Jean-François Burnol `footnotehyper`[8] package, it will support keeping the links if `hyperref` is loaded with the `hyperfootnotes=true` option (default) and will show the output numbered at the bottom of the page (as opposed to how it is displayed in the `minipage` environment). The way to load it is as follows:

```
\usepackage{footnotehyper}
\makesavenoteenv{enumext}
\makesavenoteenv{enumext*}
```

2 The environment enumext

<code>enumext</code>	<code>\begin{enumext} [⟨keyval list⟩]</code>	<code>\begin{enumext*} [⟨keyval list⟩]</code>
<code>enumext*</code>	<code>\item ⟨item content⟩</code>	<code>\item ⟨item content⟩</code>
	<code>\item [⟨custom⟩] ⟨item content⟩</code>	<code>\item [⟨custom⟩] ⟨item content⟩</code>
	<code>\item* [⟨symbol⟩] [⟨offset⟩] ⟨item content⟩</code>	<code>\item* [⟨symbol⟩] [⟨offset⟩] ⟨item content⟩</code>
	<code>\end{enumext}</code>	<code>\end{enumext*}</code>

The `enumext` is an “*enumerated list*” environment that works in the same way as the standard `enumerate` environment provided by L^AT_EX, `\item` and `\item[⟨custom⟩]` commands work in the usual way.

The environment can be nested with at most “*four levels*” and the options can be configured globally using `\setenumext` command and locally using `[⟨key = val⟩]` in the environment.

Example

1. This text is in the first level.
 - (a) This text is in the second level.
 - i. This text is in the third level.
 - A. This text is in the fourth level.
- X This text is in the first level.
- ★ 2. This text is in the first level.

```
\begin{enumext}
  \item This text is in the first level.
  \begin{enumext}
    \item This text is in the second level.
    \begin{enumext}
      \item This text is in the third level.
      \begin{enumext}
        \item This text is in the fourth level.
      \end{enumext}
    \end{enumext}
  \end{enumext}
  \item[X] This text is in the first level.
  \item* This text is in the first level.
\end{enumext}
```

2.1 The `\item*` in `enumext`

```
\item* \item*
\item*[⟨symbol⟩]
\item*[⟨symbol⟩][⟨offset⟩]
```

The `\item*`, `\item*[⟨symbol⟩]` and `\item*[⟨symbol⟩][⟨offset⟩]` works like the numbered `\item`, but placing a `⟨symbol⟩` to the “*left*” of the `⟨label⟩` separated from it by the value set by the `labelsep` key and can be `⟨offset⟩` using the second optional argument. The default values for `⟨symbol⟩` and `⟨offset⟩` are `\star` ‘★’ and the value set by `labelsep` key.

The *starred version* ‘★’ cannot be separated by spaces ‘`\` ’ from the command, i.e. `\item*` and the first optional argument does “*not support*” verbatim content. Can be configure with the keys `item-sym*` and `item-pos*` locally in the environment or globally using `\setenumext` command (§3).

🔗 The behavior of `\item*` in the `enumext` environment is NOT the same as in the `keyans` environment.

2.1.1 Keys for `\item*` in `enumext`

`item-sym*` = {`⟨symbol⟩`} default: `\star`
 Sets the `symbol` to be displayed in the “*left*” of the box containing the current `⟨label⟩` set by `labelwidth` key for `\item*` in `enumext`. The `symbol` can be in text or math mode, for example `item-sym*={\ast}`.

`item-pos*` = {`⟨rigid length | dim expression⟩`} default: *by levels*
 Sets the `offset` between the box containing the current `⟨label⟩` defined by `labelwidth` key and the `⟨symbol⟩` set by `item-sym*` key. The default values are set by `labelsep` key at each level. If positive values are passed it will *offset to the left* and if negative values are passed it will *offset to the right*.

3 The command `\setenumext`

```
\setenumext \setenumext[⟨enumext, level⟩]{⟨key = val⟩} \setenumext[⟨enumext*⟩]{⟨key = val⟩}
\setenumext[⟨print, level⟩]{⟨key = val⟩} \setenumext[⟨keyans*⟩]{⟨key = val⟩}
\setenumext[⟨keyans⟩]{⟨key = val⟩} \setenumext[⟨print*⟩]{⟨key = val⟩}
```

The command `\setenumext` sets the `⟨keys⟩` on a global basis for environment `enumext`, the `\printkeyans` command and the `keyans` environment. It can be used both in the preamble and in the body of the document as many times as desired.

The `⟨keys⟩` set in the optional arguments of environments and commands have the highest precedence, overriding both options passed by `\setenumext`. If the optional argument is not passed, the first level of the environment `enumext` will be taken by default.

- It should be kept in mind that using any *key* that sets a *rubber or rigid lengths* for vertical or horizontal space on a level will influence the vertical and horizontal space for *inners levels* and *keyans* and *keyanspic* environments. All *keys* related to vertical or horizontal spacing accept a “*skip*” or “*dim*” expression if passed between braces, i.e. you do not need to use `\dimexpr` or `\dimeval` to perform calculations.

3.1 Keys for label and ref

`label = {⟨\alph* | \Alph* | \arabic* | \roman* | \Roman*⟩}` default: *by levels*

Sets the *label* that will be printed at the *current level*. The default value for first level are `\arabic*`, for second level are `(\alph*)`, for third level are `\roman*`, and for fourth level are `\Alph*`.

- This key is intended to give the basic structure with which the *label* will be displayed, and the and the form in which it is used by standard “*label and ref*” and the “*internal reference*” system with the `store-ref` key. You cannot use commands with *label* as an argument, for example `\emph{⟨\alph*⟩}` will return an error. For full customization of how *label* is displayed use the `font` or `wrap-label` keys.

`ref = {⟨code {⟨\alph* | \Alph* | \arabic* | \roman* | \Roman*⟩ more code⟩}` default: *empty*

Modifies the way *cross references* are displayed. The `label` key sets the default form of the *cross references*, by using this key you can define a different format, for example: `ref=\emph{⟨\alph*⟩}` is valid.

- Internally, it renews the command associated with each counter when it is executed, i.e., `\theenumxi` is modified when the key is executed at the first level, `\theenumxii` when it is executed at the second level and `\theenumxiii` together with `\theenumxiv` when it is executed at the third and fourth levels.

This must be kept in mind, since the values set by the `label` and `ref` keys are not cumulative by levels, so if you have used the `ref` key in the first level and then want to associate the counter with `label` or `ref` in the second level you must use the direct commands, i.e. `\arabic{enumxi}` to indicate the count of the first level instead of using `\theenumxi`.

`labelsep = {⟨rigid length⟩}` default: `0.3333em`

Sets the *horizontal space* between the box containing the current *label* defined by `label` key and the text of an item on the first line. Internally sets the value of `\labelsep` for the current level.

`labelwidth = {⟨rigid length⟩}` default: *by label*

Sets the *width* of the box containing the current *label* set by `label` key. Internally sets the value of `\labelwidth` for the current level. The default values are calculated by means of the *width* of a box by setting a *value* to the current counter using ‘0’ for `\arabic*`, ‘M’ for `\Alph*`, ‘m’ for `\alph*`, ‘VIII’ for `\Roman*` and ‘viii’ for `\roman*`.

`widest = {⟨integer | string⟩}` default: *empty*

Sets the `labelwidth` key pass the *integer* or converting the *string* of the form `\Alph`, `\alph`, `\Roman` or `\roman` to a *value* for the current counter defined by `label` key, then calculating the *width* by means of a box. For example `widest={XXIII}` or `widest={23}` are equivalent. This key is useful when the default values of the `labelwidth` key are smaller than those actually used.

`font = {⟨font commands⟩}` default: *empty*

Sets the *font style* for the current *label* defined by `label` key. For example `font={\bfseries\small}`.

`align = {⟨left | right | center⟩}` default: *left*

Sets the *aligned* of *label* defined by `label` key on the current level in the label box.

`wrap-label = {⟨code {#1} more code⟩}` default: *empty*

Wraps the current *label* defined by `label` key referenced by `{#1}`. The `{⟨code⟩}` must be passed between braces. This key does not modify the value set by the `labelwidth` key and is applied only on `\item` and `\item*`. When using it in the `\setenumext` command it is necessary to use the *double hash* ‘`{#1}`’. For example `wrap-label={\fbox{#1}}` or you can create a command:

```
\NewDocumentCommand \itembx { s +m }
{%
  \IfBooleanTF{#1}
  {\strut\smash{\parbox[t]{\labelwidth}{\raggedright{#2}}}}%
  {\strut\smash{\parbox[t]{\labelwidth}{\raggedleft{#2}}}}%
}
```

and then pass it through the key `wrap-label={\itembx{#1}}` or `wrap-label={\itembx*{#1}}`.

`wrap-label* = {⟨code {#1} more code⟩}` default: *empty*

The same as the `wrap-label` key but also applies on `\item[⟨custom⟩]`.

3.2 Keys for spaces

`show-length = {⟨true | false⟩}` default: *false*

Displays on the terminal the values for *all list parameters* at the current level. For *vertical spaces* show the values of `\topsep`, `\itemsep`, `\parsep` and `\partopsep`. For *horizontal spaces* show the values of `\labelwidth`, `\labelsep`, `\itemindent`, `\listparindent` and `\leftmargin`.

3.2.1 Vertical spaces

`topsep = {⟨rubber length | rigid length⟩}`

default: *by levels*

Set the *vertical space* added to both the top and bottom of the list. Internally sets the value of `\topsep` for the current level. The default values for first level are 8.0pt plus 2.0pt minus 4.0pt, for second level are 4.0pt plus 2.0pt minus 1.0pt, for third and fourth level are 2.0pt plus 1.0pt minus 1.0pt.

`parsep = {⟨rubber length | rigid length⟩}`

default: *by levels*

Set the *vertical space* between paragraphs within an item. Internally sets the value of `\parsep` for the current level. The default values for first level are 4.0pt plus 2.0pt minus 1.0pt, for second level are 2.0pt plus 1.0pt minus 1.0pt, for third and fourth level are 0pt.

`partopsep = {⟨rubber length | rigid length⟩}`

default: *by levels*

Set the *vertical space* added, beyond `topsep`, to the “top” and “bottom” of the entire environment if the environment instance is preceded by a “blank line” or `\par` command. Internally sets the value of `\partopsep` for the current level. The default values for first and second level are 2.0pt plus 1.0pt minus 1.0pt, for third and fourth level are 1.0pt minus 1.0pt.

- The value of this parameter also affects the *inner levels* and the *keyans* environment. Caution should be taken with “blank lines” or `\par` command “before” each environment or nested level when formatting the source code of document. T_EX will enter *vertical mode* and apply this value to the “top” and “bottom” the environment or nested level.

`itemsep` = {*<rubber length | rigid length>*} default: *by levels*

Set the *vertical space* between items, beyond the `parsep`. Internally sets the value of `\itemsep` for the current level. The default values for first level are `4.0pt` plus `2.0pt` minus `1.0pt`, for the rest of the levels are `2.0pt` plus `1.0pt` minus `1.0pt`.

`noitemsep` *<value forbidden>* default: *not used*

This is a “*meta-key*” that does not receive an argument. Set `itemsep` and `parsep` equal to `0pt` the entire level of environment.

`nosep` *<value forbidden>* default: *not used*

This is a “*meta-key*” that does not receive an argument. Sets all keys for vertical spacing equal to `0pt` the entire level of environment.

- The following *<keys>* should be used with “*caution*”, they are intended to be used at the “top” and “bottom” of the environment when the `columns` or `mini-env` keys do not provide adequate *vertical spaces*. The values passed can be *rubber* or *rigid* lengths, the way they are applied is the way you differ, using the star ‘*’ *<keys>* applies `\vspace*` so that \LaTeX does *not discard* this space at page break.

`above` = {*<rubber length | rigid length>*} default: *not used*

Set the *extra vertical space* added, beyond `topsep`, to the top of the entire level of environment. This key is intended to give a “*fine adjustment*” of the vertical space on the “*above*” the environment without hindering the value of the `topsep` key. The space is added with `\vspace` so is “*discardable*”.

`above*` = {*<rubber length | rigid length>*} default: *not used*

Set the *extra vertical space* added, beyond `topsep`, to the top of the entire level of environment. This key is intended to give a “*fine adjustment*” of the vertical space on the “*above*” the environment without hindering the value of the `topsep` key. The space is added with `\vspace*` so is “*not discardable*”.

`below` = {*<rubber length | rigid length>*} default: *not used*

Set the *extra vertical space* added, beyond `topsep`, to the bottom of the entire level of environment. This key is intended to give a “*fine adjustment*” of the vertical space on the “*below*” the environment without hindering the value of the `topsep` key. The space is added with `\vspace` so is “*discardable*”.

`below*` = {*<rubber length | rigid length>*} default: *not used*

Set the *extra vertical space* added, beyond `topsep`, to the bottom of the entire level of environment. This key is intended to give a “*fine adjustment*” of the vertical space on the “*below*” the environment without hindering the value of the `topsep` key. The space is added with `\vspace*` so is “*not discardable*”.

3.2.2 Horizontal spaces

`itemindent` = {*<rigid length>*} default: `0pt`

Extra *horizontal indentation*, beyond `labelsep`, of the “*first line*” off each item. This value is applied internally using `\hspace` and does not modify the value of `\itemindent`.

`rightmargin` = {*<rigid length>*} default: `0pt`

Set the *horizontal space* between the right margin of the environment and the right margin of the enclosing environment, the value it takes must be greater than or equal to `0pt`. Internally sets the value of `\rightmargin` for the current level.

`listparindent` = {*<rigid length>*} default: `0pt`

Sets the *horizontal space* indentation, beyond `list-indent`, for second and subsequent paragraphs within a list item. Internally sets the value of `\listparindent` for the current level.

`list-offset` = {*<rigid length>*} default: `0pt`

Sets the *horizontal translation* of the entire environment level from the left edge of the box defined by the `labelwidth` key. Internally sets the values of `\leftmargin` and `\itemindent` for the current level.

`list-indent` = {*<rigid length>*} default: `labelwidth + labelsep`

Sets the *indentation* of the whole environment under the box defined by `labelwidth` and `labelsep` keys. Internally sets the value of `\leftmargin` and `\itemindent` for the current level.

- If `list-indent=0pt` the *<label>* will be part of the text, separated by the value of the `labelsep` key and the *first word*, in simple terms it will look like a “*common paragraph*”. This setting is equivalent (more or less) to the `wide` key provided by the `enumitem` package.

3.3 Keys for add code

- The following *<keys>* should be used with “*caution*”, they are intended to inject *{<code>}* into different parts of the defined environments. We must keep in mind that the defined environments are based on the `list` base environment provided by \LaTeX which is defined (simplified) as plain form `\list{<arg one>}{<arg two>}`. Using the `before*` key does not allow access to the `list` parameters defined by `[<key = val>]`.

`before` = {*<code>*} default: *not used*

Execute *{<code>}* “*before*” the environment starts. The *{<code>}* is executed “*after*” performing all calculations related to the *list parameters* in the environment and the parameters sets by `[<key = val>]` that is, in the second argument of the list after setting all the parameters `\list{<arg one>}{<arg two>}{<code>}`. The *{<code>}* must be passed between braces.

`before*` = {*<code>*} default: *not used*

Execute `{\code}` “before” the environment starts. The `{\code}` is executed “before” performing all calculations related to the *list parameters* and `[\key = val]` sets in the environment that is, before the arguments defining the environment are executed: `{\code}\list{\arg one}{\arg two}`. The `{\code}` must be passed between braces.

`first = {\code}` default: *not used*
 Executes `{\code}` when “starting” the environment. The `{\code}` must be passed between braces, is executed right “after” all *list parameters* are done, after the second argument of `list`, just before the first occurrence of `\item`: `\list{\arg one}{\arg two}{\code}\item`.

- Keep in mind that the code set in this key will affect the entire “body” of the environment and therefore the inner levels of the `list` and the `keyans` environment. It is recommended to set this key per level.

`after = {\code}` default: *not used*
 Execute `{\code}` “after” finishing the environment. The `{\code}` must be passed between braces.

3.4 Keys for start and resume

`start = {\integer | string}` default: `1`
 Sets the *start value* of the numbering on the current level. Internally `\string` is passed as value to the counter defined by `label` key on the current level, i.e. it is equivalent to enter `start=5`, `start=E` or `start=v`.

`resume \value forbidden` default: *not used*
 Sets the *start* to value from the previous of the counter defined by `label` key for the “first level”. This `\key` does not receive an argument. The `\key` can be overwritten using the `start` key. If the `save-ans` key is present and `{\store name}` exist, the numbering will continue according to this key. This key is “only” available for the “first level” of `enumext`.

3.5 Keys for multicol

`columns = {\integer}` default: `1`
 Set the *number of columns* to be used by the `multicol` environment within the environment. The value must be a positive integer less than or equal to `10`.

`columns-sep = {\rigid length}` default: *by level*
 Set the *space between columns* used by the `multicol` environment within the environment. Internally sets the value of `\columnsep`, by default its value is equal to the sum of the values set in the keys `labelwidth` and `labelsep` of the current level.

- The `\footnote{\text}` command in the nested levels of `multicol` will not work as expected, prefer the use of `\footnotemark[\number]` inside the environment and `\footnotetext[\number]{\text}` outside the environment or via the `after` key.

3.6 Keys for minipage

`mini-env = {\rigid length}` default: *not used*
 Sets the *width* of the `minipage` environment on the “right side”. This value added to the value set by the `mini-sep` key to determines the *width* of the `minipage` environment on the “left side”, taking `\linewidth` as the maximum reference value.

`mini-sep = {\rigid length}` default: `0.3333em`
 Sets the *space between* the `minipage` environment on the “left side” and the `minipage` environment on the “right side”. This separation is applied together with `\hfill`.

3.6.1 The command `\miniright`

`\miniright` The `\miniright` command close the `minipage` environment on the “left side” and opens the `minipage`
`\miniright*` environment on the “right side” by starting it with the `\centering` command. It must be placed “after” the last `\item` of the current environment and “before” starting the material to be placed on the “right side”. The starred version ‘`*`’ inhibits the use of `\centering` command i.e. the usual L^AT_EX justification is maintained in the `minipage` on the “right side”.

- The `\footnote{\text}` command in `minipage` environment will work as usual. If you prefer the footnotes to be numbered (not lowercase) and outside the environment, use `\footnotemark[\number]` inside the environment and `\footnotetext[\number]{\text}` outside the environment or via the `after` key.

4 The storage system

The entire mechanism for “storing content” it is activated according to `save-ans` key on the “first level” of `enumext` environment. Only when this `\key` is “active” the `\anskey` command and the environments `keyans` and `keyanspic` are available.

<pre>\begin{enumext}[save-ans={\store name}] \item Text \begin{keyans} ... \end{keyans} \end{enumext}</pre>	<pre>\begin{enumext}[save-ans={\store name}] \item Text \begin{keyanspic} ... \end{keyanspic} \end{enumext}</pre>
---	---

4.1 Keys for storage

- save-ans = { <store name> }

default: not set

Sets the “name” of the <sequence> and <prop list> in which the contents will be “stored” by \anskey in enumext environment, \item* in keyans environment and \anspic* in keyanspic environment. If the <sequence> or <prop list> does not exist, it will be created globally.
- wrap-ans = { <code {#1} more code> }

default: \fbox

Wraps the current <argument> passed \anskey command to referenced by {#1}. The {<code>} must be passed between braces. This <key> only affects the current <argument> passed to \anskey and NOT the “stored content” in the <store name> set by save-ans key. If this key is passed using the \setenumext command it is necessary to use double ‘{##1}’.
- mark-ans = { <symbol> }

default: \textasteriskcentered

Sets the symbol to be displayed in the left margin of the “stored content” in <store name> set by save-ans key when using show-ans key.
- mark-pos = { <left | right> }

default: left

Sets the aligned of the symbol defined by mark-ans key. The “symbol” is aligned in a box with the same dimensions of the label box defined by labelwidth key on the current level and separated by the value of the labelsep key.
- show-ans = { <true | false> }

default: false

Displays the current <argument> passed to \anskey in enumext environment, the current <label> for \item* in keyans environment and the current <label> for \anspic* in keyanspic environment at the place where it is executed. If the optional argument is present in \item* or \anspic* it will be shown in square brackets.
- show-pos = { <true | false> }

default: false

Displays the position occupied by the “stored content” by \anskey in enumext environment, \item* in keyans environment and \anspic* in keyanspic environment in <store name> set by save-ans key. This position is used by the \getkeyans command and by the \ref command if the store-ref key is active.

4.2 Keys for internal label and ref

- store-ref = { <true | false> }

default: false

Activates the internal “label and ref” mechanism for referencing “stored content” in <store name> set by save-ans key. To reference the location of the “stored content” within the environment you must use \ref{<store name: position>}, where <position> corresponds to the position occupied by the “stored content” in the <store name> returned by the show-pos key. For example \ref{test:4} will return 3. (b) which corresponds to the location of the “stored content” at position 4 within the environment in which the key save-ans=test was set.
- mark-ref = { <symbol> }

default: \textasteriskcentered

Sets the symbol that will be displayed by the \printkeyans command only if the hyperref package is detected and the store-ref key are active. This “symbol” is used as a “link” between the environment in which the save-ans key was used and the place where the command is executed.

4.3 Keys for check answers

- check-ans = { <true | false> }

default: false

Enables the “checking answer” mechanism. This key works under the logic that each question will contain “only one answer”, it is intended to be used in conjunction with no-store key.
- no-store <value forbidden>

default: not used

This is a “meta-key” that does not receive an argument. This key is used in conjunction with check-ans and is designed to be used with nested levels of enumext in which the \anskey command will not be used.

4.4 The command \anskey

\anskey \anskey{<content>}

The \anskey command takes a mandatory argument and is triggered by save-ans key. The “content” are “stored” in <store name> set by save-ans key. The command does “not support” verbatim content and must NOT be nested. By design it is assumed that each \item or \item* will have a “single” occurrence of the command unless a nested level is opened or the no-store key is used. If store-ref key are active and the hyperref[7] package is detected, \hyperLink and \hypertarget will be used, otherwise the usual “label and ref” system provided by L^AT_EX will be used.

Example

- ★ 1. Text containing our instructions or questions.

*

first answer

2. Text containing our instructions or questions.

(a) Question.

*

second answer
3. Text containing our instructions or questions.

*

third answer

4. Text containing our instructions or questions.

*

fourth answer

```
\begin{enumext}[save-ans=test,show-ans]
  \item* Text containing our instructions or questions. \anskey{\langle first answer \rangle}
  \item Text containing our instructions or questions.
    \begin{enumext}
      \item Question.\anskey{\langle second answer \rangle}
    \end{enumext}
  \item Text containing our instructions or questions. \anskey{\langle third answer \rangle}
  \item Text containing our instructions or questions. \anskey{\langle fourth answer \rangle}
\end{enumext}
```

4.5 The environment keyans

```
keyans \begin{keyans}[\langle key = val \rangle] \item \item[\langle custom \rangle] \item* \item*[\langle content \rangle] \end{keyans}
keyans* \begin{keyans*}[\langle key = val \rangle] \item \item[\langle custom \rangle] \item* \item*[\langle content \rangle] \end{keyans*}
```

The `keyans` is an “*enumerated list*” environment designed for “*multiple choice*” questions activated by the `save-ans` key. This environment can NOT be nested and must always be at the “*first level*” of the `enumext` environment, the commands `\item` and `\item[\langle custom \rangle]` work in the usual.

```
\begin{enumext}[save-ans=test]
  \item \langle item content \rangle
    \begin{keyans}[\langle key = val \rangle]
      \item \langle item content \rangle
      \item [\langle custom \rangle] \langle item content \rangle
      \item* \langle item content \rangle
      \item* [\langle content \rangle] \langle item content \rangle
    \end{keyans}
  \end{enumext}
```

The `\langle keys \rangle` set in the optional argument of the environment are the same (almost) as those of the `enumext` environment and have higher precedence than those set by `\setenumext[\langle keyans \rangle]{\langle key = val \rangle}`. If the optional argument is not passed or the `\langle keys \rangle` are not set by `\setenumext`, the default values will be the same as the second level of the `enumext` environment with the difference in the `\langle label \rangle` which will be set to `label=(\Alph*)`.

4.5.1 The `\item*` in `keyans`

```
\item* \item*
\item* [\langle content \rangle]
```

The `\item*` and `\item*[\langle content \rangle]` command store the current `\langle label \rangle` set by `label` key next to the `\langle content \rangle` (if it is present) in `\langle store name \rangle` set by `save-ans` key in the “*first level*” of the `enumext` environment.

The *starred version* ‘`*`’ cannot be separated by spaces ‘`␣`’ from the command, i.e. `\item*` and the optional argument does “*not support*” verbatim content. By design it is assumed that the *starred version* ‘`*`’ will only appear “*once*” within the environment.

🔗 The behavior of `\item*` in `keyans` environment is NOT the same as in the `enumext` environment.

Example

```
\begin{enumext}[save-ans=test,columns=2,show-ans]
  \item Text containing a question.
    \begin{keyans}[nosep]
      \item Choice
      \item* Correct choice
      \item Choice
      \item Choice
    \end{keyans}

  \item Text containing a question and image.
    \begin{keyans}[nosep,mini-env={0.4\linewidth}]
      \item Choice
      \item Choice
      \item Choice
      \item Choice
      \item*[\langle note \rangle] Correct choice
      \miniright
      \includegraphics[scale=0.25]{example-image-a}

      Some text
    \end{keyans}
\end{enumext}
```

1. Text containing a question.

(A) Choice

* (B) Correct choice

(C) Choice

(D) Choice
2. Text containing a question and image.

(A) Choice

(B) Choice

(C) Choice

(D) Choice

* (E) [note] Correct choice



4.6 The environment keyanspic

keyanspic

```
\begin{keyanspic}[\langle number above, number below \rangle]\anspic{\langle drawing \rangle}\anspic*[\langle content \rangle]{\langle drawing \rangle}
```

The `keyanspic` is a “fake enumerated list” environment that which uses the `\anspic` command instead of `\item`. It is activated by the `save-ans` key and has the same settings as the `keyans` environment. It is intended for placing “drawings” or “tabular” with an in-line or *above* and *below* layout. A representation of the output can be seen in the figure 6.

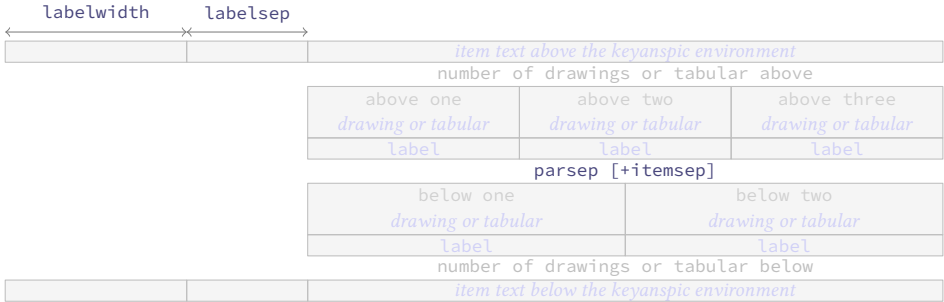


Figure 6: Representation of the `keyanspic` environment with optional argument `[3,2]` in `enumext`.

The optional argument determines the number drawings or tabular “above” and “below” within the environment. The vertical separation between “above” and “below” is controlled by the values set by `parsep` and `itemsep` keys passed to `keyans` environment. If the optional argument or the second part of it is omitted the drawings or tabular will be put on a single line.

4.6.1 The command \anspic

\anspic

```
\anspic{\langle drawing or tabular \rangle}
\anspic*[\langle content \rangle]{\langle drawing or tabular \rangle}
```


The `\anspic` command take three arguments, the *starred version* “*” store the current `\label` next to the `\content` (if it is present) in `\store name` set by `save-ans` key.

The *starred version* “*” cannot be separated by spaces “`\`” from the command, i.e. `\anspic*` and the optional argument does “not support” verbatim content. By design it is assumed that the *starred version* “*” will only appear “once” within the environment.

Example

```
\begin{enumext}[save-ans=test,show-ans,nosep]
  \item Question with images.
  \begin{keyanspic}[3,2]
    \anspic{\includegraphics[scale=0.15]{example-image-a}}
    \anspic{\includegraphics[scale=0.15]{example-image-b}}
    \anspic{\includegraphics[scale=0.15]{example-image-a}}
    \anspic{\includegraphics[scale=0.15]{example-image-a}}
    \anspic*[note]{\includegraphics[scale=0.15]{example-image-a}}
  \end{keyanspic}
\end{enumext}
```

1. Question with images.

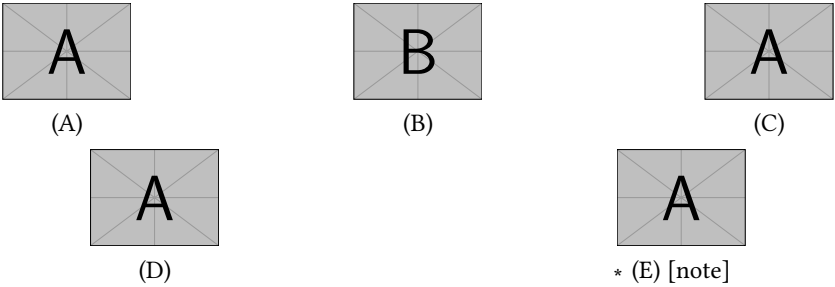

4.7 Printing stored content

4.7.1 The command \getkeyans

`\getkeyans` `\getkeyans{<store name> : <position>}`

The command `\getkeyans` prints the “only stored content” in `<store name>` defined by `save-ans` key in the `<position>` returned by the `show-pos` key.

The “content” can only be accessed “after” it is stored, if the `<store name>` does not exist the command will return an error. The form taken by the argument `<store name> : <position>` is the same as that used to generate the internal “label and ref” system when `store-ref` key are active, so to refer to a stored “content”. For example `\getkeyans{test:4}` will return the “stored content” at position 4 of the environment in which the key `save-ans=test` was set.

4.7.2 The command \printkeyans

`\printkeyans` `\printkeyans[<keys>]{<store name>}`

The command `\printkeyans` prints “all stored content” in `{<store name>}` defined by `save-ans` key. The “content” can only be accessed “after” it is stored, if `<store name>` does not exist the command will return an error.

Internally it places the “stored content” inside the `enumext` environment with default values for `label` key are the same as those of the `enumext` environment along with the keys: `nosep`, `first=\small`, `font=\small` for all levels, except for the first one that adds the `columns=2` key.

The optional argument allows to handle the `<keys>` “on the first level” of the `enumext` environment encapsulated by the command. If need to pass options for nested levels use `\setenumext[<print> , <level>]{<store name>}`.

Example

```
\begin{enumext}[save-ans=sample,columns=2,show-pos,nosep,store-ref]
  \item Factor  $3x+3y+3z$ . \anskey{$3(x+y+z)}
  \item True False

  \begin{enumext}[nosep]
    \item \LaTeXe is cool? \anskey{Very True!}
  \end{enumext}

  \item Related to Linux

  \begin{enumext}[nosep]
    \item You use linux? \anskey{Yes}
    \item Rate the following package and class
      \begin{enumext}[nosep]
        \item \texttt{xsim} \anskey{very good}
        \item \texttt{exsheets} \anskey{obsolete}
      \end{enumext}
    \end{enumext}
  \end{enumext}
```

The answer to `\ref{sample:4}` is `\getkeyans{sample:4}` and the answers to all the worksheets are as follows:

```
\printkeyans{sample}
```

1. Factor $3x + 3y + 3z$.

[1] $3(x + y + z)$

2. True False

(a) ~~LT~~X_e is cool?

[2] Very True!

3. Related to Linux

(a) You use linux?

[3] Yes

(b) Rate the following package and class

i. xsim

[4] very good

ii. exsheets

[5] obsolete

The answer to 3.(b).i is very good and the answers to all the worksheets are as follows:

1. (a) $3(x + y + z)$
- (b) i. Very True!
- (c) i. Yes
- ii. A. very good
- B. obsolete

5 Full examples

Here I will leave as an example some adaptations questions taken from [TeX-SX](#). The examples are attached to this documentation and can be extracted from your PDF viewer or from the command line by running:

```
$ pdfdetach -saveall enumext.pdf
```

and then you can use the excellent [arara](#)¹ tool to compile them.

Example 1

Adapted from the response given by Enrico Gregorio in [Squares for answer choice options and perfect alignment to mathematical answers](#) .

1. La velocità di $1,00 \times 10^2$ m/s espressa in km/h è:

A

 36 km/h.

B

 360 km/h.

C

 27,8 km/h.

D

 $3,60 \times 10^8$ km/h.
2. In fisica nucleare si usa l'angstrom (simbolo: $1 \text{ \AA} = 1 \times 10^{-10}$ m) e il fermi o femtometro ($1 \text{ fm} = 1 \times 10^{-15}$ m). Qual è la relazione tra queste due unità di misura?

A

 $1 \text{ \AA} = 1 \times 10^5 \text{ fm}$.

B

 $1 \text{ \AA} = 1 \times 10^{-5} \text{ fm}$.

C

 $1 \text{ \AA} = 1 \times 10^{-15} \text{ fm}$.

D

 $1 \text{ \AA} = 1 \times 10^3 \text{ fm}$.
3. La velocità di $1,00 \times 10^2$ m/s espressa in km/h è:

A

 36 km/h.

B

 360 km/h.

C

 27,8 km/h.

D

 $3,60 \times 10^8$ km/h.
4. In fisica nucleare si usa l'angstrom (simbolo: $1 \text{ \AA} = 1 \times 10^{-10}$ m) e il fermi o femtometro ($1 \text{ fm} = 1 \times 10^{-15}$ m). Qual è la relazione tra queste due unità di misura?

A

 $1 \text{ \AA} = 1 \times 10^5 \text{ fm}$.

B

 $1 \text{ \AA} = 1 \times 10^{-5} \text{ fm}$.

C

 $1 \text{ \AA} = 1 \times 10^{-15} \text{ fm}$.

D


 $1 \text{ \AA} = 1 \times 10^3 \text{ fm}$.

1. (a) B

(b) A
- (c) B

(d) A

Example 2

Adapted from the response given by Florent Rougon in [Multiple choice questions with proposed answers in random order — addition of automatic correction \(cross mark\)](#) .

1. La velocità di $1,00 \times 10^2$ m/s espressa in km/h è:

A

 36 km/h.

☒ B

 360 km/h.

C

 27,8 km/h.

D

 $3,60 \times 10^8$ km/h.
2. In fisica nucleare si usa l'angstrom (simbolo: $1 \text{ \AA} = 1 \times 10^{-10}$ m) e il fermi o femtometro ($1 \text{ fm} = 1 \times 10^{-15}$ m). Qual è la relazione tra queste due unità di misura?

☒ A

 $1 \text{ \AA} = 1 \times 10^5 \text{ fm}$.

B

 $1 \text{ \AA} = 1 \times 10^{-5} \text{ fm}$.

C

 $1 \text{ \AA} = 1 \times 10^{-15} \text{ fm}$.

D

 $1 \text{ \AA} = 1 \times 10^3 \text{ fm}$.
3. La velocità di $1,00 \times 10^2$ m/s espressa in km/h è:

A

 36 km/h.

☒ B

 360 km/h.

C

 27,8 km/h.

D

 $3,60 \times 10^8$ km/h.
4. In fisica nucleare si usa l'angstrom (simbolo: $1 \text{ \AA} = 1 \times 10^{-10}$ m) e il fermi o femtometro ($1 \text{ fm} = 1 \times 10^{-15}$ m). Qual è la relazione tra queste due unità di misura?

☒ A

 $1 \text{ \AA} = 1 \times 10^5 \text{ fm}$.

B

 $1 \text{ \AA} = 1 \times 10^{-5} \text{ fm}$.

C

 $1 \text{ \AA} = 1 \times 10^{-15} \text{ fm}$.

D

 $1 \text{ \AA} = 1 \times 10^3 \text{ fm}$.
1. (a) B

(b) A

(c) B

(d) A
- *


*

*

*

¹The cool TeX automation tool: <https://www.ctan.org/pkg/arara>

Example 3

A “simple multiple choice” test .

1. First type of questions
- A value

B correct

C value

D value
2. Second type of questions
- I. $2\alpha + 2\delta = 90^\circ$

II. $\alpha = \delta$

III. $\angle EDF = 45^\circ$

A I only

B II only


C I and II only
3. Third type of questions
- (1) $2\alpha + 2\delta = 90^\circ$

(2) $\angle EDF = 45^\circ$

A value

B value

C value
4. Question with image and label below:

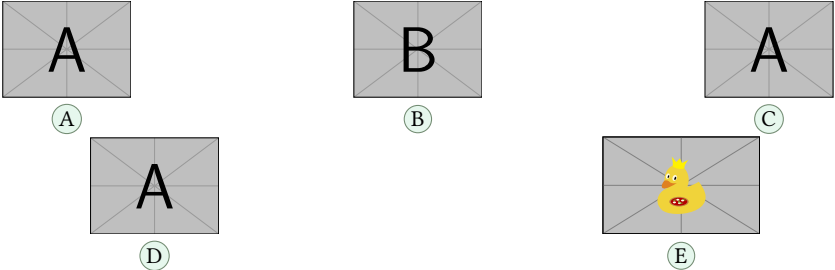


5. Question with image on left side:
- A value

B value

C value

D correct


E value



Test keys

1. (a) B $x = 5$
- (b)
- (c) D
- (d)
- (e) C some note
- (f) B
- (g) D other note

Example 4

A “simple worksheet” using ducks :) .

1. Factor $x^2 - 2x + 1$

2. Factor $3x + 3y + 3z$

The following questions need to be cuaqtified :)

3. True False

(a) $\alpha > \delta$

(b) ~~ETX~~ze is cool?

4. Related to Linux

(a) You use linux?

(b) Usually uses the package manager?

(c) Rate the following package and class

i. `xsim-exam`

ii. `xsim`

iii. `exsheets`

The answer to 1 is $(x - 1)^2$ and the answer to 3.(a) is False.

1. (a) $(x - 1)^2$
- (b) $3(x + y + z)$
- (c) i. False
- ii. Very True!
- (d) i. Yes
- ii. Yes, dnf
- iii. A. doesn't exist for now :(
- B. very good
- C. obsolete

Example 5

Adapted from the response given by Stephen in SAT like question format .

1

Which choice best describes what happens in the passage?

- A) One character argues with another character who intrudes on her home.
- B) One character receives a surprising request from another character.
- C) One character reminisces about choices she has made over the years.
- D) One character criticizes another character for pursuing an unexpected course of action.

2

Which choice best describes what happens in the passage?

- A) One character argues with another character who intrudes on her home.
- B) One character receives a surprising request from another character.
- C) One character reminisces about choices she has made over the years.
- D) One character criticizes another character for pursuing an unexpected course of action.

3

Which choice best describes what happens in the passage?

- A) One character argues with another character who intrudes on her home.
- B) One character receives a surprising request from another character.
- C) One character reminisces about choices she has made over the years.
- D) One character criticizes another character for pursuing an unexpected course of action.

4

Which choice best describes what happens in the passage?

- A) One character argues with another character who intrudes on her home.
- B) One character receives a surprising request from another character.
- C) One character reminisces about choices she has made over the years.
- D) One character criticizes another character for pursuing an unexpected course of action.

1. (a) A) (c) B)
 (b) C) (d) D)

6 The way of non-enumerated lists

It is possible to use (or abuse) the `enumext` environment to mimic *non-enumerated* list environments such as `itemize` and `description`, clearly the `\keys` to “store answers”, the `keyans` and `keyanspic` environments lose their sense and it is not the focus of the main of this package, but, why not to do it?. Here I leave as an example other uses of the `enumext` environment that can be helpful for specific purposes. The “trick” to generate these *fake environments* is set `label={}` or `label={\some}` and play with the `list-indent`, `list-offset`, `font` and `wrap-label` keys.

Fake itemize environment

Here we set the `label` key using the default settings in \TeX for the four levels `\textbullet`, `\textendash`, `\textasteriskcentered` and `\textperiodcentered` together with the `nosep` key to reduce the vertical spaces in the left side example and set the `label` key in *mathematical mode* for the right side as `\ast`, `\diamond`, `\circ` and `\star` for the four levels together with the `nosep` key

- First level item
 - Second level item
 - * Third level item
 - Fourth level item
 - First level item
- * First level item
 - ◇ Second level item
 - Third level item
 - ★ Fourth level item
 - * First level item

Fake description environment

Here we set `label={}` and `list-indent=2.5em`, `font=\bfseries`.

- SomeThing** A short one-line description.
This is an entry *without* a label.

Something A short *one-line* description text.

Something long A much *longer* description text may take more than one line or more than one paragraph.
Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua.

If we add `list-indent=0pt` you get *widest style*:

- SomeThing** A short one-line description.
This is an entry *without* a label.

Something A short *one-line* description text.

Something long A much *longer* description text may take more than one line or more than one paragraph. Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua.

- The small space at the beginning of the “*unlabeled entry*” corresponds to `\labelsep` and can be removed using `\hspace{-\labelsep}` at the beginning of the line.

Description indented by label

Here we set `label={}` and we will give a convenient value to `labelsep` and `labelwidth`, for example we can take as reference our *longest label* and pass it as value using:

```
\newlength{\descitemwd}
\settowidth{\descitemwd}{\textbf{Something long}}
```

and then use `labelsep=4pt, labelwidth=\descitemwd, font=\bfseries`.

SomeThing A short one-line description.
This is an entry *without* a label.

Something A short one-line description.

Something long A much longer description. Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris.

The environment can be translated so that the *(labels)* are on the left margin calculating the value passed to the `list-offset` key, in this case it will be equal to the sum of the values set by the `labelwidth` and `labelsep` keys finally resulting as `list-offset={-\descitemwd - 4pt}`.

SomeThing A short one-line description.
This is an entry *without* a label.

Something A short one-line description.

Something long A much longer description. Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris.

If we add `align=right` it will look like this:

SomeThing A short one-line description.
This is an entry *without* a label.

Something A short one-line description.

Something long A much longer description. Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris.

- At this point we have used `list-offset={-\descitemwd - 4pt}` instead of `list-offset={-\labelwidth - \labelsep}`, this is because the parameters `\labelwidth` and `\labelsep` take the default values, as if we had not set `label`.

Description with multi-line labels

The `label` key does not accept *multiline material*, this is where the `wrap-label*` key comes into play. Unlike the `enumitem` package, the `align` key only supports three options, so what we will do is create a command in the style `\parleft` of `enumitem` that allows us to place *multiline labels* using `\parbox`.

```
\NewDocumentCommand \itembx { s +m }
{%
  \IfBooleanTF{#1}
  {\strut\smash{\parbox[t]{\labelwidth}{\raggedright{#2}}}}%
  {\strut\smash{\parbox[t]{\labelwidth}{\raggedleft{#2}}}}%
}
```

Now we just need to set `wrap-label*={\itembx{#1}}`.

SomeThing A short one-line description.
This is an entry *without* a label.

Something A short one-line description.

Something A much longer description. Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris.

long vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris.
Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris.

SoMeThInG A much longer description. Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris.

LoNg vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris.

Final notes

The original implementation (if you can call it that) of the ideas that led to the creation of `enumext` were some macros using the `enumerate[4]` package for personal use created in early 2003, the code was quite questionable, but functional for these simple requirements.

With the great answers given by Christian Hupfer in [Create a fake label ref using list](#) and the answer given by David Carlisle in [Change the use of label ref by data save in an array \(list\)](#) I managed to create a more solid code than the original version, now using the `l3prop`[10] and `l3seq`[10] modules together with the `hyperref`[7] and `enumitem`[5] packages, which did the job, but with some limitations.

As time went by I took these limitations as a personal challenge which I called “*reinventing the wheel*”, since there were packages and classes that did more or less what I was looking for, but did not fit my simple requirements. This “*reinventing the wheel*” finally ended up becoming `enumext`.

Why list environments?

The answer is simple, first I love the beauty of its syntax and many of what I had already written used the `enumerate` environment or lists created using the `enumitem` package. In my mind I thought: how complicated could it be to write a package that looked like `enumitem`? It seemed simple enough, of course I didn’t have in mind the mess I was getting into working with `list` environments, `minipage` and adding support for the `multicol` and `hyperref` packages.

Of course, seeing the final result of the experiment “*reinventing the wheel*” I am quite satisfied.

Why not random questions and other utilities

The “*random*” type questions I love and hate them at the same time, although they simplify a lot the work when creating a multiple choice test, but you lose the beauty of typesetting a document with \LaTeX , that is to say the output does not always look as nice as it should, even if they are only alternatives these must follow a certain order when presented either numerical or presentation, that said handling that using *nested lists* is quite complicated so I do not classify to be implemented.

7 References

- [1] HIRSCHHORN, PHILIP. “Using the exam document class”. Available from CTAN, <https://www.ctan.org/pkg/exam>, 2023.
- [2] NIEDERBERGER, CLEMENS. “xsim – eXercise Sheets IMproved”. Available from CTAN, <https://www.ctan.org/pkg/xsim>, 2023.
- [3] MITTELBACH, FRANK. “An environment for multicolumn output”. Available from CTAN, <https://www.ctan.org/pkg/multicol>, 2024.
- [4] The \LaTeX Project. “enumerate – Enumerate with redefinable labels”. Available from CTAN, <https://www.ctan.org/pkg/enumerate>, 2024.
- [5] BEZOS, JAVIER. “Customizing lists with the enumitem package”. Available from CTAN, <https://www.ctan.org/pkg/enumitem>, 2019.
- [6] BERRY, KARL. “ \LaTeX 2_ε: An Unofficial Reference Manual”. Available from CTAN, <https://ctan.org/pkg/latex2e-help-texinfo>, 2024.
- [7] The \LaTeX Project. “Extensive support for hypertext in \LaTeX ”. Available from CTAN, <https://www.ctan.org/pkg/hyperref>, 2024.
- [8] BURNOL, JEAN-FRANÇOIS. “The footnotehyper package”. Available from CTAN, <https://www.ctan.org/pkg/footnotehyper>, 2021.
- [9] The \LaTeX Project. “The expl3 package”. Available from CTAN, <https://www.ctan.org/pkg/l3kernel>, 2024.
- [10] The \LaTeX Project. “The \LaTeX 3 Interfaces”. Available from CTAN, <https://www.ctan.org/pkg/l3kernel>, 2024.
- [11] The \LaTeX Project. “The xparse package”. Available from CTAN, <https://www.ctan.org/pkg/xparse>, 2024.
- [12] GUNDLACH, PATRICK. “The lua-visual-debug package”. Available from CTAN, <https://www.ctan.org/pkg/lua-visual-debug>, 2023.
- [13] LEMVIG, MOGENS. “The shortlst package”. Available from CTAN, <https://www.ctan.org/pkg/shortlst>, 1998.
- [14] NIEDERBERGER, CLEMENS. “tasks – Horizontally columned lists”. Available from CTAN, <https://www.ctan.org/pkg/tasks>, 2022.

8 Change history

v1.0 2024-05-02 – First public release.

9 Index of Documentation

The italic numbers denote the pages where the corresponding entry is described.

C

Document class:

article 1

book 1

exam 2

letter 1

report 1

\columnbreak 4

\columnsep 9

Commands provide by enumext:

\anskey 3, 9–11

\anspic* 3, 10, 12

\anspic 12

\getkeyans 3, 10, 13

\item* 3–6, 10, 11

\item 5, 6, 9–11

\miniright 3, 4, 9

\printkeyans 3, 5, 10, 13

\setenumext 3, 5, 6, 10, 11, 13

Counters defined by enumext:

enumXiii 3

enumXii 3

enumXiv 3

enumXi 3

enumXviii 3

enumXvii 3

enumXvi 3

enumXv 3

E

Environments provide by enumext:

enumext* 3, 4

enumext 3–5, 9–11, 13, 16

keyans* 3, 4

keyanspic 3, 6, 9, 10, 12, 16

keyans 3–7, 9–12, 16

Environments:

enumerate 1–3, 5, 18

list 3, 8, 18

minipage 2–4, 9, 18

multicols 2, 4, 9

I

\item 3, 4

\itemsep 8

K

Keys for environments provide by enumext:

above* 8

above 8

after 9

align 6, 17

before* 8

before 8

below* 8

below 8

check-ans 10

columns-sep 4, 9

columns 4, 8, 9

first 9

font 6

item-pos* 5

item-sym* 5

itemindent 8

itemsep 8, 12

labelsep 3, 5, 6, 8–10, 17

labelwidth 3, 5, 6, 8–10, 17

label 6, 9, 11, 13, 16, 17

list-indent 3, 8

list-offset 3, 8, 17

listparindent 8

mark-ans 10

mark-pos 10

mark-ref 10

mini-env 4, 8, 9

mini-sep 4, 9

no-store 10

noitemsep 8

nosep 8, 16

parsep 7, 8, 12

partopsep 7

ref 4, 6

resume 9

rightmargin 8

save-ans 4, 9–13

show-ans 10

show-length 6

show-pos 10, 13

start 9

store-ref 4, 6, 10, 13

topsep 7, 8

widest 6

wrap-ans 10

wrap-label* 6, 17

wrap-label 6

L

\label 4

Labels provide by enumext:

\Alph* 6, 11

\Roman* 6

\alph* 6

\arabic* 6

\roman* 6

\labelsep 3, 6

\labelwidth 3, 6

\linewidth 9

\listparindent 8

P

Packages:

enumerate 17

enumext 1–3, 12, 17, 18

enumitem 3, 4, 8, 17, 18

footnotehyper 4

hyperref 4, 10, 18

l3prop 1, 18

l3seq 1, 18

multicol 1, 4, 18

xsim 2

\parsep 7

\partopsep 7

©2024 by Pablo González L

19 / 113

R	\rightmargin 8
\raggedcolumns 4	T
\ref 4	\topsep 7

10 Implementation

The most recent publicly released version of `enumext` is available at CTAN: <https://www.ctan.org/pkg/enumext>. While general feedback via email is welcomed, specific bugs or feature requests should be reported through the issue tracker: <https://github.com/pablgonz/enumext/issues>.

- The documentation presented here is far from professional, it contains a lot of obvious information that to the eye of a T_EXpert are superfluous, but, after so many years developing this project is the only way to remember what does what.

10.1 General conventions

Variables containing `i`, `ii`, `iii` and `iv` are associated by level with the `enumext` environment, variables containing `v` are associated with the `keyans` environment, variables containing `vi` are associated with the `keyanspic` environment, variables containing `vii` are associated with the `enumext*` environment and variables containing `viii` are associated with the `keyans*` environment.

To simplify writing and documentation some variables and functions that are common to the different levels of the environments are described using a capital “X”.

The temporary function `__enumext_tmp:n` is used in different parts of the package code for variable creation or execution of other functions that are grouped into this one.

All variables and functions defined in this package are private and are NOT intended to work or be used by another package or module.

10.2 Initial set up

Start the DocStrip guards.

```
1 (*package)
```

Identify the internal prefix (L^AT_EX3 DocStrip convention) for l3doc class.

```
2 (@@=enumext)
```

10.3 Declaration of the package

First we will make sure we have a minimum (super updated) version of L^AT_EX to work correctly.

```
3 \NeedsTeXFormat{LaTeX2e}[2023-11-01]
```

Now declare the `enumext` package.

```
4 \ProvidesExplPackage
5   {enumext}
6   {2024-05-02}
7   {1.0}
8   {Enumerate exercise sheets}
```

Finally check if the `multicol` package is loaded, if not we load it.

```
9 \hook_gput_code:nnn {begindocument} {enumext}
10 {
11   \IfPackageLoadedTF { multicol }
12   {
13     \msg_info:nnn { enumext } { package-load } { multicol }
14   }
15   {
16     \msg_info:nnn { enumext } { package-not-load } { multicol }
17     \RequirePackage{multicol}[2023-03-30]
18   }
19 }
```

10.4 Definition of variables

Variables that do not appear in this section are created by means of `\keys_define:nn` or some function described below.

Integer variables will control the nesting levels of the environments and boolean variables will be used to determine if they are present (nested) in each other. The boolean variables `\g__enumext_starred_bool` and `\g__enumext_standar_bool` will be set to “true” when the `enumext` and `enumext*` environments are not nested with each other.

```
20 \int_new:N \__enumext_level_int
21 \int_new:N \__enumext_level_h_int
22 \int_new:N \__enumext_keyans_level_int
23 \int_new:N \__enumext_keyans_level_h_int
24 \int_new:N \__enumext_keyans_pic_level_int
25 \bool_new:N \__enumext_starred_bool
26 \bool_new:N \g__enumext_starred_bool
```

```

27 \bool_new:N \l__enumext_standar_bool
28 \bool_new:N \g__enumext_standar_bool
29 \bool_new:N \l__enumext_keyans_env_bool

```

(End of definition for `\l__enumext_level_int` and others.)

```

\l__enumext_counter_i_tl
\l__enumext_counter_ii_tl
\l__enumext_counter_iii_tl
\l__enumext_counter_iv_tl
\l__enumext_counter_v_tl
\l__enumext_counter_vi_tl
\l__enumext_counter_vii_tl
\l__enumext_counter_viii_tl

```

Variables to store the “*name of the counters*” `enumXi`, `enumXii`, `enumXiii` and `enumXiv` for `enumext` environment, `enumXv` for `keyans` environment and `enumXvi` for the `keyanspic` environment.

The counters `enumXvii` and `enumXviii` are used by `enumext*` and `keyans*` environments.

The initial values of these variables are set by the function `__enumext_define_counters:Nn` and then modified by the function `__enumext_label_style:Nnn` used by `label` key (§10.8).

```

30 \cs_set_protected:Npn \__enumext_tmp:n #1
31 {
32   \tl_new:c { l__enumext_counter_#1_tl }
33 }
34 \clist_map_inline:nn { i, ii, iii, iv, v, vi, vii, viii } { \__enumext_tmp:n {#1} }

```

(End of definition for `\l__enumext_counter_i_tl` and others.)

```

\l__enumext_resume_bool
\g__enumext_resume_int
\l__enumext_resume_vii_bool
\g__enumext_resume_vii_int
\g__enumext_item_symbol_tl

```

The boolean variable `\l__enumext_resume_bool` is used by `resume` key, the value from which the environment’s will start is stored in the integer variable `\g__enumext_resume_int` (§10.21). The global token list `\g__enumext_item_symbol_tl` is used by `item-sym*` key (§10.26).

```

35 \bool_new:N \l__enumext_resume_bool
36 \int_new:N \g__enumext_resume_int
37 \bool_new:N \l__enumext_resume_vii_bool
38 \int_new:N \g__enumext_resume_vii_int
39 \tl_new:N \g__enumext_item_symbol_tl

```

(End of definition for `\l__enumext_resume_bool` and others.)

```

\l__enumext_current_widest_dim
\g__enumext_counter_styles_tl
\g__enumext_widest_label_tl
\l__enumext_label_width_by_box

```

The variable `\l__enumext_current_widest_dim` stores the current label width, the variable `\g__enumext_counter_styles_tl` stores the default *⟨label style⟩* and the variable `\g__enumext_widest_label_tl` the label width. These variables are used by `widest` (§10.12) and `label` (§10.10) keys.

```

40 \dim_new:N \l__enumext_current_widest_dim
41 \tl_new:N \g__enumext_counter_styles_tl
42 \tl_new:N \g__enumext_widest_label_tl
43 \box_new:N \l__enumext_label_width_by_box

```

(End of definition for `\l__enumext_current_widest_dim` and others.)

```

\l__enumext_leftmargin_tmp_X_bool
\l__enumext_leftmargin_tmp_X_dim
\l__enumext_leftmargin_X_dim
\l__enumext_itemindent_X_dim

```

The boolean variable `\l__enumext_leftmargin_tmp_X_bool` and the dimensional variable `\l__enumext_leftmargin_tmp_X_dim` are used by the `list-indent` key (§10.14).

The variables `\l__enumext_leftmargin_X_dim` and `\l__enumext_itemindent_X_dim` are used (and set) by the function `__enumext_calc_hspace:NNNNNNNNNN` (§10.30) which determines the internal values for `\leftmargin` and `\itemindent`.

```

44 \cs_set_protected:Npn \__enumext_tmp:n #1
45 {
46   \bool_new:c { l__enumext_leftmargin_tmp_#1_bool }
47   \dim_new:c { l__enumext_leftmargin_tmp_#1_dim }
48   \dim_new:c { l__enumext_leftmargin_#1_dim }
49   \dim_new:c { l__enumext_itemindent_#1_dim }
50 }
51 \clist_map_inline:nn { i, ii, iii, iv, v, vi, vii, viii } { \__enumext_tmp:n {#1} }

```

(End of definition for `\l__enumext_leftmargin_tmp_X_bool` and others.)

```

\l__enumext_multicols_above_X_skip
\l__enumext_multicols_below_X_skip

```

Internal variables used by `columns` key §10.18).

```

52 \cs_set_protected:Npn \__enumext_tmp:n #1
53 {
54   \skip_new:c { l__enumext_multicols_above_#1_skip }
55   \skip_new:c { l__enumext_multicols_below_#1_skip }
56 }
57 \clist_map_inline:nn { i, ii, iii, iv, v } { \__enumext_tmp:n {#1} }

```

(End of definition for `\l__enumext_multicols_above_X_skip` and `\l__enumext_multicols_below_X_skip`.)

```
\g__enumext_minipage_stat_int
\l__enumext_minipage_left_skip
\l__enumext_minipage_right_skip
\l__enumext_minipage_after_skip
\g__enumext_minipage_right_skip
\g__enumext_minipage_after_skip
\l__enumext_minipage_left_X_dim
\l__enumext_minipage_active_X_bool
```

Internal variables used by `\miniright` command (§10.19.4) and the keys `miniright`, `miniright*`, `mini-env` and `mini-sep` (§10.17, §10.19).

```
58 \int_new:N \g__enumext_minipage_stat_int
59 \skip_new:N \l__enumext_minipage_left_skip
60 \skip_new:N \l__enumext_minipage_right_skip
61 \skip_new:N \l__enumext_minipage_after_skip
62 \skip_new:N \g__enumext_minipage_right_skip
63 \skip_new:N \g__enumext_minipage_after_skip
64 \cs_set_protected:Npn \__enumext_tmp:n #1
65 {
66   \dim_new:c { \l__enumext_minipage_left_#1_dim }
67   \bool_new:c { \l__enumext_minipage_active_#1_bool }
68 }
69 \clist_map_inline:nn { i, ii, iii, iv, v, vii, viii } { \__enumext_tmp:n {#1} }
```

(End of definition for `\g__enumext_minipage_stat_int` and others.)

```
\l__enumext_wrap_label_X_bool
\l__enumext_wrap_label_opt_X_bool
\l__enumext_start_X_int
\l__enumext_fake_item_indent_X_tl
\l__enumext_label_fill_left_X_tl
\l__enumext_label_fill_right_X_tl
\l__enumext_vspace_a_star_X_bool
\l__enumext_vspace_b_star_X_bool
```

The integer variable `\l__enumext_start_X_int` are used by the `start` key (§10.12), the token list `\l__enumext_fake_item_indent_X_tl` is used by `itemindent` key, the variables `\l__enumext_label_fill_left_X_tl` and `\l__enumext_label_fill_right_X_tl` are used by the `align` key (§10.10). The boolean vars `\l__enumext_vspace_a_star_X_bool`, `\l__enumext_vspace_b_star_X_bool` are used by `above`, `above*`, `below` and `below*` keys

```
70 \cs_set_protected:Npn \__enumext_tmp:n #1
71 {
72   \bool_new:c { \l__enumext_wrap_label_#1_bool }
73   \bool_new:c { \l__enumext_wrap_label_opt_#1_bool }
74   \int_new:c { \l__enumext_start_#1_int }
75   \tl_new:c { \l__enumext_fake_item_indent_#1_tl }
76   \tl_new:c { \l__enumext_label_fill_left_#1_tl }
77   \tl_new:c { \l__enumext_label_fill_right_#1_tl }
78   \bool_new:c { \l__enumext_vspace_a_star_#1_bool }
79   \bool_new:c { \l__enumext_vspace_b_star_#1_bool }
80 }
81 \clist_map_inline:nn { i, ii, iii, iv, v, vii, viii } { \__enumext_tmp:n {#1} }
```

(End of definition for `\l__enumext_wrap_label_X_bool` and others.)

```
\l__enumext_store_active_bool
\l__enumext_store_name_tl
\g__enumext_store_name_tl
\l__enumext_store_anskey_arg_tl
\l__enumext_store_columns_join_int
\l__enumext_store_keyans_label_tl
\l__enumext_keyans_tmpa_tl
\l__enumext_keyans_tmppb_tl
\l__enumext_keyans_tmpa_dim
```

The boolean variable `\l__enumext_store_active_bool` setting by `save-ans` key (§10.21) activates all the mechanism related to `\anskey`, `keyans`, `keyans*` and `keyanspic`.

The variable `\l__enumext_store_name_tl` sets the name for the storage in *sequence* and *prop list*, the variable `\g__enumext_store_name_tl` is just a copy of the storage name used by the `check-ans` key (§10.21).

The variable `\l__enumext_store_anskey_arg_tl` stores the contents of `\anskey` (§10.24) and the variable `\l__enumext_store_keyans_label_tl` stores the contents of `\item*` (§10.28.2) for the `keyans` and `keyans*` environments and the contents of `\anspic*` (§10.34.1) for the `keyanspic` environment.

The variable `\l__enumext_keyans_tmpa_tl` is a temporary variable used by `keyans` and `keyanspic` at various points.

```
82 \bool_new:N \l__enumext_store_active_bool
83 \tl_new:N \l__enumext_store_name_tl
84 \tl_new:N \g__enumext_store_name_tl
85 \tl_new:N \l__enumext_store_anskey_arg_tl
86 \int_new:N \l__enumext_store_columns_join_int
87 \tl_new:N \l__enumext_store_keyans_label_tl
88 \tl_new:N \l__enumext_keyans_tmpa_tl
89 \tl_new:N \l__enumext_keyans_tmppb_tl
90 \dim_new:N \l__enumext_keyans_tmpa_dim
```

(End of definition for `\l__enumext_store_active_bool` and others.)

```
\l__enumext_setkey_tmpa_tl
\l__enumext_setkey_tmppb_tl
\l__enumext_setkey_tmpa_int
\l__enumext_setkey_tmpa_seq
\l__enumext_setkey_tmppb_seq
```

Internal variables used by the command `\setenumext` (§10.39).

```
91 \tl_new:N \l__enumext_setkey_tmpa_tl
92 \tl_new:N \l__enumext_setkey_tmppb_tl
93 \int_new:N \l__enumext_setkey_tmpa_int
94 \seq_new:N \l__enumext_setkey_tmpa_seq
95 \seq_new:N \l__enumext_setkey_tmppb_seq
```

(End of definition for `\l__enumext_setkey_tmpa_tl` and others.)

```
\l__enumext_store_opt_X_tl
\l__enumext_print_keyans_X_tl
\l__enumext_store_columns_X_bool
\l__enumext_store_columns_X_int
\l__enumext_store_columns_sep_X_bool
\l__enumext_store_columns_sep_X_dim
\l__enumext_store_upper_level_X_bool
```

Internal variables used by [$\langle key = val \rangle$] in `enumext` and `enumext*` environment, the command `\printkeyans` (§10.38) and the keys `columns*` and `columns-sep*`.

```
96 \cs_set_protected:Npn \l__enumext_tmp:n #1
97 {
98   \tl_new:c { \l__enumext_store_opt_#1_tl }
99   \tl_new:c { \l__enumext_print_keyans_#1_tl }
100  \bool_new:c { \l__enumext_store_columns_#1_bool }
101  \int_new:c { \l__enumext_store_columns_#1_int }
102  \bool_new:c { \l__enumext_store_columns_sep_#1_bool }
103  \dim_new:c { \l__enumext_store_columns_sep_#1_dim }
104  \bool_new:c { \l__enumext_store_upper_level_#1_bool }
105 }
106 \clist_map_inline:nn { i, ii, iii, iv, vii } { \l__enumext_tmp:n {#1} }
```

(End of definition for `\l__enumext_store_opt_X_tl` and others.)

```
\l__enumext_show_answer_bool
\l__enumext_show_position_bool
\l__enumext_mark_ref_sym_tl
\l__enumext_mark_answer_sym_tl
\l__enumext_mark_position_str
```

Internal variables for “storage system” mechanism used by `\anskey` (§10.24), `keyans` and `keyanspic` environments. These variables are used by `show-ans`, `show-pos`, `mark-ans`, `save-key` and `mark-ref` keys (§10.23).

```
107 \bool_new:N \l__enumext_show_answer_bool
108 \bool_new:N \l__enumext_show_position_bool
109 \tl_new:N \l__enumext_mark_ref_sym_tl
110 \tl_new:N \l__enumext_mark_answer_sym_tl
111 \str_new:N \l__enumext_mark_position_str
```

(End of definition for `\l__enumext_show_answer_bool` and others.)

```
\l__enumext_keyans_pic_body_seq
\l__enumext_keyans_pic_width_dim
\l__enumext_keyans_pic_above_int
\l__enumext_keyans_pic_below_int
\l__enumext_keyans_pic_above_skip
```

Internal variables used by `keyanspic` environment (§10.34.2).

```
112 \seq_new:N \l__enumext_keyans_pic_body_seq
113 \dim_new:N \l__enumext_keyans_pic_width_dim
114 \int_new:N \l__enumext_keyans_pic_above_int
115 \int_new:N \l__enumext_keyans_pic_below_int
116 \skip_new:N \l__enumext_keyans_pic_above_skip
```

(End of definition for `\l__enumext_keyans_pic_body_seq` and others.)

```
\l__enumext_store_ans_bool
\l__enumext_check_ans_bool
\g__enumext_check_ans_show_bool
\g__enumext_check_ans_show_h_bool
\g__enumext_check_ans_item_tl
\l__enumext_compare_items_ans_int
\g__enumext_count_item_with_ans_int
\g__enumext_count_item_all_int
\g__enumext_count_level_X_int
\g__enumext_count_item_X_int
```

Internal variables used by “check answer” mechanism (§10.22.1) controlled by the `check-ans` and `no-store` keys.

```
117 \bool_new:N \l__enumext_store_ans_bool
118 \bool_new:N \l__enumext_check_ans_bool
119 \bool_new:N \g__enumext_check_ans_show_bool
120 \bool_new:N \g__enumext_check_ans_show_h_bool
121 \tl_new:N \g__enumext_check_ans_item_tl
122 \int_new:N \l__enumext_compare_items_ans_int
123 \int_new:N \g__enumext_count_item_with_ans_int
124 \int_new:N \g__enumext_count_item_all_int
125 \int_new:N \g__enumext_count_item_anskey_int
126 \int_new:N \g__enumext_count_item_number_int
127 \cs_set_protected:Npn \l__enumext_tmp:n #1
128 {
129   \int_new:c { \g__enumext_count_level_#1_int }
130   \int_new:c { \g__enumext_count_item_#1_int }
131 }
132 \clist_map_inline:nn { i, ii, iii, iv, vii } { \l__enumext_tmp:n {#1} }
```

(End of definition for `\l__enumext_store_ans_bool` and others.)

```
\l__enumext_hyperref_bool
\l__enumext_footnotes_key_bool
```

The boolean variable `\l__enumext_hyperref_bool` will determine if the `hyperref` package is present or load in memory (§10.7). The boolean variable `\l__enumext_footnotes_key_bool` determine if `hyperref` is load with key `hyperfootnotes=true`.

```
133 \bool_new:N \l__enumext_hyperref_bool
134 \bool_new:N \l__enumext_footnotes_key_bool
```

(End of definition for `\l__enumext_hyperref_bool` and `\l__enumext_footnotes_key_bool`.)

```

\l__enumext_newlabel_arg_one_tl
\l__enumext_newlabel_arg_two_tl
\l__enumext_store_write_aux_file_tl
\l__enumext_label_copy_X_tl

```

Internal variables are used when executing the `store-ref` key. The variables `\l__enumext_label_copy_X_tl` correspond to temporary copies of the labels defined by level on which operations will be performed.

The variables `\l__enumext_newlabel_arg_one_tl` and `\l__enumext_newlabel_arg_two_tl` will be used to form the arguments passed to the function `__enumext_newlabel:nn` and the variable `\l__enumext_store_write_aux_file_tl` will be in charge of executing the writing code in the `.aux` file.

```

135 \tl_new:N \l__enumext_newlabel_arg_one_tl
136 \tl_new:N \l__enumext_newlabel_arg_two_tl
137 \tl_new:N \l__enumext_store_write_aux_file_tl
138 \cs_set_protected:Npn \__enumext_tmp:n #1
139 {
140   \tl_new:c { \l__enumext_label_copy_#1_tl }
141 }
142 \clist_map_inline:nn { i, ii, iii, iv, v, vi, vii, viii } { \__enumext_tmp:n {#1} }

```

(End of definition for `\l__enumext_newlabel_arg_one_tl` and others.)

```

\g__enumext_footnote_int
\g__enumext_footnote_arg_seq
\g__enumext_footnote_int_seq

```

Internal variables used for redefinition of `\footnote`.

```

143 \int_new:N \g__enumext_footnote_int
144 \seq_new:N \g__enumext_footnote_arg_seq
145 \seq_new:N \g__enumext_footnote_int_seq

```

(End of definition for `\g__enumext_footnote_int`, `\g__enumext_footnote_arg_seq`, and `\g__enumext_footnote_int_seq`.)

```

\c__enumext_counter_style_tl
\l__enumext_ref_key_arg_tl
\l__enumext_ref_aux_tl
\l__enumext_the_counter_X_tl
\l__enumext_counter_style_for_ref_X_tl

```

Internal variables used by `ref` key (§10.17, §10.18).

```

146 \tl_const:Nn \c__enumext_counter_style_tl
147 { { arabic } { roman } { Roman } { alph } { Alph } }
148 \tl_new:N \l__enumext_ref_key_arg_tl
149 \tl_new:N \l__enumext_ref_aux_tl
150 \cs_set_protected:Npn \__enumext_tmp:n #1
151 {
152   \tl_new:c { \l__enumext_counter_style_for_ref_#1_tl }
153   \tl_new:c { \l__enumext_the_counter_#1_tl }
154   \tl_set:ce { \l__enumext_the_counter_#1_tl } { \exp_not:c { theenumX#1 } }
155 }
156 \clist_map_inline:nn { i, ii, iii, iv, v, vi, vii, viii } { \__enumext_tmp:n {#1} }

```

(End of definition for `\c__enumext_counter_style_tl` and others.)

```

\l__enumext_item_starred_X_bool
\l__enumext_item_column_pos_X_int
\g__enumext_item_count_all_X_int
\l__enumext_joined_item_X_int
\l__enumext_joined_item_aux_X_int
\l__enumext_tmpa_X_int
\l__enumext_item_text_X_box
\l__enumext_joined_width_X_dim
\l__enumext_item_width_X_dim
\g__enumext_item_symbol_aux_X_tl
\l__enumext_align_label_X_str
\g__enumext_minipage_active_X_bool
\g__enumext_miniright_code_X_tl
\g__enumext_minipage_center_X_bool
\g__enumext_minipage_right_X_dim
\g__enumext_minipage_right_X_skip

```

Internal variables used by `enumext*` and `keyans*` environments.

```

157 \cs_set_protected:Npn \__enumext_tmp:n #1
158 {
159   \bool_new:c { \l__enumext_item_starred_#1_bool }
160   \int_new:c { \l__enumext_item_column_pos_#1_int }
161   \int_new:c { \g__enumext_item_count_all_#1_int }
162   \int_new:c { \l__enumext_joined_item_#1_int }
163   \int_new:c { \l__enumext_joined_item_aux_#1_int }
164   \int_new:c { \l__enumext_tmpa_#1_int }
165   \box_new:c { \l__enumext_item_text_#1_box }
166   \dim_new:c { \l__enumext_joined_width_#1_dim }
167   \dim_new:c { \l__enumext_item_width_#1_dim }
168   \tl_new:c { \g__enumext_item_symbol_aux_#1_tl }
169   \str_new:c { \l__enumext_align_label_#1_str }
170   \bool_new:c { \g__enumext_minipage_active_#1_bool }
171   \tl_new:c { \g__enumext_miniright_code_#1_tl }
172   \bool_new:c { \g__enumext_minipage_center_#1_bool }
173   \dim_new:c { \g__enumext_minipage_right_#1_dim }
174   \skip_new:c { \g__enumext_minipage_right_#1_skip }
175 }
176 \clist_map_inline:nn { vii, viii } { \__enumext_tmp:n {#1} }

```

(End of definition for `\l__enumext_item_starred_X_bool` and others.)

```

\c__enumext_all_envs_clist

```

An internal `clist-var` variable to run with `__enumext_tmp:n`.

```

177 \clist_const:Nn \c__enumext_all_envs_clist
178 {
179   {level-1}{i}, {level-2}{ii}, {level-3}{iii}, {level-4}{iv},
180   {keyans}{v}, {enumext*}{vii}, {keyans*}{viii}
181 }

```

(End of definition for `\c__enumext_all_envs_clist`.)

10.5 Some utility functions

`__enumext_at_begin_document:n`

A internal “hook” function used for copying plain `list` and `minipage` environments definition and `hyperref` detection.

```
182 \cs_new_protected:Npn \__enumext_at_begin_document:n #1
183 {
184   \hook_gput_code:nnn {begindocument} {enumext} { #1 }
185 }
```

(End of definition for `__enumext_at_begin_document:n`.)

`__enumext_after_env:nn`

A internal “hook” function for execute code `minirigth` and `minirigth*` keys outside the `enumext*` and `keyans*` environments and print check-ans outside the `enumext` and `enumext*` environments.

```
186 \cs_new_protected:Npn \__enumext_after_env:nn #1 #2
187 {
188   \hook_gput_code:nnn {env/#1/after} {enumext} {#2}
189 }
```

(End of definition for `__enumext_after_env:nn`.)

`__enumext_level:`

Function for check current level in `enumext`.

```
190 \cs_new:Nn \__enumext_level:
191 {
192   \int_to_roman:n { \__enumext_level_int }
193 }
```

(End of definition for `__enumext_level:.`)

`__enumext_level_set:n`

Function for set level in `enumext*`, `keyans*` and `keyans`.

`__enumext_level_end:n`

```
194 \cs_new:Npn \__enumext_level_set:n #1
195 {
196   \cs_set_eq:cN { \__enumext_level_#1: } \__enumext_level:
197   \cs_set:Nn \__enumext_level: { #1 }
198 }
199 \cs_new:Npn \__enumext_level_end:n #1
200 {
201   \cs_set_eq:Nc \__enumext_level: { __enumext_level_#1: }
202 }
```

(End of definition for `__enumext_level_set:n` and `__enumext_level_end:n`.)

`__enumext_if_is_int:nT`

`__enumext_if_is_int:nF`

`__enumext_if_is_int:nTF`

A conditional function to know if the variable we are passing is an integer used by `start` and `widest` keys. This function is taken directly from the answer given by Henri Menke in [How to test if an expl3 function argument is an integer expression?](#).

```
203 \prg_new_protected_conditional:Npnn \__enumext_if_is_int:n #1 { T, F, TF }
204 {
205   \regex_match:nnTF { ^[\+|-]?[\d]+$ } {#1} % $
206   { \prg_return_true: }
207   { \prg_return_false: }
208 }
```

(End of definition for `__enumext_if_is_int:nT`, `__enumext_if_is_int:nF`, and `__enumext_if_is_int:nTF`.)

`__enumext_show_length:nnn`

Internal function used by `show-length` key to show “all lengths” calculated and use in `enumext`, `enumext*`, `keyans` and `keyans*` environments.

```
209 \cs_new:Npn \__enumext_show_length:nnn #1 #2 #3
210 {
211   * ~ #2
212   \prg_replicate:nn { 14 - \str_count:n {#2} } { ~ }
213   = ~ \use:c { #1_use:c } { \__enumext_#2_#3_#1 } \\
214 }
```

(End of definition for `__enumext_show_length:nnn`.)

`__enumext_zero_count_level:`

Internal function used by `check-ans` key.

```
215 \cs_set_protected:Nn \__enumext_zero_count_level:
216 {
217   \cs_set_protected:Npn \__enumext_tmp:n ##1
218   {
219     \int_gzero:c { g__enumext_count_level_##1_int }
220   }
221   \clist_map_inline:nn { i, ii, iii, iv, vii } { \__enumext_tmp:n {##1} }
222 }
```

(End of definition for `__enumext_zero_count_level:.`)

10.6 Copying list and minipage environments

The `list` environment provided by \LaTeX has the following plain form:

```
\list{⟨arg one⟩}{⟨arg two⟩}
  \item[⟨opt⟩]
\endlist
```

As a precaution we copy them using `__enumext_at_begin_document:n` in case any package redefines the `list` environment or a related command.

```
\__enumext_start_list:nn
  \__enumext_stop_list:
  \__enumext_item_std:w
```

The functions `__enumext_start_list:nn`, `__enumext_stop_list:` and `__enumext_item_std:w` correspond to copies of `\list`, `\endlist` and `\item` from plain definition of `list` environment.

```
223 \__enumext_at_begin_document:n
224 {
225   \cs_new_eq:NN \__enumext_start_list:nn \list
226   \cs_new_eq:NN \__enumext_stop_list: \endlist
227   \cs_new_eq:NN \__enumext_item_std:w \item
228 }
```

(End of definition for `__enumext_start_list:nn`, `__enumext_stop_list:`, and `__enumext_item_std:w`.)

The `minipage` environment provided by \LaTeX has the following (simplified) plain form:

```
\minipage[⟨pos⟩][⟨height⟩][⟨inner-pos⟩]{⟨width⟩}
  ⟨internal implement⟩
\endminipage
```

As a precaution we copy them using `__enumext_at_begin_document:n` in case any package redefines the `minipage` environment or a related command.

```
\__enumext_minipage:w
\__enumext_endminipage:
```

The functions `__enumext_minipage:w`, `__enumext_endminipage:` and correspond to copies of `\minipage`, `\endminipage` from plain definition of `minipage` environment.

```
229 \__enumext_at_begin_document:n
230 {
231   \cs_new_eq:NN \__enumext_minipage:w \minipage
232   \cs_new_eq:NN \__enumext_endminipage: \endminipage
233 }
```

(End of definition for `__enumext_minipage:w` and `__enumext_endminipage:.`)

10.7 Compatibility with hyperref and footnotehyper

First we define the necessary rules using “hooks” to determine if the `hyperref` package is loaded.

```
234 \hook_gput_code:nnn { begindocument } { enumext } { \__enumext_after_hyperref: }
235 \hook_gset_rule:nnnn { begindocument } { enumext } { after } { hyperref }
```

```
\__enumext_after_hyperref:
\__enumext_hypertarget:nn
\__enumext_phantomsection:
```

The function `__enumext_after_hyperref:` sets the state of the boolean variable `\l__enumext_hyperref_bool` to “true” if the package is loaded. At this point we will use the public macro `\IfHyperBoolean` to determine if the `hyperfootnotes=true` key is present, if so, we set the state of the boolean variable `__enumext_footnotes_key_bool` to “true”.

```
236 \cs_new_protected:Nn \__enumext_after_hyperref:
237 {
238   \IfPackageLoadedTF { hyperref }
239   {
240     \msg_info:nnn { enumext } { package-load } { hyperref }
241     \bool_set_true:N \l__enumext_hyperref_bool
242     \IfHyperBoolean{hyperfootnotes}
243     {
244       \typeout{hyperfootnotes=true}
245       \bool_set_true:N \l__enumext_footnotes_key_bool
246     }
247     { \typeout{hyperfootnotes=false} }
248   }
249   { }
```

If the state of the variable `\l__enumext_footnotes_key_bool` is true we will check if the package `footnotehyper` is loaded, in case it is not present, we will set the value of `\l__enumext_footnotes_key_bool` to false and we will redefine `\footnote`.

```
250 \bool_if:NT \l__enumext_footnotes_key_bool
251 {
252   \IfPackageLoadedTF { footnotehyper }
253   {
```

```

254         \msg_info:nnn { enumext } { package-load } { footnotehyper }
255     }
256     {
257         \typeout{No ~ footnotehyper ~ load}
258         \typeout{Load ~ and ~ use ~ \string\makesavenoteenv{enumext*}}
259         \bool_set_false:N \l__enumext_footnotes_key_bool
260     }
261 }

```

The functions `__enumext_hypertarget:nn` and `__enumext_phantomsection:` correspond to the internal copies of `\hypertarget` and `\phantomsection`. If the boolean variable `\l__enumext_hyperref_bool` is false the functions `__enumext_hypertarget:nn` and `__enumext_phantomsection:` will be disabled.

```

262     \bool_if:NTF \l__enumext_hyperref_bool
263     {
264         \cs_new_eq:NN \__enumext_hypertarget:nn \hypertarget
265         \cs_new_eq:NN \__enumext_phantomsection: \phantomsection
266     }
267     {
268         \cs_new_eq:NN \__enumext_hypertarget:nn \use_none:nn
269         \cs_new_eq:NN \__enumext_phantomsection: \prg_do_nothing:
270     }
271 }

```

(End of definition for `__enumext_after_hyperref:`, `__enumext_hypertarget:nn`, and `__enumext_phantomsection:`.)

`__enumext_newlabel:nn`

The function `__enumext_newlabel:nn` write the information to the `.aux` file when using the `store-ref` key. The arguments taken by the function are:

- #1: `\l__enumext_newlabel_arg_one_tl`
- #2: `\l__enumext_newlabel_arg_two_tl`

🔗 The trick here is to manage the number of arguments passed to `\newlabel{#1}{#2}` according to the presence of the `hyperref` package.

```

272 \cs_new_protected:Npn \__enumext_newlabel:nn #1 #2
273 {
274     \protected@write \@auxout { }
275     {
276         \token_to_str:N \newlabel {#1}
277         {
278             {#2}
279             \bool_if:NT \l__enumext_hyperref_bool
280             { { \thepage } {#2} {#1} }
281             { }
282         }
283     }
284     \__enumext_hypertarget:nn {#1} { }
285     \__enumext_phantomsection:
286 }

```

(End of definition for `__enumext_newlabel:nn`.)

10.8 Definition of counters

`__enumext_define_counters:Nn`

`__enumext_define_counters:cn`

To create the necessary “counters” we must first make sure that they are not already defined by the user or a package such as `enumitem`, otherwise a error will be returned and the package loading will be aborted. The arguments taken by the function are:

- #1: A token list `\l__enumext_counter_X_tl` for “store” the counter’s name.
- #2: The counter’s name.

```

287 \cs_new_protected:Npn \__enumext_define_counters:Nn #1 #2
288 {
289     \cs_if_exist:cTF { c@ #2 }
290     { \msg_fatal:nnn { enumext } { counters } { #2 } }
291     {
292         \tl_set:Nn #1 { #2 }
293         \newcounter { #2 }
294     }
295 }

```

(End of definition for `__enumext_define_counters:Nn`.)

enumXi The counters created here are enumXi, enumXii, enumXiii and enumXiv for enumext environment,
enumXii enumXv for keyans environment, enumXvi for keyanspic environment, enumXvii for enumext* and
enumXiii enumXviii for the keyans* environments.

```
enumXiv 296 \__enumext_define_counters:Nn \__enumext_counter_i_tl { enumXi }
enumXv 297 \__enumext_define_counters:Nn \__enumext_counter_ii_tl { enumXii }
enumXvi 298 \__enumext_define_counters:Nn \__enumext_counter_iii_tl { enumXiii }
enumXvii 299 \__enumext_define_counters:Nn \__enumext_counter_iv_tl { enumXiv }
enumXviii 300 \__enumext_define_counters:Nn \__enumext_counter_v_tl { enumXv }
301 \__enumext_define_counters:Nn \__enumext_counter_vi_tl { enumXvi }
302 \__enumext_define_counters:Nn \__enumext_counter_vii_tl { enumXvii }
303 \__enumext_define_counters:Nn \__enumext_counter_viii_tl { enumXviii }
```

(End of definition for enumXi and others.)

10.9 Definition of labels

This part of the code is inspired by the `enumitem` package. The idea is to be able to access the counters using `\arabic*`, `\Alph*`, `\alph*`, `\Roman*` and `\roman*` to use them in the `label` key.

__enumext_register_counter_style:Nn

These *⟨counters⟩* will be used as default *⟨labels⟩* if the `label` key is not used for the different levels of the `enumext` environment and the `keyans` environment, so it is necessary to get a default value for `labelwidth` from these *⟨labels⟩* at the same time.

```
304 \cs_new_protected:Npn \__enumext_register_counter_style:Nn #1 #2
305 {
306   \tl_const:cn { c__enumext_widest_ \cs_to_str:N #1 _tl } {#2}
307   \tl_gput_right:Nn \g__enumext_counter_styles_tl {#1}
308 }
309 \__enumext_register_counter_style:Nn \arabic { 0 }
310 \__enumext_register_counter_style:Nn \Alph { M }
311 \__enumext_register_counter_style:Nn \alph { m }
312 \__enumext_register_counter_style:Nn \Roman { VIII }
313 \__enumext_register_counter_style:Nn \roman { viii }
```

(End of definition for __enumext_register_counter_style:Nn.)

__enumext_label_width_by_box:Nn

__enumext_label_width_by_box:cv

The function `__enumext_label_width_by_box:Nn` set the default `\labelwidth` using a box width if no `labelwidth` key is passed.

```
314 \cs_new_protected:Npn \__enumext_label_width_by_box:Nn #1 #2
315 {
316   \hbox_set:Nn \l__enumext_label_width_by_box {#2}
317   \dim_set:Nn #1 { \box_wd:N \l__enumext_label_width_by_box }
318 }
319 \cs_generate_variant:Nn \__enumext_label_width_by_box:Nn { cv }
```

(End of definition for __enumext_label_width_by_box:Nn.)

__enumext_label_style:Nnn

__enumext_label_style:cvn

The function `__enumext_label_style:Nnn` is used by the `label` key to creates the variables containing the *⟨label style⟩* and will allow to use `\arabic*`, `\Alph*`, `\alph*`, `\Roman*` and `\roman*` as arguments. It loops through the defined counter styles in `\g__enumext_counter_styles_tl` (`\arabic`, `\alph`, `\Alph`, `\roman`, and `\Roman`) for example, looking for `\roman*` and replacing that by `\roman{⟨counter⟩}`, and doing the same for the `\g__enumext_widest_label_tl` to keep both in sync.

```
320 \cs_new_protected:Npn \__enumext_label_style:Nnn #1 #2 #3
321 {
322   \tl_clear_new:N #1
323   \tl_put_right:Ne #1 { \tl_trim_spaces:n {#3} }
324   \tl_gset_eq:NN \g__enumext_widest_label_tl #1
325   \tl_map_inline:Nn \g__enumext_counter_styles_tl
326   {
327     \tl_replace_all:Nne #1 { ##1* } { \exp_not:N ##1 {#2} }
328     \tl_greplace_all:Nne \g__enumext_widest_label_tl { ##1* }
329     { \tl_use:c { c__enumext_widest_ \cs_to_str:N ##1 _tl } }
330   }
331   \__enumext_label_width_by_box:Nn \l__enumext_current_widest_dim
332   { \tl_use:N \g__enumext_widest_label_tl }
333   \tl_set_eq:cN { the #2 } #1
334 }
335 \cs_generate_variant:Nn \__enumext_label_style:Nnn { cvn }
```

(End of definition for __enumext_label_style:Nnn.)

10.10 Setting keys associated with label

font Definition of keys `font`, `labelsep`, `labelwidth`, `wrap-label` and `wrap-label*` keys for `enumext` and `keyans` environments.

```

336 \cs_set_protected:Npn \__enumext_tmp:nn #1 #2
337 {
338   \keys_define:nn { enumext / #1 }
339   {
340     font .tl_set:c = { l__enumext_label_font_style_#2_tl },
341     font .value_required:n = true,
342     labelsep .dim_set:c = { l__enumext_labelsep_#2_dim },
343     labelsep .initial:n = {0.3333em},
344     labelsep .value_required:n = true,
345     labelwidth .dim_set:c = { l__enumext_labelwidth_#2_dim },
346     labelwidth .value_required:n = true,
347     wrap-label .cs_set_protected:cp = { __enumext_wrapper_label_#2:n } ##1,
348     wrap-label .initial:n = {##1},
349     wrap-label .value_required:n = true,
350     wrap-label* .code:n = {
351       \bool_set_true:c { l__enumext_wrap_label_opt_#2_bool }
352       \keys_set:nn { enumext / #1 } { wrap-label = {##1} }
353     },
354     wrap-label* .value_required:n = true,
355   }
356 }
357 \clist_map_inline:Nn \c__enumext_all_envs_clist { \__enumext_tmp:nn #1 }

```

(End of definition for `font` and others.)

- In this point, the following are set `__enumext_wrapper_label_X:n` which will be used by `__enumext_make_label`: for the different levels of the `enumext` environment and is set to `__enumext_wrapper_label_v:n` which will be used by `__enumext_keyans_make_label`: for `keyans` and `keyanspic` environments.

`align` The `align` key is implemented differently for “starred” and “non starred” environments.

```

358 \cs_set_protected:Npn \__enumext_tmp:nn #1 #2
359 {
360   \keys_define:nn { enumext / #1 }
361   {
362     align .choice:,
363     align / left .code:n =
364       {
365         \tl_clear:c { l__enumext_label_fill_left_#2_tl }
366         \tl_set:cn { l__enumext_label_fill_right_#2_tl } { \hfill }
367       },
368     align / right .code:n =
369       {
370         \tl_set:cn { l__enumext_label_fill_left_#2_tl } { \hfill }
371         \tl_clear:c { l__enumext_label_fill_right_#2_tl }
372       },
373     align / center .code:n =
374       {
375         \tl_set:cn { l__enumext_label_fill_left_#2_tl } { \hfill }
376         \tl_set:cn { l__enumext_label_fill_right_#2_tl } { \hfill }
377       },
378     align .initial:n = left,
379     align .value_required:n = true,
380   }
381 }
382 \clist_map_inline:nn
383 {
384   {level-1}{i}, {level-2}{ii}, {level-3}{iii}, {level-4}{iv}, {keyans}{v}
385 }
386 { \__enumext_tmp:nn #1 }

```

Definition of `align` key for `enumext*` and `keyans*` environments.

```

387 \cs_set_protected:Npn \__enumext_tmp:nn #1 #2
388 {
389   \keys_define:nn { enumext / #1 }
390   {
391     align .choice:,
392     align / left .code:n = \str_set:cn { l__enumext_align_label_#2_str } { l },
393     align / right .code:n = \str_set:cn { l__enumext_align_label_#2_str } { r },

```

```

394         align / center .code:n = \str_set:cn { \__enumext_align_label_#2_str } { c },
395         align .initial:n = left,
396         align .value_required:n = true,
397     }
398 }
399 \clist_map_inline:nn { {enumext*}{vii}, {keyans*}{viii} } { \__enumext_tmp:nn #1 }

```

(End of definition for `align`.)

10.11 Setting label and ref keys

`__enumext_regex_label_ref_key:`

The internal function `__enumext_regex_label_ref_key:` replace the `*` with the actual counter of the running level and is used by the `__enumext_set_label_ref:n` function.

It loops through the defined counter styles in `\c__enumext_counter_style_tl` and replace `*` by real command, for example, looking for `\arabic*` and replacing that by `\arabic{<counter>}` defined on the current level.

```

400 \cs_new_protected:Nn \__enumext_regex_label_ref_key:
401 {
402     \tl_map_inline:Nn \c__enumext_counter_style_tl
403     {
404         \regex_replace_once:nnN { \c{##1}\* }
405         { \c{##1}\cB{\u{\__enumext_ref_aux_tl}\cE} } \__enumext_ref_key_arg_tl
406     }
407 }

```

(End of definition for `__enumext_regex_label_ref_key:.`)

`__enumext_set_label_ref:n`

The `__enumext_set_label_ref:n` function controlled by the `ref` key is in charge of handling the customization of the reference system.

First we will set the variable `\l__enumext_the_counter_X_tl` according to the command created for *each counter*, apply the `regex` function `__enumext_regex_label_ref_key:` and then renew the command and save it in the variable `\l__enumext_counter_style_for_ref_X_tl`.

```

408 \cs_new_protected:Npn \__enumext_set_label_ref:n #1
409 {
410     \tl_set:Nn \l__enumext_ref_key_arg_tl {#1}
411     \tl_set_eq:Nc \l__enumext_ref_aux_tl { \__enumext_counter_ \__enumext_level: _tl }
412     \__enumext_regex_label_ref_key:
413     \tl_set_eq:Nc \l__enumext_ref_aux_tl { \__enumext_the_counter_ \__enumext_level: _tl }
414     \tl_put_right:ce { \__enumext_counter_style_for_ref_ \__enumext_level: _tl }
415     {
416         \exp_not:N \renewcommand { \exp_not:V \l__enumext_ref_aux_tl }
417         { \exp_not:V \l__enumext_ref_key_arg_tl }
418     }
419 }

```

(End of definition for `__enumext_set_label_ref:n`.)

`__enumext_use_key_ref:`

Finally the function `__enumext_use_key_ref:` will execute the modification for the reference system in the second argument of the environment definition `enumext`.

```

420 \cs_new_protected:Nn \__enumext_use_key_ref:
421 {
422     \tl_if_empty:cF { \__enumext_counter_style_for_ref_ \__enumext_level: _tl }
423     {
424         \tl_use:c { \__enumext_counter_style_for_ref_ \__enumext_level: _tl }
425     }
426 }

```

(End of definition for `__enumext_use_key_ref:.`)

For `enumext*` and `keyans*` environments the situation is a bit different since `hyperref` interferes here (I am not clear why), so we will define a new function to execute the task.

To handle that we will look at the nesting level of the starred environments, later I will run the constraint functions to make everything OK.

`__enumext_set_label_ref_h:n`

The `__enumext_set_label_ref_h:n` function controlled by the `ref` key is in charge of handling the customization of the reference system.

First we will set the variable `\l__enumext_the_counter_X_tl` according to the command created for *each counter*, apply the `regex` function `__enumext_regex_label_ref_key:` and then renew the command and save it in the variable `\l__enumext_counter_style_for_ref_X_tl`.

```

427 \cs_new_protected:Npn \__enumext_set_label_ref_h:n #1
428 {

```

```

429 \tl_set:Nn \l__enumext_ref_key_arg_tl {#1}
430 \int_compare:nNnTF { \l__enumext_level_h_int } = { 1 }
431 {
432   \tl_set_eq:NN \l__enumext_ref_aux_tl \l__enumext_counter_vii_tl
433   \__enumext_regex_label_ref_key:
434   \tl_set_eq:NN \l__enumext_ref_aux_tl \l__enumext_the_counter_vii_tl
435   \tl_put_right:Ne \l__enumext_counter_style_for_ref_vii_tl
436   {
437     \exp_not:N \renewcommand { \exp_not:V \l__enumext_ref_aux_tl }
438     { \exp_not:V \l__enumext_ref_key_arg_tl }
439   }
440 }
441 {
442   \tl_set_eq:NN \l__enumext_ref_aux_tl \l__enumext_counter_viii_tl
443   \__enumext_regex_label_ref_key:
444   \tl_set_eq:NN \l__enumext_ref_aux_tl \l__enumext_the_counter_viii_tl
445   \tl_put_right:Ne \l__enumext_counter_style_for_ref_viii_tl
446   {
447     \exp_not:N \renewcommand { \exp_not:V \l__enumext_ref_aux_tl }
448     { \exp_not:V \l__enumext_ref_key_arg_tl }
449   }
450 }
451 }

```

(End of definition for `__enumext_set_label_ref_h:n`.)

`__enumext_use_key_ref_h:` Finally the function `__enumext_use_key_ref_h:` will execute the modification for the reference system in the second argument of the environment definition `enumext*` and `keyans*`.

```

452 \cs_new_protected:Nn \__enumext_use_key_ref_h:
453 {
454   \int_compare:nNnTF { \l__enumext_level_h_int } = { 1 }
455   {
456     \tl_if_empty:NF \l__enumext_counter_style_for_ref_vii_tl
457     {
458       \tl_use:N \l__enumext_counter_style_for_ref_vii_tl
459     }
460   }
461   {
462     \tl_if_empty:NF \l__enumext_counter_style_for_ref_viii_tl
463     {
464       \tl_use:N \l__enumext_counter_style_for_ref_viii_tl
465     }
466   }
467 }

```

(End of definition for `__enumext_use_key_ref_h:`.)

10.11.1 Define and set label key for enumext environment

Here we set the default `<labels>` of the four levels of `enumext` environment, along with the default value for `labelwidth` key.

```

\l__enumext_label_i_tl
\l__enumext_label_ii_tl
\l__enumext_label_iii_tl
\l__enumext_label_iv_tl
468 \cs_set_protected:Npn \__enumext_tmp:nnn #1 #2 #3
469 {
470   \keys_define:nn { enumext / #1 }
471   {
472     label .code:n = {
473       \__enumext_label_style:cvn { \l__enumext_label_#2_tl }
474       { \l__enumext_counter_#2_tl } {##1}
475       \dim_set_eq:cN { \l__enumext_labelwidth_#2_dim }
476       \l__enumext_current_widest_dim
477     },
478     label .initial:n = #3,
479     label .value_required:n = true,
480     ref .code:n = \__enumext_set_label_ref:n {##1},
481     ref .value_required:n = true,
482   }
483 }
484 \__enumext_tmp:nnn { level-1 } { i } { \arabic*. }
485 \__enumext_tmp:nnn { level-2 } { ii } { (\alph*) }
486 \__enumext_tmp:nnn { level-3 } { iii } { \roman*. }
487 \__enumext_tmp:nnn { level-4 } { iv } { \Alph*. }

```

(End of definition for `label` and others.)

10.11.2 Define and set label key for enumext* and keyans* environments

Here we set the default $\langle label \rangle$ for `enumext*` and `keyans*` environments, along with the default value for `labelwidth` key.

```

label
ref
\l__enumext_label_vii_tl
\l__enumext_label_viii_tl
488 \cs_set_protected:Npn \__enumext_tmp:nnn #1 #2 #3
489 {
490   \keys_define:nn { enumext / #1 }
491   {
492     label .code:n = {
493       \__enumext_label_style:cvn { \l__enumext_label_#2_tl }
494       { \l__enumext_counter_#2_tl } {##1}
495       \dim_set_eq:cN { \l__enumext_labelwidth_#2_dim }
496       \l__enumext_current_widest_dim
497     },
498     label .initial:n = #3,
499     label .value_required:n = true,
500     ref .code:n = \__enumext_set_label_ref_h:n {##1},
501     ref .value_required:n = true,
502   }
503 }
504 \__enumext_tmp:nnn { enumext* } { vii } { \arabic*.}
505 \__enumext_tmp:nnn { keyans* } { viii } { (\Alph*) }

```

(End of definition for `label` and others.)

10.11.3 Define and set label key for keyans and keyanspic environment

Here we set the default $\langle label \rangle$ for `keyans` and `keyanspic` environment, along with the default value for `labelwidth`. The `keyanspic` environment use the same $\langle label \rangle$ as the `keyans` environment.

Define and set `label` key for `keyans` environment.

```

506 \keys_define:nn { enumext / keyans }
507 {
508   label .code:n = {
509     \__enumext_label_style:cvn { \l__enumext_label_v_tl }
510     { \l__enumext_counter_v_tl } {##1}
511     \dim_set_eq:cN { \l__enumext_labelwidth_v_dim }
512     \l__enumext_current_widest_dim
513     \__enumext_label_style:cvn { \l__enumext_label_vi_tl }
514     { \l__enumext_counter_vi_tl } {##1}
515     \dim_set_eq:cN { \l__enumext_labelwidth_v_dim }
516     \l__enumext_current_widest_dim
517   },
518   label .initial:n = (\Alph*),
519   label .value_required:n = true,
520 }

```

(End of definition for `label`, `\l__enumext_label_v_tl`, and `\l__enumext_label_vi_tl`.)

10.12 Setting start and widest keys

The function `__enumext_start_from:NNn` used by the `start` key take three arguments:

```

\__enumext_start_from:NNn
\__enumext_start_from:ccn
#1: \l__enumext_label_X_tl
#2: \l__enumext_start_X_int
#3:  $\langle integer \text{ or } string \rangle$ 

```

The first argument of this function are the “*counter style*” set by `label` key, the second argument is returned by the function, the third argument can be an $\langle integer \rangle$ or $\langle string \rangle$ of the form `\Alph`, `\alph`, `\Roman` or `\roman`. This effectively allows `start=A` or `start=1` to be used.

```

521 \cs_new_protected:Npn \__enumext_start_from:NNn #1 #2 #3
522 {
523   \__enumext_if_is_int:nTF { #3 }
524   {
525     \int_set:Nn #2 {##3}
526   }
527   {
528     \regex_match:nVT { \c{Alph} | \c{alph} } {##1}
529     { \int_set:Nn #2 { \int_from_alph:n {##3} } }
530     \regex_match:nVT { \c{Roman} | \c{roman} } {##1}
531     { \int_set:Nn #2 { \int_from_roman:n {##3} } }
532   }
533 }
534 \cs_generate_variant:Nn \__enumext_start_from:NNn { ccn }

```

(End of definition for `__enumext_start_from:NNn`.)

`__enumext_widest_from:nNNn`
`__enumext_widest_from:nccn`

The function `__enumext_widest_from:nNNn` used by the `widest` key take four arguments:

- #1: The counter associated with the environment level
- #2: `\l__enumext_label_X_tl`
- #3: `\l__enumext_labelwidth_X_dim`
- #4: $\langle integer \text{ or } string \rangle$

The second and third arguments of this function are the values set by `label` and `labelwidth` keys, the four argument can be an $\langle integer \rangle$ or $\langle string \rangle$ of the form `\Alph`, `\alph`, `\Roman` or `\roman`. The value of the four argument is set temporarily for the identified counter in this point (level), then the value is expanded into a “box” and the “width” of the “box” is returned.

```

535 \cs_new_protected:Npn \__enumext_widest_from:nNNn #1 #2 #3 #4
536 {
537   \__enumext_if_is_int:nTF {#4}
538   {
539     \setcounter{enumX#1} { #4 }
540   }
541   {
542     \regex_match:nVT { \c{Alph} | \c{alph} } {#2}
543     { \setcounter{enumX#1} { \int_from_alph:n {#4} } }
544     \regex_match:nVT { \c{Roman} | \c{roman} } {#2}
545     { \setcounter{enumX#1} { \int_from_roman:n {#4} } }
546   }
547   \__enumext_label_width_by_box:cv
548   { \l__enumext_labelwidth_#1_dim } { \l__enumext_label_#1_tl }
549 }
550 \cs_generate_variant:Nn \__enumext_widest_from:nNNn { nccn }

```

(End of definition for `__enumext_widest_from:nNNn`.)

`start`
`widest`

Now define and set `start` and `widest` keys for `enumext` and `keyans` environments.

`\l__enumext_start_X_int`

```

551 \cs_set_protected:Npn \__enumext_tmp:nn #1 #2
552 {
553   \keys_define:nn { enumext / #1 }
554   {
555     start .code:n = {
556       \__enumext_start_from:ccn
557       { \l__enumext_label_#2_tl }
558       { \l__enumext_start_#2_int } {##1}
559     },
560     start .initial:n = 1,
561     widest .code:n = {
562       \__enumext_widest_from:nccn {#2}
563       { \l__enumext_label_#2_tl }
564       { \l__enumext_labelwidth_#2_dim } {##1}
565     },
566     widest .value_required:n = true,
567     start .value_required:n = true,
568   }
569 }
570 \clist_map_inline:Nn \c__enumext_all_envs_clist { \__enumext_tmp:nn #1 }

```

(End of definition for `start`, `widest`, and `\l__enumext_start_X_int`.)

10.13 Setting keys for vertical spaces

`topsep`
`partopsep`
`parsep`
`noitemsep`
`nosep`

Define and set `topsep`, `partopsep`, `parsep`, `itemsep`, `noitemsep` and `nosep` keys for `enumext` and `keyans` environments.

```

571 \cs_set_protected:Npn \__enumext_tmp:nnnnn #1 #2 #3 #4 #5 #6
572 {
573   \keys_define:nn { enumext / #1 }
574   {
575     topsep .skip_set:c = { \l__enumext_topsep_#2_skip },
576     topsep .initial:n = {#3},
577     topsep .value_required:n = true,
578     partopsep .skip_set:c = { \l__enumext_partopsep_#2_skip },
579     partopsep .initial:n = {#4},
580     partopsep .value_required:n = true,
581     parsep .skip_set:c = { \l__enumext_parsep_#2_skip },
582     parsep .initial:n = {#5},

```

```

583     parsep      .value_required:n = true,
584     itemsep     .skip_set:c = { l__enumext_itemsep_#2_skip },
585     itemsep     .initial:n = {#6},
586     itemsep     .value_required:n = true,
587     noitemsep   .meta:n = { itemsep = 0pt, parsep = 0pt },
588     noitemsep   .value_forbidden:n = true,
589     nosepe      .meta:n = {
590                         itemsep = 0pt, parsep= 0pt,
591                         topsep = 0pt, partopsep = 0pt,
592                         },
593     nosepe      .value_forbidden:n = true,
594   }
595 }

```

Now we set the values based on standard `article` class in `10pt`.

```

596 \__enumext_tmp:nnnnnn { level-1 } { i } { 8.0pt plus 2.0pt minus 4.0pt }
597 { 2.0pt plus 1.0pt minus 1.0pt } { 4.0pt plus 2.0pt minus 1.0pt }
598 { 4.0pt plus 2.0pt minus 1.0pt }
599 \__enumext_tmp:nnnnnn { level-2 } { ii } { 4.0pt plus 2.0pt minus 1.0pt }
600 { 2.0pt plus 1.0pt minus 1.0pt } { 2.0pt plus 1.0pt minus 1.0pt }
601 { 2.0pt plus 1.0pt minus 1.0pt }
602 \__enumext_tmp:nnnnnn { level-3 } { iii } { 2.0pt plus 1.0pt minus 1.0pt }
603 { 1.0pt minus 1.0pt } { 0pt } { 2.0pt plus 1.0pt minus 1.0pt }
604 \__enumext_tmp:nnnnnn { level-4 } { iv } { 2.0pt plus 1.0pt minus 1.0pt }
605 { 1.0pt minus 1.0pt } { 0pt } { 2.0pt plus 1.0pt minus 1.0pt }
606 \__enumext_tmp:nnnnnn { keyans } { v } { 4.0pt plus 2.0pt minus 1.0pt }
607 { 2.0pt plus 1.0pt minus 1.0pt } { 2.0pt plus 1.0pt minus 1.0pt }
608 { 2.0pt plus 1.0pt minus 1.0pt }
609 \__enumext_tmp:nnnnnn { enumext* } { vii } { 8.0pt plus 2.0pt minus 4.0pt }
610 { 2.0pt plus 1.0pt minus 1.0pt } { 4.0pt plus 2.0pt minus 1.0pt }
611 { 4.0pt plus 2.0pt minus 1.0pt }
612 \__enumext_tmp:nnnnnn { keyans* } { viii } { 4.0pt plus 2.0pt minus 1.0pt }
613 { 2.0pt plus 1.0pt minus 1.0pt } { 2.0pt plus 1.0pt minus 1.0pt }
614 { 2.0pt plus 1.0pt minus 1.0pt }

```

(End of definition for `topsep` and others.)

10.14 Setting keys for horizontal spaces

Define and set `itemindent`, `rightmargin`, `listparindent`, `list-offset` and `list-indent` keys for `enumext` and `keyans` environments.

```

615 \cs_set_protected:Npn \__enumext_tmp:nn #1 #2
616 {
617   \keys_define:nn { enumext / #1 }
618   {
619     itemindent .dim_set:c = { l__enumext_fake_item_indent_#2_dim },
620     itemindent .value_required:n = true,
621     rightmargin .dim_set:c = { l__enumext_rightmargin_#2_dim },
622     rightmargin .value_required:n = true,
623     listparindent .dim_set:c = { l__enumext_listparindent_#2_dim },
624     listparindent .value_required:n = true,
625     list-offset .dim_set:c = { l__enumext_listoffset_#2_dim },
626     list-offset .value_required:n = true,
627     list-indent .code:n =
628       \bool_set_true:c { l__enumext_leftmargin_tmp_#2_bool }
629       \dim_set:cn { l__enumext_leftmargin_tmp_#2_dim } {##1},
630     list-indent .value_required:n = true,
631   }
632 }
633 \clist_map_inline:Nn \c__enumext_all_envs_clist { \__enumext_tmp:nn #1 }

```

(End of definition for `itemindent` and others.)

For `enumext*` and `keyans*` environments the situation is a bit different, the `list-indent` key behaves like the `list-offset` key.

```

634 \cs_set_protected:Npn \__enumext_tmp:n #1
635 {
636   \keys_define:nn { enumext / #1 } { list-indent .initial:n = 0pt, }
637 }
638 \clist_map_inline:nn { enumext*, keyans* } { \__enumext_tmp:n {#1} }

```

10.14.1 Functions for setting the fake itemindent

The `itemindent` key does not set the value of `\itemindent`, it only sets the value of the *horizontal space* applied using `\skip_horizontal:N`. We will store this value in the variable and only apply it when it is greater than `\opt`. Here I will need to place `\mode_leave_vertical:` and the plain TeX macro `\ignorespaces` to avoid unwanted extra space when using the `itemindent` key.

```

639 \cs_set_protected:Nn \__enumext_fake_item:
640 {
641   \dim_compare:nNnT
642     { \dim_use:c { l__enumext_fake_item_indent_ \__enumext_level: _dim } }
643     >
644     { \c_zero_dim }
645   {
646     \tl_set:ce { l__enumext_fake_item_indent_ \__enumext_level: _tl }
647     {
648       \exp_not:N \mode_leave_vertical:
649       \exp_not:n { \skip_horizontal:n }
650       { \dim_use:c { l__enumext_fake_item_indent_ \__enumext_level: _dim } }
651       \ignorespaces
652     }
653   }
654 }
655 \cs_set_protected:Nn \__enumext_keyans_fake_item:
656 {
657   \dim_compare:nNnT
658     { \l__enumext_fake_item_indent_v_dim } > { \c_zero_dim }
659     {
660       \tl_set:Nc \l__enumext_fake_item_indent_v_tl
661       {
662         \exp_not:N \mode_leave_vertical:
663         \exp_not:N \skip_horizontal:N \l__enumext_fake_item_indent_v_dim
664       }
665     }
666 }
667 \cs_set_protected:Nn \__enumext_fake_item_vii:
668 {
669   \dim_compare:nNnT
670     { \l__enumext_fake_item_indent_vii_dim } > { \c_zero_dim }
671     {
672       \tl_set:Nc \l__enumext_fake_item_indent_vii_tl
673       {
674         \exp_not:N \mode_leave_vertical:
675         \exp_not:N \skip_horizontal:N \l__enumext_fake_item_indent_vii_dim
676       }
677     }
678 }
679 \cs_set_protected:Nn \__enumext_fake_item_viii:
680 {
681   \dim_compare:nNnT
682     { \l__enumext_fake_item_indent_viii_dim } > { \c_zero_dim }
683     {
684       \tl_set:Nc \l__enumext_fake_item_indent_viii_tl
685       {
686         \exp_not:N \mode_leave_vertical:
687         \exp_not:N \skip_horizontal:N \l__enumext_fake_item_indent_viii_dim
688       }
689     }
690 }

```

(End of definition for `__enumext_fake_item:` and others.)

10.15 Setting show-length key

show-length

Define and set `show-length` key for `enumext`, `enumext*`, `keyans` and `keyans*` environments. The function sets the boolean variable `\l__enumext_show_length_X_bool` used in the definition of all environments to “true” and calls the function `__enumext_show_length:nnn` which prints all the values of the “vertical” and “horizontal” parameters calculated and used.

```

691 \cs_set_protected:Npn \__enumext_tmp:nn #1 #2
692 {
693   \keys_define:nn { enumext / #1 }
694   {
695     show-length .bool_set:c = { l__enumext_show_length_#2_bool },

```

```

696         show-length .initial:n = false,
697     }
698 }
699 \clist_map_inline:Nn \c__enumext_all_envs_clist { \__enumext_tmp:nn #1 }

```

(End of definition for `show-length`.)

10.16 Setting before, after and first keys

Define and set `before`, `before*`, `after` and `first` keys for `enumext` and `keyans` environments.

```

before
before*
after
first
700 \cs_set_protected:Npn \__enumext_tmp:nn #1 #2
701 {
702     \keys_define:nn { enumext / #1 }
703     {
704         before .tl_set:c = { l__enumext_before_no_starred_key_#2_tl },
705         before .value_required:n = true,
706         before* .tl_set:c = { l__enumext_before_starred_key_#2_tl },
707         before* .value_required:n = true,
708         after .tl_set:c = { l__enumext_after_stop_list_#2_tl },
709         after .value_required:n = true,
710         first .tl_set:c = { l__enumext_after_list_args_#2_tl },
711         first .value_required:n = true,
712     }
713 }
714 \clist_map_inline:Nn \c__enumext_all_envs_clist { \__enumext_tmp:nn #1 }

```

(End of definition for `before` and others.)

10.16.1 Functions for before, after and first keys in enumext

The function `__enumext_before_args_exec:` executes the $\{\langle code \rangle\}$ set by the `before*` key “before” the `enumext` environment is started. The $\{\langle code \rangle\}$ is executed “without” knowing any definition of the *second argument* of the list.

```

715 \cs_new_protected:Nn \__enumext_before_args_exec:
716 {
717     \tl_use:c { l__enumext_before_starred_key_ \__enumext_level: _tl }
718 }

```

The function `__enumext_before_keys_exec:` executes the $\{\langle code \rangle\}$ set by the `before` key “before” the `enumext` environment is started in *second argument* of the list. The $\{\langle code \rangle\}$ is executed “knowing” all definition and values provides by $\langle keys \rangle$.

```

719 \cs_new_protected:Nn \__enumext_before_keys_exec:
720 {
721     \tl_use:c { l__enumext_before_no_starred_key_ \__enumext_level: _tl }
722 }

```

The function `__enumext_after_stop_list:` executes the $\{\langle code \rangle\}$ set by the `after` key “after” the `enumext` environment has finished.

```

723 \cs_new_protected:Nn \__enumext_after_stop_list:
724 {
725     \tl_use:c { l__enumext_after_stop_list_ \__enumext_level: _tl }
726 }

```

The function `__enumext_after_args_exec:` executes the $\{\langle code \rangle\}$ set by the `first` key after the end of the second argument of the list defining the `enumext` environment, just before the first occurrence of $\backslash item$.

```

727 \cs_new_protected:Nn \__enumext_after_args_exec:
728 {
729     \tl_use:c { l__enumext_after_list_args_ \__enumext_level: _tl }
730 }

```

(End of definition for `__enumext_before_args_exec:` and others.)

10.16.2 Functions for before, after and first keys in keyans

The function `__enumext_before_args_exec_v:` executes the $\{\langle code \rangle\}$ set by the `before*` key “before” the `keyans` environment is started. The $\{\langle code \rangle\}$ is executed “without” knowing any definition of the $\{\langle arg two \rangle\}$ of the list.

```

731 \cs_new_protected:Nn \__enumext_before_args_exec_v:
732 {
733     \tl_use:N \l__enumext_before_starred_key_v_tl
734 }

```

The function `__enumext_before_keys_exec_v:` executes the `{⟨code⟩}` set by the `before` key “before” the `keyans` environment is started in `{⟨arg two⟩}` of the list. The `{⟨code⟩}` is executed “knowing” all definition and values provides by `⟨keys⟩`.

```
735 \cs_new_protected:Nn \__enumext_before_keys_exec_v:
736 {
737   \tl_use:N \l__enumext_before_no_starred_key_v_tl
738 }
```

The function `__enumext_after_stop_list_v:` executes the `{⟨code⟩}` set by the `after` key “after” the `keyans` environment has finished.

```
739 \cs_new_protected:Nn \__enumext_after_stop_list_v:
740 {
741   \tl_use:N \l__enumext_after_stop_list_v_tl
742 }
```

The function `__enumext_after_args_exec_v:` executes the `{⟨code⟩}` set by the `first` key after the end of `{⟨arg two⟩}` of the list defining the `keyans` environment, just before the first occurrence of `\item`.

```
743 \cs_new_protected:Nn \__enumext_after_args_exec_v:
744 {
745   \tl_use:N \l__enumext_after_list_args_v_tl
746 }
```

(End of definition for `__enumext_before_args_exec_v:` and others.)

10.16.3 Functions for before, after and first keys in `enumext*` and `keyans*`

```
\__enumext_before_args_exec_vii:
\__enumext_before_keys_exec_vii
\__enumext_after_stop_list_vii:
\__enumext_after_args_exec_vii:
```

The function `__enumext_before_args_exec_v:` executes the `{⟨code⟩}` set by the `before*` key “before” the `keyans` environment is started. The `{⟨code⟩}` is executed “without” knowing any definition of the `{⟨arg two⟩}` of the list.

```
747 \cs_new_protected:Nn \__enumext_before_args_exec_vii:
748 {
749   \tl_use:N \l__enumext_before_starred_key_vii_tl
750 }
751 \cs_new_protected:Nn \__enumext_before_args_exec_viii:
752 {
753   \tl_use:N \l__enumext_before_starred_key_viii_tl
754 }
```

The functions `__enumext_before_keys_exec_vii:` and `__enumext_before_keys_exec_viii:` executes the `{⟨code⟩}` set by the `before` key “before” in `enumext*` and `keyans*` environments is started in `{⟨arg two⟩}` of the list. The `{⟨code⟩}` is executed “knowing” all definition and values provides by `⟨keys⟩`.

```
755 \cs_new_protected:Nn \__enumext_before_keys_exec_vii:
756 {
757   \tl_use:N \l__enumext_before_no_starred_key_vii_tl
758 }
759 \cs_new_protected:Nn \__enumext_before_keys_exec_viii:
760 {
761   \tl_use:N \l__enumext_before_no_starred_key_viii_tl
762 }
```

The function `__enumext_after_stop_list:` executes the `{⟨code⟩}` set by the `after` key “after” the `keyans` environment has finished.

```
763 \cs_new_protected:Nn \__enumext_after_stop_list_vii:
764 {
765   \tl_use:N \l__enumext_after_stop_list_vii_tl
766 }
767 \cs_new_protected:Nn \__enumext_after_stop_list_viii:
768 {
769   \tl_use:N \l__enumext_after_stop_list_viii_tl
770 }
```

The function `__enumext_after_args_exec_v:` executes the `{⟨code⟩}` set by the `first` key after the end of `{⟨arg two⟩}` of the list defining the `keyans` environment, just before the first occurrence of `\item`.

```
771 \cs_new_protected:Nn \__enumext_after_args_exec_vii:
772 {
773   \tl_use:N \l__enumext_after_list_args_vii_tl
774 }
775 \cs_new_protected:Nn \__enumext_after_args_exec_viii:
776 {
777   \tl_use:N \l__enumext_after_list_args_viii_tl
778 }
```

(End of definition for `__enumext_before_args_exec_vii:` and others.)

10.17 Setting keys for multicols and minipage

mini-env The default value of the `columns-sep` key is handled by the state of the boolean variable `\l__enumext_columns_sep_X_bool` which is handled in the internal definition of the `enumext` and `keyans` environments.

mini-sep

columns-sep Define and set `mini-env`, `mini-sep`, `columns-sep` and `columns` keys for `enumext` and `keyans` environments.

columns

```

779 \cs_set_protected:Npn \__enumext_tmp:nn #1 #2
780 {
781   \keys_define:nn { enumext / #1 }
782   {
783     mini-env .dim_set:c = { \__enumext_minipage_right_#2_dim },
784     mini-env .value_required:n = true,
785     mini-sep .dim_set:c = { \__enumext_minipage_hsep_#2_dim },
786     mini-sep .initial:n = 0.3333em,
787     mini-sep .value_required:n = true,
788     columns-sep .dim_set:c = { \__enumext_columns_sep_#2_dim },
789     columns-sep .value_required:n = true,
790     columns .int_set:c = { \__enumext_columns_#2_int },
791     columns .initial:n = 1,
792     columns .value_required:n = true,
793   }
794 }
795 \clist_map_inline:Nn \c__enumext_all_envs_clist { \__enumext_tmp:nn #1 }

```

For `enumext*` and `keyans*` environments the situation is a bit different, the default value for `columns` key are `2` and the command `\miniright` is not available, so we will add the keys `miniright` and `miniright*` to implement support for `minipage`.

```

796 \cs_set_protected:Npn \__enumext_tmp:nn #1 #2
797 {
798   \keys_define:nn { enumext / #1 }
799   {
800     columns .initial:n = 2,
801     miniright .tl_gset:c = { g__enumext_miniright_code_#2_tl },
802     miniright .value_required:n = true,
803     miniright* .code:n = {
804       \bool_gset_true:c { g__enumext_minipage_center_#2_bool }
805       \keys_set:nn { enumext / #1 } { miniright = {##1} }
806     },
807     miniright* .value_required:n = true,
808   }
809 }
810 \clist_map_inline:nn { {enumext*}{vii}, {keyans*}{viii} } { \__enumext_tmp:nn #1 }

```

(End of definition for `mini-env` and others.)

10.18 Adjustment of vertical spaces for multicols

When nesting a “*list environment*” inside the `multicols` environment, the values of the “*vertical spaces*” are lost, basically the `multicols` environment takes control over them. Graphically it can be seen like in the figure 7.

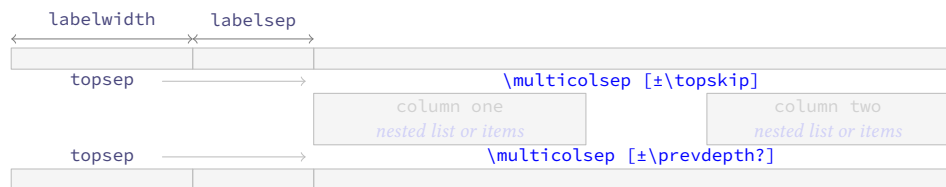


Figure 7: Representation of the vertical space in `multicols` for a nested level.

To keep the desired spaces *above* and *below* in the “*list environment*” (`\topsep` + `[\partopsep]`) it is necessary to “*adjust*” the spaces added by the `multicols` environment. The most appropriate option in this case is to use a “*context sensitive*” vertical space with `\addvspace`.

- I should make it clear that the implementation here is a “*bit questionable*”. At first glance doing `\multicolsep=\topsep` seemed right, but the results were not always as expected. An almost *imperceptible* detail is that in some cases the `\itemsep` values of are “*stretched*”, possibly due to the use of `\raggedcolumns` and this affects the lower space when closing the environment, which is “*smaller*” than expected. My attempts to find the correct values using `\showoutput` and `\showboxdepth` absolutely failed.

10.18.1 Adjustment of vertical spaces for multicol in enumext

`__enumext_multi_set_vskip:` The function `__enumext_multi_set_vskip:` will take care of determining the “adjusted spaces” that we will apply “above” and “below” the `multicol` environment in `enumext`.

We will set the default values taking into account that \TeX is in *horizontal mode*, then we will make the settings for the *vertical mode* in which `\partopsep` comes into play.

Set the values of `\l__enumext_multicols_above_X_skip` and `\l__enumext_multicols_below_X_skip` equal to the value of `\topsep` in the *current level*.

```

811 \cs_new_protected:Nn \__enumext_multi_set_vskip:
812 {
813   \skip_set:cn { \l__enumext_multicols_above_ \__enumext_level: _skip }
814   {
815     \skip_use:c { \l__enumext_topsep_ \__enumext_level: _skip }
816   }
817   \skip_set:cn { \l__enumext_multicols_below_ \__enumext_level: _skip }
818   {
819     \skip_use:c { \l__enumext_topsep_ \__enumext_level: _skip }
820   }
821   \__enumext_add_pre_parsep:
822 }

```

(End of definition for `__enumext_multi_set_vskip:`.)

`__enumext_add_pre_parsep:` The function `__enumext_add_pre_parsep:` “adjusted” the value of `\l__enumext_multicols_above_X_skip` detecting the value of `\parsep` from the previous level. This is necessary since `\parsep` from the previous level affects the *vertical spaces*.

```

823 \cs_new_protected:Nn \__enumext_add_pre_parsep:
824 {
825   \int_case:nn { \l__enumext_level_int }
826   {
827     { 2 }{
828       \skip_if_eq:nnF { \l__enumext_parsep_i_skip } { \c_zero_skip }
829       {
830         \skip_add:Nn \l__enumext_multicols_above_ii_skip { \l__enumext_parsep_i_skip }
831       }
832     }
833     { 3 }{
834       \skip_if_eq:nnF { \l__enumext_parsep_ii_skip } { \c_zero_skip }
835       {
836         \skip_add:Nn \l__enumext_multicols_above_iii_skip { \l__enumext_parsep_ii_skip }
837       }
838     }
839     { 4 }{
840       \skip_if_eq:nnF { \l__enumext_parsep_iii_skip } { \c_zero_skip }
841       {
842         \skip_add:Nn \l__enumext_multicols_above_iv_skip { \l__enumext_parsep_iii_skip }
843       }
844     }
845   }
846 }

```

(End of definition for `__enumext_add_pre_parsep:`.)

`__enumext_multi_addvspace:` The function `__enumext_multi_addvspace:` will apply the spaces set using `\addvspace` “above” the `multicol` environment in `enumext`, taking into account whether \TeX is in *horizontal mode* or *vertical mode*.

```

847 \cs_new_protected:Nn \__enumext_multi_addvspace:
848 {
849   \__enumext_multi_set_vskip:
850   \mode_if_vertical:T
851   {
852     \skip_add:cn { \l__enumext_multicols_above_ \__enumext_level: _skip }
853     {
854       \skip_use:c { \l__enumext_partopsep_ \__enumext_level: _skip }
855     }
856     \skip_add:cn { \l__enumext_multicols_below_ \__enumext_level: _skip }
857     {
858       \skip_use:c { \l__enumext_partopsep_ \__enumext_level: _skip }
859     }
860   }

```

```

861 \par\nopagebreak
862 \addvspace{ \skip_use:c { \l__enumext_multicols_above_ \l__enumext_level: \skip } }
863 }

```

(End of definition for `\l__enumext_multi_addvspace:`.)

10.18.2 Adjustment of vertical spaces for multicols in keyans

`\l__enumext_keyans_multi_set_vskip:` The function `\l__enumext_keyans_multi_set_vskip:` will take care of determining the “adjusted spaces” that we will apply “above” and “below” the `\multicols` environment in `keyans`. The implementation of this function is the same as the one used in `enumext`.

```

864 \cs_new_protected:Nn \l__enumext_keyans_multi_set_vskip:
865 {
866   \skip_set:Nn \l__enumext_multicols_above_v_skip
867   {
868     \l__enumext_topsep_v_skip
869   }
870   \skip_set:Nn \l__enumext_multicols_below_v_skip
871   {
872     \l__enumext_topsep_v_skip
873   }
874 }
875 \cs_new_protected:Nn \l__enumext_keyans_multi_addvspace:
876 {
877   \l__enumext_keyans_multi_set_vskip:
878   \mode_if_vertical:T
879   {
880     \skip_add:Nn \l__enumext_multicols_above_v_skip
881     {
882       \skip_use:N \l__enumext_partopsep_v_skip
883     }
884     \skip_add:Nn \l__enumext_multicols_below_v_skip
885     {
886       \skip_use:N \l__enumext_partopsep_v_skip
887     }
888   }
889   \par\nopagebreak
890   \addvspace{ \l__enumext_multicols_above_v_skip }
891 }

```

(End of definition for `\l__enumext_keyans_multi_set_vskip:` and `\l__enumext_keyans_multi_addvspace:`.)

10.19 Adjustment of vertical spaces for minipage

When nesting a “list environment” within the `\minipage` environment, the values of the “vertical spaces” are lost. Graphically it can be seen like in the figure 8.

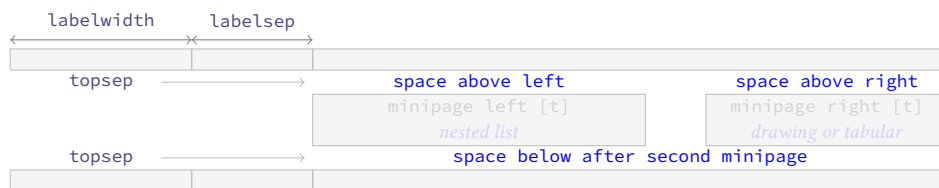


Figure 8: Representation of the `\minipage` spacing adjustment for a nested level.

Since we want to keep the “left” and “right” environments “aligned on top”, preserving the `\baselineskip` and keep the desired “spaces” (`\topsep` + `[\partopsep]`) it is necessary to “adjust” the “vertical spaces” for `\minipage` environments.

Here there are several complications that we must circumvent, the `\minipage` environment eliminates the “top” spaces, the `\multicols` environment can be nested in the `\minipage` environment, the “top” and “bottom” spaces are affected when `\topsep=0pt` and to this is added the `\partopsep` parameter that comes into action according to whether \TeX is in *horizontal mode* or *vertical mode*. Depending on these cases, small adjustments must be made using `\vspace` and `\addvspace` to obtain the “desired vertical spacing”.

Again I must make clear that the implementation here is a “bit questionable”, but hunting the spaces (`\glue`) produced by the `\minipage` environment is quite complicated, even more if `\multicols` it is nested. The setting of the values was more “trial and error” (aprox to `\strutbox`), using the help of the `lua-visual-debug` [12] package, again my attempts to find the correct values using `\showoutput` and `\showboxdepth` absolutely failed.

`\l__enumext_mini_env*` Creates a `\l__enumext_mini_env*` environment (custom version of `\minipage`) setting the `\if@minipage` switch to “false” to allow spaces at the “above” of the environment, plus we will add `\vspace{0pt}` to maintain alignment on “top”. This environment will be used internally by the `mini-env` key, it is not documented in the user interface and is for internal use only.

```

892 \DeclareDocumentEnvironment{__enumext_mini_env*}{ m }
893 {
894     \__enumext_minipage:w [ t ] { #1 }
895     \legacy_if_gset_false:n { @minipage }
896     \vspace { 0pt }
897 }
898 { \__enumext_endminipage: }

```

(End of definition for `__enumext_mini_env*`.)

10.19.1 Adjustment of vertical spaces for minipage in enumext

`__enumext_mini_set_vskip:` The function `__enumext_mini_set_vskip:` will take care of determining the “*adjust*” spaces that we will apply “*above*” and “*below*” the `__enumext_mini_env*` environment in `enumext`.

We will set the default values taking into account that T_EX is in (*horizontal mode*), then we will make the settings for the (*vertical mode*) in which `\partopsep` comes into play.

First determine if the `multicols` environment is active by comparing the value of the `\l__enumext_columns_X_int` variable handled by the `columns` key, according to this comparison we set the adjusted values for `\l__enumext_minipage_left_skip`, `\l__enumext_minipage_right_skip` and `\l__enumext_minipage_after_skip`.

```

899 \cs_new_protected:Nn \__enumext_mini_set_vskip:
900 {
901     \int_compare:nNnTF
902     { \int_use:c { \l__enumext_columns_ \__enumext_level: _int } } > { 1 }
903     {

```

If `multicols` environment is nested in `__enumext_mini_env*` environment, we will apply a correction factor to the *vertical spaces* taking into account the value of `\topsep` of the current level and the value of `\parsep` of the previous level, if these are zero we will use `\strutbox` as the basis for the calculations.

```

904     \skip_if_eq:nnTF
905     { \skip_use:c { \l__enumext_topsep_ \__enumext_level: _skip } } { \c_zero_skip }
906     {
907         \skip_set:Nn \l__enumext_minipage_left_skip
908         {
909             -0.150\box_dp:N \strutbox
910         }
911         \skip_set:Nn \l__enumext_minipage_right_skip
912         {
913             0.695\box_dp:N \strutbox
914         }
915         \skip_set:Nn \l__enumext_minipage_after_skip
916         {
917             \box_dp:N \strutbox
918         }
919         \__enumext_zero_parsep:
920     }
921     {
922         \skip_set:Nn \l__enumext_minipage_left_skip
923         {
924             \skip_use:c { \l__enumext_topsep_ \__enumext_level: _skip }
925         }
926         \skip_set:Nn \l__enumext_minipage_right_skip
927         {
928             0.695\box_dp:N \strutbox
929         }
930         \skip_set:Nn \l__enumext_minipage_after_skip
931         {
932             1.85\box_dp:N \strutbox
933             + \skip_use:c { \l__enumext_topsep_ \__enumext_level: _skip }
934         }
935     }
936 }
937 {

```

If only `enumext` environment is nested in `__enumext_mini_env*` environment, we will apply a correction factor to the *vertical spaces* taking into account the value of `\topsep`, if this is zero we will use `\strutbox` as the basis for the calculations.

```

938     \skip_if_eq:nnTF
939     { \skip_use:c { \l__enumext_topsep_ \__enumext_level: _skip } } { \c_zero_skip }
940     {
941         \skip_set:Nn \l__enumext_minipage_left_skip

```

```

942         {
943             0.5\box_dp:N \strutbox
944             - \skip_use:c { \__enumext_partopsep_ \__enumext_level: _skip }
945         }
946     \skip_set:Nn \__enumext_minipage_right_skip
947     {
948         \skip_use:c { \__enumext_partopsep_ \__enumext_level: _skip }
949     }
950     \skip_set:Nn \__enumext_minipage_after_skip
951     {
952         1.6\box_dp:N \strutbox
953     }
954 }
955 {
956     \skip_set:Nn \__enumext_minipage_left_skip
957     {
958         0.5875\box_dp:N \strutbox
959         - \skip_use:c { \__enumext_partopsep_ \__enumext_level: _skip }
960     }
961     \skip_set:Nn \__enumext_minipage_right_skip
962     {
963         + \skip_use:c { \__enumext_topsep_ \__enumext_level: _skip }
964         + \skip_use:c { \__enumext_partopsep_ \__enumext_level: _skip }
965     }
966     \skip_set:Nn \__enumext_minipage_after_skip
967     {
968         0.325\box_dp:N \strutbox
969         + \skip_use:c { \__enumext_topsep_ \__enumext_level: _skip }
970     }
971 }
972 }
973 }

```

(End of definition for `__enumext_mini_set_vskip:`)

`__enumext_zero_parsep:` The function `__enumext_zero_parsep:` “adjusted” the value of `__enumext_minipage_after_skip` detecting the value of `\parsep` from the previous level. This is necessary since `\parsep` from the previous level affects the *vertical spaces* and this is noticeable when using the `nosep` or `noitemsep` keys.

```

974 \cs_new_protected:Nn \__enumext_zero_parsep:
975 {
976     \int_case:nn { \__enumext_level_int }
977     {
978         { 2 }{
979             \skip_if_eq:nnF { \__enumext_parsep_i_skip } { \c_zero_skip }
980             {
981                 \skip_add:Nn \__enumext_minipage_after_skip { 2.15\box_dp:N \strutbox }
982             }
983         }
984         { 3 }{
985             \skip_if_eq:nnF { \__enumext_parsep_ii_skip } { \c_zero_skip }
986             {
987                 \skip_add:Nn \__enumext_minipage_after_skip { 2.15\box_dp:N \strutbox }
988             }
989         }
990         { 4 }{
991             \skip_if_eq:nnF { \__enumext_parsep_iii_skip } { \c_zero_skip }
992             {
993                 \skip_add:Nn \__enumext_minipage_after_skip { 2.15\box_dp:N \strutbox }
994             }
995         }
996     }
997 }

```

(End of definition for `__enumext_zero_parsep:`)

`__enumext_mini_addvspace:` The function `__enumext_mini_addvspace:` will apply the spaces set using `\addvspace` “above” the `__enumext_mini_env*` environment in `enumext`, taking into account whether \TeX is in *(horizontal mode)* or *(vertical mode)*. For the latter we will make some adjustments since the `\partopsep` parameter comes into play and this affects the *vertical spacing*.

```

998 \cs_new_protected:Nn \__enumext_mini_addvspace:
999 {

```

```

1000 \__enumext_mini_set_vskip:
1001 \mode_if_vertical:T
1002 {
1003   \skip_add:Nn \l__enumext_minipage_left_skip
1004   {
1005     \skip_use:c { \l__enumext_partopsep_ \__enumext_level: _skip }
1006   }
1007   \skip_add:Nn \l__enumext_minipage_after_skip
1008   {
1009     \skip_use:c { \l__enumext_partopsep_ \__enumext_level: _skip }
1010   }
1011 }
1012 \par\nopagebreak
1013 \addvspace { \l__enumext_minipage_left_skip }
1014 }

```

(End of definition for __enumext_mini_addvspace:.)

10.19.2 Adjustment of vertical spaces for minipage in keyans

__enumext_keyans_mini_set_vskip:

The function __enumext_keyans_mini_set_vskip: will take care of determining the “adjusted” spaces that we will apply “above” and “below” the `__enumext_mini_env*` environment in `keyans`. The implementation of this function is the same as the one used in `enumext`.

```

1015 \cs_new_protected:Nn \__enumext_keyans_mini_set_vskip:
1016 {
1017   \skip_zero_new:N \l__enumext_minipage_after_skip
1018   \skip_zero_new:N \l__enumext_minipage_left_skip
1019   \skip_zero_new:N \l__enumext_minipage_right_skip
1020   \int_compare:nNnTF { \l__enumext_columns_v_int } > { 1 }
1021   {
1022     \skip_if_eq:nnTF { \l__enumext_topsep_v_skip } { \c_zero_skip }
1023     {
1024       \skip_set:Nn \l__enumext_minipage_left_skip { -0.25\box_dp:N \strutbox }
1025       \skip_set:Nn \l__enumext_minipage_right_skip { 0.705\box_dp:N \strutbox }
1026       \skip_set:Nn \l__enumext_minipage_after_skip { \box_dp:N \strutbox }
1027       \skip_if_eq:nnF { \l__enumext_parsep_i_skip } { \c_zero_skip }
1028       {
1029         \skip_add:Nn \l__enumext_minipage_after_skip { 2.15\box_dp:N \strutbox }
1030       }
1031     }
1032     {
1033       \skip_set:Nn \l__enumext_minipage_left_skip
1034       {
1035         \skip_use:N \l__enumext_topsep_v_skip
1036       }
1037       \skip_set:Nn \l__enumext_minipage_right_skip
1038       {
1039         0.705\box_dp:N \strutbox
1040       }
1041       \skip_set:Nn \l__enumext_minipage_after_skip
1042       {
1043         1.85\box_dp:N \strutbox + \l__enumext_topsep_v_skip
1044       }
1045     }
1046   }
1047   {
1048     \skip_if_eq:nnTF { \l__enumext_topsep_v_skip } { \c_zero_skip }
1049     {
1050       \skip_set:Nn \l__enumext_minipage_left_skip
1051       {
1052         0.5\box_dp:N \strutbox
1053         + \l__enumext_partopsep_v_skip
1054       }
1055       \skip_set:Nn \l__enumext_minipage_right_skip
1056       {
1057         \l__enumext_partopsep_v_skip
1058       }
1059       \skip_set:Nn \l__enumext_minipage_after_skip { 1.6\box_dp:N \strutbox }
1060     }
1061     {
1062       \skip_set:Nn \l__enumext_minipage_left_skip
1063       {

```

```

1064         0.5875\box_dp:N \strutbox - \l__enumext_partopsep_v_skip
1065     }
1066     \skip_set:Nn \l__enumext_minipage_right_skip
1067     {
1068         \l__enumext_topsep_v_skip + \l__enumext_partopsep_v_skip
1069     }
1070     \skip_set:Nn \l__enumext_minipage_after_skip
1071     {
1072         0.325\box_dp:N \strutbox + \l__enumext_topsep_v_skip
1073     }
1074 }
1075 }
1076 }

```

(End of definition for `__enumext_keyans_mini_set_vskip:`)

`__enumext_keyans_mini_addvspace:`

The function `__enumext_keyans_mini_addvspace:` will apply the spaces set using `\addvspace` “above” the `__enumext_mini_env*` environment in `keyans`, taking into account whether \TeX is in *horizontal mode* or *vertical mode*. For the latter we will make some adjustments since the `\partopsep` parameter comes into play and this affects the *vertical spacing*. The implementation of this function is the same as the one used in `enumext`.

```

1077 \cs_new_protected:Nn \__enumext_keyans_mini_addvspace:
1078 {
1079     \__enumext_keyans_mini_set_vskip:
1080     \mode_if_vertical:T
1081     {
1082         \skip_add:Nn \l__enumext_minipage_left_skip
1083         {
1084             \l__enumext_partopsep_v_skip
1085         }
1086         \skip_add:Nn \l__enumext_minipage_after_skip
1087         {
1088             \l__enumext_partopsep_v_skip
1089         }
1090     }
1091     \par\nopagebreak
1092     \addvspace { \l__enumext_minipage_left_skip }
1093 }

```

(End of definition for `__enumext_keyans_mini_addvspace:`)

10.19.3 Adjustment of vertical spaces for minipage in `enumext*` and `keyans*`

`__enumext_mini_set_vskip_vii:`

`__enumext_mini_set_vskip_viii:`

The functions `__enumext_mini_set_vskip_vii:` and `__enumext_mini_set_vskip_viii:` will take care of determining the “adjusted” spaces that we will apply “above” and “below” the `__enumext_mini_env*` environment in `enumext*` and `keyans*`.

```

1094 \cs_new_protected:Nn \__enumext_mini_set_vskip_vii:
1095 {
1096     \skip_zero_new:N \l__enumext_minipage_left_skip
1097     \skip_gzero_new:N \g__enumext_minipage_right_skip
1098     \skip_gzero_new:N \g__enumext_minipage_after_skip
1099     \skip_if_eq:nnTF { \l__enumext_topsep_vii_skip } { \c_zero_skip }
1100     {
1101         \skip_set:Nn \l__enumext_minipage_left_skip { 0.5\box_dp:N \strutbox }
1102         \skip_gset:Nn \g__enumext_minipage_right_skip { 0.325\box_dp:N \strutbox }
1103     }
1104     {
1105         \skip_set:Nn \l__enumext_minipage_left_skip { 0.5875\box_dp:N \strutbox }
1106         \skip_gset:Nn \g__enumext_minipage_right_skip
1107         {
1108             \l__enumext_topsep_vii_skip
1109         }
1110         \skip_gset:Nn \g__enumext_minipage_after_skip
1111         {
1112             0.325\box_dp:N \strutbox + \l__enumext_topsep_vii_skip
1113         }
1114     }
1115 }
1116 \cs_new_protected:Nn \__enumext_mini_set_vskip_viii:
1117 {
1118     \skip_zero_new:N \l__enumext_minipage_after_skip

```

```

1119 \skip_zero_new:N \l__enumext_minipage_left_skip
1120 \skip_zero_new:N \l__enumext_minipage_right_skip
1121 \skip_if_eq:nnTF { \l__enumext_topsep_viii_skip } { \c_zero_skip }
1122 {
1123   \skip_set:Nn \l__enumext_minipage_left_skip
1124   {
1125     0.5\box_dp:N \strutbox
1126   }
1127   \skip_set:Nn \l__enumext_minipage_right_skip
1128   {
1129     \l__enumext_partopsep_viii_skip
1130   }
1131   \skip_set:Nn \l__enumext_minipage_after_skip
1132   {
1133     1.6\box_dp:N \strutbox
1134   }
1135 }
1136 {
1137   \skip_set:Nn \l__enumext_minipage_left_skip
1138   {
1139     0.5875\box_dp:N \strutbox
1140   }
1141   \skip_set:Nn \l__enumext_minipage_right_skip
1142   {
1143     \l__enumext_topsep_viii_skip
1144   }
1145   \skip_set:Nn \l__enumext_minipage_after_skip
1146   {
1147     0.325\box_dp:N \strutbox + \l__enumext_topsep_viii_skip
1148   }
1149 }
1150 }

```

(End of definition for `__enumext_mini_set_vskip_vii:` and `__enumext_mini_set_vskip_viii:`.)

`__enumext_mini_addvspace_vii:`
`__enumext_mini_addvspace_viii:`

The functions `__enumext_mini_addvspace_vii:` and `__enumext_mini_addvspace_viii:` will apply the vertical space “only above” the `__enumext_mini_env*` environment on the *left side* when the `\miniright` key is active in the `enumext*` and `keyans*` environments.

Here we will NOT take into account whether \TeX is in *horizontal mode* or *vertical mode*, since `\partopsep` is equal to `0pt` in both environments.

```

1151 \cs_new_protected:Nn \__enumext_mini_addvspace_vii:
1152 {
1153   \__enumext_mini_set_vskip_vii:
1154   \par\nopagebreak
1155   \addvspace { \l__enumext_minipage_left_skip }
1156 }
1157 \cs_new_protected:Nn \__enumext_mini_addvspace_viii:
1158 {
1159   \__enumext_mini_set_vskip_viii:
1160   \par\nopagebreak
1161   \addvspace { \l__enumext_minipage_left_skip }
1162 }

```

(End of definition for `__enumext_mini_addvspace_vii:` and `__enumext_mini_addvspace_viii:`.)

10.19.4 The command `\miniright`

The command `\miniright` will close the `__enumext_mini_env*` environment on the “left side”, open the `__enumext_mini_env*` environment on the “right side” adding the *adjusted vertical space*. By default we will add `\centering` when starting the “right side” environment. The *starred version* ‘`*`’ inhibits the use of `\centering` command i.e. the usual \TeX justification is maintained in the `__enumext_mini_env*` on the “right side”.

`\miniright`

First we will perform some checks to prevent the command from being executed outside the `enumext` environment or from being executed inside the `keyanspic` environment, then we call the internal functions for the `enumext` and `keyans` environments.

```

1163 \NewDocumentCommand \miniright { s }
1164 {
1165   \int_compare:nNt { \l__enumext_keyans_pic_level_int } = { 1 }
1166   {
1167     \msg_error:nnn { enumext } { wrong-miniright-place }

```



```

1168     }
1169     \int_compare:nNt { \__enumext_level_int } = { 0 }
1170     {
1171         \msg_error:nnn { enumext } { wrong-miniright-place }
1172     }
1173     \int_compare:nNtF { \__enumext_keyans_level_int } = { 1 }
1174     {
1175         \__enumext_keyans_mini_right_cmd:n {#1}
1176     }
1177     { \__enumext_mini_right_cmd:n {#1} }
1178 }

```

(End of definition for `\miniright`. This function is documented on page 9.)

`__enumext_mini_right_cmd:n`

The function `__enumext_mini_right_cmd:n` takes as argument the *starred version* ‘`*`’ of the `\miniright` command in the `enumext` environment. We check if the `mini-env` key is active via the variable `__enumext_minipage_right_X_dim`, if so we close the `\multicols` environment with the `__enumext_mini_env*` environment on the “left side”, then we open the `__enumext_mini_env*` environment on the “right side”, apply our adjusted “vertical spaces”, followed by adding the `\centering` command when the starred argument ‘`*`’ is not present and set zero `\g__enumext_minipage_stat_int`, otherwise we return an error.

```

1179 \cs_new_protected:Npn \__enumext_mini_right_cmd:n #1
1180 {
1181     \dim_compare:nNtF
1182     { \dim_use:c { \__enumext_minipage_right_ \__enumext_level: _dim } } > { \c_zero_dim }
1183     {
1184         \__enumext_multicols_stop:
1185         \end{__enumext_mini_env*}
1186         \hfill
1187         \begin{__enumext_mini_env*}
1188             { \dim_use:c { \__enumext_minipage_right_ \__enumext_level: _dim } }
1189             \par\addvspace { \__enumext_minipage_right_skip }
1190             \bool_if:nF {#1}
1191             {
1192                 \centering
1193             }
1194             \int_gzero:N \g__enumext_minipage_stat_int
1195         }
1196         { \msg_error:nnn { enumext } { wrong-miniright-use } }
1197     }

```

(End of definition for `__enumext_mini_right_cmd:n`.)

`__enumext_keyans_mini_right_cmd:n`

The function `__enumext_keyans_mini_right_cmd:n` takes as argument the *starred version* ‘`*`’ of the `\miniright` command in the `keyans` environment. The implementation of this function is the same as that of the `__enumext_mini_right_cmd:n` function of the `enumext` environment.

```

1198 \cs_new_protected:Npn \__enumext_keyans_mini_right_cmd:n #1
1199 {
1200     \dim_compare:nNtF { \__enumext_minipage_right_v_dim } > { \c_zero_dim }
1201     {
1202         \__enumext_keyans_multicols_stop:
1203         \end{__enumext_mini_env*}
1204         \hfill
1205         \begin{__enumext_mini_env*}{ \__enumext_minipage_right_v_dim }
1206             \par\addvspace { \__enumext_minipage_right_skip }
1207             \bool_if:nF {#1}
1208             {
1209                 \centering
1210             }
1211             \int_gzero:N \g__enumext_minipage_stat_int
1212         }
1213         { \msg_error:nnn { enumext } { wrong-miniright-use } }
1214     }

```

(End of definition for `__enumext_keyans_mini_right_cmd:n`.)

10.20 Setting above and below keys

While having controlled the *vertical spaces* within the `enumext` and `keyans` environments when using the `columns` or `mini-env` keys, sometimes the “*vertical spaces above*” or “*vertical spaces below*” the environments are not as expected and it is necessary to be able to apply a “*fine correction*” to these. As I have not been able to correct these *glitches*, the best option is to leave a couple of *(keys)* dedicated to this purpose, in this case it is best to use `\vspace` or `\vspace*` when convenient.

Define `above`, `above*`, `below` and `below*` keys for `enumext` and `keyans` environments.

```

1215 \cs_set_protected:Npn \__enumext_tmp:nn #1 #2
1216 {
1217   \keys_define:nn { enumext / #1 }
1218   {
1219     above .skip_set:c = { \__enumext_vspace_above_#2_skip },
1220     above .value_required:n = true,
1221     above* .code:n      = \bool_set_true:c { \__enumext_vspace_a_star_#2_bool }
1222                       \keys_set:nn { enumext / #1 } { above = {##1} },
1223     above* .value_required:n = true,
1224     below .skip_set:c = { \__enumext_vspace_below_#2_skip },
1225     below .value_required:n = true,
1226     below* .code:n     = \bool_set_true:c { \__enumext_vspace_b_star_#2_bool }
1227                     \keys_set:nn { enumext / #1 } { below = {##1} },
1228     below* .value_required:n = true,
1229   }
1230 }
1231 \clist_map_inline:Nn \c__enumext_all_envs_clist { \__enumext_tmp:nn #1 }

```

(End of definition for `above` and others.)

10.20.1 Functions for above and below keys in enumext

`__enumext_vspace_above:` The function `__enumext_vspace_above:` apply the *vertical space above* the `enumext` environment set by the `above*` and `above` keys.

```

1232 \cs_new_protected:Nn \__enumext_vspace_above:
1233 {
1234   \skip_if_eq:nnF
1235   { \skip_use:c { \__enumext_vspace_above_ \__enumext_level: _skip } } { \c_zero_skip }
1236   {
1237     \bool_if:cTF { \__enumext_vspace_a_star_ \__enumext_level: _bool }
1238     {
1239       \vspace*{ \skip_use:c { \__enumext_vspace_above_ \__enumext_level: _skip } }
1240     }
1241     {
1242       \vspace { \skip_use:c { \__enumext_vspace_above_ \__enumext_level: _skip } }
1243     }
1244   }
1245 }

```

(End of definition for `__enumext_vspace_above:`.)

`__enumext_vspace_below:` The function `__enumext_vspace_below:` apply the *vertical space below* the `enumext` environment set by the `below*` and `below` keys.

```

1246 \cs_new_protected:Nn \__enumext_vspace_below:
1247 {
1248   \skip_if_eq:nnF
1249   { \skip_use:c { \__enumext_vspace_below_ \__enumext_level: _skip } } { \c_zero_skip }
1250   {
1251     \bool_if:cTF { \__enumext_vspace_b_star_ \__enumext_level: _bool }
1252     {
1253       \vspace*{ \skip_use:c { \__enumext_vspace_below_ \__enumext_level: _skip } }
1254     }
1255     {
1256       \vspace { \skip_use:c { \__enumext_vspace_below_ \__enumext_level: _skip } }
1257     }
1258   }
1259 }

```

(End of definition for `__enumext_vspace_below:`.)

10.20.2 Functions for above and below keys in keyans

`__enumext_vspace_above_v:`

The function `__enumext_vspace_above_v:` apply the *vertical space above* the **keyans** environment set by the **above** and **above*** keys.

```

1260 \cs_new_protected:Nn \__enumext_vspace_above_v:
1261 {
1262   \skip_if_eq:nnF { \l__enumext_vspace_above_v_skip } { \c_zero_skip }
1263   {
1264     \bool_if:NTF \l__enumext_vspace_a_star_v_bool
1265     {
1266       \vspace*{ \l__enumext_vspace_above_v_skip }
1267     }
1268     { \vspace { \l__enumext_vspace_above_v_skip } }
1269   }
1270 }
```

(End of definition for `__enumext_vspace_above_v:`.)

`__enumext_vspace_below_v:`

The function `__enumext_vspace_below_v:` apply the *vertical space below* the **keyans** environment set by the **below*** and **below** keys.

```

1271 \cs_new_protected:Nn \__enumext_vspace_below_v:
1272 {
1273   \skip_if_eq:nnF { \l__enumext_vspace_below_v_skip } { \c_zero_skip }
1274   {
1275     \bool_if:NTF \l__enumext_vspace_b_star_v_bool
1276     {
1277       \vspace*{ \l__enumext_vspace_below_v_skip }
1278     }
1279     { \vspace { \l__enumext_vspace_below_v_skip } }
1280   }
1281 }
```

(End of definition for `__enumext_vspace_below_v:`.)

10.20.3 Functions for above and below keys in enumext* keyans*

`__enumext_vspace_above_vii:`

The functions `__enumext_vspace_above_vii:` and `__enumext_vspace_above_viii:` apply the *vertical space above* the **enumext*** and **keyans*** environments set by the **above** and **above*** keys.

`__enumext_vspace_above_viii:`

```

1282 \cs_new_protected:Nn \__enumext_vspace_above_vii:
1283 {
1284   \skip_if_eq:nnF { \l__enumext_vspace_above_vii_skip } { \c_zero_skip }
1285   {
1286     \bool_if:NTF \l__enumext_vspace_a_star_vii_bool
1287     {
1288       \vspace*{ \l__enumext_vspace_above_vii_skip }
1289     }
1290     { \vspace { \l__enumext_vspace_above_vii_skip } }
1291   }
1292 }
1293 \cs_new_protected:Nn \__enumext_vspace_above_viii:
1294 {
1295   \skip_if_eq:nnF { \l__enumext_vspace_above_viii_skip } { \c_zero_skip }
1296   {
1297     \bool_if:NTF \l__enumext_vspace_a_star_viii_bool
1298     {
1299       \vspace*{ \l__enumext_vspace_above_viii_skip }
1300     }
1301     { \vspace { \l__enumext_vspace_above_viii_skip } }
1302   }
1303 }
```

(End of definition for `__enumext_vspace_above_vii:` and `__enumext_vspace_above_viii:`.)

`__enumext_vspace_below_vii:`

The functions `__enumext_vspace_below_vii:` and `__enumext_vspace_below_viii:` apply the *vertical space below* the **enumext*** and **keyans*** environments set by the **below*** and **below** keys.

`__enumext_vspace_below_viii:`

```

1304 \cs_new_protected:Nn \__enumext_vspace_below_vii:
1305 {
1306   \skip_if_eq:nnF { \l__enumext_vspace_below_vii_skip } { \c_zero_skip }
1307   {
1308     \bool_if:NTF \l__enumext_vspace_b_star_vii_bool
1309     {
1310       \vspace*{ \l__enumext_vspace_below_vii_skip }

```

```

1311     }
1312     { \vspace { \l__enumext_vspace_below_vii_skip } }
1313   }
1314 }
1315 \cs_new_protected:Nn \__enumext_vspace_below_viii:
1316 {
1317   \skip_if_eq:nnF { \l__enumext_vspace_below_viii_skip } { \c_zero_skip }
1318   {
1319     \bool_if:NTF \l__enumext_vspace_b_star_viii_bool
1320     {
1321       \vspace*{ \l__enumext_vspace_below_viii_skip }
1322     }
1323     { \vspace { \l__enumext_vspace_below_viii_skip } }
1324   }
1325 }

```

(End of definition for __enumext_vspace_below_vii: and __enumext_vspace_below_viii:.)

10.21 Setting save-ans and resume keys

The key `save-ans` is directly associated with the key `resume`, this will activate the entire “storage system” in the `enumext` package.

We define the keys `save-ans` and `resume` only for the “first level” of `enumext` and `enumext*`.

```

save-ans  \keys_define:nn { enumext / level-1 }
resume    {
resume*    {
1326   \keys_define:nn { enumext / level-1 }
1327   {
1328     save-ans .code:n = \__enumext_storing_set:n {#1},
1329     save-ans .value_required:n = true,
1330     resume  .code:n = \__enumext_resume_counter:,
1331     resume  .value_forbidden:n = true,
1332     resume* .code:n = \__enumext_resume_counter_star:,
1333     resume* .value_forbidden:n = true,
1334   }
1335   \keys_define:nn { enumext / enumext* }
1336   {
1337     save-ans .code:n = \__enumext_storing_set:n {#1},
1338     save-ans .value_required:n = true,
1339     resume  .code:n = \__enumext_resume_counter_vii:,
1340     resume  .value_forbidden:n = true,
1341   }

```

(End of definition for `save-ans`, `resume`, and `resume*`.)

__enumext_storing_set:n

The function `__enumext_storing_set:n` executed by the `save-ans` key sets the parameters for the operation of `\anskey`, `keyans` and `keyanspic`. The variable `\l__enumext_store_name_tl` will have the “store name” with which the *⟨sequence⟩* and *⟨prop list⟩* will be created, if it does not exist it will create it globally.

The boolean var `\l__enumext_store_active_bool` will be set to true activating the entire internal *storage mechanism*, then the integer variable for the `resume` key will be created (if not exist), finally the function `__enumext_check_ans_int:n` will be called to activate the internal mechanism for checking the answers if the boolean variable `\l__enumext_check_ans_bool` set by `check-ans` key are active.

```

1342 \cs_new_protected:Npn \__enumext_storing_set:n #1
1343 {
1344   \tl_set:Nx \l__enumext_store_name_tl {#1}
1345   \prop_if_exist:cF { g__enumext_ \l__enumext_store_name_tl _prop }
1346   {
1347     \prop_new:c { g__enumext_ \l__enumext_store_name_tl _prop }
1348   }
1349   \seq_if_exist:cF { g__enumext_ \l__enumext_store_name_tl _seq }
1350   {
1351     \seq_new:c { g__enumext_ \l__enumext_store_name_tl _seq }
1352   }
1353   \bool_set_true:N \l__enumext_store_active_bool
1354   \int_if_exist:cF { g__enumext_resume_#1_int }
1355   {
1356     \int_new:c { g__enumext_resume_#1_int }
1357   }
1358 }

```

(End of definition for `__enumext_storing_set:n`.)

`_enumext_resume_counter:` The functions `_enumext_resume_counter:` and `_enumext_resume_counter_vii:` used by `resume` key in `enumext` and `enumext*`. If `save-ans` key present then set the start value from integer created by `_enumext_storing_set:n`.

```

1359 \\_cs_new_protected:Nn \\_enumext_resume_counter:
1360 {
1361   \\_bool_if:NT \\_l__enumext_store_active_bool
1362   {
1363     \\_int_gset:Nn \\_g__enumext_resume_int
1364     {
1365       \\_int_use:c { \\_g__enumext_resume_ \\_l__enumext_store_name_tl _int }
1366     }
1367   }
1368   \\_bool_set_true:N \\_l__enumext_resume_bool
1369 }
1370 \\_cs_new_protected:Nn \\_enumext_resume_counter_vii:
1371 {
1372   \\_bool_if:NT \\_l__enumext_store_active_bool
1373   {
1374     \\_int_gset:Nn \\_g__enumext_resume_int
1375     {
1376       \\_int_use:c { \\_g__enumext_resume_ \\_l__enumext_store_name_tl _int }
1377     }
1378   }
1379   \\_bool_set_true:N \\_l__enumext_resume_vii_bool
1380 }

```

(End of definition for `_enumext_resume_counter:` and `_enumext_resume_counter_vii:`.)

10.22 Setting check-ans key

The mechanism for checking that all questions are answered follows this logic:

If the line begins with `_item` or `_item*` and does NOT *open a nested environment*, each `_item` or `_item*` must contain a *single* execution of the `_anskey` command, i.e. the counter of the executions of the `_anskey` command must be equal to the counter associated with the sum of executions of `_item` and `_item*`.

If the line begins with `_item` or `_item*` and *opens a nested environment* each `_item` or `_item*` in the nested environment must have a *single* execution of the `_anskey` command and the counter associated to the sum of `_item` and `_item*` executions must increment by “one” to maintain equality.

In order for the mechanism for the check-answer to work (not counting `keyans`, `keyans*` and `keyanspic`) we need:

1. We must keep track of the total number of `_item` and `_item*` (enumerated) that appear within the environment including the nested levels.
2. We must keep track of the total number of `_item` and `_item*` (enumerated) that appear per level of nesting.
3. Keeping track of the number of times the environment nests.

The integer variable associated to the sum of each `_item` and `_item*` in the environment `_g__enumext_count_item_all_int` must match the integer variable `_g__enumext_count_item_ans_int` associated to the execution of the command `_anskey`. We analyze the cases:

- a) If the list only has one level the number of `_item` + `_item*` = `_anskey`
- b) If the list has *nested levels*, for each level of nesting we need to increase by one (for the `_item` or `_item*` that opens the nest) so that the account remains the same.
- c) If there is the option `no-store` we must add the items within this level plus one to maintain the equality.

With `keyans`, `keyans*` and `keyanspic` it is enough to increase in one the integer of `_anskey`. The integers created must be global if they are not lost in the interior levels of nesting and to execute the test we will use a “hook” function after closing the first level of the environment.

10.22.1 The check answer mechanism

Now we define the keys `check-ans` and `no-store` for all levels of `enumext` and `enumext*` environments.

```

check-ans
no-store
1381 \\_cs_set_protected:Npn \\_enumext_tmp:n #1
1382 {
1383   \\_keys_define:nn { enumext / #1 }
1384   {
1385     check-ans .bool_set:N = \\_l__enumext_check_ans_bool,

```

```

1386         check-ans .initial:n = false,
1387         no-store .code:n = {
1388             \bool_set_false:N \__enumext_store_ans_bool
1389             \bool_set_false:N \__enumext_check_ans_bool
1390         },
1391         no-store .value_forbidden:n = true,
1392     }
1393 }
1394 \clist_map_inline:nn
1395 {
1396     level-1, level-2, level-3, level-4, enumext*
1397 }
1398 { \__enumext_tmp:n {#1} }

```

(End of definition for `check-ans` and `no-store`.)

`__enumext_check_ans_int:n`

The function `__enumext_check_ans_int:n` will create the integer variables for the internal checking answer mechanism used by the `check-ans` key. The integer variables take the form `\g__enumext_count_⟨store name⟩_item_ans_int` and `\g__enumext_count_⟨store name⟩_item_X_int`

```

1399 \cs_new_protected:Npn \__enumext_check_ans_int:n #1
1400 {
1401     \int_if_exist:cF { g__enumext_count_#1_item_ans_int }
1402     { \int_new:c { g__enumext_count_#1_item_ans_int } }
1403     \int_if_exist:cF { g__enumext_count_#1_i_int }
1404     { \int_new:c { g__enumext_count_#1_i_int } }
1405     \int_if_exist:cF { g__enumext_count_#1_ii_int }
1406     { \int_new:c { g__enumext_count_#1_ii_int } }
1407     \int_if_exist:cF { g__enumext_count_#1_iii_int }
1408     { \int_new:c { g__enumext_count_#1_iii_int } }
1409     \int_if_exist:cF { g__enumext_count_#1_iv_int }
1410     { \int_new:c { g__enumext_count_#1_iv_int } }
1411     \int_if_exist:cF { g__enumext_count_#1_vii_int }
1412     { \int_new:c { g__enumext_count_#1_vii_int } }

```

We make `\g__enumext_count_item_all_int` equal to the integer variables `\g__enumext_count_⟨store name⟩_item_i_int` or `\g__enumext_count_⟨store name⟩_item_vii_int` that contains all the occurrences of `\item` and `\item*` in the different levels and we will make `\g__enumext_count_item_with_ans_int` equal to the integer variable handled by the `\anskey` command.

```

1413 }

```

(End of definition for `__enumext_check_ans_int:n`.)

`__enumext_current_env:`

Function to detect in which environment you are working.

```

1414 \cs_new_protected:Nn \__enumext_current_env:
1415 {
1416     \str_case:en { \@currenvir }
1417     {
1418         {enumext}
1419         {
1420             \int_compare:nNtF { \__enumext_level_h_int } = { \c_zero_int }
1421             {
1422                 \bool_gset_true:N \g__enumext_standar_bool
1423                 \typeout{working-on-enumext}
1424             }
1425         }
1426         {enumext*}
1427         {
1428             \int_compare:nNtF { \__enumext_level_int } = { \c_zero_int }
1429             {
1430                 \bool_gset_true:N \g__enumext_starred_bool
1431                 \typeout{working-on-enumext*}
1432             }
1433         }
1434     }
1435 }

```

(End of definition for `__enumext_current_env:`.)

`__enumext_check_ans_set_int_by_level:` The function `__enumext@_check_ans_set_int_by_level:` will adjust the value of the variable `\g__enumext_count_item_number_int` by decrementing its value by one each time you open a nested `enumext` environment.

```

1436 \cs_new_protected:Nn \__enumext_check_ans_set_int_by_level:
1437 {
1438   \int_case:nn { \l__enumext_level_int }
1439   {
1440     { 1 }{
1441       \bool_lazy_all:nT
1442       {
1443         { \l__enumext_starred_bool }
1444         { \int_compare_p:nNn { \l__enumext_level_int } = { \c_zero_int } }
1445       }
1446       {
1447         \int_gdecr:N \g__enumext_count_item_number_int
1448         \typeout{ENUMEXT ~ STANDAR ~ NEEEEEEEEEEEEESTED}
1449       }
1450     }
1451     { 2 }{
1452       \int_gdecr:N \g__enumext_count_item_number_int
1453     }
1454     { 3 }{
1455       \int_gdecr:N \g__enumext_count_item_number_int
1456     }
1457     { 4 }{
1458       \int_gdecr:N \g__enumext_count_item_number_int
1459     }
1460   }
1461   \int_case:nn { \l__enumext_level_h_int }
1462   {
1463     { 1 }{
1464       \bool_if:NT \l__enumext_standar_bool
1465       {
1466         \int_gdecr:N \g__enumext_count_item_number_int
1467         \typeout{ENUMEXT ~ STARRED ~ NEEEEEEEEEEEEESTED}
1468       }
1469     }
1470   }
1471 }

```

(End of definition for `__enumext_check_ans_set_int_by_level:.`)

10.22.2 Set-up check answer mechanism

`__enumext_check_ans_count:` The function `__enumext_check_ans_count:` will count the number of times the `\item` and `\item*` commands appears per level within the `enumext` environment. The boolean variable `\l__enumext_store_ans_bool` controlled by the `no-store` key will increment the integer variable of the level counter by 1 to preserve the equality that we will use in the final comparison of the process.

```

1472 \cs_new_protected:Nn \__enumext_check_ans_count:
1473 {
1474   \bool_if:NT \l__enumext_check_ans_bool
1475   {
1476     \__enumext_check_ans_set_int_by_level:
1477   }
1478 }

```

(End of definition for `__enumext_check_ans_count:.`)

`__enumext_check_ans_active:` The function `__enumext_check_ans_active:` compare all `\item`'s plus `\item*`'s and `\item`'s with answer for checking answer mechanism and display the appropriate message on the terminal.

`__enumext_check_ans_active_vii:`

```

1479 \cs_new_protected:Nn \__enumext_check_ans_active:
1480 {
1481   \int_compare:nNnTF
1482   { \g__enumext_count_item_number_int } = { \g__enumext_count_item_anskey_int }
1483   {
1484     \msg_term:nnV { enumext } { items-same-answer } \g__enumext_store_name_tl
1485   }
1486   {
1487     \msg_warning:nnV { enumext } { item-different-answer } \g__enumext_store_name_tl
1488   }

```


After the function is executed, we set the integer variables to zero.

```

1489 \int_gzero:N \g__enumext_count_item_number_int
1490 \int_gzero:N \g__enumext_count_item_anskey_int
1491 %% \__enumext_zero_count_level:
1492 }

1493 \cs_new_protected:Nn \__enumext_check_ans_active_vii:
1494 {
1495   \int_compare:nNnTF
1496   { \g__enumext_count_item_number_int } = { \g__enumext_count_item_anskey_int }
1497   {
1498     \msg_term:nnV { enumext } { items-same-answer } \g__enumext_store_name_tl
1499   }
1500   {
1501     \msg_warning:nnV { enumext } { item-different-answer } \g__enumext_store_name_tl
1502   }
1503   \int_gzero:N \g__enumext_count_item_number_int
1504   \int_gzero:N \g__enumext_count_item_anskey_int
1505   %% \__enumext_zero_count_level:
1506 }

```

(End of definition for `__enumext_check_ans_active:` and `__enumext_check_ans_active_vii:`.)

10.23 Keys and functions associated with storage

We add the keys `wrap-ans`, `mark-ans`, `mark-pos`, `show-ans`, `show-pos`, `mark-ref` and `store-ref` related to the “storage system” and internal mechanism of “label and ref” only at the *first level* of `enumext` and `enumext*`.

```

1507 \cs_set_protected:Npn \__enumext_tmp:n #1
1508 {
1509   \keys_define:nn { enumext / #1 }
1510   {
1511     wrap-ans .cs_set_protected:Np = \__enumext_anskey_wrapper:n ##1,
1512     wrap-ans .initial:n = \fbox{##1},
1513     wrap-ans .value_required:n = true,
1514     mark-ans .code:n = \tl_set:Nn \l__enumext_mark_answer_sym_tl {##1},
1515     mark-ans .initial:n = \textasteriskcentered,
1516     mark-ans .value_required:n = true,
1517     mark-pos .choice:,
1518     mark-pos / left .code:n = \str_set:Nn \l__enumext_mark_position_str { l },
1519     mark-pos / right .code:n = \str_set:Nn \l__enumext_mark_position_str { r },
1520     mark-pos .initial:n = right,
1521     mark-pos .value_required:n = true,
1522     show-ans .code:n = \bool_set_true:N \l__enumext_show_answer_bool
1523               \bool_set_false:N \l__enumext_show_position_bool,
1524     show-ans .value_forbidden:n = true,
1525     show-pos .code:n = \bool_set_true:N \l__enumext_show_position_bool
1526               \bool_set_false:N \l__enumext_show_answer_bool,
1527     show-pos .value_forbidden:n = true,
1528     mark-ref .code:n = \tl_set:Nn \l__enumext_mark_ref_sym_tl {##1},
1529     mark-ref .initial:n = \textasteriskcentered,
1530     mark-ref .value_required:n = true,
1531     store-ref .bool_set:N = \l__enumext_store_ref_key_bool,
1532     store-ref .initial:n = false,
1533   }
1534 }
1535 \clist_map_inline:nn { level-1, enumext* } { \__enumext_tmp:n {#1} }

```

(End of definition for `wrap-ans` and others.)

For the `keyans` and `keyans*` environments we will only add the keys `mark-pos`, `show-ans` and `show-pos`.

```

1536 \cs_set_protected:Npn \__enumext_tmp:n #1
1537 {
1538   \keys_define:nn { enumext / #1 }
1539   {
1540     mark-pos .choice:,
1541     mark-pos / left .code:n = \str_set:Nn \l__enumext_mark_position_str { l },
1542     mark-pos / right .code:n = \str_set:Nn \l__enumext_mark_position_str { r },
1543     mark-pos .initial:n = right,
1544     mark-pos .value_required:n = true,

```

```

1545     show-ans .code:n = \bool_set_true:N \__enumext_show_answer_bool
1546                     \bool_set_false:N \__enumext_show_position_bool,
1547     show-ans .value_forbidden:n = true,
1548     show-pos .code:n = \bool_set_true:N \__enumext_show_position_bool
1549                     \bool_set_false:N \__enumext_show_answer_bool,
1550     show-pos .value_forbidden:n = true,
1551   }
1552 }
1553 \clist_map_inline:nn { keyans, keyans* } { \__enumext_tmp:n {#1} }

```

(End of definition for mark-pos and show-ans.)

For the `enumext` and `enumext*` environments we will only add the keys `columns*` and `columns-sep*`. The values set by these keys will be passed as optional arguments to the “inner levels” of the `enumext` and `enumext*` environments via the `__enumext_store_level_open:` function used by the “storage system” to preserve the structure and then used by the `\printkeyans` command.

```

1554 \cs_set_protected:Npn \__enumext_tmp:nn #1 #2
1555 {
1556   \keys_define:nn { enumext / #1 }
1557   {
1558     columns* .code:n = \bool_set_true:c { l__enumext_store_columns_#2_bool }
1559                   \int_set:cn { l__enumext_store_columns_#2_int } {##1}
1560                   \tl_put_right:ce { l__enumext_store_opt_#2_tl }
1561                   {
1562                     columns = \exp_not:v { l__enumext_store_columns_#2_int },
1563                   },,
1564     columns* .value_required:n = true,
1565     columns-sep* .code:n = \bool_set_true:c { l__enumext_store_columns_sep_#2_bool }
1566                   \dim_set:cn { l__enumext_store_columns_sep_#2_dim } {##1}
1567                   \tl_put_right:ce { l__enumext_store_opt_#2_tl }
1568                   {
1569                     columns-sep = \exp_not:v { l__enumext_store_columns_sep_#2_dim },
1570                   },
1571     columns-sep* .value_required:n = true,
1572   }
1573 }
1574 \clist_map_inline:nn
1575 {
1576   {level-1}{i}, {level-2}{ii}, {level-3}{iii}, {level-4}{iv}, {enumext*}{vii}
1577 }
1578 { \__enumext_tmp:nn #1 }

```

(End of definition for columns* and columns-sep*.)

10.23.1 Function for storing content in prop list

The function `__enumext_store_addto_prop:n` stores the content in $\langle prop\ list \rangle$ defined by `save-ans` key. The “stored content” is retrieved by means of the `\getkeyans` command.

The form in which the content is “stored” in the $\langle prop\ list \rangle$ is $\{\langle position \rangle\}\{\langle content \rangle\}$. This function is used by `\anskey` in `enumext` and `enumext*` environments, `\item*` in `keyans` and `keyans*` environments and `\anspic` in `keyanspic` environment.

```

1579 \cs_generate_variant:Nn \prop_gput_if_not_in:Nnn { cen }
1580 \cs_new_protected:Npn \__enumext_store_addto_prop:n #1
1581 {
1582   \prop_gput_if_not_in:cen { g__enumext_ \__enumext_store_name_tl _prop }
1583   {
1584     \int_eval:n { \prop_count:c { g__enumext_ \__enumext_store_name_tl _prop } + 1 }
1585   }
1586   { #1 }
1587 }
1588 \cs_generate_variant:Nn \__enumext_store_addto_prop:n { V }

```

(End of definition for __enumext_store_addto_prop:n.)

10.23.2 Function for storing content in sequence

The function `__enumext_store_addto_seq:n` stores the content in $\langle sequence \rangle$ defined by `save-ans` key. This function is used by `\anskey` in `enumext`, `\item*` in `keyans` and `\anspic` in `keyanspic`.

The form in which the content is stored in $\langle sequence \rangle$ is in a internal `enumext` or `enumext*` environments with the *same structure* in which the command was executed.

The “stored content” is retrieved by means of the `\printkeyans` command.

```

1589 \cs_new_protected:Npn \__enumext_store_addto_seq:n #1
1590 {
1591   \seq_gput_right:cn { g__enumext_ \l__enumext_store_name_tl _seq } { #1 }
1592 }
1593 \cs_generate_variant:Nn \__enumext_store_addto_seq:n { v, V }

```

(End of definition for __enumext_store_addto_seq:n.)

10.23.3 Functions for storing the list structure in the sequence

The memorization structure of the list is handled by the functions __enumext_store_level_open: and __enumext_store_level_close: which are executed per level within the enumext environment. As this structure will be stored in the sequence set by the save-ans key, we will not be able to modify it locally, so it is better to take only two copies of the values set by the columns and columns-sep keys if they are present when changing levels within the enumext environment when executing \anskey. We will store these values in the variable \l__enumext_store_columns_X_tl if they are different from 0 and 0pt and pass them as an optional argument to the environment stored in the sequence enumext.

```

1594 \cs_new_protected:Nn \__enumext_store_level_open:
1595 {
1596   \bool_if:NF \l__enumext_store_ans_bool
1597   {
1598     \tl_if_empty:cTF { l__enumext_store_opt_ \__enumext_level: _tl }
1599     {
1600       \__enumext_store_addto_seq:n
1601       {
1602         \item \begin{enumext}
1603       }
1604     }
1605     {
1606       \tl_put_left:cn { l__enumext_store_opt_ \__enumext_level: _tl }
1607       {
1608         \item \begin{enumext} [
1609       }
1610       \tl_put_right:cn { l__enumext_store_opt_ \__enumext_level: _tl }
1611       {
1612         ]
1613       }
1614       \__enumext_store_addto_seq:v { l__enumext_store_opt_ \__enumext_level: _tl }
1615     }
1616   }
1617 }
1618 \cs_new_protected:Nn \__enumext_store_level_close:
1619 {
1620   \bool_if:NF \l__enumext_store_ans_bool
1621   {
1622     \__enumext_store_addto_seq:n { \end{enumext} }
1623   }
1624 }

```

(End of definition for __enumext_store_level_open: and __enumext_store_level_close:.)

__enumext_store_level_open_vii: When nesting the enumext* environment in enumext starting right after \item (without material between them) there is a problem with the alignment of the labels with the baseline between the two environments. One way to get around this problem is to place \mode_leave_vertical: and then apply \vspace taking into account \baselineskip, the value of \parsep of the current level of enumext and the value of \topsep of the enumext* environment.

```

1625 \cs_new_protected:Nn \__enumext_store_level_open_vii:
1626 {
1627   \bool_if:NF \l__enumext_store_ans_bool
1628   {
1629     \tl_if_empty:NTF \l__enumext_store_opt_vii_tl
1630     {
1631       \__enumext_store_addto_seq:n
1632       {
1633         \item \mode_leave_vertical:
1634         \vspace { -\skip_eval:n { \baselineskip + \parsep } }
1635         \begin{enumext*}[before={\setlength{\topsep}{\0pt}},]
1636       }
1637     }
1638     {
1639       \tl_put_left:Nn \l__enumext_store_opt_vii_tl

```

```

1640         {
1641             \item \mode_leave_vertical:
1642                 \vspace { -\skip_eval:n { \baselineskip + \parsep } }
1643                 \begin{enumext*}[before={\setlength{\topsep}{\opt}}],
1644             }
1645             \tl_put_right:Nn \l__enumext_store_opt_vii_tl
1646             {
1647                 ]
1648             }
1649             \__enumext_store_addto_seq:V \l__enumext_store_opt_vii_tl
1650         }
1651     }
1652 }
1653 \cs_new_protected:Nn \__enumext_store_level_close_vii:
1654 {
1655     \bool_if:NF \l__enumext_store_ans_bool
1656     {
1657         \__enumext_store_addto_seq:n { \end{enumext*} }
1658     }
1659 }

```

(End of definition for __enumext_store_level_open_vii: and __enumext_store_level_close_vii:.)

10.23.4 Function for show marks and position

```

\__enumext_print_keyans_box:NN
\__enumext_print_keyans_box:cc

```

The function `__enumext_print_keyans_box:NN` print a box in the left margin with `\l__enumext_mark_answer_sym_tl` used by the `wrap-ans`, `show-ans` and `show-pos` keys. The function takes two arguments:

#1: `\l__enumext_labelwidth_X_dim`

#2: `\l__enumext_labelsep_X_dim`

```

1660 \cs_new_protected:Nn \__enumext_print_keyans_box:NN
1661 {
1662     \mode_leave_vertical:
1663     \skip_horizontal:n { -\dim_use:N #2 }
1664     \makebox[0pt][ r ]
1665     {
1666         \makebox[ \dim_use:N #1 ][ \l__enumext_mark_position_str ]
1667         {
1668             \tl_use:N \l__enumext_mark_answer_sym_tl
1669         }
1670     }
1671     \skip_horizontal:n { \dim_use:N #2 }
1672 }
1673 \cs_generate_variant:Nn \__enumext_print_keyans_box:NN { cc }

```

(End of definition for __enumext_print_keyans_box:NN.)

10.24 The command \anskey and internal label and ref

Since we will be “*storing content*” in a list environment within *(sequences)* and can (more or less) manage the options passed to each level, it is necessary that we have a little more control over `\item` when storing. The `\anskey` command will cover this point and give it very similar behaviour to that of `\item` in the `enumext` and `enumext*` environments.

`\anskey` We want the command to be executed as follows: `\anskey(<number>)*[<key = val>]{<content>}` so first we’ll add the keys `item-sym*`, `item-pos*` and `store-brk`.

```

1674 \keys_define:nn { enumext / anskey }
1675 {
1676     item-sym* .tl_set:N = \l__enumext_store_item_symbol_tl,
1677     item-sym* .value_required:n = true,
1678     item-pos* .dim_set:N = \l__enumext_store_item_symbol_sep_dim,
1679     item-pos* .value_required:n = true,
1680     store-brk .bool_set:N = \l__enumext_store_columns_break_bool,
1681     store-brk .default:n = true,
1682     store-brk .value_forbidden:n = true,
1683 }

```

This command `\anskey` will only be present when using the `save-ans` key in `enumext` and `enumext*` environments, otherwise it will return an error. If the `check-ans` key is active, increment `\g__enumext_count_item_with_ans_int`, then call internal function `__enumext_store_anskey_code:nnnn` will “*store content*” in the *(sequence)* and in the *(prop list)*.

```

1684 \NewDocumentCommand \anskey { d() s o +m }

```

```

1685 {
1686   \bool_if:NF \l__enumext_store_active_bool
1687   {
1688     \msg_error:nnnn { enumext } { anskey-wrong-place }{ anskey }{ enumext }
1689   }
1690   \int_compare:nNnT { \l__enumext_keyans_level_int } = { 1 }
1691   {
1692     \msg_error:nnnn { enumext } { command-wrong-place }{ anskey }{ keyans }
1693   }
1694   \int_compare:nNnT { \l__enumext_keyans_pic_level_int } = { 1 }
1695   {
1696     \msg_error:nnnn { enumext } { command-wrong-place }{ anskey }{ keyanspic }
1697   }
1698   \group_begin:
1699     \bool_if:NF \l__enumext_store_ans_bool
1700     {
1701       \bool_if:NT \l__enumext_check_ans_bool
1702       {
1703         \int_gincr:N \g__enumext_count_item_anskey_int
1704       }
1705       \__enumext_store_anskey_code:nnnn {#1} {#2} {#3} {#4}
1706     }
1707   \group_end:
1708 }

```

(End of definition for `\anskey`. This function is documented on page 10.)

`__enumext_store_anskey_code:nnnn`

The internal function `__enumext_store_anskey_code:nnnn` first we pass the command *⟨argument⟩* to the *⟨prop list⟩*, then checks the state of the variable `\l__enumext_store_ref_key_bool` handled by the `store-ref` key and will call the function `__enumext_store_internal_ref:` for the internal “label and ref” system. Followed by this if the `show-ans` or `show-pos` keys are active we will show the “wrapped” *⟨argument⟩* passed to the command.

```

1709 \cs_new_protected:Npn \__enumext_store_anskey_code:nnnn #1 #2 #3 #4
1710 {
1711   \__enumext_store_addto_prop:n {#4}
1712   \bool_if:NT \l__enumext_store_ref_key_bool
1713   {
1714     \__enumext_store_internal_ref:
1715   }
1716   \__enumext_store_anskey_show_left:n { #4 }

```

Now we start processing the optional arguments passed to the command to build our `\item` in the variable `\l__enumext_store_anskey_arg_tl` which we will “store” in the *⟨sequence⟩*. First we clear the variable `\l__enumext_store_anskey_arg_tl` and process *⟨[key = val]⟩*, if the `store-brk` key is present and the command is running under `enumext` (not in the starred version) we will add `\columnbreak` and then `\item`.

```

1717   \tl_clear:N \l__enumext_store_anskey_arg_tl
1718   \tl_if_novalue:nF {#3}
1719   {
1720     \keys_set:nn { enumext / anskey } {#3}
1721   }
1722   \bool_lazy_and:nnT
1723   { \l__enumext_store_columns_break_bool }
1724   { \bool_not_p:n { \l__enumext_starred_bool } }
1725   {
1726     \tl_put_left:Nn \l__enumext_store_anskey_arg_tl { \columnbreak }
1727   }
1728   \tl_put_right:Nn \l__enumext_store_anskey_arg_tl { \item }

```

Now we will check the *⟨(number)⟩* argument and add it to `\l__enumext_store_anskey_arg_tl` if the command is running under `enumext*` (starred version).

```

1729   \tl_if_novalue:nF {#1}
1730   {
1731     \int_set:Nn \l__enumext_store_columns_join_int {#1}
1732     \bool_if:NT \l__enumext_starred_bool
1733     {
1734       \tl_put_right:Ne \l__enumext_store_anskey_arg_tl
1735       {
1736         ( \exp_not:V \l__enumext_store_columns_join_int )
1737       }
1738     }
1739   }

```

And now we will review the starred argument `*` together with the keys `item-sym` and `item-pos` and pass them to `\l__enumext_store_anskey_arg_tl`.

```

1740 \bool_if:nTF {#2}
1741 {
1742   \tl_put_right:Nn \l__enumext_store_anskey_arg_tl { * }
1743   \tl_if_empty:NF \l__enumext_store_item_symbol_tl
1744   {
1745     \tl_put_right:Ne \l__enumext_store_anskey_arg_tl
1746     {
1747       [ \exp_not:V \l__enumext_store_item_symbol_tl ]
1748     }
1749   }
1750   \dim_compare:nT
1751   {
1752     \l__enumext_store_item_symbol_sep_dim != \c_zero_dim
1753   }
1754   {
1755     \tl_put_right:Ne \l__enumext_store_anskey_arg_tl
1756     {
1757       [ \exp_not:V \l__enumext_store_item_symbol_sep_dim ]
1758     }
1759   }
1760   \tl_put_right:Nn \l__enumext_store_anskey_arg_tl {#4}
1761 }
1762 {
1763   \tl_put_right:Nn \l__enumext_store_anskey_arg_tl {#4}
1764 }

```

Finally we check if the `store-ref` key is active along with the `hyperref` package load, if both conditions are met, it will create the `\hyperlink` and then store in `\sequence`.

```

1765 \bool_lazy_and:nnT
1766 { \l__enumext_store_ref_key_bool }
1767 { \l__enumext_hyperref_bool }
1768 {
1769   \tl_put_right:Ne \l__enumext_store_anskey_arg_tl
1770   {
1771     \hfill \exp_not:N \hyperlink { \exp_not:V \l__enumext_newlabel_arg_one_tl }
1772     { \exp_not:V \l__enumext_mark_ref_sym_tl }
1773   }
1774 }
1775 \l__enumext_store_addto_seq:V \l__enumext_store_anskey_arg_tl
1776 }

```

(End of definition for `\l__enumext_store_anskey_code:nnnn`.)

`\l__enumext_store_internal_ref:`

The function `\l__enumext_store_internal_ref:` handles the internal “*label and ref*” system used by the `store-ref` and `mark-ref` keys for `\anskey` will allow to execute `\ref{<store name>: <position>}` and will return `1.(a).i.A`.

First we will remove the dots “.” from the current `\labels`, we do not want to get double dots in our references, then we will place this in the variable `\l__enumext_newlabel_arg_two_tl`.

```

1777 \cs_new_protected:Nn \l__enumext_store_internal_ref:
1778 {
1779   \cs_set_protected:Npn \l__enumext_tmp:n ##1
1780   {
1781     \tl_set_eq:cc { \l__enumext_label_copy_##1_tl } { \l__enumext_label_##1_tl }
1782     \tl_reverse:c { \l__enumext_label_copy_##1_tl }
1783     \tl_remove_once:cn { \l__enumext_label_copy_##1_tl } { . }
1784     \tl_reverse:c { \l__enumext_label_copy_##1_tl }
1785   }
1786   \clist_map_inline:nn { i, ii, iii, iv, vii } { \l__enumext_tmp:n {##1} }
1787   \cs_set:Npn \l__enumext_tmp:n ##1
1788   { . \tl_use:c { \l__enumext_label_copy_ \int_to_roman:n {##1} _tl } }

```

Here we need to analyse the cases where the environment is started with `enumext` and if `\anskey` is running alone in it or if it is running in a nested `enumext` environment within the starting environment.

```

1789 \bool_lazy_all:nT
1790 {
1791   { \g__enumext_starred_bool }
1792   { \int_compare_p:nNn { \l__enumext_level_int } = { \c_zero_int } }
1793 }
1794 {

```

```

1795         \tl_put_right:Ne \l__enumext_newlabel_arg_two_tl
1796         { \tl_use:N \l__enumext_label_copy_vii_tl }
1797     }
1798     \bool_lazy_all:nT
1799     {
1800         { \l__enumext_standar_bool }
1801         { \g__enumext_starred_bool }
1802         { \int_compare_p:nNn { \l__enumext_level_int } > { \c_zero_int } }
1803     }
1804     {
1805         \tl_put_right:Ne \l__enumext_newlabel_arg_two_tl
1806         {
1807             \tl_use:N \l__enumext_label_copy_vii_tl
1808             \int_step_function:nnN { 1 } { \l__enumext_level_int } \__enumext_tmp:n
1809         }
1810     }

```

If started with `enumext` and if `\anskey` is running alone in it or if it is running in a nested `enumext*` environment within the starting environment.

```

1811     \bool_lazy_all:nT
1812     {
1813         { \l__enumext_standar_bool }
1814         { \int_compare_p:nNn { \l__enumext_level_int } > { \c_zero_int } }
1815         { \int_compare_p:nNn { \l__enumext_level_h_int } = { \c_zero_int } }
1816         { \bool_not_p:n { \l__enumext_starred_bool } }
1817     }
1818     {
1819         \tl_put_right:Ne \l__enumext_newlabel_arg_two_tl
1820         {
1821             \tl_use:N \l__enumext_label_copy_i_tl
1822             \int_step_function:nnN { 2 } { \l__enumext_level_int } \__enumext_tmp:n
1823         }
1824     }
1825     \cs_set:Npn \__enumext_tmp:n ##1
1826     { \tl_use:c { \l__enumext_label_copy_ \int_to_roman:n {##1} _tl } }
1827     \bool_lazy_all:nT
1828     {
1829         { \l__enumext_standar_bool }
1830         { \int_compare_p:nNn { \l__enumext_level_int } > { \c_zero_int } }
1831         { \bool_not_p:n { \g__enumext_starred_bool } }
1832         { \int_compare_p:nNn { \l__enumext_level_h_int } > { \c_zero_int } }
1833     }
1834     {
1835         \tl_put_right:Ne \l__enumext_newlabel_arg_two_tl
1836         {
1837             \int_step_function:nnN { 1 } { \l__enumext_level_int } \__enumext_tmp:n
1838             . \tl_use:N \l__enumext_label_copy_vii_tl
1839         }
1840     }

```

Now we set the variable `\l__enumext_newlabel_arg_one_tl` which will contain $\langle \textit{store name} : \textit{position} \rangle$.

```

1841     \tl_put_right:Ne \l__enumext_newlabel_arg_one_tl
1842     {
1843         \l__enumext_store_name_tl \c_colon_str
1844         \int_eval:n { \prop_count:c { \g__enumext_ \l__enumext_store_name_tl _prop } }
1845     }

```

Now execute the function `__enumext_newlabel:nn` and save the result in the variable `\l__enumext_store_write_aux_file_tl` and finally we write in the `.aux` file.

```

1846     \tl_put_right:Ne \l__enumext_store_write_aux_file_tl
1847     {
1848         \__enumext_newlabel:nn
1849         { \exp_not:V \l__enumext_newlabel_arg_one_tl }
1850         { \l__enumext_newlabel_arg_two_tl }
1851     }
1852     \l__enumext_store_write_aux_file_tl
1853 }

```

(End of definition for `__enumext_store_internal_ref:`)

`__enumext_store_anskey_show_wrap:n`

The function `__enumext_store_anskey_show_wrap:n` “wraps” the $\langle argument \rangle$ passed to `\anskey` when using the `wrap-ans` key.

```

1854 \cs_new_protected:Npn \__enumext_store_anskey_show_wrap:n #1
1855 {
1856   \par
1857   \bool_if:NT \l__enumext_starred_bool
1858   {
1859     \cs_set:Nn \__enumext_level: { vii }
1860   }
1861   \__enumext_print_keyans_box:cc
1862   { \__enumext_labelwidth_ \__enumext_level: _dim }
1863   { \__enumext_labelsep_ \__enumext_level: _dim }
1864   \__enumext_anskey_wrapper:n { #1 }
1865 }

```

(End of definition for `__enumext_store_anskey_show_wrap:n`.)

`__enumext_store_anskey_show_left:n`

The function `__enumext_store_anskey_show_left:n` will show the “mark” defined by the `mark-ans` key or the “position” of the content stored in the $\langle prop list \rangle$ when using the `show-pos` key on the left margin next to the “wraps” $\langle argument \rangle$ passed to `\anskey` on the right side when using the `show-ans` key.

```

1866 \cs_new_protected:Npn \__enumext_store_anskey_show_left:n #1
1867 {
1868   \bool_if:NT \l__enumext_show_answer_bool
1869   {
1870     \__enumext_store_anskey_show_wrap:n { #1 }
1871   }
1872   \bool_if:NT \l__enumext_show_position_bool
1873   {
1874     \tl_set:Nx \l__enumext_mark_answer_sym_tl
1875     {
1876       \group_begin:
1877       \exp_not:N \normalfont
1878       \exp_not:N \footnotesize [ \int_eval:n
1879       {
1880         \prop_count:c { g__enumext_ \l__enumext_store_name_tl _prop }
1881       }
1882       ]
1883       \group_end:
1884     }
1885     \__enumext_store_anskey_show_wrap:n { #1 }
1886   }
1887 }

```

(End of definition for `__enumext_store_anskey_show_left:n`.)

10.25 Common functions for `keyans`, `keyans*` and `keyanspic`

10.25.1 Storing content in prop list

`__enumext_keyans_addto_prop:n`

The function `__enumext_keyans_addto_prop:n` will pass the contents of the current $\langle label \rangle$ `\l__enumext_label_v_tl` for the `keyans` environment and the current $\langle label \rangle$ `\l__enumext_label_vi_tl` for the `keyanspic` environment when using `\item*` and `\anspic*`, followed by the *contents* of the optional argument of both commands to the `\l__enumext_store_keyans_label_tl` variable, which will be passed to the $\langle prop list \rangle$ defined by the `save-ans` key using the `__enumext_store_addto_prop:V`.

```

1888 \cs_new_protected:Npn \__enumext_keyans_addto_prop:n #1
1889 {
1890   \tl_clear:N \l__enumext_store_keyans_label_tl
1891   \int_compare:nNnTF { \l__enumext_keyans_pic_level_int } = { 1 }
1892   {
1893     \tl_put_right:Ne \l__enumext_store_keyans_label_tl { \l__enumext_label_vi_tl }
1894   }
1895   {
1896     \tl_put_right:Ne \l__enumext_store_keyans_label_tl { \l__enumext_label_v_tl }
1897   }
1898   \tl_if_novalue:nF { #1 }
1899   {
1900     \tl_put_right:Ne \l__enumext_store_keyans_label_tl { \c_space_tl #1 }
1901   }
1902   \__enumext_store_addto_prop:V \l__enumext_store_keyans_label_tl
1903 }

```

(End of definition for `__enumext_keyans_addto_prop:n`.)

10.25.2 The store-ref key for keyans, keyans* and keyanspic

The internal “*label and ref*” system for the `keyans`, `keyans*` and `keyanspic` environments has slight differences with the one implemented for the `\anskey` command, basically because in this environments we are interested in the current *⟨label⟩*. The mechanism defined here will allow to execute `\ref{⟨store name : position⟩}` and will return 1. (A).

```
\__enumext_keyans_store_ref:
  \__enumext_keyans_store_ref_aux_i:
  \__enumext_keyans_store_ref_aux_ii:
```

The function `__enumext_keyans_store_ref:` handles the internal “*label and ref*” system used by the store-ref key for `\item*` and `\anspic*` commands. First we will create copies of the current *⟨labels⟩* and remove the dots “.” from them, we do not want to get double dots in our references.

```
1904 \cs_new_protected:Nn \__enumext_keyans_store_ref:
1905 {
1906   \bool_if:NT \l__enumext_store_ref_key_bool
1907   {
1908     \cs_set_protected:Npn \__enumext_tmp:n ##1
1909     {
1910       \tl_set_eq:cc { \__enumext_label_copy_##1_tl } { \__enumext_label_##1_tl }
1911       \tl_reverse:c { \__enumext_label_copy_##1_tl }
1912       \tl_remove_once:cn { \__enumext_label_copy_##1_tl } { . }
1913       \tl_reverse:c { \__enumext_label_copy_##1_tl }
1914     }
1915     \clist_map_inline:nn { i, v, vi, vii, viii } { \__enumext_tmp:n {##1} }
1916     \__enumext_keyans_store_ref_aux_i:
1917   }
1918 }
```

The auxiliary function `__enumext_keyans_store_ref_aux_i:` set the variable `\l__enumext_newlabel_arg_one_tl` which will contain *⟨{store name : position}⟩* analyzing whether the environment in which they are executed is `enumext*` or `enumext`.

```
1919 \cs_new_protected:Nn \__enumext_keyans_store_ref_aux_i:
1920 {
1921   \bool_if:NT \g__enumext_starred_bool
1922   {
1923     \tl_set_eq:NN \__enumext_label_copy_i_tl \__enumext_label_copy_vii_tl
1924   }
1925   \int_compare:nNnT { \__enumext_keyans_pic_level_int } = { 1 }
1926   {
1927     \tl_put_right:Ne \__enumext_newlabel_arg_two_tl
1928     { \__enumext_label_copy_i_tl . \__enumext_label_copy_vi_tl }
1929   }
1930   \int_compare:nNnT { \__enumext_keyans_level_int } = { 1 }
1931   {
1932     \tl_put_right:Ne \__enumext_newlabel_arg_two_tl
1933     { \__enumext_label_copy_i_tl . \__enumext_label_copy_v_tl }
1934   }
1935   \int_compare:nNnT { \__enumext_keyans_level_h_int } = { 1 }
1936   {
1937     \tl_put_right:Ne \__enumext_newlabel_arg_two_tl
1938     { \__enumext_label_copy_i_tl . \__enumext_label_copy_viii_tl }
1939   }
1940   \tl_put_right:Ne \__enumext_newlabel_arg_one_tl
1941   {
1942     \l__enumext_store_name_tl \c_colon_str
1943     \int_eval:n { \prop_count:c { g__enumext_ \l__enumext_store_name_tl _prop } }
1944   }
1945   \__enumext_keyans_store_ref_aux_ii:
1946 }
```

Now auxiliary function `__enumext_keyans_store_ref_aux_ii:` save the result in the variable `\l__enumext_store_write_aux_file_tl` and finally we write in the `.aux` file.

```
1947 \cs_new_protected:Nn \__enumext_keyans_store_ref_aux_ii:
1948 {
1949   \tl_put_right:Ne \l__enumext_store_write_aux_file_tl
1950   {
1951     \__enumext_newlabel:nn
1952     { \exp_not:V \__enumext_newlabel_arg_one_tl }
1953     { \__enumext_newlabel_arg_two_tl }
1954   }
1955   \l__enumext_store_write_aux_file_tl
1956 }
```

(End of definition for `__enumext_keyans_store_ref:`, `__enumext_keyans_store_ref_aux_i:`, and `__enumext_keyans_store_ref_aux_ii:`.)

10.25.3 Storing content in sequence

`__enumext_keyans_addto_seq:n`
`__enumext_keyans_addto_seq_link:`

The function `__enumext_keyans_addto_seq:n` will pass the contents of the current *⟨label⟩* `\l__enumext_label_v_tl` for the `keyans` environment and the `\l__enumext_label_vi_tl` for the `keyanspic` environment when using `\item*` and `\anspic*`, followed by the *⟨contents⟩* of the optional argument of both commands to the `\l__enumext_store_keyans_label_tl` variable to the sequence defined by the `save-ans` key.

```

1957 \cs_new_protected:Npn \__enumext_keyans_addto_seq:n #1
1958 {
1959   \tl_clear:N \l__enumext_store_keyans_label_tl
1960   \int_compare:nNnTF { \l__enumext_keyans_pic_level_int } = { 1 }
1961   {
1962     \tl_put_right:Ne \l__enumext_store_keyans_label_tl { \item \l__enumext_label_vi_tl }
1963   }
1964   {
1965     \tl_put_right:Ne \l__enumext_store_keyans_label_tl { \item \l__enumext_label_v_tl }
1966   }
1967   \tl_if_novalue:nF { #1 }
1968   {
1969     \tl_put_right:Ne \l__enumext_store_keyans_label_tl { \c_space_tl #1 }
1970   }
1971   \__enumext_keyans_addto_seq_link:
1972 }

```

Checks if the `store-ref` key is active along with the `hyperref` package load, if both conditions are met, it will create the `\hyperlink` and then store using the `__enumext_store_addto_seq:V` function. Finally, copy the contents of the variable `\l__enumext_store_keyans_label_tl` into the global variable `\g__enumext_check_ans_item_tl` to be used by the function `__enumext_keyans_check_ans:nn` and increment the value of the integer variable `\g__enumext_count_item_with_ans_int` handled by the `check-ans` key.

```

1973 \cs_new_protected:Nn \__enumext_keyans_addto_seq_link:
1974 {
1975   \bool_lazy_and:nnT
1976   { \l__enumext_store_ref_key_bool }
1977   { \l__enumext_hyperref_bool }
1978   {
1979     \tl_put_right:Ne \l__enumext_store_keyans_label_tl
1980     {
1981       \hfill \exp_not:N \hyperlink
1982       {
1983         \exp_not:V \l__enumext_newlabel_arg_one_tl
1984       }
1985       { \exp_not:V \l__enumext_mark_ref_sym_tl }
1986     }
1987   }
1988   \__enumext_store_addto_seq:V \l__enumext_store_keyans_label_tl
1989   \tl_gset:NV \g__enumext_check_ans_item_tl \l__enumext_store_keyans_label_tl
1990   \bool_if:NT \l__enumext_check_ans_bool
1991   {
1992     \int_gincr:N \g__enumext_count_item_with_ans_int
1993   }
1994 }

```

(End of definition for `__enumext_keyans_addto_seq:n` and `__enumext_keyans_addto_seq_link:`.)

10.25.4 Check for starred commands

`__enumext_keyans_check_ans:nn`

The function `__enumext_keyans_check_ans:nn` performs an extra check for the `keyans` and `keyanspic` environments. Unlike the check executed by `check-ans` key this one is not controlled by any key, it is intended to prevent the forgetting of `\item*` or `\anspic*` in these environments.

```

1995 \cs_new_protected:Npn \__enumext_keyans_check_ans:nn #1 #2
1996 {
1997   \tl_if_empty:NTF \g__enumext_check_ans_item_tl
1998   {
1999     \msg_warning:nnnn { enumext } { missing-starred } { #1 } { #2 }
2000   }
2001   { \tl_gclear:N \g__enumext_check_ans_item_tl }
2002 }

```

(End of definition for `__enumext_keyans_check_ans:nn`.)

10.25.5 The show-ans and show-pos keys for keyans and keyanspic

The code is very similar to the `\anskey` code, but, if I change the order of the operations the counter off $\langle label \rangle$ are incorrect.

`__enumext_keyans_show_left:n`

Common function to show *starred commands* `\item*` and $\langle position \rangle$ of stored content in $\langle prop list \rangle$ for `keyans` and `keyanspic`. Need add 1 to `\l__enumext_show_position_bool` for `keyans` environment.

```

2003 \cs_new_protected:Npn \__enumext_keyans_show_left:n #1
2004 {
2005   \bool_if:NT \l__enumext_show_answer_bool
2006   {
2007     \tl_put_left:Nn \l__enumext_label_v_tl
2008     {
2009       \__enumext_print_keyans_box:NN
2010       \l__enumext_labelwidth_i_dim
2011       \l__enumext_labelsep_i_dim
2012     }
2013     \tl_if_novalue:nF { #1 }
2014     { \tl_put_right:Nn \l__enumext_label_v_tl { \c_space_tl [ #1 ] } }
2015   }
2016   \bool_if:NT \l__enumext_show_position_bool
2017   {
2018     \tl_set:Ne \l__enumext_mark_answer_sym_tl
2019     {
2020       \group_begin:
2021       \exp_not:N \normalfont
2022       \exp_not:N \footnotesize [ \int_eval:n
2023       {
2024         \prop_count:c { g__enumext_ \l__enumext_store_name_tl _prop } + \c_one_int
2025       }
2026       ]
2027       \group_end:
2028     }
2029     \tl_put_left:Nn \l__enumext_label_v_tl
2030     {
2031       \__enumext_print_keyans_box:NN
2032       \l__enumext_labelwidth_i_dim
2033       \l__enumext_labelsep_i_dim
2034     }
2035     \tl_if_novalue:nF { #1 }
2036     { \tl_put_right:Nn \l__enumext_label_v_tl { \c_space_tl [ #1 ] } }
2037   }
2038 }

```

(End of definition for `__enumext_keyans_show_left:n`.)

10.26 Setting item-sym* and item-pos* keys

In order to have a cleaner implementation of `\item*` it is best to define a couple of keys that allow us to control and set by default the $\langle symbol \rangle$ and its $\langle offset \rangle$.

`item-sym*`

Define and set `item-sym*` and `item-pos*` keys for `enumext` and `enumext*`.

`item-pos*`

```

2039 \cs_set_protected:Npn \__enumext_tmp:nn #1 #2
2040 {
2041   \keys_define:nn { enumext / #1 }
2042   {
2043     item-sym* .tl_set:c = { \l__enumext_item_symbol_#2_tl },
2044     item-sym* .value_required:n = true,
2045     item-sym* .initial:n = { $\star$ },
2046     item-pos* .dim_set:c = { \l__enumext_item_symbol_sep_#2_dim },
2047     item-pos* .value_required:n = true,
2048   }
2049 }
2050 \clist_map_inline:nn
2051 {
2052   {level-1}{i}, {level-2}{ii}, {level-3}{iii}, {level-4}{iv}, {enumext*}{vii}
2053 }
2054 { \__enumext_tmp:nn #1 }

```

(End of definition for `item-sym*` and `item-pos*`.)

10.27 Redefining `\footnote` command

```

\__enumext_footnotetext:nn
\__enumext_renew_footnote:
\__enumext_print_footnote:

```

To keep the correct numbering of `\footnote` and to make it work correctly with the `mini-env` key and in the `enumext*` and `keyans*` environments, it is necessary to redefine the command. This implementation is adapted from the answer given by Clea F. Rees (@cfr) in [footnotes in boxes compatible with hyperref](#).

```

2055 \cs_new_protected:Nn \__enumext_footnotetext:nn
2056 {
2057   \footnotetext[#1]{#2}
2058 }
2059 \cs_new_protected:Nn \__enumext_renew_footnote:
2060 {
2061   \seq_gclear:N \g__enumext_footnote_arg_seq
2062   \seq_gclear:N \g__enumext_footnote_int_seq
2063   \RenewDocumentCommand \footnote { o +m }
2064   {
2065     \tl_if_novalue:nTF {##1}
2066     {
2067       \stepcounter{footnote}
2068       \int_gset_eq:Nc \g__enumext_footnote_int { c@footnote }
2069     }
2070     {
2071       \int_gset:Nn \g__enumext_footnote_int { ##1 }
2072     }
2073     \footnotemark [ \g__enumext_footnote_int ]
2074     \seq_gput_right:Nn \g__enumext_footnote_arg_seq { ##2 }
2075     \seq_gput_right:NV \g__enumext_footnote_int_seq \g__enumext_footnote_int
2076   }
2077 }
2078 \cs_new_protected:Nn \__enumext_print_footnote:
2079 {
2080   \seq_if_empty:NF \g__enumext_footnote_int_seq
2081   {
2082     \seq_map_pairwise_function:NNN
2083     \g__enumext_footnote_int_seq
2084     \g__enumext_footnote_arg_seq
2085     \__enumext_footnotetext:nn
2086   }
2087 }

```

(End of definition for `__enumext_footnotetext:nn`, `__enumext_renew_footnote:`, and `__enumext_print_footnote:`)

10.28 Redefining `\item` command

Redefining the `\item` command is not as simple as I thought. This command works in conjunction with the `\makelabel` command so I have to redefine both of them, in addition to this, we will have to use a couple of *global* variables to pass the values from one command to the other.

10.28.1 The `\item` command in `enumext`

```

\__enumext_default_item:n

```

The `\item` and `\item[custom]` commands work in the usual way on `enumext`.

First we will see if the optional argument is present, if it is NOT present we will check the state of the variable `\l__enumext_check_ans_bool` set by the key `check-ans`, set the boolean variable `\l__enumext_wrap_label_X_bool` to “true” and execute `__enumext_item_std:w`.

Otherwise we will check the state of the boolean variable `\l__enumext_wrap_label_opt_X_bool` set by the key `wrap-label*` and execute `__enumext_item_std:w` with the optional argument.

The boolean variable `\l__enumext_wrap_label_X_bool` is used by the function `__enumext_make_label:` (§10.29).

```

2088 \cs_new_protected:Npn \__enumext_default_item:n #1
2089 {
2090   \tl_if_novalue:nTF {#1}
2091   {
2092     \bool_if:NT \l__enumext_check_ans_bool
2093     {
2094       \int_gincr:N \g__enumext_count_item_number_int
2095     }
2096     \bool_set_true:c { l__enumext_wrap_label_ \__enumext_level: _bool }
2097     \__enumext_item_std:w \tl_use:c { l__enumext_fake_item_indent_ \__enumext_level: _tl }
2098   }
2099   {
2100     \bool_set_eq:cc
2101     { l__enumext_wrap_label_ \__enumext_level: _bool }

```

```

2102         { l__enumext_wrap_label_opt_ \__enumext_level: _bool }
2103         \__enumext_item_std:w [#1] \tl_use:c { l__enumext_fake_item_indent_ \__enumext_level: _tl
2104     }
2105 }

```

(End of definition for __enumext_default_item:n.)

__enumext_starred_item:nn

The `\item*`, `\item*[\langle symbol \rangle]` and `\item*[\langle symbol \rangle][\langle offset \rangle]` works like the numbered `\item`, but placing a `[\langle symbol \rangle]` to the “left” of the `\label` separated from it by the value set by the `labelsep` key and can be *offset* using the second optional argument `[\langle offset \rangle]`.

#1: \l__enumext_item_symbol_X_tl

#2: \l__enumext_item_symbol_sep_X_dim

First we will make a copy of `\l__enumext_item_symbol_X_tl` which is set by the key `item-sym*` or passed as optional argument in the global variable `\g__enumext_item_symbol_tl`, followed by setting the variable `\l__enumext_item_symbol_sep_X_dim` set by the key `item*-sep` or by the second optional argument.

Then we will see the state of the variable `\l__enumext_check_ans_bool` set by the key `check-ans`, set the boolean variable `\l__enumext_wrap_label_X_bool` to “true” and execute `__enumext_item_std:w`.

In this function the optional argument of `__enumext_item_std:w` is omitted, we only want it to be numbered.

The boolean variable `\l__enumext_wrap_label_X_bool` and the vars `\l__enumext_item_symbol_sep_X_dim`, `\g__enumext_item_symbol_tl` are used by the function `__enumext_make_label:` (§10.29).

```

2106 \cs_new_protected:Npn \__enumext_starred_item:nn #1 #2
2107 {
2108     \tl_if_novalue:nF {#1}
2109     {
2110         \tl_set:cn { l__enumext_item_symbol_ \__enumext_level: _tl } {#1}
2111     }
2112     \tl_gset_eq:Nc \g__enumext_item_symbol_tl { l__enumext_item_symbol_ \__enumext_level: _tl }
2113     \tl_if_novalue:nTF {#2}
2114     {
2115         \dim_set_eq:cc
2116         { l__enumext_item_symbol_sep_ \__enumext_level: _dim }
2117         { l__enumext_labelsep_ \__enumext_level: _dim }
2118     }
2119     {
2120         \dim_set:cn { l__enumext_item_symbol_sep_ \__enumext_level: _dim } {#2}
2121     }
2122     \bool_if:NT \l__enumext_check_ans_bool
2123     {
2124         \int_gincr:N \g__enumext_count_item_number_int
2125     }
2126     \bool_set_true:c { l__enumext_wrap_label_ \__enumext_level: _bool }
2127     \__enumext_item_std:w \tl_use:c { l__enumext_fake_item_indent_ \__enumext_level: _tl }
2128 }

```

(End of definition for __enumext_starred_item:nn.)

__enumext_redefine_item:

The function `__enumext_redefine_item:` will redefine the `\item` command in the `enumext` environment for the internal mechanism of check-answers for `check-ans` key and adding the starred `\item*` version.

This function is passed to `__enumext_list_arg_two_X:` which is used in the definition of the `enumext` environment (§10.31).

```

2129 \cs_new_protected:Npn \__enumext_redefine_item:
2130 {
2131     \RenewDocumentCommand \item { s o o }
2132     {
2133         \bool_if:nTF {##1}
2134         {
2135             \__enumext_starred_item:nn {##2} {##3}
2136         }
2137         { \__enumext_default_item:n {##2} }
2138     }
2139 }

```

(End of definition for __enumext_redefine_item:.)

10.28.2 The `\item` command in keyans

The `\item*` and `\item*[\langle content \rangle]` commands *store* the current $\langle label \rangle$ next to the $[\langle content \rangle]$ if it is present in the $\langle sequence \rangle$ and $\langle prop list \rangle$ defined by *save-ans* key.

`__enumext_keyans_default_item:n`

The function `__enumext_keyans_default_item:n` executes the original behavior of the `\item`.

```

2140 \cs_new_protected:Npn \__enumext_keyans_default_item:n #1
2141 {
2142   \tl_if_novalue:nTF { #1 }
2143   {
2144     \bool_set_true:N \__enumext_wrap_label_v_bool
2145     \__enumext_item_std:w \tl_use:N \__enumext_fake_item_indent_v_tl
2146   }
2147   {
2148     \bool_set_eq:NN \__enumext_wrap_label_v_bool \__enumext_wrap_label_opt_v_bool
2149     \__enumext_item_std:w [#1] \tl_use:N \__enumext_fake_item_indent_v_tl
2150   }
2151 }

```

(End of definition for `__enumext_keyans_default_item:n`.)

`__enumext_keyans_starred_item:n`

The function `__enumext_keyans_starred_item:n` which will make a temporary copy of the current $\langle label \rangle$, execute the *show-ans* or *show-pos* keys using the function `__enumext_keyans_show_left:n` and will display the contents of that item using the internal copy `__enumext_item_std:w`, this is necessary to prevent incrementing the current “counter” of the original $\langle label \rangle$.

```

2152 \cs_new_protected:Npn \__enumext_keyans_starred_item:n #1
2153 {
2154   \tl_set_eq:NN \__enumext_keyans_tmpa_tl \__enumext_label_v_tl
2155   \__enumext_keyans_show_left:n { #1 }
2156   \bool_set_true:N \__enumext_wrap_label_v_bool
2157   \__enumext_item_std:w \tl_use:N \__enumext_fake_item_indent_v_tl

```

Recover the original value of the current $\langle label \rangle$ and *store* it first in the $\langle prop list \rangle$ (including the optional argument), run the internal “*label and ref*” system if the *store-ref* key is active and finally *store* it in the $\langle sequence \rangle$.

```

2158   \tl_set_eq:NN \__enumext_label_v_tl \__enumext_keyans_tmpa_tl
2159   \__enumext_keyans_addto_prop:n { #1 }
2160   \__enumext_keyans_store_ref:
2161   \__enumext_keyans_addto_seq:n { #1 }
2162 }

```

(End of definition for `__enumext_keyans_starred_item:n`.)

`\item*`

`__enumext_keyans_redefine_item:`

The function `__enumext_keyans_redefine_item:` is responsible for adding the *starred* and *optional* argument by the `__enumext_list_arg_two_v:` function in the definition of the *keyans* environment. Here we need to use `\peek_remove_spaces:n` to prevent an unwanted space when using `\item*` in conjunction with the *itemindent* key.

This function is passed to `__enumext_list_arg_two_v:` which is used in the definition of the *keyans* environment (§10.31).

```

2163 \cs_new_protected:Nn \__enumext_keyans_redefine_item:
2164 {
2165   \RenewDocumentCommand \item { s o }
2166   {
2167     \bool_if:nTF {##1}
2168     {
2169       \peek_remove_spaces:n
2170       {
2171         \__enumext_keyans_starred_item:n {##2}
2172       }
2173     }
2174     {
2175       \__enumext_keyans_default_item:n {##2}
2176     }
2177   }
2178 }

```

(End of definition for `\item*` and `__enumext_keyans_redefine_item:`. This function is documented on page 11.)

10.29 Redefining `\makelabel` command

Redefine `\makelabel` for the keys *align*, *font*, *wrap-label*, *wrap-label** and `\item*` for *enumext* and *keyans* environments.

10.29.1 Redefining \makelabel for enumext

`__enumext_item_starred:` The function `__enumext_item_starred:` will be responsible for executing `\item*` for the `enumext` environment.

```
2179 \cs_new_protected:Nn \__enumext_item_starred:
2180 {
2181   \tl_if_empty:cF { \__enumext_item_symbol_ \__enumext_level: _tl }
2182   {
2183     \mode_leave_vertical:
2184     \skip_horizontal:n { -\dim_use:c { \__enumext_item_symbol_sep_ \__enumext_level: _dim } }
2185     \makebox[0pt][r]{ \g__enumext_item_symbol_tl }
2186     \skip_horizontal:n { \dim_use:c { \__enumext_item_symbol_sep_ \__enumext_level: _dim } }
2187   }
2188 }
```

(End of definition for `__enumext_item_starred:`.)

`__enumext_make_label:` The function `__enumext_make_label:` redefine `\makelabel` for the `enumext` environment. This function is passed to `__enumext_list_arg_two_X:` which is used in the definition of the `enumext` environment (§10.31).

```
2189 \cs_new_protected:Nn \__enumext_make_label:
2190 {
2191   \RenewDocumentCommand \makelabel { m }
2192   {
2193     \tl_use:c { \__enumext_label_fill_left_ \__enumext_level: _tl }
2194     \tl_use:c { \__enumext_label_font_style_ \__enumext_level: _tl }
2195     \bool_if:cTF { \__enumext_wrap_label_ \__enumext_level: _bool }
2196     {
2197       \__enumext_item_starred:
2198       \use:c { __enumext_wrapper_label_ \__enumext_level: :n } { ##1 }
2199     }
2200     { ##1 }
2201     \tl_use:c { \__enumext_label_fill_right_ \__enumext_level: _tl }
2202     \tl_gclear:N \g__enumext_item_symbol_tl
2203   }
2204 }
```

(End of definition for `__enumext_make_label:`.)

10.29.2 Redefining \makelabel for keyans

`__enumext_keyans_make_label:` The function `__enumext_keyans_make_label:` redefine `\makelabel` for `keyans` environment. This function is passed to `__enumext_list_arg_two_v:` which is used in the definition of the `keyans` environment (§10.31).



```
2205 \cs_new_protected:Nn \__enumext_keyans_make_label:
2206 {
2207   \RenewDocumentCommand \makelabel { m }
2208   {
2209     \tl_use:N \l__enumext_label_fill_left_v_tl
2210     \tl_use:N \l__enumext_label_font_style_v_tl
2211     \bool_if:NTF \l__enumext_wrap_label_v_bool
2212     {
2213       \__enumext_wrapper_label_v:n { ##1 }
2214     }
2215     { ##1 }
2216     \tl_use:N \l__enumext_label_fill_right_v_tl
2217   }
2218 }
```

(End of definition for `__enumext_keyans_make_label:`.)

10.30 Calculation of \leftmargin and \itemindent

Consider the figure 9 where the default margins (on the left) of a list are represented. The idea is to have control over these margins so that our list does not overlap the left margin of the page. The *key* relationship is that the right edge of the `\labelsep` equals the right edge of the `\itemindent`, so that the left edge of the *label box* is at `\leftmargin+\itemindent` minus `\labelwidth+\labelsep`. Thus, the handling of the margins by the package will be as shown in the figure 10. Where the default values will look like in the figure 11.

`__enumext_calc_hspace:NNNNNNN` The function `__enumext_calc_hspace:NNNNNNN` takes seven arguments to be able to determine horizontal spaces for all list environment:
`__enumext_calc_hspace:cccccc`

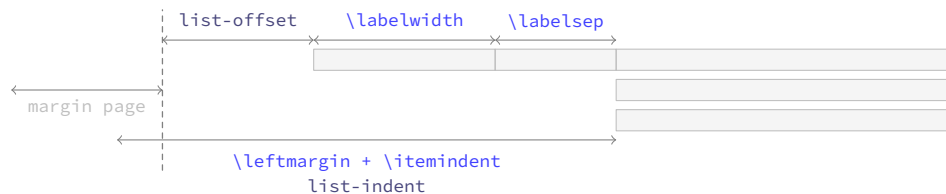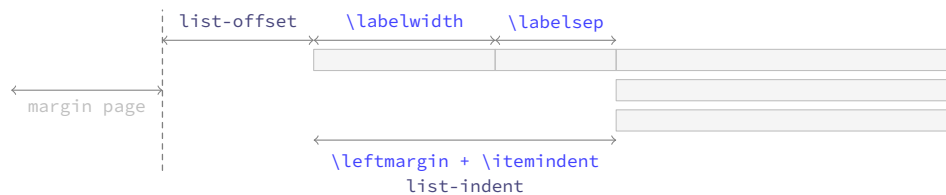Figure 9: Representation of standard horizontal lengths in `list` environment.Figure 10: Representation of horizontal lengths concept in list in `enumext`.

```
#1: \l__enumext_labelwidth_X_dim      #2: \l__enumext_labelsep_X_dim
#3: \l__enumext_listoffset_X_dim      #4: \l__enumext_leftmargin_tmp_X_dim
#5: \l__enumext_leftmargin_X_dim      #6: \l__enumext_itemindent_X_dim
#7: \l__enumext_leftmargin_tmp_X_bool
```

And returns the “adjusted” values of `\leftmargin` and `\itemindent`.

This function is passed to `__enumext_list_arg_two_X:` which is used in the definition of the `enumext` and `keyans` environments (§10.31).


```
2219 \cs_new_protected:Npn \__enumext_calc_hspace:NNNNNN #1 #2 #3 #4 #5 #6 #7
2220 {
2221   \dim_compare:nNnT { #1 } < { \c_zero_dim }
2222   {
2223     \msg_warning:nnnV { enumext } { width-non-positive } { labelwidth } { #1 }
2224     \dim_set:Nn #1 { \dim_abs:n { #1 } }
2225   }
2226   \dim_compare:nNnT { #2 } < { \c_zero_dim }
2227   {
2228     \msg_warning:nnnV { enumext } { width-negative } { labelsep } { #2 }
2229     \dim_set:Nn #2 { \dim_abs:n { #2 } }
2230   }
2231 }
```

If no value has been passed to the `labelwidth` and `labelsep` keys we set the default values for `\l__enumext_leftmargin_tmp_X_dim`.

```
2231 \bool_if:nF #7 { \dim_set:Nn #4 { #1 + #2 } }
```

We now analyze the cases and set the values for `\leftmargin` and `\itemindent`.

```
2232 \dim_compare:nNnTF { #4 } < { \c_zero_dim }
2233 {
2234   \dim_set:Nn #6 { #1 + #2 - #4 }
2235   \dim_set:Nn #5 { #1 + #2 + #3 - #6 }
2236 }
2237 {
2238   \dim_compare:nNnT { #4 } = { #1 + #2 }
2239   { \dim_set:Nn #6 { \c_zero_dim } }
2240   \dim_compare:nNnT { #4 } < { #1 + #2 }
2241   { \dim_set:Nn #6 { #1 + #2 - #4 } }
2242   \dim_compare:nNnT { #4 } > { #1 + #2 }
2243   {
2244     \dim_set:Nn #6 { -#1 - #2 + #4 }
2245     \dim_set:Nn #6 { #6*-1 }
2246   }
2247 }
```

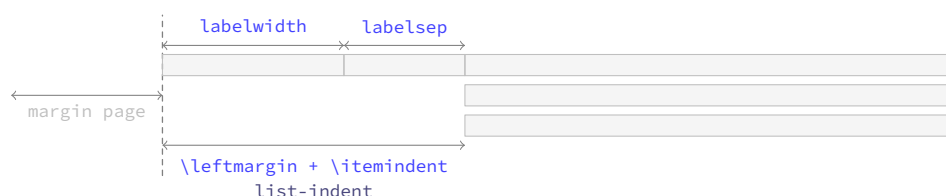Figure 11: Default horizontal lengths in `enumext`.

```

2247         \dim_set:Nn #5 { #1 + #2 + #3 - #6 }
2248     }
2249 }
2250 \cs_generate_variant:Nn \__enumext_calc_hspace:NNNNNNN { cccccc }

```

(End of definition for `__enumext_calc_hspace:NNNNNNN`.)

10.31 Setting second argument of the lists

At this point of the code we have already programmed the necessary tools to create a custom `list` environment, remember that the function `__enumext_start_list:nn` takes two arguments, the first one we have ready, the second one we will define for all the levels of the environment `enumext` and the environment `keyans`.

In this function for the second list argument we will implement the keys `start`, `resume` and `show-length` together with the redefinition of `\item` for `enumext` and `keyans` environments.

We will “not set” `\leftmargini`, `\leftmarginii`, `\leftmarginiii` or `\leftmarginiv`, in this case, we will directly set the parameters for vertical and horizontal list spacing per level.

```

2251 \cs_set_protected:Npn \__enumext_tmp:n #1
2252 {
2253     \cs_new_protected:cpn { __enumext_list_arg_two_#1: }
2254     {
2255         \__enumext_calc_hspace:ccccc
2256         { \__enumext_labelwidth_#1_dim } { \__enumext_labelsep_#1_dim }
2257         { \__enumext_listoffset_#1_dim } { \__enumext_leftmargin_tmp_#1_dim }
2258         { \__enumext_leftmargin_#1_dim } { \__enumext_itemindent_#1_dim }
2259         { \__enumext_leftmargin_tmp_#1_bool }
2260         \clist_map_inline:nn
2261         { labelsep, labelwidth, itemindent, leftmargin, rightmargin, listparindent }
2262         { \dim_set_eq:cc {####1} { \__enumext_####1_#1_dim } }
2263         \clist_map_inline:nn { topsep, parsep, partopsep, itemsep }
2264         { \skip_set_eq:cc {####1} { \__enumext_####1_#1_skip } }
2265         \usecounter { enumX#1 }
2266         \bool_lazy_and:nnTF
2267         { \str_if_eq_p:nn {#1} { i } }
2268         { \bool_if_p:N \__enumext_resume_bool }
2269         { \setcounter { enumXi } { \int_eval:n { \g__enumext_resume_int } } }
2270         {
2271             \setcounter { enumX#1 }
2272             { \int_eval:n { \int_use:c { \__enumext_start_#1_int } - 1 } }
2273         }
2274         \str_if_eq:nnTF {#1} { v }
2275         {
2276             \__enumext_keyans_redefine_item:
2277             \__enumext_keyans_make_label:
2278             \__enumext_keyans_fake_item:
2279             \bool_if:cT { \__enumext_show_length_#1_bool }
2280             {
2281                 \msg_term:nnnn { enumext } { list-lengths-not-nested } { v } { keyans }
2282             }
2283         }
2284         {
2285             \__enumext_redefine_item:
2286             \__enumext_make_label:
2287             \__enumext_use_key_ref:
2288             \__enumext_fake_item:
2289             \bool_if:cT { \__enumext_show_length_#1_bool }
2290             {
2291                 \msg_term:nnne { enumext } { list-lengths } {#1} { \int_use:N \__enumext_level_int }
2292             }
2293         }
2294     }
2295 }
2296 \clist_map_inline:nn { i, ii, iii, iv, v } { \__enumext_tmp:n {#1} }

```

(End of definition for `__enumext_list_arg_two_i: and others`.)

For the horizontal environments `enumext*` and `keyans*` the implementation is similar, but, the value of `\partopsep` is always `\opt`. At this point we will modify the `parsep` key to make it take the value of the `itemsep` key and later, in the environment definition, we will modify `parindent` to make it set the value of `lisparindent` and `parsep` to set the value of `\parskip` locally.

```

2297 \cs_set_protected:Npn \__enumext_tmp:n #1
2298 {
2299   \cs_new_protected:cpn { __enumext_list_arg_two_#1: }
2300   {
2301     \__enumext_calc_hspace:ccccc
2302     { \__enumext_labelwidth_#1_dim } { \__enumext_labelsep_#1_dim }
2303     { \__enumext_listoffset_#1_dim } { \__enumext_leftmargin_tmp_#1_dim }
2304     { \__enumext_leftmargin_#1_dim } { \__enumext_itemindent_#1_dim }
2305     { \__enumext_leftmargin_tmp_#1_bool }
2306     \clist_map_inline:nn
2307       { labelsep, labelwidth, itemindent, leftmargin, rightmargin, listparindent }
2308       { \dim_set_eq:cc {####1} { \__enumext_####1_#1_dim } }
2309     \clist_map_inline:nn { topsep, parsep, partopsep, itemsep }
2310       { \skip_set_eq:cc {####1} { \__enumext_####1_#1_skip } }
2311     \skip_set_eq:Nc \parsep { \__enumext_itemsep_#1_skip }
2312     \skip_zero:N \partopsep
2313     \usecounter { enumX#1 }
2314     \bool_lazy_and:nnTF
2315       { \str_if_eq_p:nn {#1} { vii } } { \bool_if_p:N \__enumext_resume_vii_bool }
2316       { \setcounter { enumXvii } { \int_eval:n { \g__enumext_resume_vii_int } } }
2317       {
2318         \setcounter { enumX#1 }
2319         { \int_eval:n { \int_use:c { \__enumext_start_#1_int } - 1 } }
2320       }
2321     \__enumext_use_key_ref_h:
2322     \str_if_eq:nnTF {#1} { vii }
2323     {
2324       \__enumext_fake_item_vii:
2325       \bool_if:cT { \__enumext_show_length_vii_bool }
2326       { \msg_term:nnnn { enumext } { list-lengths-not-nested } { vii } { enumext* } }
2327     }
2328     {
2329       \__enumext_fake_item_viii:
2330       \bool_if:cT { \__enumext_show_length_#1_bool }
2331       { \msg_term:nnnn { enumext } { list-lengths-not-nested } { #1 } { keyans* } }
2332     }
2333   }
2334 }
2335 \clist_map_inline:nn { vii, viii } { \__enumext_tmp:n {#1} }

```

(End of definition for __enumext_list_arg_two_vii: and __enumext_list_arg_two_viii:.)

10.32 The environment enumext

enumext We create the **enumext** environment based on **list** environment by levels.

```

2336 \NewDocumentEnvironment{enumext}{0}{}
2337 {
2338   \__enumext_current_env:
2339   \__enumext_safe_exec:
2340   \__enumext_parse_keys:n {#1}
2341   \__enumext_before_list:
2342   \__enumext_start_store_level:
2343   \__enumext_start_list:nn
2344   { \tl_use:c { \__enumext_label_ \__enumext_level: _tl } }
2345   {
2346     \use:c { __enumext_list_arg_two_ \__enumext_level: : }
2347     \__enumext_before_keys_exec:
2348   }
2349   \__enumext_after_args_exec:
2350 }
2351 {
2352   \__enumext_stop_list:
2353   \__enumext_stop_store_level:
2354   \__enumext_after_list:
2355 }

```

(End of definition for enumext. This function is documented on page 4.)

__enumext_safe_exec: First check the maximum nesting level for the **enumext** environment and set the state of the booleans **__enumext_standar_bool** and **\g__enumext_standar_bool** to “true”, the latter only if the environment is NOT nested in the **enumext*** environment.

```

2356 \cs_new_protected:Nn \__enumext_safe_exec:

```

```

2357 {
2358   \int_incr:N \l__enumext_level_int
2359   \int_compare:nNt { \l__enumext_level_int } > { 4 }
2360   { \msg_fatal:nn { enumext } { list-too-deep } }
2361   \bool_set_true:N \l__enumext_standar_bool
2362 }

```

(End of definition for `__enumext_safe_exec:`)

`__enumext_parse_keys:n` Parse [`<key = val>`] by levels in `enumext`. If the variable `\l__enumext_store_active_bool` is true it will call the function `__enumext_parse_store_keys:n` and reprocess the `<keys>` to pass them to the storage sequence.

```

2363 \cs_new_protected:Npn \__enumext_parse_keys:n #1
2364 {
2365   \exp_args:Ne \keys_set:nn
2366   { enumext / level-\int_use:N \l__enumext_level_int } {#1}
2367   \bool_if:NT \l__enumext_store_active_bool
2368   {
2369     \__enumext_parse_store_keys:n {#1}
2370   }
2371 }

```

(End of definition for `__enumext_parse_keys:n`)

`__enumext_parse_store_keys:n` The function `__enumext_parse_store_keys:n` searches for the values of the `columns` and `columns-sep` keys in the optional arguments per-level in `enumext` environment as long as the starred versions of the `columns*` and `columns-sep*` keys are not active. The captured values are stored in the variable `\l__enumext_store_opt_X_tl` which is used by the function `__enumext_store_level_open:`.

```

2372 \cs_new_protected:Npn \__enumext_parse_store_keys:n #1
2373 {
2374   \bool_if:cF { \l__enumext_store_columns_ \__enumext_level: _bool }
2375   {
2376     \regex_match:nnT { \b columns\b } {#1}
2377     {
2378       \int_set_eq:cc
2379       { \l__enumext_store_columns_ \__enumext_level: _int }
2380       { \l__enumext_columns_ \__enumext_level: _int }
2381       \tl_put_right:ce { \l__enumext_store_opt_ \__enumext_level: _tl }
2382       {
2383         columns = \exp_not:v { \l__enumext_store_columns_ \__enumext_level: _int },
2384       }
2385     }
2386   }
2387   \bool_if:cF { \l__enumext_store_columns_sep_ \__enumext_level: _bool }
2388   {
2389     \regex_match:nnT { \b columns-sep\b } {#1}
2390     {
2391       \dim_set_eq:cc
2392       { \l__enumext_store_columns_sep_ \__enumext_level: _dim }
2393       { \l__enumext_columns_sep_ \__enumext_level: _dim }
2394       \tl_put_right:ce { \l__enumext_store_opt_ \__enumext_level: _tl }
2395       {
2396         columns-sep = \exp_not:v { \l__enumext_store_columns_sep_ \__enumext_level: _dim }
2397       }
2398     }
2399   }
2400 }

```

(End of definition for `__enumext_parse_store_keys:n`)

`__enumext_start_store_level:` The `__enumext_start_store_level:` and `__enumext_stop_store_level:` functions activate the level saving mechanism for storage in `<sequence>` of the `\anskey` command.

`__enumext_stop_store_level:`

If `enumext` are nested in `enumext*` add `__enumext_store_level_open:` to preserve the stored structure.

```

2401 \cs_new_protected:Nn \__enumext_start_store_level:
2402 {
2403   %\bool_lazy_and:nnT
2404   %{ \l__enumext_store_active_bool }
2405   %{ \bool_not_p:n { \l__enumext_keyans_env_bool } }
2406   %{

```

```

2407     %\int_compare:nNtT { \l__enumext_level_h_int } = { 1 }
2408     %{
2409         %\bool_set_true:c { l__enumext_store_upper_level_ \__enumext_level: _bool }
2410         %\__enumext_store_level_open:
2411         %}
2412     %\int_compare:nNtT { \l__enumext_level_int } > { 1 }
2413     %{
2414         \bool_set_true:c { l__enumext_store_upper_level_ \__enumext_level: _bool }
2415         \__enumext_store_level_open:
2416         %}
2417     %}
2418 }
2419 \cs_new_protected:Nn \__enumext_stop_store_level:
2420 {
2421     \bool_if:cT { l__enumext_store_upper_level_ \__enumext_level: _bool }
2422     {
2423         \__enumext_store_level_close:
2424     }
2425 }

```

(End of definition for __enumext_start_store_level: and __enumext_stop_store_level:.)

`__enumext_before_list:` The function `__enumext_before_list:` will add the vertical spacing on the environment if the `above` key is active next to the `{\code}` defined by the `before*` key if it is active.

```

2426 \cs_new_protected:Nn \__enumext_before_list:
2427 {
2428     \__enumext_vspace_above:
2429     \__enumext_before_args_exec:

```

The function `__enumext_check_ans_count:` will handle the check answer mechanism, which will be activated with the `check-ans` key.

```

2430     \__enumext_check_ans_count:

```

When the `mini-env` key is active it will set the value of the `\l__enumext_minipage_right_X_dim` to be the *width* of the `__enumext_mini_env*` environment on the “right side”, using this value together with the value of the `\l__enumext_minipage_hsep_X_dim` set by the `mini-sep` key, the value of `\l__enumext_minipage_left_X_dim` will be set, which will be the *width* of `__enumext_mini_env*` environment on the “left side”, always having a current `\linewidth` as *maximum width* between them.

```

2431     \dim_compare:nNtT
2432     { \dim_use:c { l__enumext_minipage_right_ \__enumext_level: _dim } } > { \c_zero_dim }
2433     {
2434         \dim_set:cn { l__enumext_minipage_left_ \__enumext_level: _dim }
2435         {
2436             \linewidth
2437             - \dim_use:c { l__enumext_minipage_right_ \__enumext_level: _dim }
2438             - \dim_use:c { l__enumext_minipage_hsep_ \__enumext_level: _dim }
2439         }

```

The boolean variable `\l__enumext_minipage_active_X_bool` will be activated and the integer variable `\g__enumext_minipage_stat_int` used by the `\miniright` command will be incremented, then the function `__enumext_mini_addvspace:` is called and the `__enumext_mini_env*` environment on the “left side” will be initialized followed by the “vertical spacing” applied to preserve the “baseline” between the *left* and *right* side environments. After these actions, the function `__enumext_multicols_start:` is called to handle the `multicols` environment.

Here we use the plain T_EX macro `\nointerlineskip` to prevent baseline “glue” being added between the next pair of boxes in a *vertical list*.

```

2440     \bool_set_true:c { l__enumext_minipage_active_ \__enumext_level: _bool }
2441     \int_gincr:N \g__enumext_minipage_stat_int
2442     \__enumext_mini_addvspace:
2443     \nointerlineskip\noindent
2444     \begin{\__enumext_mini_env*}
2445     { \dim_use:c { l__enumext_minipage_left_ \__enumext_level: _dim } }
2446     }
2447     \__enumext_multicols_start:
2448 }

```

(End of definition for __enumext_before_list:.)

`__enumext_multicols_start:` The function `__enumext_multicols_start:` will start the `multicols` environment according to the value passed by the `columns` key, then set the default value for `\columnsep` when `columns-sep=0pt`

and set the value of `\multicolsep` equal to zero and leave `\columnseprule` equal to zero for inner levels.

```

2449 \cs_new_protected:Nn \__enumext_multicols_start:
2450 {
2451   \int_compare:nNt
2452     { \int_use:c { \__enumext_columns_ \__enumext_level: _int } } > { 1 }
2453   {
2454     \dim_compare:nNt
2455       { \dim_use:c { \__enumext_columns_sep_ \__enumext_level: _dim } } = { \c_zero_dim }
2456     {
2457       \dim_set:cn { \__enumext_columns_sep_ \__enumext_level: _dim }
2458       {
2459         ( \dim_use:c { \__enumext_labelwidth_ \__enumext_level: _dim }
2460         + \dim_use:c { \__enumext_labelsep_ \__enumext_level: _dim }
2461         ) / \int_use:c { \__enumext_columns_ \__enumext_level: _int }
2462         - \dim_use:c { \__enumext_listoffset_ \__enumext_level: _dim }
2463       }
2464     }
2465     \dim_set_eq:Nc \columnsep { \__enumext_columns_sep_ \__enumext_level: _dim }
2466     \skip_zero:N \multicolsep
2467     \int_compare:nNt { \__enumext_level_int } > { 1 }
2468     {
2469       \dim_zero:N \columnseprule
2470     }

```

We will calculate the *vertical spacing* settings for the `multicols` environment using the function `__enumext_multi_addvspace:`, apply our “*vertical adjust spacing*”, then start the `multicols` environment.

```

2471   \bool_if:cF { \__enumext_minipage_active_ \__enumext_level: _bool }
2472   {
2473     \__enumext_multi_addvspace:
2474   }
2475   \raggedcolumns
2476   \begin{multicols}{ \int_use:c { \__enumext_columns_ \__enumext_level: _int } }
2477 }
2478 }

```

(End of definition for `__enumext_multicols_start:`)

`__enumext_multicols_stop:`

The function `__enumext_multicols_stop:` will stop the `multicols` environment. If the boolean variable `__enumext_minipage_active_X_bool` is false (not nested in `__enumext_mini_env*`) we will apply our “*vertical adjust*” spacing.

```

2479 \cs_new_protected:Nn \__enumext_multicols_stop:
2480 {
2481   \int_compare:nNt
2482     { \int_use:c { \__enumext_columns_ \__enumext_level: _int } } > { 1 }
2483   {
2484     \end{multicols}
2485     \bool_if:cF { \__enumext_minipage_active_ \__enumext_level: _bool }
2486     {
2487       \par\addvspace{ \skip_use:c { \__enumext_multicols_below_ \__enumext_level: _skip } }
2488     }
2489   }

```

If the `check-ans` key is active, we set the boolean variable `\g__enumext_check_ans_show_bool` to true and copy the stored name to the variable `\g__enumext_store_name_tl`. These variables will be used by the function `__enumext_after_env:n` to display the result of the internal check answer mechanism in the terminal.

```

2490   \bool_lazy_and:nnT
2491     { \__enumext_check_ans_bool }
2492     { \bool_not_p:n { \g__enumext_starred_bool } }
2493   {
2494     \bool_gset_true:N \g__enumext_check_ans_show_bool
2495     \tl_gset:NV \g__enumext_store_name_tl \__enumext_store_name_tl
2496   }
2497 }

```

(End of definition for `__enumext_multicols_stop:`)

`__enumext_after_list:` The function `__enumext_after_list:` will check the state of the boolean variable `\l__enumext_minipage_active_X_bool`, if it is “true” a small test will be executed to check if we have omitted the use of `\miniright` (the `__enumext_mini_env*` environment has not been closed), then close `__enumext_mini_env*` and add the *adjusted vertical space* `\l__enumext_minipage_after_skip`, otherwise we will close the `\multicols` environment.

```

2498 \cs_new_protected:Nn \__enumext_after_list:
2499 {
2500   \bool_if:cTF { \l__enumext_minipage_active_ \__enumext_level: _bool }
2501   {
2502     \int_compare:nNt { \g__enumext_minipage_stat_int } = { 1 }
2503     {
2504       \msg_warning:nn { enumext } { missing-miniright }
2505       \miniright
2506     }
2507     \int_gzero:N \g__enumext_minipage_stat_int
2508     \end{\__enumext_mini_env*}
2509     \par\addvspace { \l__enumext_minipage_after_skip }
2510   }
2511   { \__enumext_multicols_stop: }

```

Now apply the `{\code}` handled by the `after` key together with the *vertical space* handled by the `below` key if they are present.

```

2512   \__enumext_after_stop_list:
2513   \__enumext_vspace_below:

```

Finally save the *current value* of the counter in `\g__enumext_resume_int` for the `resume` key. If the `save-ans` key is active, it will create the integer variable for the `resume` key, we only have to assign it the value of the current counter.

```

2514   \bool_set_false:N \l__enumext_standar_bool
2515   \bool_gset_false:N \g__enumext_standar_bool
2516   \int_gset_eq:NN \g__enumext_resume_int \value{enumXi}
2517   \int_if_exist:cT { g__enumext_resume_ \l__enumext_store_name_tl _int }
2518   {
2519     \int_gset_eq:cN
2520     { g__enumext_resume_ \l__enumext_store_name_tl _int }
2521     { \value{enumXi} }
2522   }
2523 }

```

(End of definition for `__enumext_after_list:`)

As we don’t want our check to be executed `check-ans` by levels but on the complete list, we will take it out of the `enumext` environment using the “hook” function `__enumext_after_env:nn`.

```

2524 \__enumext_after_env:nn {enumext}
2525 {
2526   \bool_if:NT \g__enumext_check_ans_show_bool
2527   {
2528     \int_compare:nNt { \l__enumext_level_int } = { 0 }
2529     {
2530       \__enumext_check_ans_active:
2531     }
2532   }
2533   \bool_gset_false:N \g__enumext_check_ans_show_bool
2534   \tl_gclear:N \g__enumext_store_name_tl
2535 }

```

10.33 The environment `keyans`

The environment `keyans` also based on lists. The main differences with the `enumext` environment are the *nesting* and the way the *answers* (choice) will be stored and checked, this environment is intended exclusively for “multiple choice questions”.

`keyans` Now we define the environment `keyans` also based on lists.

```

2536 \NewDocumentEnvironment{keyans}{0}{}
2537 {
2538   \__enumext_keyans_safe_exec:
2539   \__enumext_keyans_parse_keys:n {#1}
2540   \__enumext_before_list_v:
2541   \__enumext_start_list:nn
2542   { \tl_use:N \l__enumext_label_v_tl }
2543   {
2544     \__enumext_list_arg_two_v:

```

```

2545     \__enumext_before_keys_exec_v:
2546   }
2547   \__enumext_after_args_exec_v:
2548 }
2549 {
2550   \__enumext_keyans_check_ans:n { item } { keyans }
2551   \__enumext_stop_list:
2552   \__enumext_after_list_v:
2553 }

```

(End of definition for `keyans`. This function is documented on page 11.)

`__enumext_keyans_safe_exec:` The `keyans` environment will only be available if the `save-ans` key is active and can only be used at the first level within the `enumext` environment. We do not want the environment to be nested, so we will set a maximum at this point. If the conditions are not met, an error message will be returned.

```

2554 \cs_new_protected:Nn \__enumext_keyans_safe_exec:
2555 {
2556   \bool_if:NF \l__enumext_store_active_bool
2557   {
2558     \msg_error:nnnn { enumext } { wrong-place } { keyans } { save-ans }
2559   }
2560   \int_incr:N \l__enumext_keyans_level_int
2561   \bool_set_true:N \l__enumext_keyans_env_bool
2562   % Set false for interfering with enumext nested in keyans (yes, its possible and crayze)
2563   \bool_set_false:N \l__enumext_store_active_bool
2564   \int_compare:nNnT { \l__enumext_keyans_level_int } > { 1 }
2565   {
2566     \msg_error:nn { enumext } { keyans-nested }
2567   }
2568   \int_compare:nNnT { \l__enumext_level_int } > { 1 }
2569   {
2570     \msg_error:nn { enumext } { keyans-wrong-level }
2571   }
2572 }

```

(End of definition for `__enumext_keyans_safe_exec:`.)

`__enumext_keyans_parse_keys:n` Parse [`key = val`] for `keyans` environment.

```

2573 \cs_new_protected:Npn \__enumext_keyans_parse_keys:n #1
2574 {
2575   \keys_set:nn { enumext / keyans } { #1 }
2576 }

```

(End of definition for `__enumext_keyans_parse_keys:n`.)

`__enumext_before_list_v:` The function `__enumext_before_list_v:` will add the *vertical spacing* above the environment if the `above` key is active next to the `<code>` defined by the `before` key if it is active.

```

2577 \cs_new_protected:Nn \__enumext_before_list_v:
2578 {
2579   \__enumext_vspace_above_v:
2580   \__enumext_before_args_exec_v:

```

When the `mini-env` key is active it will set the value of the `\l__enumext_minipage_right_v_dim` to be the *width* of the `__enumext_mini_env*` environment on the *left side*, using this value together with the value of the `\l__enumext_minipage_hsep_v_dim` set by the `mini-sep` key, the value of `\l__enumext_minipage_left_v_dim` will be set, which will be the *width* of `__enumextt_mini_env*` environment on the *right side*, always having `\linewidth` as the maximum width between them.

```

2581   \dim_compare:nNnT { \l__enumext_minipage_right_v_dim } > { \c_zero_dim }
2582   {
2583     \dim_set:Nn \l__enumext_minipage_left_v_dim
2584     {
2585       \linewidth - \l__enumext_minipage_right_v_dim - \l__enumext_minipage_hsep_v_dim
2586     }

```

The boolean variable `\l__enumext_minipage_active_v_bool` will be activated and the integer variable `\g__enumext_minipage_stat_int` used by the `\mini-right` command will be incremented, then the function `__enumext_keyans_mini_addvspace:` is called and the `__enumext_mini_env*` environment on *left side* will be initialized followed by the *vertical spacing* `\l__enumext_minipage_left_skip`. Here we use the plain \TeX macro `\nointerlineskip` to prevent baseline “glue” being added between the next pair of boxes in a *vertical list*.

```

2587   \bool_set_true:N \l__enumext_minipage_active_v_bool

```

```

2588     \int_gincr:N \g__enumext_minipage_stat_int
2589     \__enumext_keyans_mini_addvspace:
2590     \nointerlineskip\noindent
2591     \begin{__enumext_mini_env*}{ \l__enumext_minipage_left_v_dim }
2592   }

```

After these actions, the `__enumext_keyans_multicols_start:` function is called to handle the `multicols` environment.

```

2593   \__enumext_keyans_multicols_start:
2594 }

```

(End of definition for `__enumext_before_list_v:`)

`__enumext_keyans_multicols_start:`

The function `__enumext_keyans_multicols_start:` will start the `multicols` environment according to the value passed by the `columns` key.

```

2595 \cs_new_protected:Nn \__enumext_keyans_multicols_start:
2596 {
2597   \int_compare:nNnT { \l__enumext_columns_v_int } > { 1 }
2598   {

```

Set the default value for `\columnsep` when `columns-sep` key is `opt`.

```

2599     \dim_compare:nNnT { \l__enumext_columns_sep_v_dim } = { \c_zero_dim }
2600     {
2601       \dim_set:Nn \l__enumext_columns_sep_v_dim
2602       {
2603         (
2604           \l__enumext_labelwidth_v_dim + \l__enumext_labelsep_v_dim
2605         ) / \l__enumext_columns_v_int
2606         - \l__enumext_listoffset_v_dim
2607       }
2608     }
2609     \dim_set_eq:NN \columnsep \l__enumext_columns_sep_v_dim

```

Then we will set the value of `\multicolsep` and `\columnseprule` equal to zero (we do not want a vertical rule in this environment).

```

2610     \skip_zero:N \multicolsep
2611     \dim_zero:N \columnseprule

```

We will calculate the *vertical spacing* settings for the `multicols` environment using the function `__enumext_keyans_multi_addvspace:` and apply our “vertical adjust spacing”, then start the `multicols` environment.

```

2612     \bool_if:NF \l__enumext_minipage_active_v_bool
2613     {
2614       \__enumext_keyans_multi_addvspace:
2615     }
2616     \raggedcolumns
2617     \begin{multicols}{ \l__enumext_columns_v_int }
2618   }
2619 }

```

(End of definition for `__enumext_keyans_multicols_start:`)

`__enumext_keyans_multicols_stop:`

The function `__enumext_keyans_multicols_stop:` will stop the `multicols` environment. If the boolean variable `\l__enumext_minipage_active_v_bool` is false (not nested in `__enumext_mini_env*`) we will apply our vertical “adjust” spacing.

```

2620 \cs_new_protected:Nn \__enumext_keyans_multicols_stop:
2621 {
2622   \int_compare:nNnT { \l__enumext_columns_v_int } > { 1 }
2623   {
2624     \end{multicols}
2625     \bool_if:NF \l__enumext_minipage_active_v_bool
2626     {
2627       \par\addvspace{ \l__enumext_multicols_below_v_skip }
2628     }
2629   }
2630 }

```

(End of definition for `__enumext_keyans_multicols_stop:`)

`__enumext_after_list_v:` The function `__enumext_after_list_v:` will check the state of the boolean variable `\l__enumext_minipage_active_v_bool`, if it is “true” a small test will be executed to check if we have omitted the use of `\miniright` (the `__enumext_mini_env*` environment has not been closed), then close `__enumext_mini_env*` and add the vertical adjustment space `\l__enumext_minipage_after_skip`, otherwise we will close the `\multicols` environment.

```

2631 \cs_new_protected:Nn \__enumext_after_list_v:
2632 {
2633   \bool_if:NTF \l__enumext_minipage_active_v_bool
2634   {
2635     \int_compare:nNt { \g__enumext_minipage_stat_int } = { 1 }
2636     {
2637       \msg_warning:nn { enumext } { missing-miniright }
2638       \miniright
2639     }
2640     \int_gzero:N \g__enumext_minipage_stat_int
2641     \end{\__enumext_mini_env*}
2642     \par\addvspace{ \l__enumext_minipage_after_skip }
2643   }
2644   { \__enumext_keyans_multicols_stop: }

```

Finally we will apply the `{\code}` handled by the `after` key together with the *vertical space* handled by the `below` key if they are present.

```

2645   \bool_set_false:N \l__enumext_keyans_env_bool
2646   \__enumext_after_stop_list_v:
2647   \__enumext_vspace_below_v:
2648 }

```

(End of definition for `__enumext_after_list_v:`)

10.34 The environment `keyanspic` and `\anspic`

The `keyanspic` environment is a list-based environment that uses the same configuration for “spacing” and `\label` as the `keyans` environment, but it does not use `\item`.

The contents are passed to the environment by means of the `\anspic` command and are placed inside `minipage` environments, with the `\label` underneath, adjusting widths according to the options passed to the environment.

Again it is necessary to “adjust” the spacing, both vertical and horizontal, to obtain an output like the one shown in the figure 12.

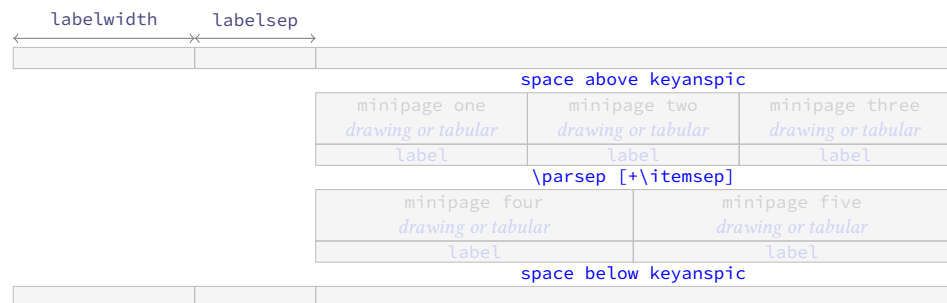


Figure 12: Representation of the `keyanspic` spacing in `enumext`.

This implementation is adapted from the answer given by Enrico Gregorio in [How to process the body of an environment and divide it by a \macro?](#).

10.34.1 The command `\anspic`

`\anspic` The `\anspic` command take three arguments, the starred (*) versions `\anspic*` and `\anspic*[\content]` store the current `\label` next to the `[\content]` if it is present in the `\sequence` and `\prop list` defined by `save-ans` key. This command is used as a replacement for `\item` in the `keyanspic` environment.

```

2649 \NewDocumentCommand \anspic { s o +m }
2650 {

```

We check that the command is active in the `keyanspic` environment only if the `save-ans` key is present, otherwise we return an error.

```

2651   \bool_if:NF \l__enumext_store_active_bool
2652   {
2653     \msg_error:nnnn { enumext } { wrong-place } { keyanspic } { save-ans }
2654   }
2655   \int_compare:nNt { \l__enumext_level_int } > { 1 }
2656   {
2657     \msg_error:nn { enumext } { keyanspic-wrong-level }
2658   }

```

```

2659 \int_compare:nNt { \__enumext_keyans_level_int } = { 1 }
2660 {
2661   \msg_error:nnnn { enumext } { command-wrong-place }{ anspic }{ keyans }
2662 }

```

The three arguments are handled by the function `__enumext_keyans_anspic_code:nnn` and stored in the sequence `__enumext_keyans_pic_body_seq` which is processed by the `keyanspic` environment.

```

2663 \seq_put_right:Nn \__enumext_keyans_pic_body_seq
2664 {
2665   \__enumext_keyans_anspic_code:nnn { #1 } { #2 } { #3 }
2666 }
2667 }

```

(End of definition for `\anspic`. This function is documented on page 12.)

`__enumext_keyans_anspic_code:nnn`

The function `__enumext_keyans_anspic_code:nnn` will be in charge of handling the “counter” and `<label>`, which will have the same configuration as the `keyans` environment.

```

2668 \cs_new_protected:Nn \__enumext_keyans_anspic_code:nnn
2669 {
2670   \stepcounter { enumXvi }
2671   #3 \\\
2672   \bool_if:nT { #1 }
2673   {
2674     \__enumext_keyans_addto_prop:n { #2 }
2675     \__enumext_keyans_store_ref:
2676     \__enumext_keyans_addto_seq:n { #2 }
2677     \bool_lazy_or:nnT
2678     { \__enumext_show_answer_bool }
2679     { \__enumext_show_position_bool }
2680     {
2681       \tl_set_eq:NN \__enumext_label_v_tl \__enumext_label_vi_tl
2682       \__enumext_keyans_show_left:n { #2 }
2683       \tl_set_eq:NN \__enumext_label_vi_tl \__enumext_label_v_tl
2684     }
2685   }
2686   \tl_use:N \__enumext_label_font_style_v_tl
2687   \__enumext_wrapper_label_v:n { \__enumext_label_vi_tl }
2688 }

```

(End of definition for `__enumext_keyans_anspic_code:nnn`.)

10.34.2 The environment `keyanspic`

`keyanspic`

Now we define the environment `keyanspic` based on list. The optional argument `[<number above, number below>]` will determine the number of `minipage` environments that will be above and below separated by `\parsep+\itemsep` within it.

```

2689 \NewDocumentEnvironment{keyanspic}{ o }
2690 {
2691   \__enumext_keyans_pic_safe_exec:
2692   \__enumext_start_list:nn
2693   { }
2694   {
2695     \__enumext_keyans_pic_arg_two:
2696   }

```

We apply the “adjusted” vertical spacing above the environment

```

2697 \vspace { \__enumext_keyans_pic_above_skip }
2698 }

```

If the optional argument is not present, the number of times the `\anspic` command appears will be counted from `__enumext_keyans_pic_body_seq` and placed in `minipage` environments on a single line. Finally we check if `\anspic*` has been used, set the counter to zero and apply our “adjusted” vertical space below the environment.

```

2699 {
2700   \tl_if_novalue:nTF { #1 }
2701   {
2702     \__enumext_keyans_pic_do:e { \seq_count:N \__enumext_keyans_pic_body_seq }
2703   }
2704   { \__enumext_keyans_pic_do:n { #1 } }
2705   \__enumext_stop_list:
2706   \__enumext_keyans_check_ans:nn { anspic } { keyanspic }
2707   \setcounter { enumXvi } { 0 }
2708   \vspace { \__enumext_topsep_v_skip }

```

```

2709     %\bool_set_false:N \l__enumext_store_active_bool
2710 }

```

(End of definition for `keyanspic`. This function is documented on page 12.)

`__enumext_keyans_pic_safe_exec:` The function `__enumext_keyans_pic_safe_exec:` check nested and level position inside the `enumext` environment.

```

2711 \cs_new_protected:Nn \__enumext_keyans_pic_safe_exec:
2712 {
2713     \int_incr:N \l__enumext_keyans_pic_level_int
2714     \int_compare:nNnT { \l__enumext_keyans_pic_level_int } > { 1 }
2715     {
2716         \msg_error:nn { enumext } { keyanspic-nested }
2717     }
2718 }

```

(End of definition for `__enumext_keyans_pic_safe_exec:.`)

`__enumext_keyans_pic_skip_abs:N` The function `__enumext_keyans_pic_skip_abs:N` will return a positive value `\parsep`.

```

2719 \cs_new_protected:Npn \__enumext_keyans_pic_skip_abs:N #1
2720 {
2721     \dim_compare:nNnT { #1 } < { 0pt }
2722     { \skip_set:Nn #1 { -#1 } }
2723 }

```

(End of definition for `__enumext_keyans_pic_skip_abs:N`.)

`__enumext_keyans_pic_arg_two:` The function `__enumext_keyans_pic_arg_two:` will be used in the second argument of the `__enumext_start_list:nn` function that defines the `keyanspic` environment, it will handle the setting of spaces.

```

2724 \cs_new_protected:Nn \__enumext_keyans_pic_arg_two:
2725 {

```

The first thing to do is to set the boolean variable `\l__enumext_leftmargin_tmp_v_bool` handled by the `list-indent` key to false, then we copy the definition of the second list argument from the `keyans` environment.

```

2726     \bool_set_false:N \l__enumext_leftmargin_tmp_v_bool
2727     \__enumext_list_arg_two_v:

```

We will add the value of `\itemsep` to `\parsep` which we will use as vertical spacing between the above and below `minipage` environments. and adjust the value of `\leftmargin`, the label and counter are handled directly by the `\anspic` command. Then we make equal to zero `\labelwidth`, `\labelsep`, `\partopsep` and `\itemsep` so that the horizontal and vertical spacing is not affected.

```

2728     \skip_add:Nn \parsep { \itemsep }
2729     \dim_add:Nn \leftmargin { -\labelwidth - \labelsep }
2730     \dim_zero:N \labelwidth
2731     \dim_zero:N \listparindent
2732     \dim_zero:N \labelsep
2733     \skip_zero:N \partopsep
2734     \skip_zero:N \itemsep

```

We set the value of `\l__enumext_keyans_pic_above_skip` which we will use to apply our “adjust” space above `keyanspic`, finally we call `__enumext_item_std:w` followed by `\scan_stop:` to prevent the error message returned by \TeX when not using the `\item` command.

```

2735     \__enumext_keyans_pic_skip_abs:N \parsep
2736     \skip_set:Nn \l__enumext_keyans_pic_above_skip
2737     {
2738         \box_dp:N \strutbox
2739         + \l__enumext_topsep_v_skip
2740         - \parsep
2741     }
2742     \__enumext_item_std:w \scan_stop:
2743 }

```

(End of definition for `__enumext_keyans_pic_arg_two:.`)

`__enumext_keyans_pic_do:n` The optional argument is split by comma and is handled directly by the function `__enumext_keyans_pic_do:n` and passed to the function `__enumext_keyans_pic_row:n`.

```

2744 \cs_new_protected:Nn \__enumext_keyans_pic_do:n
2745 {
2746     \clist_map_function:nN { #1 } \__enumext_keyans_pic_row:n
2747 }
2748 \cs_generate_variant:Nn \__enumext_keyans_pic_do:n { e }

```

(End of definition for `__enumext_keyans_pic_do:n`.)

`__enumext_keyans_pic_row:n` The function `__enumext_keyans_pic_row:n` will set the widths for the `minipage` environments and place the content $\langle stored \rangle$ by `\anspic*` in the `__enumext_keyans_pic_body_seq` sequence inside them.

```

2749 \cs_new_protected:Nn \__enumext_keyans_pic_row:n
2750 {
2751   \dim_set:Nn \__enumext_keyans_pic_width_dim { \linewidth / #1 }
2752   \int_set:Nn \__enumext_keyans_pic_above_int { \__enumext_keyans_pic_below_int }
2753   \int_set:Nn \__enumext_keyans_pic_below_int { \__enumext_keyans_pic_above_int + #1 }
2754   \int_step_inline:nnn
2755     { \__enumext_keyans_pic_above_int + 1 }
2756     { \__enumext_keyans_pic_below_int }
2757     {
2758       \__enumext_minipage:w [ b ]{ \__enumext_keyans_pic_width_dim }
2759       \centering
2760       \seq_item:Nn \__enumext_keyans_pic_body_seq { ##1 }
2761       \__enumext_endminipage:
2762     }
2763   \par
2764 }

```

(End of definition for `__enumext_keyans_pic_row:n`.)

10.35 The `enumext*` environment

Generating horizontal list environments is NOT as simple as standard \TeX list environments. The fundamental part of the code is adapted from the `shortlst` package to a more modern version using `expl3`. It is not possible to redefine `\item` and `\makelabel` as in the non starred versions (at least I have not achieved it) and as we will make it behave differently, we have no other option than to define a cascade of functions.

To achieve the horizontal list environment we will capture the `\item` command and the content of this in an plain `lrbox` box using `\makebox` for the `label` and a `minipage` environment for the content passed to `\item`, we will also add the optional argument ($\langle number \rangle$) to `\item` to be able to *join columns* horizontally, in simple terms, we want `\item` to behave in the same way as in the `enumext` environment but adding an optional first argument ($\langle number \rangle$).

10.35.1 Functions for item box width

`__enumext_starred_columns_set_vii:` We set the default value for the width of the box containing the content of the items and create `\itemwidth` in a public form.

```

2765 \cs_new_protected:Nn \__enumext_starred_columns_set_vii:
2766 {
2767   \dim_compare:nNnT { \__enumext_columns_sep_vii_dim } = { \c_zero_dim }
2768   {
2769     \dim_set:Nn \__enumext_columns_sep_vii_dim
2770     {
2771       ( \__enumext_labelwidth_vii_dim + \__enumext_labelsep_vii_dim )
2772       / \__enumext_columns_vii_int
2773     }
2774   }
2775   \int_set:Nn \__enumext_tmpa_vii_int { \__enumext_columns_vii_int - \c_one_int }
2776   \dim_set:Nn \__enumext_item_width_vii_dim
2777   {
2778     ( \linewidth - \__enumext_columns_sep_vii_dim * \__enumext_tmpa_vii_int )
2779     / \__enumext_columns_vii_int - \__enumext_labelwidth_vii_dim
2780     - \__enumext_labelsep_vii_dim
2781   }
2782   \dim_zero_new:N \itemwidth
2783 }

```

(End of definition for `__enumext_starred_columns_set_vii:`.)

`__enumext_starred_joined_item_vii:n` The function `__enumext_starred_joined_item_vii:n` will set the *width* of the box in which the content passed to `\item(\langle number \rangle)` will be stored together with the value of `\itemwidth`.

```

2784 \cs_new_protected:Npn \__enumext_starred_joined_item_vii:n #1
2785 {
2786   \int_set:Nn \__enumext_joined_item_vii_int {#1}
2787   \int_compare:nNnT { \__enumext_joined_item_vii_int } > { \__enumext_columns_vii_int }
2788   {
2789     \msg_warning:nnee { enumext } { item-joined }
2790     { \int_use:N \__enumext_joined_item_vii_int }

```



```

2791         { \int_use:N \l__enumext_columns_vii_int }
2792     \int_set:Nn \l__enumext_joined_item_vii_int
2793     {
2794         \l__enumext_columns_vii_int - \l__enumext_item_column_pos_vii_int + \c_one_int
2795     }
2796 }
2797 \int_compare:nNnT
2798 { \l__enumext_joined_item_vii_int }
2799 >
2800 { \l__enumext_columns_vii_int - \l__enumext_item_column_pos_vii_int + \c_one_int }
2801 {
2802     \msg_warning:nnee { enumext } { item-joined-columns }
2803     { \int_use:N \l__enumext_joined_item_vii_int }
2804     {
2805         \int_eval:n
2806         { \l__enumext_columns_vii_int - \l__enumext_item_column_pos_vii_int + \c_one_int }
2807     }
2808     \int_set:Nn \l__enumext_joined_item_vii_int
2809     {
2810         \l__enumext_columns_vii_int - \l__enumext_item_column_pos_vii_int + \c_one_int
2811     }
2812 }

```

Only need if #1 >> 1 (default are set before).

```

2813     \int_compare:nNnTF { \l__enumext_joined_item_vii_int } > { \c_one_int }
2814     {
2815         \int_set_eq:NN \l__enumext_joined_item_aux_vii_int \l__enumext_joined_item_vii_int
2816         \int_decr:N \l__enumext_joined_item_aux_vii_int
2817         \int_add:Nn \l__enumext_item_column_pos_vii_int { \l__enumext_joined_item_aux_vii_int }
2818         \int_gadd:Nn \g__enumext_item_count_all_vii_int { \l__enumext_joined_item_aux_vii_int }
2819         \dim_set:Nn \l__enumext_joined_width_vii_dim
2820         {
2821             \l__enumext_item_width_vii_dim * \l__enumext_joined_item_vii_int
2822             + ( \l__enumext_labelwidth_vii_dim + \l__enumext_labelsep_vii_dim
2823                 + \l__enumext_columns_sep_vii_dim
2824                 ) * \l__enumext_joined_item_aux_vii_int
2825         }
2826         \dim_set_eq:NN \itemwidth \l__enumext_joined_width_vii_dim
2827     }
2828     {
2829         \dim_set_eq:NN \l__enumext_joined_width_vii_dim \l__enumext_item_width_vii_dim
2830         \dim_set_eq:NN \itemwidth \l__enumext_item_width_vii_dim
2831     }
2832 }

```

(End of definition for `__enumext_starred_joined_item_vii:n`.)

`__enumext_start_mini_vii:` The implementation of the `mini-env` key support is almost identical to the one used in the `enumext` and `keyans` environments, the difference is that the `__enumext_mini_env*` environment on the “*right side*” is executed “*after*” closing the environment, so it is necessary to make a global copy of the variable `\l__enumext_minipage_right_vii_dim` in the variable `\g__enumext_minipage_right_vii_dim`.

```

2833 \cs_new_protected:Nn \__enumext_start_mini_vii:
2834 {
2835     \dim_compare:nNnT { \l__enumext_minipage_right_vii_dim } > { \c_zero_dim }
2836     {
2837         \dim_set:Nn \l__enumext_minipage_left_vii_dim
2838         {
2839             \linewidth
2840             - \l__enumext_minipage_right_vii_dim
2841             - \l__enumext_minipage_hsep_vii_dim
2842         }
2843         \bool_set_true:N \l__enumext_minipage_active_vii_bool
2844         \dim_gset_eq:NN
2845             \g__enumext_minipage_right_vii_dim
2846             \l__enumext_minipage_right_vii_dim
2847         \__enumext_mini_addvspace_vii:
2848         \nointerlineskip\noindent
2849         \begin{__enumext_mini_env*}{ \l__enumext_minipage_left_vii_dim }
2850     }
2851 }

```

(End of definition for `__enumext_start_mini_vii:`)

`__enumext_stop_mini_vii:` The function `__enumext_stop_mini_vii:` closes the `__enumext_mini_env*` environment on the left side, applies `\hfill` and sets the value of the variable `\g__enumext_minipage_active_vii_bool` to true which will be used in the function `__enumext_after_star_env:nn` to execute the `__enumext_mini_env*` on the “right side”.

```
2852 \cs_new_protected:Nn \__enumext_stop_mini_vii:
2853 {
2854   \bool_if:NT \l__enumext_minipage_active_vii_bool
2855   {
2856     \end{\__enumext_mini_env*}
2857     \hfill
2858     \bool_gset_true:N \g__enumext_minipage_active_vii_bool
2859   }
2860 }
```

Finally we execute code passed to the `miniright` key stored in the variable `\g__enumext_miniright_code_vii_tl` in the `__enumext_mini_env*` environment on the “right side”.

```
2861 \__enumext_after_env:nn {enumext*}
2862 {
2863   \bool_if:NT \g__enumext_minipage_active_vii_bool
2864   {
2865     \begin{\__enumext_mini_env*}{ \g__enumext_minipage_right_vii_dim }
2866     \par\addvspace { \g__enumext_minipage_right_skip }
2867     \bool_if:NF \g__enumext_minipage_center_vii_bool
2868     {
2869       \centering
2870     }
2871     \tl_use:N \g__enumext_miniright_code_vii_tl % the code
2872     \end{\__enumext_mini_env*}
2873     \par\addvspace{ \g__enumext_minipage_after_skip }
2874   }
2875   \bool_gset_false:N \g__enumext_minipage_active_vii_bool
2876   \bool_gset_true:N \g__enumext_minipage_center_vii_bool
2877   \tl_gclear:N \g__enumext_miniright_code_vii_tl
2878   \dim_gzero:N \g__enumext_minipage_right_vii_dim
2879 }
```

(End of definition for `__enumext_stop_mini_vii:`)

enumext* First we will generate the environment and we will give a temporary definition to `__enumext_stop_item_tmp_vii:` equal to `\noindent` and next to `\item` equal to `__enumext_start_item_tmp_vii:` which we will redefine later.

```
2880 \NewDocumentEnvironment{enumext*}{ o }
2881 {
2882   \__enumext_current_env:
2883   \__enumext_safe_exec_vii:
2884   \__enumext_parse_keys_vii:n {#1}
2885   \__enumext_before_list_vii:
2886   \__enumext_start_store_level_vii:
2887   \__enumext_start_list:nn { }
2888   {
2889     \__enumext_list_arg_two_vii:
2890     \__enumext_before_keys_exec_vii:
2891   }
2892   \__enumext_starred_columns_set_vii:
2893   \item[] \scan_stop:
2894   \cs_set_eq:NN \__enumext_stop_item_tmp_vii: \noindent
2895   \cs_set_eq:NN \item \__enumext_start_item_tmp_vii:
2896 }
2897 {
2898   \__enumext_stop_item_tmp_vii:
2899   \__enumext_remove_extra_parsep_vii:
2900   \__enumext_stop_list:
2901   \__enumext_stop_store_level_vii:
2902   \__enumext_after_list_vii:
2903 }
```

(End of definition for `enumext*`. This function is documented on page 4.)

`__enumext_safe_exec_vii:` First check the maximum nesting level for the `enumext*` environment then set the vars `\l__enumext_starred_bool` and `\g__enumext_starred_bool`.

```

2904 \cs_new_protected:Nn \__enumext_safe_exec_vii:
2905 {
2906   \int_incr:N \l__enumext_level_h_int
2907   \int_compare:nNt { \l__enumext_level_h_int } > { 1 }
2908   {
2909     \msg_error:nn { enumext } { nested }
2910   }
2911   \bool_set_true:N \l__enumext_starred_bool
2912 }

```

(End of definition for `__enumext_safe_exec_vii:`)

`__enumext_parse_keys_vii:n` Parse [`<key = val>`] for `enumext*`. If the variable `\l__enumext_store_active_bool` is true it will call the function `__enumext_parse_store_keys_vii:n` and reprocess the keys to pass them to the storage sequence.

```

2913 \cs_new_protected:Npn \__enumext_parse_keys_vii:n #1
2914 {
2915   \tl_if_novalue:nF {#1}
2916   {
2917     \keys_set:nn { enumext / enumext* } {#1}
2918     \bool_if:NT \l__enumext_store_active_bool
2919     {
2920       \__enumext_parse_store_keys_vii:n {#1}
2921     }
2922   }
2923 }

```

(End of definition for `__enumext_parse_keys_vii:n`)

`__enumext_parse_store_keys_vii:n` The function `__enumext_parse_store_keys_vii:n` searches for the values of the `columns` and `columns-sep` keys in the optional argument in `enumext*` environment as long as the starred versions of the `columns*` and `columns-sep*` keys are not active. The captured values are stored in the variable `\l__enumext_store_opt_vii_tl` which is used by the function `__enumext_store_level_open_vii:`.

```

2924 \cs_new_protected:Npn \__enumext_parse_store_keys_vii:n #1
2925 {
2926   \bool_if:NF \l__enumext_store_columns_vii_bool
2927   {
2928     \regex_match:nnT { \b columns\b } {#1}
2929     {
2930       \int_set_eq:NN
2931         \l__enumext_store_columns_vii_int
2932         \l__enumext_columns_vii_int
2933       \tl_put_right:Ne \l__enumext_store_opt_vii_tl
2934       {
2935         columns = \exp_not:V \l__enumext_store_columns_vii_int ,
2936       }
2937     }
2938   }
2939   \bool_if:NF \l__enumext_store_columns_sep_vii_bool
2940   {
2941     \regex_match:nnT { \b columns-sep\b } {#1}
2942     {
2943       \dim_set_eq:NN
2944         \l__enumext_store_columns_sep_vii_dim
2945         \l__enumext_columns_sep_vii_dim
2946       \tl_put_right:Ne \l__enumext_store_opt_vii_tl
2947       {
2948         columns-sep = \exp_not:V \l__enumext_store_columns_sep_vii_dim,
2949       }
2950     }
2951   }
2952 }

```

(End of definition for `__enumext_parse_store_keys_vii:n`)

`__enumext_before_list_vii:` The function `__enumext_before_list_vii:` will add the vertical spacing on the environment if the `above` key is active next to the `{\code}` defined by the `before*` key if it is active, the call the function `__enumext_start_mini_vii:` handle by `mini-env`.

```

2953 \cs_new_protected:Nn \__enumext_before_list_vii:
2954 {
2955     \__enumext_vspace_above_vii:
2956     \__enumext_check_ans_count: % need by chek-ans
2957     \__enumext_before_args_exec_vii:
2958     \__enumext_start_mini_vii:
2959 }

```

(End of definition for `__enumext_before_list_vii:`.)

`__enumext_after_list_vii:` The function `__enumext_after_list:` first call the function `__enumext_stop_mini_vii:`, then apply the `{\code}` handled by the `after` key together with the *vertical space* handled by the `below` key if they are present. Finally set false the vars `\g__enumext_starred_bool` and `\l__enumext_starred_bool`, save the *current value* of the counter in `\g__enumext_resume_vii_int` for the `resume` key. If the `save-ans` key is active, it will create the integer variable for the `resume` key, we only have to assign it the value of the current counter.

```

2960 \cs_new_protected:Nn \__enumext_after_list_vii:
2961 {
2962     \__enumext_stop_mini_vii:
2963     \__enumext_after_stop_list_vii:
2964     \__enumext_vspace_below_vii:
2965     \int_gset_eq:NN \g__enumext_resume_vii_int \value{enumXvii}
2966     \int_if_exist:cT { g__enumext_resume_ \l__enumext_store_name_tl _int }
2967     {
2968         \int_gset_eq:cN
2969         { g__enumext_resume_ \l__enumext_store_name_tl _int }
2970         { \value{enumXvii} }
2971     }
2972     \bool_lazy_and:nnT { \g__enumext_starred_bool } { \l__enumext_check_ans_bool }
2973     {
2974         \bool_gset_true:N \g__enumext_check_ans_show_h_bool
2975         \tl_gset:NV \g__enumext_store_name_tl \l__enumext_store_name_tl
2976     }
2977     \bool_gset_false:N \g__enumext_starred_bool
2978     \bool_set_false:N \l__enumext_starred_bool
2979 }

```

(End of definition for `__enumext_after_list_vii:`.)

`__enumext_start_store_level_vii:` The `__enumext_start_store_level_vii:` and `__enumext_stop_store_level_vii:` functions activate the level saving mechanism for storage in `\sequence` of the `\anskey` command if `enumext*` are nested in `enumext`.

`__enumext_stop_store_level_vii:`

```

2980 \cs_new_protected:Nn \__enumext_start_store_level_vii:
2981 {
2982     \bool_if:NT \l__enumext_store_active_bool
2983     {
2984         \int_compare:nNnT { \l__enumext_level_int } > { \c_zero_int }
2985         {
2986             \__enumext_store_level_open_vii:
2987         }
2988     }
2989 }
2990 \cs_new_protected:Nn \__enumext_stop_store_level_vii:
2991 {
2992     \bool_if:NT \l__enumext_store_active_bool
2993     {
2994         \int_compare:nNnT { \l__enumext_level_int } > { \c_zero_int }
2995         {
2996             \__enumext_store_level_close_vii:
2997         }
2998     }
2999 }

```

(End of definition for `__enumext_start_store_level_vii:` and `__enumext_stop_store_level_vii:`.)

10.35.2 The command `\item` in `enumext`*

`__enumext_start_item_tmp_vii:` First we will call the function `__enumext_stop_item_tmp_vii:` that we will redefine later, we will increment the value of `\l__enumext_item_column_pos_vii_int` that will count the item's by rows and the value of `\g__enumext_item_count_all_vii_int` that will count the total of item's in the environment. After that we will call the function `__enumext_item_peek_args_vii:` that will handle the arguments passed to `\item`.

```

3000 \cs_new_protected_nopar:Nn \__enumext_start_item_tmp_vii:
3001 {
3002   \__enumext_stop_item_tmp_vii:
3003   \int_incr:N \l__enumext_item_column_pos_vii_int
3004   \int_gincr:N \g__enumext_item_count_all_vii_int
3005   \__enumext_item_peek_args_vii:
3006 }

```

(End of definition for `__enumext_start_item_tmp_vii:`)

`__enumext_item_peek_args_vii:` The function `__enumext_item_peek_args_vii:` will handle the `\item(<number>)`. Look for the argument “(”, if it is present we will call the function `__enumext_joined_item_vii:w (<number>)`, which is in charge of joining the item's in the same row, in case they are not present we will set the default value (1).

```

3007 \cs_new_protected:Nn \__enumext_item_peek_args_vii:
3008 {
3009   \peek_meaning:NTF (
3010     { \__enumext_joined_item_vii:w }
3011     { \__enumext_joined_item_vii:w (1) }
3012   }

```

(End of definition for `__enumext_item_peek_args_vii:`)

`__enumext_joined_item_vii:w` The function `__enumext_joined_item_vii:w` will first call the function `__enumext_starred_joined_item_vii:n` in charge of setting the *width* of the box that will store the content passed to `\item`. Then we will look for the argument “*”, if it is present we will call the function `__enumext_starred_item_vii:w` otherwise we will call the function `__enumext_standard_item_vii:w`.

```

3013 \cs_new_protected:Npn \__enumext_joined_item_vii:w (#1)
3014 {
3015   \__enumext_starred_joined_item_vii:n {#1}
3016   \peek_meaning_remove:NTF *
3017     { \__enumext_starred_item_vii:w }
3018     { \__enumext_standard_item_vii:w }
3019 }

```

(End of definition for `__enumext_joined_item_vii:w`)

`__enumext_standard_item_vii:w` The function `__enumext_standard_item_vii:w` will first look for the argument “[”, if present it will set the state of the variable `\l__enumext_wrap_label_opt_vii_bool` equal to the state of the variable `\l__enumext_wrap_label_opt_vii_bool` handled by the key `wrap-label*` and finally execute the *non-enumerated* version `\item[<custom>]` by means of the function `__enumext_start_item_vii:w`, otherwise we will set the value of the variable `\l__enumext_wrap_label_vii_bool` handled by the `wrap-label` key to true and set the switch `\if@noitemarg` to true to execute the enumerated version of `\item` by means of the function `__enumext_start_item_vii:w [__enumext_label_vii_tl]`.

```

3020 \cs_new_protected:Npn \__enumext_standard_item_vii:w
3021 {
3022   \bool_set_false:N \l__enumext_item_starred_vii_bool
3023   \peek_meaning:NTF [
3024     {
3025       \bool_set_eq:NN
3026       \l__enumext_wrap_label_vii_bool
3027       \l__enumext_wrap_label_opt_vii_bool
3028       \__enumext_start_item_vii:w
3029     }
3030     {
3031       \bool_set_true:N \l__enumext_wrap_label_vii_bool
3032       \legacy_if_set_true:n { @noitemarg }
3033       \__enumext_start_item_vii:w [ \__enumext_label_vii_tl ]
3034     }
3035   }

```

(End of definition for `__enumext_standard_item_vii:w`)

```

    \__enumext_starred_item_vii:w
    \__enumext_starred_item_vii_aux_i:w
    \__enumext_starred_item_vii_aux_ii:w
    \__enumext_starred_item_vii_aux_iii:w

```

The function `__enumext_starred_item_vii:w` together with the specified auxiliary functions `aux_i:w`, `aux_ii:w`, and `aux_iii:w` execute `\item*`, `\item*[\langle symbol \rangle]` and `\item*[\langle symbol \rangle][\langle offset \rangle]`.

```

3036 \cs_new_protected:Npn \__enumext_starred_item_vii:w
3037 {
3038   \bool_set_true:N \l__enumext_item_starred_vii_bool
3039   \bool_set_true:N \l__enumext_wrap_label_vii_bool
3040   \peek_meaning:NTF [
3041     { \__enumext_starred_item_vii_aux_i:w }
3042     { \__enumext_starred_item_vii_aux_ii:w }
3043   }
3044   \cs_new_protected:Npn \__enumext_starred_item_vii_aux_i:w [#1]
3045   {
3046     \tl_gset:Nn \g__enumext_item_symbol_aux_vii_tl {#1}
3047     \__enumext_starred_item_vii_aux_ii:w
3048   }
3049   \cs_new_protected:Npn \__enumext_starred_item_vii_aux_ii:w
3050   {
3051     \peek_meaning:NTF [
3052       { \__enumext_starred_item_vii_aux_iii:w }
3053       {
3054         \dim_set_eq:NN
3055         \l__enumext_item_symbol_sep_vii_dim
3056         \l__enumext_labelsep_vii_dim
3057         \legacy_if_set_true:n { @noitemarg }
3058         \__enumext_start_item_vii:w [ \l__enumext_label_vii_tl ]
3059       }
3060     }
3061     \cs_new_protected:Npn \__enumext_starred_item_vii_aux_iii:w [#1]
3062     {
3063       \dim_set:Nn \l__enumext_item_symbol_sep_vii_dim {#1}
3064       \legacy_if_set_true:n { @noitemarg }
3065       \__enumext_start_item_vii:w [ \l__enumext_label_vii_tl ]
3066     }

```

(End of definition for `__enumext_starred_item_vii:w` and others.)

10.35.3 Real definition of `\item` in `enumext*`

```
\__enumext_start_item_vii:w
```

The functions `__enumext_start_item_vii:w` and `__enumext_stop_item_vii:` executing the true definition of `\item` inside the `enumext*` environment.

The first thing we will do is set the value of `__enumext_stop_item_tmp_vii:` equal to the value of `__enumext_stop_item_vii:` which we will define later and add the [hyperref](#) compatible `enumXvii` counter, after that we will start capturing the item content in a box. Here need setting the `\if@hyper@item` switch to “true” for [hyperref](#) compatible. The explanation for this is given by the master Heiko Oberdiek on `\refstepcounter{enumi}` twice (or more) creates destination with the same identifier.

```

3067 \cs_new_protected_nopar:Npn \__enumext_start_item_vii:w [#1]
3068 {
3069   \cs_set_eq:NN \__enumext_stop_item_tmp_vii: \__enumext_stop_item_vii:
3070   \legacy_if:nT { @noitemarg }
3071   {
3072     \legacy_if_set_false:n { @noitemarg }
3073     \legacy_if:nT { @nmbrrlist }
3074     {
3075       \bool_if:NT \l__enumext_hyperref_bool
3076       {
3077         \legacy_if_set_true:n { @hyper@item }
3078       }
3079       \refstepcounter{enumXvii}
3080       % code for check-ans
3081       \bool_if:NT \l__enumext_check_ans_bool
3082       {
3083         \int_gincr:N \g__enumext_count_item_number_int % new
3084         % If true |no-store| key => nested in |enumext|
3085         \bool_if:NTF \l__enumext_store_ans_bool
3086         {
3087           \int_gadd:cn { g__enumext_count_item_ \__enumext_level: _int }
3088           { \int_use:c { g__enumext_count_level_ \__enumext_level: _int } + 1 }
3089         }
3090       }
3091       \int_gincr:N \g__enumext_count_item_all_int
3092       \int_gincr:N \g__enumext_count_level_vii_int

```

```

3093         }
3094     }
3095 }
3096 }

```

Here we start capturing `\item` and its contents into a group using the plain form of the `lrbox` environment. If the state of the variable `\l__enumext_footnotes_key_bool` is false, we will redefine the command `\footnote`, followed by printing the $\langle symbol \rangle$ defined for `\item*` if it is present and open a new group inside which we execute `font` key next to `\item` and the keys `wrap-label`, `wrap-label*`, `align`, close the group and execute the key `labelsep` and then the key `first`. Finally we open the `minipage` environment and execute the `listparindent` key which will be equal to `\parindent`, the `parsep` key which will be equal to `\parskip` and the `itemindent` key.

```

3097 \group_begin:
3098   \lrbox{ \l__enumext_item_text_vii_box }
3099   \bool_if:NF \l__enumext_footnotes_key_bool
3100   {
3101     \__enumext_renew_footnote:
3102   }
3103   \bool_if:NT \l__enumext_item_starred_vii_bool
3104   {
3105     \tl_if_blank:VT \g__enumext_item_symbol_aux_vii_tl
3106     {
3107       \tl_gset_eq:NN
3108         \g__enumext_item_symbol_aux_vii_tl \l__enumext_item_symbol_vii_tl
3109     }
3110     \mode_leave_vertical:
3111     \skip_horizontal:n { -\l__enumext_item_symbol_sep_vii_dim }
3112     \makebox[ 0pt ][ r ]{ \g__enumext_item_symbol_aux_vii_tl }
3113     \skip_horizontal:N \l__enumext_item_symbol_sep_vii_dim
3114     \tl_gclear:N \g__enumext_item_symbol_aux_vii_tl
3115   }
3116   \group_begin:
3117     \tl_use:N \l__enumext_label_font_style_vii_tl
3118     \bool_if:NTF \l__enumext_wrap_label_vii_bool
3119     {
3120       \makebox[ \l__enumext_labelwidth_vii_dim ][ \l__enumext_align_label_vii_str ]
3121       { \__enumext_wrapper_label_vii:n {#1} }
3122     }
3123     {
3124       \makebox[ \l__enumext_labelwidth_vii_dim ][ \l__enumext_align_label_vii_str ]{ #1 }
3125     }
3126   \group_end:
3127   \skip_horizontal:N \l__enumext_labelsep_vii_dim
3128   \tl_use:N \l__enumext_after_list_args_vii_tl
3129   \__enumext_minipage:w [ t ]{ \l__enumext_joined_width_vii_dim }
3130   \skip_set_eq:NN \parindent \l__enumext_listparindent_vii_dim
3131   \skip_set_eq:NN \parskip \l__enumext_parsep_vii_skip
3132   \tl_use:N \l__enumext_fake_item_indent_vii_tl
3133 }

```

(End of definition for `__enumext_start_item_vii:w`.)

`__enumext_stop_item_vii:` The function `__enumext_stop_item_vii:` shall terminate with the capture of `\item` and its $\langle contents \rangle$. Close the environments `minipage`, `lrbox` and the group. Then we only have to set the width of the box and print it next to `\footnote`, and add the horizontal and vertical separation between the boxes.

```

3134 \cs_new_protected_nopar:Nn \__enumext_stop_item_vii:
3135 {
3136   \__enumext_endminipage:
3137   \endlrbox
3138   \group_end:
3139   \box_set_wd:Nn \l__enumext_item_text_vii_box
3140   {
3141     \l__enumext_joined_width_vii_dim
3142     + \l__enumext_labelwidth_vii_dim
3143     + \l__enumext_labelsep_vii_dim
3144   }
3145   \int_set:Nn \hbadness { 10000 }
3146   \box_use:N \l__enumext_item_text_vii_box
3147   \bool_if:NF \l__enumext_footnotes_key_bool
3148   {
3149     \__enumext_print_footnote:

```



```

3150     }
3151     \int_compare:nNnTF { \l__enumext_item_column_pos_vii_int } = { \l__enumext_columns_vii_int }
3152     {
3153         \par\noindent
3154         \int_zero:N \l__enumext_item_column_pos_vii_int
3155     }
3156     { \hspace{ \l__enumext_columns_sep_vii_dim } }
3157 }

```

(End of definition for `__enumext_stop_item_vii:.`)

`__enumext_remove_extra_parsep_vii:` Finally we will remove the vertical space equal to `\parsep` when the total number of items is divisible by the number of items in the last row of the environment.

```

3158 \cs_new_protected:Nn \__enumext_remove_extra_parsep_vii:
3159 {
3160     \int_compare:nNnT
3161     {
3162         \int_mod:nn { \g__enumext_item_count_all_vii_int } { \l__enumext_columns_vii_int }
3163     }
3164     =
3165     { \c_zero_int }
3166     {
3167         \par
3168         \vspace{ -\l__enumext_itemsep_vii_skip }
3169         \int_gzero:N \g__enumext_item_count_all_vii_int
3170     }
3171 }

```

(End of definition for `__enumext_remove_extra_parsep_vii:.`)

As we don't want our check to be executed `check-ans` by levels but on the complete list, we will take it out of the `enumext*` environment using the “hook” function `__enumext_after_env:nn`.

```

3172 \__enumext_after_env:nn {enumext*}
3173 {
3174     \bool_if:NT \g__enumext_check_ans_show_h_bool
3175     {
3176         \int_compare:nNnT { \l__enumext_level_int } = { 0 }
3177         {
3178             \__enumext_check_ans_active_vii:
3179         }
3180     }
3181     \bool_gset_false:N \g__enumext_check_ans_show_h_bool
3182     \tl_gclear:N \g__enumext_store_name_tl
3183 }

```

10.36 The keyans* environment

10.36.1 Functions for item box width

`__enumext_starred_columns_set_viii:` We set the default value for the width of the box containing the content of the items and create `\itemwidth` in a public form.

```

3184 \cs_new_protected:Nn \__enumext_starred_columns_set_viii:
3185 {
3186     \dim_compare:nNnT { \l__enumext_columns_sep_viii_dim } = { \c_zero_dim }
3187     {
3188         \dim_set:Nn \l__enumext_columns_sep_viii_dim
3189         {
3190             ( \l__enumext_labelwidth_viii_dim + \l__enumext_labelsep_viii_dim )
3191             / \l__enumext_columns_viii_int
3192         }
3193     }
3194     \int_set:Nn \l__enumext_tmpa_viii_int { \l__enumext_columns_viii_int - \c_one_int }
3195     \dim_set:Nn \l__enumext_item_width_viii_dim
3196     {
3197         ( \linewidth - \l__enumext_columns_sep_viii_dim * \l__enumext_tmpa_viii_int )
3198         / \l__enumext_columns_viii_int - \l__enumext_labelwidth_viii_dim
3199         - \l__enumext_labelsep_viii_dim
3200     }
3201     \dim_zero_new:N \itemwidth
3202 }

```

(End of definition for `__enumext_starred_columns_set_viii:.`)

_enumext_starred_joined_item_viii:n

The function _enumext_starred_joined_item_viii:n will set the *width* of the box in which the content passed to \item(<number>) will be stored together with the value of \itemwidth.

```

3203 \cs_new_protected:Npn \_enumext_starred_joined_item_viii:n #1
3204 {
3205   \int_set:Nn \l__enumext_joined_item_viii_int {#1}
3206   \int_compare:nNt { \l__enumext_joined_item_viii_int } > { \l__enumext_columns_viii_int }
3207   {
3208     \msg_warning:nnee { enumext } { item-joined }
3209     { \int_use:N \l__enumext_joined_item_viii_int }
3210     { \int_use:N \l__enumext_columns_viii_int }
3211     \int_set:Nn \l__enumext_joined_item_viii_int
3212     {
3213       \l__enumext_columns_viii_int - \l__enumext_item_column_pos_viii_int + \c_one_int
3214     }
3215   }
3216   \int_compare:nNt
3217   { \l__enumext_joined_item_viii_int }
3218   >
3219   { \l__enumext_columns_viii_int - \l__enumext_item_column_pos_viii_int + \c_one_int }
3220   {
3221     \msg_warning:nnee { enumext } { item-joined-columns }
3222     { \int_use:N \l__enumext_joined_item_viii_int }
3223     {
3224       \int_eval:n
3225       { \l__enumext_columns_viii_int - \l__enumext_item_column_pos_viii_int + \c_one_int }
3226     }
3227     \int_set:Nn \l__enumext_joined_item_viii_int
3228     {
3229       \l__enumext_columns_viii_int - \l__enumext_item_column_pos_viii_int + \c_one_int
3230     }
3231   }
3232   \int_compare:nNtTF { \l__enumext_joined_item_viii_int } > { \c_one_int }
3233   {
3234     \int_set_eq:NN \l__enumext_joined_item_aux_viii_int \l__enumext_joined_item_viii_int
3235     \int_decr:N \l__enumext_joined_item_aux_viii_int
3236     \int_add:Nn \l__enumext_item_column_pos_viii_int { \l__enumext_joined_item_aux_viii_int }
3237     \int_gadd:Nn \g__enumext_item_count_all_viii_int { \l__enumext_joined_item_aux_viii_int }
3238     \dim_set:Nn \l__enumext_joined_width_viii_dim
3239     {
3240       \l__enumext_item_width_viii_dim * \l__enumext_joined_item_viii_int
3241       + ( \l__enumext_labelwidth_viii_dim + \l__enumext_labelsep_viii_dim
3242         + \l__enumext_columns_sep_viii_dim
3243         ) * \l__enumext_joined_item_aux_viii_int
3244     }
3245     \dim_set_eq:NN \itemwidth \l__enumext_joined_width_viii_dim
3246   }
3247   {
3248     \dim_set_eq:NN \l__enumext_joined_width_viii_dim \l__enumext_item_width_viii_dim
3249     \dim_set_eq:NN \itemwidth \l__enumext_item_width_viii_dim
3250   }
3251 }

```

(End of definition for _enumext_starred_joined_item_viii:n.)

_enumext_start_mini_viii:

The implementation of the mini-env key is identical to the one used in the enumext* environment.

_enumext_stop_mini_viii:

```

3252 \cs_new_protected:Nn \_enumext_start_mini_viii:
3253 {
3254   \dim_compare:nNt { \l__enumext_minipage_right_viii_dim } > { \c_zero_dim }
3255   {
3256     \dim_set:Nn \l__enumext_minipage_left_viii_dim
3257     {
3258       \linewidth
3259       - \l__enumext_minipage_right_viii_dim
3260       - \l__enumext_minipage_hsep_viii_dim
3261     }
3262     \bool_set_true:N \l__enumext_minipage_active_viii_bool
3263     \dim_gset_eq:NN
3264     \g__enumext_minipage_right_viii_dim
3265     \l__enumext_minipage_right_viii_dim
3266     \_enumext_mini_addvspace_viii:

```

```

3267         \nointerlineskip\noident
3268         \begin{__enumext_mini_env*}{ \l__enumext_minipage_left_viii_dim }
3269     }
3270 }
3271 \cs_new_protected:Nn \__enumext_stop_mini_viii:
3272 {
3273     \bool_if:NT \l__enumext_minipage_active_viii_bool
3274     {
3275         \end{__enumext_mini_env*}
3276         \hfill
3277         \bool_gset_true:N \g__enumext_minipage_active_viii_bool
3278     }
3279 }
3280 \__enumext_after_env:nn {keyans*}
3281 {
3282     \bool_if:NT \g__enumext_minipage_active_viii_bool
3283     {
3284         \begin{__enumext_mini_env*}{ \g__enumext_minipage_right_viii_dim }
3285         \par\addvspace { \g__enumext_minipage_right_skip }
3286         \bool_if:NF \g__enumext_minipage_center_viii_bool
3287         {
3288             \centering
3289         }
3290         \tl_use:N \g__enumext_miniright_code_viii_tl % the code
3291         \end{__enumext_mini_env*}
3292         \par\addvspace{ \g__enumext_minipage_after_skip }
3293     }
3294     \bool_gset_false:N \g__enumext_minipage_active_viii_bool
3295     \bool_gset_true:N \g__enumext_minipage_center_viii_bool
3296     \tl_gclear:N \g__enumext_miniright_code_viii_tl
3297     \dim_gzero:N \g__enumext_minipage_right_viii_dim
3298 }

```

(End of definition for __enumext_start_mini_viii: and __enumext_stop_mini_viii:.)

keyans* First we will generate the environment and we will give a temporary definition to __enumext_stop_item_tmp_viii: equal to \noindent and next to \item equal to __enumext_start_item_tmp_viii: which we will redefine later.

```

3299 \NewDocumentEnvironment{keyans*}{ o }
3300 {
3301     \__enumext_safe_exec_viii:
3302     \__enumext_parse_keys_viii:n {#1}
3303     \__enumext_before_list_viii:
3304     \__enumext_start_list:nn { }
3305     {
3306         \__enumext_list_arg_two_viii:
3307         \__enumext_before_keys_exec_viii:
3308     }
3309     \__enumext_starred_columns_set_viii:
3310     \item[] \scan_stop:
3311     \cs_set_eq:NN \__enumext_stop_item_tmp_viii: \noindent
3312     \cs_set_eq:NN \item \__enumext_start_item_tmp_viii:
3313 }
3314 {
3315     \__enumext_stop_item_tmp_viii:
3316     \__enumext_remove_extra_parsep_viii:
3317     \__enumext_keyans_check_ans:nn { item }{ keyans* }
3318     \__enumext_stop_list:
3319     \__enumext_after_list_viii:
3320 }

```

(End of definition for keyans*. This function is documented on page 11.)

__enumext_safe_exec_viii: First check the maximum nesting level for the **keyans*** environment.

```

3321 \cs_new_protected:Nn \__enumext_safe_exec_viii:
3322 {
3323     \int_incr:N \l__enumext_keyans_level_h_int
3324     \int_compare:nNtT { \l__enumext_keyans_level_h_int } > { 1 }
3325     {
3326         \msg_error:nn { enumext } { nested }
3327     }

```

```

3328 % Set false for interfering with enumext nested in keyans* (yes, its possible and crayze)
3329 \bool_set_false:N \l__enumext_store_active_bool
3330 \int_compare:nNnT { \l__enumext_level_int } > { 1 }
3331 {
3332     \msg_error:nn { enumext } { keyans-wrong-level }
3333 }
3334 }

```

(End of definition for `__enumext_safe_exec_viii:`)

`__enumext_parse_keys_viii:n` Parse [`<key = val>`] for `keyans*`.

```

3335 \cs_new_protected:Npn \__enumext_parse_keys_viii:n #1
3336 {
3337     \tl_if_novalue:nF {#1}
3338     {
3339         \keys_set:nn { enumext / keyans* } {#1}
3340     }
3341 }

```

(End of definition for `__enumext_parse_keys_viii:n`)

`__enumext_before_list_viii:` The function `__enumext_before_list_viii:` will add the vertical spacing on the environment if the above key is active next to the `{<code>}` defined by the `before*` key if it is active, the call the function `__enumext_start_mini_viii:` handle by `mini-env`.

```

3342 \cs_new_protected:Nn \__enumext_before_list_viii:
3343 {
3344     \__enumext_vspace_above_viii:
3345     \__enumext_before_args_exec_viii:
3346     \__enumext_start_mini_viii:
3347 }

```

(End of definition for `__enumext_before_list_viii:`)

`__enumext_after_list_viii:` The function `__enumext_after_list:` first call the function `__enumext_stop_mini_viii:`, then apply the `{<code>}` handled by the `after` key together with the *vertical space* handled by the `below` key if they are present.

```

3348 \cs_new_protected:Nn \__enumext_after_list_viii:
3349 {
3350     \__enumext_stop_mini_viii:
3351     \__enumext_after_stop_list_viii:
3352     \__enumext_vspace_below_viii:
3353 }

```

(End of definition for `__enumext_after_list_viii:`)

10.36.2 The command `\item` in `keyans*`

The idea here is to make the `\item` command behave in the same way as in the `keyans` environment with the difference of the optional argument (`<number>`) which works in the same way as in the `enumext*` environment. In simple terms we want to store the `<label>` next to the [`<content>`] if it is present in the `<sequence>` and `<prop list>` defined by `save-ans` key for `\item*`, `\item* [<content>]`, `\item(<number>)*` and `\item(<number>)* [<content>]` commands.

`__enumext_start_item_tmp_viii:` First we will call the function `__enumext_stop_item_tmp_viii:` that we will redefine later, we will increment the value of `\l__enumext_item_column_pos_viii_int` that will count the item's by rows and the value of `\g__enumext_item_count_all_viii_int` that will count the total of item's in the environment. After that we will call the function `__enumext_item_peek_args_viii:` that will handle the arguments passed to `\item`.

```

3354 \cs_new_protected_nopar:Nn \__enumext_start_item_tmp_viii:
3355 {
3356     \__enumext_stop_item_tmp_viii:
3357     \int_incr:N \l__enumext_item_column_pos_viii_int
3358     \int_gincr:N \g__enumext_item_count_all_viii_int
3359     \__enumext_item_peek_args_viii:
3360 }

```

(End of definition for `__enumext_start_item_tmp_viii:`)

`__enumext_item_peek_args_viii:` The function `__enumext_item_peek_args_viii:` will handle the `\item(<number>)`. Look for the argument “(”, if it is present we will call the function `__enumext_joined_item_viii:w (<number>)`, which is in charge of joining the item’s in the same row, in case they are not present we will set the default value (1).

```

3361 \cs_new_protected:Nn \__enumext_item_peek_args_viii:
3362 {
3363   \peek_meaning:NTF (
3364     { \__enumext_joined_item_viii:w }
3365     { \__enumext_joined_item_viii:w (1) }
3366   }

```

(End of definition for `__enumext_item_peek_args_viii:.`)

`__enumext_joined_item_viii:w` The function `__enumext_joined_item_viii:w` will first call the function `__enumext_starred_joined_item_viii:n` in charge of setting the *width* of the box that will store the content passed to `\item`. Then we will look for the argument “*”, if it is present we will call the function `__enumext_starred_item_viii:w` otherwise we will call the function `__enumext_standard_item_viii:w`.

```

3367 \cs_new_protected:Npn \__enumext_joined_item_viii:w (#1)
3368 {
3369   \__enumext_starred_joined_item_viii:n {#1}
3370   \peek_meaning_remove:NTF *
3371   { \__enumext_starred_item_viii:w }
3372   { \__enumext_standard_item_viii:w }
3373 }

```

(End of definition for `__enumext_joined_item_viii:w.`)

`__enumext_standard_item_viii:w` The function `__enumext_standard_item_viii:w` will first look for the argument “[”, if present it will set the state of the variable `\l__enumext_wrap_label_opt_viii_bool` equal to the state of the variable `\l__enumext_wrap_label_opt_viii_bool` handled by the key `wrap-label*` and finally execute the *non-enumerated* version `\item[<custom>]` by means of the function `__enumext_start_item_viii:w`, otherwise we will set the value of the variable `\l__enumext_wrap_label_viii_bool` handled by the `wrap-label` key to true and set the switch `\if@noitemarg` to true to execute the enumerated version of `\item` by means of the function `__enumext_start_item_viii:w [\l__enumext_label_viii_tl]`.

```

3374 \cs_new_protected:Npn \__enumext_standard_item_viii:w
3375 {
3376   \bool_set_false:N \l__enumext_item_starred_viii_bool
3377   \peek_meaning:NTF [
3378     {
3379       \bool_set_eq:NN
3380       \l__enumext_wrap_label_viii_bool
3381       \l__enumext_wrap_label_opt_viii_bool
3382       \__enumext_start_item_viii:w
3383     }
3384     {
3385       \bool_set_true:N \l__enumext_wrap_label_viii_bool
3386       \legacy_if_set_true:n { @noitemarg }
3387       \__enumext_start_item_viii:w [ \l__enumext_label_viii_tl ]
3388     }
3389   }

```

(End of definition for `__enumext_standard_item_viii:w.`)

`__enumext_starred_item_viii:w` The function `__enumext_starred_item_viii:w` together with the specified auxiliary functions `aux_i:w` and `aux_ii:w` execute `\item*` and `\item* [<content>]`.

```

\__enumext_starred_item_viii_aux_i:w
\__enumext_starred_item_viii_aux_ii:w
3390 \cs_new_protected:Npn \__enumext_starred_item_viii:w
3391 {
3392   \bool_set_true:N \l__enumext_item_starred_viii_bool
3393   \bool_set_true:N \l__enumext_wrap_label_viii_bool
3394   \peek_meaning:NTF [
3395     { \__enumext_starred_item_viii_aux_i:w }
3396     { \__enumext_starred_item_viii_aux_ii:w }
3397   }

```

The optional argument will be captured in the variables `\l__enumext_keyans_tmpa_tl` and `\l__enumext_keyans_tmpp_tl` which we will use later for the implementation of the `show-ans` and `show-pos` keys together with the stored in *(sequence)* and *(prop list)*.

```

3398 \cs_new_protected:Npn \__enumext_starred_item_viii_aux_i:w [#1]
3399 {

```

```

3400 \tl_clear:N \l__enumext_store_keyans_label_tl
3401 \tl_if_novalue:nF { #1 }
3402 {
3403   \tl_set:Ne \l__enumext_keyans_tmpa_tl { \c_space_tl [#1] }
3404   \tl_set:Ne \l__enumext_keyans_tmpb_tl { \c_space_tl #1 }
3405 }
3406 \__enumext_starred_item_viii_aux_ii:w
3407 }
3408 \cs_new_protected:Npn \__enumext_starred_item_viii_aux_ii:w
3409 {
3410   \legacy_if_set_true:n { @noitemarg }
3411   \__enumext_start_item_viii:w [ \l__enumext_label_viii_tl ]
3412 }

```

(End of definition for `__enumext_starred_item_viii:w`, `__enumext_starred_item_viii_aux_i:w`, and `__enumext_starred_item_viii_aux_ii:w`.)

`__enumext_starred_item_exec:`

The function `__enumext_starred_item_exec:` will be in charge of storing the current *label* for *\item** followed by the `[<content>]` for *\item*<content>* if present in the *sequence* and *prop list* set by the *save-ans* key. In this same function the keys *show-ans*, *show-pos* and *store-ref* are implemented.

```

3413 \cs_new_protected:Nn \__enumext_starred_item_exec:
3414 {
3415   \tl_put_left:Ne \l__enumext_store_keyans_label_tl { \l__enumext_label_viii_tl }
3416   \tl_if_blank:VF \l__enumext_keyans_tmpb_tl
3417   {
3418     \tl_put_right:Ne \l__enumext_store_keyans_label_tl { \l__enumext_keyans_tmpb_tl }
3419   }
3420   \__enumext_store_addto_prop:V \l__enumext_store_keyans_label_tl
3421   \__enumext_keyans_store_ref:
3422   \tl_put_left:Ne \l__enumext_store_keyans_label_tl { \item }
3423   \__enumext_keyans_addto_seq_link:
3424   \bool_if:NT \l__enumext_show_answer_bool
3425   {
3426     \tl_if_blank:VF \l__enumext_keyans_tmpa_tl
3427     {
3428       \tl_put_right:Ne \l__enumext_label_viii_tl { \l__enumext_keyans_tmpa_tl }
3429       \__enumext_label_width_by_box:Nn \l__enumext_keyans_tmpa_dim { \l__enumext_keyans_tmpa_tl }
3430       \dim_add:Nn \l__enumext_fake_item_indent_viii_dim { \l__enumext_keyans_tmpa_dim }
3431     }
3432     \__enumext_print_keyans_box:NN \l__enumext_labelwidth_i_dim \l__enumext_labelsep_i_dim
3433   }
3434   \bool_if:NT \l__enumext_show_position_bool
3435   {
3436     \tl_set:Ne \l__enumext_mark_answer_sym_tl
3437     {
3438       \group_begin:
3439       \exp_not:N \normalfont
3440       \exp_not:N \footnotesize [ \int_eval:n
3441       {
3442         \prop_count:c { g__enumext_ \l__enumext_store_name_tl _prop }
3443       }
3444       ]
3445       \group_end:
3446     }
3447     \tl_if_blank:VF \l__enumext_keyans_tmpa_tl
3448     {
3449       \tl_put_right:Ne \l__enumext_label_viii_tl { \l__enumext_keyans_tmpa_tl }
3450       \__enumext_label_width_by_box:Nn \l__enumext_keyans_tmpa_dim { \l__enumext_keyans_tmpa_tl }
3451       \dim_add:Nn \l__enumext_fake_item_indent_viii_dim { \l__enumext_keyans_tmpa_dim }
3452     }
3453     \__enumext_print_keyans_box:NN \l__enumext_labelwidth_i_dim \l__enumext_labelsep_i_dim
3454   }
3455 }

```

(End of definition for `__enumext_starred_item_exec:`.)

Real definition of `\item` in *keyans**

The implementation at this point is very similar to that of the *enumext** environment.

_enumext_start_item_viii:w

```

3456 \cs_new_protected_nopar:Npn \__enumext_start_item_viii:w [#1]
3457 {
3458   \cs_set_eq:NN \__enumext_stop_item_tmp_viii: \__enumext_stop_item_viii:
3459   \legacy_if:nT { @noitemarg }
3460   {
3461     \legacy_if_set_false:n { @noitemarg }
3462     \legacy_if:nT { @nmbrlist }
3463     {
3464       \bool_if:NT \__enumext_hyperref_bool
3465       {
3466         \legacy_if_set_true:n { @hyper@item }
3467       }
3468       \refstepcounter{enumXviii}
3469     }
3470   }

```

Here we start capturing `\item` and its contents into a group using the plain form of the `lrbox` environment.

```

3471 \group_begin:
3472   \lrbox{ \__enumext_item_text_viii_box }
3473   \bool_if:NF \__enumext_footnotes_key_bool
3474   {
3475     \__enumext_renew_footnote:
3476   }
3477   \bool_if:NT \__enumext_item_starred_viii_bool
3478   {
3479     \__enumext_starred_item_exec:
3480   }
3481   \group_begin:
3482     \tl_use:N \__enumext_label_font_style_viii_tl
3483     \bool_if:NTF \__enumext_wrap_label_viii_bool
3484     {
3485       \makebox[ \__enumext_labelwidth_viii_dim ][ \__enumext_align_label_viii_str ]
3486       { \__enumext_wrapper_label_viii:n {#1} }
3487     }
3488     {
3489       \makebox[ \__enumext_labelwidth_viii_dim ][ \__enumext_align_label_viii_str ]{ #1
3490     }
3491   }
3492   \group_end:
3493   \skip_horizontal:N \__enumext_labelsep_viii_dim
3494   \tl_use:N \__enumext_after_list_args_viii_tl
3495   \__enumext_minipage:w [ t ]{ \__enumext_joined_width_viii_dim }
3496   \skip_set_eq:NN \parindent \__enumext_listparindent_viii_dim
3497   \skip_set_eq:NN \parskip \__enumext_parsep_viii_skip
3498   \tl_use:N \__enumext_fake_item_indent_viii_tl
3499 }

```

(End of definition for `__enumext_start_item_viii:w`.)

_enumext_stop_item_viii:

The function `__enumext_stop_item_viii:` shall terminate with the capture of `\item` and its *contents*. Close the environments `minipage`, `lrbox` and the group. Then we only have to set the width of the box and print it next to `\footnote`, and add the horizontal and vertical separation between the boxes.

```

3499 \cs_new_protected_nopar:Nn \__enumext_stop_item_viii:
3500 {
3501   \__enumext_endminipage:
3502   \endlrbox
3503   \group_end:
3504   \box_set_wd:Nn \__enumext_item_text_viii_box
3505   {
3506     \__enumext_joined_width_viii_dim
3507     + \__enumext_labelwidth_viii_dim
3508     + \__enumext_labelsep_viii_dim
3509   }
3510   \int_set:Nn \hbadness { 10000 }
3511   \box_use:N \__enumext_item_text_viii_box
3512   \bool_if:NF \__enumext_footnotes_key_bool
3513   {
3514     \__enumext_print_footnote:
3515   }
3516   \int_compare:nNnTF { \__enumext_item_column_pos_viii_int } = { \__enumext_columns_viii_int }
3517   {

```

```

3518         \par\noindent
3519         \int_zero:N \l__enumext_item_column_pos_viii_int
3520     }
3521     { \hspace{ \l__enumext_columns_sep_viii_dim } }
3522 }

```

(End of definition for `__enumext_stop_item_viii:`.)

`__enumext_remove_extra_parsep_viii:`

Finally we will remove the vertical space equal to `\parsep` when the total number of items is divisible by the number of items in the last row of the environment.

```

3523 \cs_new_protected:Nn \__enumext_remove_extra_parsep_viii:
3524 {
3525     \int_compare:nNnT
3526     {
3527         \int_mod:nn { \g__enumext_item_count_all_viii_int } { \l__enumext_columns_viii_int }
3528     }
3529     =
3530     { \c_zero_int }
3531     {
3532         \par
3533         \vspace{ -\l__enumext_itemsep_viii_skip }
3534         \int_gzero:N \g__enumext_item_count_all_viii_int
3535     }
3536 }

```

(End of definition for `__enumext_remove_extra_parsep_viii:`.)

10.37 The command `\getkeyans`

`\getkeyans`

The `\getkeyans` command takes a mandatory argument of the form `{⟨store name : position⟩}`. Retrieve a “single” content stored by `\anskey`, `\anspic*` and `\item*` from `⟨prop list⟩` defined by `save-ans` key.

```

3537 \NewDocumentCommand \getkeyans { m }
3538 {
3539     \exp_args:Ne \__enumext_getkeyans_aux:n
3540     { \tl_to_str:e { \text_expand:n {#1} } }
3541 }

```

(End of definition for `\getkeyans`. This function is documented on page 13.)

`__enumext_getkeyans_aux:n`

The internal function `__enumext_getkeyans_aux:n` is in charge of *splitting* the `⟨argument⟩` using “:”. If “:” is omitted it will return an error.

```

3542 \cs_new_protected:Npn \__enumext_getkeyans_aux:n #1
3543 {
3544     \str_if_in:nnTF {#1} { : }
3545     {
3546         \use:e
3547         {
3548             \cs_set:Npn \exp_not:N \__enumext_tmp:w ##1 \c_colon_str ##2 \scan_stop:
3549             { {##1} {##2} }
3550         }
3551         \exp_after:wN \__enumext_getkeyans:nn \__enumext_tmp:w #1 \scan_stop:
3552     }
3553     { \msg_error:nnn { enumext } { missing-colon } {#1} }
3554 }

```

(End of definition for `__enumext_getkeyans_aux:n`.)

`__enumext_getkeyans:nn`

The internal function `__enumext_getkeyans:nn` will check for the existence of the `⟨prop list⟩`, if it does not exist it will return an error message, then it will fetch the content specified by the second `⟨argument⟩` from `⟨prop list⟩`.

```

3555 \cs_new_protected:Npn \__enumext_getkeyans:nn #1 #2
3556 {
3557     \prop_if_exist:cF { g__enumext_#1_prop }
3558     { \msg_error:nnn { enumext } { undefined-storage-anskey } {#1} }
3559     \group_begin:
3560     \prop_item:cn { g__enumext_#1_prop }{#2}
3561     \group_end:
3562 }

```

(End of definition for `__enumext_getkeyans:nn`.)

10.38 The command \printkeyans

The `\printkeyans` command prints “all stored content” in the *sequence* defined by the `save-ans` key. The first thing we will do is to define a set of *keys* with which we will control the options of the different nesting levels for the `enumext` and `enumext*` environment by storing the values of these in the token list variables `\l__enumext_print_keyans_X_tl`.

```

3563 \keys_define:nn { keyanskey / print }
3564 {
3565   level-1 .code:n = \tl_put_right:Nn \l__enumext_print_keyans_i_tl
3566                 {
3567                   \setenumext[level,1] {#1} \setenumext[print,1] {#1}
3568                 },
3569   level-1 .initial:n = { label=\arabic*., nosep, columns=2, first=\small, font=\small },
3570   level-2 .code:n = \tl_put_right:Nn \l__enumext_print_keyans_ii_tl
3571                 {
3572                   \setenumext[level,2] {#1} \setenumext[print,2] {#1}
3573                 },
3574   level-2 .initial:n = { nosep, label=(\alph*), first=\small, font=\small },
3575   level-3 .code:n = \tl_put_right:Nn \l__enumext_print_keyans_iii_tl
3576                 {
3577                   \setenumext[level,3] {#1} \setenumext[print,3] {#1}
3578                 },
3579   level-3 .initial:n = { nosep, label=\roman*., first=\small, font=\small },
3580   level-4 .code:n = \tl_put_right:Nn \l__enumext_print_keyans_iv_tl
3581                 {
3582                   \setenumext[level,4] {#1} \setenumext[print,4] {#1}
3583                 },
3584   level-4 .initial:n = { nosep, label=\Alph*., first=\small, font=\small },
3585   level-* .code:n = \tl_put_right:Nn \l__enumext_print_keyans_vii_tl % starred
3586                 {
3587                   \setenumext[enumext*] {#1} %%\setenumext[print,*] {#1}
3588                 },
3589   level-* .initial:n = { label=\arabic*., nosep, columns=2, first=\small, font=\small },
3590 }

```

`\printkeyans` Create a user command to print “all stored content” in *sequence* for `\anskey`, `\item*` and `\anspic*`.

```

3591 \NewDocumentCommand \printkeyans { s O{} m }
3592 {
3593   \group_begin:
3594     \tl_use:N \l__enumext_print_keyans_i_tl
3595     \tl_use:N \l__enumext_print_keyans_ii_tl
3596     \tl_use:N \l__enumext_print_keyans_iii_tl
3597     \tl_use:N \l__enumext_print_keyans_iv_tl
3598     \tl_use:N \l__enumext_print_keyans_vii_tl
3599     \__enumext_printkeyans:nnn { #1 } { #2 } { #3 }
3600   \group_end:
3601 }

```

(End of definition for `\printkeyans`. This function is documented on page 13.)

`__enumext_printkeyans:nnn` The internal function `__enumext_printkeyans:nnn` will check for the existence of the *sequence*, if it does not exist it will return an error message, then it will fetch the content specified by the first argument mapping the *sequence*.

#1: starred
#2: key-val
#3: seq-name

```

3602 \cs_new_protected:Npn \__enumext_printkeyans:nnn #1 #2 #3
3603 {
3604   \seq_if_exist:cTF { g__enumext_#3_seq }
3605   {
3606     \seq_if_empty:cF { g__enumext_#3_seq }
3607     {
3608       %%\seq_show:c { g__enumext_#3_seq }
3609       \bool_if:nTF {#1}
3610       {
3611         \begin{enumext*}[#2]
3612         \seq_map_inline:cn { g__enumext_#3_seq } { ##1 }
3613         \end{enumext*}
3614       }
3615     }

```

```

3616         \begin{enumext}[#2]
3617         \seq_map_inline:cn { g__enumext_#3_seq } { ##1 }
3618         \end{enumext}
3619     }
3620 }
3621 }
3622 {
3623     \msg_error:nnn { enumext } { undefined-storage-anskey } {#3}
3624 }
3625 }

```

(End of definition for `__enumext_printkeyans:nnn`.)

10.39 The command `\setenumext`

First we define a “meta families” of *(keys)* to access from `\setenumext`.

```

3626 \keys_define:nn { enumext / meta-families }
3627 {
3628     level-1 .code:n = { \keys_set:nn { enumext / level-1 } {#1} } ,
3629     level-2 .code:n = { \keys_set:nn { enumext / level-2 } {#1} } ,
3630     level-3 .code:n = { \keys_set:nn { enumext / level-3 } {#1} } ,
3631     level-4 .code:n = { \keys_set:nn { enumext / level-4 } {#1} } ,
3632     keyans .code:n = { \keys_set:nn { enumext / keyans } {#1} } ,
3633     enumext* .code:n = { \keys_set:nn { enumext / enumext* } {#1} } ,
3634     keyans* .code:n = { \keys_set:nn { enumext / keyans* } {#1} } ,
3635     print-1 .code:n = { \keys_set:nn { keyanskey / print } { level-1 = {#1} } } ,
3636     print-2 .code:n = { \keys_set:nn { keyanskey / print } { level-2 = {#1} } } ,
3637     print-3 .code:n = { \keys_set:nn { keyanskey / print } { level-3 = {#1} } } ,
3638     print-4 .code:n = { \keys_set:nn { keyanskey / print } { level-4 = {#1} } } ,
3639     print-* .code:n = { \keys_set:nn { keyanskey / print } { level-* = {#1} } } ,
3640     unknown .code:n = { \msg_error:nn { enumext } { unknown-key-family } } ,
3641 }

```

We store them in the constant sequence `\c__enumext_all_families_seq` separated by commas.

```

3642 \seq_const_from_clist:Nn \c__enumext_all_families_seq
3643 {
3644     level-1 , level-2 , level-3 , level-4 , keyans, enumext*,
3645     keyans* , print-1 , print-2 , print-3 , print-4 , print-*,
3646 }

```

`\setenumext` Now we define the user command `\setenumext`.

```

3647 \NewDocumentCommand \setenumext { o +m }
3648 {
3649     \tl_if_novalue:nTF {#1}
3650     {
3651         \seq_map_inline:Nn \c__enumext_all_families_seq
3652     }
3653     {
3654         \seq_clear:N \l__enumext_setkey_tmpa_seq
3655         \seq_set_from_clist:Nn \l__enumext_setkey_tmpb_seq {#1}
3656         \int_set:Nn \l__enumext_setkey_tmpa_int
3657         {
3658             \seq_count:N \l__enumext_setkey_tmpb_seq
3659         }
3660         \int_compare:nNnTF { \l__enumext_setkey_tmpa_int } > { 1 }
3661         {
3662             \seq_pop_left:NN \l__enumext_setkey_tmpb_seq \l__enumext_setkey_tmpa_tl
3663             \seq_map_function:NN \l__enumext_setkey_tmpb_seq \l__enumext_set_parse:n
3664             \seq_set_map_e:NNn \l__enumext_setkey_tmpa_seq \l__enumext_setkey_tmpa_seq
3665             {
3666                 \tl_use:N \l__enumext_setkey_tmpa_tl - ##1
3667             }
3668         }
3669         {
3670             \seq_put_right:Ne \l__enumext_setkey_tmpa_seq { \tl_trim_spaces:n {#1} }
3671         }
3672         \seq_if_empty:NTF \l__enumext_setkey_tmpa_seq
3673         { \seq_map_inline:Nn \c__enumext_all_families_seq }
3674         { \seq_map_inline:Nn \l__enumext_setkey_tmpa_seq }
3675     }
3676     {
3677         \keys_set:nn { enumext / meta-families } { ##1 = {#2} }

```

```

3678     }
3679 }

```

(End of definition for `\setenumext`. This function is documented on page 5.)

```

\__enumext_set_parse:n
\__enumext_set_error:nn

```

Internal functions used by the `\setenumext` command.

```

3680 \cs_new_protected:Npn \__enumext_set_parse:n #1
3681 {
3682   \tl_set:Nc \l__enumext_setkey_tmpb_tl { \tl_trim_spaces:n {#1} }
3683   \int_step_inline:nnn { 0 } { 4 } {%< max level
3684     { \tl_remove_all:Nn \l__enumext_setkey_tmpb_tl {##1} }
3685     \tl_if_empty:NTF \l__enumext_setkey_tmpb_tl
3686     {
3687       \seq_put_right:Nc \l__enumext_setkey_tmpa_seq
3688         { \tl_trim_spaces:n {#1} }
3689     }
3690     { \__enumext_set_error:nn {#1} { } }
3691 }
3692 \cs_new_protected:Npn \__enumext_set_error:nn #1 #2
3693 { \msg_error:nnn { enumext } { invalid-key } {#1} {#2} }

```

(End of definition for `__enumext_set_parse:n` and `__enumext_set_error:nn`.)

10.40 Messages

Message used by package-load for `multicol` and `hyperref` packages.

```

3694 \msg_new:nnn { enumext } { package-load }
3695 {
3696   The ~ '#1' ~ package ~ is ~ already ~ loaded.
3697 }
3698 \msg_new:nnn { enumext } { package-not-load }
3699 {
3700   The ~ '#1' ~ package ~ will ~ be ~ loaded ~ as ~ a ~ dependency.
3701 }
3702 \msg_new:nnn { enumext } { package-load-foot }
3703 {
3704   The ~ '#1' ~ package ~ is ~ loaded ~ with ~ the ~ option ~ '#2'.
3705 }

```

Message used in the creation of counters by `enumext` package.

```

3706 \msg_new:nnn { enumext } { counters }
3707 {
3708   The ~ counter ~ '#1' ~ is ~ already ~ defined ~ by ~ some ~ \
3709   package ~ or ~ macro, ~ it ~ cannot ~ be ~ continued.
3710 }

```

Message used by `[\langle key = val \rangle]` system and `\setenumext` command.

```

3711 \msg_new:nnn { enumext } { invalid-key }
3712 {
3713   The ~ key ~ '#1' ~ is ~ not ~ know ~ the ~ level ~ #2.
3714 }
3715 \msg_new:nnn { enumext } { unknown-key-family }
3716 {
3717   Unknown~key~family~`\l_keys_key_str'~for~enumext.
3718 }

```

Messages used in length calculation.

```

3719 \msg_new:nnn { enumext } { width-negative }
3720 {
3721   Ignoring ~ negative ~ value ~ '#1=#2' ~ \msg_line_context:.\
3722   The ~ key ~ '#1'~ accepts ~ values ~ >= ~ opt.
3723 }
3724 \msg_new:nnn { enumext } { width-zero }
3725 {
3726   Invalid ~ '#1=#2' ~ \msg_line_context:.\
3727   The ~ key ~ '#1'~ accepts ~ values ~ > ~ opt.
3728 }

```

Messages used by `show-length` key in `enumext`.

```

3729 \msg_new:nnn { enumext } { list-lengths }
3730 {
3731     **** ~ Lengths ~ used ~ by ~ '#2' ~ level ~ '#2' ~ \msg_line_context:~\c_space_tl ****\\
3732     \__enumext_show_length:nnn { dim } { labelsep } {#1}
3733     \__enumext_show_length:nnn { dim } { labelwidth } {#1}
3734     \__enumext_show_length:nnn { dim } { itemindent } {#1}
3735     \__enumext_show_length:nnn { dim } { leftmargin } {#1}
3736     \__enumext_show_length:nnn { dim } { rightmargin } {#1}
3737     \__enumext_show_length:nnn { dim } { listparindent } {#1}
3738     \__enumext_show_length:nnn { skip } { topsep } {#1}
3739     \__enumext_show_length:nnn { skip } { parsep } {#1}
3740     \__enumext_show_length:nnn { skip } { partopsep } {#1}
3741     \__enumext_show_length:nnn { skip } { itemsep } {#1}
3742     *****
3743 }
```

Messages used by `show-length` key in `enumext*`, `keyans*` and `keyans`.

```

3744 \msg_new:nnn { enumext } { list-lengths-not-nested }
3745 {
3746     **** ~ Lengths ~ used ~ by ~ '#2' ~ environment ~ \msg_line_context:~\c_space_tl ****\\
3747     \__enumext_show_length:nnn { dim } { labelsep } {#1}
3748     \__enumext_show_length:nnn { dim } { labelwidth } {#1}
3749     \__enumext_show_length:nnn { dim } { itemindent } {#1}
3750     \__enumext_show_length:nnn { dim } { leftmargin } {#1}
3751     \__enumext_show_length:nnn { dim } { rightmargin } {#1}
3752     \__enumext_show_length:nnn { dim } { listparindent } {#1}
3753     \__enumext_show_length:nnn { skip } { topsep } {#1}
3754     \__enumext_show_length:nnn { skip } { parsep } {#1}
3755     \__enumext_show_length:nnn { skip } { partopsep } {#1}
3756     \__enumext_show_length:nnn { skip } { itemsep } {#1}
3757     *****
3758 }
```

Messages used by the internal system to check answer used by `check-ans` key.

```

3759 \msg_new:nnn { enumext } { items-same-answer }
3760 {
3761     *****~Checking~answers~on~'#1'~OK~*****\\
3762     **~ All ~ items ~ stored ~ in ~ sequence ~ '#1' ~ have ~ an ~ answer. \\
3763     *****
3764     \prg_replicate:nn { 7 + \str_count:n {#1} } { * }
3765 }
3766 \msg_new:nnn { enumext } { item-different-answer }
3767 {
3768     Number ~ of ~ items ~ different ~ of ~ number ~ of ~
3769     answer ~ in ~ sequence ~ '#1'~ closed ~ \msg_line_context:.
3770 }
```

Messages used by the internal system to check for “starred” `\item*` commands.

```

3771 \msg_new:nnn { enumext } { missing-starred }
3772 {
3773     Missing ~ '\c_backslash_str #1*' ~ in ~ '#2' ~ \msg_line_context:.
3774 }
```

Message for the nesting depth of the environment `enumext`.

```

3775 \msg_new:nnn { enumext } { list-too-deep }
3776 {
3777     Too ~ deep ~ nesting ~ for ~ 'enumext' ~ \msg_line_context:~ \\
3778     The ~ maximum ~ level ~ of ~ nesting ~ is ~ 4.
3779 }
```

Messages used by `\anskey` and `\anspic` commands.

```

3780 \msg_new:nnn { enumext } { anskey-wrong-place }
3781 {
3782     Wrong ~ place ~ for ~ command ~ '\c_backslash_str #1' ~ \msg_line_context:~ \\
3783     '\c_backslash_str #1' ~ works ~ in ~ the ~ environment ~ '#2'.
3784 }
3785 \msg_new:nnn { enumext } { anspic-wrong-place }
3786 {
3787     Wrong ~ place ~ for ~ command ~ '\c_backslash_str #1' ~ \msg_line_context:~ \\
3788     '\c_backslash_str #1' ~ works ~ in ~ the ~ environment ~ '#2'.
3789 }
3790 \msg_new:nnn { enumext } { command-wrong-place }
```

```

3791 {
3792     Wrong ~ place ~ for ~ command ~ '\c_backslash_str #1' ~ \msg_line_context:~ \\
3793     '\c_backslash_str #1' ~ works ~ outside ~ the ~ environment ~ '#2'.
3794 }

```

Messages used by `keyans` and `keyanspic` environment.

```

3795 \msg_new:nnn { enumext } { keyans-nested }
3796 {
3797     The ~ environment ~ 'keyans' ~ can't ~ be ~ nested ~ \msg_line_context:.
3798 }
3799 \msg_new:nnn { enumext } { keyans-wrong-level }
3800 {
3801     Wrong ~ level ~ position ~ for ~ 'keyans' ~ \msg_line_context:~ \\
3802     The ~ environment ~ 'keyans' ~ can ~ only ~ be ~ in ~ the ~ first ~ level.
3803 }
3804 \msg_new:nnn { enumext } { wrong-place }
3805 {
3806     Wrong ~ place ~ for ~ '#1' ~ environment ~ \msg_line_context:~ \\
3807     '#1' ~ is ~ only ~ found ~ with ~ '#2' ~ in ~ 'enumext'.
3808 }
3809 \msg_new:nnn { enumext } { keyanspic-nested }
3810 {
3811     The ~ environment ~ 'keyanspic' ~ can't ~ be ~ nested ~ \msg_line_context:~.
3812 }
3813 \msg_new:nnn { enumext } { keyanspic-wrong-level }
3814 {
3815     Wrong ~ level ~ position ~ for ~ 'keyanspic' ~ \msg_line_context:~ \\
3816     The ~ environment ~ 'keyans' ~ can ~ only ~ be ~ in ~ the ~ first ~ level.
3817 }

```

Messages used by `\getkeyans` command.

```

3818 \msg_new:nnn { enumext } { undefined-storage-anskey }
3819 {
3820     Storage ~ named ~ '#1' ~ is ~ not ~ defined ~ \msg_line_context:.
3821 }

```

Messages used by `\miniright` command.

```

3822 \msg_new:nnn { enumext } { missing-miniright }
3823 {
3824     Missing ~ '\c_backslash_str miniright' ~ in ~ \msg_line_context:~ \\
3825     The ~ key ~ 'mini-env' ~ need ~ '\c_backslash_str miniright'.
3826 }
3827 \msg_new:nnn { enumext } { wrong-miniright-place }
3828 {
3829     Wrong ~ place ~ for ~ '\c_backslash_str miniright' ~ \msg_line_context:~ \\
3830     Works ~ in ~ 'enumext' ~ and ~ 'keyans' ~ with ~ key ~ 'mini-env'.
3831 }
3832 \msg_new:nnn { enumext } { wrong-miniright-use }
3833 {
3834     Wrong ~ use ~ for ~ '\c_backslash_str miniright' ~ \msg_line_context:~ \\
3835     '\c_backslash_str miniright' ~ need ~ a ~ key ~ 'mini-env'.
3836 }

```

Messages used by `enumext*` and `keyans*` environments.

```

3837 \msg_new:nnn { enumext } { nested }
3838 {
3839     The ~ starred ~ environment ~ can't ~ be ~ nested ~ \msg_line_context:.
3840 }
3841 \msg_new:nnn { enumext } { item-joined }
3842 {
3843     Items ~ joined ~ (#1) ~ > ~ #2 ~ columns ~ \msg_line_context:.
3844 }
3845 \msg_new:nnn { enumext } { item-joined-columns }
3846 {
3847     Not ~ space ~ to ~ join ~ items ~ (#1) ~ > ~ #2 ~ \msg_line_context:.
3848 }

```

10.41 Finish package

Finish package implementation.

```

3849 \file_input_stop:
3850 </package>

```


enumXv 22, 29

cs commands:

\cs_generate_variant:Nn 319, 335, 534, 550, 1579, 1588, 1593, 1673, 2250, 2748

\cs_if_exist:NTF 289

\cs_new:Nn 190

\cs_new:Npn 194, 199, 209

\cs_new_eq:NN 225, 226, 227, 231, 232, 264, 265, 268, 269

\cs_new_protected:Nn . 236, 400, 420, 452, 715, 719, 723, 727, 731, 735, 739, 743, 747, 751, 755, 759, 763, 767, 771, 775, 811, 823, 847, 864, 875, 899, 974, 998, 1015, 1077, 1094, 1116, 1151, 1157, 1232, 1246, 1260, 1271, 1282, 1293, 1304, 1315, 1359, 1370, 1414, 1436, 1472, 1479, 1493, 1594, 1618, 1625, 1653, 1660, 1777, 1904, 1919, 1947, 1973, 2055, 2059, 2078, 2129, 2163, 2179, 2189, 2205, 2356, 2401, 2419, 2426, 2449, 2479, 2498, 2554, 2577, 2595, 2620, 2631, 2668, 2711, 2724, 2744, 2749, 2765, 2833, 2852, 2904, 2953, 2960, 2980, 2990, 3007, 3158, 3184, 3252, 3271, 3321, 3342, 3348, 3361, 3413, 3523

\cs_new_protected:Npn 182, 186, 272, 287, 304, 314, 320, 408, 427, 521, 535, 1179, 1198, 1342, 1399, 1580, 1589, 1709, 1854, 1866, 1888, 1957, 1995, 2003, 2088, 2106, 2140, 2152, 2219, 2253, 2299, 2363, 2372, 2573, 2719, 2784, 2913, 2924, 3013, 3020, 3036, 3044, 3049, 3061, 3203, 3335, 3367, 3374, 3390, 3398, 3408, 3542, 3555, 3602, 3680, 3692

\cs_new_protected_nopar:Nn ... 3000, 3134, 3354, 3499

\cs_new_protected_nopar:Npn 3067, 3456

\cs_set:Nn 197, 1859

\cs_set:Npn 1787, 1825, 3548

\cs_set_eq:NN 196, 201, 2894, 2895, 3069, 3311, 3312, 3458

\cs_set_protected:Nn 215, 639, 655, 667, 679

\cs_set_protected:Npn . 30, 44, 52, 64, 70, 96, 127, 138, 150, 157, 217, 336, 358, 387, 468, 488, 551, 571, 615, 634, 691, 700, 779, 796, 1215, 1381, 1507, 1536, 1554, 1779, 1908, 2039, 2251, 2297

\cs_to_str:N 306, 329

D

\d 205

\DeclareDocumentEnvironment 892

dim commands:

\dim_abs:n 2224, 2229

\dim_add:Nn 2729, 3430, 3451

\dim_compare:nNnTF . 641, 657, 669, 681, 1181, 1200, 2221, 2226, 2232, 2238, 2240, 2242, 2431, 2454, 2581, 2599, 2721, 2767, 2835, 3186, 3254

\dim_compare:nTF 1750

\dim_gset_eq:NN 2844, 3263

\dim_gzero:N 2878, 3297

\dim_new:N 40, 47, 48, 49, 66, 90, 103, 113, 166, 167, 173

\dim_set:Nn . 317, 629, 1566, 2120, 2224, 2229, 2231, 2234, 2235, 2239, 2241, 2244, 2245, 2247, 2434, 2457, 2583, 2601, 2751, 2769, 2776, 2819, 2837, 3063, 3188, 3195, 3238, 3256

\dim_set_eq:NN 475, 495, 511, 515, 2115, 2262, 2308, 2391, 2465, 2609, 2826, 2829, 2830, 2943, 3054, 3245, 3248, 3249

\dim_use:N 642, 650, 1182, 1188, 1663, 1666, 1671, 2184, 2186, 2432, 2437, 2438, 2445, 2455, 2459, 2460, 2462

\dim_zero:N 2469, 2611, 2730, 2731, 2732

\dim_zero_new:N 2782, 3201

\c_zero_dim 644, 658, 670, 682, 1182, 1200, 1752, 2221, 2226, 2232, 2239, 2432, 2455, 2581, 2599, 2767, 2835, 3186, 3254

E

\end .. 1185, 1203, 1622, 1657, 2484, 2508, 2624, 2641, 2856, 2872, 3275, 3291, 3613, 3618

\endlist 27

\endlist 226

\endlrbox 3137, 3502

\endminipage 27

\endminipage 232

enumext 4, 2336

enumext internal commands:

__enumext_add_pre_parsep: ... 40, 821, 823, 823

__enumext_after_args_exec: . 37, 715, 727, 2349

__enumext_after_args_exec_v: 38, 731, 743, 2547

__enumext_after_args_exec_vii: ... 747, 771

__enumext_after_args_exec_viii: 775

__enumext_after_env:n 74

__enumext_after_env:nn .. 75, 89, 186, 186, 2524, 2861, 3172, 3280

__enumext_after_hyperref: ... 27, 234, 236, 236

__enumext_after_list: 75, 85, 92, 2354, 2498, 2498

__enumext_after_list_args_v_tl 745

__enumext_after_list_args_vii_tl 773, 3128

__enumext_after_list_args_viii_tl 777, 3493

__enumext_after_list_v: .. 78, 2552, 2631, 2631

__enumext_after_list_vii: ... 2902, 2960, 2960

__enumext_after_list_viii: .. 3319, 3348, 3348

__enumext_after_star_env:nn 83

__enumext_after_stop_list: ... 37, 38, 715, 723, 2512

__enumext_after_stop_list_v: 38, 731, 739, 2646

__enumext_after_stop_list_v_tl 741

__enumext_after_stop_list_vii: 747, 763, 2963

__enumext_after_stop_list_vii_tl ... 765

__enumext_after_stop_list_viii: . 767, 3351

__enumext_after_stop_list_viii_tl ... 769

__enumext_align_label_vii_str .. 3120, 3124

__enumext_align_label_viii_str . 3485, 3489

__enumext_align_label_X_str 157

__enumext_all_envs_clist .. 177, 357, 570, 633, 699, 714, 795, 1231

__enumext_all_families_seq .. 98, 3642, 3651, 3673

__enumext_anskey_wrapper:n 1511, 1864

__enumext_at_begin_document:n .. 27, 182, 182, 223, 229

__enumext_before_args_exec: 37, 715, 715, 2429

__enumext_before_args_exec_v: 37, 38, 731, 731, 2580

__enumext_before_args_exec_vii: .. 747, 747, 2957

__enumext_before_args_exec_viii: 751, 3345

__enumext_before_keys_exec: 37, 715, 719, 2347

__enumext_before_keys_exec_v: .. 38, 731, 735, 2545

__enumext_before_keys_exec_vii 747

__enumext_before_keys_exec_vii: 38, 755, 2890

__enumext_before_keys_exec_viii: .. 38, 759, 3307

__enumext_before_list: ... 73, 2341, 2426, 2426

__enumext_before_list_v: . 76, 2540, 2577, 2577

__enumext_before_list_vii: 85, 2885, 2953, 2953
 __enumext_before_list_viii: .. 92, 3303, 3342, 3342
 \l__enumext_before_no_starred_key_v_tl 737
 \l__enumext_before_no_starred_key_vii_-tl 757
 \l__enumext_before_no_starred_key_viii_-tl 761
 \l__enumext_before_starred_key_v_tl ... 733
 \l__enumext_before_starred_key_vii_tl . 749
 \l__enumext_before_starred_key_viii_tl 753
 __enumext_calc_hspace:NNNNNNN 68, 2219, 2219, 2250, 2255, 2301
 __enumext_check_ans_active: .. 53, 1479, 1479, 2530
 __enumext_check_ans_active_vii: . 1479, 1493, 3178
 \l__enumext_check_ans_bool 50, 65, 66, 117, 1385, 1389, 1474, 1701, 1990, 2092, 2122, 2491, 2972, 3081
 __enumext_check_ans_count: . 53, 73, 1472, 1472, 2430, 2956
 __enumext_check_ans_int:n .. 50, 52, 1399, 1399
 \g__enumext_check_ans_item_tl .. 63, 117, 1989, 1997, 2001
 __enumext_check_ans_set_int_by_level: 1436, 1436, 1476
 \g__enumext_check_ans_show_bool 74, 117, 2494, 2526, 2533
 \g__enumext_check_ans_show_h_bool 117, 2974, 3174, 3181
 \l__enumext_columns_sep_v_dim 2599, 2601, 2609
 \l__enumext_columns_sep_vii_dim .. 2767, 2769, 2778, 2823, 2945, 3156
 \l__enumext_columns_sep_viii_dim . 3186, 3188, 3197, 3242, 3521
 \l__enumext_columns_v_int 1020, 2597, 2605, 2617, 2622
 \l__enumext_columns_vii_int .. 2772, 2775, 2779, 2787, 2791, 2794, 2800, 2806, 2810, 2932, 3151, 3162
 \l__enumext_columns_viii_int . 3191, 3194, 3198, 3206, 3210, 3213, 3219, 3225, 3229, 3516, 3527
 \l__enumext_compare_items_ans_int 117
 \g__enumext_count_item_all_int ... 117, 3091
 \g__enumext_count_item_anskey_int 125, 1482, 1490, 1496, 1504, 1703
 \g__enumext_count_item_number_int 126, 1447, 1452, 1455, 1458, 1466, 1482, 1489, 1496, 1503, 2094, 2124, 3083
 \g__enumext_count_item_with_ans_int 52, 57, 63, 117, 1992
 \g__enumext_count_item_X_int 117
 \g__enumext_count_level_vii_int 3092
 \g__enumext_count_level_X_int 117
 \l__enumext_counter_i_tl 30, 296
 \l__enumext_counter_ii_tl 30, 297
 \l__enumext_counter_iii_tl 30, 298
 \l__enumext_counter_iv_tl 30, 299
 \l__enumext_counter_style_for_ref_vii_-tl 435, 445, 456, 458
 \l__enumext_counter_style_for_ref_viii_-tl 462, 464
 \l__enumext_counter_style_for_ref_X_tl 146
 \c__enumext_counter_style_tl 31, 146, 402
 \g__enumext_counter_styles_tl . 22, 29, 40, 307, 325
 \l__enumext_counter_v_tl 30, 300
 \l__enumext_counter_vii_tl 30, 302, 432
 \l__enumext_counter_viii_tl 30, 303, 442
 __enumext_current_env: . 1414, 1414, 2338, 2882
 \l__enumext_current_widest_dim 22, 40, 331, 476, 496, 512, 516
 __enumext_default_item:n ... 2088, 2088, 2137
 __enumext_define_counters:Nn 22, 287, 287, 296, 297, 298, 299, 300, 301, 302, 303
 __enumext_endminipage: . 27, 229, 232, 898, 2761, 3136, 3501
 __enumext_fake_item: 639, 639, 2288
 \l__enumext_fake_item_indent_v_dim 658, 663
 \l__enumext_fake_item_indent_v_tl 660, 2145, 2149, 2157
 \l__enumext_fake_item_indent_vii_dim 670, 675
 \l__enumext_fake_item_indent_vii_tl 672, 3132
 \l__enumext_fake_item_indent_viii_dim . 682, 687, 3430, 3451
 \l__enumext_fake_item_indent_viii_tl .. 684, 3497
 \l__enumext_fake_item_indent_X_tl 70
 __enumext_fake_item_vii: 639, 667, 2324
 __enumext_fake_item_viii: 639, 679, 2329
 \g__enumext_footnote_arg_seq . 143, 2061, 2074, 2084
 \g__enumext_footnote_int . 143, 2068, 2071, 2073, 2075
 \g__enumext_footnote_int_seq . 143, 2062, 2075, 2080, 2083
 __enumext_footnotes_key_bool 27
 \l__enumext_footnotes_key_bool 24, 27, 88, 133, 245, 250, 259, 3099, 3147, 3473, 3512
 __enumext_footnotetext:nn ... 2055, 2055, 2085
 __enumext_getkeyans:nn ... 96, 3551, 3555, 3555
 __enumext_getkeyans_aux:n . 96, 3539, 3542, 3542
 \l__enumext_hyperref_bool . 24, 27, 28, 133, 241, 262, 279, 1767, 1977, 3075, 3464
 __enumext_hypertarget:nn 28, 236, 264, 268, 284
 __enumext_if_is_int:n 203
 __enumext_if_is_int:nTF 203, 523, 537
 \l__enumext_item_column_pos_vii_int 86, 2794, 2800, 2806, 2810, 2817, 3003, 3151, 3154
 \l__enumext_item_column_pos_viii_int ... 92, 3213, 3219, 3225, 3229, 3236, 3357, 3516, 3519
 \l__enumext_item_column_pos_X_int 157
 \g__enumext_item_count_all_vii_int 86, 2818, 3004, 3162, 3169
 \g__enumext_item_count_all_viii_int 92, 3237, 3358, 3527, 3534
 \g__enumext_item_count_all_X_int 157
 __enumext_item_peek_args_vii: 86, 3005, 3007, 3007
 __enumext_item_peek_args_viii: . 92, 93, 3359, 3361, 3361
 __enumext_item_starred: .. 68, 2179, 2179, 2197
 \l__enumext_item_starred_vii_bool 3022, 3038, 3103
 \l__enumext_item_starred_viii_bool 3376, 3392, 3477
 \l__enumext_item_starred_X_bool 157


```

\__enumext_item_std:w 27, 65-67, 80, 223, 227, 2097,
    2103, 2127, 2145, 2149, 2157, 2742
\g__enumext_item_symbol_aux_vii_tl 3046, 3105,
    3108, 3112, 3114
\g__enumext_item_symbol_aux_X_tl . . . . . 157
\l__enumext_item_symbol_sep_vii_dim . . 3055,
    3063, 3111, 3113
\g__enumext_item_symbol_tl 22, 66, 35, 2112, 2185,
    2202
\l__enumext_item_symbol_vii_tl . . . . . 3108
\l__enumext_item_text_vii_box 3098, 3139, 3146
\l__enumext_item_text_viii_box 3472, 3504, 3511
\l__enumext_item_text_X_box . . . . . 157
\l__enumext_item_width_vii_dim . . 2776, 2821,
    2829, 2830
\l__enumext_item_width_viii_dim . . 3195, 3240,
    3248, 3249
\l__enumext_item_width_X_dim . . . . . 157
\l__enumext_itemindent_X_dim . . . . . 44
\l__enumext_itemsep_vii_skip . . . . . 3168
\l__enumext_itemsep_viii_skip . . . . . 3533
\l__enumext_joined_item_aux_vii_int . . 2815,
    2816, 2817, 2818, 2824
\l__enumext_joined_item_aux_viii_int . 3234,
    3235, 3236, 3237, 3243
\l__enumext_joined_item_aux_X_int . . . 157
\__enumext_joined_item_vii:w . . 86, 3010, 3011,
    3013, 3013
\l__enumext_joined_item_vii_int . . 2786, 2787,
    2790, 2792, 2798, 2803, 2808, 2813, 2815, 2821
\__enumext_joined_item_viii:w . 93, 3364, 3365,
    3367, 3367
\l__enumext_joined_item_viii_int . 3205, 3206,
    3209, 3211, 3217, 3222, 3227, 3232, 3234, 3240
\l__enumext_joined_item_X_int . . . . . 157
\l__enumext_joined_width_vii_dim . 2819, 2826,
    2829, 3129, 3141
\l__enumext_joined_width_viii_dim 3238, 3245,
    3248, 3494, 3506
\l__enumext_joined_width_X_dim . . . . . 157
\__enumext_keyans_addto_prop:n 61, 1888, 1888,
    2159, 2674
\__enumext_keyans_addto_seq:n . 63, 1957, 1957,
    2161, 2676
\__enumext_keyans_addto_seq_link: 1957, 1971,
    1973, 3423
\__enumext_keyans_anspic_code:nnn . 79, 2665,
    2668, 2668
\__enumext_keyans_check_ans:nn 63, 1995, 1995,
    2550, 2706, 3317
\__enumext_keyans_default_item:n . . 67, 2140,
    2140, 2175
\l__enumext_keyans_env_bool 20, 2405, 2561, 2645
\__enumext_keyans_fake_item: . . 639, 655, 2278
\l__enumext_keyans_level_h_int 20, 1935, 3323,
    3324
\l__enumext_keyans_level_int . . 20, 1173, 1690,
    1930, 2560, 2564, 2659
\__enumext_keyans_make_label: 30, 68, 2205, 2205,
    2277
\__enumext_keyans_mini_addvspace: 45, 76, 1077,
    1077, 2589
\__enumext_keyans_mini_right_cmd:n 47, 1175,
    1198, 1198
\__enumext_keyans_mini_set_vskip: . 44, 1015,
    1015, 1079
\__enumext_keyans_multi_addvspace: . 77, 864,
    875, 2614
\__enumext_keyans_multi_set_vskip: . 41, 864,
    864, 877
\__enumext_keyans_multicols_start: 77, 2593,
    2595, 2595
\__enumext_keyans_multicols_stop: . 77, 1202,
    2620, 2620, 2644
\__enumext_keyans_parse_keys:n 2539, 2573, 2573
\l__enumext_keyans_pic_above_int . 112, 2752,
    2753, 2755
\l__enumext_keyans_pic_above_skip . . 80, 112,
    2697, 2736
\__enumext_keyans_pic_arg_two: 80, 2695, 2724,
    2724
\l__enumext_keyans_pic_below_int . 112, 2752,
    2753, 2756
\l__enumext_keyans_pic_body_seq . . 79, 81, 112,
    2663, 2702, 2760
\__enumext_keyans_pic_do:n 80, 2702, 2704, 2744,
    2744, 2748
\l__enumext_keyans_pic_level_int . . 20, 1165,
    1694, 1891, 1925, 1960, 2713, 2714
\__enumext_keyans_pic_row:n . 80, 81, 2746, 2749,
    2749
\__enumext_keyans_pic_safe_exec: . . 80, 2691,
    2711, 2711
\__enumext_keyans_pic_skip_abs:N . . 80, 2719,
    2719, 2735
\l__enumext_keyans_pic_width_dim . 112, 2751,
    2758
\__enumext_keyans_redefine_item: . . 67, 2163,
    2163, 2276
\__enumext_keyans_safe_exec: . 2538, 2554, 2554
\__enumext_keyans_show_left:n . 67, 2003, 2003,
    2155, 2682
\__enumext_keyans_starred_item:n . . 67, 2152,
    2152, 2171
\__enumext_keyans_store_ref: . . 62, 1904, 1904,
    2160, 2675, 3421
\__enumext_keyans_store_ref_aux_i: 62, 1904,
    1916, 1919
\__enumext_keyans_store_ref_aux_ii: 62, 1904,
    1945, 1947
\l__enumext_keyans_tmpa_dim 82, 3429, 3430, 3450,
    3451
\l__enumext_keyans_tmpa_tl 23, 93, 82, 2154, 2158,
    3403, 3426, 3428, 3429, 3447, 3449, 3450
\l__enumext_keyans_tmpb_tl . . 93, 82, 3404, 3416,
    3418
\l__enumext_label_copy_i_tl . . 1821, 1923, 1928,
    1933, 1938
\l__enumext_label_copy_v_tl . . . . . 1933
\l__enumext_label_copy_vi_tl . . . . . 1928
\l__enumext_label_copy_vii_tl 1796, 1807, 1838,
    1923
\l__enumext_label_copy_viii_tl . . . . . 1938
\l__enumext_label_copy_X_tl . . . . . 135
\l__enumext_label_fill_left_v_tl . . . . . 2209
\l__enumext_label_fill_left_X_tl . . . . . 70
\l__enumext_label_fill_right_v_tl . . . . 2216
\l__enumext_label_fill_right_X_tl . . . . 70
\l__enumext_label_font_style_v_tl 2210, 2686

```

```

\l__enumext_label_font_style_vii_tl ... 3117
\l__enumext_label_font_style_viii_tl .. 3482
\l__enumext_label_i_tl ..... 468
\l__enumext_label_ii_tl ..... 468
\l__enumext_label_iii_tl ..... 468
\l__enumext_label_iv_tl ..... 468
\__enumext_label_style:Nnn 22, 29, 320, 320, 335,
    473, 493, 509, 513
\l__enumext_label_v_tl .. 61, 63, 506, 1896, 1965,
    2007, 2014, 2029, 2036, 2154, 2158, 2542, 2681, 2683
\l__enumext_label_vi_tl . 61, 63, 506, 1893, 1962,
    2681, 2683, 2687
\l__enumext_label_vii_tl . 488, 3033, 3058, 3065
\l__enumext_label_viii_tl 488, 3387, 3411, 3415,
    3428, 3449
\l__enumext_label_width_by_box .. 40, 316, 317
\__enumext_label_width_by_box:Nn 29, 314, 314,
    319, 331, 547, 3429, 3450
\l__enumext_labelsep_i_dim ... 2011, 2033, 3432,
    3453
\l__enumext_labelsep_v_dim ..... 2604
\l__enumext_labelsep_vii_dim . 2771, 2780, 2822,
    3056, 3127, 3143
\l__enumext_labelsep_viii_dim 3190, 3199, 3241,
    3492, 3508
\l__enumext_labelwidth_i_dim . 2010, 2032, 3432,
    3453
\l__enumext_labelwidth_v_dim ..... 2604
\l__enumext_labelwidth_vii_dim ... 2771, 2779,
    2822, 3120, 3124, 3142
\l__enumext_labelwidth_viii_dim .. 3190, 3198,
    3241, 3485, 3489, 3507
\l__enumext_leftmargin_tmp_v_bool . 80, 2726
\l__enumext_leftmargin_tmp_X_bool ..... 44
\l__enumext_leftmargin_tmp_X_dim ..... 44
\l__enumext_leftmargin_X_dim ..... 44
\__enumext_level: 190, 190, 196, 197, 201, 411, 413,
    414, 422, 424, 642, 646, 650, 717, 721, 725, 729, 813,
    815, 817, 819, 852, 854, 856, 858, 862, 902, 905, 924,
    933, 939, 944, 948, 959, 963, 964, 969, 1005, 1009,
    1182, 1188, 1235, 1237, 1239, 1242, 1249, 1251, 1253,
    1256, 1598, 1606, 1610, 1614, 1859, 1862, 1863, 2096,
    2097, 2101, 2102, 2103, 2110, 2112, 2116, 2117, 2120,
    2126, 2127, 2181, 2184, 2186, 2193, 2194, 2195, 2198,
    2201, 2344, 2346, 2374, 2379, 2380, 2381, 2383, 2387,
    2392, 2393, 2394, 2396, 2409, 2414, 2421, 2432, 2434,
    2437, 2438, 2440, 2445, 2452, 2455, 2457, 2459, 2460,
    2461, 2462, 2465, 2471, 2476, 2482, 2485, 2487, 2500,
    3087, 3088
\__enumext_level_ ..... 196
\__enumext_level_end:n ..... 194, 199
\l__enumext_level_h_int 20, 430, 454, 1420, 1461,
    1815, 1832, 2407, 2906, 2907
\l__enumext_level_int 20, 192, 825, 976, 1169, 1428,
    1438, 1444, 1792, 1802, 1808, 1814, 1822, 1830, 1837,
    2291, 2358, 2359, 2366, 2412, 2467, 2528, 2568, 2655,
    2984, 2994, 3176, 3330
\__enumext_level_set:n ..... 194, 194
\__enumext_list_arg_two_i: ..... 2251
\__enumext_list_arg_two_ii: ..... 2251
\__enumext_list_arg_two_iii: ..... 2251
\__enumext_list_arg_two_iv: ..... 2251
\__enumext_list_arg_two_v: . 67, 2251, 2544, 2727
\__enumext_list_arg_two_vii: ..... 2297, 2889
\__enumext_list_arg_two_viii: ..... 2297, 3306
\l__enumext_listoffset_v_dim ..... 2606
\l__enumext_listparindent_vii_dim .... 3130
\l__enumext_listparindent_viii_dim ... 3495
\__enumext_make_label: 30, 65, 66, 68, 2189, 2189,
    2286
\l__enumext_mark_answer_sym_tl . 57, 107, 1514,
    1668, 1874, 2018, 3436
\l__enumext_mark_position_str 107, 1518, 1519,
    1541, 1542, 1666
\l__enumext_mark_ref_sym_tl .. 107, 1528, 1772,
    1985
\__enumext_mini_addvspace: 43, 73, 998, 998, 2442
\__enumext_mini_addvspace_vii: 46, 1151, 1151,
    2847
\__enumext_mini_addvspace_viii: 46, 1151, 1157,
    3266
__enumext_mini_env* ..... 892
\__enumext_mini_right_cmd:n 47, 1177, 1179, 1179
\__enumext_mini_set_vskip: .. 42, 899, 899, 1000
\__enumext_mini_set_vskip_vii: 45, 1094, 1094,
    1153
\__enumext_mini_set_vskip_viii: 45, 1094, 1116,
    1159
\__enumext_minipage:w 27, 229, 231, 894, 2758, 3129,
    3494
\l__enumext_minipage_active_v_bool .. 76–78,
    2587, 2612, 2625, 2633
\g__enumext_minipage_active_vii_bool ... 83,
    2858, 2863, 2875
\l__enumext_minipage_active_vii_bool . 2843,
    2854
\g__enumext_minipage_active_viii_bool 3277,
    3282, 3294
\l__enumext_minipage_active_viii_bool 3262,
    3273
\g__enumext_minipage_active_X_bool ... 157
\l__enumext_minipage_active_X_bool .... 58
\g__enumext_minipage_after_skip 58, 1098, 1110,
    2873, 3292
\l__enumext_minipage_after_skip 42, 43, 75, 78,
    58, 915, 930, 950, 966, 981, 987, 993, 1007, 1017, 1026,
    1029, 1041, 1059, 1070, 1086, 1118, 1131, 1145, 2509,
    2642
\g__enumext_minipage_center_vii_bool . 2867,
    2876
\g__enumext_minipage_center_viii_bool 3286,
    3295
\g__enumext_minipage_center_X_bool ... 157
\l__enumext_minipage_hsep_v_dim ... 76, 2585
\l__enumext_minipage_hsep_vii_dim .... 2841
\l__enumext_minipage_hsep_viii_dim ... 3260
\l__enumext_minipage_left_skip 42, 76, 58, 907,
    922, 941, 956, 1003, 1013, 1018, 1024, 1033, 1050,
    1062, 1082, 1092, 1096, 1101, 1105, 1119, 1123, 1137,
    1155, 1161
\l__enumext_minipage_left_v_dim 76, 2583, 2591
\l__enumext_minipage_left_vii_dim 2837, 2849
\l__enumext_minipage_left_viii_dim 3256, 3268
\l__enumext_minipage_left_X_dim ..... 58
\g__enumext_minipage_right_skip 58, 1097, 1102,
    1106, 2866, 3285
\l__enumext_minipage_right_skip .. 42, 58, 911,
    926, 946, 961, 1019, 1025, 1037, 1055, 1066, 1120,
    1127, 1141, 1189, 1206

```

`\l__enumext_minipage_right_v_dim` .. 76, 1200, 1205, 2581, 2585
`\g__enumext_minipage_right_vii_dim` 82, 2845, 2865, 2878
`\l__enumext_minipage_right_vii_dim` 82, 2835, 2840, 2846
`\g__enumext_minipage_right_viii_dim` .. 3264, 3284, 3297
`\l__enumext_minipage_right_viii_dim` .. 3254, 3259, 3265
`\g__enumext_minipage_right_X_dim` 157
`\g__enumext_minipage_right_X_skip` 157
`\g__enumext_minipage_stat_int` . 73, 76, 58, 1194, 1211, 2441, 2502, 2507, 2588, 2635, 2640
`\g__enumext_miniright_code_vii_tl` . 83, 2871, 2877
`\g__enumext_miniright_code_viii_tl` 3290, 3296
`\g__enumext_miniright_code_X_tl` 157
`__enumext_multi_addvspace:` ... 40, 74, 847, 847, 2473
`__enumext_multi_set_vskip:` .. 40, 811, 811, 849
`\l__enumext_multicols_above_ii_skip` ... 830
`\l__enumext_multicols_above_iii_skip` .. 836
`\l__enumext_multicols_above_iv_skip` ... 842
`\l__enumext_multicols_above_v_skip` 866, 880, 890
`\l__enumext_multicols_above_X_skip` 52
`\l__enumext_multicols_below_v_skip` 870, 884, 2627
`\l__enumext_multicols_below_X_skip` 52
`__enumext_multicols_start:` 73, 2447, 2449, 2449
`__enumext_multicols_stop:` 74, 1184, 2479, 2479, 2511
`__enumext_newlabel:nn` 25, 28, 60, 272, 272, 1848, 1951
`\l__enumext_newlabel_arg_one_tl` 25, 28, 60, 62, 135, 1771, 1841, 1849, 1940, 1952, 1983
`\l__enumext_newlabel_arg_two_tl` 25, 28, 59, 135, 1795, 1805, 1819, 1835, 1850, 1927, 1932, 1937, 1953
`__enumext_parse_keys:n` 2340, 2363, 2363
`__enumext_parse_keys_vii:n` .. 2884, 2913, 2913
`__enumext_parse_keys_viii:n` . 3302, 3335, 3335
`__enumext_parse_store_keys:n` . 72, 2369, 2372, 2372
`__enumext_parse_store_keys_vii:n` . 84, 2920, 2924, 2924
`\l__enumext_parsep_i_skip` . 828, 830, 979, 1027
`\l__enumext_parsep_ii_skip` 834, 836, 985
`\l__enumext_parsep_iii_skip` 840, 842, 991
`\l__enumext_parsep_vii_skip` 3131
`\l__enumext_parsep_viii_skip` 3496
`\l__enumext_partopsep_v_skip` .. 882, 886, 1053, 1057, 1064, 1068, 1084, 1088
`\l__enumext_partopsep_viii_skip` 1129
`__enumext_phantomsection:` 28, 236, 265, 269, 285
`__enumext_print_footnote:` ... 2055, 2078, 3149, 3514
`__enumext_print_keyans_box:NN` 57, 1660, 1660, 1673, 1861, 2009, 2031, 3432, 3453
`\l__enumext_print_keyans_i_tl` 3565, 3594
`\l__enumext_print_keyans_ii_tl` ... 3570, 3595
`\l__enumext_print_keyans_iii_tl` .. 3575, 3596
`\l__enumext_print_keyans_iv_tl` ... 3580, 3597
`\l__enumext_print_keyans_vii_tl` .. 3585, 3598
`\l__enumext_print_keyans_X_tl` 96
`__enumext_printkeyans:nnn` . 97, 3599, 3602, 3602
`__enumext_redefine_item:` . 66, 2129, 2129, 2285
`\l__enumext_ref_aux_tl` 146, 411, 413, 416, 432, 434, 437, 442, 444, 447
`\l__enumext_ref_key_arg_tl` .. 146, 405, 410, 417, 429, 438, 448
`__enumext_regex_label_ref_key:` . 31, 400, 400, 412, 433, 443
`__enumext_register_counter_style:Nn` .. 304, 304, 309, 310, 311, 312, 313
`__enumext_remove_extra_parsep_vii:` .. 2899, 3158, 3158
`__enumext_remove_extra_parsep_viii:` . 3316, 3523, 3523
`__enumext_renew_footnote:` ... 2055, 2059, 3101, 3475
`\l__enumext_resume_bool` 22, 35, 1368, 2268
`__enumext_resume_counter:` . 51, 1330, 1359, 1359
`__enumext_resume_counter_star:` 1332
`__enumext_resume_counter_vii:` 51, 1339, 1359, 1370
`\g__enumext_resume_int` 22, 75, 35, 1363, 1374, 2269, 2516
`\l__enumext_resume_vii_bool` ... 35, 1379, 2315
`\g__enumext_resume_vii_int` .. 85, 35, 2316, 2965
`__enumext_safe_exec:` 2339, 2356, 2356
`__enumext_safe_exec_vii:` ... 2883, 2904, 2904
`__enumext_safe_exec_viii:` ... 3301, 3321, 3321
`__enumext_set_error:nn` 3680, 3690, 3692
`__enumext_set_label_ref:n` ... 31, 408, 408, 480
`__enumext_set_label_ref_h:n` . 31, 427, 427, 500
`__enumext_set_parse:n` 3663, 3680, 3680
`\l__enumext_setkey_tmpa_int` ... 91, 3656, 3660
`\l__enumext_setkey_tmpa_seq` 91, 3654, 3664, 3670, 3672, 3674, 3687
`\l__enumext_setkey_tmpa_tl` 91, 3662, 3666
`\l__enumext_setkey_tmpb_seq` 91, 3655, 3658, 3662, 3663
`\l__enumext_setkey_tmpb_tl` 91, 3682, 3684, 3685
`\l__enumext_show_answer_bool` . 107, 1522, 1526, 1545, 1549, 1868, 2005, 2678, 3424
`__enumext_show_length:nnn` .. 36, 209, 209, 3732, 3733, 3734, 3735, 3736, 3737, 3738, 3739, 3740, 3741, 3747, 3748, 3749, 3750, 3751, 3752, 3753, 3754, 3755, 3756
`\l__enumext_show_position_bool` . 64, 107, 1523, 1525, 1546, 1548, 1872, 2016, 2679, 3434
`\g__enumext_standar_bool` 20, 1422, 2515
`\l__enumext_standar_bool` . 20, 1464, 1800, 1813, 1829, 2361, 2514
`__enumext_standard_item_vii:w` 86, 3018, 3020, 3020
`__enumext_standard_item_viii:w` 93, 3372, 3374, 3374
`\g__enumext_starred_bool` . 84, 85, 20, 1430, 1791, 1801, 1831, 1921, 2492, 2972, 2977
`\l__enumext_starred_bool` . 84, 85, 20, 1443, 1724, 1732, 1816, 1857, 2911, 2978
`__enumext_starred_columns_set_vii:` .. 2765, 2765, 2892
`__enumext_starred_columns_set_viii:` . 3184, 3184, 3309
`__enumext_starred_item:nn` ... 2106, 2106, 2135

```

\__enumext_starred_item_exec: . 94, 3413, 3413,
    3479
\__enumext_starred_item_vii:w 86, 87, 3017, 3036,
    3036
\__enumext_starred_item_vii_aux_i:w . 3036,
    3041, 3044
\__enumext_starred_item_vii_aux_ii:w . 3036,
    3042, 3047, 3049
\__enumext_starred_item_vii_aux_iii:w 3036,
    3052, 3061
\__enumext_starred_item_viii:w 93, 3371, 3390,
    3390
\__enumext_starred_item_viii_aux_i:w . 3390,
    3395, 3398
\__enumext_starred_item_viii_aux_ii:w 3390,
    3396, 3406, 3408
\__enumext_starred_joined_item_vii:n . 81, 86,
    2784, 2784, 3015
\__enumext_starred_joined_item_viii:n 90, 93,
    3203, 3203, 3369
\__enumext_start_from:NNn 33, 521, 521, 534, 556
\__enumext_start_item_tmp_vii: 83, 2895, 3000,
    3000
\__enumext_start_item_tmp_viii: 91, 3312, 3354,
    3354
\__enumext_start_item_vii:w . 86, 87, 3028, 3033,
    3058, 3065, 3067, 3067
\__enumext_start_item_viii:w . 93, 3382, 3387,
    3411, 3456, 3456
\__enumext_start_list:nn 27, 70, 80, 223, 225, 2343,
    2541, 2692, 2887, 3304
\__enumext_start_mini_vii: . 85, 2833, 2833, 2958
\__enumext_start_mini_viii: 92, 3252, 3252, 3346
\__enumext_start_store_level: . 72, 2342, 2401,
    2401
\__enumext_start_store_level_vii: . 85, 2886,
    2980, 2980
\l__enumext_start_X_int . . . . . 70, 551
\__enumext_stop_item_tmp_vii: . 83, 86, 87, 2894,
    2898, 3002, 3069
\__enumext_stop_item_tmp_viii: . 91, 92, 3311,
    3315, 3356, 3458
\__enumext_stop_item_vii: 87, 88, 3069, 3134, 3134
\__enumext_stop_item_viii: . 95, 3458, 3499, 3499
\__enumext_stop_list: . 27, 223, 226, 2352, 2551,
    2705, 2900, 3318
\__enumext_stop_mini_vii: 83, 85, 2852, 2852, 2962
\__enumext_stop_mini_viii: . 92, 3252, 3271, 3350
\__enumext_stop_store_level: . 72, 2353, 2401,
    2419
\__enumext_stop_store_level_vii: . 85, 2901,
    2980, 2990
\l__enumext_store_active_bool 23, 50, 72, 84, 82,
    1353, 1361, 1372, 1686, 2367, 2404, 2556, 2563, 2651,
    2709, 2918, 2982, 2992, 3329
\__enumext_store_addto_prop:n 55, 61, 1579, 1580,
    1588, 1711, 1902, 3420
\__enumext_store_addto_seq:n 55, 63, 1589, 1589,
    1593, 1600, 1614, 1622, 1631, 1649, 1657, 1775, 1988
\l__enumext_store_ans_bool 117, 1388, 1596, 1620,
    1627, 1655, 1699, 3085
\l__enumext_store_anskey_arg_tl 23, 58, 59, 82,
    1717, 1726, 1728, 1734, 1742, 1745, 1755, 1760, 1763,
    1769, 1775
\__enumext_store_anskey_code:nnnn 57, 58, 1705,
    1709, 1709
\__enumext_store_anskey_show_left:n 61, 1716,
    1866, 1866
\__enumext_store_anskey_show_wrap:n 61, 1854,
    1854, 1870, 1885
\l__enumext_store_columns_break_bool . 1680,
    1723
\l__enumext_store_columns_join_int 82, 1731,
    1736
\l__enumext_store_columns_sep_vii_bool 2939
\l__enumext_store_columns_sep_vii_dim 2944,
    2948
\l__enumext_store_columns_sep_X_bool . . . 96
\l__enumext_store_columns_sep_X_dim . . . . 96
\l__enumext_store_columns_vii_bool . . . 2926
\l__enumext_store_columns_vii_int 2931, 2935
\l__enumext_store_columns_X_bool . . . . . 96
\l__enumext_store_columns_X_int . . . . . 96
\__enumext_store_internal_ref: . 58, 59, 1714,
    1777, 1777
\l__enumext_store_item_symbol_sep_dim 1678,
    1752, 1757
\l__enumext_store_item_symbol_tl . 1676, 1743,
    1747
\l__enumext_store_keyans_label_tl 23, 61, 63,
    82, 1890, 1893, 1896, 1900, 1902, 1959, 1962, 1965,
    1969, 1979, 1988, 1989, 3400, 3415, 3418, 3420, 3422
\__enumext_store_level_close: . 56, 1594, 1618,
    2423
\__enumext_store_level_close_vii: 1625, 1653,
    2996
\__enumext_store_level_open: . 55, 56, 72, 1594,
    1594, 2410, 2415
\__enumext_store_level_open_vii: . 84, 1625,
    1625, 2986
\g__enumext_store_name_tl 23, 74, 82, 1484, 1487,
    1498, 1501, 2495, 2534, 2975, 3182
\l__enumext_store_name_tl 23, 50, 82, 1344, 1345,
    1347, 1349, 1351, 1365, 1376, 1582, 1584, 1591, 1843,
    1844, 1880, 1942, 1943, 2024, 2495, 2517, 2520, 2966,
    2969, 2975, 3442
\l__enumext_store_opt_vii_tl . 1629, 1639, 1645,
    1649, 2933, 2946
\l__enumext_store_opt_X_tl . . . . . 96
\l__enumext_store_ref_key_bool 58, 1531, 1712,
    1766, 1906, 1976
\l__enumext_store_upper_level_X_bool . . . 96
\l__enumext_store_write_aux_file_tl 25, 60, 62,
    135, 1846, 1852, 1949, 1955
\__enumext_storing_set:n 50, 51, 1328, 1337, 1342,
    1342
\l__enumext_the_counter_vii_tl . . . . . 434
\l__enumext_the_counter_viii_tl . . . . . 444
\l__enumext_the_counter_X_tl . . . . . 146
\__enumext_tmp:n 30, 34, 44, 51, 52, 57, 64, 69, 70, 81,
    96, 106, 127, 132, 138, 142, 150, 156, 157, 176, 217,
    221, 634, 638, 1381, 1398, 1507, 1535, 1536, 1553,
    1779, 1786, 1787, 1808, 1822, 1825, 1837, 1908, 1915,
    2251, 2296, 2297, 2335
\__enumext_tmp:nn 336, 357, 358, 386, 387, 399, 551,
    570, 615, 633, 691, 699, 700, 714, 779, 795, 796, 810,
    1215, 1231, 1554, 1578, 2039, 2054
\__enumext_tmp:nnn 468, 484, 485, 486, 487, 488, 504,

```

505	
_enumext_tmp:nnnnn	571, 596, 599, 602, 604, 606, 609, 612
_enumext_tmp:w	3548, 3551
\l_enumext_tmpa_vii_int	2775, 2778
\l_enumext_tmpa_viii_int	3194, 3197
\l_enumext_tmpa_X_int	157
\l_enumext_topsep_v_skip	868, 872, 1022, 1035, 1043, 1048, 1068, 1072, 2708, 2739
\l_enumext_topsep_vii_skip	1099, 1108, 1112
\l_enumext_topsep_viii_skip	1121, 1143, 1147
_enumext_use_key_ref:	31, 420, 420, 2287
_enumext_use_key_ref_h:	32, 452, 452, 2321
\l_enumext_vspace_a_star_v_bool	1264
\l_enumext_vspace_a_star_vii_bool	1286
\l_enumext_vspace_a_star_viii_bool	1297
\l_enumext_vspace_a_star_X_bool	70
_enumext_vspace_above:	48, 1232, 1232, 2428
_enumext_vspace_above_v:	49, 1260, 1260, 2579
\l_enumext_vspace_above_v_skip	1262, 1266, 1268
_enumext_vspace_above_vii:	49, 1282, 1282, 2955
\l_enumext_vspace_above_vii_skip	1284, 1288, 1290
_enumext_vspace_above_viii:	49, 1282, 1293, 3344
\l_enumext_vspace_above_viii_skip	1295, 1299, 1301
\l_enumext_vspace_b_star_v_bool	1275
\l_enumext_vspace_b_star_vii_bool	1308
\l_enumext_vspace_b_star_viii_bool	1319
\l_enumext_vspace_b_star_X_bool	70
_enumext_vspace_below:	48, 1246, 1246, 2513
_enumext_vspace_below_v:	49, 1271, 1271, 2647
\l_enumext_vspace_below_v_skip	1273, 1277, 1279
_enumext_vspace_below_vii:	49, 1304, 1304, 2964
\l_enumext_vspace_below_vii_skip	1306, 1310, 1312
_enumext_vspace_below_viii:	49, 1304, 1315, 3352
\l_enumext_vspace_below_viii_skip	1317, 1321, 1323
_enumext_widest_from:nNNn	34, 535, 535, 550, 562
\g_enumext_widest_label_tl	22, 29, 40, 324, 328, 332
\l_enumext_wrap_label_opt_v_bool	2148
\l_enumext_wrap_label_opt_vii_bool	86, 3027
\l_enumext_wrap_label_opt_viii_bool	93, 3381
\l_enumext_wrap_label_opt_X_bool	70
\l_enumext_wrap_label_v_bool	2144, 2148, 2156, 2211
\l_enumext_wrap_label_vii_bool	86, 3026, 3031, 3039, 3118
\l_enumext_wrap_label_viii_bool	93, 3380, 3385, 3393, 3483
\l_enumext_wrap_label_X_bool	70
_enumext_wrapper_label_v:n	2213, 2687
_enumext_wrapper_label_vii:n	3121
_enumext_wrapper_label_viii:n	3486
_enumext_zero_count_level:	215, 215, 1491, 1505
_enumext_zero_parsep:	43, 919, 974, 974
enumext*	4, 2880
enumext@ internal commands:	
_enumext@_check_ans_set_int_by_level:	53
enumXi	296
enumXii	296
enumXiii	296
enumXiv	296
enumXv	296
enumXvi	296
enumXvii	296
enumXviii	296
Environments provide by enumext:	
enumext*	21, 22, 24–26, 29–33, 35, 36, 38, 39, 45, 46, 49–51, 54–60, 62, 64, 65, 71, 72, 84, 85, 87, 89, 90, 92, 94, 97, 100, 101
enumext	21, 22, 24, 26, 29–32, 34–37, 39–48, 50, 51, 53–60, 62, 64–72, 75, 76, 80–82, 85, 97, 100
keyans*	21–23, 25, 26, 29–33, 35, 36, 38, 39, 45, 46, 49, 51, 54, 55, 62, 65, 91, 92, 100, 101
keyanspic	21–24, 29, 30, 33, 46, 50, 51, 55, 61–64, 78–80, 101
keyans	21–24, 26, 29, 30, 33–39, 41, 44–51, 54, 55, 61–64, 67–70, 75, 76, 78–80, 82, 92, 100, 101
Environments:	
enumext*	70
keyans*	70
list	26, 27, 69–71
lrbox	81, 88, 95
minipage	26, 27, 39, 41, 78–81, 88, 95
multicols	39–42, 47, 73–75, 77, 78
exp commands:	
\exp_after:wN	3551
\exp_args:Ne	2365, 3539
\exp_not:N	154, 327, 416, 437, 447, 648, 662, 663, 674, 675, 686, 687, 1771, 1877, 1878, 1981, 2021, 2022, 3439, 3440, 3548
\exp_not:n	416, 417, 437, 438, 447, 448, 649, 1562, 1569, 1736, 1747, 1757, 1771, 1772, 1849, 1952, 1983, 1985, 2383, 2396, 2935, 2948
F	
\fbox	1512
file commands:	
\file_input_stop:	3849
first	700
font	336
\footnote	65
\footnote	65, 2063
\footnotemark	2073
\footnotesize	1878, 2022, 3440
\footnotetext	2057
G	
\getkeyans	13, 96, 3537
group commands:	
\group_begin:	1698, 1876, 2020, 3097, 3116, 3438, 3471, 3481, 3559, 3593
\group_end:	1707, 1883, 2027, 3126, 3138, 3445, 3491, 3503, 3561, 3600
H	
\hbadness	3145, 3510
hbox commands:	
\hbox_set:Nn	316
\hfill	366, 370, 375, 376, 1186, 1204, 1771, 1981, 2857, 3276

hook commands:

\hook_gput_code:nnn	9, 184, 188, 234
\hook_gset_rule:nnnn	235
\hspace	3156, 3521
\hyperlink	59, 63
\hyperlink	1771, 1981
\hypertarget	28
\hypertarget	264

I

\IfHyperBoolean	242
\IfPackageLoadedTF	11, 238, 252
\ignorespaces	651

int commands:

\int_add:Nn	2817, 3236
\int_case:nn	825, 976, 1438, 1461
\int_compare:nNnTF	430, 454, 901, 1020, 1165, 1169, 1173, 1420, 1428, 1481, 1495, 1690, 1694, 1891, 1925, 1930, 1935, 1960, 2359, 2407, 2412, 2451, 2467, 2481, 2502, 2528, 2564, 2568, 2597, 2622, 2635, 2655, 2659, 2714, 2787, 2797, 2813, 2907, 2984, 2994, 3151, 3160, 3176, 3206, 3216, 3232, 3324, 3330, 3516, 3525, 3660
\int_compare_p:nNn	1444, 1792, 1802, 1814, 1815, 1830, 1832
\int_decr:N	2816, 3235
\int_eval:n	1584, 1844, 1878, 1943, 2022, 2269, 2272, 2316, 2319, 2805, 3224, 3440
\int_from_alph:n	529, 543
\int_from_roman:n	531, 545
\int_gadd:Nn	2818, 3087, 3237
\int_gdecr:N	1447, 1452, 1455, 1458, 1466
\int_gincr:N	1703, 1992, 2094, 2124, 2441, 2588, 3004, 3083, 3091, 3092, 3358
\int_gset:Nn	1363, 1374, 2071
\int_gset_eq:NN	2068, 2516, 2519, 2965, 2968
\int_gzero:N	219, 1194, 1211, 1489, 1490, 1503, 1504, 2507, 2640, 3169, 3534
\int_if_exist:NTF	1354, 1401, 1403, 1405, 1407, 1409, 1411, 2517, 2966
\int_incr:N	2358, 2560, 2713, 2906, 3003, 3323, 3357
\int_mod:nn	3162, 3527
\int_new:N	20, 21, 22, 23, 24, 36, 38, 58, 74, 86, 93, 101, 114, 115, 122, 123, 124, 125, 126, 129, 130, 143, 160, 161, 162, 163, 164, 1356, 1402, 1404, 1406, 1408, 1410, 1412
\int_set:Nn	525, 529, 531, 1559, 1731, 2752, 2753, 2775, 2786, 2792, 2808, 3145, 3194, 3205, 3211, 3227, 3510, 3656
\int_set_eq:NN	2378, 2815, 2930, 3234
\int_step_function:nnN	1808, 1822, 1837
\int_step_inline:nnn	2754, 3683
\int_to_roman:n	192, 1788, 1826
\int_use:N	902, 1365, 1376, 2272, 2291, 2319, 2366, 2452, 2461, 2476, 2482, 2790, 2791, 2803, 3088, 3209, 3210, 3222
\int_zero:N	3154, 3519
\c_one_int	2024, 2775, 2794, 2800, 2806, 2810, 2813, 3194, 3213, 3219, 3225, 3229, 3232
\c_zero_int	1420, 1428, 1444, 1792, 1802, 1814, 1815, 1830, 1832, 2984, 2994, 3165, 3530
\item	27, 37, 38, 56, 65, 78, 80, 81, 83, 91
\item	65, 67, 86, 87, 92, 94, 227, 1602, 1608, 1633, 1641, 1728, 1962, 1965, 2131, 2165, 2893, 2895, 3310, 3312, 3422
\item*	5, 11, 2163
item-pos*	2039

item-sym*	2039
\itemindent	22, 69
\itemindent	68
itemindent	615
\itemsep	79, 80
\itemsep	2728, 2734
\itemwidth	2782, 2826, 2830, 3201, 3245, 3249

K

keyans	11, 2536
keyans*	11, 3299
keyanspic	12, 2689

Keys for environments provide by [enumext](#):

above*	23, 48, 49
above	23, 48, 49, 73, 76, 85, 92
after	37, 38, 75, 78, 85, 92
align	23, 30, 67, 88
before*	37, 38, 73, 85, 92
before	37, 38, 76
below*	23, 48, 49
below	23, 48, 49, 75, 78, 85, 92
check-ans	23, 24, 26, 50-52, 57, 63, 65, 66, 73-75, 89, 100
columns-sep*	24, 55, 72, 84
columns-sep	39, 56, 72, 73, 77, 84
columns*	24, 55, 72, 84
columns	22, 39, 42, 48, 56, 72, 73, 77, 84
first	37, 38, 88
font	30, 67, 88
item-pos*	57, 59, 64
item-sym*	22, 57, 59, 64, 66
item*-sep	66
itemindent	23, 35, 36, 67, 88
itemsep	34, 70
labelsep	30, 66, 69, 88
labelwidth	29, 30, 32-34, 69
label	22, 29, 33, 34, 81
lisparindent	70
list-indent	22, 35, 80
list-offset	35
listparindent	35, 88
mark-ans	24, 54, 61
mark-pos	54
mark-ref	24, 54, 59
mini-env	23, 39, 41, 47, 48, 65, 73, 76, 82, 85, 90, 92
mini-sep	23, 39, 73, 76
miniright*	23, 39
miniright	23, 39, 46, 83
minirigth*	26
minirigth	26
no-store	24, 51, 53
noitemsep	34, 43
nosep	34, 43
parindent	70
parsep	34, 70, 88
partopsep	34
ref	25, 31
resume	22, 50, 51, 70, 75, 85
rightmargin	35
save-ans	23, 50, 51, 55-57, 61, 63, 67, 75, 76, 78, 85, 92, 94, 96, 97
save-key	24
show-ans	24, 54, 57, 58, 61, 67, 93, 94
show-length	26, 36, 70, 100
show-pos	24, 54, 57, 58, 61, 67, 93, 94
start	23, 26, 33, 34, 70

store-brk	57, 58
store-ref	25, 28, 54, 58, 59, 62, 63, 67, 94
topsep	34
widest	22, 26, 34
wrap-ans	54, 57, 61
wrap-label*	30, 65, 67, 86, 88, 93
wrap-label	30, 67, 86, 88, 93
keys commands:	
\keys_define:nn	338, 360, 389, 470, 490, 506, 553, 573, 617, 636, 693, 702, 781, 798, 1217, 1326, 1335, 1383, 1509, 1538, 1556, 1674, 2041, 3563, 3626
\l_keys_key_str	3717
\keys_set:nn	352, 805, 1222, 1227, 1720, 2365, 2575, 2917, 3339, 3628, 3629, 3630, 3631, 3632, 3633, 3634, 3635, 3636, 3637, 3638, 3639, 3677
L	
label	468, 488, 506
Labels provide by enumext:	
\Alph*	29
\Roman*	29
\alph*	29
\arabic*	29, 31
\roman*	29
\labelsep	80
\labelsep	2729, 2732
labelsep	336
\labelwidth	29, 80
\labelwidth	2729, 2730
labelwidth	336
\leftmargin	22, 69
\leftmargin	68, 2729
legacy commands:	
\legacy_if:nTF	3070, 3073, 3459, 3462
\legacy_if_gset_false:n	895
\legacy_if_set_false:n	3072, 3461
\legacy_if_set_true:n	3032, 3057, 3064, 3077, 3386, 3410, 3466
\linewidth	73, 76
\linewidth	2436, 2585, 2751, 2778, 2839, 3197, 3258
\list	27
\list	225
list-indent	615
list-offset	615
\listparindent	2731
listparindent	615
\lrbox	3098, 3472
M	
\makebox	81
\makebox ..	1664, 1666, 2185, 3112, 3120, 3124, 3485, 3489
\makelabel	65, 67, 68, 81
\makelabel	67, 68, 2191, 2207
\makesavenoteenv	258
mark-ans	1507
mark-pos	1507, 1536
mark-ref	1507
mini-env	779
mini-sep	779
\minipage	27
\minipage	231
\miniright	9, 46, 1163, 2505, 2638
\miniright*	9
mode commands:	
\mode_if_vertical:TF	850, 878, 1001, 1080

\mode_leave_vertical: ..	648, 662, 674, 686, 1633, 1641, 1662, 2183, 3110
msg commands:	
\msg_error:nn ..	2566, 2570, 2657, 2716, 2909, 3326, 3332, 3640
\msg_error:nnn ..	1167, 1171, 1196, 1213, 3553, 3558, 3623, 3693
\msg_error:nnnn ..	1688, 1692, 1696, 2558, 2653, 2661
\msg_fatal:nn	2360
\msg_fatal:nnn	290
\msg_info:nnn	13, 16, 240, 254
\msg_line_context: ..	3721, 3726, 3731, 3746, 3769, 3773, 3777, 3782, 3787, 3792, 3797, 3801, 3806, 3811, 3815, 3820, 3824, 3829, 3834, 3839, 3843, 3847
\msg_new:nnn ..	3694, 3698, 3702, 3706, 3711, 3715, 3719, 3724, 3729, 3744, 3759, 3766, 3771, 3775, 3780, 3785, 3790, 3795, 3799, 3804, 3809, 3813, 3818, 3822, 3827, 3832, 3837, 3841, 3845
\msg_term:nnn	1484, 1498
\msg_term:nnnn	2281, 2291, 2326, 2331
\msg_warning:nn	2504, 2637
\msg_warning:nnn	1487, 1501
\msg_warning:nnnn ..	1999, 2223, 2228, 2789, 2802, 3208, 3221
\multicolsep	74, 77
\multicolsep	2466, 2610
N	
\NeedsTeXFormat	3
\newcounter	293
\NewDocumentCommand ..	1163, 1684, 2649, 3537, 3591, 3647
\NewDocumentEnvironment ..	2336, 2536, 2689, 2880, 3299
\newlabel	28
\newlabel	276
no-store	1381
\noindent	83, 91
\noindent ..	2443, 2590, 2848, 2894, 3153, 3267, 3311, 3518
\nointerlineskip	2443, 2590, 2848, 3267
noitemsep	571
\nopagebreak	861, 889, 1012, 1091, 1154, 1160
\normalfont	1877, 2021, 3439
nosep	571
P	
Packages:	
enumext	21, 50, 69, 78, 99
enumitem	28, 29
expl3	81
footnotehyper	27
hyperref	24, 26–28, 31, 59, 63, 87, 99
lua-visual-debug	41
multicol	21, 99
shortlst	81
\par ..	861, 889, 1012, 1091, 1154, 1160, 1189, 1206, 1856, 2487, 2509, 2627, 2642, 2763, 2866, 2873, 3153, 3167, 3285, 3292, 3518, 3532
\parindent	3130, 3495
\parsep	40, 43, 79, 80
\parsep	1634, 1642, 2311, 2728, 2735, 2740
parsep	571
\parskip	3131, 3496
\partopsep	80
\partopsep	2312, 2733
partopsep	571

peek commands:

\peek_meaning:NTF

3009, 3023, 3040, 3051, 3363, 3377, 3394

\peek_meaning_remove:NTF

3016, 3370

\peek_remove_spaces:n

2169

\phantomsection

28

\phantomsection

265

prg commands:

\prg_do_nothing:

269

\prg_new_protected_conditional:Npnn

203

\prg_replicate:nn

212, 3764

\prg_return_false:

207

\prg_return_true:

206

\printkeyans

13, 97, 3591

prop commands:

\prop_count:N

1584, 1844, 1880, 1943, 2024, 3442

\prop_gput_if_not_in:Nnn

1579, 1582

\prop_if_exist:NTF

1345, 3557

\prop_item:Nn

3560

\prop_new:N

1347

\ProvidesExplPackage

4

R

\raggedcolumns

2475, 2616

\ref

59, 62

ref

468, 488

\refstepcounter

3079, 3468

regex commands:

\regex_match:nnTF

205, 528, 530, 542, 544, 2376, 2389, 2928, 2941

\regex_replace_once:nnN

404

\renewcommand

416, 437, 447

\RenewDocumentCommand

2063, 2131, 2165, 2191, 2207

\RequirePackage

17

resume

1326

resume*

1326

rightmargin

615

\Roman

29, 33, 34

\Roman

312

\roman

29, 33, 34

\roman

313, 486, 3579

S

save-ans

1326

scan commands:

\scan_stop:

80, 2742, 2893, 3310, 3548, 3551

seq commands:

\seq_clear:N

3654

\seq_const_from_clist:Nn

3642

\seq_count:N

2702, 3658

\seq_gclear:N

2061, 2062

\seq_gput_right:Nn

1591, 2074, 2075

\seq_if_empty:NTF

2080, 3606, 3672

\seq_if_exist:NTF

1349, 3604

\seq_item:Nn

2760

\seq_map_function:NN

3663

\seq_map_inline:Nn

3612, 3617, 3651, 3673, 3674

\seq_map_pairwise_function:NNN

2082

\seq_new:N

94, 95, 112, 144, 145, 1351

\seq_pop_left:NN

3662

\seq_put_right:Nn

2663, 3670, 3687

\seq_set_from_clist:Nn

3655

\seq_set_map_e:NNn

3664

\seq_show:N

3608

\setcounter

539, 543, 545, 2269, 2271, 2316, 2318, 2707

\setenumext

5-8, 98, 3567, 3572, 3577, 3582, 3587, 3647

\setlength

1635, 1643

show-ans

1507, 1536

show-length

691

skip commands:

\skip_add:Nn

830, 836, 842, 852, 856, 880, 884, 981, 987, 993, 1003, 1007, 1029, 1082, 1086, 2728

\skip_eval:n

1634, 1642

\skip_gset:Nn

1102, 1106, 1110

\skip_gzero_new:N

1097, 1098

\skip_horizontal:N

663, 675, 687, 3113, 3127, 3492

\skip_horizontal:n

649, 1663, 1671, 2184, 2186, 3111

\skip_if_eq:nnTF

828, 834, 840, 904, 938, 979, 985, 991, 1022, 1027, 1048, 1099, 1121, 1234, 1248, 1262, 1273, 1284, 1295, 1306, 1317

\skip_new:N

54, 55, 59, 60, 61, 62, 63, 116, 174

\skip_set:Nn

813, 817, 866, 870, 907, 911, 915, 922, 926, 930, 941, 946, 950, 956, 961, 966, 1024, 1025, 1026, 1033, 1037, 1041, 1050, 1055, 1059, 1062, 1066, 1070, 1101, 1105, 1123, 1127, 1131, 1137, 1141, 1145, 2722, 2736

\skip_set_eq:NN

2264, 2310, 2311, 3130, 3131, 3495, 3496

\skip_use:N

815, 819, 854, 858, 862, 882, 886, 905, 924, 933, 939, 944, 948, 959, 963, 964, 969, 1005, 1009, 1035, 1235, 1239, 1242, 1249, 1253, 1256, 2487

\skip_zero:N

2312, 2466, 2610, 2733, 2734

\skip_zero_new:N

1017, 1018, 1019, 1096, 1118, 1119, 1120

\c_zero_skip

828, 834, 840, 905, 939, 979, 985, 991, 1022, 1027, 1048, 1099, 1121, 1235, 1249, 1262, 1273, 1284, 1295, 1306, 1317

\small

3569, 3574, 3579, 3584, 3589

\star

2045

start

551

\stepcounter

2067, 2670

store-ref

1507

str commands:

\c_backslash_str

3773, 3782, 3783, 3787, 3788, 3792, 3793, 3824, 3825, 3829, 3834, 3835

\c_colon_str

1843, 1942, 3548

\str_case:nn

1416

\str_count:n

212, 3764

\str_if_eq:nnTF

2274, 2322

\str_if_eq_p:nn

2267, 2315

\str_if_in:nnTF

3544

\str_new:N

111, 169

\str_set:Nn

392, 393, 394, 1518, 1519, 1541, 1542

\string

258

\strutbox

909, 913, 917, 928, 932, 943, 952, 958, 968, 981, 987, 993, 1024, 1025, 1026, 1029, 1039, 1043, 1052, 1059, 1064, 1072, 1101, 1102, 1105, 1112, 1125, 1133, 1139, 1147, 2738

T

TeX and L^AT_EX commands:

\@auxout

274

\@currenvir

1416

\protected@write

274

text commands:

\text_expand:n

3540

\textasteriskcentered

1515, 1529

\thepage

280

tl commands:

\c_space_tl

1900, 1969, 2014, 2036, 3403, 3404, 3731, 3746

<code>\tl_clear:N</code>	365, 371, 1717, 1890, 1959, 3400
<code>\tl_clear_new:N</code>	322
<code>\tl_const:Nn</code>	146, 306
<code>\tl_gclear:N</code> 2001, 2202, 2534, 2877, 3114, 3182, 3296	
<code>\tl_gput_right:Nn</code>	307
<code>\tl_greplace_all:Nnn</code>	328
<code>\tl_gset:Nn</code>	1989, 2495, 2975, 3046
<code>\tl_gset_eq:NN</code>	324, 2112, 3107
<code>\tl_if_blank:nTF</code>	3105, 3416, 3426, 3447
<code>\tl_if_empty:nTF</code>	422, 456, 462, 1598, 1629, 1743, 1997, 2181, 3685
<code>\tl_if_novalue:nTF</code>	1718, 1729, 1898, 1967, 2013, 2035, 2065, 2090, 2108, 2113, 2142, 2700, 2915, 3337, 3401, 3649
<code>\tl_map_inline:Nn</code>	325, 402
<code>\tl_new:N</code> 32, 39, 41, 42, 75, 76, 77, 83, 84, 85, 87, 88, 89, 91, 92, 98, 99, 109, 110, 121, 135, 136, 137, 140, 148, 149, 152, 153, 168, 171	
<code>\tl_put_left:Nn</code> 1606, 1639, 1726, 2007, 2029, 3415, 3422	
<code>\tl_put_right:Nn</code> 323, 414, 435, 445, 1560, 1567, 1610, 1645, 1728, 1734, 1742, 1745, 1755, 1760, 1763, 1769, 1795, 1805, 1819, 1835, 1841, 1846, 1893, 1896, 1900, 1927, 1932, 1937, 1940, 1949, 1962, 1965, 1969, 1979, 2014, 2036, 2381, 2394, 2933, 2946, 3418, 3428, 3449, 3565, 3570, 3575, 3580, 3585	
<code>\tl_remove_all:Nn</code>	3684
<code>\tl_remove_once:Nn</code>	1783, 1912
<code>\tl_replace_all:Nnn</code>	327
<code>\tl_reverse:N</code>	1782, 1784, 1911, 1913
<code>\tl_set:Nn</code> 154, 292, 366, 370, 375, 376, 410, 429, 646, 660, 672, 684, 1344, 1514, 1528, 1874, 2018, 2110, 3403, 3404, 3436, 3682	
<code>\tl_set_eq:NN</code> 333, 411, 413, 432, 434, 442, 444, 1781, 1910, 1923, 2154, 2158, 2681, 2683	
<code>\tl_to_str:n</code>	3540
<code>\tl_trim_spaces:n</code>	323, 3670, 3682, 3688
<code>\tl_use:N</code>	329, 332, 424, 458, 464, 717, 721, 725, 729, 733, 737, 741, 745, 749, 753, 757, 761, 765, 769, 773, 777, 1668, 1788, 1796, 1807, 1821, 1826, 1838, 2097, 2103, 2127, 2145, 2149, 2157, 2193, 2194, 2201, 2209, 2210, 2216, 2344, 2542, 2686, 2871, 3117, 3128, 3132, 3290, 3482, 3493, 3497, 3594, 3595, 3596, 3597, 3598, 3666
token commands:	
<code>\token_to_str:N</code>	276
<code>\topsep</code>	1635, 1643
<code>topsep</code>	571
<code>\typeout</code>	244, 247, 257, 258, 1423, 1431, 1448, 1467
U	
<code>\u</code>	405
use commands:	
<code>\use:N</code>	213, 2198, 2346
<code>\use:n</code>	3546
<code>\use_none:nn</code>	268
<code>\usecounter</code>	2265, 2313
V	
<code>\value</code>	2516, 2521, 2965, 2970
<code>\vspace</code> 896, 1239, 1242, 1253, 1256, 1266, 1268, 1277, 1279, 1288, 1290, 1299, 1301, 1310, 1312, 1321, 1323, 1634, 1642, 2697, 2708, 3168, 3533	
W	
<code>widest</code>	551
<code>wrap-ans</code>	1507
<code>wrap-label</code>	336
<code>wrap-label*</code>	336