

## **Bin Location** **Bin Locations Setup**

SAP Business One  
Version 10.0

PUBLIC

THE BEST RUN 

Welcome to the Setup course of the bin locations topic.

This is one of a series of courses available on the topic of bin locations.

## Objectives



At the end of this topic, you will be able to:

- Set up bin location managed Warehouses, Warehouse Sublevels and bin location codes
- Maintain and make changes in existing Warehouse Sublevels and bin location codes
- Define automatic allocation strategies and Receiving bin locations.

At the end of this module, you will be able to:

Set up bin location managed Warehouses, Warehouse Sublevels and bin location codes

Maintain and make changes in existing Warehouse Sublevels and bin location codes

Define automatic Allocation Strategies and Receiving bin locations.

## Agenda

- Introduction
- Warehouse Sublevels and Bin Location structure
- Setup of a warehouse managed with bin locations
- Warehouse Sublevels
  - Sublevel Field Activation
  - Warehouse Sublevels Codes Setup
  - Warehouse Sublevels Codes Management
- Bin Location codes
  - Bin Location Master Data
  - Bin Location Attributes
  - Bin Location Management
- Bin Locations Codes Modification
- Automatic allocation strategies and Receiving bin location

This is the agenda for our Setup course.

We will start by giving a short introduction of the setup process and introduce a business example.

## Introduction 1/2

- Most inventory based businesses require the ability to locate items within their warehouses and therefore require bin location functionality.
- In SAP Business One, you are now able to activate bin location functionality per warehouse. Warehouses can now be split into multiple sublevels supporting 4 sublevel dimensions.
- With some organizations managing thousands of bin locations, these sublevels and bin location codes can easily be managed manually or automatically with batch generation / update / delete functions.
- Business One allows you to define a number of different automatic allocation processes for receiving or issuing goods, making these processes as streamlined and automatic as possible.
- In this training topic we will cover the setup and definition needed before starting to work with bin locations.

Most inventory based businesses require the ability to locate items within their warehouses and therefore require bin location functionality.


In SAP Business One, you are able to activate bin location functionality per warehouse. Warehouses can be split into multiple sublevels supporting 4 sublevel dimensions.

With some organizations managing thousands of bin locations, these sublevels and bin location codes can easily be managed manually or automatically with batch generation / update / delete functions.

Business One allows you to define a number of different automatic allocation processes for receiving or issuing goods, making these processes as streamlined and automatic as possible.

In this training topic we will cover the setup and definition needed before starting to work with bin locations.

## Introduction 2/2

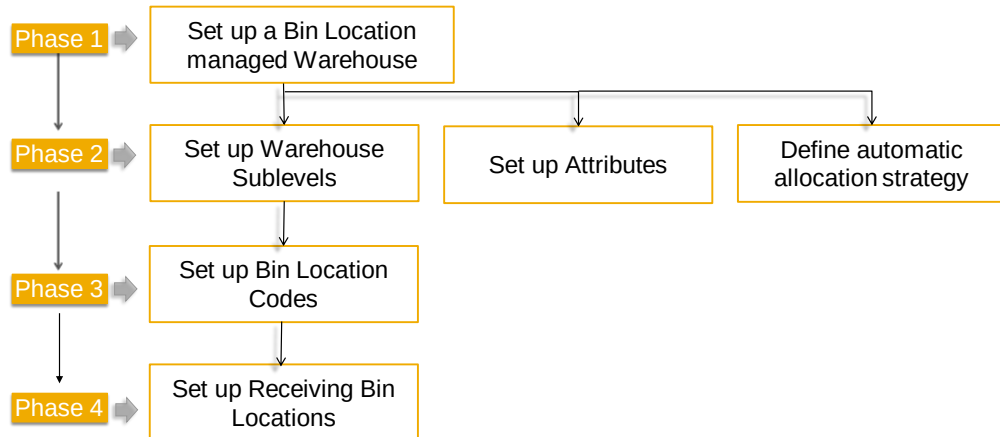

© 2020 SAP SE or an SAP affiliate company. All rights reserved. | PUBLIC

5

In this training unit we will describe the bin location set up according to the displayed configuration flow.

This setup is done in four phases:


Phase one defining a bin location managed Warehouse

In phase two, warehouse sublevels are added as well as attributes. Also once a bin location managed warehouse was defined, automatic allocation strategies can be defined as well.

In phase three, after the warehouse sublevels were added, bin location codes can be created.

Then, in phase four, once bin locations are available, some of them can be defined as receiving bin locations.

## Business Scenario



- OEC Computers sells equipment and office supplies to retailers in the US.
- OEC Computers has two main warehouses: in New York and in Los Angeles.
- George is the warehouse manager in New York.
- George and his staff have some challenges in locating items within their large warehouse.
- They need a solution that will enable dividing the warehouse in New York, into sublevels and locations.
- You demonstrate the Bin Locations module to George.



© 2020 SAP SE or an SAP affiliate company. All rights reserved. | PUBLIC

6

OEC Computers sells equipment and office supplies to retailers in the US.

OEC Computers has two main warehouses: in New York and in Los Angeles.

George is the warehouse manager in New York.

George and his staff have challenges in locating items within their large warehouse.

They need a solution that will enable dividing the warehouse in New York, into sublevels and locations.

You demonstrate the Bin Locations module to George.


## Agenda

- Introduction
- Warehouse sublevels and bin location structure
- Setup of a warehouse managed with bin locations
- Warehouse Sublevels
  - Sublevel field activation
  - Warehouse sublevels codes set up
  - Warehouse sublevels codes management
- Bin location codes
  - Bin location master data
  - Bin location attributes
  - Bin location management
- Bin locations codes modification
- Automatic allocation strategies and Receiving bin location

Let us examine the warehouse sublevels and bin location structure.

## Business Scenario

### OEC Computers Warehouse Structure

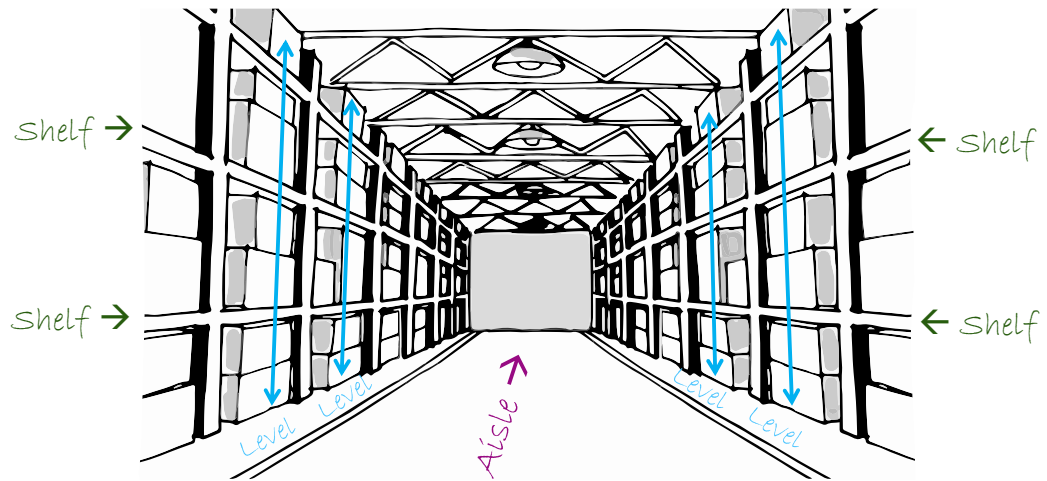

© 2020 SAP SE or an SAP affiliate company. All rights reserved. | PUBLIC

Made with  
**Scenes** 8

To set up bin locations at OEC Computers, we first need to examine the structure of the warehouse. In the image, we can see the main warehouse of OEC Computers. The warehouse is a big hangar divided into aisles. Each aisle has shelves stretching along the sides and each shelf is divided into levels, as shown in the image.

## Warehouse Sublevels Structure

### Bin Location Code Composition - Example


#### Warehouse Level

#### Warehouse Sublevel 1 - Aisle

#### Warehouse Sublevel 2 - Shelf

#### Warehouse Sublevel 3 - Level

A unique combination of the warehouse code and the warehouse sublevel codes

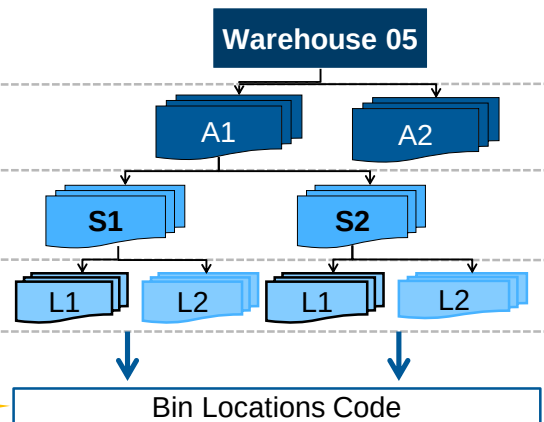

© 2020 SAP SE or an SAP affiliate company. All rights reserved. | PUBLIC

9

Let us get to know the sublevel structure of a warehouse managed by bin locations, so we understand how to define bin locations in OEC Computers' warehouse.

A warehouse structure often consists of a combination of different levels, such as an aisle, shelf, or floor.

One area type can be a sublevel area of another type.

At OEC Computers, for example, a shelf is a sublevel of an aisle.

This means an aisle contains several shelves.

SAP Business One supports up to 4 warehouse sublevels.


A combination of the warehouse code and warehouse sublevels codes defines the unique bin location code.

An example in the graphic can be the bin location code **05-A1-S2-L1**.

The same warehouse sublevel code can be used in many bin location codes.

We can see that level **L1** is connected to shelf **S1** and shelf **S2**.

## OEC Computers: Bin Location Code Structure



| Sublevel structure                 | Warehouse - Sublevel1 - Sublevel2 - Sublevel3 |           |           |           |
|------------------------------------|-----------------------------------------------|-----------|-----------|-----------|
| Bin Location Code in OEC Computers | 01                                            | –         | A4        | – S2 – L9 |
| Details                            | Warehouse 01                                  | – Aisle 4 | – Shelf 2 | – Level 9 |

Now , let us see an example of a bin location code structure.

We can see that the bin location code is a combination of the warehouse and warehouse sublevel codes.

## Agenda

- Introduction
- Warehouse sublevels and bin location structure
- Setup of a warehouse managed with bin locations
- Warehouse Sublevels
  - Sublevel field activation
  - Warehouse sublevels codes set up
  - Warehouse sublevels codes management
- Bin location codes
  - Bin location master data
  - Bin location attributes
  - Bin location management
- Bin locations codes modification
- Automatic allocation strategies and Receiving bin location

Let us set up a warehouse managed with bin locations

## Enable Bin Locations 1/2

**Administration → Setup →  
inventory → Warehouses**

The screenshot shows the 'Warehouse - Setup' window in SAP. The 'General' tab is active. The 'Bin Loc. Code Separator' field is highlighted with a yellow box, and a callout bubble points to it with the text: 'A character to distinguish between the different segment of the bin location code'. The 'Enable Bin Locations' checkbox is also checked and highlighted with a yellow box. Other fields like 'Warehouse Code', 'Warehouse Name', and 'Bin Warehouse' are visible.

© 2020 SAP SE or an SAP affiliate company. All rights reserved. | PUBLIC

12

OEC Computers decided to manage bin locations for their main warehouses in Los Angeles and New York.

OEC Computers has also some small warehouses including some lab warehouses.

George, the warehouse manager, decides not to manage bin locations for these warehouses since they are small and easy to navigate.

In SAP Business One, you have the option to enable bin locations on a warehouse by warehouse basis.

To activate bin locations in the warehouse, select the Enable Bin Locations checkbox.

Once bin locations have been activated for a warehouse, then:

A Bin Locations tab appears in the Warehouse – Setup window containing the bin location setup fields.

All the bin location related fields appear in the Warehouse - Setup window.

All other bin locations menu entries and windows appear.

The System Bin Location is created.

Every future inventory transaction will involve bin locations.

The Enable Bin Location checkbox can be un-checked at any time as long as there are no bin location transactions and no bin location codes have been generated (except for the System Bin Locations code).

Any warehouse sublevel codes defined in the system will be saved and be available once enabling bin locations again.

Note that in this window, you also define the bin locations code separator. Indicate a character (or several) that will be used as a separator between the different segments of the bin locations code (as shown earlier in the Bin Location Code Structure slide).

## System Bin Location

- System warehouse Sublevel 1 code:

*SYSTEM-BIN-LOCATION*

- **System Bin Location code:**

- *[Warehouse code]-SYSTEM-BIN-LOCATION*



© 2020 SAP SE or an SAP affiliate company. All rights reserved. | PUBLIC

13

George enabled bin locations for the New York warehouse.

He is now creating the warehouse sublevels and did not have a chance to create the bin locations codes yet.

Even though, the system enforces bin locations in every Inventory transaction after enabling bin locations. All SAP Business One users in OEC Computers, continue to work as usual.

This is possible due to the System bin location.

When bin location functionality is activated for a warehouse, a single system bin location is automatically created for that warehouse.

The System Bin Location code name will be: [Warehouse code]-SYSTEM-BIN-LOCATION.

By default, on bin location activation for a warehouse:

All inventory will automatically be placed in the System Bin Location.

All receipts will be automatically received to the System Bin Location.

All issues will automatically be made from the System Bin Location.

SAP Business One updates the System Bin Location in the Default Bin Location field and this is why inventory transactions are made for this bin location.

This means “Business as usual” until finishing all setup.

Then you can create Inventory Transfer documents to transfer the inventory from the System Bin Location code to the real physical bin location.

In order to work with bin locations, at least one code for Sublevel 1 should be defined.

For this reason, the system generates a system code for Sublevel 1 named: SYSTEM-BIN-LOCATION.

This Warehouse Sublevel code can be renamed but not removed.

We will learn how to rename Warehouse Sublevels in the next slides

## Agenda


- Introduction
- Warehouse sublevels and bin location structure
- Setup of a warehouse managed with bin locations
- Warehouse Sublevels
  - Sublevel field activation
  - Warehouse sublevels codes set up
  - Warehouse sublevels codes management
- Bin location codes
  - Bin location master data
  - Bin location attributes
  - Bin location management
- Bin locations codes modification
- Automatic allocation strategies and Receiving bin location

After enabling bin locations for a warehouse, you need to set up the structure of the Warehouse Sublevels.

Let us see how we can create and manage Warehouse Sublevels.

## Sublevels Field Activation

**Setup → Inventory → Bin Locations → Bin Locations field activation → Warehouse Sublevels**

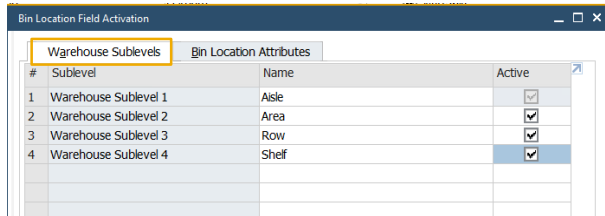

| # | Sublevel             | Name  | Active                              |
|---|----------------------|-------|-------------------------------------|
| 1 | Warehouse Sublevel 1 | Aisle | <input checked="" type="checkbox"/> |
| 2 | Warehouse Sublevel 2 | Area  | <input checked="" type="checkbox"/> |
| 3 | Warehouse Sublevel 3 | Row   | <input checked="" type="checkbox"/> |
| 4 | Warehouse Sublevel 4 | Shelf | <input checked="" type="checkbox"/> |

© 2020 SAP SE or an SAP affiliate company. All rights reserved. | PUBLIC



15

In SAP Business One you can manage up to 4 warehouse sublevels.

For example, OEC Computers is using all four sublevels:

The warehouse building Floors were set as Sublevel 1

The Areas in each Floor as Sublevel 2

The Rows of Shelves of each Area as Sublevels 3

The Shelves in each Row as Sublevel 4

Warehouse Sublevel 1 is always activated and cannot be de-activated.

By default all other Sublevels are deactivated.

Sublevels must be activated sequentially.

The Sublevels names are used as field labels in all relevant screens and reports.

## Warehouse Sublevel codes

### Manual Creation of Warehouse Sublevels codes

Setup → Inventory → Bin Locations → Warehouse Sublevel codes

The screenshot shows the 'Warehouse Sublevel Codes' window in SAP. It displays a list of sublevels with columns for Code, Description, and No. of Bin Locations. Four arrows point to specific sublevels:

- Warehouse Sublevel 1: Points to the first sublevel (Code: 1, Description: SYSTEM-BIN-LOCATE, No. of Bin Locations: 3).
- Warehouse Sublevel 2: Points to the second sublevel (Code: 2, Description: Area 1, No. of Bin Locations: 13).
- Warehouse Sublevel 3: Points to the third sublevel (Code: 3, Description: Level 1, No. of Bin Locations: 25).
- Warehouse Sublevel 4: Points to the fourth sublevel (Code: 4, Description: Shelf, No. of Bin Locations: 24).

In the Warehouse Sublevel Codes window, we can add the different warehouse sublevel codes for each level.

The sublevels available are the sublevels we defined in the Bin Location Field Activation window.

Each code will be a segment in a bin location code.

For example, in OEC Computers New York warehouse, there are 3 Floors, 4 Areas in each Floor, many Rows in each Area and many Shelves in each Row.

In Sublevel 1 we see the SYSTEM-BIN-LOCATION code.

In this window we can also update and delete Warehouse Sublevel codes manually (one by one).

### Note!

It is important to understand that the warehouse sublevel codes are common to all warehouses.

This means the warehouse sublevels codes are available to use in all warehouses.

However, if a different warehouse has a different structure and therefore different warehouse sublevels, new warehouse sublevels should be set up in addition to the existing sublevels.

Further more, every warehouse sublevel is defined as an independent code with no

dependence or connection to another higher Sublevel.

## Warehouse Sublevel Code Management Automatic Generation of Warehouse Sublevels

1

| # | Code              | Description | No. of Bin Locations |
|---|-------------------|-------------|----------------------|
| 1 | SYSTEM-BIN-LOCATX |             | 3                    |
| 2 | A1                | Aisle 1     | 18                   |
| 3 | A2                | Aisle 2     | 18                   |
| 4 | A3                | Aisle 3     | 18                   |
| 5 | A4                | Aisle 4     | 18                   |
| 6 |                   |             |                      |
|   |                   |             | 75                   |

2

| Sublevel Code Segment | From | To  |
|-----------------------|------|-----|
| 1 Fixed               | A    |     |
| 2 Numeric             | 01   | 100 |
| 3                     |      |     |
| 4                     |      |     |
| 5                     |      |     |
| 6                     |      |     |

In our example the Row and Shelf Sublevels have many codes.

Adding them manually can be time consuming.

SAP Business One allows automated batch creation of Sublevel codes.

In the Warehouse Sublevel Codes window, choose the Manage Sublevels Codes button to open the Warehouse Sublevel Code Management window.

George created 30 Rows with the prefix R: R01 to R30.

In order to combine this code structure, George do as follows:

In the first segment field he choses Fixed and entered the value R

In the second segment field he chose Numeric and entered the values 1 to 30.

The system automatically added leading zeroes to match the longest number length.

Leading zeroes enable an optimal alpha-numeric sorting.

You may create a more complicated code by defining up to 6 segments of a Sublevel code.


George also creates warehouse sublevel codes automatically for the Shelf sublevel.

In the Shelf sublevel code, George choses an Alphabetic segment.

In order to generate the range of codes he choose the OK button to open the Generation Preview window.

## Warehouse Sublevel Code Management

### Automatic Generation of Warehouse Sublevels – Preview Window

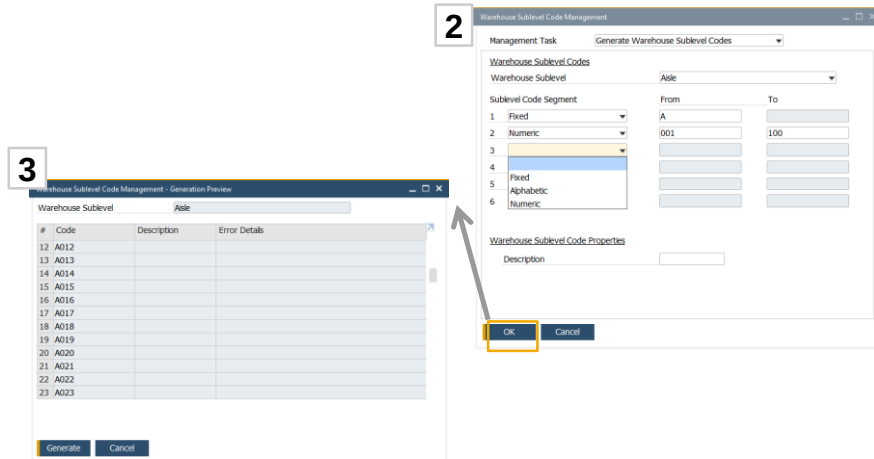

© 2020 SAP SE or an SAP affiliate company. All rights reserved. | PUBLIC

18

After George selected the OK Button, the Preview window opens.

In this window you can review the codes that are about to be generated.

You can also see if there is an error associated with one or more codes.

codes with error messages will appear in red.

If In the Generation Preview you can see the codes appear in red and all have an error message saying the code already exist.

This is due to the fact that these codes already exist. The system will not allow adding these codes again.

Choose the Generate button to add the codes that appear in the preview window with no error message.

**Note!**

- All generated codes will be in uppercase.
- You can also access the Warehouse Sublevel Code Management window from the following path: Administration → Setup → Inventory → Bin Locations → Warehouse Sublevel Code Management.

## Warehouse Sublevel Code Management

### Update and Delete a Range of Codes

#### Update Warehouse Sublevels Properties

The screenshot shows the 'Warehouse Sublevel Code Management' window. The 'Management Task' dropdown is set to 'Update Warehouse Sublevel Code Properties'. Below this, the 'Select Warehouse Sublevel Codes' section includes a 'Warehouse Sublevel' dropdown set to 'Shelf' and 'Sublevel Code From' and 'To' input fields. The 'Specify Properties to Update for Selected Warehouse Sublevel Codes' section has a checkbox for 'Description' which is unchecked. At the bottom are 'OK' and 'Cancel' buttons.

#### Delete Warehouse Sublevels Codes

The screenshot shows the 'Warehouse Sublevel Code Management' window. The 'Management Task' dropdown is set to 'Delete Warehouse Sublevel Codes'. Below this, the 'Select Warehouse Sublevel Codes' section includes a 'Warehouse Sublevel' dropdown set to 'Shelf' and 'Sublevel Code From' and 'To' input fields. The 'Expanded Selection Criteria' section has a checkbox for 'Description' which is unchecked. At the bottom are 'OK' and 'Cancel' buttons.

In the Warehouse Sublevel Code Management window we can also update or delete warehouse sublevels codes.

The update option allows updating warehouse sublevels codes description.

The deletion option allows deleting a range of sublevel codes. Sublevel codes which are currently in use as part of a bin location code, will not be deleted. If there are some codes, in use, within the range of codes to delete, then the system will delete only the unused codes. You may filter the codes to delete by entering a description string in the Expanded Selection Criteria.

## Agenda

- Introduction
- Warehouse Sublevels and Bin Location structure
- Setup of a warehouse managed with bin locations
- Warehouse Sublevels
  - Sublevel Field Activation
  - Warehouse Sublevels Codes Setup
  - Warehouse Sublevels Codes Management
- Bin Location codes
  - Bin Location Master Data
  - Bin Location Attributes
  - Bin Location Management
- Bin Locations Codes Modification
- Automatic allocation strategies and Receiving bin location

Next, let us learn how to manage bin location codes.

## Bin Location Master Data

**Inventory → Bin Locations → Bin Location Master Data**

The screenshot shows the SAP Bin Location Master Data window. It is divided into four main sections, each highlighted with a colored box and a corresponding callout arrow on the right:

- Code Structure** (purple box): The top section containing fields for Warehouse (05), Aisle (A1), Area (S2), Row (L1), and Shelf. Below these is the Bin Location Code (05-A1-S2-L1).
- Properties** (orange box): The second section containing fields for Inactive, Receiving Bin Location, Description, Item Weight, No. of Items, Alternative Sort Code, Minimum Qty, Maximum Weight, Item Qty, No. of Batches/Serials, Bar Code, and Maximum Qty.
- Restrictions** (green box): The third section containing dropdown menus for Item Restrictions, UoM Restrictions, Batch Restrictions, and Transaction Restrictions, all set to 'None'. It also includes a 'Last Updated On' field.
- Attributes** (blue box): The bottom section containing 'Further Info' and 'Hazardous Goods Info' fields.


At the bottom of the window are buttons for 'OK', 'Cancel', 'Manage Bin Locations', and 'Modify Bin Location Codes'.

As in any master data window, the Bin Location Master Data can be created updated, removed or duplicated.

The Bin Location Master Data window can be divided into 4 logical parts: code structure, bin location properties, restrictions on bin locations and bin location attributes.

Let us go over each part in the next slides.

## Bin Location Master Data Code Structure

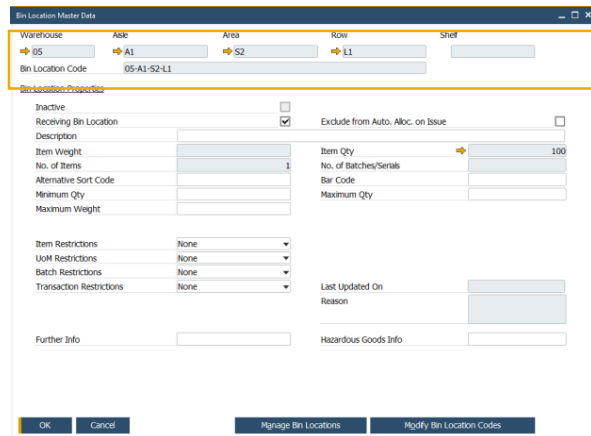

The screenshot shows the 'Bin Location Master Data' window. The 'Bin Location Code' field is highlighted with an orange box and contains the value '05-A1-S2-L1'. The window also displays various other fields such as 'Warehouse', 'Area', 'Row', 'Shelf', 'Item Weight', 'No. of Items', 'Alternative Sort Code', 'Minimum Qty', 'Maximum Qty', 'Item Restrictions', 'UoM Restrictions', 'Batch Restrictions', 'Transaction Restrictions', 'Last Updated On', 'Reason', 'Further Info', and 'Hazardous Goods Info'.

A bin location code is constructed by selecting a unique combination of a warehouse and warehouse sublevel codes.

We can see in the image that each sublevel we defined appears as a field name.


The warehouse sublevels that are available to choose are those we generated in the Warehouse Sublevel Codes Management window.

Once you entered the warehouse and warehouse sublevel codes, the Bin Location Code field is automatically constructed with the values entered along with the separator character we defined in the Warehouse Setup window.

George manually created a new bin location in warehouse 01, first floor, Blue Area, Row 01 and Shelf B.

## Bin Location Master Data

### Bin Location Properties

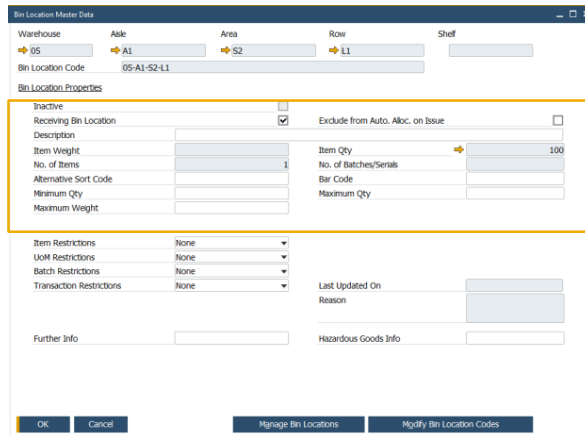

Bin Location Master Data

Warehouse: 05 Aisle: A1 Area: S2 Row: L1 Shelf:

Bin Location Code: 05-A1-S2-L1

Bin Location Properties

☐ Inactive ☒ Receiving Bin Location ☐ Exclude from Auto. Alloc. on Issue

Description:

Item Weight: No. of Items: Alternative Sort Code: Minimum Qty: Maximum Weight:

Item Qty: No. of Batches/Serials: Bar Code: Maximum Qty:

Item Restrictions: None UoM Restrictions: None Batch Restrictions: None Transaction Restrictions: None

Last Updated On: Reason:

Further Info: Hazardous Goods Info:

OK Cancel Manage Bin Locations Modify Bin Location Codes



In the bin location properties section we can view relevant information about the selected bin location:

- Quantities of items, Serial Numbers and Batches.
- The number of different items in this bin location.

We can also define information like description and minimum and maximum quantities.

Check the Inactive field when you want to block this bin location from being used. A bin location code can be checked as Inactive only if it has no inventory and no open inventory counting document.

George decided to set a certain bin location inactive, since this specific shelf is close to the drainpipe and suffers from wetness. Since this bin locations had historic transactions, George didn't remove it and only set it as Inactive.

The Alternative Sort Code is a free text reference field. When issuing items, you can choose to allocate items to bin locations by alpha-numeric order of the bin location code or by alpha-numeric order of this alternative sort code (among other methods of allocations). You may enter strings of numbers and text to the Alternative Sort Code field in a way that ensures a certain alpha-numeric order.

There is also an option to exclude specific bin locations from automatic allocation in outbound transactions by checking the Exclude from Automatic Allocation on Issue checkbox.

## Bin Location Master Data

### Restrictions for Bin Location (1/2)



In this section of the master data window we can define some restrictions for this bin location.

These restrictions determine which bin locations will be available for allocations in marketing documents and inventory transactions.

There are different types of restrictions that can be defined for a bin location like restricting a certain item or item group, certain unit of measure, certain batch or even specific types of inventory transactions.


Note that when you choose a Transaction Restriction, you allow all transactions except for the type of transactions you chose. On the other hand, in the Item and Batch Restriction you allow transactions only to the type of restriction you did choose.

In addition it is important to understand the difference between checking a bin location as Inactive and simply restricting all its transactions. In both cases we can not perform any transaction for those bin locations. But, when checking a bin location as Inactive, in addition to the transactions restriction, the bin location will not show in the bin locations reports and also will not be available for manual allocation. For any method we choose, we can view historic transactions in the Inventory Posting List report.

Finally note that the system will not allow setting a restriction to a bin location that its current content contradicts the restriction.

## Bin Location Master Data

### Bin Location Attributes

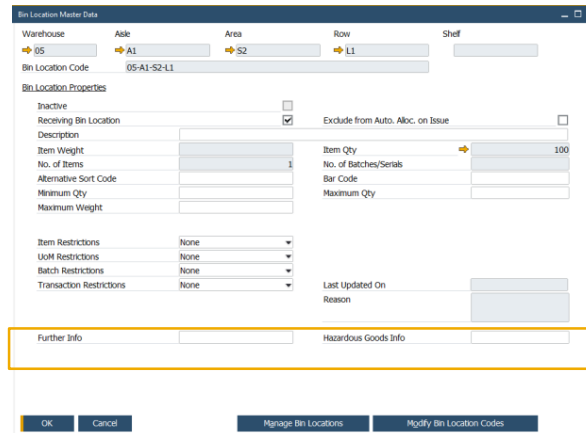

The screenshot shows the 'Bin Location Master Data' window. At the top, there are fields for Warehouse (05), Aisle (A1), Area (S2), Row (L1), and Shelf. Below these is the Bin Location Code (05-A1-S2-L1). The 'Bin Location Properties' section includes checkboxes for 'Inactive', 'Receiving Bin Location', and 'Exclude from Auto. Alloc. on Issue'. There are also fields for 'Description', 'Item Weight', 'No. of Items', 'Alternative Sort Code', 'Minimum Qty', 'Maximum Weight', 'Item Qty', 'No. of Batches/Serials', 'Bar Code', and 'Maximum Qty'. A section for 'Item Restrictions' includes dropdowns for 'Item Restrictions', 'UoM Restrictions', 'Batch Restrictions', and 'Transaction Restrictions'. At the bottom, there is a 'Further Info' section with a text field and a 'Hazardous Goods Info' section with a dropdown. The 'Further Info' section is highlighted with a yellow border. At the very bottom, there are buttons for 'OK', 'Cancel', 'Manage Bin Locations', and 'Modify Bin Location Codes'.



On the bottom of the window we can see the Attribute fields.  
The bin location Attribute names are taken from the definition we made in the Bin Location Field Activation window → Bin Location Attributes tab.

New Attribute values can be added easily, in any Attribute selection field by entering the value as free text and pressing Ctrl+TAB in the keyboard.

Let us learn some more about the attributes in the next slides.

## Bin Location Attributes

### Activating Attributes

**Administration → Setup → Inventory → Bin Locations → Bin Location Field Activation**

- A Bin Location Attribute is a characteristic, given by the user, that provides additional information or meaning to the bin location.

- Once created, the Bin Locations Attributes are then used as field labels in all relevant screens and reports

© 2020 SAP SE or an SAP affiliate company. All rights reserved. | PUBLIC

26

A Bin Location Attribute is a characteristic, given by the user, that provides additional information or meaning to the bin location.

After activating Attribute fields, they are added as filtering fields to the selection criteria of the bin location reports and their values can be displayed in the Bin Location Content List report.

The Attributes are defined and activated in Administration → Setup → Inventory → Bin Locations → Bin Location Field Activation.

The system supports up to 10 Attributes. By default all attributes are not active. To activate an Attribute just check the Active checkbox.

In addition, we recommend to change the default name of the Attribute (from Attribute 1, 2, 3..) to a meaningful name.

The name can be changed at any time.

In our business example, in the New York warehouse, it is important for George and his team to distinguish between different storage shelves sizes. The attributes Height, Width and Depth describe the exact size of each shelf. This way, they know if a certain package or item can fit a certain shelf. In addition, electronic components should be stored in an anti-static storage place (depends on the package type) and for that reason George added the Anti-Static Attribute.

### Note!

A Bin Location Attribute can not be deactivated if it is currently related to a bin location. Only when an Attribute is activated it appears as a field in the different reports and selection criteria windows.

## Bin Location Attributes

### Adding and maintaining Attributes Codes (Values)

**Administration → Setup → Inventory → Bin Locations → Bin Locations Attribute Codes**

| # | Attribute | Code |  |
|---|-----------|------|--|
| 1 | Height    | 0.5  |  |
| 2 | Height    | 1M   |  |
| 3 | Height    | 2M   |  |
| 4 | Height    | 3M   |  |
| 5 | Height    |      |  |

© 2020 SAP SE or an SAP affiliate company. All rights reserved. | PUBLIC

27

For each Attribute defined in the Bin Location Field Activation Window, we can enter values as Attribute codes.

Go to Administration → Setup → Inventory → Bin Locations → Bin Locations Attribute Codes.

From the drop down list, choose the attribute you wish to enter codes for.

In the above example we can see that George entered the possible Shelf heights, anywhere in the warehouse.

This window also displays, for each attribute, how many bin locations it currently contains.

Choosing the link arrow will open the Bin Location List filtered for the selected attribute.

Attribute codes can be manually deleted from this window if they are not assigned to any bin location code.

Attribute codes cannot be changed if they are in use – For example when associated with a bin location code.

Note,

The attributes codes definition, the same as the warehouse sublevels definition, are cross warehouses definitions.

This means that any attribute added can be used in the bin locations definition of every warehouse.

## Bin Location Management Generating Bin Location Codes

*Inventory → Bin Locations → Bin Location Management*

**Bin Location Management - Generation Preview**

| # | Bin Location Code | Inact... | Receiving Bin ... | Exclude f... | Descript... | Item Wel... | Item Qty | No. of |
|---|-------------------|----------|-------------------|--------------|-------------|-------------|----------|--------|
| 1 | 05-A001           | No       | No                | No           |             |             |          |        |
| 2 | 05-A002           | No       | No                | No           |             |             |          |        |
| 3 | 05-A003           | No       | No                | No           |             |             |          |        |
| 4 | 05-A004           | No       | No                | No           |             |             |          |        |
| 5 | 05-A005           | No       | No                | No           |             |             |          |        |
| 6 | 05-A006           | No       | No                | No           |             |             |          |        |

**Bin Location Management**

Management Task: **Generate Bin Locations**

Bin Location Codes

Warehouse: From 01 To 01  
 Aisle: A001 To A001  
 Area: S1 To S1  
 Row:   
 Shelf:

Bin Location Properties

Inactive: ☐  
 Receiving Bin Location: ☐ Exclude from Auto. Alloc. on Issue  
 Description:   
 Alternative Sort Code: ☐ Bar Code: ☐  
 Minimum Qty:   
 Maximum Qty:   
 Maximum Weight:   
 Item Restrictions: None  
 UoM Restrictions: None  
 Batch Restrictions: None  
 Transaction Restrictions: None Reason:   
 Further Info:   
 Hazardous Goods Info:   
 Height:   
 Depth:

Generate Cancel

© 2020 SAP SE or an SAP affiliate company. All rights reserved. | PUBLIC

28

The Bin Location Management window allows adding, deleting and updating bin location codes in a batch.

In order to generate new bin location codes, choose the Generate Bin Locations option from the drop down list of the management task field.

For each bin location created a record of a Bin Location Master Data is added.

Look at the image above, we are trying to add Bin Locations codes to the second Floor, Red Area, Rows 1 to 20, Shelves A to F.

Any value we enter to the Bin Location Properties fields will be updated in the new bin locations we add.

To add the new bin locations codes, choose the OK button.

When doing so, a preview window is opened that displays the list of bin location codes that are about to be added.

Use this preview window to go over these bin location codes.

When trying to add a bin location code that already exist, the system displays the existing code, in the preview window, in red and ignore it in the generation process.

## Bin Location Management

### Generating Bin Location Codes with User Defined Field Values

From the User Defined Field Management window under Tools menu- Customization Tools. Add new fields to Bin Location Management window

The image shows two SAP screenshots. The left screenshot is the 'User-Defined Fields - Management' window, displaying a table with columns: Category, Title, Description, Type, DFC, Mand., Index, and Linked Table. The 'Bin Location' category is expanded, showing fields like Warehouse and Remarks. The right screenshot is the 'Bin Location Management' window, showing the 'Generate Bin Locations' task. It includes input fields for Warehouse, Aisle, Area, Row, and Shelf. Below these are 'Bin Location Properties' checkboxes for Inactive, Receiving Bin Location, and Denomination. A 'User Defined Fields' section is highlighted with a yellow box, showing 'Exclude from Auto. Alloc. on Issue' as a selected field. An arrow points from this section to a smaller 'Bin Location User-Defined Fields' window, which shows the 'Warehouseman' and 'Remarks' fields populated with values.

A bin location generated from the **Bin Location Management** window along with the user defined field values

© 2020 SAP SE or an SAP affiliate company. All rights reserved. | PUBLIC

29

It is possible to generate bin locations along with their user defined field values.

After you define user defined fields to the **Bin Location Management** window in the User Defined Field Management window under Tools menu- Customization Tools, enter values for those fields.

To do so just choose the User Defined Fields browsing button to enter the Bin Location User-Defined Fields window. Here you can see all user defined fields that exist for the Bin Location Master Data.

Enter the values you wish to update in all the bin locations about to be generated.

In the example shown here, we can see that OEC Computers manages two user defined fields in the Bin Location Master Data: Warehouseman and Remarks. When George generated a group of bin locations he also entered values for the user defined fields. We can see in the bin location created that the user defined fields values were copied from the Bin Location User-Defined Fields window.

Note it is also possible to delete or update bin locations according to their user defined fields values. For example, update a restriction in all bin locations that their Warehouseman is set to George.

In the next slide we will see how to update and delete a group of bin locations in the Bin Location Management window.

## Bin Location Management

### Updating Bin Location Codes

The screenshot shows the 'Bin Location Management' window with the 'Update Preview' dialog open. The dialog displays a table of bin location codes and their properties. A red error message is highlighted for bin location code 05-A007.

| #  | Bin Location Code | Inactive | Description | Item Qty | No. of Items | Error Details                                                                               |
|----|-------------------|----------|-------------|----------|--------------|---------------------------------------------------------------------------------------------|
| 1  | 05-A003           | Y        | HP Only     |          |              |                                                                                             |
| 2  | 05-A004           | N        | HP Only     | 20       | 1            |                                                                                             |
| 3  | 05-A005           | N        | HP Only     |          |              |                                                                                             |
| 4  | 05-A006           | N        | HP Only     |          |              |                                                                                             |
| 5  | 05-A007           | N        | HP Only     | 21       | 2            | 2 You cannot restrict bin location to single item: bin location contains more than one item |
| 6  | 05-A008           | N        | HP Only     |          |              |                                                                                             |
| 7  | 05-A009           | N        | HP Only     |          |              |                                                                                             |
| 8  | 05-A010           | N        | HP Only     |          |              |                                                                                             |
| 9  | 05-A011           |          |             |          |              |                                                                                             |
| 10 | 05-A012           |          |             |          |              |                                                                                             |
| 11 | 05-A013           |          |             |          |              |                                                                                             |

© 2020 SAP SE or an SAP affiliate company. All rights reserved. | PUBLIC

30

Using the Update mode in the Bin Location Management window allows updating different properties for existing bin locations.

If a bin location code in the range does not exist then it will be ignored and will not be updated.

A Restriction to a bin location will not be updated if it contradicts the current bin location content. For example, if we try to restrict a bin location code to a specific Item and in the same bin location code there are already two items, the system will not update this bin location code. Any contradiction will generate an error message in the preview window.

In the image above we see that when we try to update a Single Item restriction to other bin location we receive an error message in the preview window saying that the bin location contains more than one item.

Note, when an error message appears, no update will take place for this bin location even if we updated another property field which is not related to the error message received. In the above image we also tried to update the Description of the bin locations but since we received an error message, the Description, as well as the Restriction, will not be updated.

In order to delete a certain property, choose the relevant checkbox and leave it blank.

## Bin Location Management

### Deleting Bin Location Codes

**Bin Location Management - Delete Bin Locations**

Management Task: **Delete Bin Locations**

Select Bin Locations

Warehouse: 05 To: 05  
 Aisle: A001 To: A003  
 Area:  
 Row:  
 Shelf:

Expanded Selection Criteria

☐ Inactive ☐  
☐ Removing Bin Location ☐ Exclude from Auto. Absc. on Issue  
☐ Description  
☐ Alternative Sort Code ☐ Bin Code  
☐ Maximum Qty ☐ Maximum Weight  
☐ Item Restrictions: None  
☐ Unit Restrictions: None  
☐ Batch Restrictions: None  
☐ Transaction Restrictions: None  
☐ Reason  
☐ Further Info  
☐ Height ☐ Hazardous Goods  
☐ Ambient ☐ Depth  
☐ Type og self ☐ Width

**Bin Location Management - Deletion Preview**

| # | Bin Location Code | Error Details                                          | Inactive | Item Qty | No. of Items | Reason | Height |
|---|-------------------|--------------------------------------------------------|----------|----------|--------------|--------|--------|
| 1 | 05-A003           | You cannot delete bin location: bin location is in use | No       | 12       | 3            |        |        |
| 2 | 05-A004           | You cannot delete bin location: bin location is in use | No       | 1        | 1            |        |        |
| 3 | 05-A005           |                                                        | No       |          |              |        |        |
| 4 | 05-A006           |                                                        | No       |          |              |        |        |
| 5 | 05-A007           |                                                        | No       |          |              |        |        |
| 6 | 05-A008           |                                                        | No       |          |              |        |        |

**Delete** **Cancel**

© 2020 SAP SE or an SAP affiliate company. All rights reserved. | PUBLIC

31

When using the Delete mode in the Bin Location Management window we can delete bin locations in a batch.

- The properties fields are used as filters and only bin locations that meet the properties defined will be deleted.
- If nothing is checked then all bin location codes in the specified range will be deleted.
- bin location codes with content or with transaction history can not be deleted.
- When trying to do so, an error will appear in the preview window for those bin locations.

As a best practice:

- The Delete option can be used when there is a need to delete bin location codes that were added by mistake.
- In addition, In some cases it is easier to generate a range of bin location codes and then delete just a few inside this range.

## Bin Location Codes Modification 1/2

*Inventory → Bin Locations → Bin Location Code Modification*

Range of bin location codes to modify  
= Source bin locations

New sublevel segment to be updated in the above range of bin location codes  
= Target bin location

| Select Bin Location Codes | From | To   |
|---------------------------|------|------|
| Warehouse                 | 01   | 01   |
| Aisle                     | A002 | A019 |
| Area                      | S1   | S6   |
| Row                       | L1   | L5   |
| Shelf                     |      |      |

| Modify Sublevels for Selected Bin Location Codes |  |
|--------------------------------------------------|--|
| <input type="checkbox"/> Aisle                   |  |
| <input checked="" type="checkbox"/> Area         |  |
| <input checked="" type="checkbox"/> Row          |  |
| <input type="checkbox"/> Shelf                   |  |

OK Cancel

© 2020 SAP SE or an SAP affiliate company. All rights reserved. | PUBLIC

32

In the Bin Location Code Modification window, we can make batch changes of bin location codes structure.

Modifying bin location codes is often needed due to warehouse reorganization or even to amend mistakes in the bin locations codes.

This modification is possible even if these bin locations already contain items.

SAP Business One automatically creates an Inventory Transfer document that transfers the inventory from the source bin location to the target bin location and deactivates the source bin location.

In the above image we can see the window is divided in two.

In the upper section, enter the range of bin location codes to modify.

In the lower section, enter the new warehouse sublevels you want to update in the range selected above.

In our business example, due to renovations made in the New York warehouse, in the third floor, a section of the Red Area was transferred to the Green Area.

In order to update this change in the system, George entered the Bin Location Codes Modification window and changed the Area sublevel of these bin location codes.

George entered the range of bin location code to modify, checked the Area sublevel and chose Green.

George also changed the Rows number to the new Rows number in the Green area.

Note!

In the lower section, if the sublevel is checked and the field is blank, the sublevel code will be set to blank.

This means that the new bin location code created will not include the segment of this level.

## Bin Location Codes Modification 2/2

### Merging Bin Location Codes

| Bin Location Code Modification - Preview |                                     |                          |                          |               |                  |
|------------------------------------------|-------------------------------------|--------------------------|--------------------------|---------------|------------------|
| #                                        | Select                              | Source Bin Location Code | Target Bin Location Code | Target Exists | Merging Required |
| 1                                        | <input checked="" type="checkbox"/> | 01-F3-RED-R20-A          | 01-F3-GREEN-R20-A        | Yes           | Yes              |
| 2                                        | <input checked="" type="checkbox"/> | 01-F3-RED-R20-B          | 01-F3-GREEN-R20-B        | Yes           | Yes              |
| 3                                        | <input checked="" type="checkbox"/> | 01-F3-RED-R20-C          | 01-F3-GREEN-R20-C        | Yes           | Yes              |
| 4                                        | <input checked="" type="checkbox"/> | 01-F3-RED-R20-D          | 01-F3-GREEN-R20-D        | Yes           | Yes              |
| 5                                        | <input checked="" type="checkbox"/> | 01-F3-RED-R20-E          | 01-F3-GREEN-R20-E        | No            | No               |
| 6                                        | <input checked="" type="checkbox"/> | 01-F3-RED-R20-F          | 01-F3-GREEN-R20-F        | No            | No               |
| 7                                        | <input checked="" type="checkbox"/> | 01-F3-RED-R20-G          | 01-F3-GREEN-R20-G        | No            | No               |
| 8                                        | <input checked="" type="checkbox"/> | 01-F3-RED-R20-H          | 01-F3-GREEN-R20-H        | No            | No               |
| 9                                        | <input checked="" type="checkbox"/> | 01-F3-RED-R20-I          | 01-F3-GREEN-R20-I        | No            | No               |
| 10                                       | <input checked="" type="checkbox"/> | 01-F3-RED-R20-J          | 01-F3-GREEN-R20-J        | No            | No               |
| 11                                       | <input checked="" type="checkbox"/> | 01-F3-RED-R20-K          | 01-F3-GREEN-R20-K        | No            | No               |

Modify Cancel

© 2020 SAP SE or an SAP affiliate company. All rights reserved. | PUBLIC

33

The merging of bin location codes will be required when one of the following conditions arises:

- The target bin location code already exists.  
In this case, the target bin location code will be merged with the existing bin location code.
- Multiple source bin location codes share one target bin location code.  
In this case, all source bin location codes will be merged into one.

If the target bin location code does not exist, SAP Business One automatically creates the target bin location with the same properties as those of the source bin location.

In the preview window, the system will indicate when a merge is needed.

Look at rows 1 to 4 in the above image.

The system indicates these target bin location codes already exist and this is why a Merge to the existing bin location code is required.

To enable this modification, we first need to check the Merge Bin Location Codes checkbox at the bottom of the window.

If we do not choose to merge, and merging is required, the selected rows are colored red and the system will not allow the modification to proceed.

This system behavior helps to prevent mistakes in bin location code modifications.

## Agenda

- Introduction
- Warehouse sublevels and bin location structure
- Setup of a warehouse managed with bin locations
- Warehouse Sublevels
  - Sublevel field activation
  - Warehouse sublevels codes set up
  - Warehouse sublevels codes management
- Bin location codes
  - Bin location master data
  - Bin location attributes
  - Bin location management
- Bin locations codes modification
- Automatic allocation strategies and Receiving bin location

Finally, let us see how to define an automatic allocation strategy for inbound transactions

## Incoming Allocations

### Automatic Allocation types on receipt

Warehouses - Setup

Warehouse Code: 05 Warehouse Name: Bin Warehouse

Bin Locations

Bin Loc. Code Separator: .

No. of Bin Locations: 93

Default Bin Location: 05-A1-S1-L1

Enforce Default Bin Loc. (unchecked)

Auto Alloc. on Issue: Single Choice

Auto Alloc. on Receipt: Default Bin Location

Receive Up to Max. Qty (unchecked)

Receive Up to Max. Weight (unchecked)

Enable Receiving Bin Locations (checked)

Receive Items By: Bin Location Code Order

Restrict Receipts to Empty Bin Locations (unchecked)

Receive up to: Maximum Qty

Automatic allocation strategies

Update Cancel

© 2020 SAP SE or an SAP affiliate company. All rights reserved. | PUBLIC

35

There are two methods of automatic allocations for incoming transactions.

The first method refers to the different automatic allocations strategies that are listed in the Automatic Allocation on Receipt field in the Warehouse – Setup window.

The different strategies include allocating to:

A predefined default bin location, or

The last bin location that received items, or

The current bin location of the item, or

The current and historical bin location.

The second method refers to automatic allocation to a receiving area bin locations.

The receiving areas are specific bin locations that are defined as Receiving. This definition is done in the Bin Location Master Data.

Let us continue by learning more about the Receiving bin locations.

## Receiving Bin Locations

- First define your warehouse as Receiving Bin Locations Enabled

The top screenshot shows the 'Warehouse Setup' window. In the 'Bin Locations' tab, the 'Enable Receiving Bin Locations' checkbox is checked. Other options like 'Receive Items By' and 'Bin Location Code Order' are also visible. A yellow arrow points from the text 'Then choose the bin locations you wish to set as a Receiving bin location' to this checkbox.

The bottom screenshot shows the 'Bin Location Master Data' window. In the 'Bin Location Properties' section, the 'Receiving Bin Location' checkbox is checked. A yellow arrow points from the text 'Then choose the bin locations you wish to set as a Receiving bin location' to this checkbox.

- Then choose the bin locations you wish to set as a Receiving bin location

Receiving bin location can be used as a special section in a warehouse which typically represents a receiving inspection area or just a transit area for temporary storage of incoming goods.

In OEC Computers, George decided to manage a receiving area for the following reasons:

In some cases, the warehouse employees do not know where to allocate certain goods.

In other cases there is no room for all goods received.

In order to keep correct level of inventory in SAP Business One, inventory that was not fully allocated in the inbound transaction, will enter the Receiving bin location.

Once a suitable bin location was found for the goods stored in the receiving area, the warehouse employee creates an Inventory Transfer document, to allocate the goods in the storage bin location.

The Receiving bin location definitions are set up in two windows:

The Warehouse Setup window – Here you indicate whether Receiving bin locations can be defined in this warehouse.


The Bin Location Master Data window – Once Receiving bin locations are enabled for a warehouse, you can designate any bin location as a Receiving bin location by selecting the Receiving Bin Location checkbox.

In the Warehouse Setup window, you can also choose the order of the Receiving bin locations codes.

In the Received Items By field, choose to receive items to Receiving bin locations according to the bin location codes alpha numeric order or the Alternative Sort code alpha numeric order.

To learn more about the Receiving bin location procedure, refer to the **Allocation Processes in Bin Locations** course

## Automatic Allocation Strategies - Default Bin Location

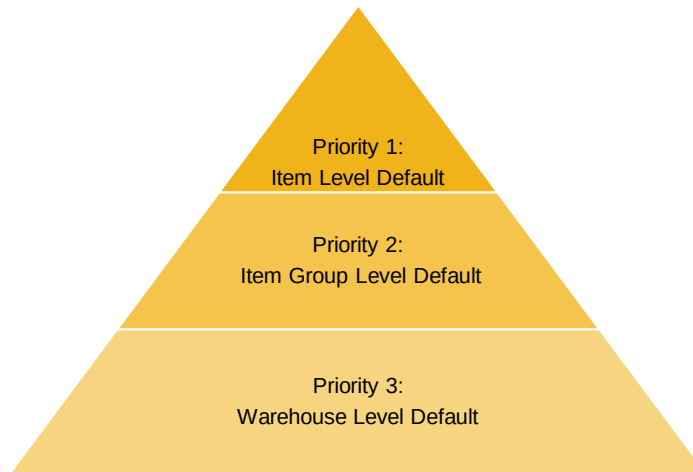

© 2020 SAP SE or an SAP affiliate company. All rights reserved. | PUBLIC

37

A Default bin location is used as a default for incoming bin location transactions.

When a Default is defined, it is updated automatically in the row of the document.

There are three levels of Defaults: Warehouse, Item Group and Item.

You may enter Defaults for all three levels.

When the system encounters a conflict between one or more Defaults, the Default bin location code is chosen according to the priority displayed in the above image.

The first priority is the Item level Default.

The second priority is the Item Group level Default.

And the third priority is the Warehouse level Default.

The use of a Default bin location code can be enforced at each level.

When doing so, the default bin location is chosen automatically and it is not possible to change it.

Default bin location codes that are not enforced can be changed at any time.

## Automatic Allocation Strategies - Default Bin Location

### Third Priority: Warehouse Level Default

The screenshot shows the 'Warehouses - Setup' window. The 'Warehouse Code' is 05 and the 'Warehouse Name' is Bin Warehouse. The 'Bin Locations' tab is active. The 'Default Bin Location' field is highlighted with a yellow box, showing a dropdown menu with a single choice. The 'Bin Loc. Code Separator' is set to '-'. The 'No. of Bin Locations' is 93. The 'Auto Alloc. on Issue' is set to 'Single Choice'. The 'Auto Alloc. on Receipt' is set to 'Default Bin Location'. The 'Receive up to Max. Qty' and 'Receive up to Max. Weight' checkboxes are unchecked. The 'Bin Location Code Order' is set to 'Maximum Qty'.

© 2020 SAP SE or an SAP affiliate company. All rights reserved. | PUBLIC

38

In the Warehouse Setup window you can enter a Default bin location code and choose whether to enforce it.

When enabling bin locations in a warehouse, SAP Business One automatically enters the System Bin Location code to the Default Bin Location field.

This is done to ensure that every inbound transaction will be easily made to a bin location even if the whole set of bin location codes was not constructed yet.

Since the System bin location is not a real - physical bin location, it is important to replace the default code of the warehouse to a meaningful bin location code or delete the default value.

## Automatic Allocation Strategies - Default Bin Location

### Second Priority: Item Group Level Default

The screenshot shows the 'Item Group - Setup' dialog box for 'HP Printers'. The 'General' tab is active. The 'Default Bin Locations' table is highlighted with a yellow box. The table has four columns: '#', 'Whse Code', 'Whse Name', and 'Default Bin Location'. The first row shows '01' for 'General Warehouse' with '01-SYSTEM-BIN-LOCATION' as the default bin location. The second row shows '05' for 'Bin Warehouse' with an empty default bin location. The 'Enforce Default Bin Loc.' column has checkboxes for each row, with the first row checked and the second row unchecked.

| # | Whse Code | Whse Name         | Default Bin Location   | Enforce Default Bin Loc.            |
|---|-----------|-------------------|------------------------|-------------------------------------|
| 1 | 01        | General Warehouse | 01-SYSTEM-BIN-LOCATION | <input checked="" type="checkbox"/> |
| 2 | 05        | Bin Warehouse     |                        | <input type="checkbox"/>            |

© 2020 SAP SE or an SAP affiliate company. All rights reserved. | PUBLIC

39

In the Item Group – Setup, in the Default Bin Locations table you can choose, per Warehouse, a Default bin location code and whether to enforce it.

## Automatic Allocation Strategies - Default Bin Location

### First Priority: Item Level Default

| # | Whse C. | Whse Name    | Locked                              | First Bin L. | Default B.L. | Enforce D. | In Stock | Committed | Ordered | Available | L |
|---|---------|--------------|-------------------------------------|--------------|--------------|------------|----------|-----------|---------|-----------|---|
| 1 | 01      | General Warr | <input checked="" type="checkbox"/> | 01-SYST      |              |            | 275      | 8         | 30      | 297       |   |
| 2 | 02      | Bin-Wareh    | <input type="checkbox"/>            |              |              |            | 30       |           |         | 30        |   |
| 3 | 03      | Drop Ship    | <input type="checkbox"/>            |              |              |            |          |           |         |           |   |
| 4 | 04      | Consignment  | <input type="checkbox"/>            |              |              |            |          |           |         |           |   |
| 5 | 05      | Bin Warehou  | <input type="checkbox"/>            |              |              |            | 305      | 8         | 30      | 327       |   |

© 2020 SAP SE or an SAP affiliate company. All rights reserved. | PUBLIC

40

In the Item Master Data, in the Inventory Data tab, you can enter a Default bin location code and choose whether to enforce this bin location code.

This Default is defined per Warehouse row.

For Warehouses that are not bin location Enabled, all bin location fields will be disabled.

In the next bin location course - Using Bin Locations in the Business Processes, we will learn about the use of the default bin locations and other automatic allocation strategies in the allocation process.

## Summary



You should now be able to:

- Setup basic bin locations managed Warehouses, Warehouse Sublevels and bin location codes.
- Maintain and make changes in existing Warehouse Sublevels and bin location codes
- Define Default and receiving bin locations

You should now be able to

Set up bin location managed Warehouses, Warehouse Sublevels and bin location codes

Maintain and make changes in existing Warehouse Sublevels and bin location codes

Define Default bin locations and Receiving bin locations.

© 2020 SAP SE or an SAP affiliate company. All rights reserved.

No part of this publication may be reproduced or transmitted in any form or for any purpose without the express permission of SAP SE or an SAP affiliate company.

The information contained herein may be changed without prior notice. Some software products marketed by SAP SE and its distributors contain proprietary software components of other software vendors. National product specifications may vary.

These materials are provided by SAP SE or an SAP affiliate company for informational purposes only, without representation or warranty of any kind, and SAP or its affiliated companies shall not be liable for errors or omissions with respect to the materials. The only warranties for SAP or SAP affiliate company products and services are those that are set forth in the express warranty statements accompanying such products and services, if any. Nothing herein should be construed as constituting an additional warranty.

In particular, SAP SE or its affiliated companies have no obligation to pursue any course of business outlined in this document or any related presentation, or to develop or release any functionality mentioned therein. This document, or any related presentation, and SAP SE's or its affiliated companies' strategy and possible future developments, products, and platforms, directions, and functionality are all subject to change and may be changed by SAP SE or its affiliated companies at any time for any reason without notice. The information in this document is not a commitment, promise, or legal obligation to deliver any material, code, or functionality. All forward-looking statements are subject to various risks and uncertainties that could cause actual results to differ materially from expectations. Readers are cautioned not to place undue reliance on these forward-looking statements, and they should not be relied upon in making purchasing decisions.

SAP and other SAP products and services mentioned herein as well as their respective logos are trademarks or registered trademarks of SAP SE (or an SAP affiliate company) in Germany and other countries. All other product and service names mentioned are the trademarks of their respective companies.

See <http://global.sap.com/corporate-en/legal/copyright/index.epx> for additional trademark information and notices.