

Getting started with Cloud Data Sense for Azure NetApp Files

Cloud Manager

Tom Onacki July 01, 2021

This PDF was generated from https://docs.netapp.com/us-en/occm/task_scanning_anf.html on September 09, 2021. Always check docs.netapp.com for the latest.

Table of Contents

Getting started with Cloud Data Sense for Azure NetApp Files	. 1
Quick start	. 1
Discovering the data sources that you want to scan	. 2
Deploying the Cloud Data Sense instance	. 2
Enabling Cloud Data Sense in your working environments	. 2
Verifying that Cloud Data Sense has access to volumes	. 2
Enabling and disabling compliance scans on volumes	. 4

Getting started with Cloud Data Sense for Azure NetApp Files

Complete a few steps to get started with Cloud Data Sense for Azure NetApp Files.

Quick start

Get started quickly by following these steps, or scroll down to the remaining sections for full details.



Discover the data sources that contain the data you want to scan

Before you can scan Azure NetApp Files volumes, Cloud Manager must be set up to discover the configuration.



Deploy the Cloud Data Sense instance

Deploy Cloud Data Sense in Cloud Manager if there isn't already an instance deployed.



Enable Cloud Data Sense and select the volumes to scan

Click **Compliance**, select the **Configuration** tab, and activate compliance scans for volumes in specific working environments.



Ensure access to volumes

Now that Cloud Data Sense is enabled, ensure that it can access all volumes.

- The Cloud Data Sense instance needs a network connection to each Azure NetApp Files subnet.
- Make sure these ports are open to the Data Sense instance:
 - For NFS ports 111 and 2049.
 - For CIFS ports 139 and 445.
- NFS volume export policies must allow access from the Data Sense instance.
- Data Sense needs Active Directory credentials to scan CIFS volumes.

Click Compliance > Configuration > Edit CIFS Credentials and provide the credentials.



Manage the volumes you want to scan

Select or deselect the volumes that you want to scan and Cloud Data Sense will start or stop scanning them.

Discovering the data sources that you want to scan

If the data sources you want to scan are not already in your Cloud Manager environment, you can add them to the canvas at this time.

For Azure NetApp Files, Cloud Manager must be set up to discover the configuration.

Deploying the Cloud Data Sense instance


Deploy Cloud Data Sense if there isn't already an instance deployed.

Data Sense must be deployed in the cloud when scanning Azure NetApp Files volumes, and it must be deployed in the same region as the volumes you wish to scan.

Enabling Cloud Data Sense in your working environments

You can enable Cloud Data Sense on your Azure NetApp Files volumes.

1. At the top of Cloud Manager, click **Data Sense** and then select the **Configuration** tab.

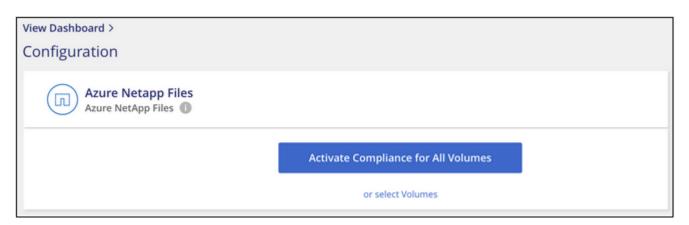

2. To scan all volumes in a working environment, click Activate Scanning for All Volumes.

When enabled in this manner, full "mapping and classification" scanning is performed on all volumes.

If you want to enable scanning only for certain volumes, or if you only want to perform "mapping-only" scanning, click **or select Volumes** and then choose the volumes you want to scan.

See Enabling and disabling compliance scans on volumes for details.

Result

Cloud Data Sense starts scanning the volumes you selected in the working environment. Results will be available in the Compliance dashboard as soon as Cloud Data Sense finishes the initial scans. The time that it takes depends on the amount of data—it could be a few minutes or hours.

Verifying that Cloud Data Sense has access to volumes

Make sure that Cloud Data Sense can access volumes by checking your networking, security groups, and export policies. You'll need to provide Data Sense with CIFS credentials so it can access CIFS volumes.

Steps

1. Make sure that there's a network connection between the Cloud Data Sense instance and each network that includes volumes for Azure NetApp Files.



For Azure NetApp Files, Cloud Data Sense can only scan volumes that are in the same region as Cloud Manager.


- 2. Ensure the following ports are open to the Data Sense instance:
 - For NFS ports 111 and 2049.
 - For CIFS ports 139 and 445.
- 3. Ensure that NFS volume export policies include the IP address of the Data Sense instance so it can access the data on each volume.
- 4. If you use CIFS, provide Data Sense with Active Directory credentials so it can scan CIFS volumes.
 - a. At the top of Cloud Manager, click Data Sense.
 - b. Click the **Configuration** tab.



c. For each working environment, click **Edit CIFS Credentials** and enter the user name and password that Data Sense needs to access CIFS volumes on the system.


The credentials can be read-only, but providing admin credentials ensures that Data Sense can read any data that requires elevated permissions. The credentials are stored on the Cloud Data Sense instance.

After you enter the credentials, you should see a message that all CIFS volumes were authenticated successfully.

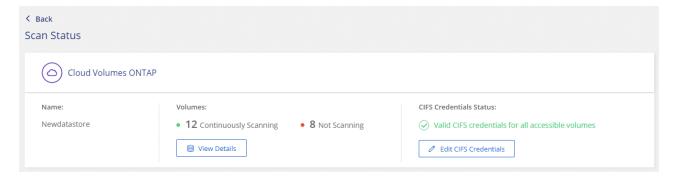


5. On the *Configuration* page, click **View Details** to review the status for each CIFS and NFS volume and correct any errors.

For example, the following image shows three volumes; one of which Cloud Data Sense can't scan due to network connectivity issues between the Data Sense instance and the volume.

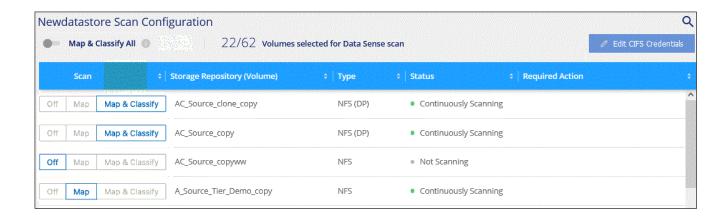

Enabling and disabling compliance scans on volumes

You can stop or start mapping scans, or mapping and classification scans, in a working environment at any time from the Configuration page. We recommend that you scan all volumes.

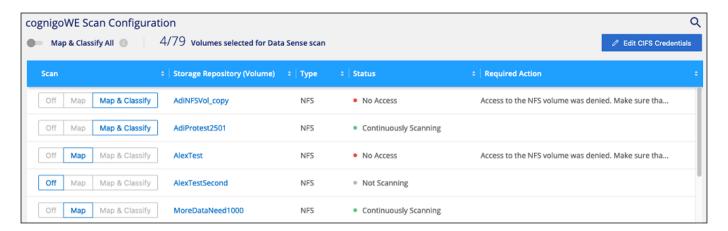

То:	Do this:
Enable mapping-only scans on a volume	Click Map
Enable full scanning on a volume	Click Map & Classify
Enable full scanning on all volumes	Move the Map & Classify All slider to the right
Disable scanning on a volume	Click Off
Disable scanning on all volumes	Move the Map & Classify All slider to the left



New volumes added to the working environment are automatically scanned only when the **Activate Compliance for all Volumes** setting is enabled. When this setting is disabled, you'll need to activate scanning on each new volume you create in the working environment.

Copyright Information

Copyright © 2021 NetApp, Inc. All rights reserved. Printed in the U.S. No part of this document covered by copyright may be reproduced in any form or by any means-graphic, electronic, or mechanical, including photocopying, recording, taping, or storage in an electronic retrieval system-without prior written permission of the copyright owner.

Software derived from copyrighted NetApp material is subject to the following license and disclaimer:

THIS SOFTWARE IS PROVIDED BY NETAPP "AS IS" AND WITHOUT ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, WHICH ARE HEREBY DISCLAIMED. IN NO EVENT SHALL NETAPP BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

NetApp reserves the right to change any products described herein at any time, and without notice. NetApp assumes no responsibility or liability arising from the use of products described herein, except as expressly agreed to in writing by NetApp. The use or purchase of this product does not convey a license under any patent rights, trademark rights, or any other intellectual property rights of NetApp.

The product described in this manual may be protected by one or more U.S. patents, foreign patents, or pending applications.

RESTRICTED RIGHTS LEGEND: Use, duplication, or disclosure by the government is subject to restrictions as set forth in subparagraph (c)(1)(ii) of the Rights in Technical Data and Computer Software clause at DFARS 252.277-7103 (October 1988) and FAR 52-227-19 (June 1987).

Trademark Information

NETAPP, the NETAPP logo, and the marks listed at http://www.netapp.com/TM are trademarks of NetApp, Inc. Other company and product names may be trademarks of their respective owners.