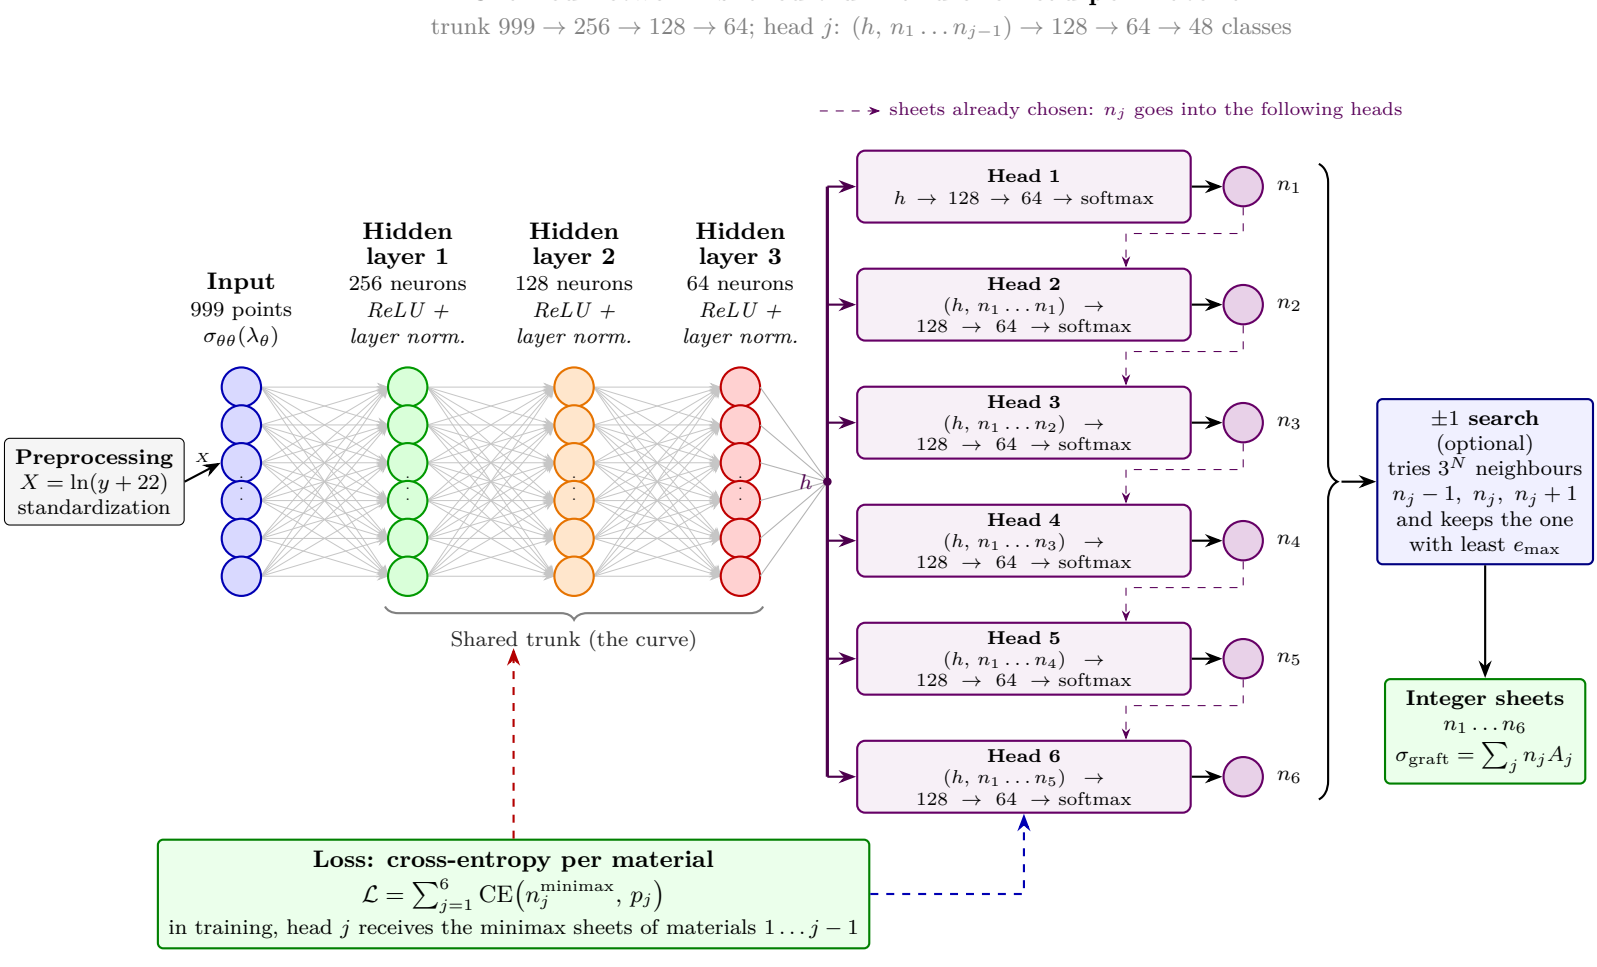


Each head chooses the number of sheets of its material (0 to 47) knowing what the previous heads chose, so it can compensate between materials. It is used in order: material 1, then 2 knowing 1, and so on up to 6. About 418 000 parameters (6 materials).