

Purpose of this Overview

This document introduces a conceptual systems architecture for technical review and discussion, outlining the context, scope, boundaries, and operational role of AstroGit-OS empowering observatory control, astronomical operations, and maintenance engineering teams.

For an enhanced interactive breakdown, visit the [web version](#) or explore the [AstroGit-OS](#) GitHub repository. Technical feedback and architecture [discussions](#) are welcome.


AstroGit-OS — Full Overview

Declarative Architecture and Operational Lineage for Astronomical Instrumentation via GitOps

Pablo Zúñiga / Industrial & Systems Engineer
Principal Systems Architect / Cuxhaven Labs
v0.2 – Systems Architecture Concept
September 13, 2026

EXECUTIVE SUMMARY

AstroGit-OS is a reference declarative architecture for the configuration, maintenance, and operational lineage of optomechanical instrumentation in next-generation astronomical observatories. Applying GitOps and Infrastructure-as-Code principles, AstroGit-OS dispenses with massive astronomical data and focuses exclusively on the operational metadata required to govern scientific infrastructure.

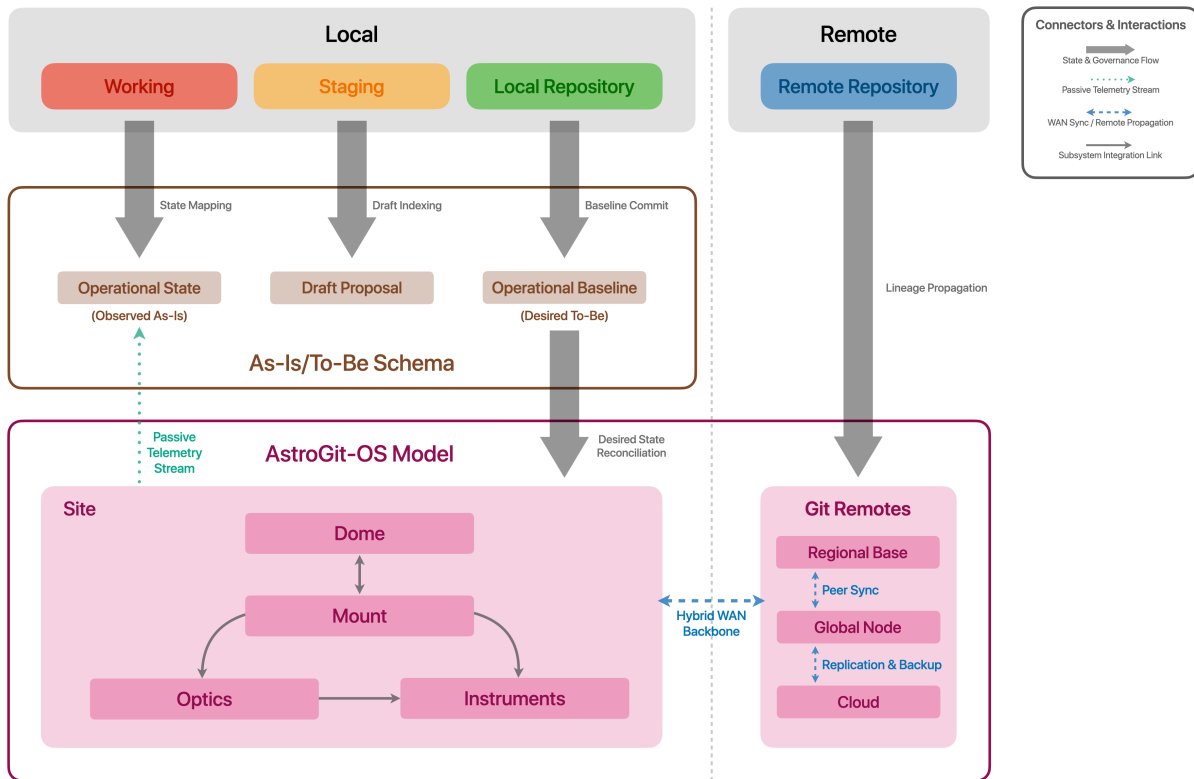

DRAFT FOR TECHNICAL REVIEW ONLY — Cuxhaven Labs

The Value of Operational Certainty in Astronomy

Through an operational state reconciliation architecture, AstroGit-OS governs the evolution of infrastructure and instrumentation, detects deviations between observed state and desired configuration, and establishes a verifiable link between observation blocks and the versioned operational state through passive telemetry and non-intrusive state extraction agents. In doing so, it aims to reduce operational uncertainty, minimize downtime, and facilitate the reproduction of technical conditions underlying the scientific use of astronomical instrumentation.

Scope and Boundaries of AstroGit-OS

AstroGit-OS does not capture, store, process, simulate, or transmit astronomical data, nor does it operate telescopes in real time. Its function is to govern a versioned, asynchronous digital representation of the operational state of telescopes and other scientific infrastructure, decoupling scientific activities from engineering operations. **AstroGit-OS records, stores, and audits the evolution of infrastructure configuration through Git as a version-controlled governance mechanism**, keeping the declarative representation of operational state separate from its physical implementation across the instrumentation.

AstroGit-OS operates on a passive ingestion model via unidirectional replication: it receives telemetry metadata and status headers from an intermediate buffer, outside the critical control network. By requiring no active agents installed within the operational network and holding no write or control permissions, AstroGit-OS does not interfere under any scenario with the observatory's scientific or engineering operations.

AstroGit-OS Differentiating Principles

▸ Scientific Lineage Without Massive Data

Associates each astronomical observation block with a SHA-256 identifier of the hardware operational state, enabling verifiable scientific traceability without burdening the repository with massive datasets.

▸ Distributed Operational Resilience

Supports operational continuity and the recovery of versioned configurations at remote high-altitude observatories through decentralized and synchronized Git topologies.

▸ Non-Intrusive Declarative Governance

Translates infrastructure maintenance into an auditable workflow through Pull Requests and human validation, operating strictly asynchronously without interfering with real-time telescope operations.

CONTEXTUAL FRAMEWORK AND OPERATIONAL GOVERNANCE

This framework examines the critical challenges facing contemporary optomechanics and the implications of the transition toward the exabyte era, establishing the foundations of AstroGit-OS as a declarative governance model for world-class astronomical instrumentation.

Operational Challenges of Astronomical Optomechanics

Large-scale observatories operate in highly precise optomechanical environments, where optical, thermal, and mechanical variations can affect the conditions under which scientific data are acquired. The operation of this infrastructure generates information distributed across control systems, databases, maintenance records, and configuration mechanisms, each serving specific operational functions.

This heterogeneity can fragment the historical representation of infrastructure state, making it difficult to reconstruct as a coherent, contextualized, and verifiable record. Addressing this challenge requires more than simply recording events, configurations, or states. **It requires preserving the ability to reproducibly reconstruct the operational state of the infrastructure throughout its lifecycle.** This, in turn, requires linking configuration, observed state, authorized changes, and operational context within a consistent historical representation that remains independent of the original source and can be subsequently verified.

Scale, Complexity, and Automation of Scientific Infrastructure

Modern astronomy is undergoing a profound transformation of scale driven by next-generation projects—such as the Extremely Large Telescope (ELT), the Giant Magellan Telescope (GMT), and the Vera C. Rubin Observatory—operating at the technological frontier. The convergence of high-performance computing, unprecedented optomechanical complexity, and the accelerated growth of scientific data streams poses new challenges for astronomical infrastructure management. As these observatories expand in capacity and complexity, operational infrastructure must evolve alongside them, reducing friction, overhead, and time spent on operational tasks that do not add scientific value. Consequently, automating operational tasks becomes an essential component to ensure that system complexity translates tangibly into reduced operational burden and increased scientific capacity.

Petabytes, Exabytes, and the Reproducibility of Scientific Conditions

Supporting the distributed digital infrastructure required by astronomy in the coming decades demands a massive shift from petabyte to exabyte data scales. Driven by ground-based megainfrastructures (ELT, GMT, Rubin), next-generation space flagships (Roman, HWO), and agile private initiatives like the Schmidt Sciences observatory system and Lazuli telescope, this new paradigm creates environments where operational continuity and technical reproducibility are absolutely critical to guaranteeing the scientific validity of observations.