

Actividad práctica

Rafael Zavala NRC 11630

1.

The screenshot shows a GitHub profile page for a user named 'Roxor-z'. The header includes navigation links for Pull requests, Issues, Marketplace, and Explore. The profile section features a custom avatar, a bio, and a 'ProTip!' banner encouraging profile updates. Below the profile, it states 'You don't have any public repositories yet.' and shows a contribution graph with 3 contributions in the last year. The user's name 'Roxor-z' and an 'Edit profile' button are also visible.

2.

Create a new repository

A repository contains all project files, including the revision history. Already have a project repository elsewhere? [Import a repository.](#)

Owner * Roxor-z / Repository name * TareaMetodologia ✓

Great repository names are short and memorable. Need inspiration? How about [expert-funicular?](#)

Description (optional)

☒ **Public**
Anyone on the internet can see this repository. You choose who can commit.

☐ **Private**
You choose who can see and commit to this repository.

Initialize this repository with:

Skip this step if you're importing an existing repository.


☐ **Add a README file**
This is where you can write a long description for your project. [Learn more.](#)

☐ **Add .gitignore**
Choose which files not to track from a list of templates. [Learn more.](#)

☐ **Choose a license**
A license tells others what they can and can't do with your code. [Learn more.](#)

[Create repository](#)

3.

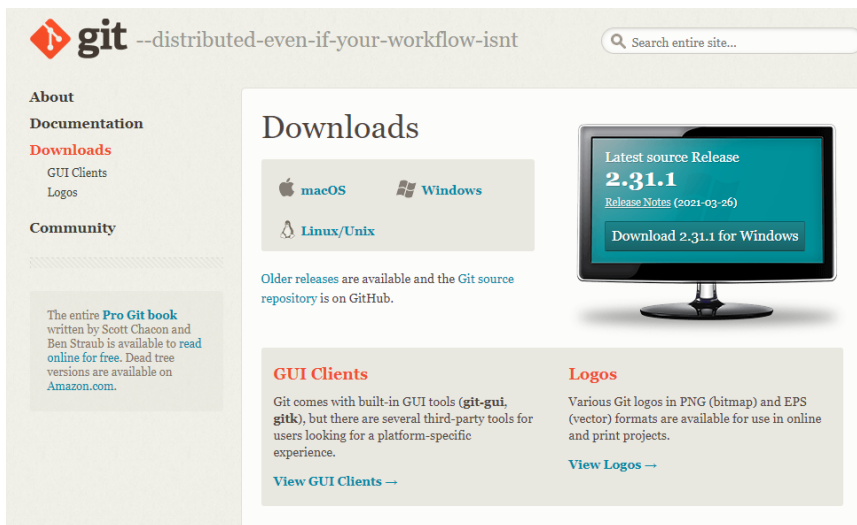

4-9.

```
Rafael@DESKTOP-C2IOABS MINGW64 ~/desktop
$ mkdir proy-ej1

Rafael@DESKTOP-C2IOABS MINGW64 ~/desktop
$ cd proy-ej1

Rafael@DESKTOP-C2IOABS MINGW64 ~/desktop/proy-ej1
$ git --version
git version 2.31.1.windows.1

Rafael@DESKTOP-C2IOABS MINGW64 ~/desktop/proy-ej1
$ git config --list
diff.astextplain.textconv=astextplain
filter.lfs.clean=git-lfs clean -- %f
filter.lfs.smudge=git-lfs smudge -- %f
filter.lfs.process=git-lfs filter-process
filter.lfs.required=true
http.sslbackend=openssl
http.sslcainfo=C:/Program Files/Git/mingw64/ssl/certs/ca-bundle.crt
core.autocrlf=true
core.fscache=true
core.symlinks=false
core.editor=nano.exe
pull.rebase=false
credential.helper=manager-core
credential.https://dev.azure.com.usehttppath=true
init.defaultbranch=master
filter.lfs.smudge=git-lfs smudge -- %f
filter.lfs.process=git-lfs filter-process
filter.lfs.required=true
filter.lfs.clean=git-lfs clean -- %f
user.name=Roxor-z
user.email=rzavalaviguera@gmail.com

Rafael@DESKTOP-C2IOABS MINGW64 ~/desktop/proy-ej1
$ git config --global user.name Roxor-z

Rafael@DESKTOP-C2IOABS MINGW64 ~/desktop/proy-ej1
$ git config --global user.email rzavalaviguera@gmail.com
```

```
Rafael@DESKTOP-C2IOABS MINGW64 ~/desktop/proy-ej1
$ git init
Initialized empty Git repository in C:/Users/Rafael/Desktop/proy-ej1/.git/
```

```
Rafael@DESKTOP-C2IOABS MINGW64 ~/desktop/proy-ej1 (master)
$ echo > codigo.txt

Rafael@DESKTOP-C2IOABS MINGW64 ~/desktop/proy-ej1 (master)
$ git add codigo.txt
warning: LF will be replaced by CRLF in codigo.txt.
The file will have its original line endings in your working directory

Rafael@DESKTOP-C2IOABS MINGW64 ~/desktop/proy-ej1 (master)
$ git commit -m "Archivo de texto"
[master (root-commit) b8aa5f4] Archivo de texto
 1 file changed, 1 insertion(+)
 create mode 100644 codigo.txt

Rafael@DESKTOP-C2IOABS MINGW64 ~/desktop/proy-ej1 (master)
$ git checkout -b primera-rama
Switched to a new branch 'primera-rama'

Rafael@DESKTOP-C2IOABS MINGW64 ~/desktop/proy-ej1 (primera-rama)
$ vi codigo.txt

Rafael@DESKTOP-C2IOABS MINGW64 ~/desktop/proy-ej1 (primera-rama)
$ git checkout master
Switched to branch 'master'
M      codigo.txt

$ git remote add origin https://github.com/Roxor-z/TareaMetodologia.git

Rafael@DESKTOP-C2IOABS MINGW64 ~/desktop/proy-ej1 (master)
$ git push -u origin master
Enumerating objects: 3, done.
Counting objects: 100% (3/3), done.
Writing objects: 100% (3/3), 220 bytes | 220.00 KiB/s, done.
Total 3 (delta 0), reused 0 (delta 0), pack-reused 0
To https://github.com/Roxor-z/TareaMetodologia.git
 * [new branch]      master -> master
Branch 'master' set up to track remote branch 'master' from 'origin'.
```

[illegible]

Roxor-z / TareaMetodologia

[Code](#)
[Issues](#)
[Pull requests](#)
[Actions](#)
[Projects 1](#)
[Wiki](#)
[Security](#)
[Insights](#)
[Settings](#)

master

1 branch

0 tags

[Go to file](#)
[Add file](#)
[Code](#)

Roxor-z Archivo de texto

b8aa5f4 37 minutes ago 1 commit

codigo.txt

Archivo de texto

37 minutes ago

Help people interested in this repository understand your project by adding a README.

Add a README

17-18.

```
Rafael@DESKTOP-C2IOABS MINGW64 ~/desktop/proy-ej1 (master)
$ git checkout primera-rama
Switched to branch 'primera-rama'
Your branch is up to date with 'origin/primera-rama'.

Rafael@DESKTOP-C2IOABS MINGW64 ~/desktop/proy-ej1 (primera-rama)
$ vi codigo.txt

Rafael@DESKTOP-C2IOABS MINGW64 ~/desktop/proy-ej1 (primera-rama)
$ git add codigo.txt

Rafael@DESKTOP-C2IOABS MINGW64 ~/desktop/proy-ej1 (primera-rama)
$ git commit -m "Archivo de texto"
[primera-rama da319bf] Archivo de texto
1 file changed, 1 insertion(+), 1 deletion(-)

Rafael@DESKTOP-C2IOABS MINGW64 ~/desktop/proy-ej1 (primera-rama)
$ git push -u origin primera-rama
Enumerating objects: 5, done.
Counting objects: 100% (5/5), done.
Writing objects: 100% (3/3), 275 bytes | 275.00 KiB/s, done.
Total 3 (delta 0), reused 0 (delta 0), pack-reused 0
To https://github.com/Roxor-z/TareaMetodologia.git
 8b1a471..da319bf primera-rama -> primera-rama
Branch 'primera-rama' set up to track remote branch 'primera-rama' from 'origin'.
```



19.

Open a pull request

Create a new pull request by comparing changes across two branches. If you need to, you can also [compare across forks](#).

base: master ← compare: primera-rama ✓ Able to merge. These branches can be automatically merged.

Archivo de texto

Write Preview

H B I ≡ <> 🔗 ≡ ≡ ☑ @ 📎 ↶

Leave a comment

Attach files by dragging & dropping, selecting or pasting them. 📎

Create pull request

Remember, contributions to this repository should follow our [GitHub Community Guidelines](#).

20-23.

```
Rafael@DESKTOP-C2IOAB5 MINGW64 ~/desktop/proy-ej1 (master)
$ git checkout -b segunda-rama
Switched to a new branch 'segunda-rama'

Rafael@DESKTOP-C2IOAB5 MINGW64 ~/desktop/proy-ej1 (segunda-rama)
$ vi codigo.txt

[2]+  Stopped                  vi codigo.txt

Rafael@DESKTOP-C2IOAB5 MINGW64 ~/desktop/proy-ej1 (segunda-rama)
$ vi codigo.txt

Rafael@DESKTOP-C2IOAB5 MINGW64 ~/desktop/proy-ej1 (segunda-rama)
$ git add codigo.txt
warning: LF will be replaced by CRLF in codigo.txt.
The file will have its original line endings in your working directory

Rafael@DESKTOP-C2IOAB5 MINGW64 ~/desktop/proy-ej1 (segunda-rama)
$ git commit -m "Archivo 2"
[segunda-rama c67fb79] Archivo 2
 1 file changed, 1 insertion(+), 1 deletion(-)

Rafael@DESKTOP-C2IOAB5 MINGW64 ~/desktop/proy-ej1 (segunda-rama)
$ git push -u origin segunda-rama
Enumerating objects: 5, done.
Counting objects: 100% (5/5), done.
Writing objects: 100% (3/3), 266 bytes | 266.00 KiB/s, done.
Total 3 (delta 0), reused 0 (delta 0), pack-reused 0
remote:
remote: Create a pull request for 'segunda-rama' on GitHub by visiting:
remote:   https://github.com/Roxor-z/TareaMetodologia/pull/new/segunda-rama
remote:
To https://github.com/Roxor-z/TareaMetodologia.git
 * [new branch]      segunda-rama -> segunda-rama
Branch 'segunda-rama' set up to track remote branch 'segunda-rama' from 'origin'.
```


21

Modificando archivo lujito de pocos juju

24.

Open a pull request

Create a new pull request by comparing changes across two branches. If you need to, you can also [compare across forks](#).




base: master

←

compare: segunda-rama

✓ Able to merge. These branches can be automatically merged.



segunda rama

Write

Preview

H

B

I

≡

<>

🔗

⋮

⋮

☑

@


🔄

↶

Leave a comment

Attach files by dragging & dropping, selecting or pasting them.

Create pull request

 Remember, contributions to this repository should follow our [GitHub Community Guidelines](#).

25.

```
Rafael@DESKTOP-C2IOABS MINGW64 ~/desktop/proy-ej1 (master)
$ git diff

Rafael@DESKTOP-C2IOABS MINGW64 ~/desktop/proy-ej1 (master)
$ git diff --staged

Rafael@DESKTOP-C2IOABS MINGW64 ~/desktop/proy-ej1 (master)
$ git show HEAD~1 -- codigo.txt
fatal: bad revision 'HEAD~1'

Rafael@DESKTOP-C2IOABS MINGW64 ~/desktop/proy-ej1 (master)
$ git show -1 codigo.txt
commit 58ad7431e78e928e53837b04cb7268fa4d856114 (HEAD -> master, origin/master)
Author: Roxor-z <rzavalaviguera@gmail.com>
Date:   Wed Apr 7 03:27:44 2021 -0400

    Archivo de texto

diff --git a/codigo.txt b/codigo.txt
new file mode 100644
index 00000000..8b13789
--- /dev/null
+++ b/codigo.txt
@@ -0,0 +1 @@
+
```

26.

```
Rafael@DESKTOP-C2IOABS MINGW64 ~
$ cd desktop

Rafael@DESKTOP-C2IOABS MINGW64 ~/desktop
$ mkdir trabajo

Rafael@DESKTOP-C2IOABS MINGW64 ~/desktop
$ git init
Initialized empty Git repository in C:/Users/Rafael/Desktop/.git/

Rafael@DESKTOP-C2IOABS MINGW64 ~/desktop (master)
$ git clone https://github.com/Roxor-z/TareaMetodologia.git
Cloning into 'TareaMetodologia'...
remote: Enumerating objects: 24, done.
remote: Counting objects: 100% (24/24), done.
remote: Compressing objects: 100% (8/8), done.
remote: Total 24 (delta 2), reused 22 (delta 0), pack-reused 0
Receiving objects: 100% (24/24), done.
Resolving deltas: 100% (2/2), done.
```