
Actividad clase 31/03/2021

Raul Espinoza Cornejo

20.590.772-6

```
MINGW64:/c/Users/RaCo/documents/proy-ej1
RaCo@DESKTOP-5PSI28L MINGW64 ~/documents/proy-ej1 (master)
$ copy con codigo.txt
bash: copy: command not found
RaCo@DESKTOP-5PSI28L MINGW64 ~/documents/proy-ej1 (master)
$ notepad codigo.txt
RaCo@DESKTOP-5PSI28L MINGW64 ~/documents/proy-ej1 (master)
$ git add
Nothing specified, nothing added.
hint: Maybe you wanted to say 'git add .'?
hint: Turn this message off by running
hint: "git config advice.addEmptyPathspec false"
RaCo@DESKTOP-5PSI28L MINGW64 ~/documents/proy-ej1 (master)
$ git add codigo.txt
RaCo@DESKTOP-5PSI28L MINGW64 ~/documents/proy-ej1 (master)
$ git commit -m "Agregar archivo de texto
[master (root-commit) 03a0a6a] Agregar archivo de texto
1 file changed, 4 insertions(+)
create mode 100644 codigo.txt
RaCo@DESKTOP-5PSI28L MINGW64 ~/documents/proy-ej1 (master)
$ git checkout -b primera-rama
Switched to a new branch 'primera-rama'
RaCo@DESKTOP-5PSI28L MINGW64 ~/documents/proy-ej1 (primera-rama)
$ git checkout master
Switched to branch 'master'
RaCo@DESKTOP-5PSI28L MINGW64 ~/documents/proy-ej1 (master)
$ git remote add origin https://github.com/RaulEspinozaCornejo/Example.git
RaCo@DESKTOP-5PSI28L MINGW64 ~/documents/proy-ej1 (master)
$ git push -u origin master
Enumerating objects: 3, done.
Counting objects: 100% (3/3), done.
Writing objects: 100% (3/3), 257 bytes | 257.00 KiB/s, done.
Total 3 (delta 0), reused 0 (delta 0), pack-reused 0
To https://github.com/RaulEspinozaCornejo/Example.git
* [new branch] master -> master
Branch 'master' set up to track remote branch 'master' from 'origin'.
RaCo@DESKTOP-5PSI28L MINGW64 ~/documents/proy-ej1 (master)
$ git push -u origin primera-rama
Total 0 (delta 0), reused 0 (delta 0), pack-reused 0
remote:
remote: Create a pull request for 'primera-rama' on GitHub by visiting:
             https://github.com/RaulEspinozaCornejo/Example/pull/new/primera-rama
remote:
remote:
To https://github.com/RaulEspinozaCornejo/Example.git
* [new branch]        primera-rama -> primera-rama    
Branch 'primera-rama' set up to track remote branch 'primera-rama' from 'origin'.
* [new branch]
```

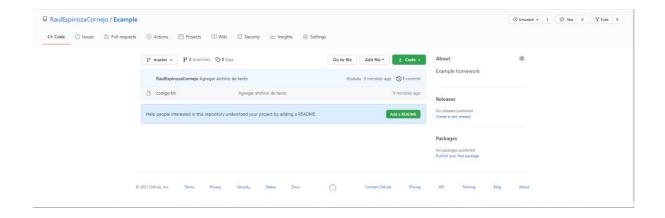

RaCo@DESKTOP-5PSI28L MINGW64 ~/documents/proy-ej1 (master) \$ git merge primera-rama Already up to date.

```
RaCo@DESKTOP-5PSI28L MINGW64 ~/documents/proy-ej1 (master)

$ git add codigo.txt

RaCo@DESKTOP-5PSI28L MINGW64 ~/documents/proy-ej1 (master)

$ git commit "Modificacion codigo.txt"
error: pathspec 'Modificacion codigo.txt' did not match any file(s) known to git

RaCo@DESKTOP-5PSI28L MINGW64 ~/documents/proy-ej1 (master)

$ git commit -m "Modificacion codigo.txt"
[master 9fc4ef0] Modificacion codigo.txt

1 file changed, 3 insertions(+), 1 deletion(-)
```

```
RaCo@DESKTOP-5PSI28L MINGW64 ~/documents/proy-ej1 (master)

$ git push -u origin primera-rama
Everything up-to-date
Branch 'primera-rama' set up to track remote branch 'primera-rama' from 'origin'.


RaCo@DESKTOP-5PSI28L MINGW64 ~/documents/proy-ej1 (master)

$ git push -u origin master
Enumerating objects: 5, done.
Counting objects: 100% (5/5), done.
Delta compression using up to 6 threads
Compressing objects: 100% (2/2), done.
Writing objects: 100% (3/3), 321 bytes | 321.00 KiB/s, done.
Total 3 (delta 0), reused 0 (delta 0), pack-reused 0
To https://github.com/RaulEspinozaCornejo/Example.git
    03a0a6a..9fc4ef0 master -> master
Branch 'master' set up to track remote branch 'master' from 'origin'.
```

```
RaCo@DESKTOP-5PSI28L MINGW64 ~/documents/proy-ej1 (master)
$ git checkout -b segunda-rama
Switched to a new branch 'segunda-rama'
```

RaCo@DESKTOP-5PSI28L MINGW64 ~/documents/proy-ej1 \$ notepad codigo.txt

```
RaCo@DESKTOP-5PSI28L MINGW64 ~/documents/proy-ej1 (segunda-rama)
$ git add codigo.txt
RaCo@DESKTOP-5PSI28L MINGW64 ~/documents/proy-ej1 (segunda-rama)
$ git commit -m "Segundo cambio codigo.txt"
[segunda-rama 4f83e1e] Segundo cambio codigo.txt
1 file changed, 3 insertions(+), 1 deletion(-)
RaCo@DESKTOP-5PSI28L MINGW64 ~/documents/proy-ej1 (segunda-rama)
$ git push -u origin segunda-rama
Enumerating objects: 5, done.
Counting objects: 100% (5/5), done.
Delta compression using up to 6 threads
Compressing objects: 100% (2/2), done.
Writing objects: 100% (3/3), 332 bytes | 332.00 KiB/s, done.
Total 3 (delta 0), reused 0 (delta 0), pack-reused 0
remote:
remote: Create a pull request for 'segunda-rama' on GitHub by visiting:
             https://github.com/RaulEspinozaCornejo/Example/pull/new/segunda-rama
remote:
To https://github.com/RaulEspinozaCornejo/Example.git
* [new branch]
                     segunda-rama -> segunda-rama
Branch 'segunda-rama' set up to track remote branch 'segunda-rama' from 'origin'.
```

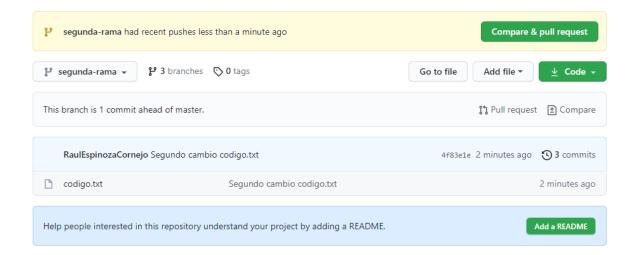

```
RaCo@DESKTOP-5PSI28L MINGW64 ~/documents/proy-ej1 (segunda-rama)
$ git checkout master
Switched to branch 'master'
Your branch is up to date with 'origin/master'.

RaCo@DESKTOP-5PSI28L MINGW64 ~/documents/proy-ej1 (master)
$ git merge segunda-rama
Updating 9fc4ef0..4f83e1e
Fast-forward
codigo.txt | 4 +++-
1 file changed, 3 insertions(+), 1 deletion(-)
```

```
MINGW64:/c/Users/RaCo/documents/proy-ej1
 RaCo@DESKTOP-5PSI28L MINGW64 ~/documents/proy-ej1 (master)
$ git diff
RaCo@DESKTOP-5PSI28L MINGW64 ~/documents/proy-ej1 (master)
$ git diff --staged
$ git show HEAD~1 --codigo.txt
fatal: unrecognized argument: --codigo.txt
$ git show HEAD~1 codigo.txt
                              3723854616ec39af400b (origin/master)
Author: RaulEspinozaCornejo <unconfigured@null.spigotmc.org>
Date: Wed Mar 31 11:25:05 2021 -0300
    Modificacion codigo.txt
diff --git a/codigo.txt b/codigo.txt
index c0e189f..f7f2fbe 100644
 --- a/codigo.txt
+++ b/codigo.txt
 00 -1,4 +1,6 00
 Este
 un
 No newline at end of file
 No newline at end of file
$ git show -1 codigo.txt
 ommit 4f83e1e19c8a7100e158847973cd018cf465f175 (HEAD -> master, origin/segunda-rama, segunda-rama)
Author: RaulEspinozaCornejo <unconfigured@null.spigotmc.org>
Date: Wed Mar 31 11:32:42 2021 -0300
    Segundo cambio codigo.txt
diff --git a/codigo.txt b/codigo.txt
index f7f2fbe..ab69bb9 100644
 --- a/codigo.txt
+++ b/codigo.txt
 00 -3,4 +3,6 00 es
 un
 ejemplo
 No newline at end of file
 No newline at end of file
```

```
RaCo@DESKTOP-5PSI28L MINGW64 ~/documents/proy-ej1 (master)
$ cd ..
RaCo@DESKTOP-5PSI28L MINGW64 ~/documents
$ mkdir proy-ej2
RaCo@DESKTOP-5PSI28L MINGW64 ~/documents
$ cd proy-ej2
RaCo@DESKTOP-5PSI28L MINGW64 ~/documents/proy-ej2
$ git clone https://github.com/RaulEspinozaCornejo/Example.git
Cloning into 'Example'...
remote: Enumerating objects: 9, done.
remote: Counting objects: 100% (9/9), done.
remote: Compressing objects: 100% (5/5), done.
remote: Total 9 (delta 1), reused 8 (delta 0), pack-reused 0
Receiving objects: 100% (9/9), done.
Resolving deltas: 100% (1/1), done.
RaCo@DESKTOP-5PSI28L MINGW64 ~/documents/proy-ej2
$ ls
Example/
```