

Allure


Test Report

Test Session Summary

Start: Tue Jun 8 01:49:15 2021
End: Tue Jun 8 01:50:16 2021
Duration: 0:01:00.732000

broken: 0 (0.00%)
failed: 9 (23.08%)
skipped: 0 (0.00%)
passed: 30 (76.92%)

- broken
- failed
- skipped
- passed

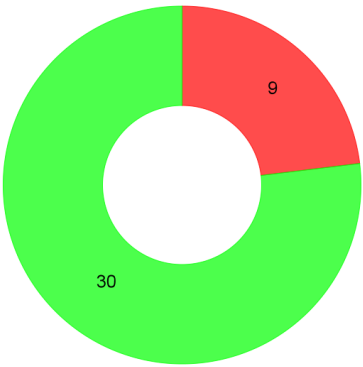

Test Results

Right-click to update field.

Add user with already existed email - failed

No description available.

Details

AssertionError: assert 210 == 400

```
self = <test_api.TestAPI object at 0x7fa30267e370>
userdata = {'email': 'qwe@mail.ru', 'pass_repeat': 'ycjcycl', 'password': 'ycjcycl',
'username': 'vrivzqm'}

    @allure.epic('API tests')
    @allure.feature('User adding')
    @allure.title('Add user with already existed email')
    @pytest.mark.API
    def test_add_user_with_exists_email(self, userdata):
        headers = {'Content-Type': 'application/json'}
        userdata['email'] = test_settings.ADMIN_EMAIL
        response = self.client.request(
            '/api/add_user',
            'POST',
            headers=headers,
            data=userdata
        )
        assert userdata['username'] not in self.mysql_builder.get_users()
>     assert response['status_code'] == 400
E     assert 210 == 400

tests/test_api.py:93: AssertionError
```

Test Setup

[Fixture] userdata

[Fixture] mysql_client

[Fixture] setup

[Fixture] auth_socket_client

[Fixture] mysql_builder

Test Body

No test body information available.

Test Teardown

[Fixture] mysql_client::0

Add user with invalid email - failed

No description available.

Parameters

[illegible]

Details

AssertionError: assert 210 == 400

[illegible]

Test Setup

[Fixture] mysql_client

[Fixture] userdata

[Fixture] setup

[Fixture] mysql_builder

[Fixture] auth_socket_client

Test Body

No test body information available.

Test Teardown

```
[Fixture] mysql_client::0
```

No description available.

invalid_pass:

Details

[illegible]

```
tests/test_api.py:60: AssertionError
```

[Fixture] mysql_client

[Fixture] userdata

[Fixture] setup

[Fixture] mysql builder

```
[Fixture] auth socket client
```

No test body information available.

```
[Fixture] mysql_client::0
```

Add user with invalid username - failed

No description available.

Parameters

invalid_username: 'qqqqqqqqqqqqqqqqqq'

Details

AssertionError: assert 210 == 400

```
self = <test_api.TestAPI object at 0x7f431fe54b20>
userdata = {'email': 'ovqkeuo@gmail.com', 'pass_repeat': 'mlstrkx', 'password': 'mlstrkx',
'username': 'qqqqqqqqqqqqqqqqqq'}
invalid_username = 'qqqqqqqqqqqqqqqqqq'

    @allure.epic('API tests')
    @allure.feature('User adding')
    @allure.title('Add user with invalid username')
    @pytest.mark.API
    @pytest.mark.parametrize('invalid_username', ['', '11', 'q' * 17])
    def test_add_user_with_invalid_name(self, userdata, invalid_username):
        headers = {'Content-Type': 'application/json'}
        userdata['username'] = invalid_username
        response = self.client.request(
            '/api/add_user',
            'POST',
            headers=headers,
            data=userdata
        )
        assert userdata['username'] not in self.mysql_builder.get_users()
>       assert response['status_code'] == 400
E       assert 210 == 400

tests/test_api.py:43: AssertionError
```

Test Setup

[Fixture] auth_socket_client

[Fixture] mysql_client

[Fixture] setup

[Fixture] userdata

[Fixture] mysql_builder

Test Body

No test body information available.

Test Teardown

[Fixture] mysql_client::0

Add user with valid data - failed

No description available.

Details

AssertionError: assert 210 == 201

```
self = <test_api.TestAPI object at 0x7f16105291c0>
userdata = {'email': 'gevubds@gmail.com', 'pass_repeat': 'uicfbne', 'password': 'uicfbne',
'username': 'tbzfcnf'}

    @allure.epic('API tests')
    @allure.feature('User adding')
    @allure.title('Add user with valid data')
    @pytest.mark.API
    def test_add_user(self, userdata):
        headers = {'Content-Type': 'application/json'}
        response = self.client.request(
            '/api/add_user',
            'POST',
            headers=headers,
            data=userdata
        )
        assert userdata['username'] in self.mysql_builder.get_users()
>       assert response['status_code'] == 201
E       assert 210 == 201

tests/test_api.py:26: AssertionError
```

Test Setup

[Fixture] mysql_client

[Fixture] userdata

[Fixture] setup

[Fixture] mysql_builder

[Fixture] auth_socket_client

Test Body

No test body information available.

Test Teardown

[Fixture] mysql_client::0

Check vk api on page - failed

No description available.

Details

```
AssertionError: assert 'VK ID: 0' in '<html class="uk-notouch"><head>\n  <meta charset="UTF-8">\n  <meta http-equiv="Content-Type" content="text/html; ...owered by TEXHOATOM</p>\n  <p>Simple is better than complex</p>\n</div>\n  </footer>\n  \n</body></html>'\n+ where '<html class="uk-notouch"><head>\n  <meta charset="UTF-8">\n  <meta http-equiv="Content-Type" content="text/html; ...owered by TEXHOATOM</p>\n  <p>Simple is better than complex</p>\n</div>\n  </footer>\n  \n</body></html>'\n= <selenium.webdriver.remote.webdriver.WebDriver (session="c50edc8f43800e948e5fd3c5ba10c37c")>.page_source\n+ where <selenium.webdriver.remote.webdriver.WebDriver (session="c50edc8f43800e948e5fd3c5ba10c37c")> = <test_ui.TestMainPage object at 0x7fa30263e910>.driver
```

```
self = <test_ui.TestMainPage object at 0x7fa30263e910>

    @allure.epic('UI tests')
    @allure.feature('Main page')
    @allure.title('Check vk api on page')
    @pytest.mark.UI
    def test_vk_id_appear(self):
>         assert 'VK ID: 0' in self.driver.page_source
E         assert 'VK ID: 0' in '<html class="uk-notouch"><head>\n  <meta charset="UTF-8">\n  <meta http-equiv="Content-Type" content="text/html; ...owered by TEXHOATOM</p>\n  <p>Simple is better than complex</p>\n</div>\n  </footer>\n  \n</body></html>'\n+ where '<html class="uk-notouch"><head>\n  <meta charset="UTF-8">\n  <meta http-equiv="Content-Type" content="text/html; ...owered by TEXHOATOM</p>\n  <p>Simple is better than complex</p>\n</div>\n  </footer>\n  \n</body></html>'\n= <selenium.webdriver.remote.webdriver.WebDriver (session="c50edc8f43800e948e5fd3c5ba10c37c")>.page_source\n+ where <selenium.webdriver.remote.webdriver.WebDriver (session="c50edc8f43800e948e5fd3c5ba10c37c")> = <test_ui.TestMainPage object at 0x7fa30263e910>.driver

tests/test_ui.py:256: AssertionError
```

Test Setup

[Fixture] setup

[Fixture] screenshot_on_failure

[Fixture] mysql_client

[Fixture] config

[Fixture] driver

[Fixture] auth_socket_client

[Fixture] mysql_builder


Test Body

[Attachment] stdout

Test Teardown

[Fixture] screenshot_on_failure::0

[Attachment] screenshot

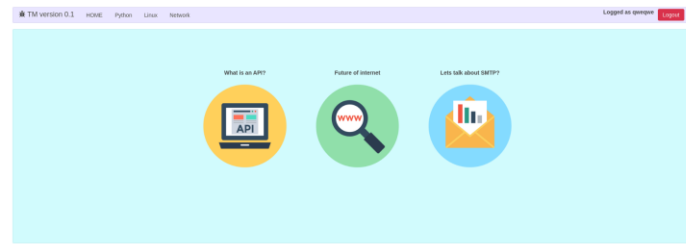

[Fixture] mysql_client::0

[Fixture] driver::0

Go to centos page - failed

No description available.

Details

AssertionError: assert 'Centos7' in 'Загрузить Fedora Workstation'

+ where 'Загрузить Fedora Workstation' = <selenium.webdriver.remote.webdriver.WebDriver (session="7817a3b22621e95840ba8f02a78946d7")>.title
+ where <selenium.webdriver.remote.webdriver.WebDriver (session="7817a3b22621e95840ba8f02a78946d7")> = <test_ui.TestMainPage object at 0x7f1123b0dd00>.driver

```
self = <test_ui.TestMainPage object at 0x7f1123b0dd00>
    @allure.epic('UI tests')
    @allure.feature('Main page')
    @allure.title('Go to centos page')
    @pytest.mark.UI
    def test_go_to_centos(self):
        self.account_page.go_to_centos()
        self.driver.switch_to.window(self.driver.window_handles[-1])
>       assert 'Centos7' in self.driver.title
E       assert 'Centos7' in 'Загрузить Fedora Workstation'
E       + where 'Загрузить Fedora Workstation' =
<selenium.webdriver.remote.webdriver.WebDriver
(session="7817a3b22621e95840ba8f02a78946d7")>.title
E       + where <selenium.webdriver.remote.webdriver.WebDriver
(session="7817a3b22621e95840ba8f02a78946d7")> = <test_ui.TestMainPage object at
0x7f1123b0dd00>.driver

tests/test_ui.py:219: AssertionError
```

Test Setup

[Fixture] auth_socket_client

[Fixture] driver

[Fixture] screenshot_on_failure

[Fixture] setup

[Fixture] mysql_client

[Fixture] mysql_builder

[Fixture] config

Test Body


[Attachment] stdout

Test Teardown

[Fixture] driver::0

[Fixture] screenshot_on_failure::0

[Attachment] screenshot

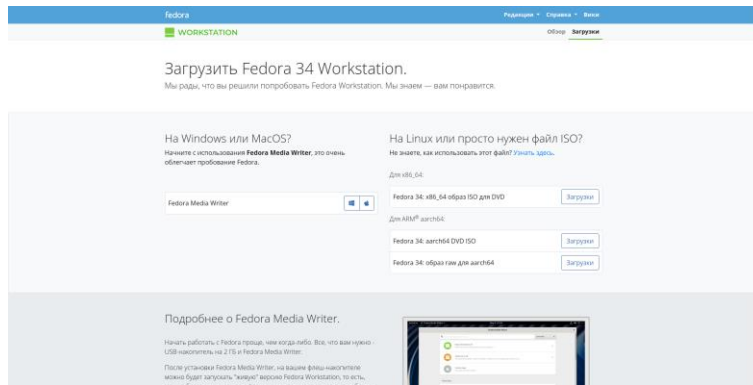

[Fixture] mysql_client::0

Try to register with already existed email - failed

No description available.

Details

```
AssertionError: assert 'Passwords must match' in '<html lang="en"><head>\n  <meta charset="UTF-8">\n  <meta http-equiv="Content-Type" content="text/html; charset=u.../form>\n    </div>\n    </div>\n  </div>\n  </div>\n</div>\n\n</body></html>'\n+ where '<html lang="en"><head>\n  <meta charset="UTF-8">\n  <meta http-equiv="Content-Type" content="text/html; charset=u.../form>\n    </div>\n    </div>\n  </div>\n  </div>\n</div>\n\n</body></html>' = <selenium.webdriver.remote.webdriver.WebDriver (session="e2ba3bcd10ba7feb94fafabeb39d186a")>.page_source\n+ where <selenium.webdriver.remote.webdriver.WebDriver (session="e2ba3bcd10ba7feb94fafabeb39d186a")> = <test_ui.TestRegistration object at 0x7f1610272610>.driver
```

```
self = <test_ui.TestRegistration object at 0x7f1610272610>
userdata = {'email': 'dwe@mail.ru', 'pass_repeat': 'lvsjjor', 'password': 'lvsjjor', 'username': 'zwnliui'}

    @allure.epic('UI tests')
    @allure.feature('Registration')
    @allure.title('Try to register with already existed email')
    @pytest.mark.UI
    def test_doubled_email(self, userdata):
        userdata['email'] = test_settings.ADMIN_EMAIL
        self.registration_page.register(userdata)
>       assert f'Passwords must match' in self.driver.page_source
E       assert 'Passwords must match' in '<html lang="en"><head>\n  <meta charset="UTF-8">\n  <meta http-equiv="Content-Type" content="text/html; charset=u.../form>\n    </div>\n    </div>\n  </div>\n  </div>\n</div>\n\n</body></html>'\n+ where '<html lang="en"><head>\n  <meta charset="UTF-8">\n  <meta http-equiv="Content-Type" content="text/html; charset=u.../form>\n    </div>\n    </div>\n  </div>\n  </div>\n</div>\n\n</body></html>' =\n<selenium.webdriver.remote.webdriver.WebDriver (session="e2ba3bcd10ba7feb94fafabeb39d186a")>.page_source\n+ where <selenium.webdriver.remote.webdriver.WebDriver (session="e2ba3bcd10ba7feb94fafabeb39d186a")> = <test_ui.TestRegistration object at 0x7f1610272610>.driver

tests/test_ui.py:89: AssertionError
```

Test Setup

[Fixture] mysql_client

[Fixture] driver

[Fixture] setup

[Fixture] userdata

[Fixture] mysql_builder

[Fixture] config

[Fixture] screenshot_on_failure

[Fixture] auth_socket_client

Test Body

[Attachment] stdout


Test Teardown

[Fixture] mysql_client::0

[Fixture] driver::0

[Fixture] screenshot_on_failure::0

[Attachment] screenshot



A screenshot of a web registration form titled "Registration". The form is centered on a light gray background. It contains the following elements:

- A text input field for "username" with the placeholder text "username".
- A text input field for "email" with the placeholder text "qqq@ma.ru".
- A text input field for "password".
- A text input field for "Repeat password".
- A checkbox labeled "I accept that I want to be a USER".
- A blue button labeled "REGISTER".
- A link labeled "Already have an account? Login".
- A red button labeled "Internal Server Error".

Try to register with too long password - failed

No description available.

Details

```
AssertionError: assert 'Incorrect password length' in '<html lang="en"><head>\n  <meta charset="UTF-8">\n<meta http-equiv="Content-Type" content="text/html; charset=u.../form>\n      \n    </div>\n    </div>\n</div>\n  </div>\n  </div>\n</div>\n\n\n</body></html>'\n+   where 'Incorrect password length' = selenium.webdriver.remote.webdriver.WebDriver\n(session="e14ad585aca50ec7dc029a2b4b93ade1").page_source\n+   where selenium.webdriver.remote.webdriver.WebDriver\n(session="e14ad585aca50ec7dc029a2b4b93ade1") = <test_ui.TestRegistration object at\n0x7f431fd65eb0>.driver
```

[illegible]

Test Setup

[Fixture] auth_socket_client

```
[Fixture] mysql client
```

[Fixture] setup

[Fixture] config

```
[Fixture] userdata
```

[Fixture] screenshot_on_failure

[Fixture] mysql_builder

[Fixture] driver

Test Body

[Attachment] stdout

Test Teardown

```
[Fixture] mysql_client::0
```

[Fixture] screenshot_on_failure::0

[Attachment] screenshot

Registration

mgqeth

yo@yoa@gmail.com

Password

Repeat password

☒ I accept that I want to be a IDEY

REGISTER

Already have an account? [Log in](#)

Passwords must match

[Fixture] driver::0

Add user with already existed username - passed

No description available.

Test Setup

[Fixture] auth_socket_client

[Fixture] mysql_client

[Fixture] setup

[Fixture] mysql_builder

[Fixture] userdata

Test Body

No test body information available.

Test Teardown

[Fixture] mysql_client::0

Block already blocked user - passed

No description available.

Test Setup

[Fixture] mysql_client

[Fixture] setup

[Fixture] auth_socket_client

[Fixture] blocked_user

[Fixture] userdata

[Fixture] mysql_builder

Test Body

No test body information available.

Test Teardown

[Fixture] mysql_client::0

Block unblocked user - passed

No description available.

Test Setup

[Fixture] added_user

[Fixture] mysql_client

[Fixture] setup

[Fixture] auth_socket_client

[Fixture] mysql_builder

[Fixture] userdata

Test Body

No test body information available.

Test Teardown

[Fixture] mysql_client::0

Delete existed user - passed

No description available.

Test Setup

[Fixture] auth_socket_client

[Fixture] mysql_client

[Fixture] setup

[Fixture] added_user

[Fixture] mysql_builder

[Fixture] userdata

Test Body

No test body information available.

Test Teardown

[Fixture] mysql_client::0

Delete unexisted user - passed

No description available.

Test Setup

[Fixture] auth_socket_client

[Fixture] mysql_client

[Fixture] setup

[Fixture] mysql_builder

Test Body

No test body information available.

Test Teardown

[Fixture] mysql_client::0

Go to SMTP page - passed

No description available.

Test Setup

[Fixture] auth_socket_client

[Fixture] setup

[Fixture] driver

[Fixture] mysql_client

[Fixture] mysql_builder

[Fixture] screenshot_on_failure

[Fixture] config

Test Body

[Attachment] stdout

Test Teardown

[Fixture] driver::0

[Fixture] mysql_client::0

[Fixture] screenshot_on_failure::0

Go to api page - passed

No description available.

Test Setup

[Fixture] screenshot_on_failure

[Fixture] mysql_client

[Fixture] setup

[Fixture] auth_socket_client

[Fixture] config

[Fixture] mysql_builder

[Fixture] driver

Test Body

[Attachment] stdout

Test Teardown

[Fixture] screenshot_on_failure::0

[Fixture] mysql_client::0

[Fixture] driver::0

Go to download page - passed

No description available.

Test Setup

[Fixture] auth_socket_client

[Fixture] mysql_client

[Fixture] driver

[Fixture] setup

[Fixture] config

[Fixture] mysql_builder

[Fixture] screenshot_on_failure

Test Body

[Attachment] stdout

Test Teardown

[Fixture] mysql_client::0

[Fixture] driver::0

[Fixture] screenshot_on_failure::0

Go to examples page - passed

No description available.

Test Setup

[Fixture] mysql_client

[Fixture] setup

[Fixture] auth_socket_client

[Fixture] screenshot_on_failure

[Fixture] config

[Fixture] mysql_builder

[Fixture] driver

Test Body

[Attachment] stdout

Test Teardown

[Fixture] mysql_client::0

[Fixture] screenshot_on_failure::0

[Fixture] driver::0

Go to flask page - passed

No description available.

Test Setup

[Fixture] mysql_client

[Fixture] setup

[Fixture] driver

[Fixture] mysql_builder

[Fixture] config

[Fixture] auth_socket_client

[Fixture] screenshot_on_failure

Test Body

[Attachment] stdout

Test Teardown

[Fixture] mysql_client::0

[Fixture] driver::0

[Fixture] screenshot_on_failure::0

Go to home page - passed

No description available.

Test Setup

[Fixture] driver

[Fixture] screenshot_on_failure

[Fixture] mysql_client

[Fixture] config

[Fixture] setup

[Fixture] auth_socket_client

[Fixture] mysql_builder

Test Body

[Attachment] stdout

Test Teardown

[Fixture] driver::0

[Fixture] screenshot_on_failure::0

[Fixture] mysql_client::0

Go to internet page - passed

No description available.

Test Setup

[Fixture] mysql_client

[Fixture] setup

[Fixture] driver

[Fixture] screenshot_on_failure

[Fixture] mysql_builder

[Fixture] config

[Fixture] auth_socket_client

Test Body

[Attachment] stdout

Test Teardown

[Fixture] mysql_client::0

[Fixture] driver::0

[Fixture] screenshot_on_failure::0

Go to login page - passed

No description available.

Test Setup

[Fixture] setup

[Fixture] screenshot_on_failure

[Fixture] driver

[Fixture] mysql_client

[Fixture] config

[Fixture] auth_socket_client

[Fixture] mysql_builder

Test Body

[Attachment] stdout

Test Teardown

[Fixture] screenshot_on_failure::0

[Fixture] driver::0

[Fixture] mysql_client::0

Go to news page - passed

No description available.

Test Setup

[Fixture] screenshot_on_failure

[Fixture] driver

[Fixture] setup

[Fixture] mysql_client

[Fixture] config

[Fixture] auth_socket_client

[Fixture] mysql_builder

Test Body

[Attachment] stdout

Test Teardown

[Fixture] screenshot_on_failure::0

[Fixture] driver::0

[Fixture] mysql_client::0

Go to python history page - passed

No description available.

Test Setup

[Fixture] mysql_client

[Fixture] setup

[Fixture] driver

[Fixture] auth_socket_client

[Fixture] config

[Fixture] mysql_builder

[Fixture] screenshot_on_failure

Test Body

[Attachment] stdout

Test Teardown

[Fixture] mysql_client::0

[Fixture] driver::0

[Fixture] screenshot_on_failure::0

[Go to python page - passed](#)

No description available.

Test Setup

[Fixture] auth_socket_client

[Fixture] mysql_client

[Fixture] config

[Fixture] driver

[Fixture] screenshot_on_failure

[Fixture] mysql_builder

[Fixture] setup

Test Body

[Attachment] stdout

Test Teardown

[Fixture] mysql_client::0

[Fixture] driver::0

[Fixture] screenshot_on_failure::0

Try to auth with correct data - passed

No description available.

Test Setup

[Fixture] auth_socket_client

[Fixture] driver

[Fixture] setup

[Fixture] mysql_client

[Fixture] screenshot_on_failure

[Fixture] mysql_builder

[Fixture] config

Test Body

[Attachment] stdout

Test Teardown

[Fixture] driver::0

[Fixture] mysql_client::0

[Fixture] screenshot_on_failure::0

Try to auth with incorrect login - passed

No description available.

Test Setup

[Fixture] driver

[Fixture] setup

[Fixture] screenshot_on_failure

[Fixture] mysql_client

[Fixture] random_string

[Fixture] config

[Fixture] auth_socket_client

[Fixture] mysql_builder

Test Body

[Attachment] stdout

Test Teardown

[Fixture] driver::0

[Fixture] screenshot_on_failure::0

[Fixture] mysql_client::0

Try to auth with incorrect password - passed

No description available.

Test Setup

[Fixture] random_string

[Fixture] screenshot_on_failure

[Fixture] driver

[Fixture] mysql_client

[Fixture] config

[Fixture] setup

[Fixture] auth_socket_client

[Fixture] mysql_builder

Test Body

[Attachment] stdout

Test Teardown

[Fixture] screenshot_on_failure::0

[Fixture] driver::0

[Fixture] mysql_client::0

Try to login - passed

No description available.

Test Setup

[Fixture] auth_socket_client

[Fixture] setup

[Fixture] socket_client

[Fixture] mysql_client

[Fixture] mysql_builder

Test Body

No test body information available.

Test Teardown

[Fixture] mysql_client::0

Try to obtain app status - passed

No description available.

Test Setup

[Fixture] auth_socket_client

[Fixture] mysql_client

[Fixture] setup

[Fixture] mysql_builder

Test Body

No test body information available.

Test Teardown

[Fixture] mysql_client::0

Try to register with correct data - passed

No description available.

Test Setup

[Fixture] auth_socket_client

[Fixture] driver

[Fixture] screenshot_on_failure

[Fixture] mysql_client

[Fixture] setup

[Fixture] mysql_builder

[Fixture] userdata

[Fixture] config

Test Body

[Attachment] stdout

Test Teardown

[Fixture] driver::0

[Fixture] screenshot_on_failure::0

[Fixture] mysql_client::0

Try to register with different password and confirmation - passed

No description available.

Test Setup

[Fixture] setup

[Fixture] auth_socket_client

[Fixture] mysql_client

[Fixture] userdata

[Fixture] random_string

[Fixture] driver

[Fixture] config

[Fixture] screenshot_on_failure

[Fixture] mysql_builder

Test Body

[Attachment] stdout

Test Teardown

[Fixture] mysql_client::0

[Fixture] driver::0

[Fixture] screenshot_on_failure::0

Try to register with empty required fields - passed

No description available.

Parameters

empty_field: 'pass_repeat'

Test Setup

[Fixture] auth_socket_client

[Fixture] mysql_client

[Fixture] driver

[Fixture] config

[Fixture] userdata

[Fixture] screenshot_on_failure

[Fixture] setup

[Fixture] mysql_builder

Test Body

[Attachment] stdout

Test Teardown

[Fixture] mysql_client::0

[Fixture] driver::0

[Fixture] screenshot_on_failure::0

Try to register with incorrect email - passed

No description available.

Parameters

invalid_email: '.qwe@mail.ru'

Test Setup

[Fixture] userdata

[Fixture] mysql_client

[Fixture] screenshot_on_failure

[Fixture] driver

[Fixture] auth_socket_client

[Fixture] config

[Fixture] setup

[Fixture] mysql_builder

Test Body

[Attachment] stdout

Test Teardown

[Fixture] mysql_client::0

[Fixture] screenshot_on_failure::0

[Fixture] driver::0

Try to register with invalid email length - passed

No description available.

Parameters

```
invalid_email: 'qqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqq'
```

Test Setup

[Fixture] mysql_client

[Fixture] setup

[Fixture] driver

[Fixture] userdata

[Fixture] screenshot_on_failure

```
[Fixture] mysql_builder
```

[Fixture] config

[Fixture] auth_socket_client

Test Body

[Attachment] stdout

Test Teardown

```
[Fixture] mysql_client::0
```

```
[Fixture] driver::0
```

```
[Fixture] screenshot_on_failure::0
```


Try to register with invalid username - passed

No description available.

Parameters

invalid_username: '11'

Test Setup

[Fixture] auth_socket_client

[Fixture] mysql_client

[Fixture] mysql_builder

[Fixture] setup

[Fixture] userdata

[Fixture] config

[Fixture] driver

[Fixture] screenshot_on_failure

Test Body

[Attachment] stdout

Test Teardown

[Fixture] mysql_client::0

[Fixture] driver::0

[Fixture] screenshot_on_failure::0

Try to register without accept - passed

No description available.

Test Setup

[Fixture] userdata

[Fixture] setup

[Fixture] driver

[Fixture] mysql_client

[Fixture] screenshot_on_failure

[Fixture] config

[Fixture] auth_socket_client

[Fixture] mysql_builder

Test Body

[Attachment] stdout

Test Teardown

[Fixture] driver::0

[Fixture] mysql_client::0

[Fixture] screenshot_on_failure::0

Unlock blocked user - passed

No description available.

Test Setup

[Fixture] mysql_client

[Fixture] setup

[Fixture] blocked_user

[Fixture] userdata

[Fixture] mysql_builder

[Fixture] auth_socket_client

Test Body

[Attachment] stdout

Test Teardown

[Fixture] mysql_client::0

Unlock unblocked user - passed

No description available.

Test Setup

[Fixture] mysql_client

[Fixture] userdata

[Fixture] added_user

[Fixture] mysql_builder

[Fixture] auth_socket_client

[Fixture] setup

Test Body

No test body information available.

Test Teardown

[Fixture] mysql_client::0