

13. what are the different types of lists in html?

There are 3 types of lists in html

1. unordered list()
2. ordered list()
3. descriptive list(<dl>)

2. what are the core components of html?

The core components of html is

1. tags
2. attributes
3. elements

1. What is the difference between HTML5 and previous versions of HTML?

HTML5 are simple and concise used in html and previous versions are long and complex used in html

11. What is html table? and structure?

Html means means to create the data or some information in table form

The structure of html table has shown in below

```
<table>
<tr>
<td></td>
</tr>
</table>
```

3. Write down the structure of a html ?

```
<!DOCTYPE html>
<html lang="en">
  <head> <meta charset="UTF-8">
<title>Page Title</title>
  </head>
<body>
  <h1>Visible Heading</h1>
  <p>Visible paragraph content goes here.</p>
</body>
```

4. what is meant by attribute? types

Attribute is a special keyword or element used in inside the open tags

Types of attributes has shown in below

1. optional attribute
2. required attribute

5. Different b/w global and specific attributes?

The difference between global and specific attributes

Global attributes work on all html elements and specific attributes work only on specific html elements

6. what is an element and its types

A fully building block made with start tag ,content tag and an end tag

The types of elements has shown in below

1.heading

2.paragraph

3.button

7. Different b/w inline and block level?

Inline will do not start on a new line

Block level will start on a new line

8.difference between inline and inline block?

Inline: Flows with text and ignores top and bottom margins, padding, and height/width settings.

Inline-block: Flows with text like an inline element, but allows you to set a custom width, height, and proper margins and padding. [[1](#), [2](#), [3](#), [4](#), [5](#)]

9. What is meant by src , alt in image tag?

src(source):provides a specific exact file or web URL to display the image

alt(alternative):provides with some text or description to display the image

10.difference between absolute and relative path?

Absolute:includes full website address

Relative path:Points to a file based on where the current page is stored

14. How can we change the number type in the list ?

In list we can change the number type using start and type attributes

12. How can we remove double borders for a table?

Using border collapse: collapse;

15.why is the video and audio are a paired tag

They have an opening tag and a closing tag (like `<video>...</video>`) because they hold source sub-tags (`<source>`), text content for old browsers, or media controls. [[1](#), [2](#), [3](#), [4](#)]

Section B

18. Why is the video and audio tag a paired tag?

The main reason for audio and video tags are a paired tags because has shown in below

Audio tag: this can be used for to display the audio

1.audio tag is a multimedia tag

2.audio tag has opening tag and closing tag like`<audio></audio>`

3.audio tag hold in subtags(`<source>`)

4.audio tag is the text content for old browsers or media controls

Video tag; this can be used for todisplay the video

1.video tag is a multimedia tag

2.video tag has opening and closing tag like(`<video></video>`)

3.video tag holds in subtag(`<source>`)

4.video tags has the text content for old browsers and media controls

The `<video>` and `<audio>` tags are paired tags (requiring both an opening and a closing tag) for two critical reasons:

- **Fallback Content:** The space between the opening and closing tags holds text or HTML. This content displays only if the user's browser is outdated and does not support the media tags.
- **Multiple Source Options:** They act as container tags. They hold multiple child `<source>` tags inside them, allowing the browser to choose the first media format it supports (like MP4 vs WebM).


16.what are the features of html

HTML (HyperText Markup Language) is the standard language used to create web pages. Its key features include:

- **Platform Independent:** Works seamlessly across all operating systems like Windows, Mac, and Linux.
- **Easy to Learn:** Uses a simple, tag-based syntax that is highly intuitive for beginners.
- **Hypertext Support:** Allows linking of different web pages or sections using anchor tags.
- **Multimedia Support:** Enables seamless integration of images, audio, video, and graphics.
- **SEO Friendly:** Uses semantic tags that help search engines understand page structure easily.
- **Extensible:** Integrates smoothly with styling languages (CSS) and scripting languages (JavaScript).


17. Create a webpage with three anchor tags and corresponding sections below them, such that clicking any link navigates to its respective section within the same page.

Code:

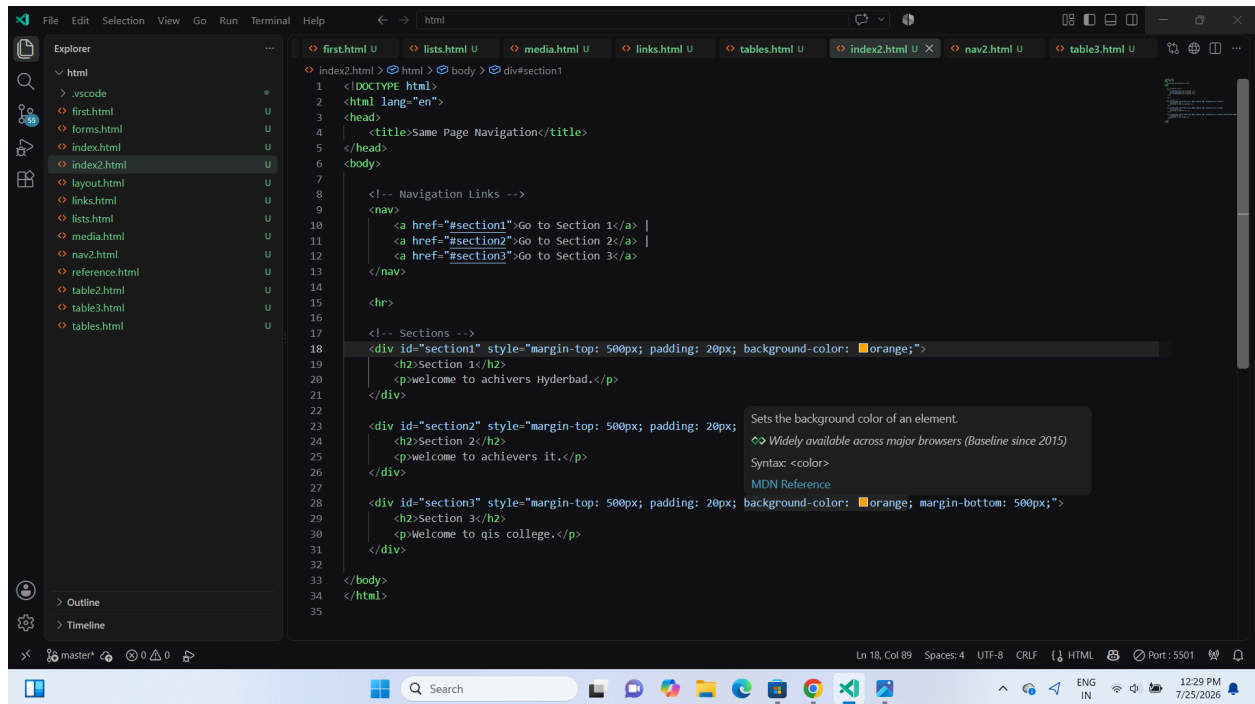

```
1 <!DOCTYPE html>
2 <html lang="en">
3 <head>
4   <title>Same Page Navigation</title>
5 </head>
6 <body>
7
8   <!-- Navigation Links -->
9   <nav>
10     <a href="#section1">Go to Section 1</a> |
11     <a href="#section2">Go to Section 2</a> |
12     <a href="#section3">Go to Section 3</a>
13   </nav>
14
15   <hr>
16
17   <!-- Sections -->
18   <div id="section1" style="margin-top: 500px; padding: 20px; background-color: orange;">
19     <h2>Section 1</h2>
20     <p>welcome to achivers Hyderabad.</p>
21   </div>
22
23   <div id="section2" style="margin-top: 500px; padding: 20px;">
24     <h2>Section 2</h2>
25     <p>welcome to achievers it.</p>
26   </div>
27
28   <div id="section3" style="margin-top: 500px; padding: 20px; background-color: orange; margin-bottom: 500px;">
29     <h2>Section 3</h2>
30     <p>Welcome to qis college.</p>
31   </div>
32
33 </body>
34 </html>
35
```

Output:

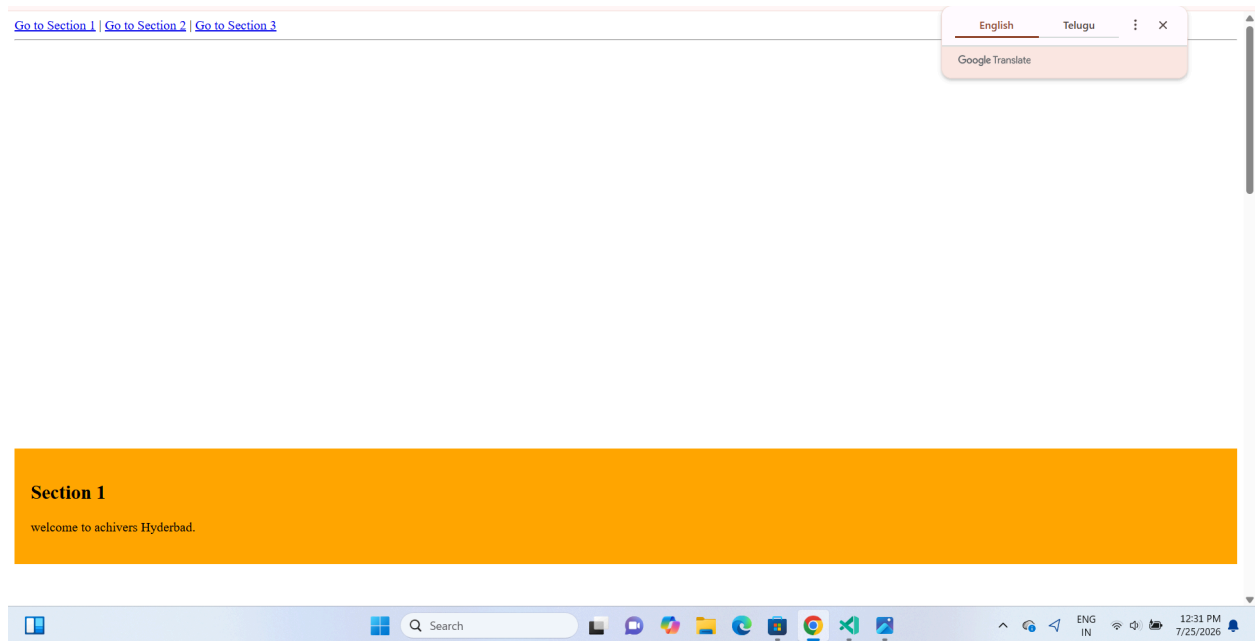

20. Replicate the following HTML table structure in your HTML document `<table border="1" style="text-align:center;">`

```
<tr>
<th rowspan="3">Day</th>
<th colspan="3">Seminar</th> </tr>
<tr>
<th colspan="2">Schedule</th>
<th rowspan="2">Topic</th>
</tr>
<tr>
<th>Begin</th>
<th>End</th>
</tr>
<tr>
<td rowspan="2">Monday</td>
<td rowspan="2">8:00 a.m.</td>
<td rowspan="2">5:00 p.m.</td>
<td>Introduction to XML</td>
</tr>
<tr>
<td>Validity: DTD and Relax NG</td>
</tr>
<tr>
<td rowspan="3">Tuesday</td>
<td>8:00 a.m.</td>
<td>11:00 a.m.</td>
<td>XPath</td>
</tr>
```

```
<tr>
<td>11:00 a.m.</td>
<td>2:00 p.m.</td>
<td rowspan="2">XSL Transformations</td>
</tr>
<tr>
<td>2:00 p.m.</td>
<td>5:00 p.m.</td>
</tr>
<tr>
<td>Wednesday</td>
<td>8:00 a.m.</td>
<td>12:00 p.m.</td>
<td>XSL Formatting Objects</td>
</tr>
</table>
```