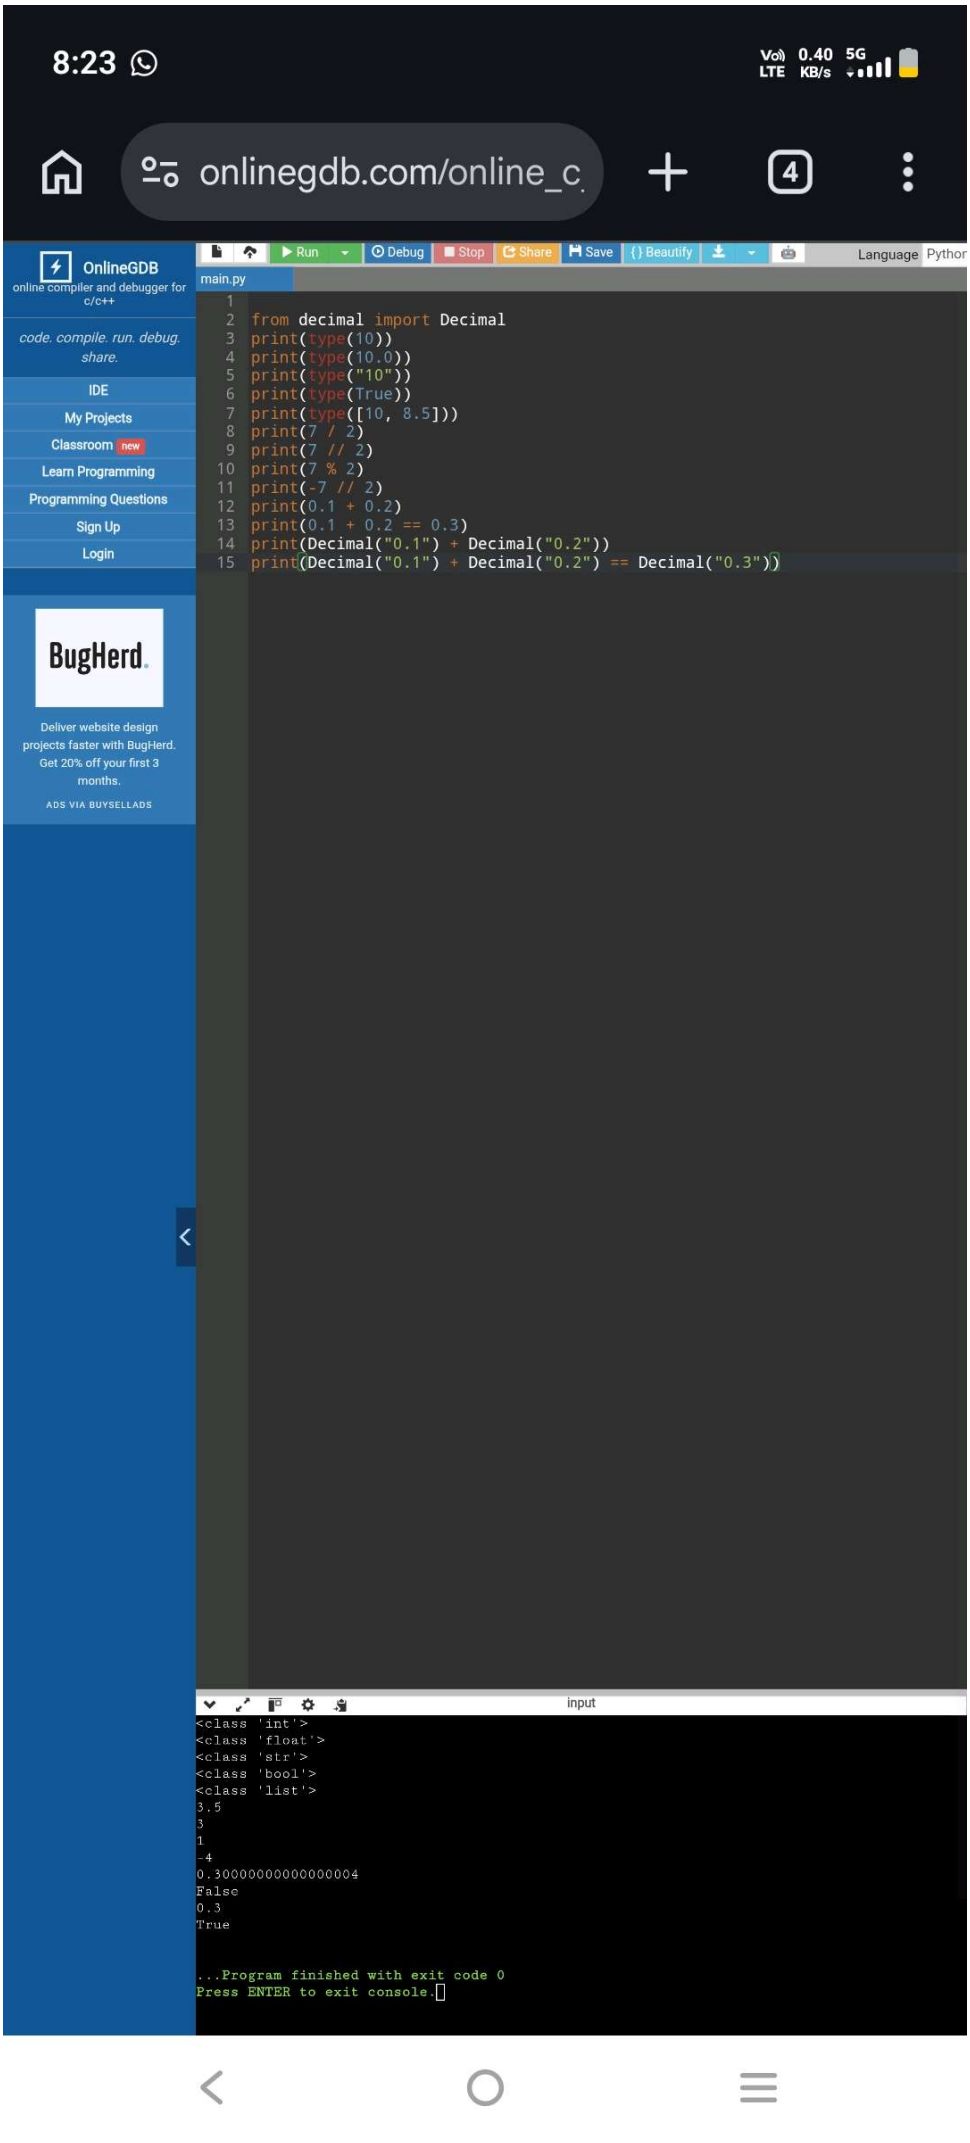
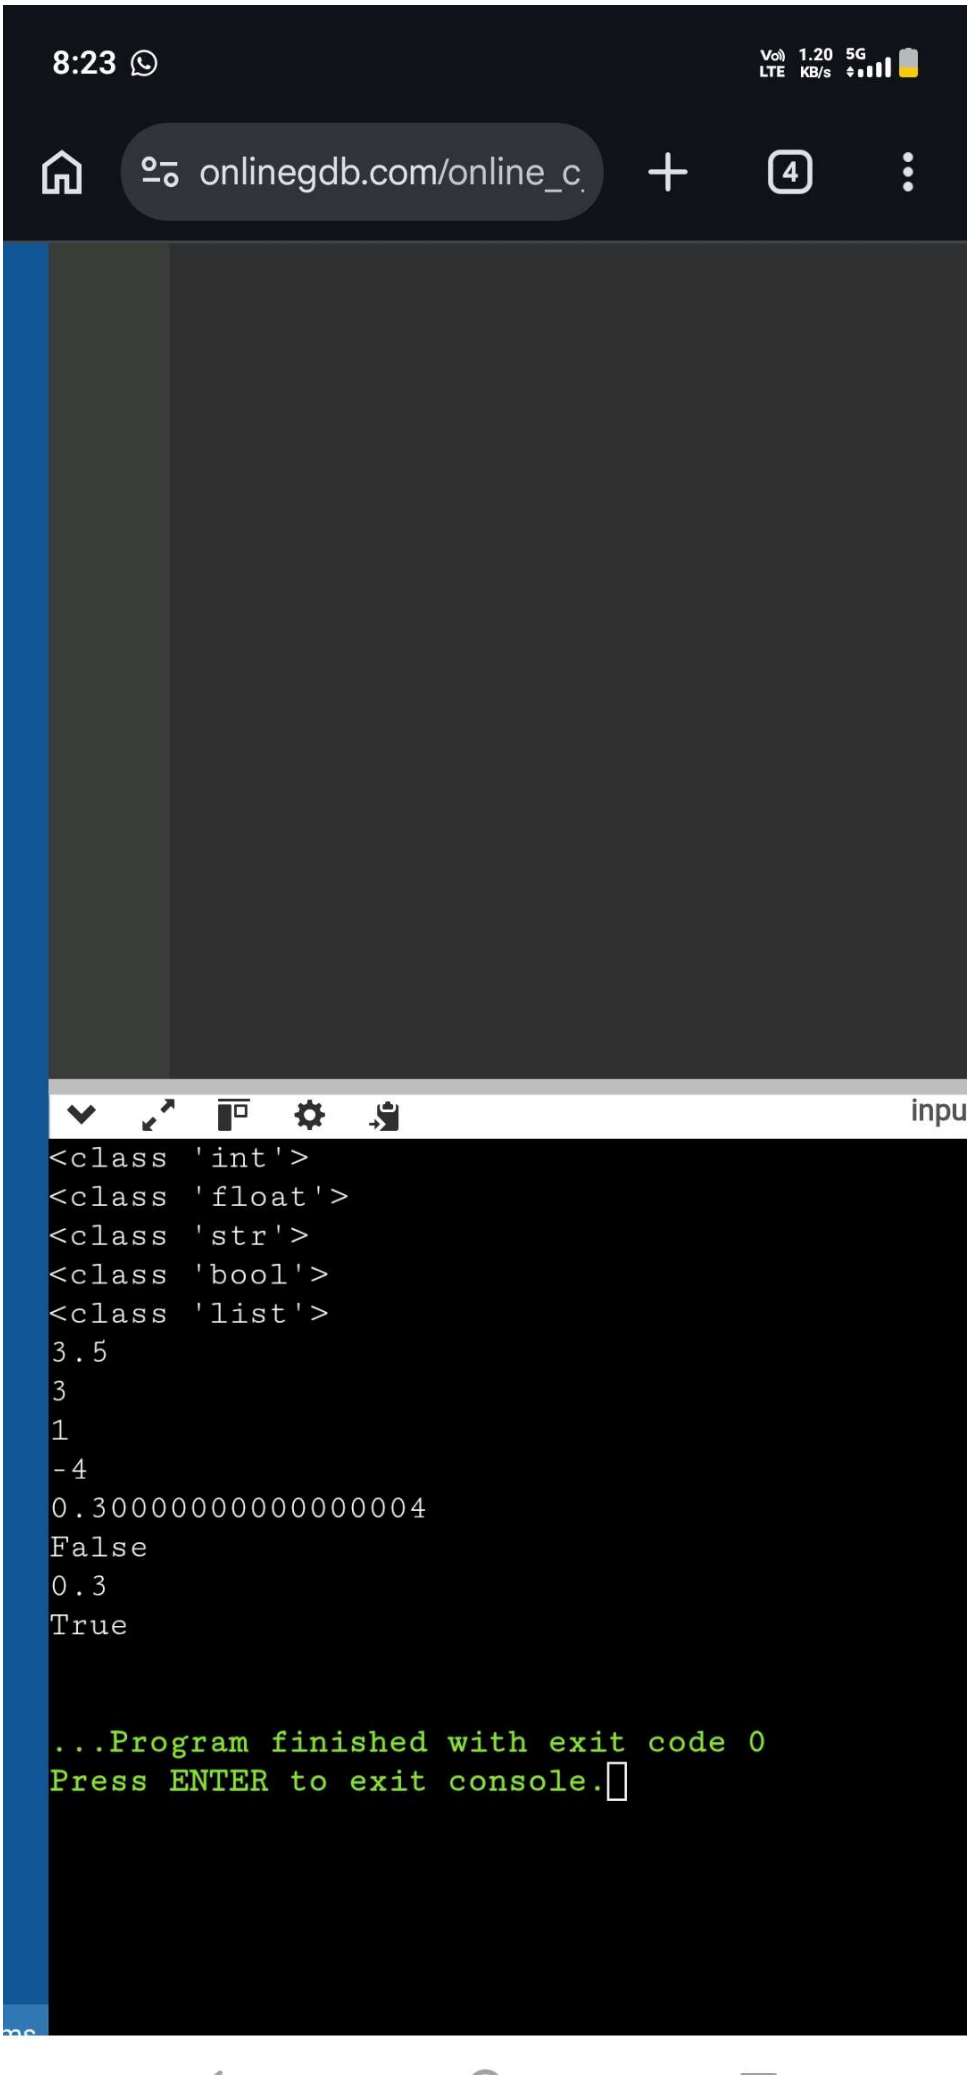
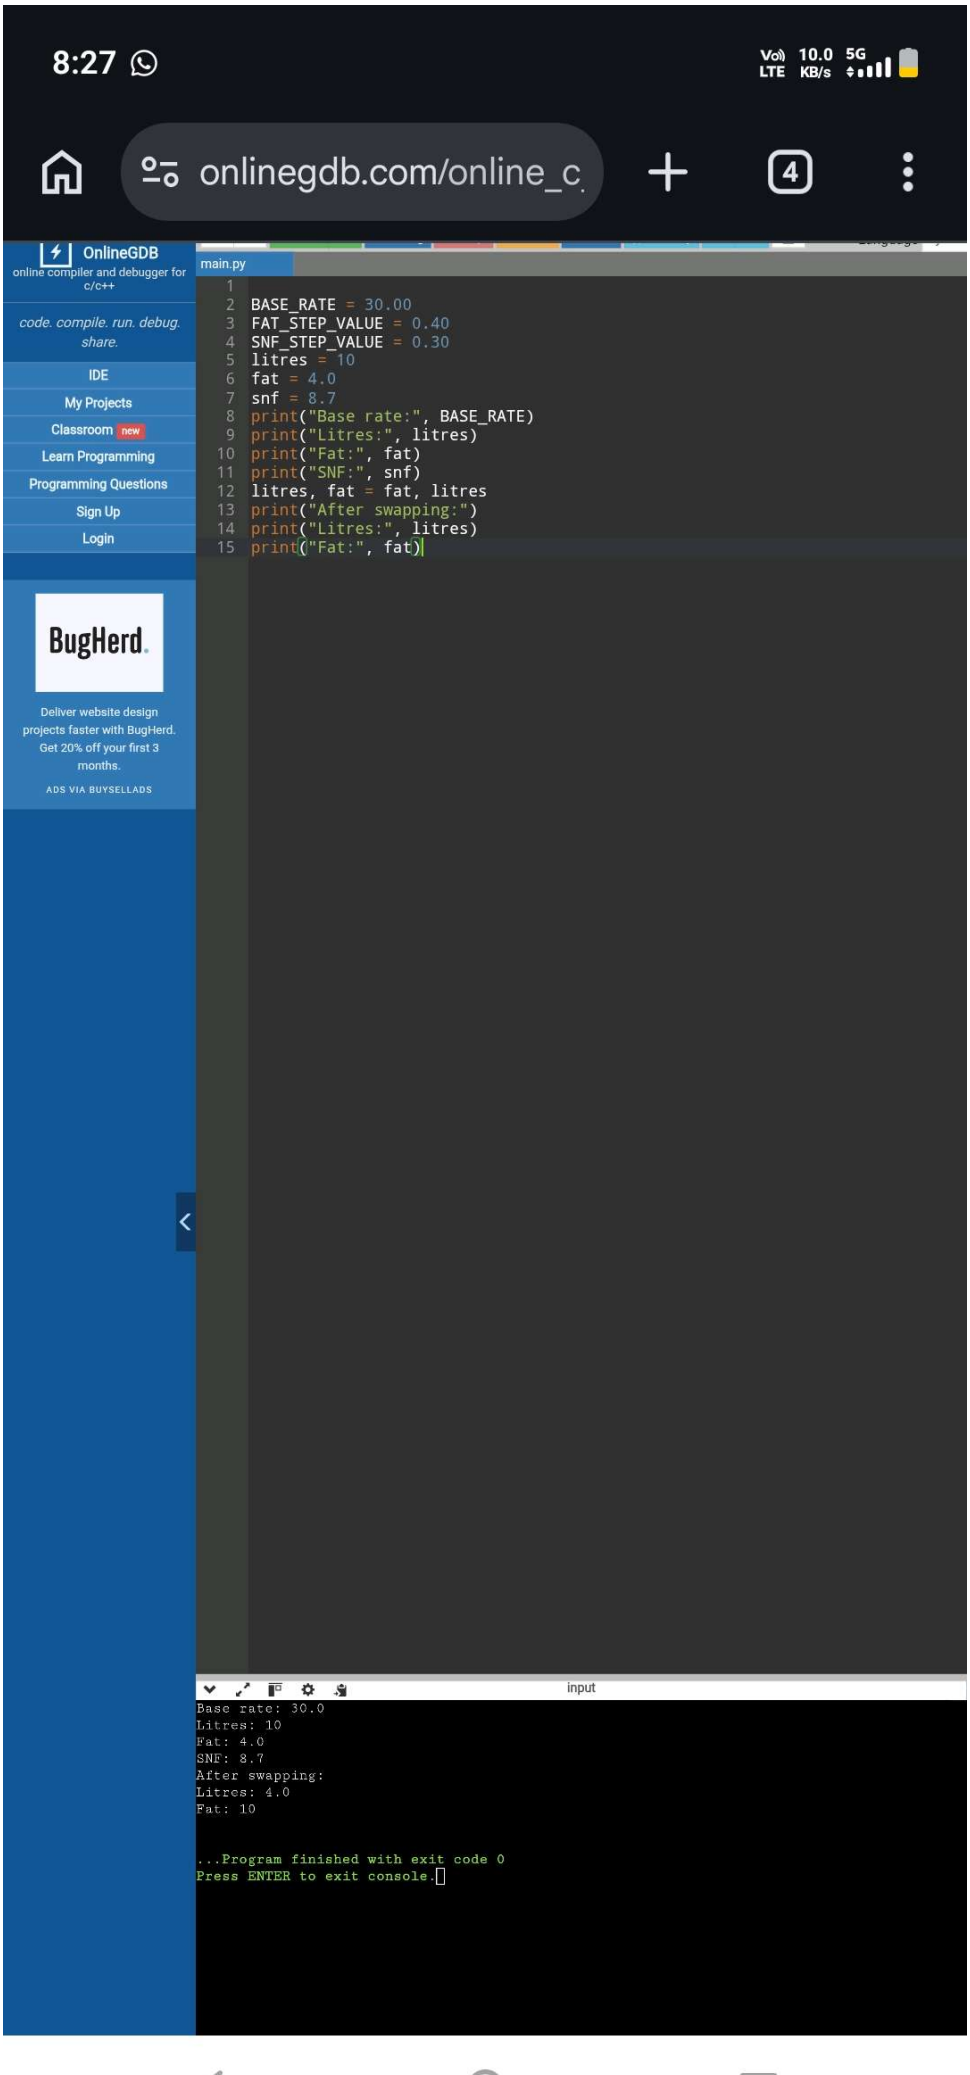
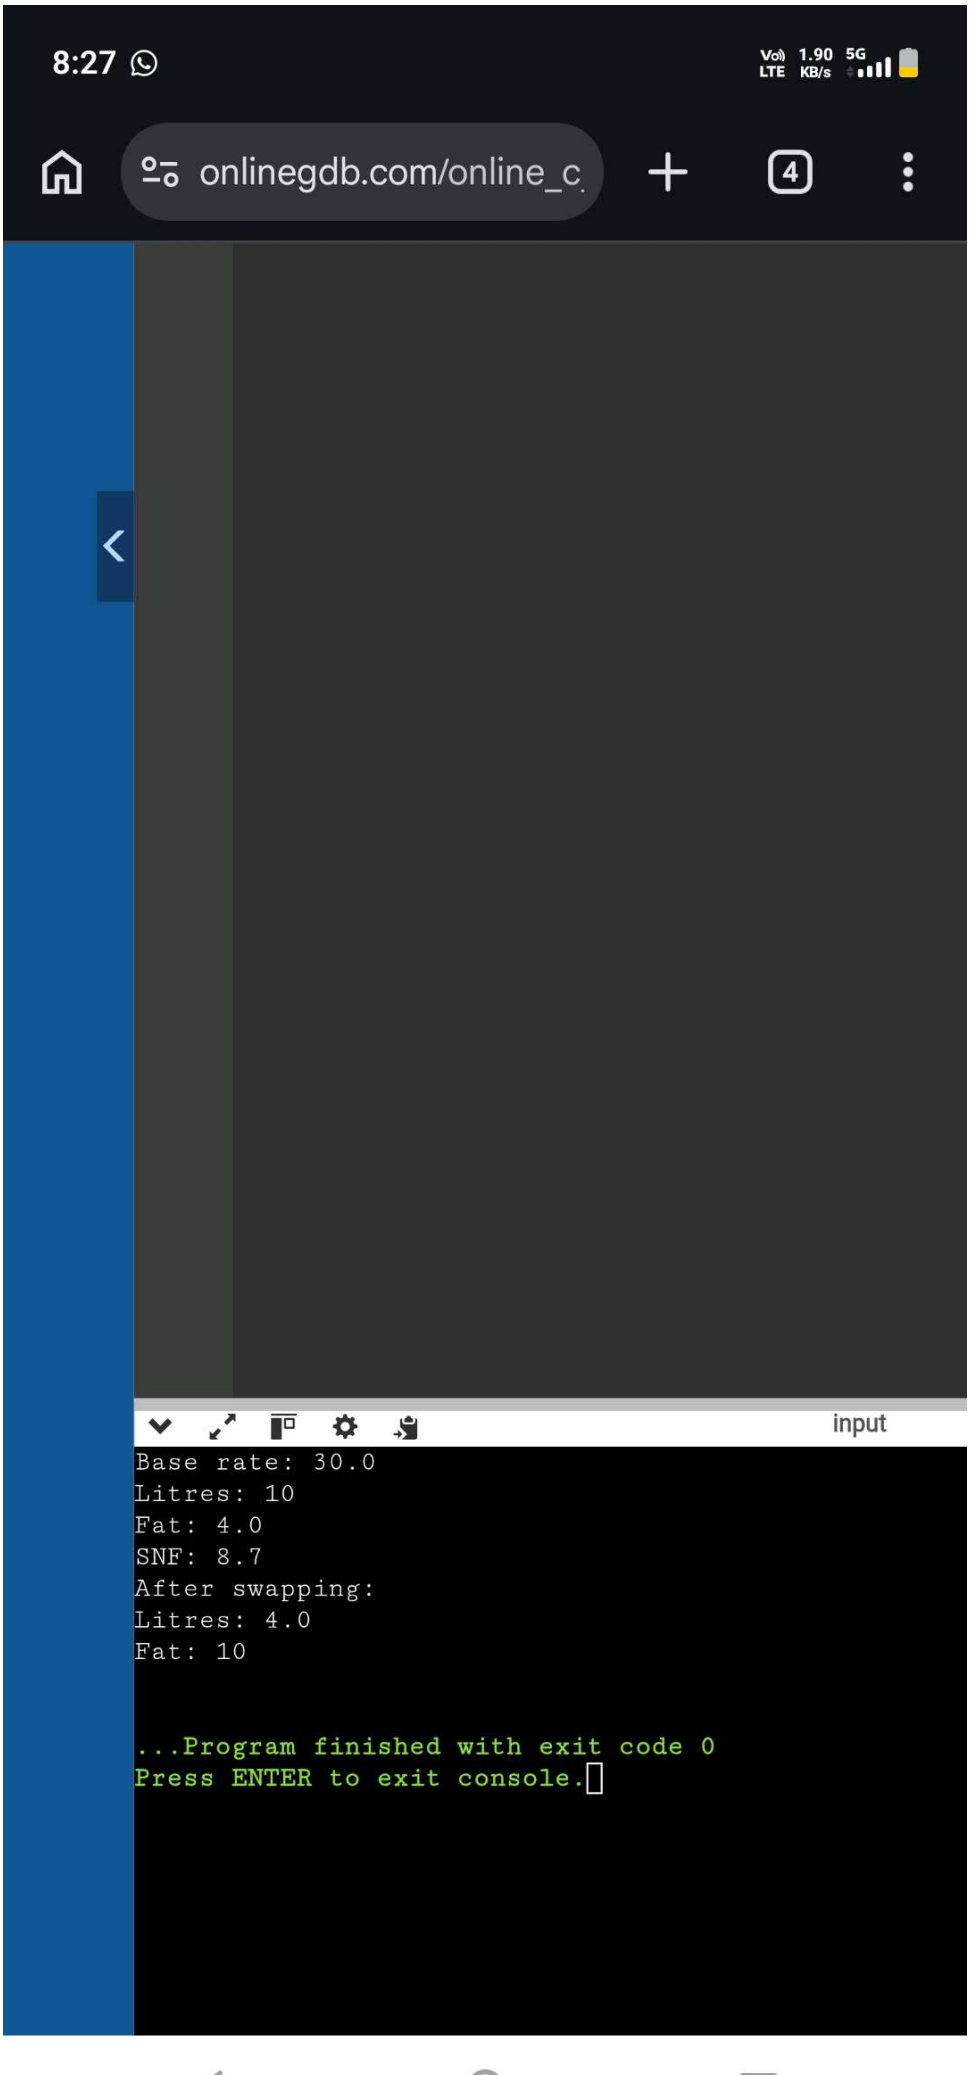
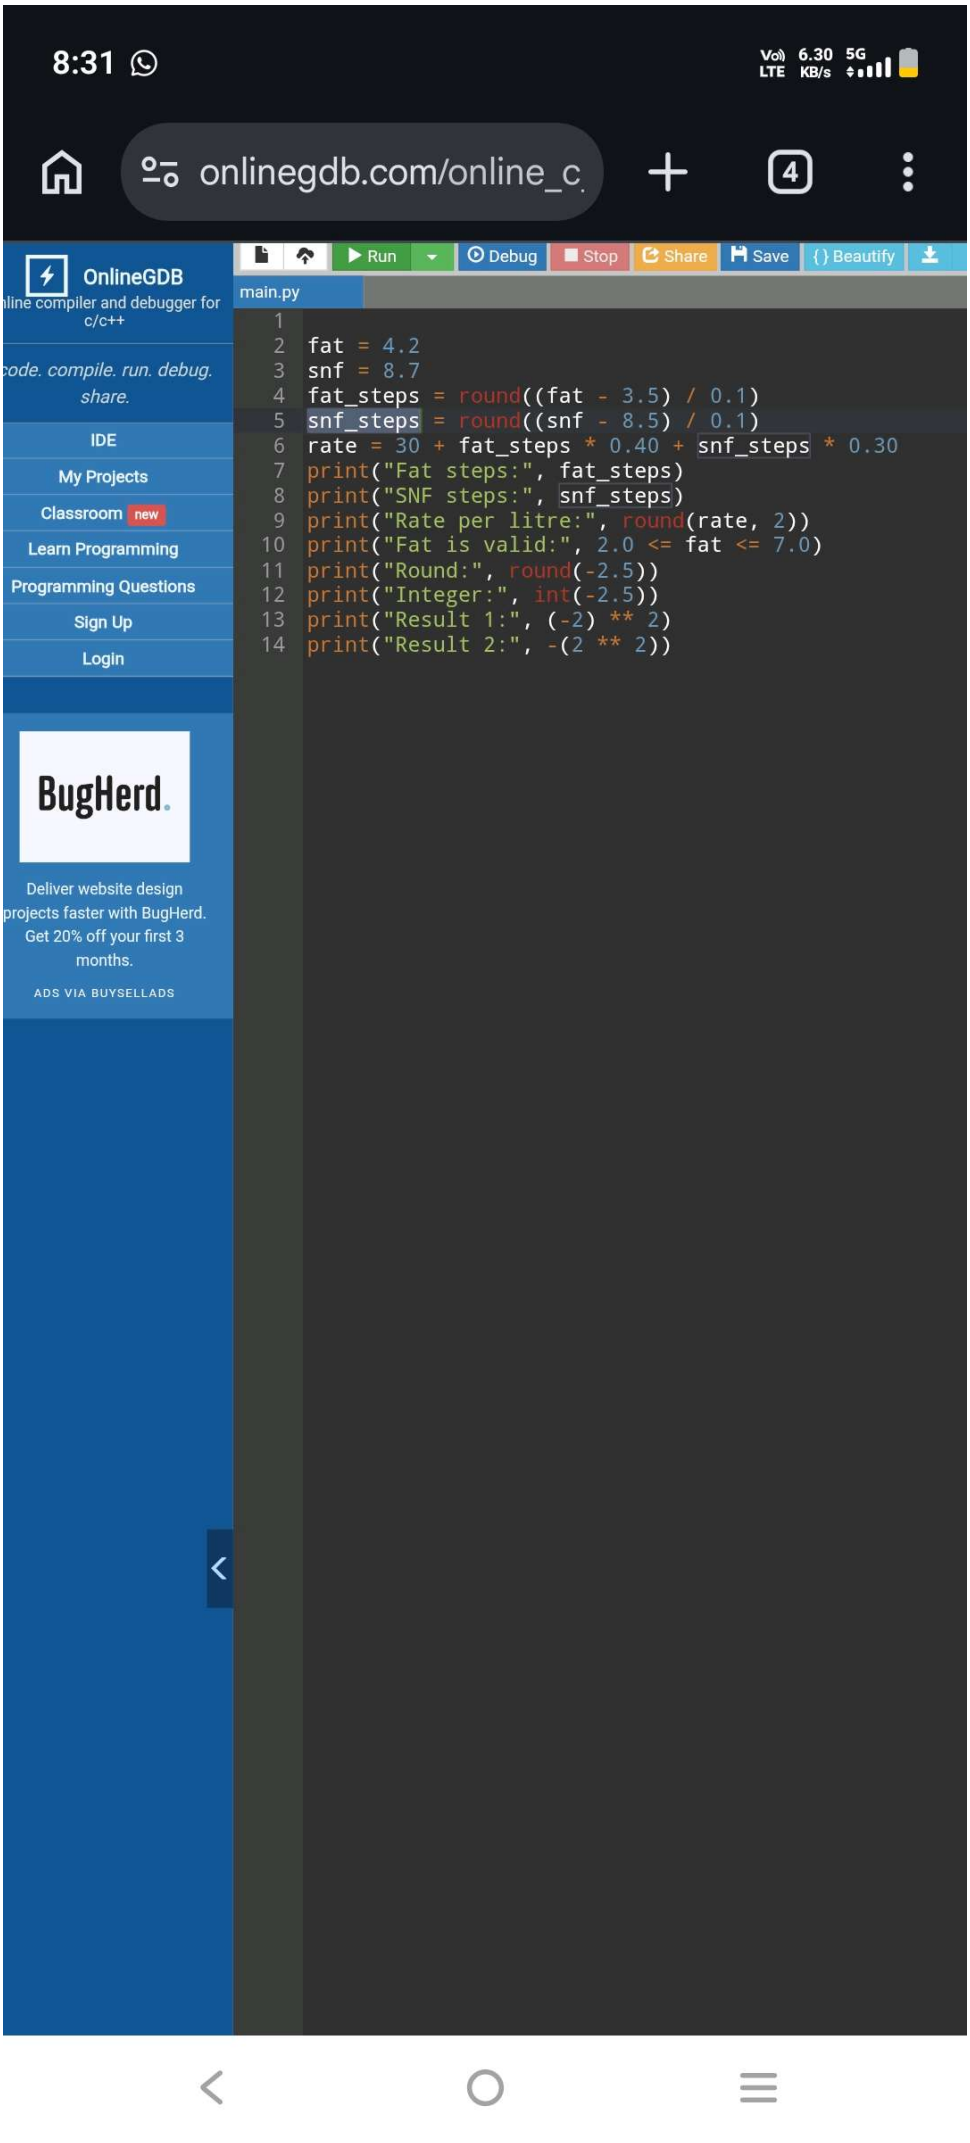
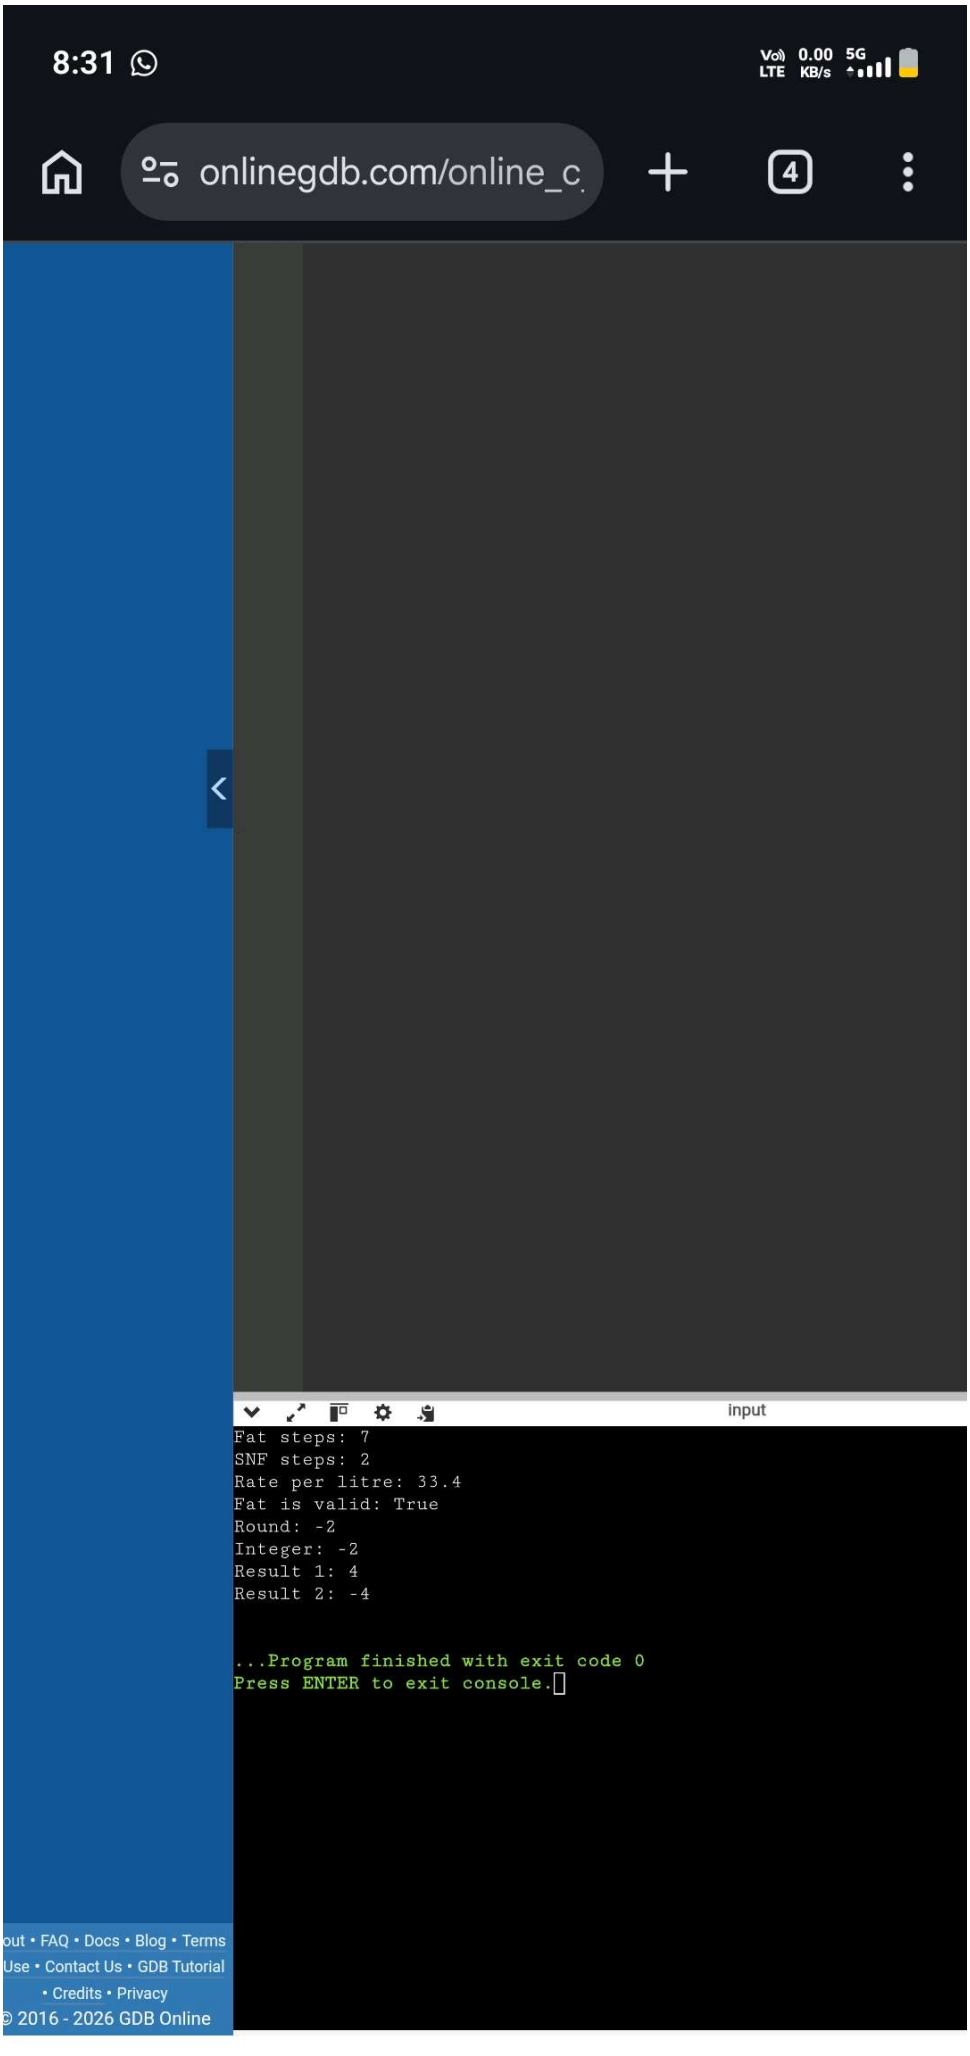

8:23
Vo) LTE 0.40 KB/s 5G
onlinegdb.com/online_c
OnlineGDB
online compiler and debugger for c/c++
code. compile. run. debug. share.
IDE
My Projects
Classroom new
Learn Programming
Programming Questions
Sign Up
Login
BugHerd.
Deliver website design projects faster with BugHerd. Get 20% off your first 3 months.
ADS VIA BUYSELLADS
Run
Debug
Stop
Share
Save
{} Beautify
Language Pythor
main.py
1 from decimal import Decimal
2 print(type(10))
3 print(type(10.0))
4 print(type("10"))
5 print(type(True))
6 print(type([10, 8.5]))
7 print(7 / 2)
8 print(7 // 2)
9 print(7 % 2)
10 print(-7 // 2)
11 print(0.1 + 0.2)
12 print(0.1 + 0.2 == 0.3)
13 print(Decimal("0.1") + Decimal("0.2"))
14 print(Decimal("0.1") + Decimal("0.2") == Decimal("0.3"))
input
<class 'int'>
<class 'float'>
<class 'str'>
<class 'bool'>
<class 'list'>
3.5
3
1
-4
0.30000000000000004
False
0.3
True
...Program finished with exit code 0
Press ENTER to exit console.

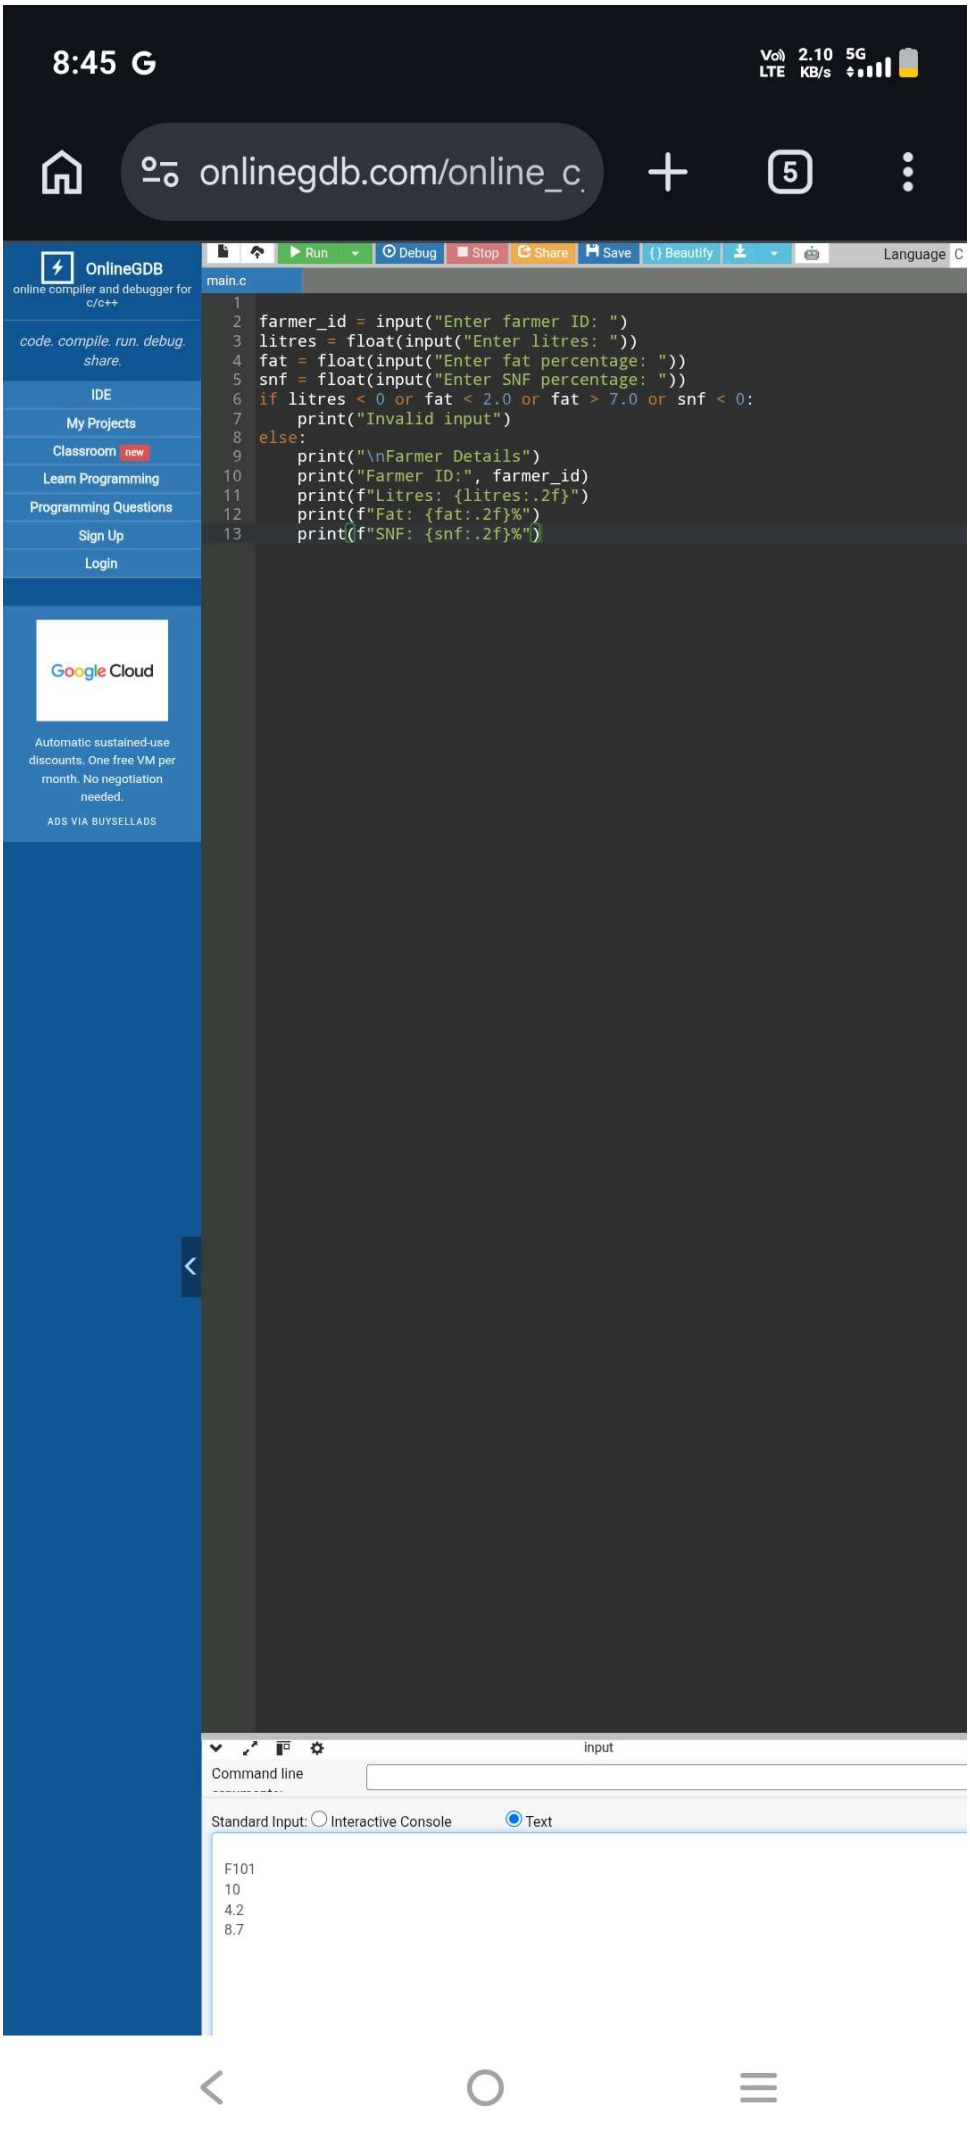

8:23
onlinegdb.com/online_c
inpu
<class 'int'>
<class 'float'>
<class 'str'>
<class 'bool'>
<class 'list'>
3.5
3
1
-4
0.30000000000000004
False
0.3
True
...Program finished with exit code 0
Press ENTER to exit console.

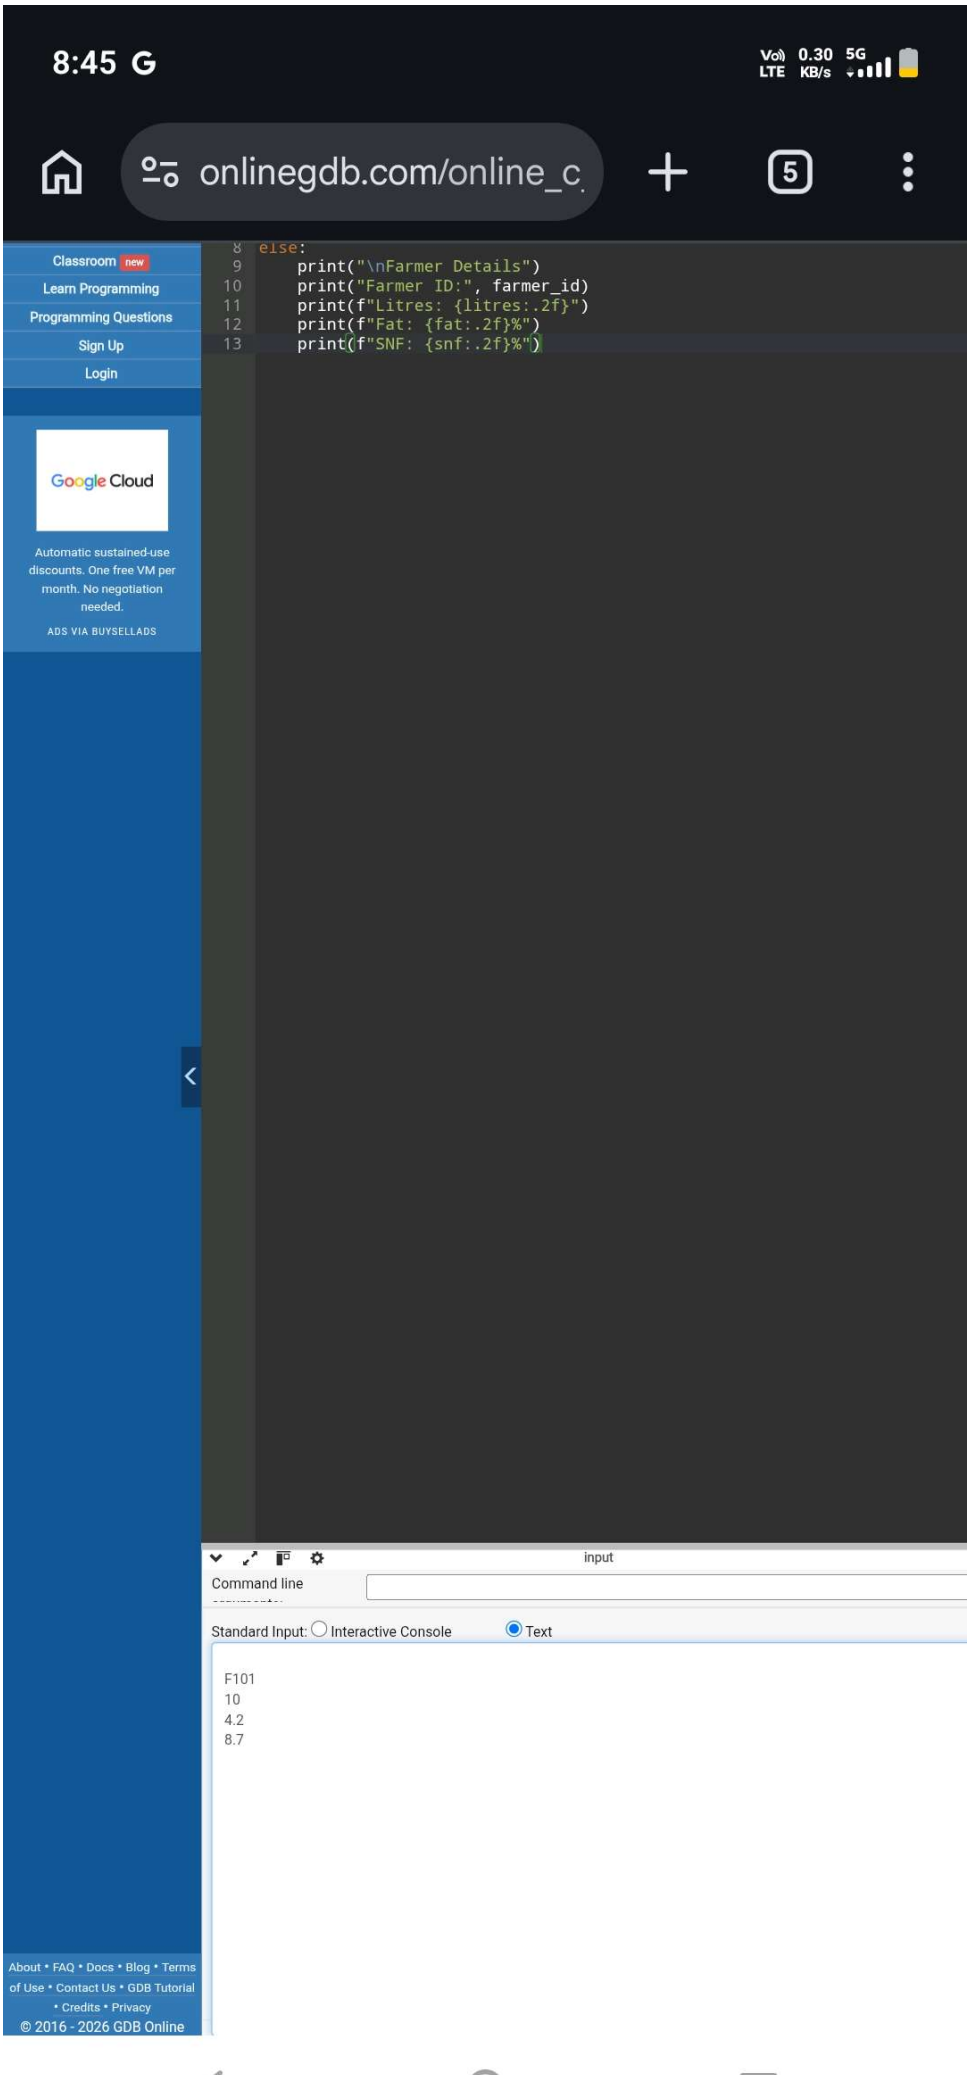

8:27
onlinegdb.com/online_c
OnlineGDB
online compiler and debugger for c/c++
code. compile. run. debug. share.
IDE
My Projects
Classroom new
Learn Programming
Programming Questions
Sign Up
Login
BugHerd.
Deliver website design projects faster with BugHerd. Get 20% off your first 3 months.
ADS VIA BUYSELLADS
main.py
BASE_RATE = 30.00
FAT_STEP_VALUE = 0.40
SNF_STEP_VALUE = 0.30
litres = 10
fat = 4.0
snf = 8.7
print("Base rate:", BASE_RATE)
print("Litres:", litres)
print("Fat:", fat)
print("SNF:", snf)
litres, fat = fat, litres
print("After swapping:")
print("Litres:", litres)
print("Fat:", fat)
input
Base rate: 30.0
Litres: 10
Fat: 4.0
SNF: 8.7
After swapping:
Litres: 4.0
Fat: 10
...Program finished with exit code 0
Press ENTER to exit console.

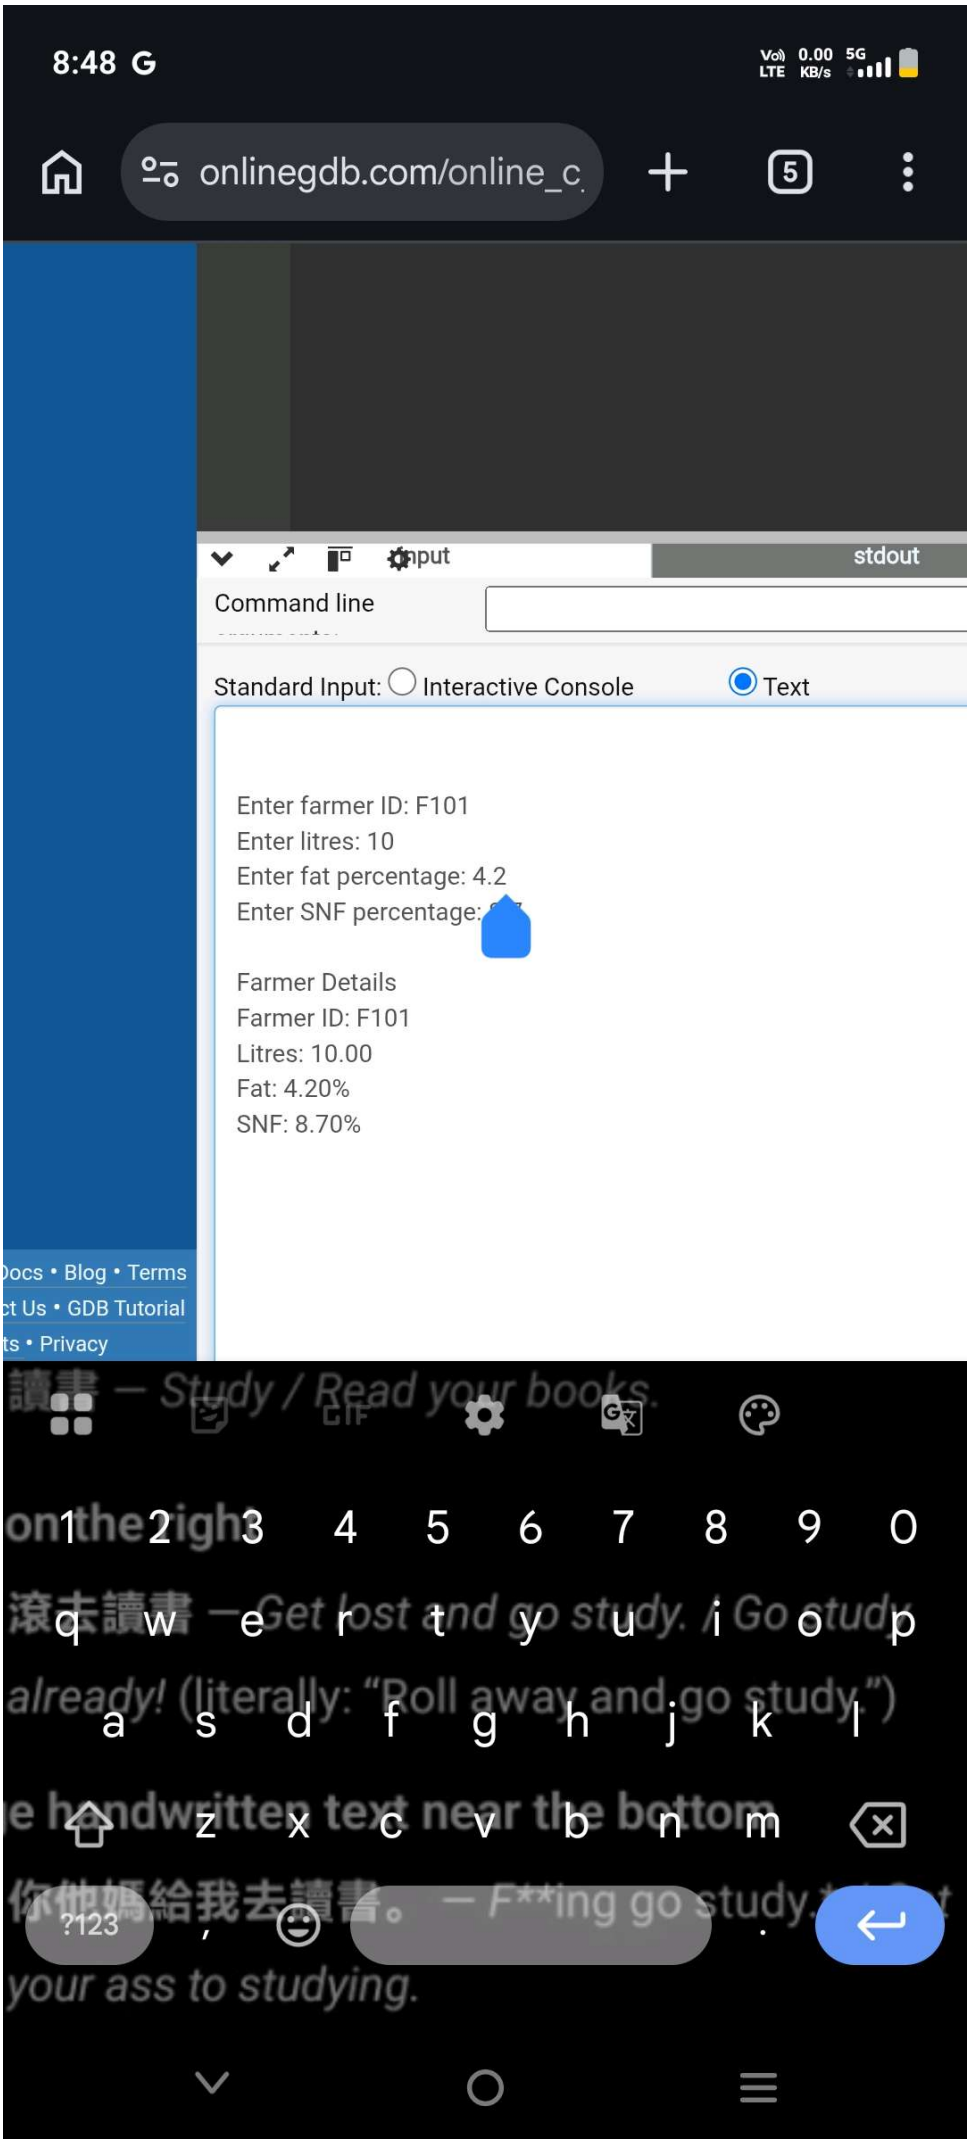

8:27
onlinegdb.com/online_c
input
Base rate: 30.0
Litres: 10
Fat: 4.0
SNF: 8.7
After swapping:
Litres: 4.0
Fat: 10
...Program finished with exit code 0
Press ENTER to exit console.

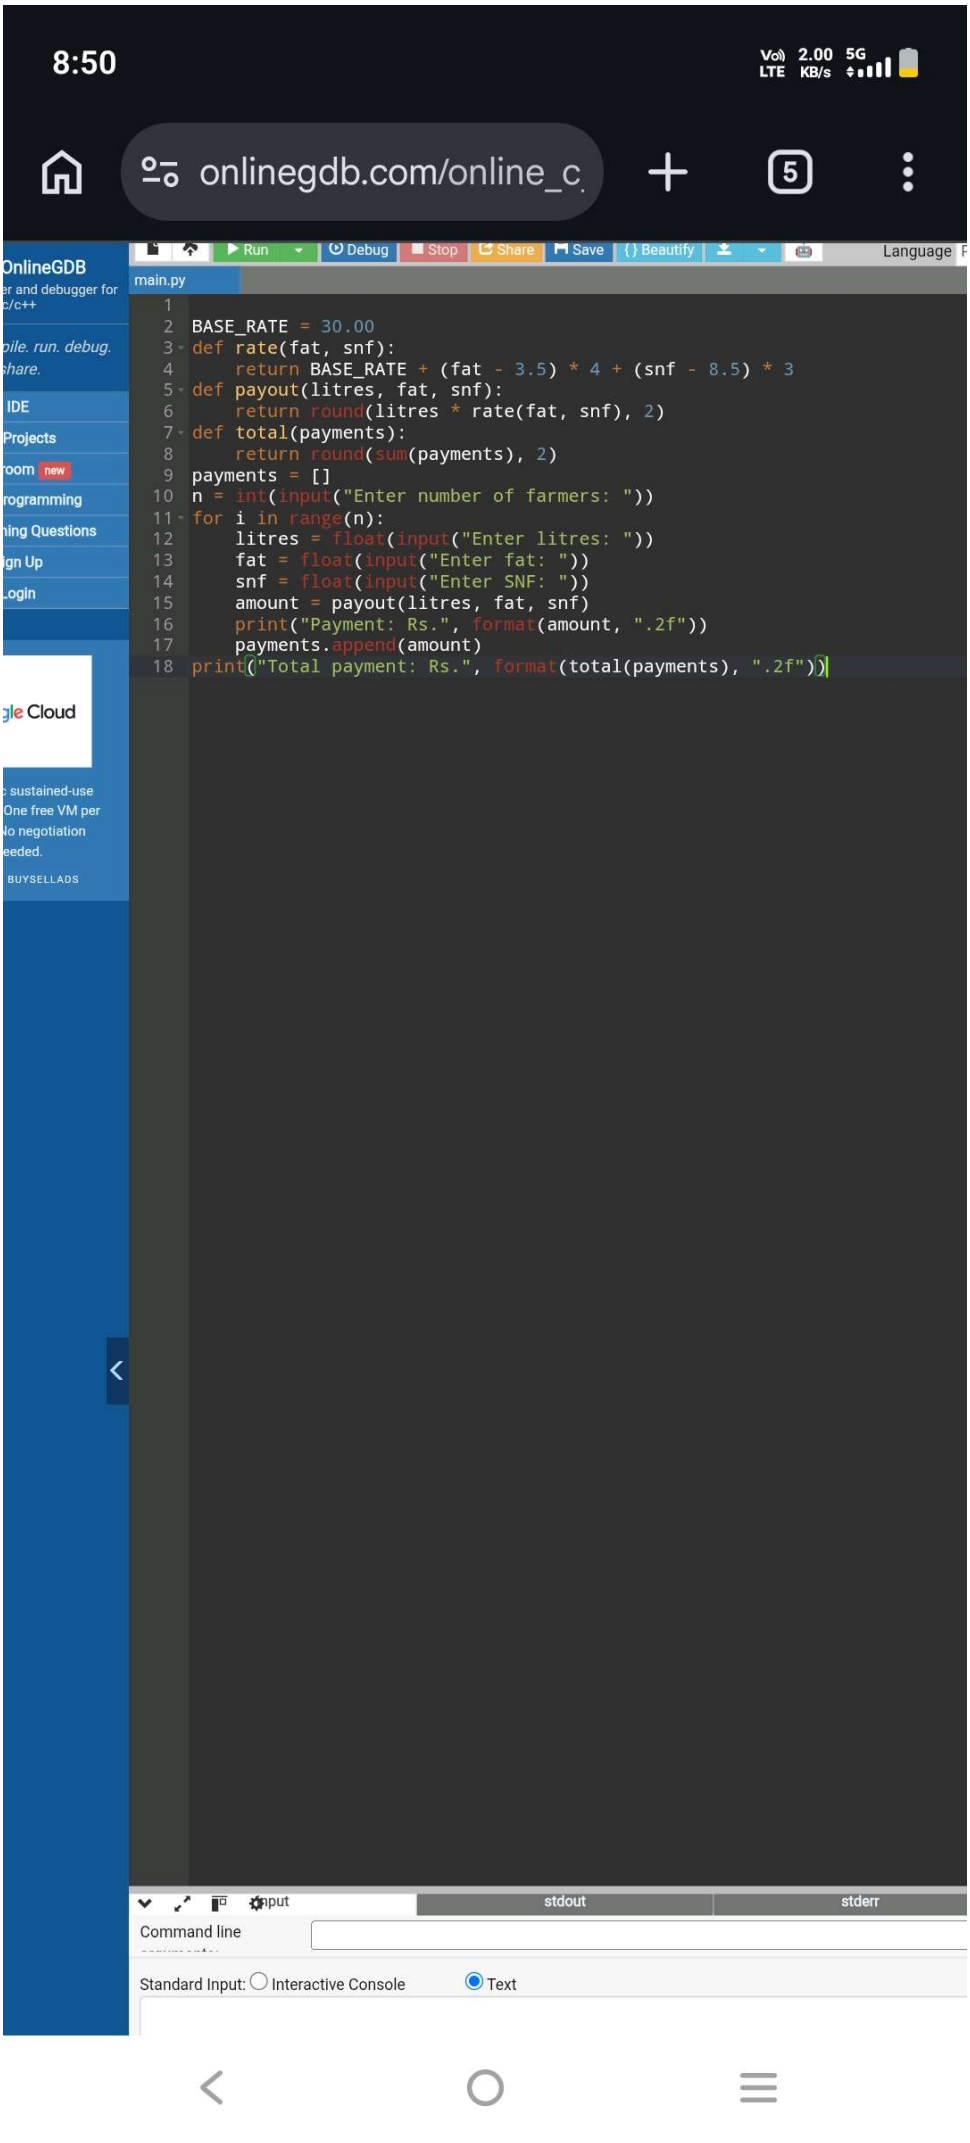

8:31
6.30 KB/s
5G
onlinegdb.com/online_c
OnlineGDB
line compiler and debugger for c/c++
code. compile. run. debug. share.
IDE
My Projects
Classroom new
Learn Programming
Programming Questions
Sign Up
Login
BugHerd.
Deliver website design projects faster with BugHerd. Get 20% off your first 3 months.
ADS VIA BUYSELLADS
Run
Debug
Stop
Share
Save
{} Beautify
main.py
1 fat = 4.2
2 snf = 8.7
3 fat_steps = round((fat - 3.5) / 0.1)
4 snf_steps = round((snf - 8.5) / 0.1)
5 rate = 30 + fat_steps * 0.40 + snf_steps * 0.30
6 print("Fat steps:", fat_steps)
7 print("SNF steps:", snf_steps)
8 print("Rate per litre:", round(rate, 2))
9 print("Fat is valid:", 2.0 <= fat <= 7.0)
10 print("Round:", round(-2.5))
11 print("Integer:", int(-2.5))
12 print("Result 1:", (-2) ** 2)
13 print("Result 2:", -(2 ** 2))

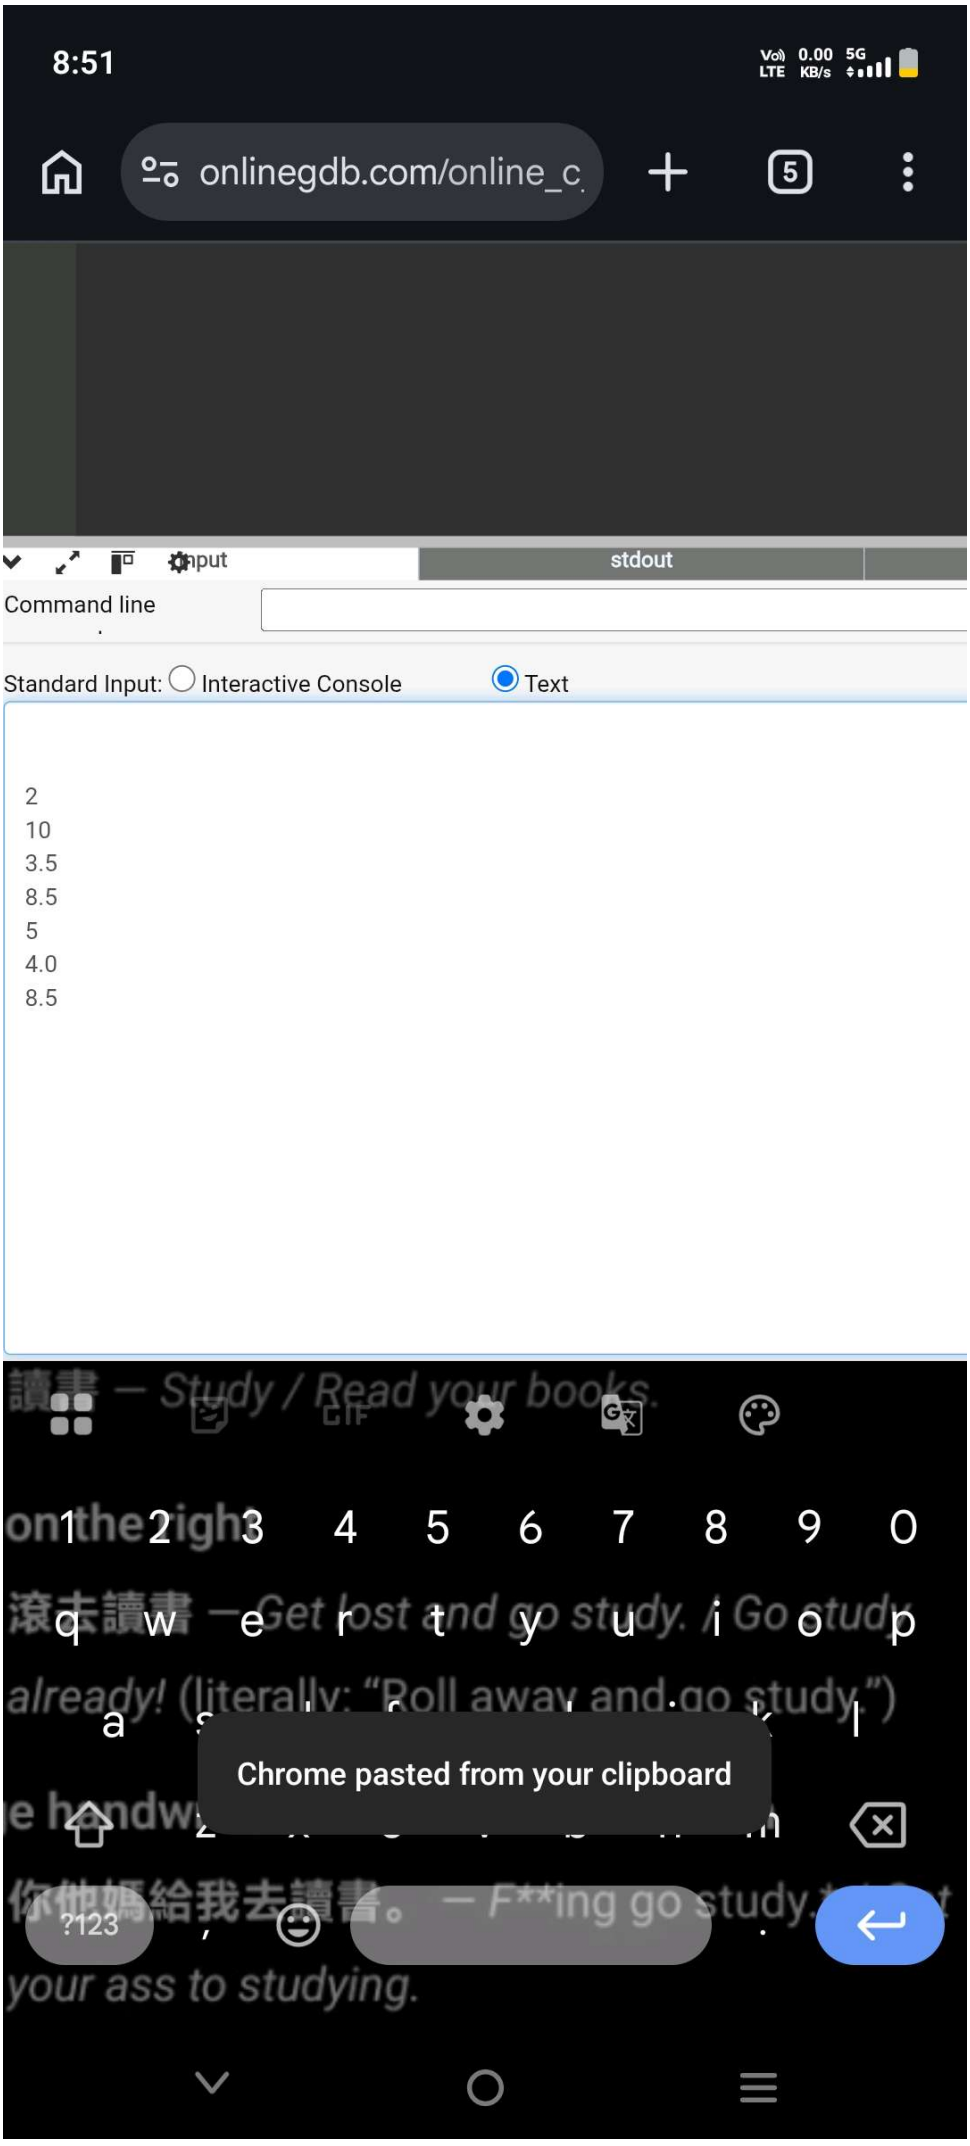

8:31
0.00 KB/s
5G
onlinegdb.com/online_c
input
Fat steps: 7
SNF steps: 2
Rate per litre: 33.4
Fat is valid: True
Round: -2
Integer: -2
Result 1: 4
Result 2: -4
...Program finished with exit code 0
Press ENTER to exit console.
out • FAQ • Docs • Blog • Terms
Use • Contact Us • GDB Tutorial
• Credits • Privacy
© 2016 - 2026 GDB Online

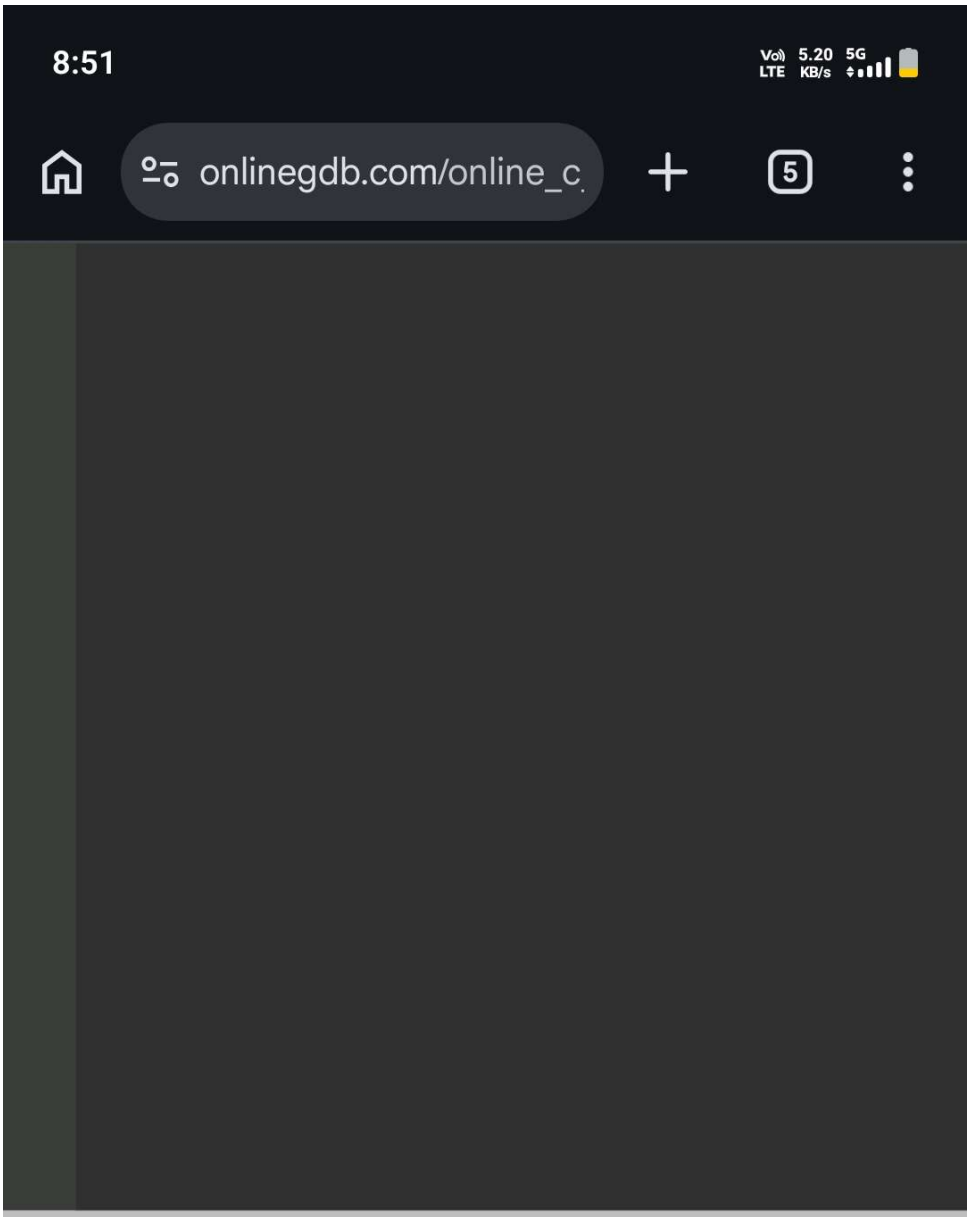

8:45 G
Vo) 2.10 5G
LTE KB/s
onlinegdb.com/online_c
OnlineGDB
online compiler and debugger for c/c++
code. compile. run. debug. share.
IDE
My Projects
Classroom new
Learn Programming
Programming Questions
Sign Up
Login
Google Cloud
Automatic sustained-use discounts. One free VM per month. No negotiation needed.
ADS VIA BUYSELLADS
Run
Debug
Stop
Share
Save
{} Beautify
Language C
main.c
1 farmer_id = input("Enter farmer ID: ")
2 litres = float(input("Enter litres: "))
3 fat = float(input("Enter fat percentage: "))
4 snf = float(input("Enter SNF percentage: "))
5 if litres < 0 or fat < 2.0 or fat > 7.0 or snf < 0:
6 print("Invalid input")
7 else:
8 print("\nFarmer Details")
9 print("Farmer ID:", farmer_id)
10 print(f"Litres: {litres:.2f}")
11 print(f"Fat: {fat:.2f}%")
12 print(f"SNF: {snf:.2f}%")
input
Command line
Standard Input: Interactive Console Text
F101
10
4.2
8.7

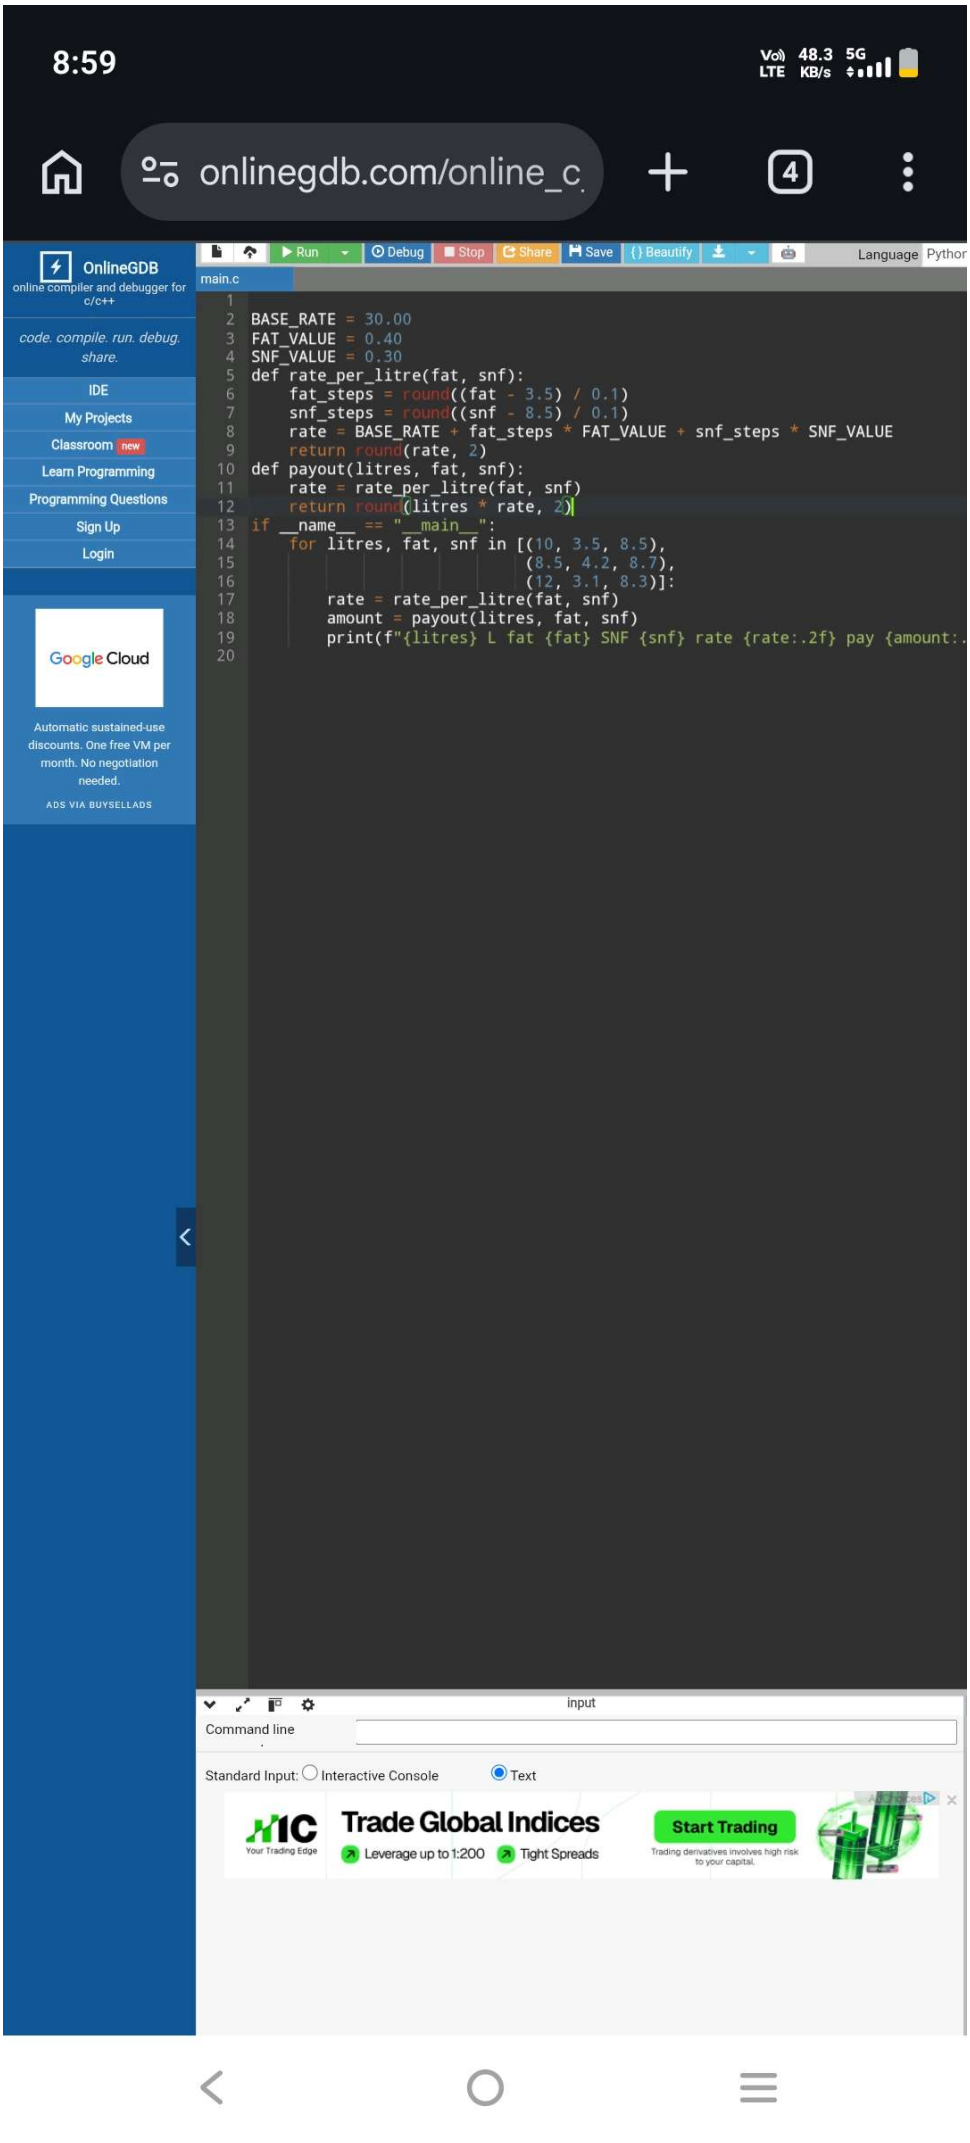

8:45 G
Vo) LTE 0.30 KB/s 5G
onlinegdb.com/online_c
Classroom new
Learn Programming
Programming Questions
Sign Up
Login
Google Cloud
Automatic sustained-use discounts. One free VM per month. No negotiation needed.
ADS VIA BUYSELLADS
else:
print("\nFarmer Details")
print("Farmer ID:", farmer_id)
print(f"Litres: {litres:.2f}")
print(f"Fat: {fat:.2f}%")
print(f"SNF: {snf:.2f}%")
input
Command line
Standard Input: Interactive Console Text
F101
10
4.2
8.7
About • FAQ • Docs • Blog • Terms of Use • Contact Us • GDB Tutorial • Credits • Privacy
© 2016 - 2026 GDB Online

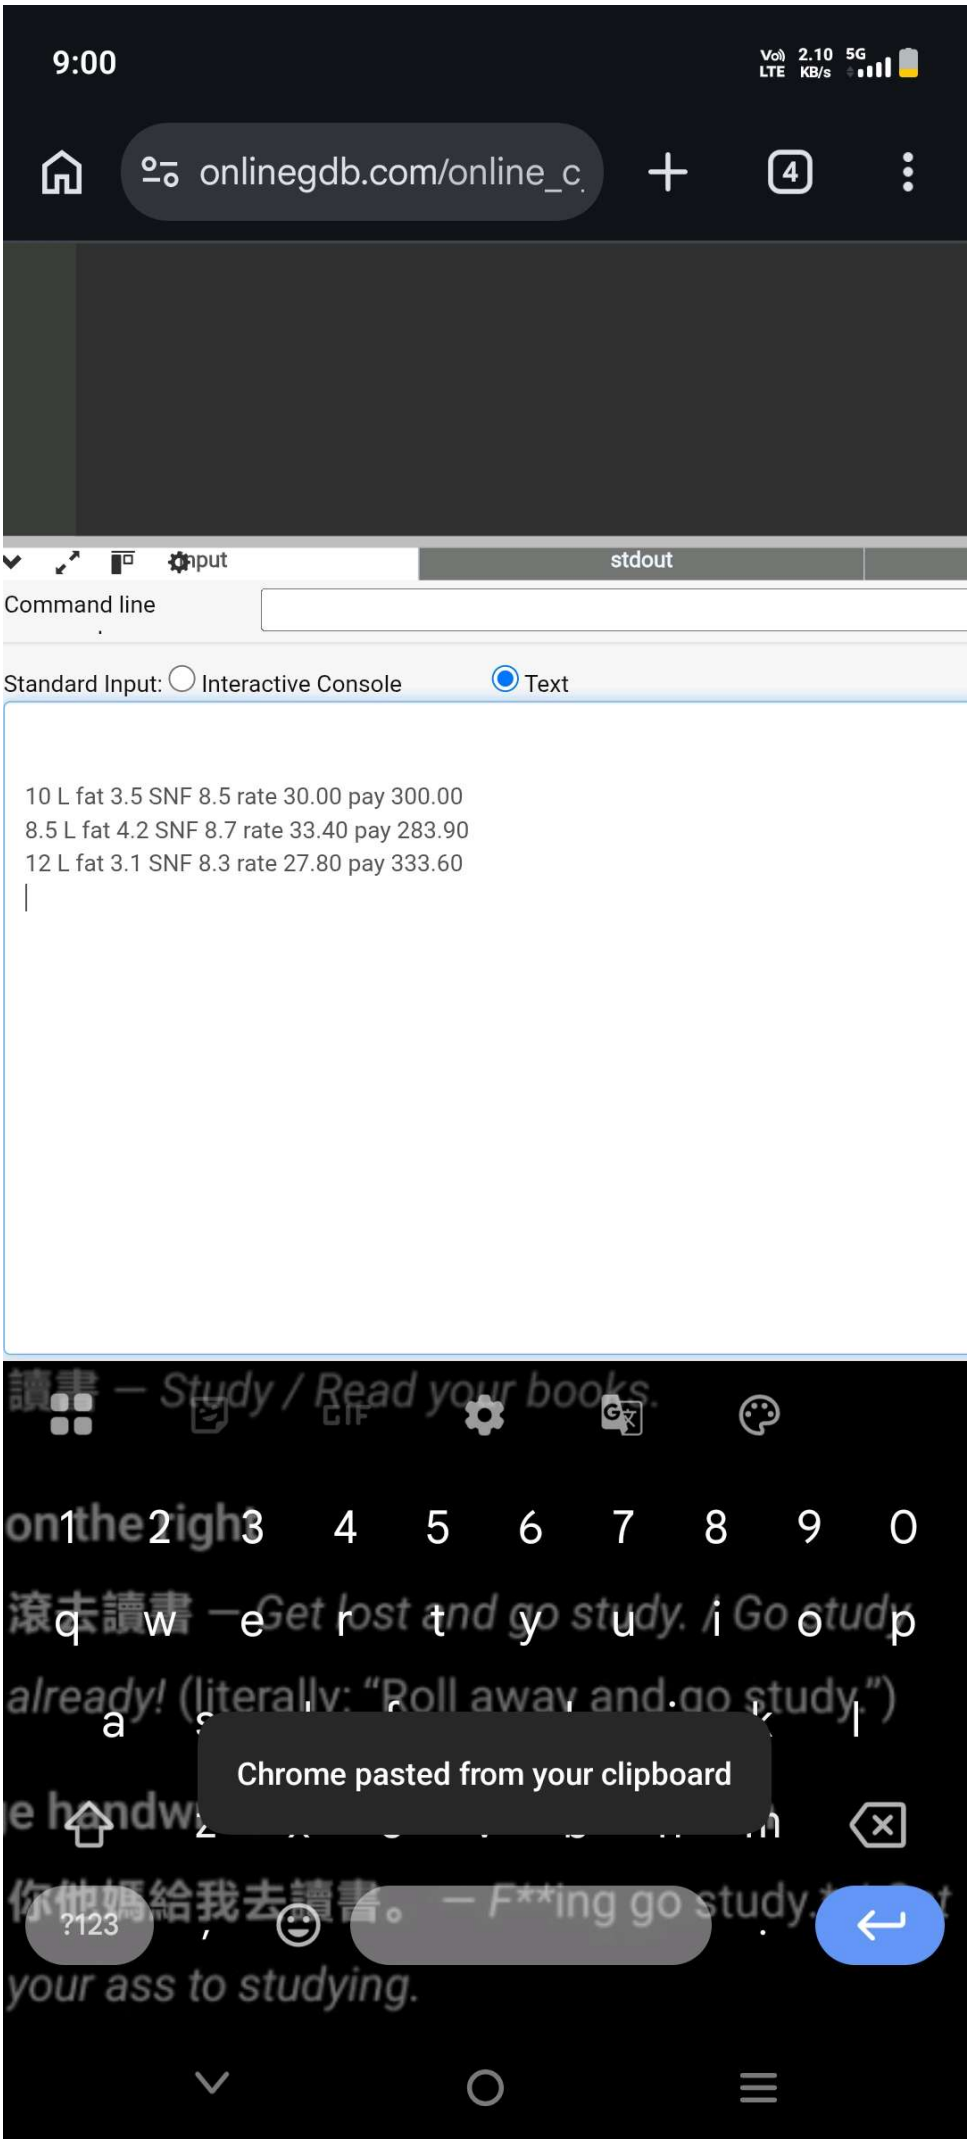

8:48 G
onlinegdb.com/online_c
stdout
Command line
Standard Input: Interactive Console Text
Enter farmer ID: F101
Enter litres: 10
Enter fat percentage: 4.2
Enter SNF percentage:
Farmer Details
Farmer ID: F101
Litres: 10.00
Fat: 4.20%
SNF: 8.70%
Docs • Blog • Terms
ct Us • GDB Tutorial
ts • Privacy
讀書 — Study / Read your books.
滾去讀書 — Get lost and go study. / Go study already! (literally: "Roll away and go study")
你他媽給我去讀書。 — F**ing go study. / Get your ass to studying.
?123

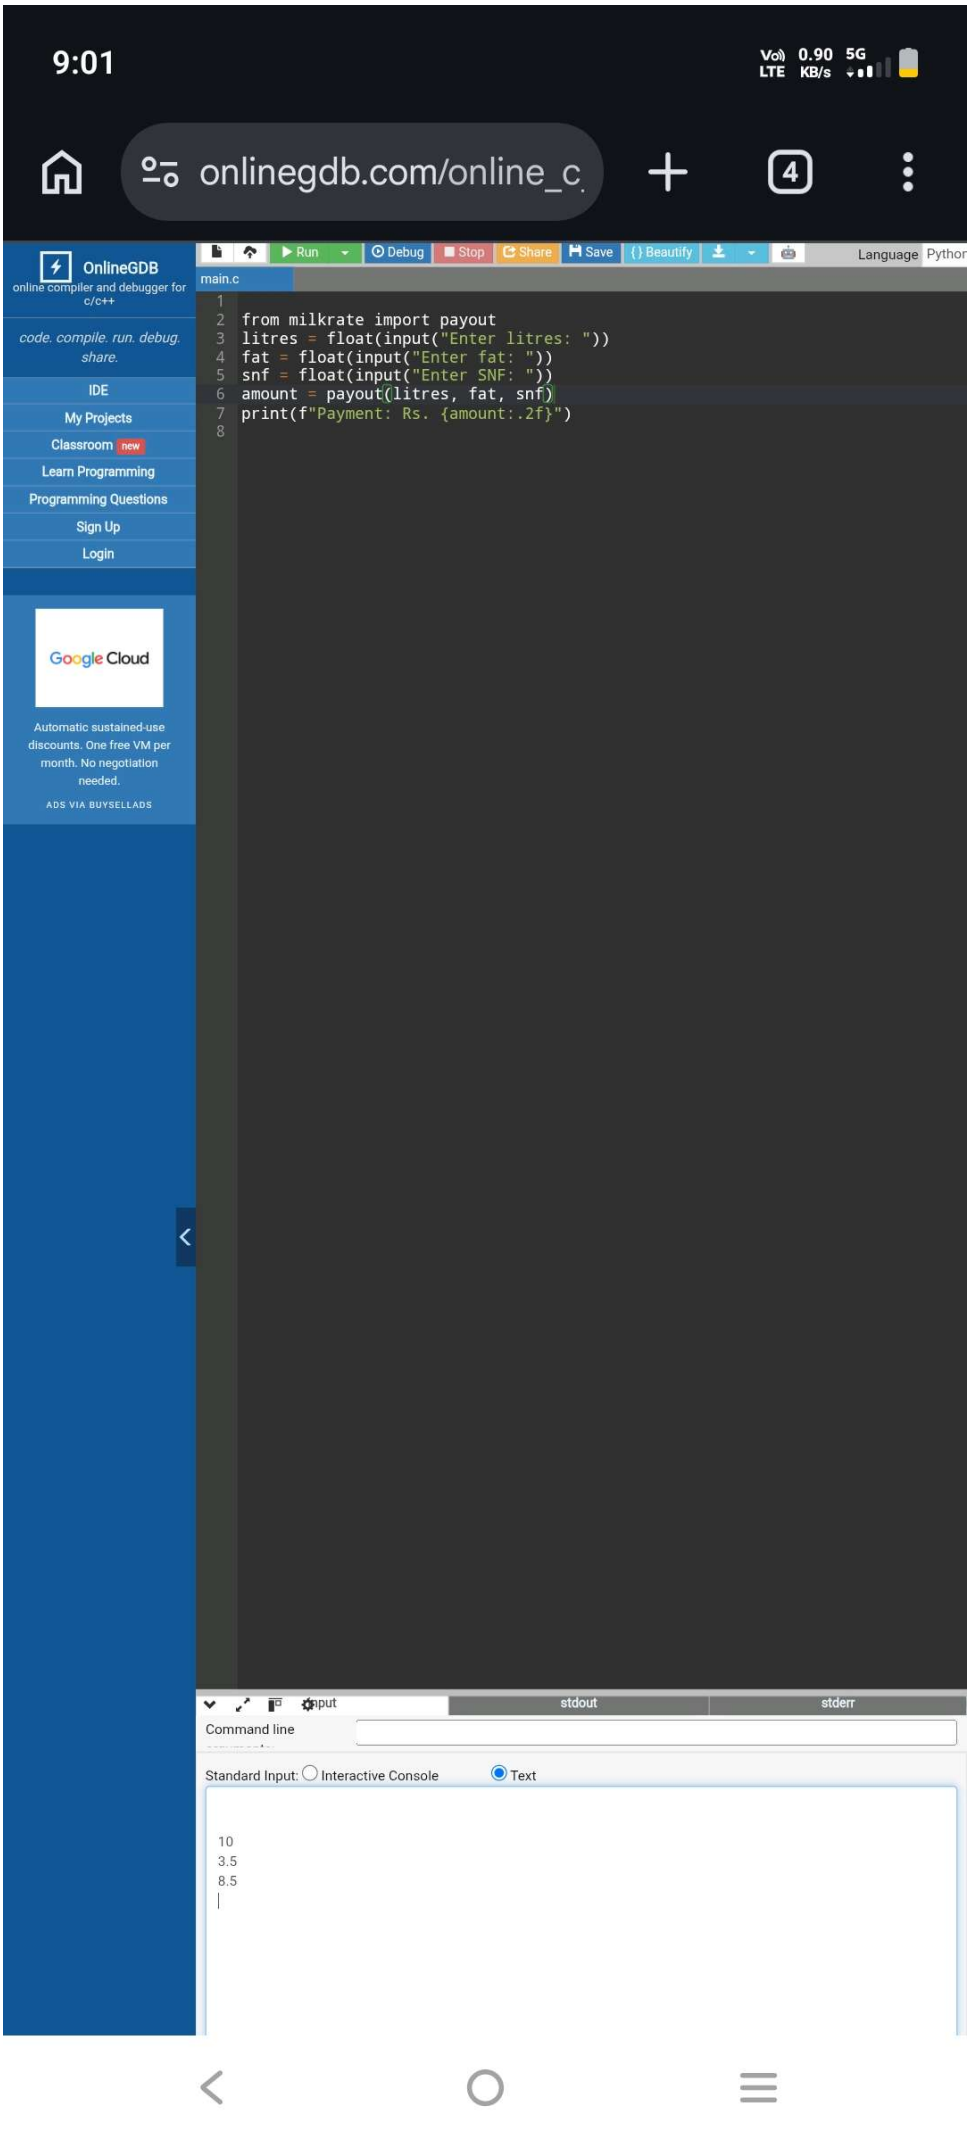

8:50
onlinegdb.com/online_c
OnlineGDB
IDE
Projects
Run
Debug
Stop
Share
Save
{ } Beautify
Language
main.py
BASE_RATE = 30.00
def rate(fat, snf):
return BASE_RATE + (fat - 3.5) * 4 + (snf - 8.5) * 3
def payout(litres, fat, snf):
return round(litres * rate(fat, snf), 2)
def total(payments):
return round(sum(payments), 2)
payments = []
n = int(input("Enter number of farmers: "))
for i in range(n):
litres = float(input("Enter litres: "))
fat = float(input("Enter fat: "))
snf = float(input("Enter SNF: "))
amount = payout(litres, fat, snf)
print("Payment: Rs.", format(amount, ".2f"))
payments.append(amount)
print("Total payment: Rs.", format(total(payments), ".2f"))
stdout
stderr
Command line
Standard Input:
Interactive Console
Text

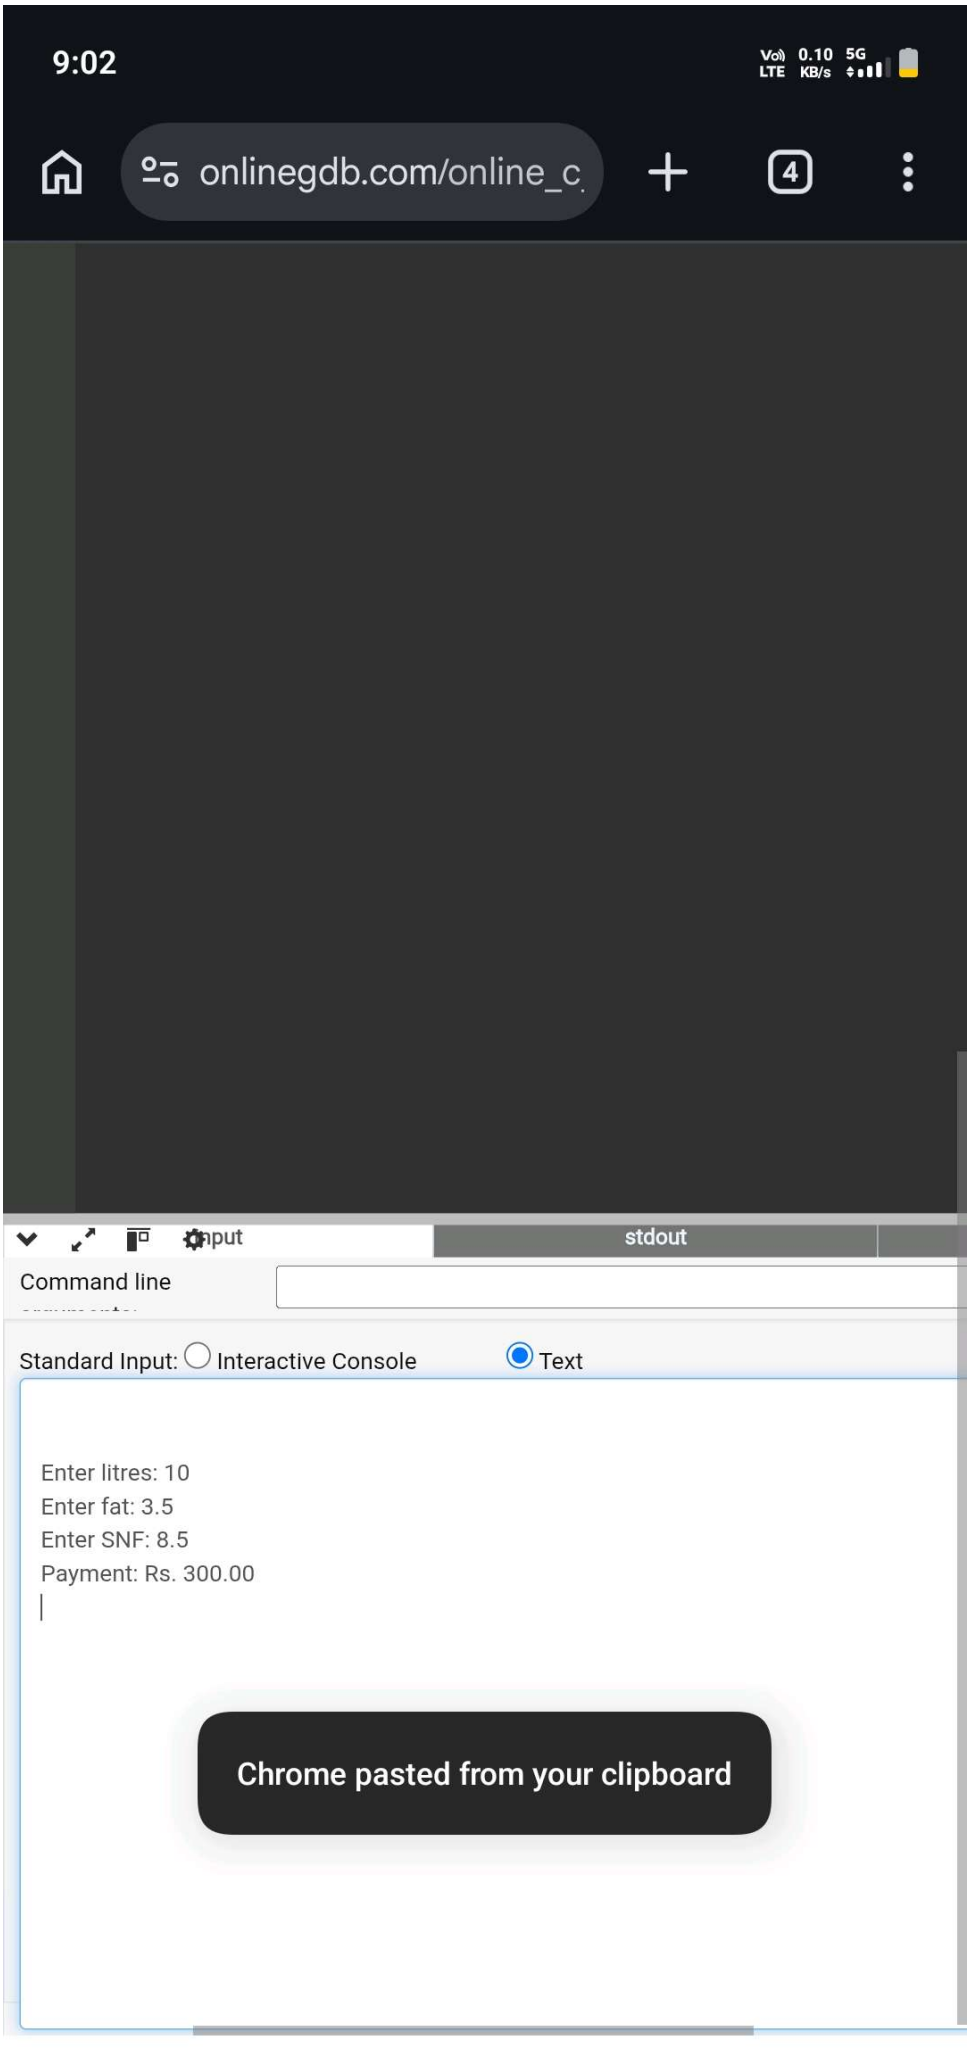

8:51
onlinegdb.com/online_c
stdout
Command line
Standard Input: Interactive Console Text
2
10
3.5
8.5
5
4.0
8.5
Chrome pasted from your clipboard

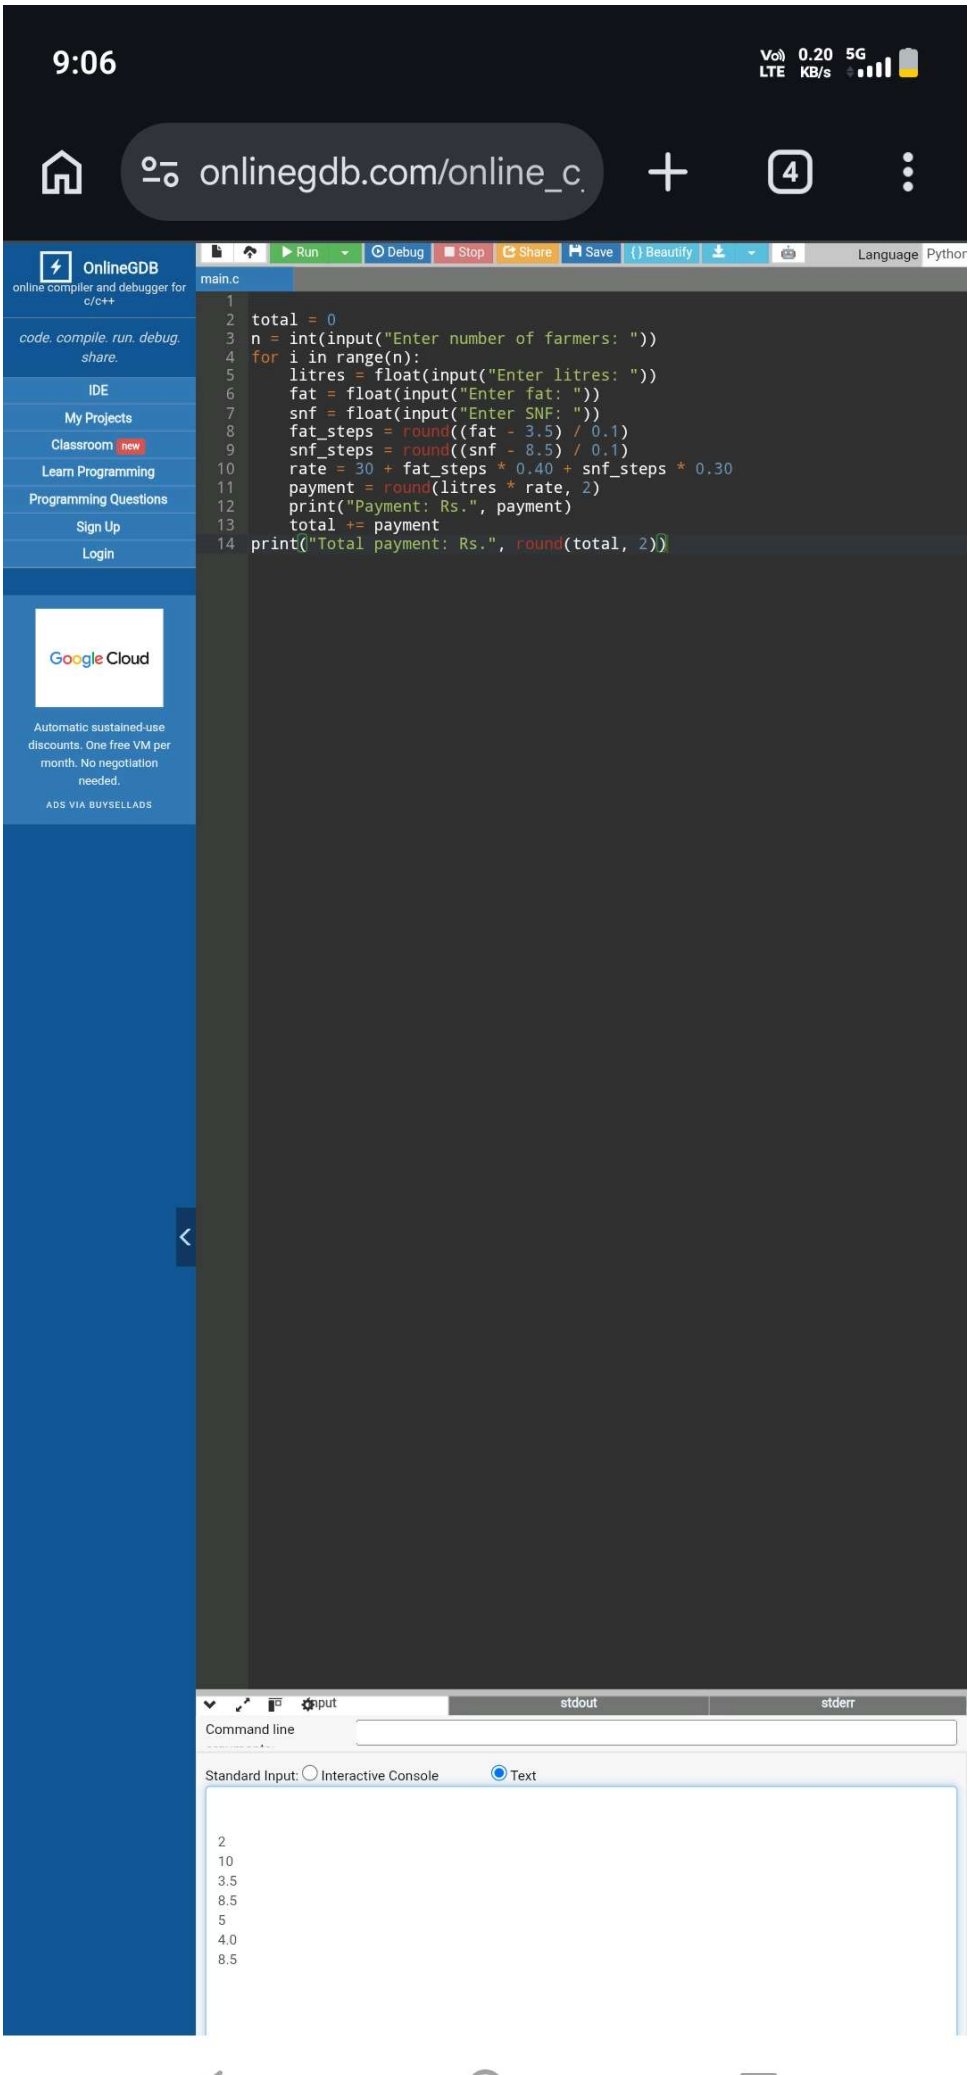

8:51
onlinegdb.com/online_c
stdout
Command line
Standard Input: Interactive Console Text
2
10
3.5
8.5
5
4.0
8.5
Enter number of farmers: 2
Enter litres: 10
Enter fat: 3.5
Enter SNF: 8.5
Payment: Rs. 300.00
Enter litres: 5
Enter fat: 4.0
Enter SNF: 8.5
Payment: Rs. 160.00
Total payment: Rs. 460.00

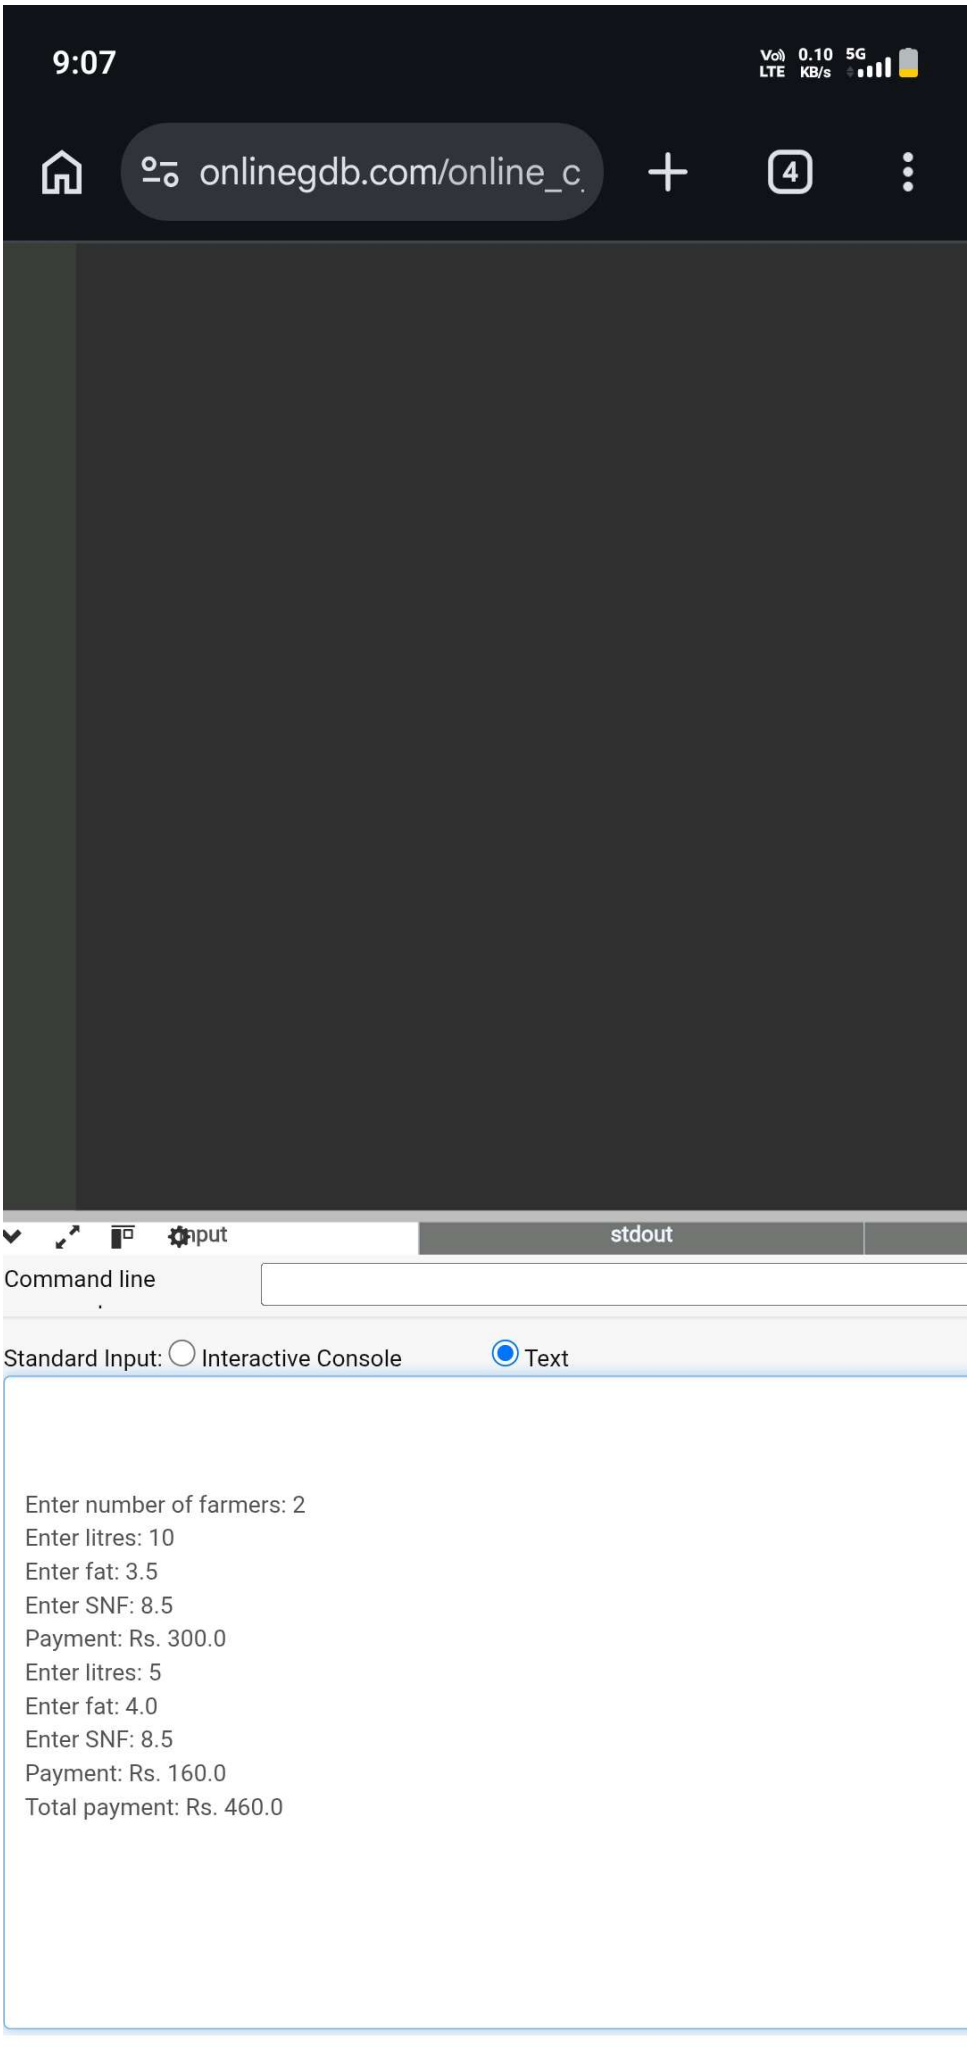

8:59
onlinegdb.com/online_c
OnlineGDB
online compiler and debugger for c/c++
code. compile. run. debug. share.
IDE
My Projects
Classroom new
Learn Programming
Programming Questions
Sign Up
Login
Google Cloud
Automatic sustained-use discounts. One free VM per month. No negotiation needed.
ADS VIA BUYSELLADS
Run
Debug
Stop
Share
Save
{} Beautify
Language
Pythor
main.c
BASE_RATE = 30.00
FAT_VALUE = 0.40
SNF_VALUE = 0.30
def rate_per_litre(fat, snf):
fat_steps = round((fat - 3.5) / 0.1)
snf_steps = round((snf - 8.5) / 0.1)
rate = BASE_RATE + fat_steps * FAT_VALUE + snf_steps * SNF_VALUE
return round(rate, 2)
def payout(litres, fat, snf):
rate = rate_per_litre(fat, snf)
return round(litres * rate, 2)
if __name__ == "__main__":
for litres, fat, snf in [(10, 3.5, 8.5),
(8.5, 4.2, 8.7),
(12, 3.1, 8.3)]:
rate = rate_per_litre(fat, snf)
amount = payout(litres, fat, snf)
print(f"{litres} L fat {fat} SNF {snf} rate {rate:.2f} pay {amount:.
input
Command line
Standard Input: Interactive Console Text
Trade Global Indices
Your Trading Edge
Leverage up to 1:200
Tight Spreads
Start Trading
Trading derivatives involves high risk to your capital.

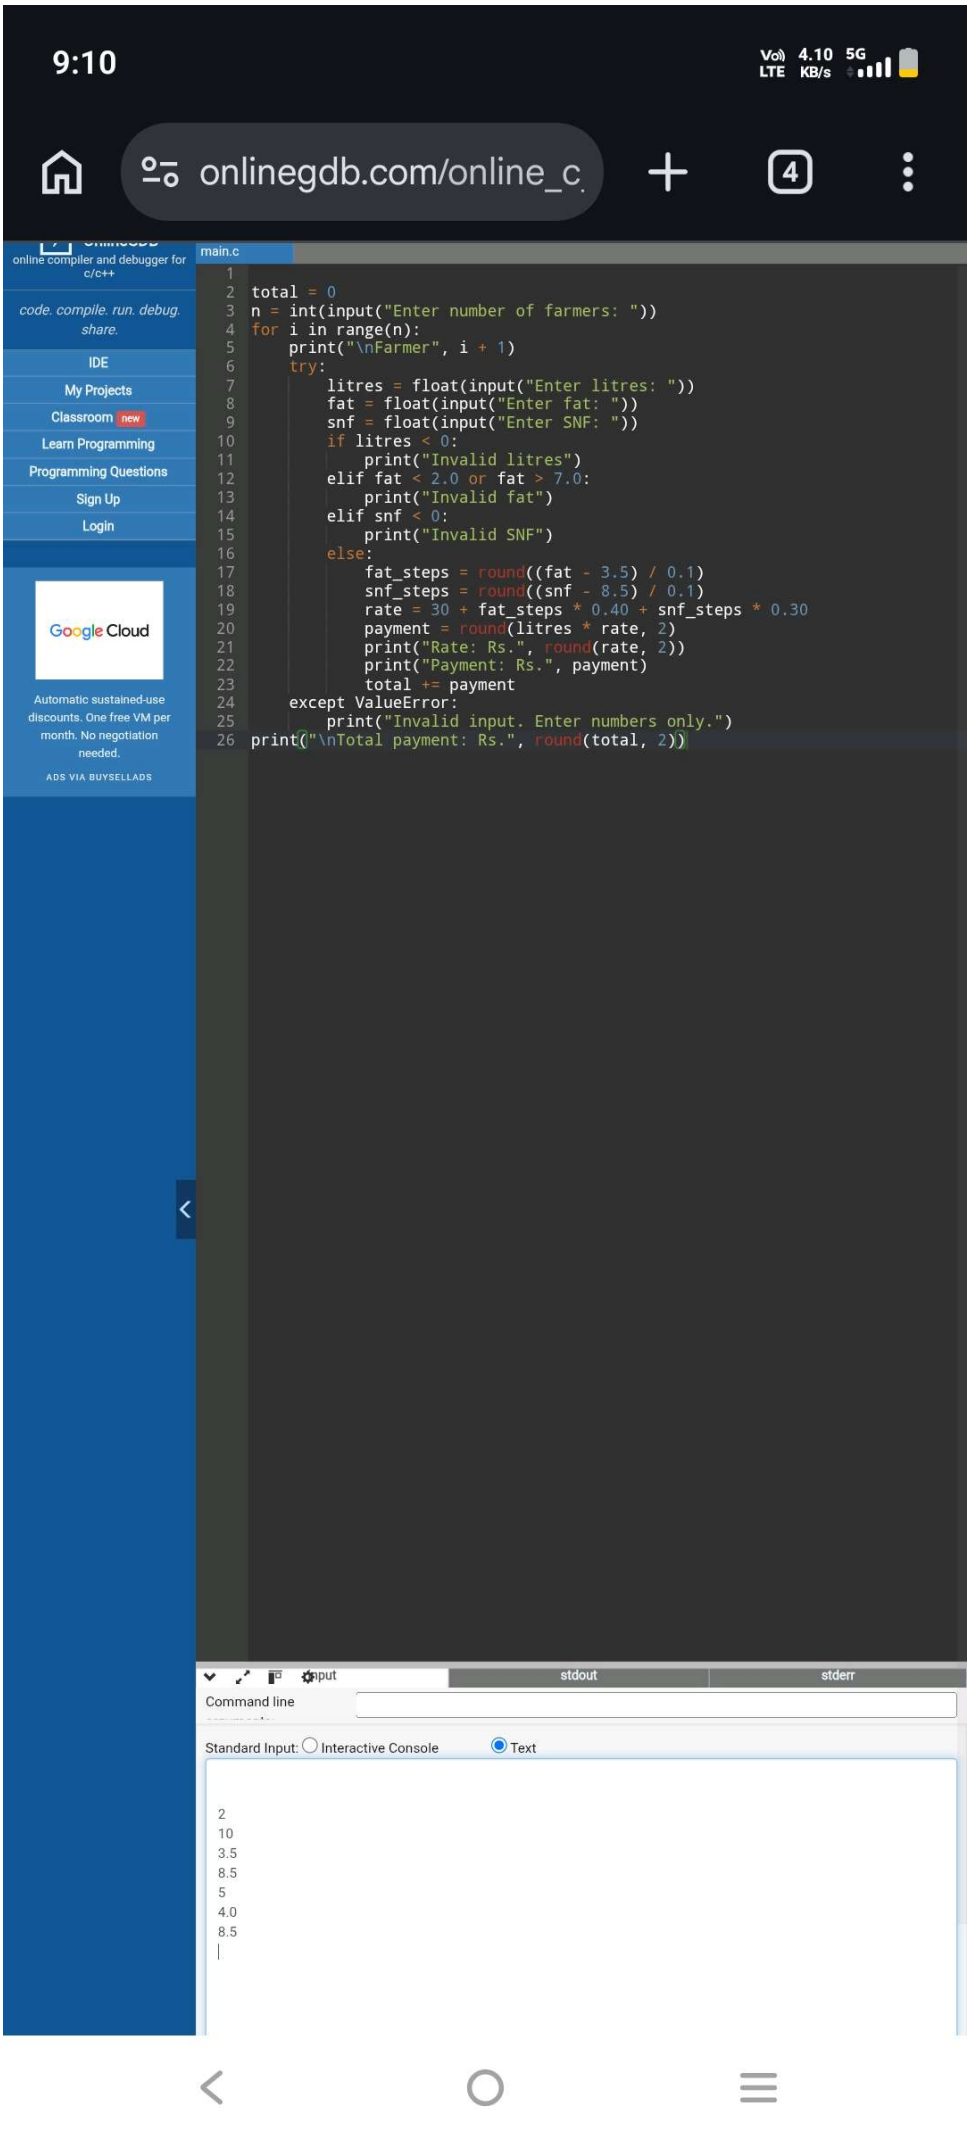

9:00
onlinegdb.com/online_c
stdout
Command line
Standard Input: Interactive Console Text
10 L fat 3.5 SNF 8.5 rate 30.00 pay 300.00
8.5 L fat 4.2 SNF 8.7 rate 33.40 pay 283.90
12 L fat 3.1 SNF 8.3 rate 27.80 pay 333.60
Chrome pasted from your clipboard
?123

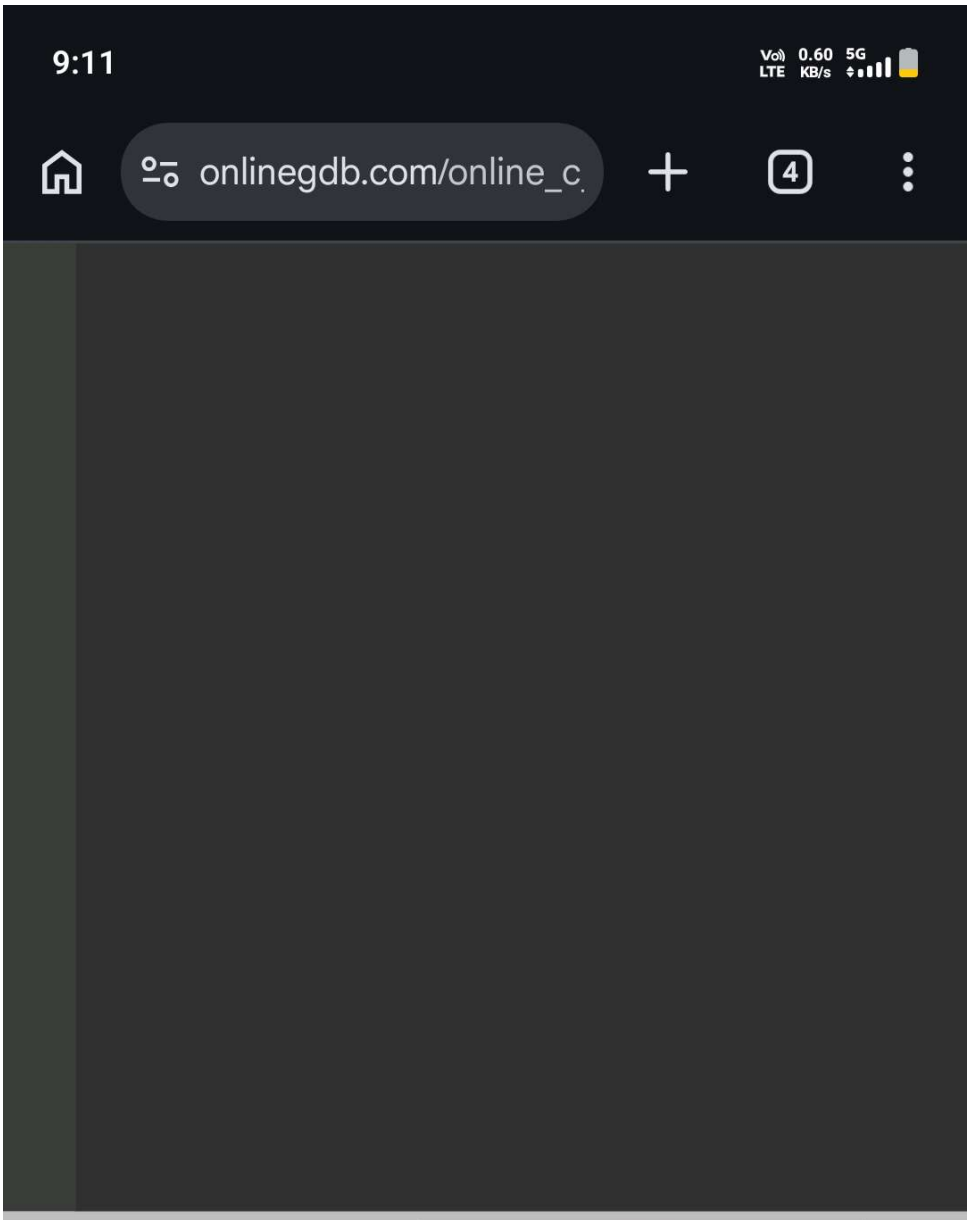

9:01
onlinegdb.com/online_c
OnlineGDB
online compiler and debugger for c/c++
code. compile. run. debug. share.
IDE
My Projects
Classroom new
Learn Programming
Programming Questions
Sign Up
Login
Google Cloud
Automatic sustained-use discounts. One free VM per month. No negotiation needed.
ADS VIA BUYSELLADS
Run
Debug
Stop
Share
Save
{} Beautify
Language
Pythor
main.c
from milkrate import payout
litres = float(input("Enter litres: "))
fat = float(input("Enter fat: "))
snf = float(input("Enter SNF: "))
amount = payout(litres, fat, snf)
print(f"Payment: Rs. {amount:.2f}")
stdout
stderr
Command line
Standard Input: Interactive Console Text
10
3.5
8.5

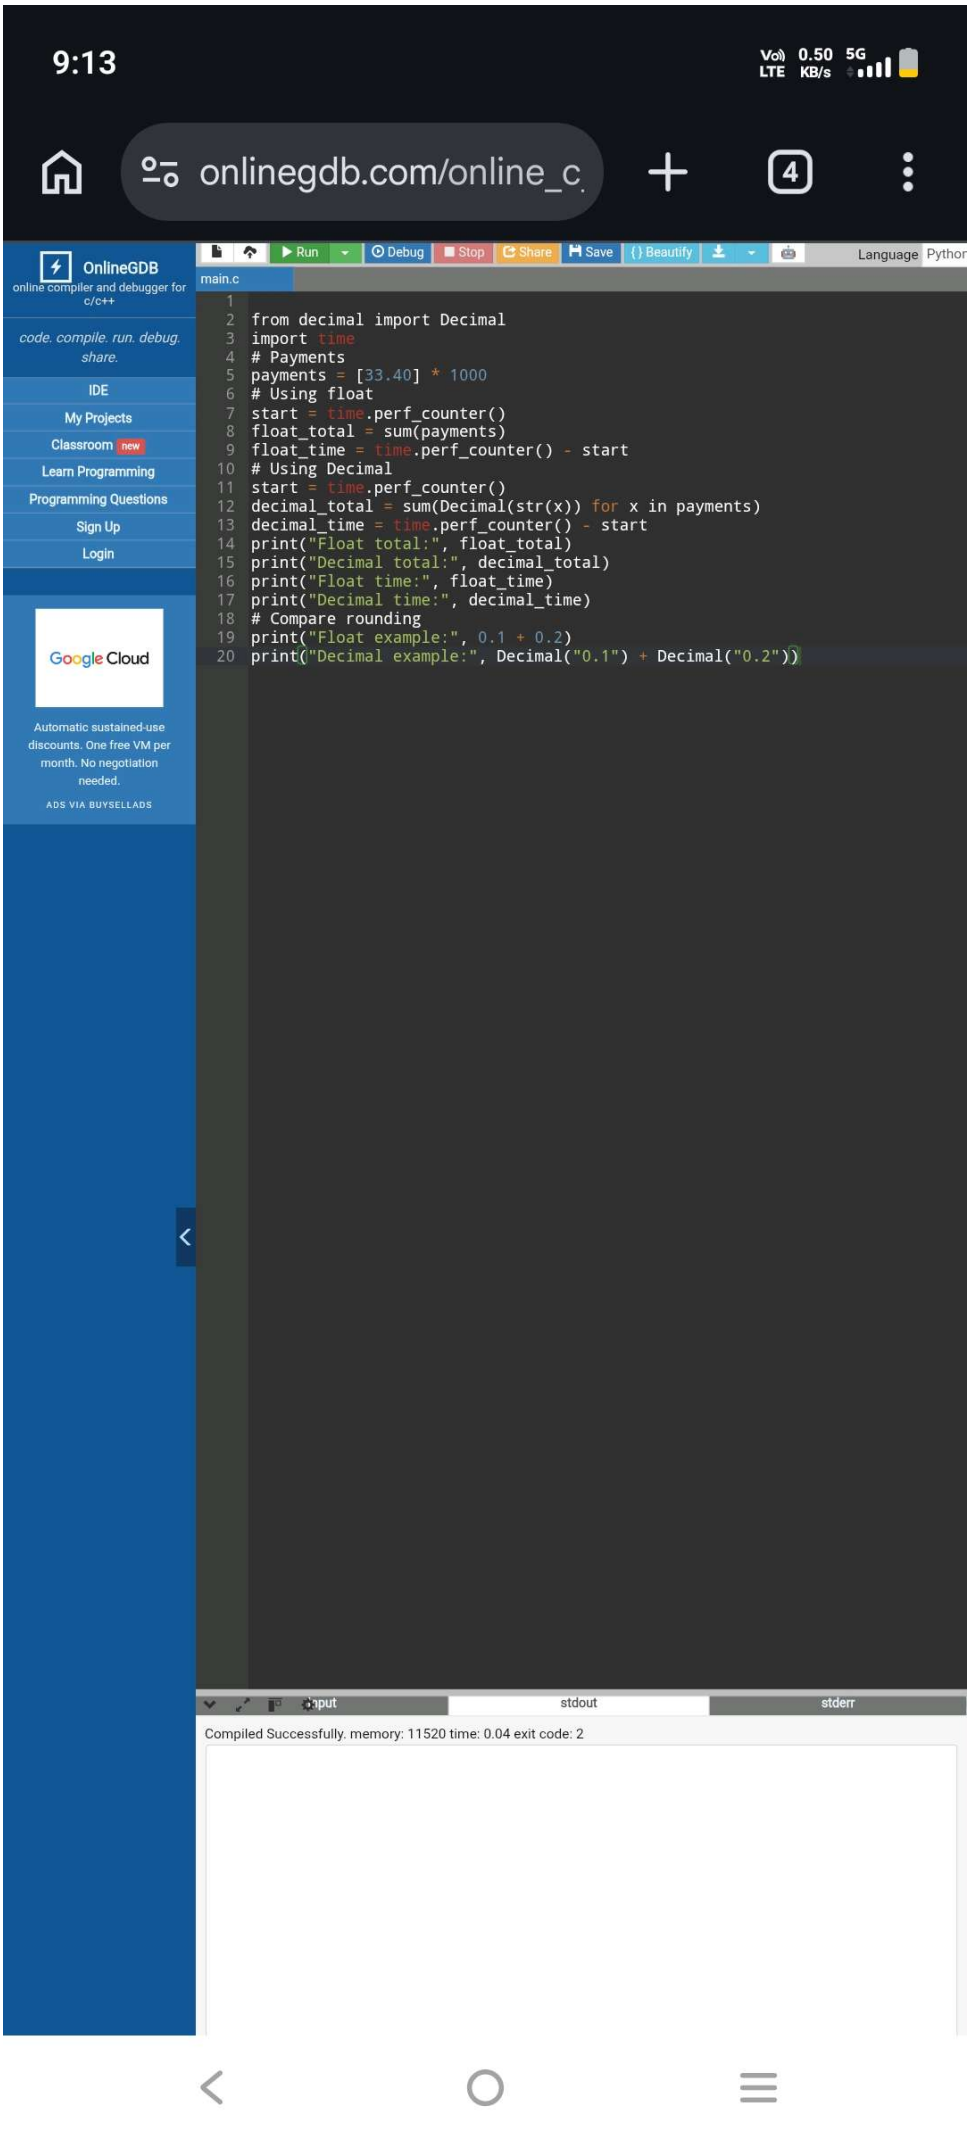

9:02
onlinegdb.com/online_c
stdout
Command line
Standard Input:
Interactive Console
Text
Enter litres: 10
Enter fat: 3.5
Enter SNF: 8.5
Payment: Rs. 300.00
Chrome pasted from your clipboard

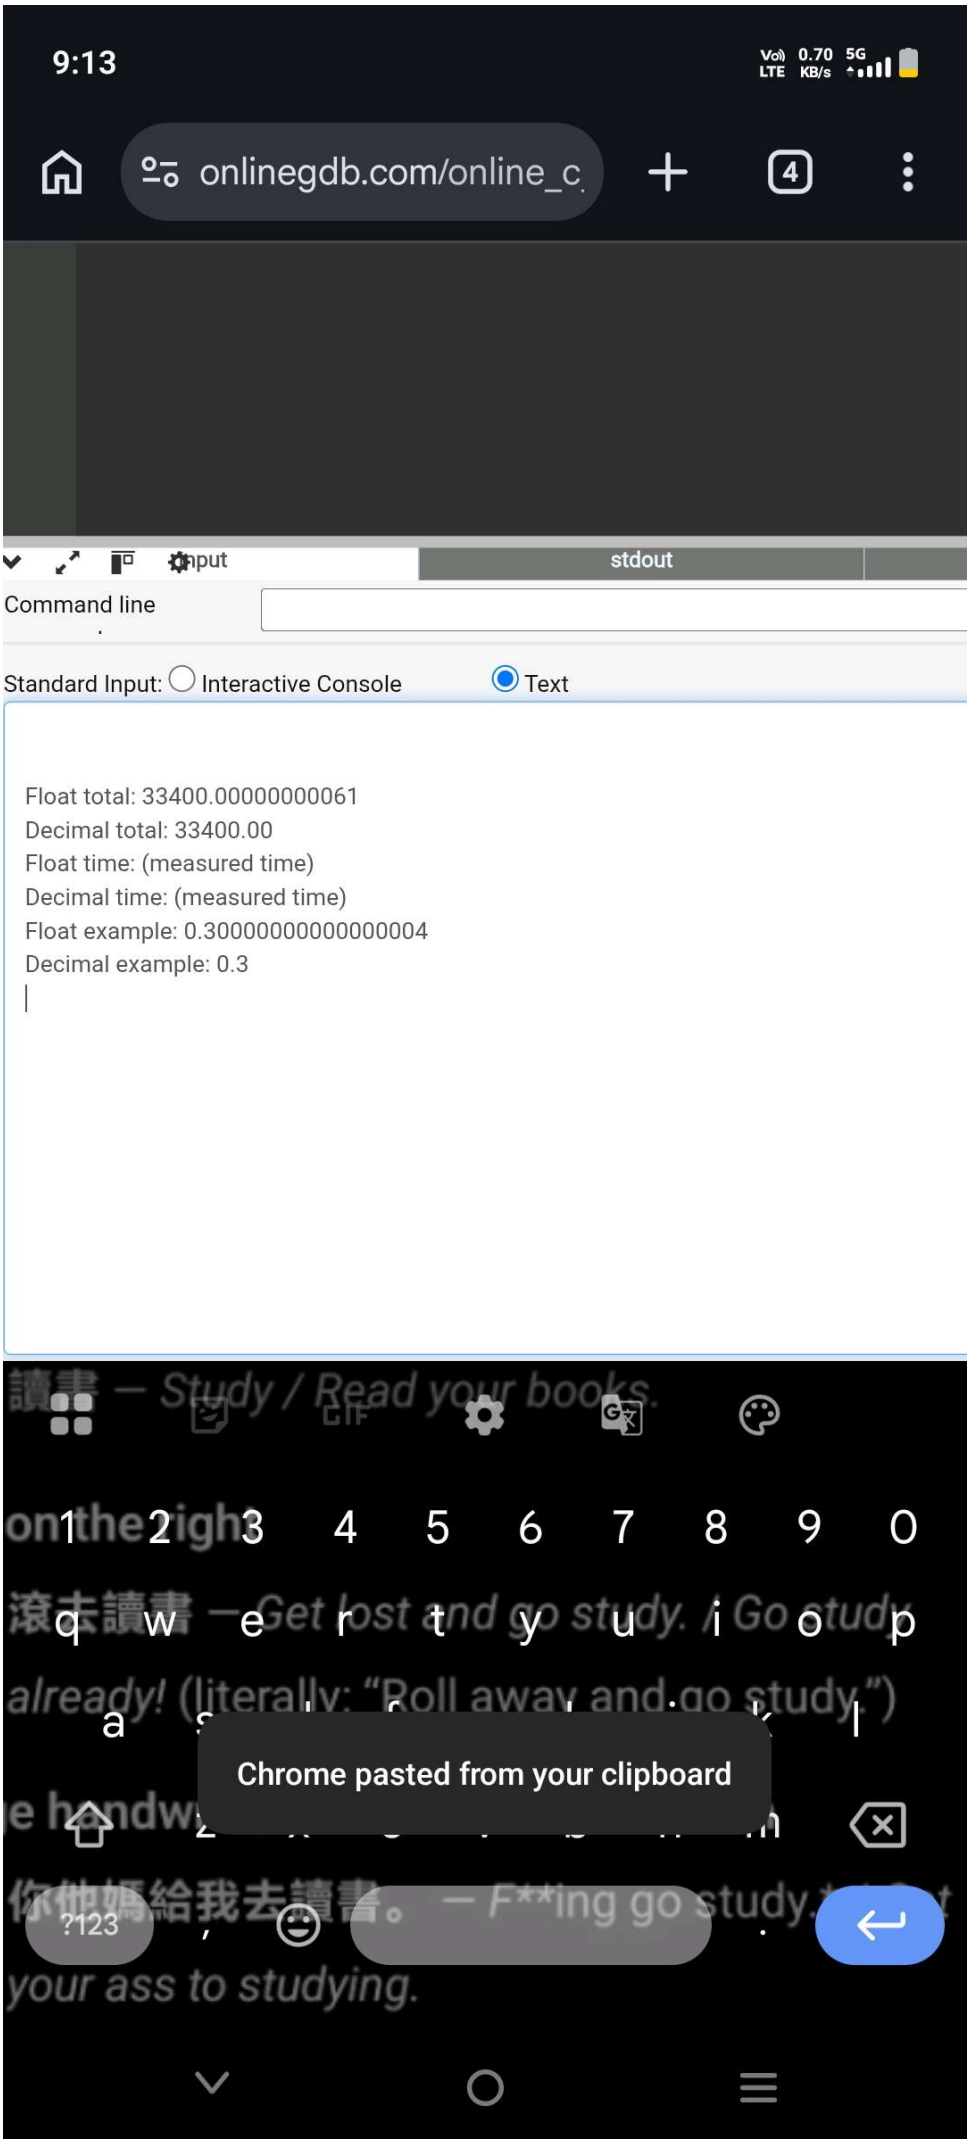

9:06
onlinegdb.com/online_c
OnlineGDB
online compiler and debugger for c/c++
code. compile. run. debug. share.
IDE
My Projects
Classroom new
Learn Programming
Programming Questions
Sign Up
Login
Google Cloud
Automatic sustained-use discounts. One free VM per month. No negotiation needed.
ADS VIA BUYSELLADS
Run
Debug
Stop
Share
Save
{} Beautify
Language
Pythor
main.c
total = 0
n = int(input("Enter number of farmers: "))
for i in range(n):
litres = float(input("Enter litres: "))
fat = float(input("Enter fat: "))
snf = float(input("Enter SNF: "))
fat_steps = round((fat - 3.5) / 0.1)
snf_steps = round((snf - 8.5) / 0.1)
rate = 30 + fat_steps * 0.40 + snf_steps * 0.30
payment = round(litres * rate, 2)
print("Payment: Rs.", payment)
total += payment
print("Total payment: Rs.", round(total, 2))
stdout
stderr
Command line
Standard Input: Interactive Console Text
2
10
3.5
8.5
5
4.0
8.5

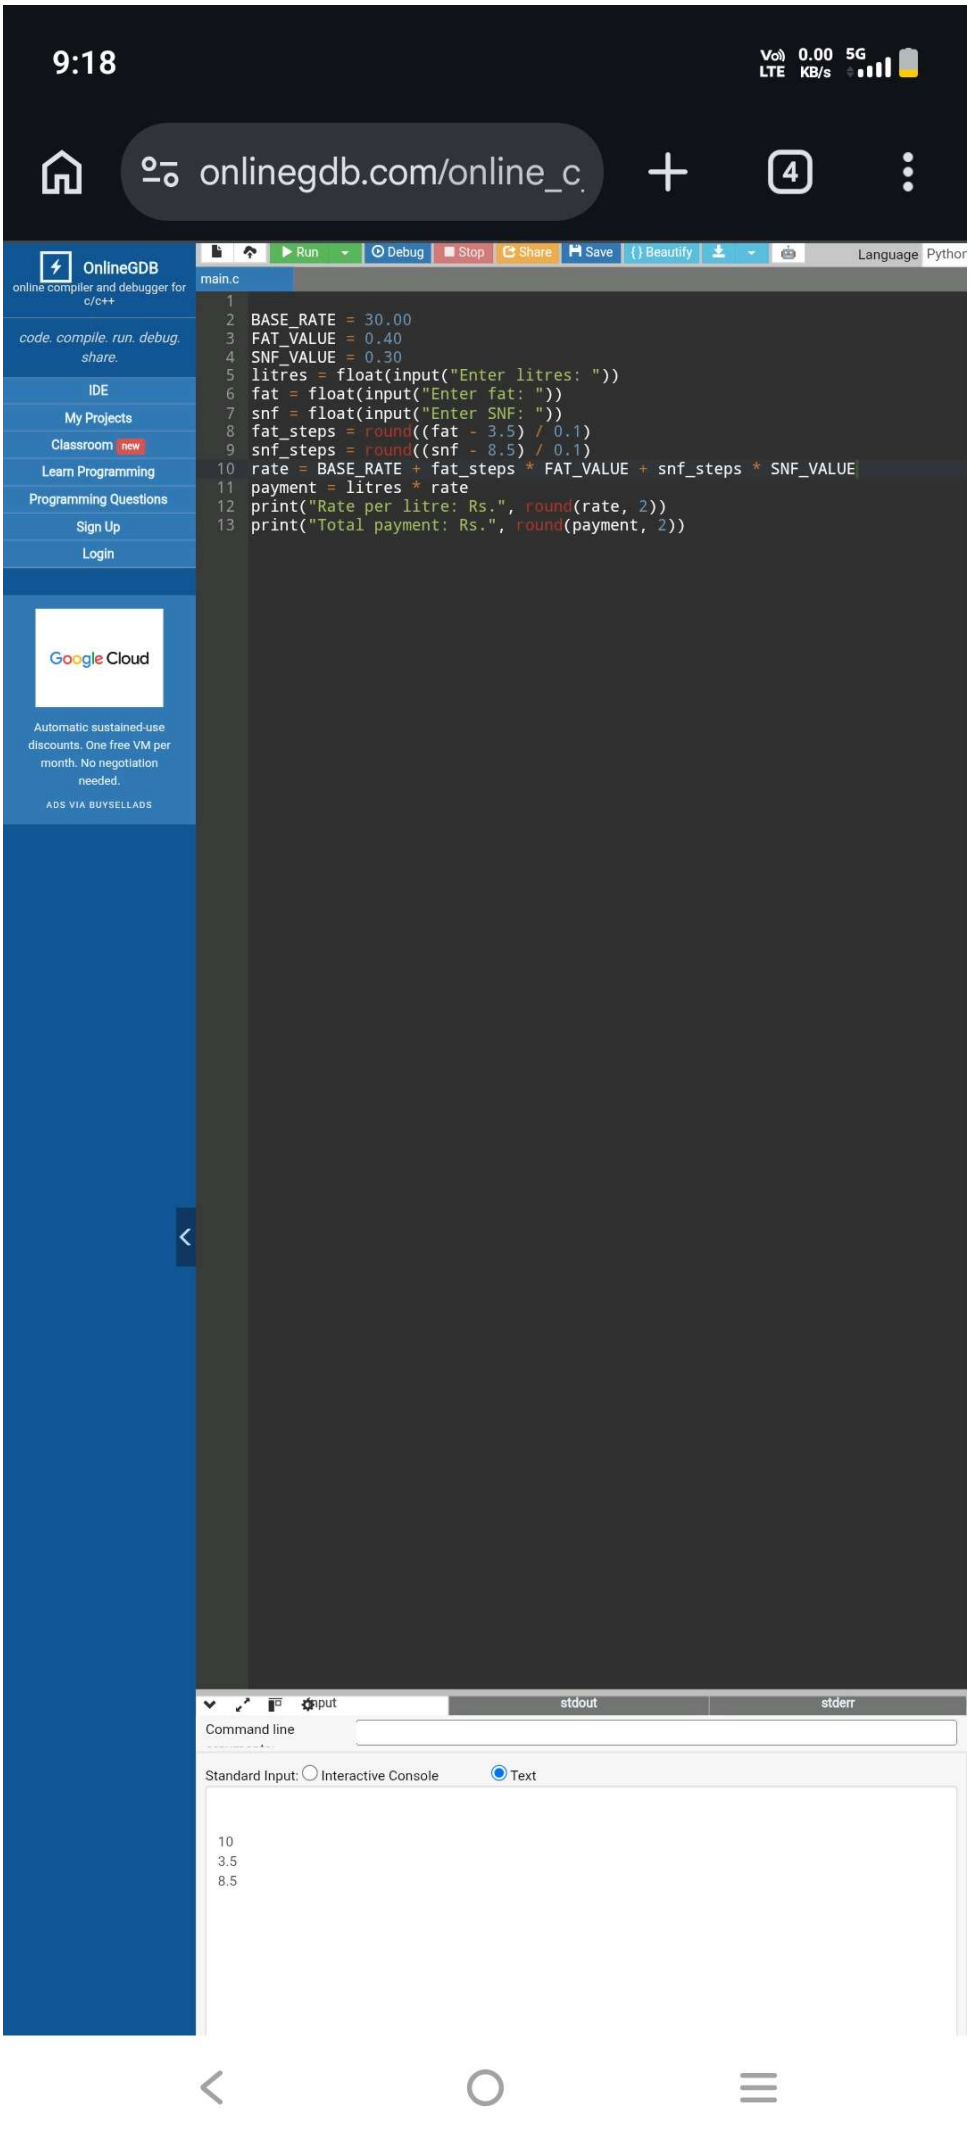

9:07
onlinegdb.com/online_c
stdout
Command line
Standard Input: Interactive Console Text
Enter number of farmers: 2
Enter litres: 10
Enter fat: 3.5
Enter SNF: 8.5
Payment: Rs. 300.0
Enter litres: 5
Enter fat: 4.0
Enter SNF: 8.5
Payment: Rs. 160.0
Total payment: Rs. 460.0

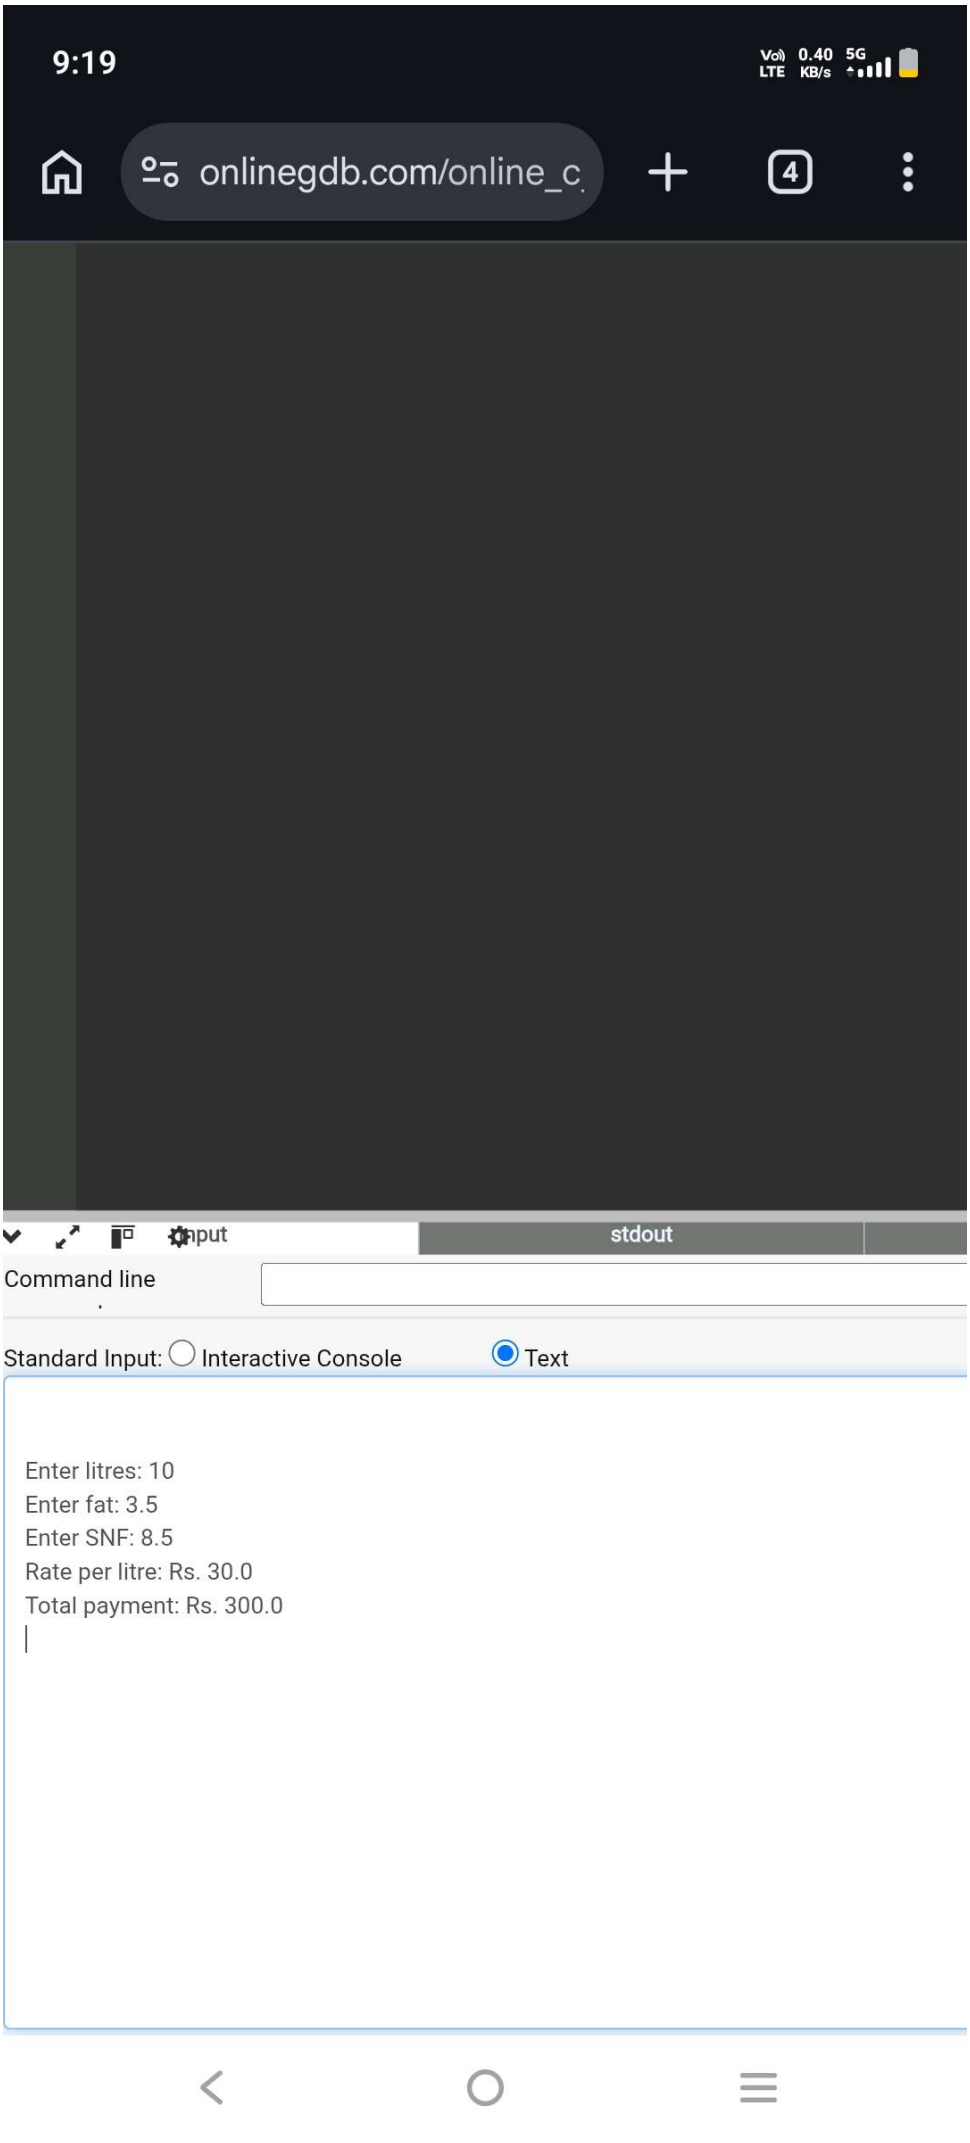

9:10
4.10 KB/s
5G
LTE
onlinegdb.com/online_c
online compiler and debugger for c/c++
code. compile. run. debug. share.
IDE
My Projects
Classroom new
Learn Programming
Programming Questions
Sign Up
Login
Google Cloud
Automatic sustained-use discounts. One free VM per month. No negotiation needed.
ADS VIA BUYSELLADS
main.c
total = 0
n = int(input("Enter number of farmers: "))
for i in range(n):
print("\nFarmer", i + 1)
try:
litres = float(input("Enter litres: "))
fat = float(input("Enter fat: "))
snf = float(input("Enter SNF: "))
if litres < 0:
print("Invalid litres")
elif fat < 2.0 or fat > 7.0:
print("Invalid fat")
elif snf < 0:
print("Invalid SNF")
else:
fat_steps = round((fat - 3.5) / 0.1)
snf_steps = round((snf - 8.5) / 0.1)
rate = 30 + fat_steps * 0.40 + snf_steps * 0.30
payment = round(litres * rate, 2)
print("Rate: Rs.", round(rate, 2))
print("Payment: Rs.", payment)
total += payment
except ValueError:
print("Invalid input. Enter numbers only.")
print("\nTotal payment: Rs.", round(total, 2))
stdout
stderr
Command line
Standard Input: Interactive Console Text
2
10
3.5
8.5
5
4.0
8.5

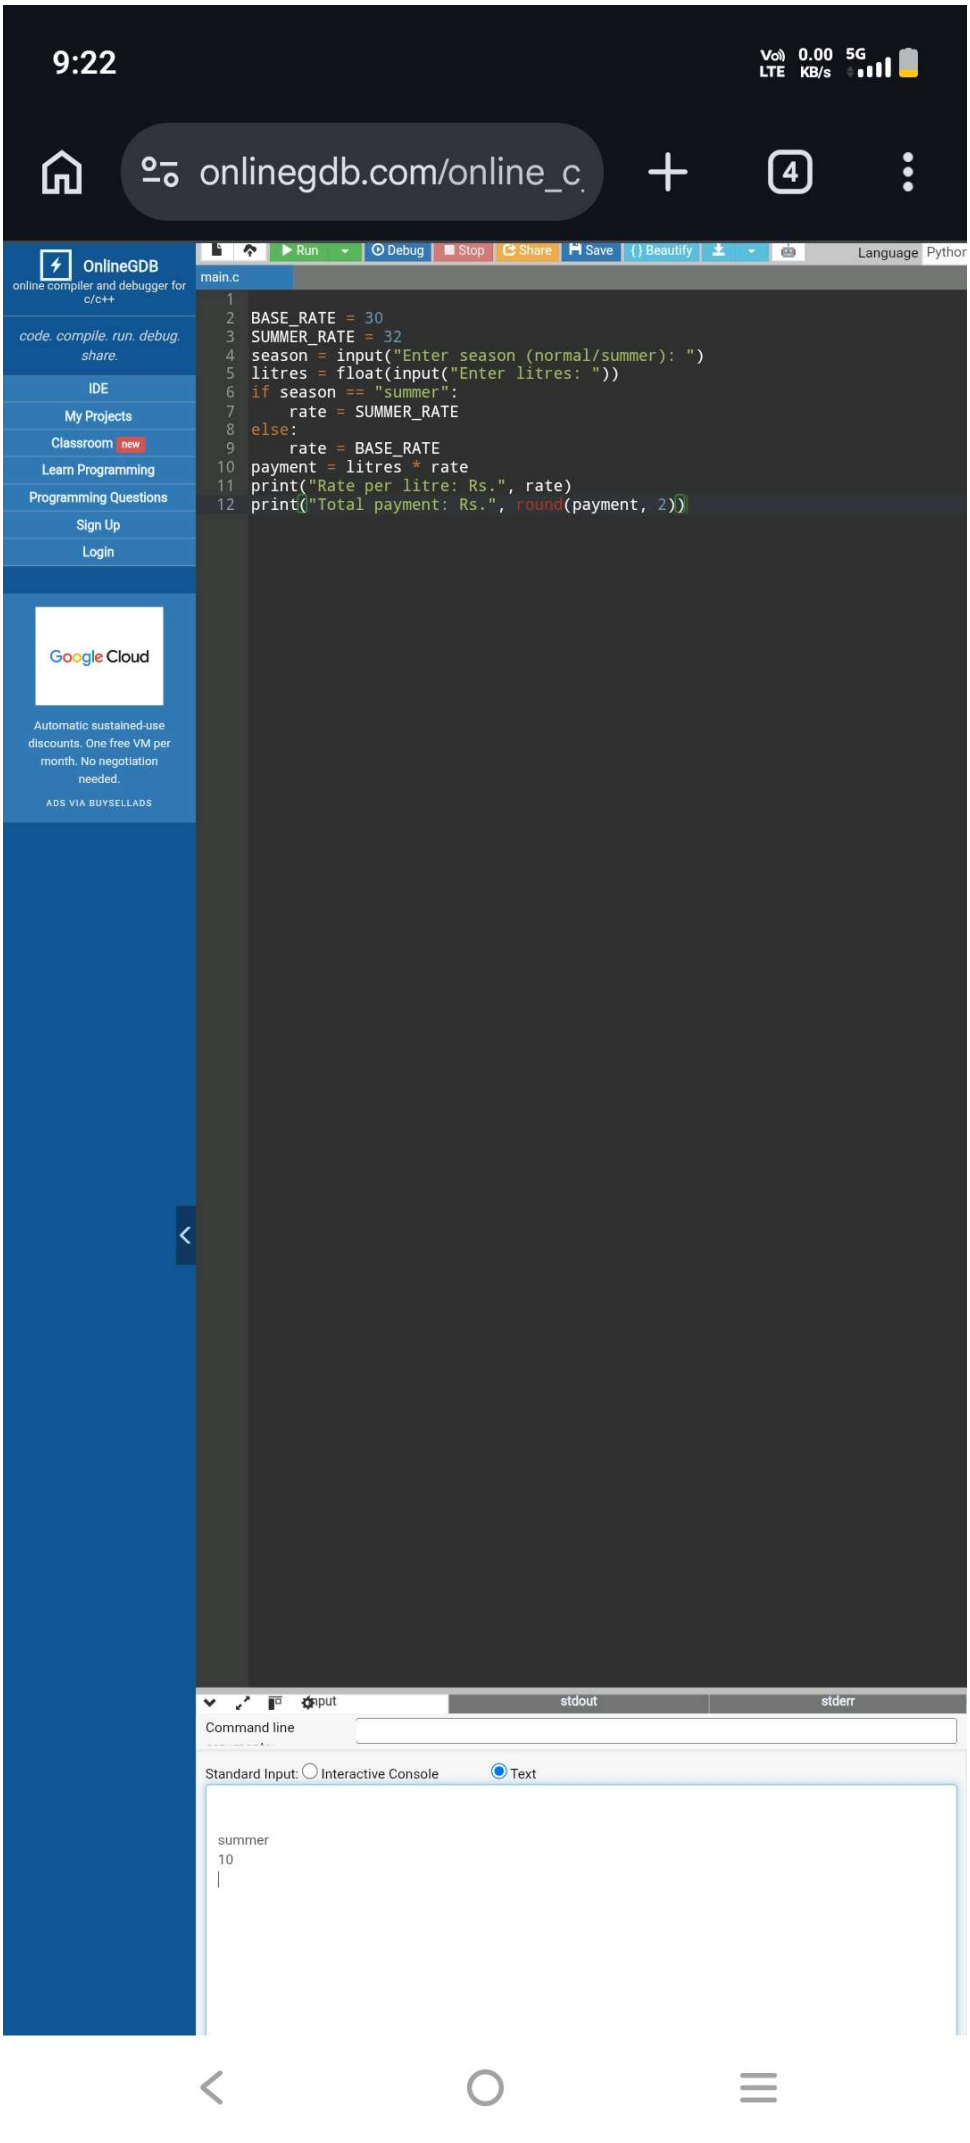

9:11
onlinegdb.com/online_c
stdout
Command line
Standard Input: Interactive Console Text
Enter number of farmers: 2
Farmer 1
Enter litres: 10
Enter fat: 3.5
Enter SNF: 8.5
Rate: Rs. 30.0
Payment: Rs. 300.0
Farmer 2
Enter litres: 5
Enter fat: 4.0
Enter SNF: 8.5
Rate: Rs. 32.0
Payment: Rs. 160.0
Total payment: Rs. 460.0

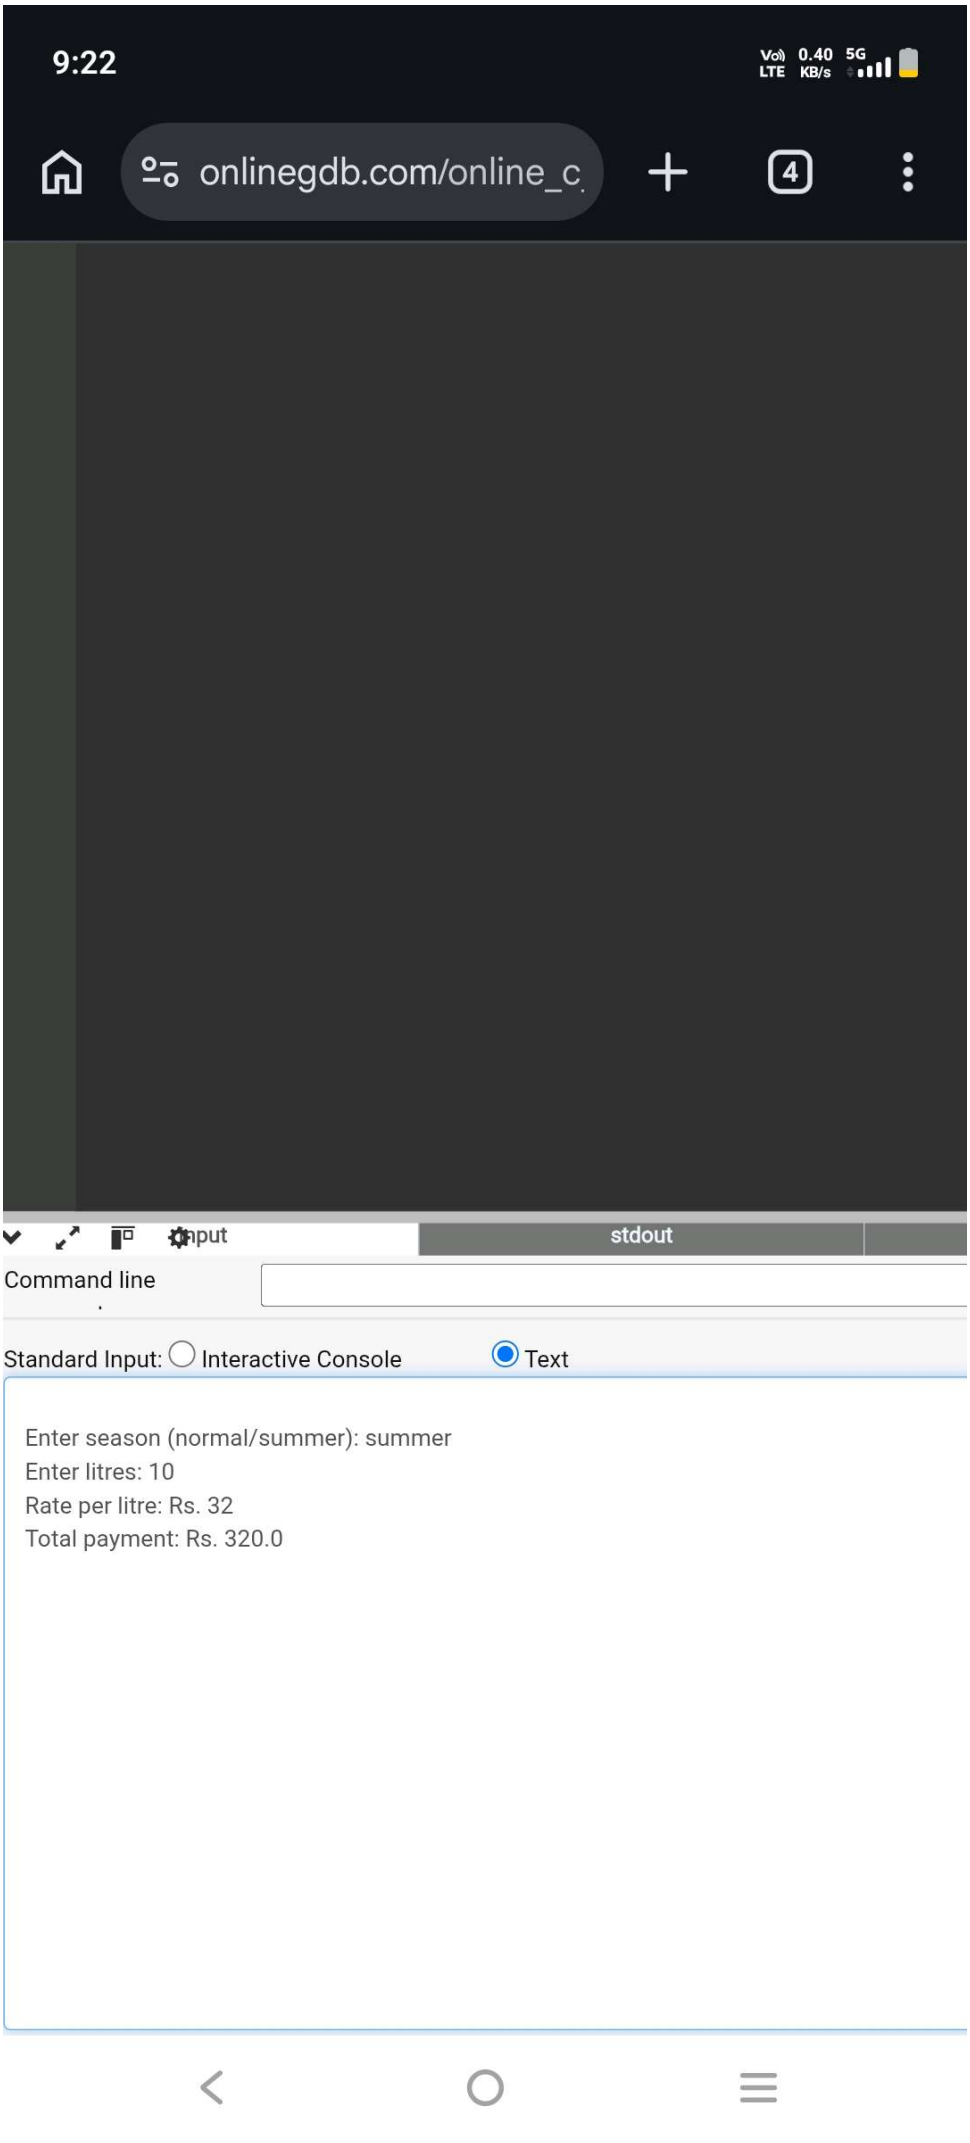

9:13
Vo) LTE 0.50 KB/s 5G
onlinegdb.com/online_c
OnlineGDB
online compiler and debugger for c/c++
code. compile. run. debug. share.
IDE
My Projects
Classroom new
Learn Programming
Programming Questions
Sign Up
Login
Google Cloud
Automatic sustained-use discounts. One free VM per month. No negotiation needed.
ADS VIA BUYSELLADS
Run
Debug
Stop
Share
Save
{} Beautify
Language
Pythor
main.c
1 from decimal import Decimal
2 import time
3 # Payments
4 payments = [33.40] * 1000
5 # Using float
6 start = time.perf_counter()
7 float_total = sum(payments)
8 float_time = time.perf_counter() - start
9 # Using Decimal
10 start = time.perf_counter()
11 decimal_total = sum(Decimal(str(x)) for x in payments)
12 decimal_time = time.perf_counter() - start
13 print("Float total:", float_total)
14 print("Decimal total:", decimal_total)
15 print("Float time:", float_time)
16 print("Decimal time:", decimal_time)
17 # Compare rounding
18 print("Float example:", 0.1 + 0.2)
19 print("Decimal example:", Decimal("0.1") + Decimal("0.2"))
stdout
stderr
Compiled Successfully. memory: 11520 time: 0.04 exit code: 2


9:13
onlinegdb.com/online_c
stdout
Command line
Standard Input: Interactive Console Text
Float total: 33400.00000000061
Decimal total: 33400.00
Float time: (measured time)
Decimal time: (measured time)
Float example: 0.30000000000000004
Decimal example: 0.3
Chrome pasted from your clipboard


9:18
onlinegdb.com/online_c
OnlineGDB
online compiler and debugger for c/c++
code. compile. run. debug. share.
IDE
My Projects
Classroom new
Learn Programming
Programming Questions
Sign Up
Login
Google Cloud
Automatic sustained-use discounts. One free VM per month. No negotiation needed.
ADS VIA BUYSELLADS
Run
Debug
Stop
Share
Save
{} Beautify
Language
Pythor
main.c
1 BASE_RATE = 30.00
2 FAT_VALUE = 0.40
3 SNF_VALUE = 0.30
4 litres = float(input("Enter litres: "))
5 fat = float(input("Enter fat: "))
6 snf = float(input("Enter SNF: "))
7 fat_steps = round((fat - 3.5) / 0.1)
8 snf_steps = round((snf - 8.5) / 0.1)
9 rate = BASE_RATE + fat_steps * FAT_VALUE + snf_steps * SNF_VALUE
10 payment = litres * rate
11 print("Rate per litre: Rs.", round(rate, 2))
12 print("Total payment: Rs.", round(payment, 2))
13
stdout
stderr
Command line
Standard Input: Interactive Console Text
10
3.5
8.5


9:19
onlinegdb.com/online_c
stdout
Command line
Standard Input: Interactive Console Text
Enter litres: 10
Enter fat: 3.5
Enter SNF: 8.5
Rate per litre: Rs. 30.0
Total payment: Rs. 300.0


9:22
onlinegdb.com/online_c
OnlineGDB
online compiler and debugger for c/c++
code. compile. run. debug. share.
IDE
My Projects
Classroom new
Learn Programming
Programming Questions
Sign Up
Login
Google Cloud
Automatic sustained-use discounts. One free VM per month. No negotiation needed.
ADS VIA BUYSELLADS
Run
Debug
Stop
Share
Save
{} Beautify
Language
Pythor
main.c
BASE_RATE = 30
SUMMER_RATE = 32
season = input("Enter season (normal/summer): ")
litres = float(input("Enter litres: "))
if season == "summer":
rate = SUMMER_RATE
else:
rate = BASE_RATE
payment = litres * rate
print("Rate per litre: Rs.", rate)
print("Total payment: Rs.", round(payment, 2))
stdout
stderr
Command line
Standard Input: Interactive Console Text
summer
10


9:22
onlinegdb.com/online_c
stdout
Command line
Standard Input: Interactive Console Text
Enter season (normal/summer): summer
Enter litres: 10
Rate per litre: Rs. 32
Total payment: Rs. 320.0