


OpenLDAP

<https://www.digitalocean.com/community/tutorials/how-to-install-and-configure-a-basic-ldap-server-on-an-ubuntu-12-04-vps>

```
sudo apt-get install slapd ldap-utils
```

```
sudo dpkg-reconfigure slapd
```

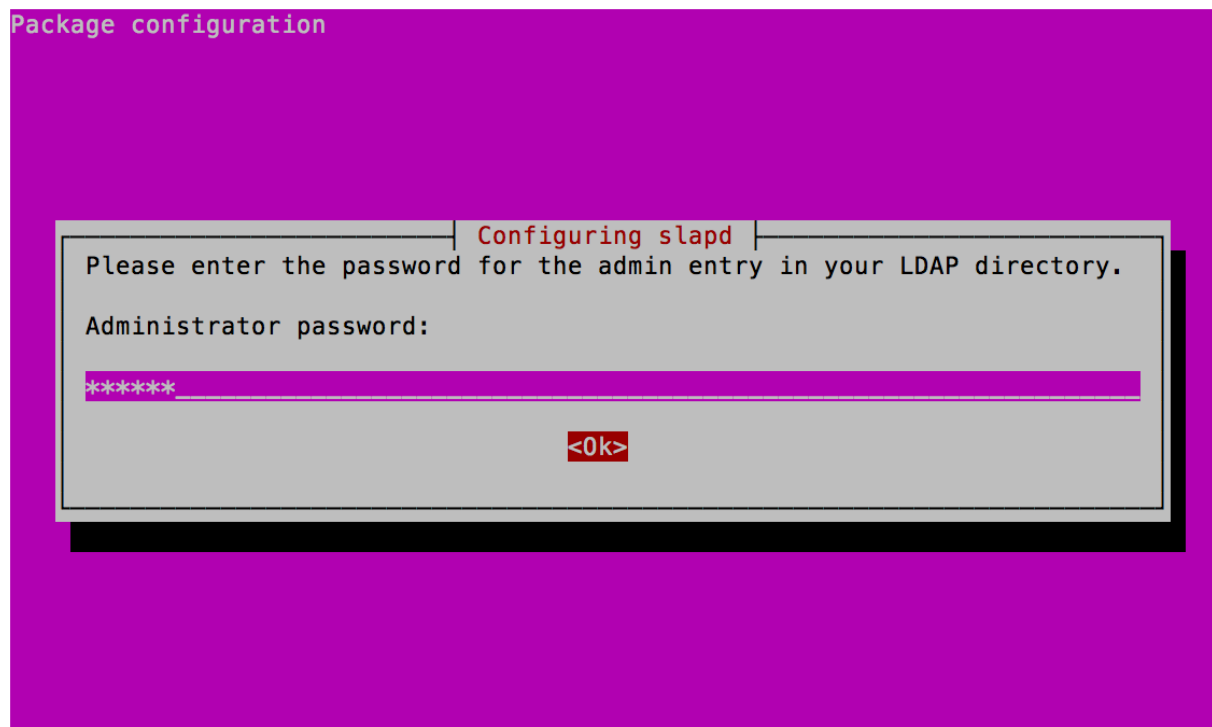

Package configuration

Configuring slapd

If you enable this option, no initial configuration or database will be created for you.

Omit OpenLDAP server configuration?

<Yes>

<No>

Configuring slapd

The DNS domain name is used to construct the base DN of the LDAP directory. For example, 'foo.example.org' will create the directory with 'dc=foo, dc=example, dc=org' as base DN.

DNS domain name:

ourtgm.org

<Ok>


Configuring slapd

Please enter the name of the organization to use in the base DN of your LDAP directory.

Organization name:

adlerkarickopec

<Ok>

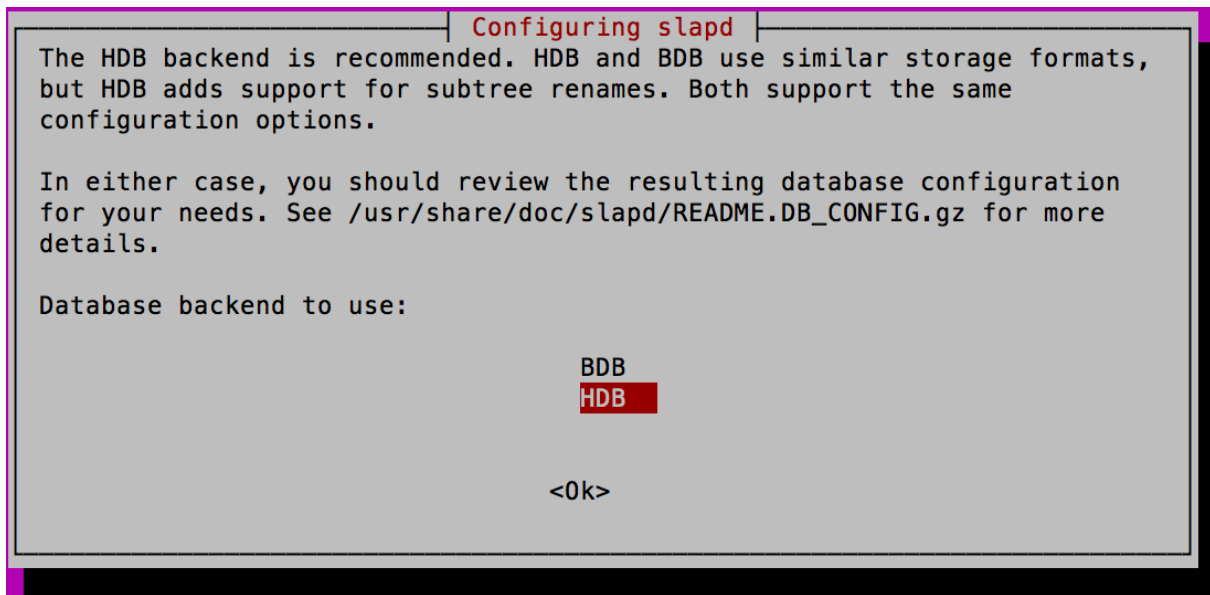

```
sudo apt-get install phpldapadmin
sudo nano /etc/phpldapadmin/config.php
```

```
$servers->setValue('server','host','domain_name_or_IP_address');
$servers->setValue('server','base',array('dc=ourtgmdc=org'));
$servers->setValue('login','bind_id','cn=admin,dc=ourtgmdc=org');
$config->custom->appearance['hide_template_warning'] = true;
```

Login LDAP mittels PHP

Create Organizational Units


Create Object

Server: **My LDAP Server** Container: **dc=ourtgmdc=org**

Select a template for the creation process

Templates:

<input type="radio"/> Courier Mail: Account	<input checked="" type="radio"/> Samba: Domain
<input type="radio"/> Courier Mail: Alias	<input type="radio"/> Samba: Group Mapping
<input type="radio"/> Generic: Address Book Entry	<input type="radio"/> Samba: Machine
<input type="radio"/> Generic: DNS Entry	<input checked="" type="radio"/> Sendmail: Alias
<input type="radio"/> Generic: LDAP Alias	<input checked="" type="radio"/> Sendmail: Cluster
<input type="radio"/> Generic: Organisational Role	<input checked="" type="radio"/> Sendmail: Domain
<input type="radio"/> Generic: Organisational Unit	<input checked="" type="radio"/> Sendmail: Relays
<input type="radio"/> Generic: Posix Group	<input checked="" type="radio"/> Sendmail: Virtual Domain
<input type="radio"/> Generic: Simple Security Object	<input checked="" type="radio"/> Sendmail: Virtual Users
<input type="radio"/> Generic: User Account	<input type="radio"/> Thunderbird: Address Book Entry
<input type="radio"/> Kolab: User Entry	<input type="radio"/> User Group
<input type="radio"/> Samba: Account	<input type="radio"/> Default

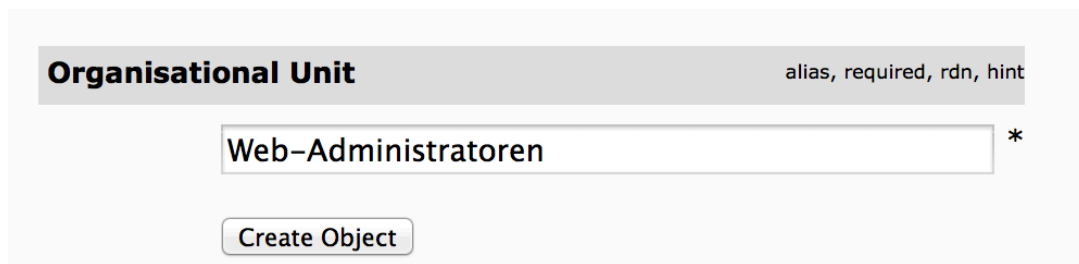

Organisational Unit alias, required, rdn, hint

Web-Administratoren *

Create Object

Create Groups

Confirm Password nicht erschienen

Lösung <http://stackoverflow.com/questions/20673186/getting-error-for-setting-password-feild-when-creating-generic-user-account-phpl>

Port auf den OpenLDAP Listen

vi /etc/default/slapd

SLAPD_SERVICES="ldap://0.0.0.0:389/ ldaps:/// ldapi:///"