

INSTALL PUREFTPD

1. "cd /usr/ports/ftp/pure-ftp", "make clean install && rehash" config sesuai kebutuhan.

```
padli@padli-desktop: ~  
padli@padli-desktop: ~/Desktop x padli@padli-desktop: ~ x  
root@raisa:/ # cd /usr/ports/ftp/pure  
pure-ftp/ pureadmin/  
root@raisa:/ # cd /usr/ports/ftp/pure-ftp/  
root@raisa:/usr/ports/ftp/pure-ftp # make install clean && rehash
```

2. edit "vi /etc/rc.conf" tambahkan baris "pureftpd_enable="YES""

```
padli@padli-desktop: ~  
padli@padli-desktop: ~/Desktop x padli@padli-desktop: ~ x  
hostname="raisa"  
  
ifconfig_re0="inet 192.168.100.10 netmask 255.255.255.0"  
defaultrouter="192.168.100.1"  
  
ifconfig_dc0="inet 192.168.0.1 netmask 255.255.255.0"  
  
sshd_enable="YES"  
nginx_enable="YES"  
php_fpm_enable="YES"  
mysql_enable="YES"  
  
pureftpd_enable="YES"  
  
# Set dumpdev to "AUTO" to enable crash dumps, "NO" to disable  
dumpdev="AUTO"  
~
```

3. copy file "cp /usr/local/etc/pure-ftp.conf.sample /usr/local/etc/pure-ftp.conf"


```
padli@padli-desktop: ~  
padli@padli-desktop: ~/Desktop x padli@padli-desktop: ~ x  
root@raisa:/ # cp /usr/local/etc/pure-ftp.conf.sample /usr/local/etc/pure-ftp.conf
```

4. edit file "vi /usr/local/etc/pure-ftpd.conf" config sesuai kebutuhan.

```
# List dot-files even when the client doesn't send "-a".  
DisplayDotFiles          no
```


```
# Create an additional log file with transfers logged in a format optimized  
# for statistic reports.  
AltLog                   stats:/var/log/pureftpd.log
```

5. buat file log "touch /var/log/pureftpd.log"

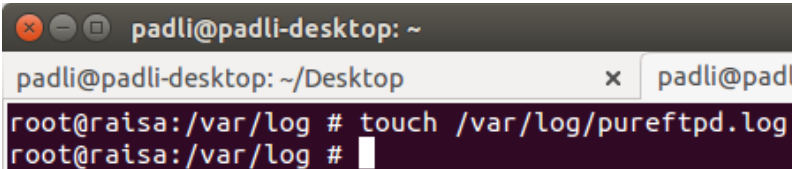



```
padli@padli-desktop: ~  
padli@padli-desktop: ~/Desktop x padli@padli-desktop: ~ x  
root@raisa:/var/log # touch /var/log/pureftpd.log  
root@raisa:/var/log #
```

5. start service ftp "/usr/local/etc/rc.d/pure-ftp start"

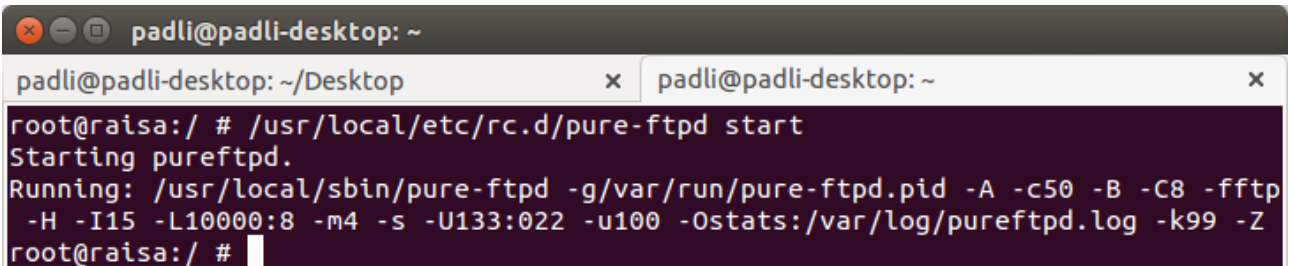

```
padli@padli-desktop: ~  
padli@padli-desktop: ~/Desktop x padli@padli-desktop: ~ x  
root@raisa:/ # /usr/local/etc/rc.d/pure-ftp start  
Starting pureftpd.  
Running: /usr/local/sbin/pure-ftpd -g/var/run/pure-ftpd.pid -A -c50 -B -C8 -fftp  
-H -I15 -L10000:8 -m4 -s -U133:022 -u100 -Ostats:/var/log/pureftpd.log -k99 -Z  
root@raisa:/ #
```

6. tes ftp lewat browser, terminal dan explorer.

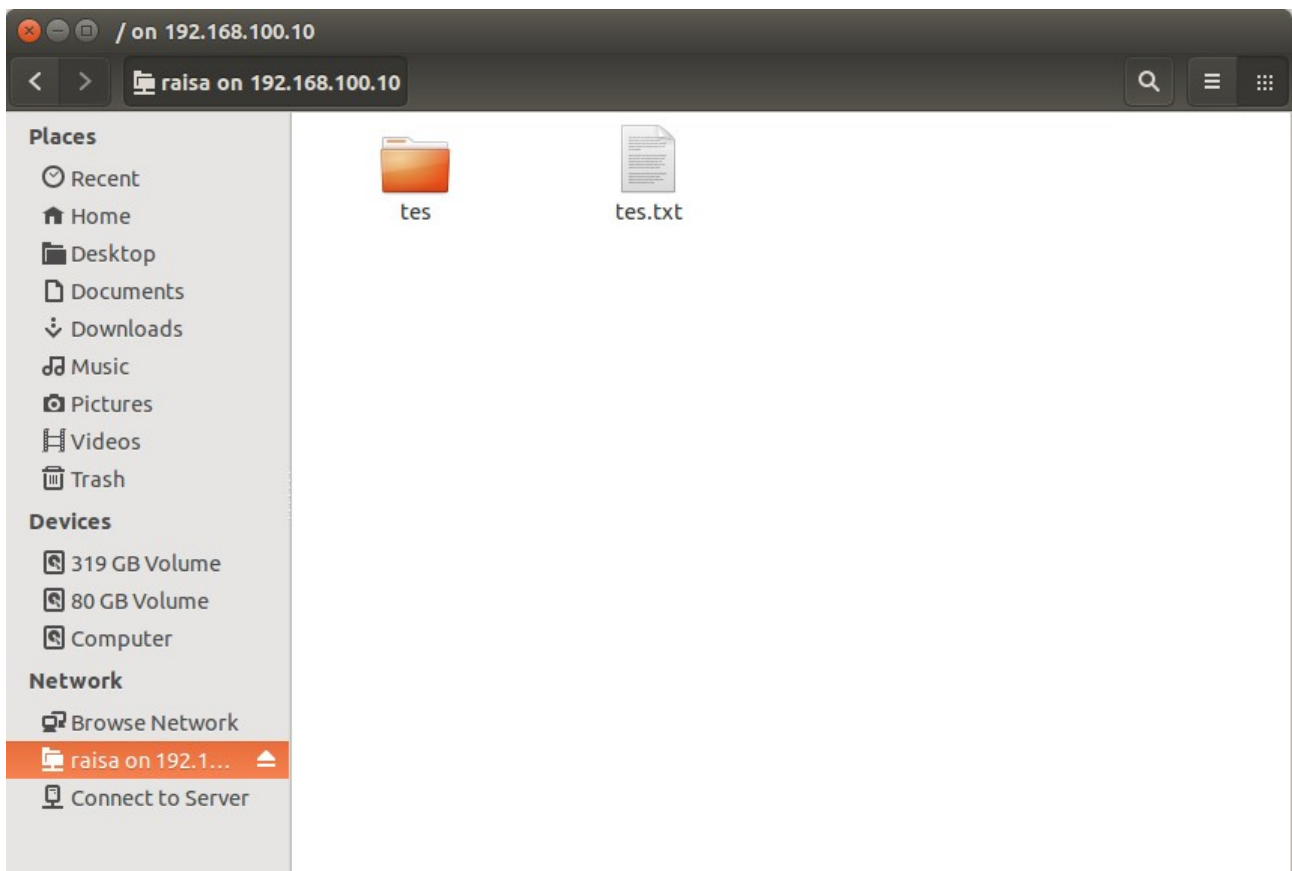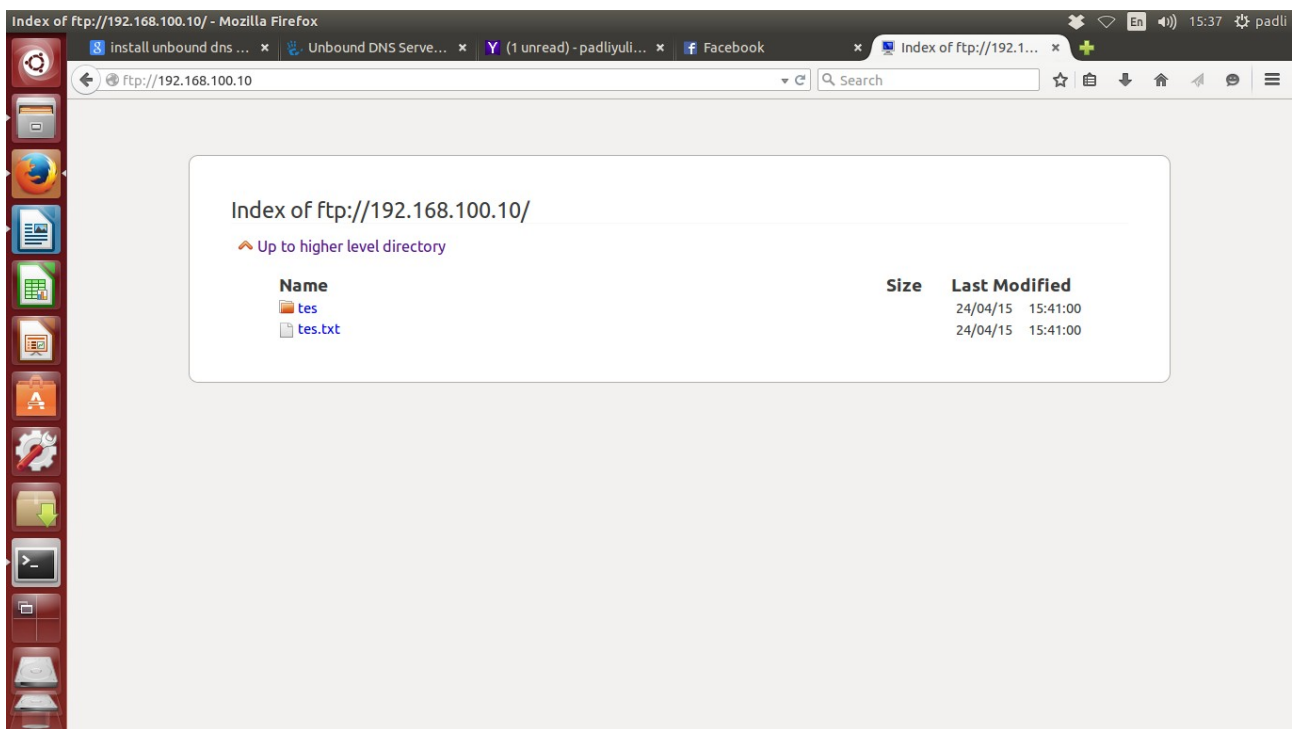

```
padli@padli-desktop: ~/Desktop
padli@padli-desktop: ~/Desktop x padli@padli-desktop: ~ x
padli@padli-desktop:~/Desktop$ ftp 192.168.100.10
Connected to 192.168.100.10.
220----- Welcome to Pure-FTPd [privsep] [TLS] -----
220-You are user number 3 of 50 allowed.
220-Local time is now 15:45. Server port: 21.
220-IPv6 connections are also welcome on this server.
220 You will be disconnected after 15 minutes of inactivity.
Name (192.168.100.10:padli): raisa
331 User raisa OK. Password required
Password:
230 OK. Current restricted directory is /
Remote system type is UNIX.
Using binary mode to transfer files.
ftp> ls
500 I won't open a connection to 192.168.1.250 (only to 192.168.100.12)
ftp: bind: Address already in use
ftp> 
```

7. cek log ftp (user ftp sesuai dengan dir /home, tambah user ftp adduser)

```
padli@padli-desktop: ~
padli@padli-desktop: ~/Desktop x padli@padli-desktop: ~ x
root@raisa:/ # more /var/log/pureftpd.log
1429864941 553a0183.440c raisa 192.168.100.12 D 0 0 /usr/home/raisa/tes.txt
1429865060 553a0227.4416 raisa 192.168.100.12 D 0 0 /usr/home/raisa/ajah.txt
1429865061 553a0227.4416 raisa 192.168.100.12 U 3 0 /usr/home/raisa/ajah.txt
1429865064 553a0227.4416 raisa 192.168.100.12 D 3 0 /usr/home/raisa/ajah.txt
root@raisa:/ # 
```

Dok 24/04/2015 : padliyulian@ymail.com