


PADMAPRIYA V


ASSIGNMENT 5-GENAI-VL (07.06.2026)

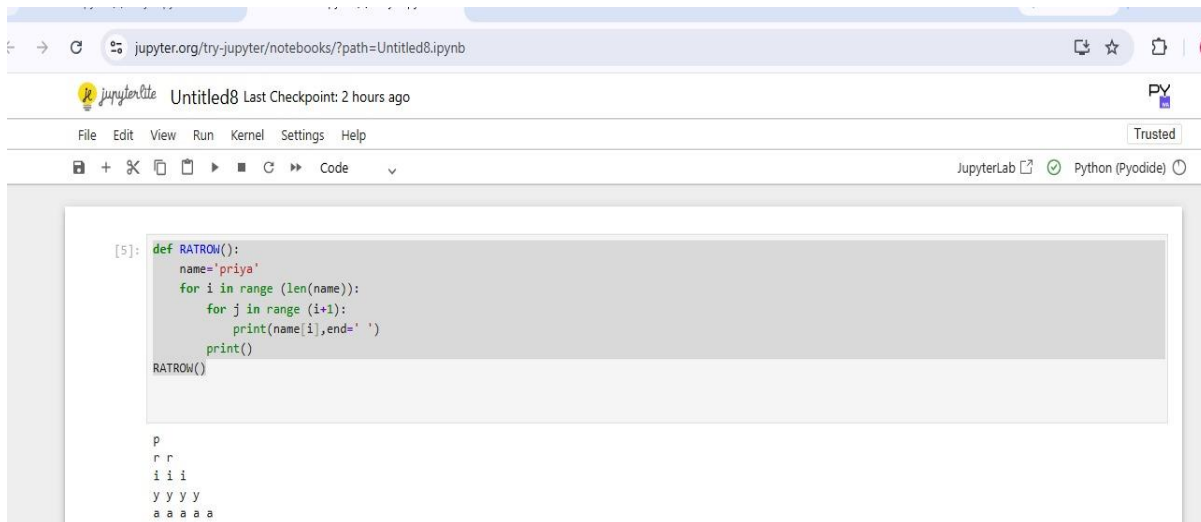

The screenshot shows a JupyterLab interface with a code cell labeled [5:]. The code defines a function `RATROW()` that takes the name 'priya' and prints it in a row-wise pattern. The output shows the name 'priya' printed as a single row of characters.

```
[5]: def RATROW():  
    name='priya'  
    for i in range (len(name)):  
        for j in range (i+1):  
            print(name[i],end=' ')  
        print()  
RATROW()
```

p
r r
i i i
y y y y
a a a a a

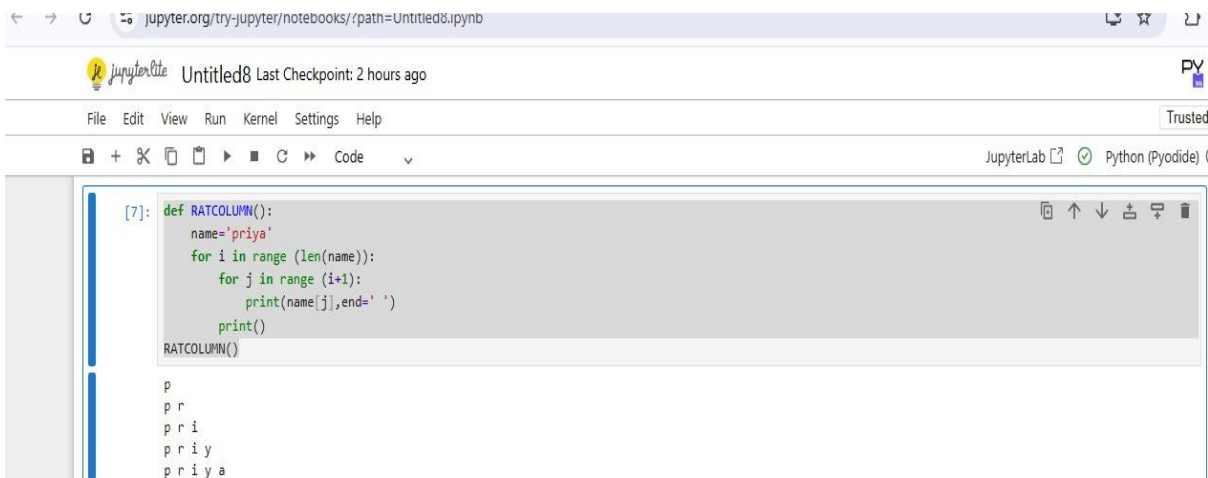

The screenshot shows a JupyterLab interface with a code cell labeled [7:]. The code defines a function `RATCOLUMN()` that takes the name 'priya' and prints it in a column-wise pattern. The output shows the name 'priya' printed as a single column of characters.

```
[7]: def RATCOLUMN():  
    name='priya'  
    for i in range (len(name)):  
        for j in range (i+1):  
            print(name[j],end=' ')  
        print()  
RATCOLUMN()
```

p
p r
p r i
p r i y
p r i y a



The screenshot shows a JupyterLab interface with a code cell labeled [30:]. The code defines a function `RATUPPERROW()` that takes the name 'priya' and prints it in a row-wise pattern, but with the first character 'p' in uppercase. The output shows the name 'priya' printed as a single row of characters, with the first character 'p' in uppercase.

```
[30]: def RATUPPERROW():  
    name="priya".upper()  
    for i in range (len(name)):  
        for j in range(0,i+1):  
            print(name[i],end=' ')  
        print()  
RATUPPERROW()
```

P
R R
I I I
Y Y Y Y
A A A A A

jupyter.org/try-jupyter/notebooks/?path=Untitled8.ipynb

Untitled8 Last Checkpoint: 2 hours ago

File Edit View Run Kernel Settings Help

JupyterLab Python (Pyodide)

```
[12]: def ILATCOLUMN():
      name='priya'
      for i in range (len(name)):
          for j in range (5,i,-1):
              print(" ", end=" ")
          for k in range (0,i+1):
              print(name[k],end=" ")
          print()
      ILATCOLUMN()
```

p
p r
p r i
p r i y
p r i y a

jupyter.org/try-jupyter/notebooks/?path=Untitled8.ipynb

Untitled8 Last Checkpoint: 2 hours ago

File Edit View Run Kernel Settings Help

JupyterLab Python (Pyodide)

```
[16]: def ILATROW():
      name='priya'
      for i in range (len(name)):
          for j in range(len(name)-1,i,-1):
              print(" ", end=" ")
          for k in range (0,i+1):
              print(name[i],end=" ")
          print()
      ILATROW()
```

p
r r
i i i
y y y y
a a a a a

JupyterLab interface showing a code cell [32] with the following Python code:

```
def RATUPPERCOL():
    name="priya".upper()
    for i in range (len(name)):
        for j in range(0,i+1):
            print(name[j],end=' ')
        print()
RATUPPERCOL()
```

The output of the code is:

```
P
P R
P R I
P R I Y
P R I Y A
```

JupyterLab interface showing a code cell [23] with the following Python code:

```
def PRTRON():
    name='priya'
    for i in range (len(name)):
        for j in range (len(name)-1,i,-1):
            print("", end=" ")
        for k in range (0,i+1):
            print(name[i],end=" ")
        print()
PRTRON()
```

The output of the code is:

```

P
  R
    I
  Y Y Y
    A A A A
```

JupyterLab interface showing a code cell [22] with the following Python code:

```
def IPRTCOLUMN():
    name='priya'
    for i in range (4,-1,-1):
        for j in range (5,i,-1):
            print("", end=" ")
        for k in range (0,i+1):
            print(name[k],end=" ")
        print()
IPRTCOLUMN()
```

The output of the code is:

```
p r i y a
p r i y
p r i
p r
p
```

JupyterLab interface showing a code cell [18] with the following Python code:

```
def PRTCOLUMN():
    name='priya'
    for i in range (len(name)):
        for j in range (5,i,-1):
            print("", end=" ")
        for k in range (0,i+1):
            print(name[k],end=" ")
        print()
PRTCOLUMN()
```

The output of the code is:

```

P
P R
P R I
P R I Y
P R I Y A
```

JupyterLab
Python (Pyodide)

```
[39]: def IRATUPPERROW():
      name='priya'.upper()
      for i in range (4,-1,-1):
          for j in range (4,i,-1):
              print(" ",end=" ")
          for k in range (0,i+1):
              print(name[k],end=" ")
          print()
      IRATUPPERROW()

P R I Y A
P R I Y
P R I
P R
P
```

JupyterLab
Python (Pyodide)

```
[46]: def IRATCOL():
      name='priya'
      for i in range (4,-1,-1):
          for j in range (5,i,-1):
              print("",end=" ")
          for k in range (0,i+1):
              print(name[k],end=" ")
          print()
      IRATCOL()

p r i y a
p r i y
p r i
p r
p
```

JupyterLab
Python (Pyodide)

```
[41]: def IRATUPPERROW():
      name='priya'.upper()
      for i in range (4,-1,-1):
          for j in range (5,i,-1):
              print(" ",end=" ")
          for k in range (0,i+1):
              print(name[i],end=" ")
          print()
      IRATUPPERROW()

A A A A A
Y Y Y Y
I I I
R R
P
```

JupyterLab
Python (Pyodide)

```
[43]: def IRATROW():
      name='priya'
      for i in range (4,-1,-1):
          for j in range (5,i,-1):
              print("",end=" ")
          for k in range (0,i+1):
              print(name[i],end=" ")
          print()
      IRATROW()

a a a a a
y y y y
i i i
r r
p
```

JupyterLab
Untitled8 Last Checkpoint: 2 hours ago

File Edit View Run Kernel Settings Help

JupyterLab

```
[51]: def fact():
      num=int(input('enter the number:'))
      for i in range(1,num+1):
          if num%i==0:
              print(i)
      fact()

      enter the number: 45
      1
      3
      5
      9
      15
      45
```

JupyterLab
Untitled8 Last Checkpoint: 2 hours ago

File Edit View Run Kernel Settings Help

JupyterLab Python (Pyodic

```
[53]: def sqroot():
      num=[8,3,6,4]
      sq=list(map(lambda a:a**2,num))
      print(sq)
      sqroot()

      [64, 9, 36, 16]

[55]: def cubroot():
      num=[8,3,6,4]
      cub=list(map(lambda a:a**3,num))
      print(cub)
      cubroot()

      [512, 27, 216, 64]
```

```
[56]: def big(a=40,b=60,c=75,d=80):
      var=lambda a,b,c,d:a if a>b and a>c and a>d else b if c>d else d
      print(var(a,b,c,d))
      big()

      80

[57]: def small (a=40,b=60,c=75,d=80):
      var=lambda a,b,c,d:a if a<b and a<c and a<d else b if c<d else d
      print(var(a,b,c,d))
      small()

      40
```