

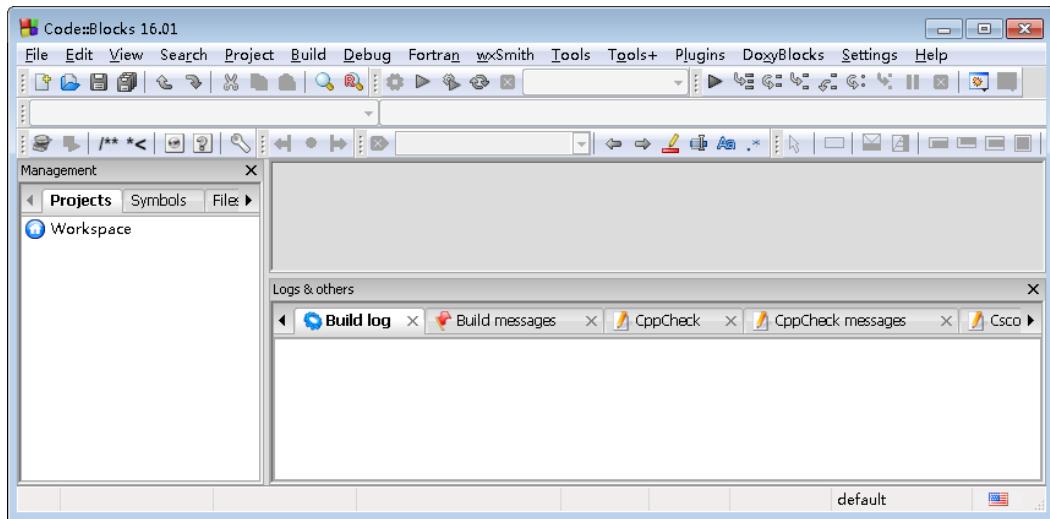


# CodeBlocks 使用（单个 C/C++ 文件）

## 1. 启动 CodeBlocks

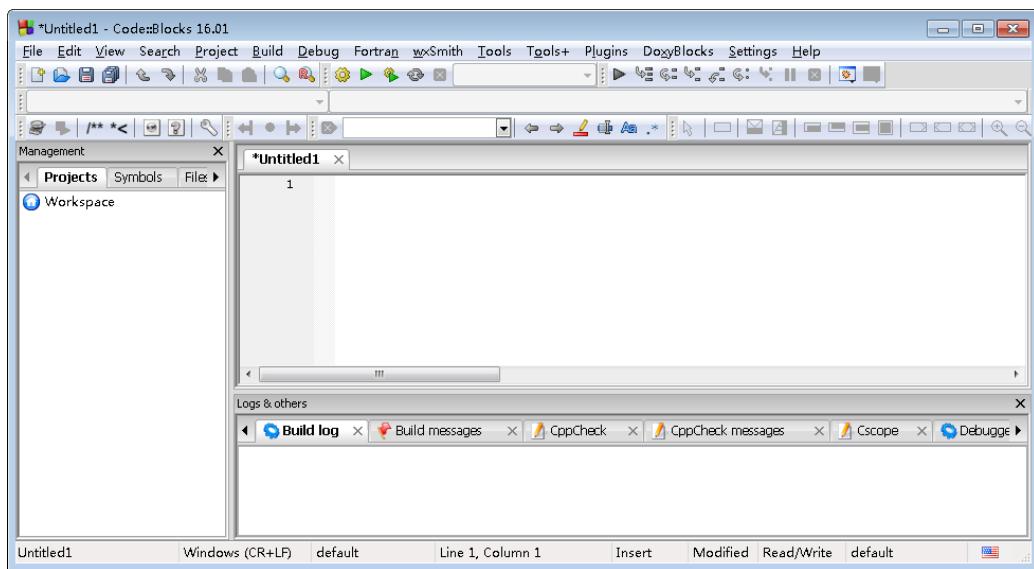

## 2. 选择 File→New→Empty file

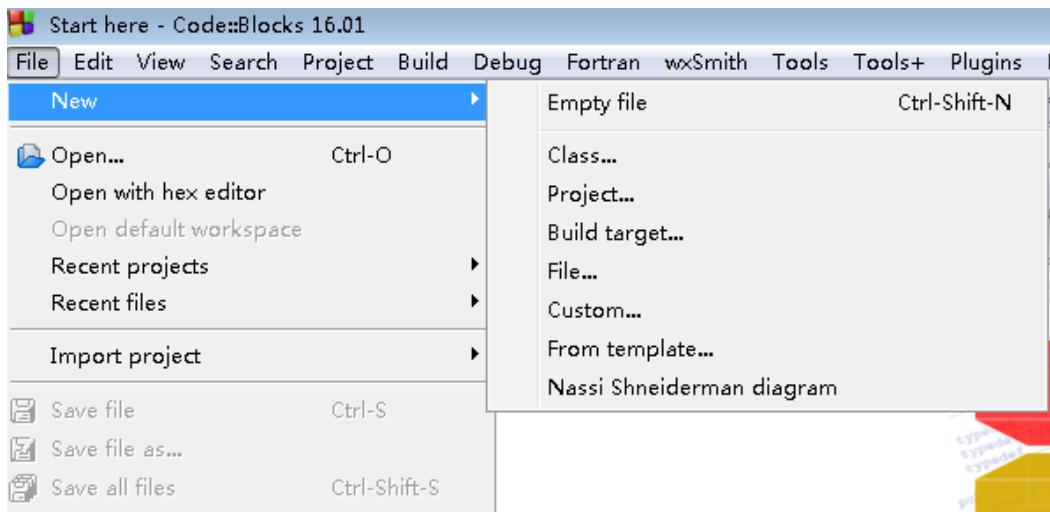

3.保存生成默认的 Untitled1 文件为.c 或.cpp 文件，文件主名另取。

The screenshot shows the Code::Blocks IDE interface. The main window displays the code for `u1.c`:

```
#include <stdio.h>
int main()
{
    printf("Hello,World!\n");
    return 0;
}
```

The build log window at the bottom shows the following output:

```
Checking for existence: D:\u1.exe
Executing: "C:\Program Files\CodeBlocks\cb_console_runner.exe" "D:\u1.exe" (in 'D:\')
Process terminated with status -1073741510 (0 minute(s), 8 second(s))
```

The screenshot shows the Code::Blocks IDE interface. The main window displays the code for `u2.cpp`:

```
#include <iostream>
using namespace std;
int main()
{
    cout<<"Hello,World!"<<endl;
    return 0;
}
```

The build log window at the bottom shows the following output:

```
Checking for existence: D:\u2.exe
Executing: "C:\Program Files\CodeBlocks\cb_console_runner.exe" "D:\u2.exe" (in 'D:\')
Process terminated with status -1073741510 (0 minute(s), 7 second(s))
```

4.按“F9”编译运行。