
QUERY IMAGE




7-Scenes redkitchen seq-04/464

One RGB frame in; the map is a semantic 3D Gaussian-splatting reconstruction of the room.

PRIOR 3DGS LOCALIZERS RETURN A POSE

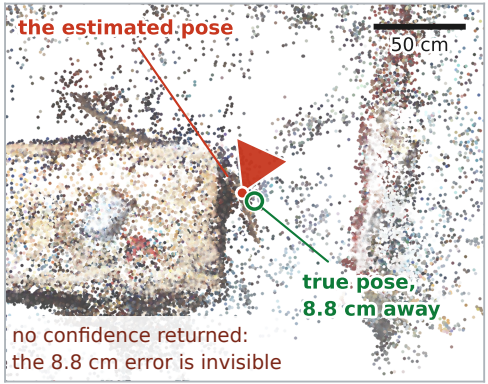

USGLoc RETURNS A POSE + COVARIANCE

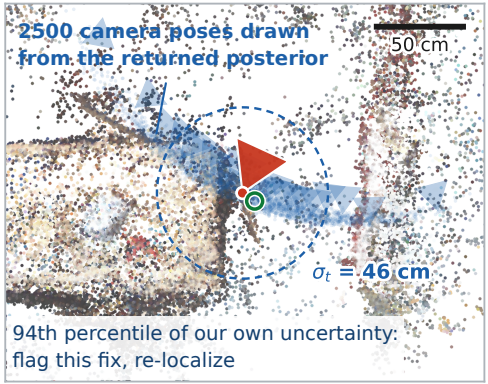

Pooled over 500 queries (5 scenes): binning each method by its own confidence, the median error of the least-confident decile is 39× that of the most-confident decile for our σ_t, but only 7× for ACE's inlier count, the sole baseline confidence in Table I.

7-scene avg. median error: ours 0.92 cm, ACE 1.05 cm (identical frames). Both panels draw the same pose; only the posterior differs.