


Structural bioinformatics

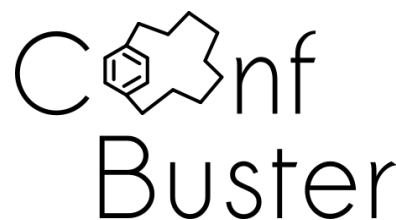

**: Open source tools for
macrocycles conformational
search and analysis**

Xavier Barbeau^{1,2}, Antony T. Vincent^{1,3} and
Patrick Lagüe^{1,3}

¹Institut de biologie intégrative et des systèmes, Pavillon Charles-Eugène-Marchand, Université Laval, 1030 avenue de la Médecine, Quebec City, QC, Canada, G1V 0A6. ²Département de Chimie, Université Laval, Québec, Canada. ³Département de biochimie, de microbiologie et de bio-informatique, Université Laval, Québec, Canada.

Availability: ConfBuster is freely available at github.com/patricklague/ConfBuster

Contact: Patrick.Lague@bcm.ulaval.ca

Supplementary Material

Table of Content

ConfBuster installation, dependencies and usage P. 3

ConfBuster examples of use:

PDB 1W96	P. 6
PDB 2DS1	P. 8
PDB 2XBK	P. 10
PDB 2XX4	P. 12
PDB 3ABA	P. 14
PDB 3R92	P. 16
PDB 3MT6	P. 18
PDB 4UG0.....	P. 20
PDB 5L7H	P. 22
PDB 5IGI	P. 24

ConfBuster: installation, dependencies and usage

ConfBuster was designed to work as command lines. The instructions for installation and running ConfBuster are provided for Linux OS, but should work for other OS as long as the dependencies are satisfied.

Dependencies

CORE

- Python 2.7 (<https://www.python.org>)
- R ($\geq 3.0.0$) (<https://cran.r-project.org/index.html>)
- NetworkX (tested with 1.11) (<https://networkx.github.io>)
- Pymol (≥ 1.8) (<https://sourceforge.net/projects/pymol>)
- OpenBabel ($\geq 2.4.1$) (http://openbabel.org/wiki/Main_Page)
The version of OpenBabel should imperatively be 2.4.1.
Link to download: <https://sourceforge.net/projects/openbabel/files/>
For a clean and functional installation:

In openbabel-2.4.1 directory:

```
$ mkdir build
$ cd build
$ cmake ../ -DCMAKE_INSTALL_PREFIX=/path/to/where/you/want
$ make -j4
$ make install
```

(This is essential for OpenBabel to work properly)

OPTIONAL (VISUALIZATION)

- R package ComplexHeatmap (≥ 3.5) (from bioconductor.org)
R shell:

```
source("http://bioconductor.org/biocLite.R")
biocLite("ComplexHeatmap")
```
- R package circlize ($\geq 0.4.0$)
R shell:

```
install.packages("circlize")
```

Installation

The most simple way to install ConfBuster is by downloading the official release in the GitHub section "release". Alternatively, one may clone the ConfBuster repository using git :

```
$ git clone https://github.com/lague_patrick/ConfBuster.git
```

At your choice, put the scripts in a directory present in your \$PATH OR add the directory where the scripts are to your \$PATH:

```
export PATH=$PATH:/full-path-here/ConfBuster/
```

PyMOL and OpenBabel should also be recognized in your \$PATH. If you want to install them locally, you should change the headers of the ConfBuster scripts to add their correct respective paths.

ConfBuster tools

- ConfBuster-Single-Molecule-Minimization
Perform a simple minimization of the given molecule (recommended before all analysis).
- ConfBuster-Macrocycle-Linear-Sampling
Find the conformation of a cyclic molecule.
- ConfBuster-Rotamer-Search
Identify rotational isomers of a molecule.
- ConfBuster-Analysis
Perform post-analyses to visualize a clustering based on RMSD values between the conformations.

Tutorial

A complete step-by-step tutorial is available on the ConfBuster GitHub (<https://github.com/patricklague/ConfBuster>).
(See also sections below)

License

ConfBuster Suite

Copyright © 2017 Xavier Barbeau, Antony T. Vincent and Patrick Lagüe


This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of

MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <http://www.gnu.org/licenses/>.

ConfBuster example of use: macrocycle from PDB 1W96

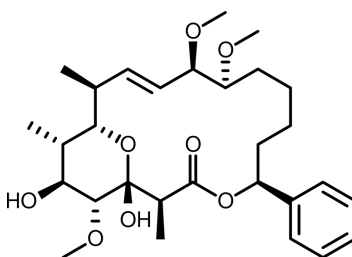

Macrocycle molecule S1A from PDB 1W96

From the PDB 1W96, the macrocycle molecule (the first segment identified as S1A) was prepared (correct bond orders and addition of hydrogens) and saved to a file (file *macro-1w96.pdb* in the *examples/1w96* directory of ConfBuster distribution).

The conformational search steps are as follows (command lines are highlighted with a light gray color):

a. Perform a minimization on *macro-1w96.pdb*

```
$ ConfBuster-Single-Molecule-Minimization.py -i macro-1w96.pdb
```

This will create the file *macro-1w96.mol2*, which is used in the next step.

b. Start Macrocyclic linear sampling

```
$ ConfBuster-Macrocyclic-Linear-Sampling.py -i macro-1w96.mol2 -n 5 -N 5 -r 0.5
```

This will create a directory called *macro-1w96* which will contain the solutions from the conformational search, each conformation in a single file.


c. Viewing and Analyzing results

To view results go in the *macro-1w96* directory and run the following commands. In the PyMOL window, the best conformation will be the first object loaded at the top of the object list and shown in green sticks.

```
$ cd macro-1w96
$ pymol Follow-macro-1w96.py
```

In PyMOL, progress may also be followed using the run command:


```
(in PyMOL) run Follow-macro-1w96.py
```

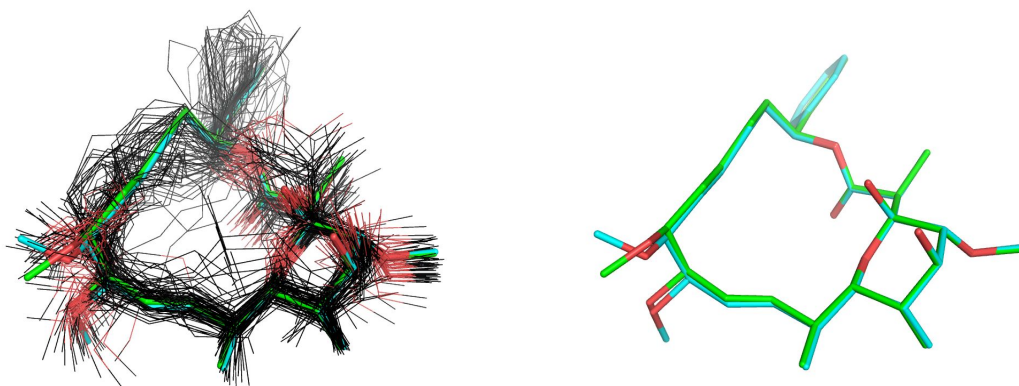

Conformational search results, as displayed in PyMOL. Lowest energy conformation is in green (conf-16.mol2 in the matrix below). PDB structure is in cyan. RMSD between conf-16.mol2 and PDB structure is 0.405 Å over all atoms. All sampled conformations are in black thin lines to show the conformational space of the macrocycle. Results may vary from one search to another.


Using the ConfBuster-Analysis.py script allows to compare the n best results with a reference or the initial structure. Results are shown as a 2D RMSD matrix of n conformations. On the right, an energy bar (from green to purple) between the best and worst energy is displayed:

```
$ ConfBuster-Analysis.py -i macro-1w96 -R macro-1w96.mol2 -n 20
```

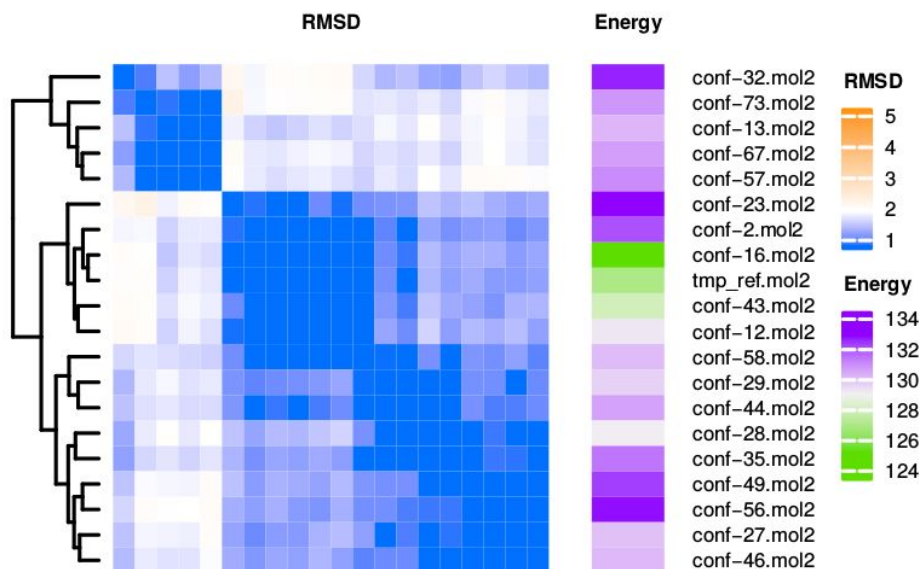

RMSD matrix between the 20 lowest energy conformations from a ConfBuster conformational search of the macrocycle from PDB 1W96. The conformation from the object conf-16.mol2 displays the lowest conformational energy. Results may vary from one search to another.

ConfBuster example of use: macrocycle from PDB 2DS1

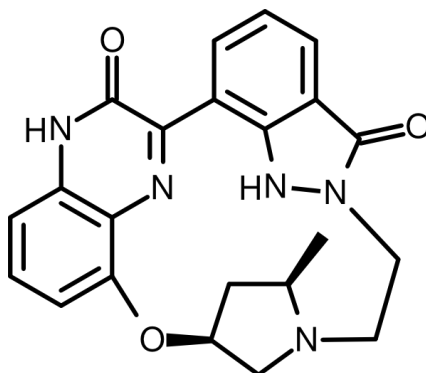

Macrocycle molecule 1CD from PDB 2DS1

From the PDB 2DS1, one of the macrocycle molecules (the first segment identified as 1CD) was prepared (correct bond orders and addition of hydrogens) and saved to a file (file *macro-2ds1.pdb* in the *examples/2ds1* directory of ConfBuster distribution).

The conformational search steps are as follows (command lines are highlighted with a light gray color):

a. Perform a minimization on macro-2ds1.pdb

```
$ ConfBuster-Single-Molecule-Minimization.py -i macro-2ds1.pdb
```

This will create the file *macro-2ds1.mol2*, which is used in the next step.

b. Start Macrocyclic linear sampling

```
$ ConfBuster-Macrocyclic-Linear-Sampling.py -i macro-2ds1.mol2 -n 5 -N 5 -r 0.5
```

This will create a directory called *macro-2ds1* which will contain the solutions from the conformational search, each conformation in a single file.


c. Viewing and Analyzing results

To view results go in the *macro-2DS1* directory and run the following command. In the PyMOL window, the best conformation will be the first object loaded at the top of the object list and shown in green sticks.

```
$ cd macro-2ds1
$ pymol Follow-macro-2ds1.py
```


In PyMOL, progress may also be followed using the run command:


```
(in PyMOL) run Follow-macro-2ds1.py
```

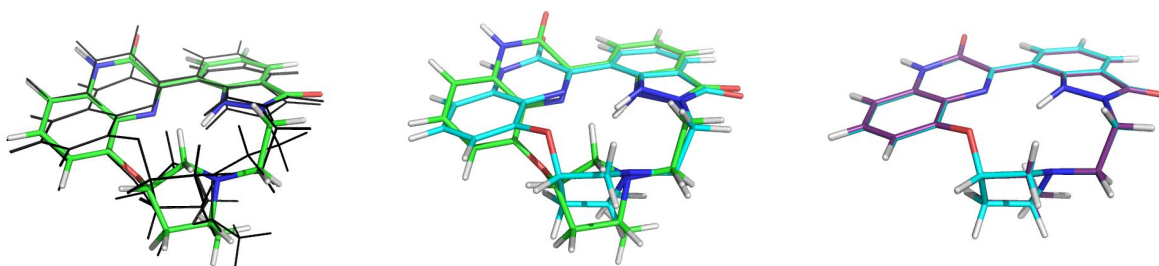

Conformational search results, as displayed in PyMOL. Lowest energy conformation is in green (conf-3.mol2 in the matrix below). PDB structure is in cyan. RMSD between conf-3.mol2 and PDB structure is 0.893 Å over all atoms. All sampled conformations are in black thin lines to show the conformational space of the macrocycle. Results may vary from one search to another.


Using the ConfBuster-Analysis.py script allows to compare the n best results with a reference or the initial structure. Results are shown as a 2D RMSD matrix of n conformations. On the right, an energy bar (from green to purple) between the best and worst energy is displayed:

```
$ ConfBuster-Analysis.py -i macro-2ds1 -R macro-2ds1.mol2 -n 20
```

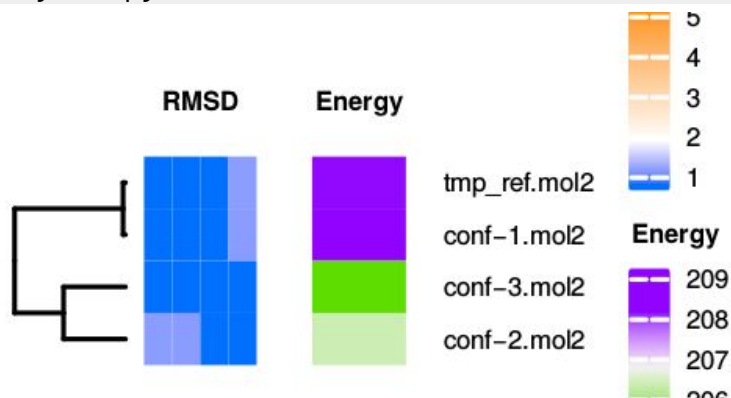

RMSD matrix between the 3 lowest energy conformations from a ConfBuster conformational search of the macrocycle from PDB 2DS1. The conformation from the object conf-3.mol2 displays the lowest conformational energy. Results may vary from one search to another.

ConfBuster example of use: macrocycle from PDB 2XBK

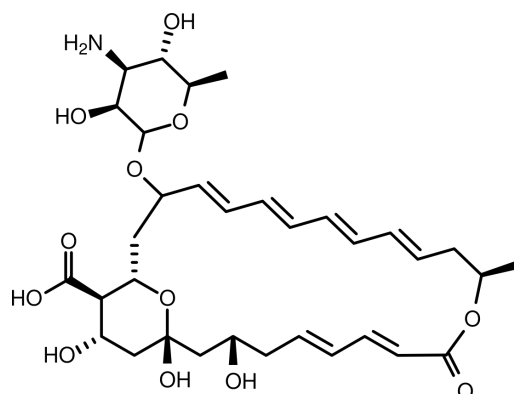

Macrocycle molecule XBK from PDB 2XBK

From the PDB 2XBK, one of the macrocycle molecules (the first segment identified as XBK) was prepared (correct bond orders and addition of hydrogens) and saved to a file (file *macro-2xbk.pdb* in the *examples/2xbk* directory of ConfBuster distribution).

The conformational search steps are as follows (command lines are highlighted with a light gray color):

a. Perform a minimization on macro-2xbk.pdb

```
$ ConfBuster-Single-Molecule-Minimization.py -i macro-2xbk.pdb
```

This will create the file *macro-2xbk.mol2*, which is used in the next step.

b. Start Macrocyclic linear sampling

```
$ ConfBuster-Macrocyclic-Linear-Sampling.py -i macro-2xbk.mol2 -n 5 -N 5 -r 0.5
```

This will create a directory called *macro-2xbk* which will contain the solutions from the conformational search, each conformation in a single file.


c. Viewing and Analyzing results

To view results go in the *macro-2xbk* directory and run the following command. In the PyMOL window, the best conformation will be the first object loaded at the top of the object list and shown in green sticks.

```
$ cd macro-2xbk
$ pymol Follow-macro-2xbk.py
```

In PyMOL, progress may also be followed using the run command:


```
(in PyMOL) run Follow-macro-2xbk.py
```

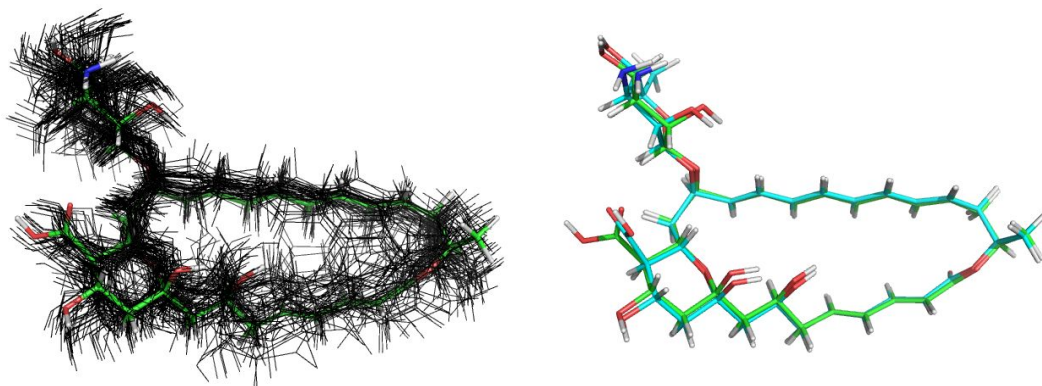

Conformational search results, as displayed in PyMOL. Lowest energy conformation is in green (conf-43.mol2 in the matrix below). PDB structure is in cyan. RMSD between conf-43.mol2 and PDB structure is 0.607 Å over all atoms. All sampled conformations are in black thin lines to show the conformational space of the macrocycle. Results may vary from one search to another.


Using the ConfBuster-Analysis.py script allows to compare the n best results with a reference or the initial structure. Results are shown as a 2D RMSD matrix of n conformations. On the right, an energy bar (from green to purple) between the best and worst energy is displayed:

```
$ ConfBuster-Analysis.py -i macro-2xbk -R macro-2xbk.mol2 -n 20
```

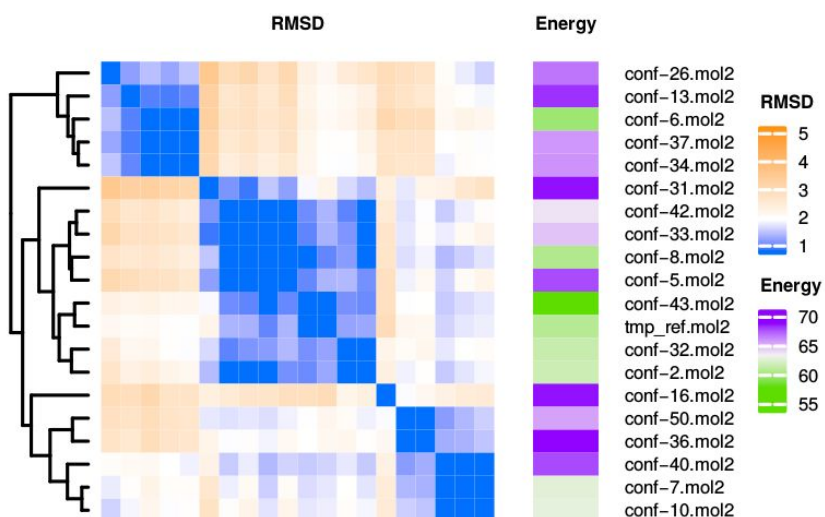

RMSD matrix between the 20 lowest energy conformations from a ConfBuster conformational search of the macrocycle from PDB 2XBK. The conformation from the object conf-43.mol2 displays the lowest conformational energy. Results may vary from one search to another.

ConfBuster example of use: macrocycle from PDB 2XX4

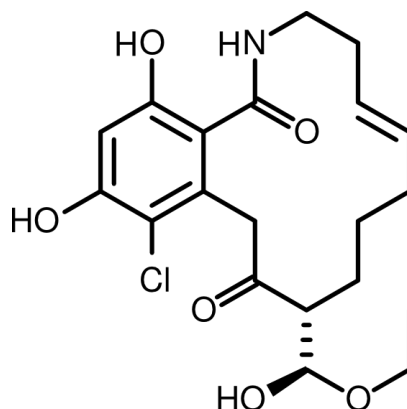

Macrocycle molecule 13I from PDB 2XX4

From the PDB 2XX4, one of the macrocycle molecules (the first segment identified as 13I) was prepared (correct bond orders and addition of hydrogens) and saved to a file (file *macro-2xx4.pdb* in the *examples/2xx4* directory of ConfBuster distribution).

The conformational search steps are as follows (command lines are highlighted with a light gray color):

a. Perform a minimization on macro-2xx4.pdb

```
$ ConfBuster-Single-Molecule-Minimization.py -i macro-2xx4.pdb
```

This will create the file *macro-2xx4.mol2*, which is used in the next step.

b. Start Macrocyclic linear sampling

```
$ ConfBuster-Macrocycle-Linear-Sampling.py -i macro-2xx4.mol2 -n 5 -N  
5 -r 0.5
```


This will create a directory called *macro-2xx4* which will contain the solutions from the conformational search, each conformation in a single file.

c. Viewing and Analyzing results

To view results go in the *macro-2XX4* directory and run the following command. In the PyMOL window, the best conformation will be the first object loaded at the top of the object list and shown in green sticks.

```
$ cd macro-2xx4  
$ pymol Follow-macro-2xx4.py
```


In PyMOL, progress may also be followed using the run command:
(in PyMOL) `run Follow-macro-2xx4.py`

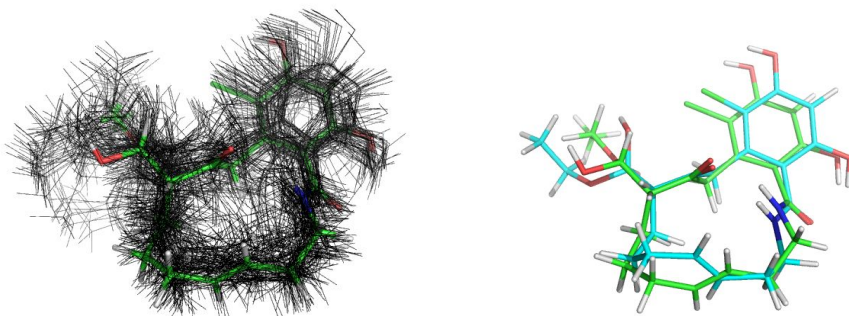

Conformational search results, as displayed in PyMOL. Lowest energy conformation is in green (conf-88.mol2 in the matrix below). PDB structure is in cyan. RMSD between conf-88.mol2 and PDB structure is of 1.722 Å over all atoms. All sampled conformations are in black thin lines to show the conformational space of the macrocycle. Results may vary from one search to another.


Using the ConfBuster-Analysis.py script allows to compare the n best results with a reference or the initial structure. Results are shown as a 2D RMSD matrix of n conformations. On the right, an energy bar (from green to purple) between the best and worst energy is displayed:

```
$ ConfBuster-Analysis.py -i macro-2xx4 -R macro-2xx4.mol2 -n 20
```

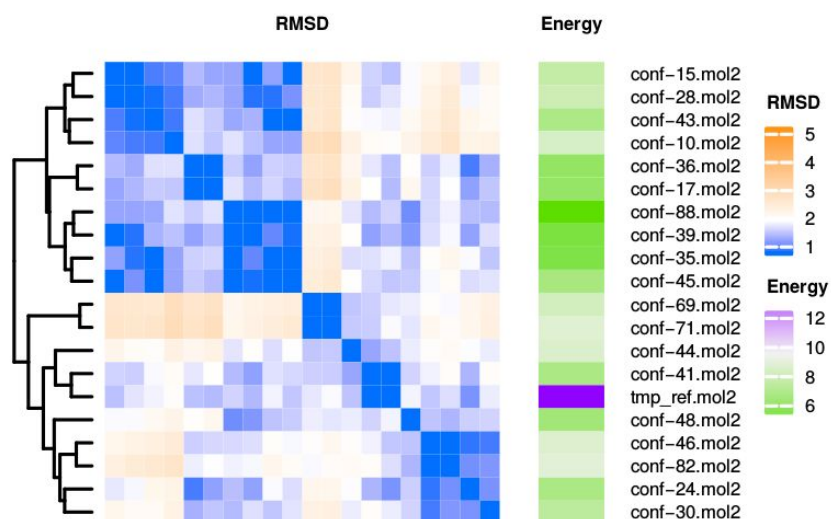

RMSD matrix between the 20 lowest energy conformations from a ConfBuster conformational search of the macrocycle from PDB 2XX4. The conformation from the object conf-88.mol2 displays the lowest conformational energy. Results may vary from one search to another.

ConfBuster example of use: macrocycle from PDB 3ABA

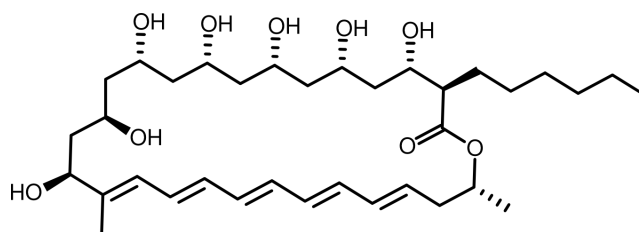

Macrocycle molecule FLI from PDB 3ABA

From the PDB 3ABA, one of the macrocycle molecules (the first segment identified as FLI) was prepared (correct bond orders and addition of hydrogens) and saved to a file (file *macro-3aba.pdb* in the *examples/3aba* directory of ConfBuster distribution).

The conformational search steps are as follows (command lines are highlighted with a light gray color):

a. Perform a minimization on macro-3aba.pdb

```
$ ConfBuster-Single-Molecule-Minimization.py -i macro-3aba.pdb
```

This will create the file *macro-3ABA.mol2*, which is used in the next step.

b. Start Macrocyclic linear sampling

```
$ ConfBuster-Macrocycle-Linear-Sampling.py -i macro-3ABA.mol2 -n 5 -N 5 -r 0.5
```

This will create a directory called *macro-3ABA* which will contain the solutions from the conformational search, each conformation in a single file.


c. Viewing and Analyzing results

To view results go in the *macro-3ABA* directory and run the following command. In the PyMOL window, the best conformation will be the first object loaded at the top of the object list and shown in green sticks.

```
$ cd macro-3aba
$ pymol Follow-macro-3aba.py
```

In PyMOL, progress may also be followed using the run command:


```
(in PyMOL) run Follow-macro-3aba.py
```

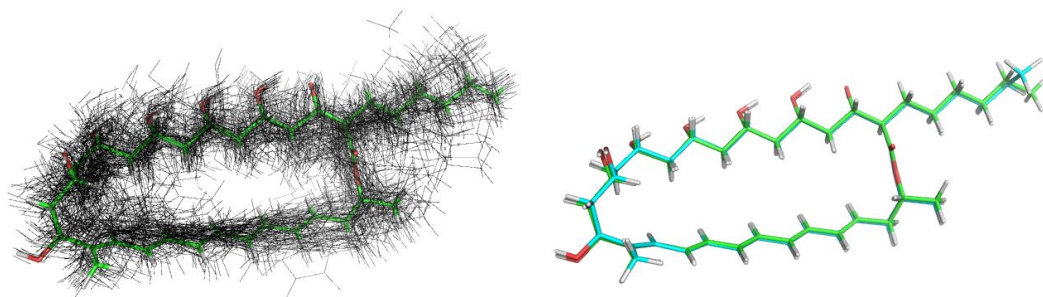

Conformational search results, as displayed in PyMOL. Lowest energy conformation is in green (conf-1.mol2 in the matrix below). PDB structure is in cyan. RMSD between conf-1.mol2 and PDB structure is 0.643 Å over all atoms. All sampled conformations are in black thin lines to show the conformational space of the macrocycle. Results may vary from one search to another.


Using the ConfBuster-Analysis.py script allows to compare the n best results with a reference or the initial structure. Results are shown as a 2D RMSD matrix of n conformations. On the right, an energy bar (from green to purple) between the best and worst energy is displayed:

```
$ ConfBuster-Analysis.py -i macro-3aba -R macro-3aba.mol2 -n 20
```

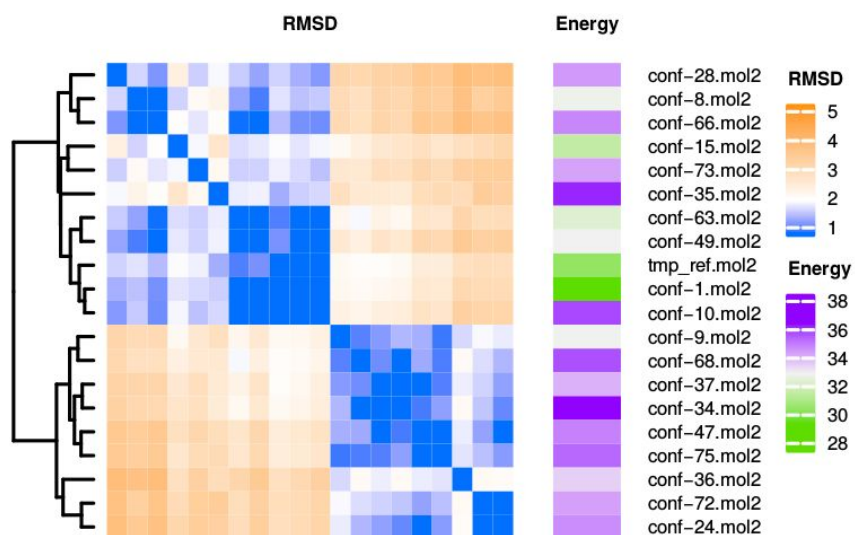

RMSD matrix between the 20 lowest energy conformations from a ConfBuster conformational search of the macrocycle from PDB 3ABA. The conformation from the object conf-1.mol2 displays the lowest conformational energy. Results may vary from one search to another.

ConfBuster example of use: macrocycle from PDB 3R92

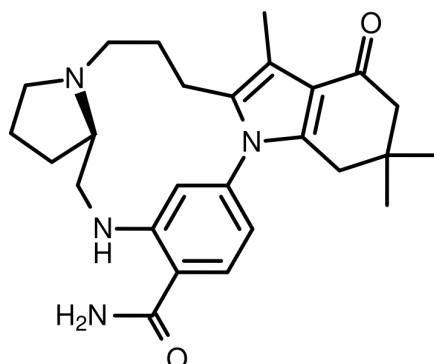

Macrocycle molecule 06J from PDB 3R92

From the PDB 3R92, one of the macrocycle molecules (the first segment identified as 06J) was prepared (correct bond orders and addition of hydrogens) and saved to a file (file *macro-3r92.pdb* in the *examples/3r92* directory of ConfBuster distribution).

The conformational search steps are as follows (command lines are highlighted with a light gray color):

a. Perform a minimization on macro-3r92.pdb

```
$ ConfBuster-Single-Molecule-Minimization.py -i macro-3r92.pdb
```

This will create the file *macro-3r92.mol2*, which is used in the next step.

b. Start Macrocyclic linear sampling

```
$ ConfBuster-Macrocyclic-Linear-Sampling.py -i macro-3r92.mol2 -n 5 -N 5 -r 0.5
```

This will create a directory called *macro-3r92* which will contain the solutions from the conformational search, each conformation in a single file.


c. Viewing and Analyzing results

To view results go in the *macro-3r92* directory and run the following command. In the PyMOL window, the best conformation will be the first object loaded at the top of the object list and shown in green sticks.

```
$ cd macro-3r92
$ pymol Follow-macro-3r92.py
```


In PyMOL, progress may also be followed using the run command:


```
(in PyMOL) run Follow-macro-3r92.py
```

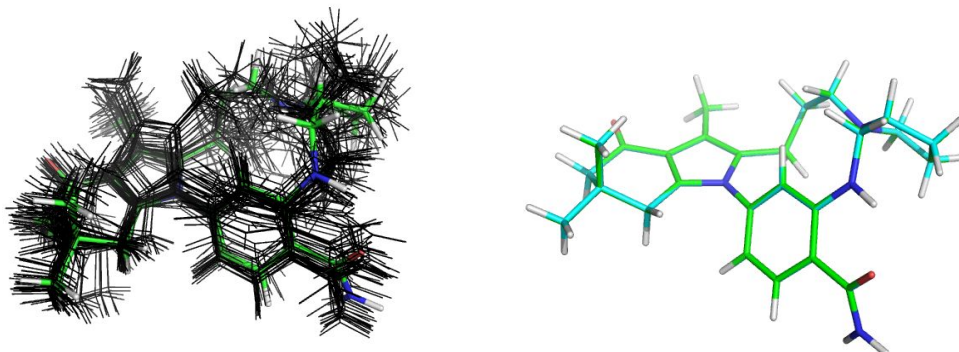

Conformational search results, as displayed in PyMOL. Lowest energy conformation is in green (conf-2.mol2 in the matrix below). PDB structure is in cyan. RMSD between conf-2.mol2 and PDB structure is 0.010 Å over all atoms. All sampled conformations are in black thin lines to show the conformational space of the macrocycle. Results may vary from one search to another.


Using the ConfBuster-Analysis.py script allows to compare the n best results with a reference or the initial structure. Results are shown as a 2D RMSD matrix of n conformations. On the right, an energy bar (from green to purple) between the best and worst energy is displayed:

```
$ ConfBuster-Analysis.py -i macro-3r92 -R macro-3r92.mol2 -n 20
```

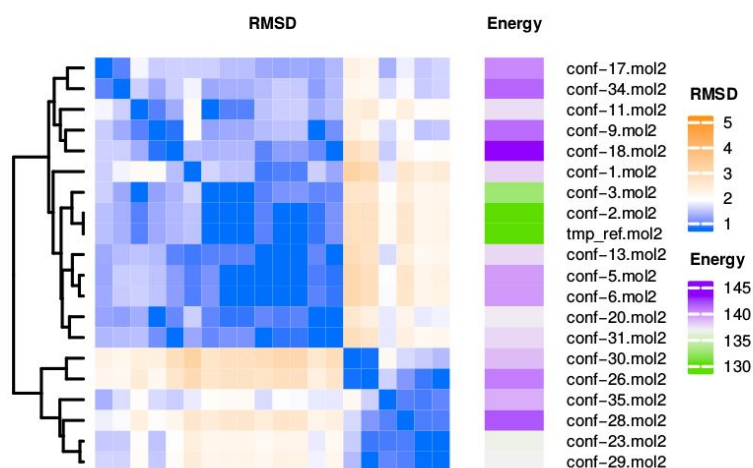

RMSD matrix between the 20 lowest energy conformations from a ConfBuster conformational search of the macrocycle from PDB 3R92. The conformation from the object conf-2.mol2 displays the lowest conformational energy. Results may vary from one search to another.

ConfBuster example of use: macrocycle from PDB 3MT6

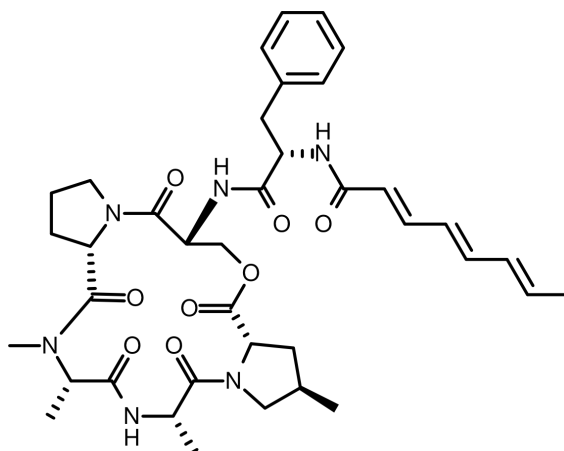

Macrocycle molecule “OTT FSP MAA A MP8” from PDB 3MT6

From the PDB 3MT6, one of the macrocycle molecules (the first segment identified as “OTT FSP MAA A MP8”) was prepared (correct bond orders and addition of hydrogens) and saved to a file (file *macro-3mt6.pdb* in the *examples/3mt6* directory of ConfBuster distribution).

The conformational search steps are as follows (command lines are highlighted with a light gray color):

a. Perform a minimization on macro-3mt6.pdb

```
$ ConfBuster-Single-Molecule-Minimization.py -i macro-3mt6.pdb
```

This will create the file *macro-3mt6.mol2*, which is used in the next step.

b. Start Macrocyclic linear sampling

```
$ ConfBuster-Macrocycle-Linear-Sampling.py -i macro-3mt6.mol2 -n 5 -N 5 -r 0.5
```

This will create a directory called *macro-3mt6* which will contain the solutions from the conformational search, each conformation in a single file.

c. Viewing and Analyzing results


To view results go in the *macro-3mt6* directory and run the following command. In the PyMOL window, the best conformation will be the first object loaded at the top of the object list and shown in green sticks.

```
$ cd macro-3mt6
```

```
$ pymol Follow-macro-3mt6.py
```

In PyMOL, progress may also be followed using the run command:


```
(in PyMOL) run Follow-macro-3mt6.py
```

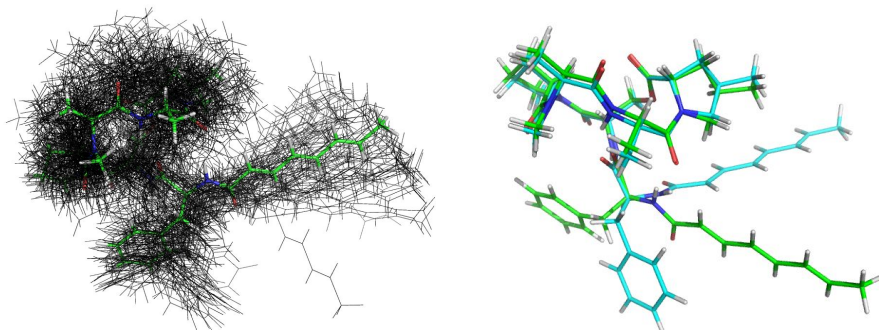

Conformational search results, as displayed in PyMOL. Lowest energy conformation is in green (conf-10.mol2 in the matrix below). PDB structure is in cyan. RMSD between conf-10.mol2 and PDB structure is 2.728 Å over all atoms. All sampled conformations are in black thin lines to show the conformational range of the macrocycle. Results may vary from one search to another.


Using the ConfBuster-Analysis.py script allows to compare the n best results with a reference or the initial structure. Results are shown as a 2D RMSD matrix of n conformations. On the right, an energy bar (from green to purple) between the best and worst energy is displayed:

```
$ ConfBuster-Analysis.py -i macro-3mt6 -R macro-3mt6.mol2 -n 20
```

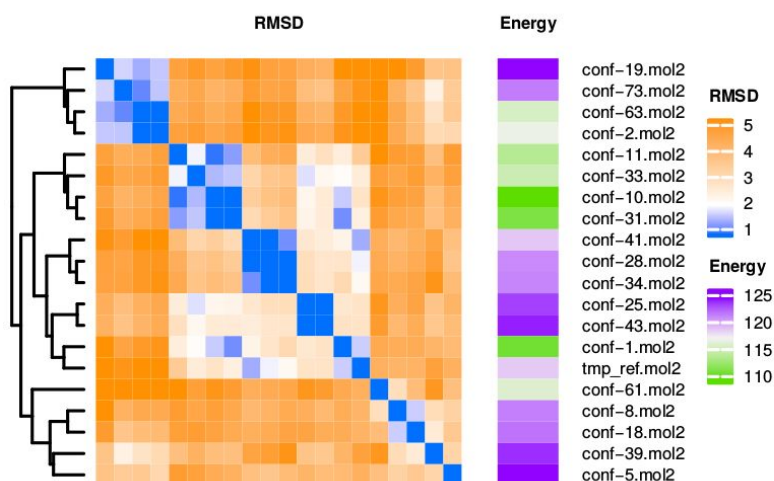

RMSD matrix between the 20 lowest energy conformations from a ConfBuster conformational search of the macrocycle from PDB 3MT6. The conformation from the object conf-10.mol2 displays the lowest conformational energy. Results may vary from one search to another.

ConfBuster example of use: macrocycle from PDB 4U0G

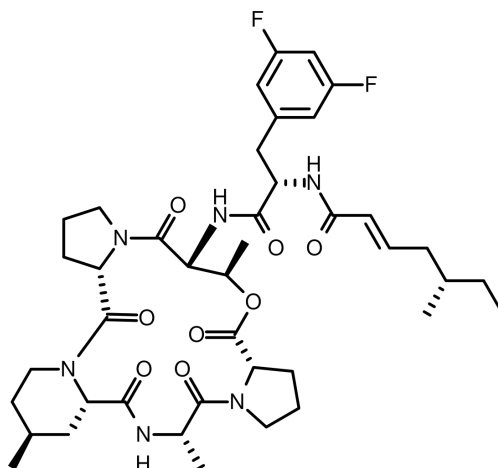

Macrocycle molecule “39Y WFP TP 3A0 AP” from PDB 4U0G

From the PDB 4U0G, one of the macrocycle molecules (the first segment identified as “39Y WFP TP 3A0 AP”) was prepared (correct bond orders and addition of hydrogens) and saved to a file (file *macro-4u0g.pdb* in the *examples/4u0g* directory of ConfBuster distribution).

The conformational search steps are as follows (command lines are highlighted with a light gray color):

a. Perform a minimization on *macro-4u0g.pdb*

```
$ ConfBuster-Single-Molecule-Minimization.py -i macro-4u0g.pdb
```

This will create the file *macro-4u0g.mol2*, which is used in the next step.

b. Start Macrocyclic linear sampling

```
$ ConfBuster-Macrocycle-Linear-Sampling.py -i macro-4u0g.mol2 -n 5 -N 5 -r 0.5
```

This will create a directory called *macro-4u0g* which will contain the solutions from the conformational search, each conformation in a single file.

c. Viewing and Analyzing results


To view results go in the *macro-4u0g* directory and run the following command. In the PyMOL window, the best conformation will be the first object loaded at the top of the object list and shown in green sticks.

```
$ cd macro-4u0g
```

```
$ pymol Follow-macro-4u0g.py
```

In PyMOL, progress may also be followed using the run command:


```
(in PyMOL) run Follow-macro-4u0g.py
```

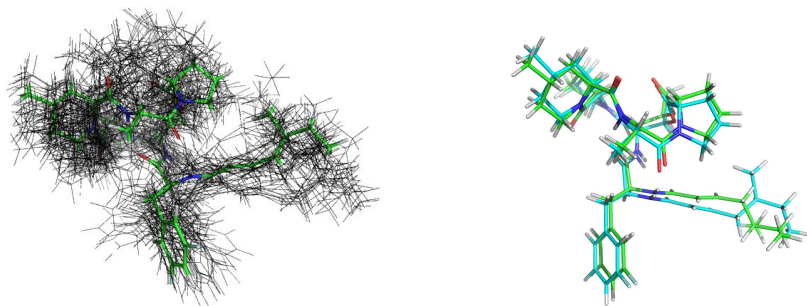

Conformational search results, as displayed in PyMOL. Lowest energy conformation is in green (conf-20.mol2 in the matrix below). PDB structure is in cyan. RMSD between conf-20.mol2 and PDB structure is 1.541 Å over all atoms. All sampled conformations are in black thin lines to show the conformational range of the macrocycle. Results may vary from one search to another.


Using the ConfBuster-Analysis.py script allows to compare the n best results with a reference or the initial structure. Results are shown as a 2D RMSD matrix of n conformations. On the right, an energy bar (from green to purple) between the best and worst energy is displayed:

```
$ ConfBuster-Analysis.py -i macro-4u0g -R macro-4u0g.mol2 -n 20
```

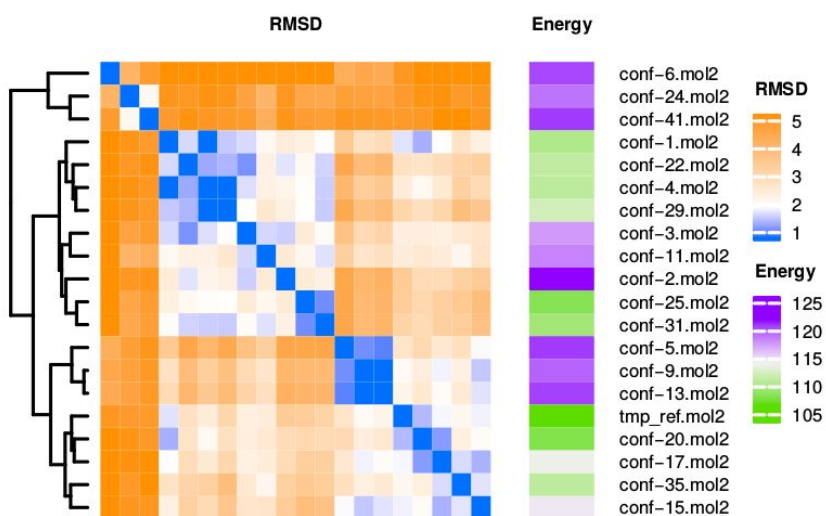

RMSD matrix between the 20 lowest energy conformations from a ConfBuster conformational search of the macrocycle from PDB 4UG0. The conformation from the object tmp_ref.mol2 (reference structure from the PDB) displays the lowest conformational energy. Results may vary from one search to another.

ConfBuster example of use: macrocycle from PDB 5L7H

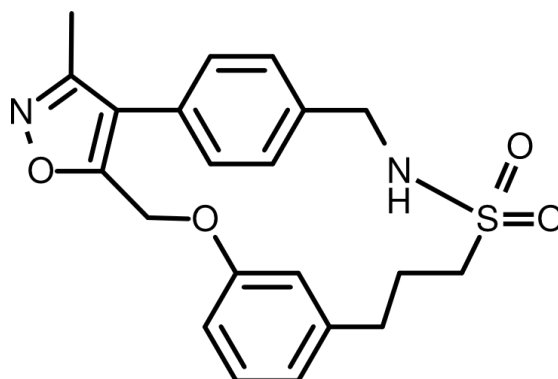

Macrocycle molecule 6QG from PDB 5L7H

From the PDB 5L7H, one of the macrocycle molecules (the first segment identified as 6QG) was prepared (correct bond orders and addition of hydrogens) and saved to a file (file *macro-5l7h.pdb* in the *examples/5l7h* directory of ConfBuster distribution).

The conformational search steps are as follows (command lines are highlighted with a light gray color):

a. Perform a minimization on macro-5L7H.pdb

```
$ ConfBuster-Single-Molecule-Minimization.py -i macro-5l7h.pdb
```

This will create the file *macro-5l7h.mol2*, which is used in the next step.

b. Start Macrocyclic linear sampling

```
$ ConfBuster-Macrocycle-Linear-Sampling.py -i macro-5l7h.mol2 -n 5 -N 5 -r 0.5
```

This will create a directory called *macro-5l7h* which will contain the solutions from the conformational search, each conformation in a single file.


c. Viewing and Analyzing results

To view results go in the *macro-5l7h* directory and run the following command. In the PyMOL window, the best conformation will be the first object loaded at the top of the object list and shown in green sticks.

```
$ cd macro-5l7h
$ pymol Follow-macro-5l7h.py
```

In PyMOL, progress may also be followed using the run command:


(in PyMOL) `run Follow-macro-5l7h.py`

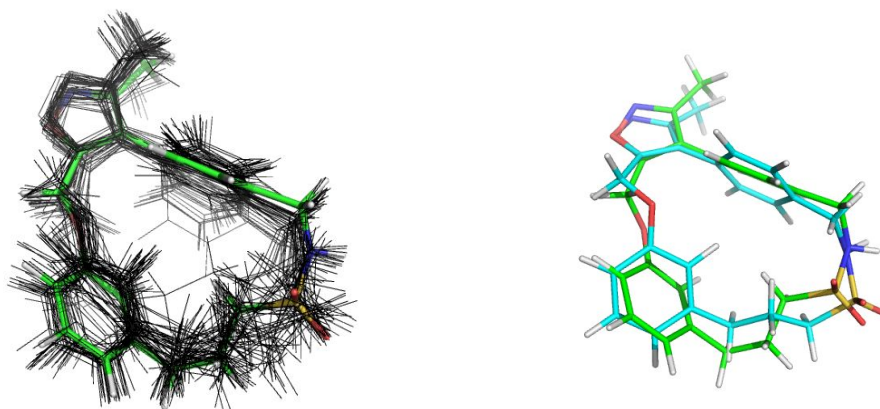

Conformational search results, as displayed in PyMOL. Lowest energy conformation is in green (conf-8.mol2 in the matrix below). PDB structure is in cyan. RMSD between conf-8.mol2 and PDB structure is 1.785 Å over all atoms. All sampled conformations are in black thin lines to show the conformational range of the macrocycle. Results may vary from one search to another.


Using the ConfBuster-Analysis.py script allows to compare the n best results with a reference or the initial structure. Results are shown as a 2D RMSD matrix of n conformations. On the right, an energy bar (from green to purple) between the best and worst energy is displayed:

```
$ ConfBuster-Analysis.py -i macro-5l7h -R macro-5l7h.mol2 -n 20
```

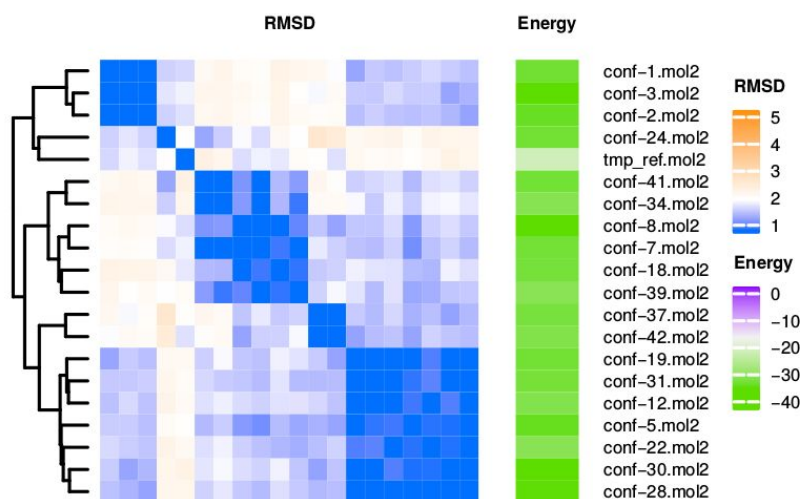

RMSD matrix between the 20 lowest energy conformations from a ConfBuster conformational search of the macrocycle from PDB 5l7h. The conformation from the object conf-8.mol2 displays the lowest conformational energy. Results may vary from one search to another.

ConfBuster example of use: macrocycle from PDB 5IGI

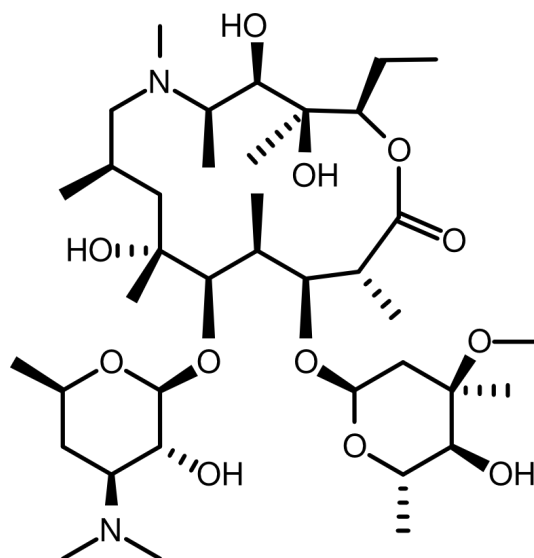

Macrocycle molecule ZIT from PDB 5IGI

From the PDB 5IGI, one of the macrocycle molecules (the first segment identified as ZIT) was prepared (correct bond orders and addition of hydrogens) and saved to a file (file *macro-5igi.pdb* in the *examples/5igi* directory of ConfBuster distribution).

The conformational search steps are as follows (command lines are highlighted with a light gray color):

a. Perform a minimization on macro-5igipdb

```
$ ConfBuster-Single-Molecule-Minimization.py -i macro-5igi.pdb
```

This will create the file *macro-5igi.mol2*, which is used in the next step.

b. Start Macrocyclic linear sampling

```
$ ConfBuster-Macrocyclic-Linear-Sampling.py -i macro-5igi.mol2 -n 5 -N 5 -r 0.5
```

This will create a directory called *macro-5igi* which will contain the solutions from the conformational search, each conformation in a single file.


c. Viewing and Analyzing results

To view results go in the *macro-5igi* directory and run the following command. In the PyMOL window, the best conformation will be the first object loaded at the top of the object list and shown in green sticks.


```
$ cd macro-5igi
$ pymol Follow-macro-5igi.py
```

In PyMOL, progress may also be followed using the run command:


```
(in PyMOL) run Follow-macro-5igi.py
```

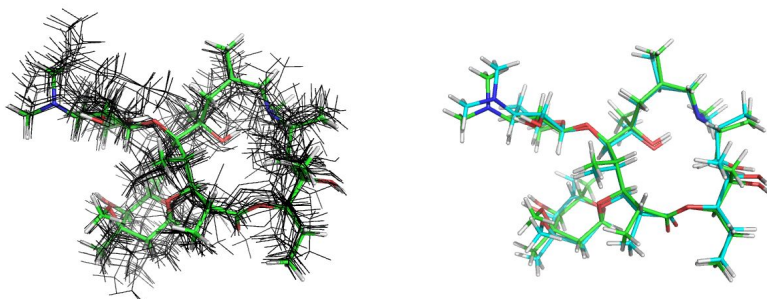

Conformational search results, as displayed in PyMOL. Lowest energy conformation is in green (conf-2.mol2 in the matrix below). PDB structure is in cyan. RMSD between conf-2.mol2 and PDB structure is 0.635 Å over all atoms. All sampled conformations are in black thin lines to show the conformational range of the macrocycle. Results may vary from one search to another.

Using the ConfBuster-Analysis.py script allows to compare the n best results with a reference or the initial structure. Results are shown as a 2D RMSD matrix of n conformations. On the right, an energy bar (from green to purple) between the best and worst energy is displayed:

```
$ ConfBuster-Analysis.py -i macro-5igi -R macro-5igi.mol2 -n 20
```

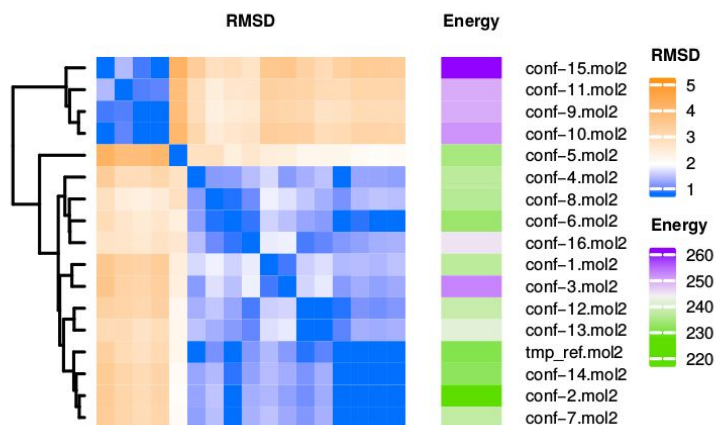

RMSD matrix between the 20 lowest energy conformations from a ConfBuster conformational search of the macrocycle from PDB 5IGI. The conformation from the object conf-2.mol2 displays the lowest conformational energy. Results may vary from one search to another.