

PRACTICAL: 1

AIM: Introduction to Android and Create “Custom Message” application. That will display “Custom Message” in the middle of the screen in the Black color with the Yellow background.

THEORY: About android:

Developer	Various (mostly Google and the Open Handset Alliance)
Written in	Java (UI), C (core), C++ and others
OS family	Unix-like (Modified Linux kernel)
Working state	Current
Source model	Open source (most devices include proprietary components, such as Google Play)
Initial release	September 23, 2008; 11 years ago
Latest release	Android 10 / September 3, 2019; 3 months ago
Repository	android.googlesource.com
Marketing target	Smartphones, tablet computers, smart TVs (Android TV), Android Auto and smartwatches (Wear OS)
Available in	100+ languages
Update method	Over-the-air
Package manager	APK-based
Platforms	32- and 64-bit ARM, x86 and x86-64
Kernel type	Linux kernel
Default user interface	Graphical (multi-touch)
License	Apache License 2.0 GNU GPL v2 for the Linux kernel modifications
Official website	www.android.com

Android life cycle:

onCreate(): In the onCreate() method, you perform basic application startup logic that should happen only once for the entire life of the activity.

onStart(): The onStart() call makes the activity visible to the user, as the app prepares for the activity to enter the foreground and become interactive.

onResume(): When the activity enters the Resumed state, it comes to the foreground, and then the system invokes the onResume() callback. This is the state in which the app interacts with the user. The app stays in this state until something happens to take focus away from the app.

onPause(): The system calls this method as the first indication that the user is leaving your activity (though it does not always mean the activity is being destroyed); it indicates that the activity is no longer in the foreground (though it may still be visible if the user is in multi-window mode).

onStop(): When your activity is no longer visible to the user, it has entered the Stopped state, and the system invokes the onStop() callback.

onDestroy(): onDestroy() is called before the activity is destroyed.

CODE:

activity_main.xml

```
<?xml version="1.0" encoding="utf-8"?>
<androidx.constraintlayout.widget.ConstraintLayout
    xmlns:android="http://schemas.android.com/apk/res/android"
    xmlns:app="http://schemas.android.com/apk/res-auto"
    xmlns:tools="http://schemas.android.com/tools"
    android:layout_width="match_parent"
    android:layout_height="match_parent"
    android:background="@color/LightYellow"
    tools:context=".MainActivity">

    <TextView
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:text="Hello 17IT005!"
        android:padding="15dp"
        android:textSize="20sp"
        android:background="@color/Yellow"
        app:layout_constraintBottom_toBottomOf="parent"
        app:layout_constraintLeft_toLeftOf="parent"
        app:layout_constraintRight_toRightOf="parent"
        app:layout_constraintTop_toTopOf="parent"
        app:layout_constraintVertical_bias="0.468" />

</androidx.constraintlayout.widget.ConstraintLayout>
```

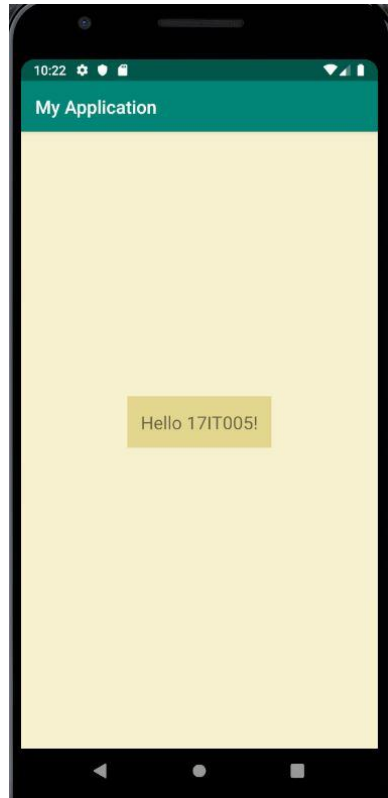
MainActivity.kt

```
package com.example.myapplication

import androidx.appcompat.app.AppCompatActivity
import android.os.Bundle

class MainActivity : AppCompatActivity() {

    override fun onCreate(savedInstanceState: Bundle?) {
        super.onCreate(savedInstanceState)
        setContentView(R.layout.activity_main)
    }
}
```

OUTPUT:

LATEST APPLICATIONS: Applications for expenses or splitting expenses are used most now-a-days. Though the idea is simple, it's very useful.

LEARNING OUTCOME: Different colors can be used by adding them into colors.xml in res/values.