


Question 1

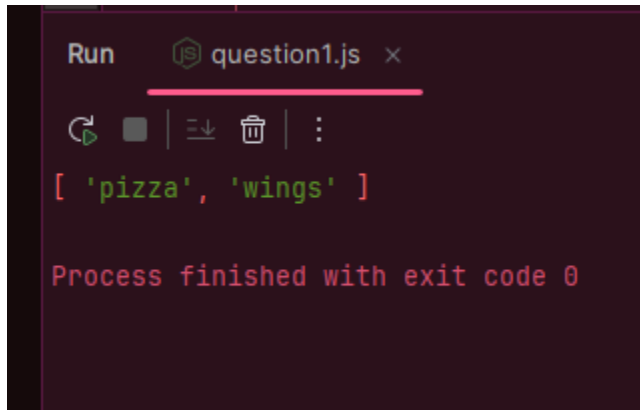


```
Run question1.js x
[ 'pizza', 'wings' ]

Process finished with exit code 0
```

A terminal window titled "Run question1.js" with a close button. It contains a JavaScript array `[ 'pizza', 'wings' ]` and a message "Process finished with exit code 0". Above the array is a toolbar with icons for running, pausing, downloading, deleting, and a menu.

Question 2

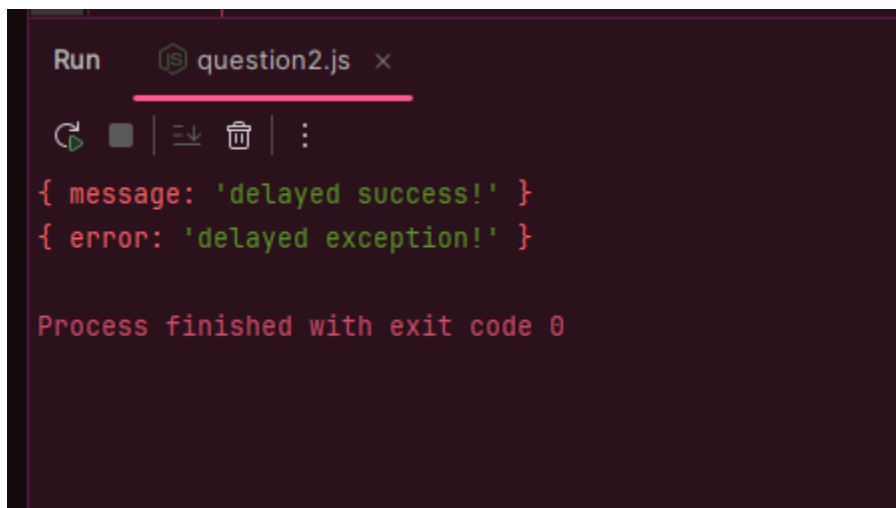

```
Run question2.js x
{ message: 'delayed success!' }
{ error: 'delayed exception!' }

Process finished with exit code 0
```

A terminal window titled "Run question2.js" with a close button. It contains two JavaScript objects: `{ message: 'delayed success!' }` and `{ error: 'delayed exception!' }`, followed by the message "Process finished with exit code 0". Above the objects is a toolbar with icons for running, pausing, downloading, deleting, and a menu.

Question 3 add.js

The screenshot shows an IDE with a project named 'COMP3123'. The file explorer on the left shows a directory structure with 'question1.js' selected. The main editor displays the code for 'add.js', which uses the 'fs' and 'path' modules to create a 'Logs' directory and write ten log files. The 'Run' panel at the bottom shows the output of the script, listing the created log files and a successful exit code.

```
1  const fs = require('fs');
2  const path = require('path');
3
4  const logDir = path.join(process.cwd(), 'Logs');
5
6  if (!fs.existsSync(logDir)) {
7      fs.mkdirSync(logDir);
8  }
9
10 process.chdir(logDir);
11
12 for (let i : number = 0; i <= 9; i++) {
13     const fileName : string = `log${i}.txt`;
14     fs.writeFileSync(fileName, `This is log file ${i}`);
15     console.log(`${fileName}`);
16 }
```

Run add.js ×

log0.txt
log1.txt
log2.txt
log3.txt
log4.txt
log5.txt
log6.txt
log7.txt
log8.txt
log9.txt

Process finished with exit code 0

Question 3 remove.js

The screenshot shows an IDE with a project explorer on the left and a code editor on the right. The project explorer shows a directory structure for 'COMP3123' with subdirectories 'question1', 'question2', 'question3', 'screenshots', and 'week01' through 'week04'. The 'question3' directory contains 'add.js' and 'remove.js'. The code editor shows the content of 'remove.js' with line numbers 1 through 14. The code uses the 'fs' module to check for the existence of a directory, create it if it doesn't exist, and then delete all files within it. The output window at the bottom shows the execution of the script, which successfully deletes 10 files named 'log0.txt' through 'log9.txt'.

```
Project > COMP3123 C:\Users\carri\School\> .idea> 101469655_comp3123_labtest1> question1> JS question1.js> question2> question3> JS add.js> JS remove.js> screenshots> M+ README.md> week01> week02> week03> week04> .gitignore> External Libraries> Scratches and Consoles
```

```
1  const fs = require('fs');
2  const path = require("path");
3
4  const logDir = path.join(process.cwd(), 'Logs');
5
6  if (fs.existsSync(logDir)) {
7      const files = fs.readdirSync(logDir);
8
9      for (const file of files) {
10         console.log(`delete files....${file}`);
11         fs.unlinkSync(path.join(logDir, file));
12     }
13     fs.rmdirSync(logDir);
14 }
```

```
Run remove.js x
delete files....log0.txt
delete files....log1.txt
delete files....log2.txt
delete files....log3.txt
delete files....log4.txt
delete files....log5.txt
delete files....log6.txt
delete files....log7.txt
delete files....log8.txt
delete files....log9.txt
Process finished with exit code 0
```