


Exercise-4: Time Traveller – Getting sensitive information from internal files


- 1. Steps and finding out the lottery No.:
 - Click on the given link adding /git to this link, such as: https://time-traveller.cfapps.eu10.hana.ondemand.com/git/
 - From the website, download master file from folder logs -> refs -> heads -> master. A comment hash key is provided in this file. Open this master file in text file.

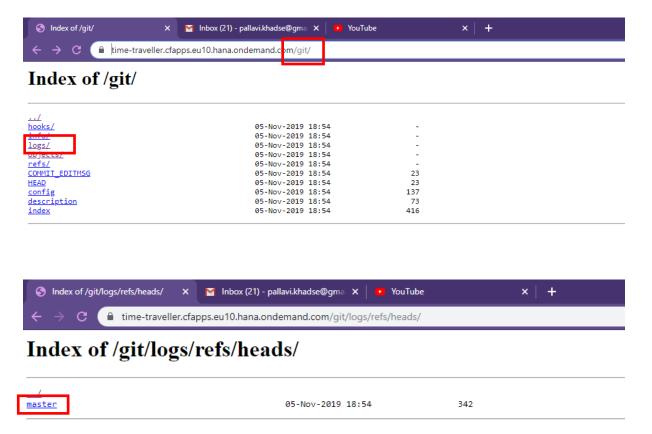

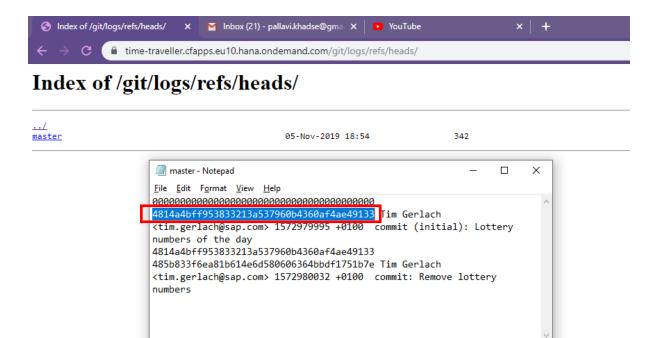

- Now, create a folder by any name say, LotteryNo. (in my case). And open this folder in Git Bash terminal by right-clicking on the folder.
- Initialize an empty Git repository in the above mentioned folder by giving the command **git init** in the Git Bash. This will create a hidden folder in the LotteryNo. folder by the name **.git/**, where a complete folder 'objects' from the given url https://time-traveller.cfapps.eu10.hana.ondemand.com/git/ has to be downloaded and pasted as shown below.



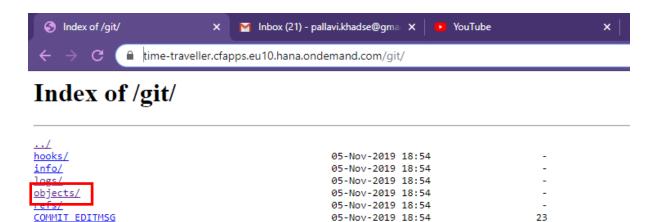

05-Nov-2019 18:54

05-Nov-2019 18:54

05-Nov-2019 18:54

05-Nov-2019 18:54

23

137

73

416

Finally to get the Lottery number, enter the command 'git diff 4814a4bff953833213a537960b4360af4ae49133' in the Git Bash for getting the hidden Lottery number as shown in the below screenshots. Note: 4814a4bff953833213a537960b4360af4ae49133 is the comment hash from the master file as downloaded in Step 2.

The lottery number is 4-8-15-16-23-42.

HEAD

config

index

description

```
MINGW64:/c/Users/hp/Desktop/LotteryNo
                                                                                          p@PallaviKhadse-42N84Q6G MINGW64 ~/Desktop/LotteryNo (master)
$ git diff 4814a4bff953833213a537960b4360af4ae49133
diff --git a/.gitignore b/.gitignore
deleted file mode 100644
index e43b0f9..0000000
 -- a/.gitignore
+++ /dev/null
@ -1 +0,0 @@
diff --git a/Staticfile b/Staticfile
deleted file mode 100644
index 52f45c3..0000000
--- a/Staticfile
 ++ /dev/null
@ -1,3 +0,0 @@
 No newline at end of file
diff --git a/manifest.yml b/manifest.yml
deleted file mode 100644
index d18cef1..0000000
 -- a/manifest.yml
+++ /dev/null
 @ -1,7 +0,0 @@
  ..skipping...
```

```
..skipping...
diff --git a/.gitignore b/.gitignore
deleted file mode 100644
index e43b0f9..0000000
--- a/.gitignore
+++ /dev/null
@@ -1 +0,0 @@
diff --git a/Staticfile b/Staticfile
deleted file mode 100644
index 52f45c3..0000000
--- a/Staticfile
+++ /dev/null
@@ -1,3 +0,0 @@
No newline at end of file
diff --git a/manifest.yml b/manifest.yml
deleted file mode 100644
index d18cef1..0000000
--- a/manifest.yml
+++ /dev/null
a@ -1,7 +0,0 @@
```

```
diff --git a/public/index.html b/public/index.html

deleted file mode 100644

@@ -1,3 +0,0 @@

-directory: visible
-host_dot_files: true
-root: public
\ No newline at end of file

diff --git a/manifest.yml b/manifest.yml

deleted file mode 100644
index d18cefl..000000
--- a/manifest.yml

+++ /dev/null

@@ -1,7 +0,0 @@
----
-applications:
-- name: git-exercise
-- memory: 100M
-- host: time-traveller
-- buildpack: https://github.com/cloudfoundry/staticfile-buildpack

diff --git a/public/index.html b/public/index.html

deleted file mode 100644
index a9178ae..0000000
--- a/public/index.html
+++ /dev/null

@@ -1,24 +0,0 @@
--chead>
-- <-style>
```