


# WALK

BEGINNER



MOTION

```
when [right arrow▼] key pressed
```

```
change x by (10)
```

```
when [left arrow▼] key pressed
```

```
change x by (-10)
```

*// tip: flip costume*


*// for direction facing*

**PRO TIP**

Use **change x** (not 'move') to prevent diagonal drift when pressing two keys at once.

# JUMP & GRAVITY

BEGINNER

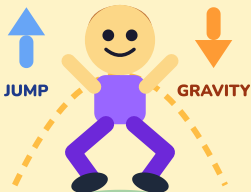

SPACE

MOTION · VARIABLES

— gravity (always runs) —

```
when  clicked
```

```
set [y power▼] to (0)
```

```
forever
```

```
change [y power▼] by (-1)
```

```
change y by (y power)
```

```
if <touching [ground▼]?> then
```

```
set [y power▼] to (0)
```

```
end
```

```
end
```

— jump (on space) —

```
when [space▼] key pressed
```

```
if <touching [ground▼]?> then
```

```
set [y power▼] to (12)
```

 **PRO TIP** In Scratch, **positive y = up**. Jump sets **y power = 12**; gravity subtracts 1 each frame so the leap arcs back down.

# COLLECT

BEGINNER

SCORE: 1



SENSING

```
when  clicked
```

```
forever
```

```
if <touching [Apple▼]?> then
```

```
change [score▼] by (1)
```

```
hide
```

```
end
```

```
end
```

**PRO TIP**

**Hide** the apple when collected instead of deleting — clones can't be deleted the same way!

# RANDOM SPAWN

BEGINNER



A diagram on a dark blue background showing five yellow stars. One star in the center is highlighted with a larger, semi-transparent yellow circle around it. A dashed yellow line connects a small yellow dot on the top-left star to the center of the highlighted star. To the left of the highlighted star is a yellow rounded rectangle containing the text 'x: pick random'.

x: pick random

OPERATORS

```
when  clicked
```

```
forever
```

```
go to x: (pick random
```

```
-200 to 200)
```

```
y: (180)
```

```
wait (2) secs
```

```
end
```

 **PRO TIP** **pick random** works with negative numbers! Use -200 to 200 for full stage width.



# CLONE

INTERMEDIATE

ORIGINAL

CLONE



CONTROL

```
when  clicked
```

```
forever
```

```
create clone of [myself▼]
```

```
wait (1) secs
```

```
end
```

— clone script —

```
when I start as a clone
```

```
show
```

**PRO TIP**

The **original** sprite can stay hidden — clones do all the work. Set visible only in clone script.

# CLONE FALLS

INTERMEDIATE



CONTROL

```
when I start as a clone
```

```
go to x: (pick random
```

```
-200 to 200) y: (180)
```

```
forever
```

```
change y by (-5)
```

```
if <(y pos) < -180>
```

```
delete this clone
```

```
end
```

```
end
```

**PRO TIP**

Always **delete** clones when off-screen — too many clones slow Scratch to a crawl!

# FIRE LASER

INTERMEDIATE



SPACE

CONTROL

```
when [space▼] key pressed
```

```
create clone of [Laser▼]
```

— *Laser sprite* —

```
when I start as a clone
```

```
show
```

```
repeat until <y > 180>
```

```
change y by (15)
```

```
end
```

```
delete this clone
```


**PRO TIP**

Make the Laser sprite tiny (**2×12px** white rectangle). It moves faster than the ship.

# MOUSE CLICK

INTERMEDIATE

+1

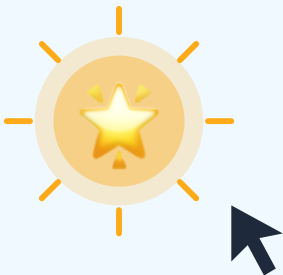

EVENTS

```
when this sprite clicked
```

```
change [score▼] by (1)
```

```
hide
```

```
wait (pick random 1 to 3) secs
```

```
go to x:(pick random
```

```
-200 to 200)
```

```
y:(pick random -150 to 150)
```

```
show
```

**PRO TIP**

**this sprite clicked** fires even if another script is running — great for quick reactions!





LIVES



broadcast: hit

```
when  clicked
```

```
set [lives▼] to (3)
```

— hit handler —

```
when I receive [hit▼]
```

```
change [lives▼] by (-1)
```

```
if <(lives) = 0> then
```

```
  broadcast [game over▼]
```

```
end
```

**PRO TIP**

Show lives as **costume changes** (heart sprites)  
OR as a variable. Costume looks more fun!

# SCORE TRACKER

INTERMEDIATE

SCORE

1250



+10



+10



+10

VARIABLES

```
when 🚩 clicked
```

```
set [score▼] to (0)
```

*— collect handler —*

```
when I receive [collect▼]
```

```
change [score▼] by (10)
```

*// always reset on start*

*// use broadcast to add*

**PRO TIP**

**set score to 0** inside 'when flag clicked' so restarting always resets it.

# TIMER

INTERMEDIATE



VARIABLES

```
when  clicked
```

```
set [time▼] to (30)
```

```
repeat until <(time) = 0>
```

```
wait (1) secs
```

```
change [time▼] by (-1)
```

```
end
```

```
broadcast [game over▼]
```

**PRO TIP**

Put the countdown in its **own script** so the game can still move while counting down.

# DRAW BACKDROP

ADVANCED



BACKDROPS



LOOKS

## PAINT EDITOR STEPS


- 1 Click the **Backdrops** tab
- 2 Choose **Paint** (brush icon)
- 3 Draw maze walls in **black**
- 4 Fill background in **white**
- 5 Name it "**Level 1**"

 **PRO TIP** Use the **Fill tool** (paint bucket) to quickly color large areas. Zoom in for detail.



# 4-WAY MOVE

ADVANCED

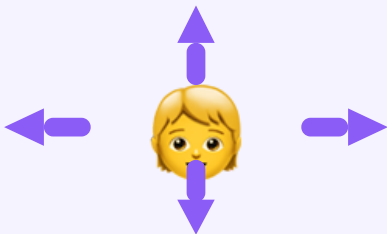

WASD

MOTION

```
when  clicked
```

```
forever
```

```
if <key [up▼] pressed?>
```

```
  change y by (5)
```

```
if <key [down▼] pressed?>
```

```
  change y by (-5)
```

```
if <key [right▼] pressed?>
```

```
  change x by (5)
```

```
if <key [left▼] pressed?>
```

```
  change x by (-5)
```

```
end
```

**PRO TIP**

Sensing **key pressed?** inside forever lets **multiple keys** work simultaneously.



prev\_x saved

```
when  clicked
```

```
forever
```

```
if <touching color ?>
```

```
  go to x:(prev_x)
```

```
  y:(prev_y)
```

```
end
```

```
set [prev_x▼] to (x pos)
```

```
set [prev_y▼] to (y pos)
```

```
end
```

**PRO TIP**

Save position **BEFORE** moving. If you hit a wall, teleport back — no getting stuck!

# ROLLBACK

ADVANCED

SAVED  
`prev_x,y`



MOTION

```
when  clicked
```

```
forever
```

```
set [prev_x▼] to (x pos)
```

```
set [prev_y▼] to (y pos)
```

```
move (5) steps
```

```
if <touching color []?>
```

```
go to x:(prev_x)
```

```
y:(prev_y)
```

```
end
```

```
end
```

**PRO TIP**

Save → Move → Check → Undo. A **universal pattern** for all collision detection!

# FLAP PHYSICS

ADVANCED

$vy = -6$

↑ flap!



VARIABLES

— gravity (always runs) —

```
when  clicked
```

```
set [y velocity▼] to (0)
```

```
forever
```

```
change [y velocity▼] by (-1)
```

```
change y by (y velocity)
```

```
end
```

— flap (on space) —

```
when [space▼] key pressed
```

```
set [y velocity▼] to (8)
```

 **PRO TIP** Flap sets **y velocity = 8** (upward burst); gravity subtracts 1 each frame so the bird drifts back down.



# SCROLL LEFT

ADVANCED



MOTION

— Pipe sprite —

```
when  clicked
```

```
forever
```

```
change x by (-4)
```

```
if <(x pos) < -260>
```

```
set x to (260)
```

```
end
```

```
end
```

**PRO TIP**

Move backdrop and obstacles **left**; keep the bird fixed in x. **Infinite scrolling!**

# PROCEDURAL

ADVANCED



2 secs

2 secs



CONTROL

```
when 🚩 clicked
```

```
  forever
```

```
    create clone of [Pipe▼]
```

```
    wait (2) secs
```

```
  end
```

— clone script —

```
when I start as a clone
```

```
  set y to (pick random -80 to 80)
```

```
  repeat until <(x) < -260>
```

```
    change x by (-4)
```

```
  end
```

```
  delete this clone
```

💡 **PRO TIP** Randomize the **gap height** each clone. Players can't memorize a fixed pattern.

# GAME OVER

ADVANCED

# GAME OVER



broadcast sent!

CONTROL

```
when I receive [game over▼]
```

```
stop [other scripts▼]
```

```
switch backdrop to [Game Over▼]
```

```
wait (2) secs
```

```
stop [all▼]
```

**PRO TIP**

**broadcast** 'game over' from ANY sprite. One central script handles the ending **cleanly**.