9ANCE INDIA PRIVATE LIMITED

Cloud Telephony API

Developer Documentation

Click-to-call · Browser dialer · Call history · Auto-dialer campaigns · Live monitoring · Agent analytics

AT A GLANCE

Base URL	`https://crmapi.9ance.com`
Authentication	`Authorization: Bearer <JWT>` on every request
Format	JSON over HTTPS (campaign upload also accepts multipart/form-data)
Real-time	`wss://crmapi.9ance.com/ws/telephony/calls/`
Token lifetime	Access token 1 hour · Refresh token 7 days

Last updated: 28 September 2026

Support: +91-99816 86606 · info@9ance.com · www.9ance.com
Bhopal, Madhya Pradesh, India

Contents

1. Overview 3
2. Quick Start 4
3. Authentication 4
4. Setup: Activate Cloud Telephony 6
5. Agents 8
6. DIDs (Phone Numbers) 10
7. Click-to-Call 10
8. Call History 11
9. Live Calls 14
10. SIP / Browser Dialer 14
11. Auto-Dialer Campaigns 16
12. Dispositions 18
13. Call Groups (Ring Groups) 18
14. Telephony Dashboard 19
15. Agent Analytics 19
16. Phone Matching 19
17. Webhooks 19
18. Transcription 20
19. Errors, Status Codes & Rate Limits 20
20. Common Workflows 21
21. Endpoint Index 22

© 2026 9ance India Private Limited · www.9ance.com

1. Overview

9ance Cloud Telephony gives your application a complete cloud phone system through a single REST API. There is no telephony infrastructure for you to build, host or maintain. Everything runs on 9ance.

What you can build

Capability	What it does	Section
Click-to-call	Start a call from any CRM record with one request	7
Browser dialer	A full in-browser softphone over WebSocket SIP	10
Call history	Searchable log of every call, with recordings and outcomes	8
Live call monitoring	See calls in progress in real time	9
Auto-dialer campaigns	Upload a list (or pick CRM records) and dial it automatically	11
Dispositions & follow-ups	Tag each call with an outcome and schedule a follow-up	12
Agent analytics	Calls, answer rate, talk time, idle and break time per agent	15
Missed-call follow-ups	Missed calls are captured automatically through webhooks	17

How it works

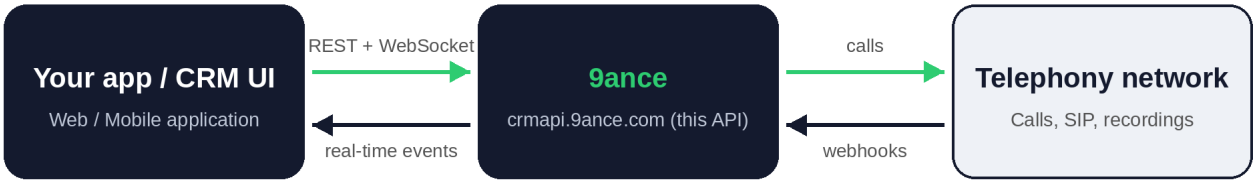


Figure 1. How your application, 9ance and the telephony network connect

The admin configures the telephony account once. From then on, agent sync, status mapping, SIP credentials and webhooks are handled by 9ance. **Your app talks only to 9ance endpoints and never to the telephony network directly.**

Conventions used in this document

Convention	Detail
IDs	UUID strings, for example `"3f2c...-..."`
Timestamps	ISO 8601 with time zone, for example `2026-09-28T10:00:00Z`
Phone numbers	Sent and returned as strings. Agent and customer numbers may include a leading `0` (`07415912090`); DIDs use country-code format (`917935486050`)
Trailing slash	All endpoint paths end with `/`
Pagination	List endpoints accept `page` and `page_size`
`<id>`	Placeholder for a UUID in a URL path

2. Quick Start

Six requests take you from zero to a live call. The examples use `curl`; set these once:

```
export BASE=https://crmapi.9ance.com
```

Step 1. Log in and capture the access token

```
curl -X POST $BASE/api/auth/login/ \
  -H "Content-Type: application/json" \
  -d '{"email":"admin@company.com","password":"********"}'
```

Copy the `access` value from the response:

```
export TOKEN=eyJ...
```

Step 2. Activate Cloud Telephony (once per tenant)

```
curl -X POST $BASE/api/telephony/config/ \
  -H "Authorization: Bearer $TOKEN" -H "Content-Type: application/json" \
  -d '{
    "provider_key": "indiavoice",
    "display_name": "My Dialer",
    "credentials": { "api_key": "<provided by 9ance>", "api_secret": "<provided by 9ance>" },
    "settings": {}
  }'
```

Register the returned `webhook_url` on the 9ance dashboard (see Section 17).

Step 3. Verify the connection

```
curl -X POST $BASE/api/telephony/config/test/ -H "Authorization: Bearer $TOKEN"
```

Expected: `{"success": true}`.

Step 4. Sync agents and phone numbers

```
curl -X POST $BASE/api/telephony/agents/sync/ -H "Authorization: Bearer $TOKEN"
curl -X POST $BASE/api/telephony/dids/sync/   -H "Authorization: Bearer $TOKEN"
```

Step 5. Map an agent to a CRM user

```
curl -X POST $BASE/api/telephony/agents/<agent_id>/assign/ \
  -H "Authorization: Bearer $TOKEN" -H "Content-Type: application/json" \
  -d '{"user_id":"<crm_user_uuid>"}'
```

Step 6. Place a call

```
curl -X POST $BASE/api/telephony/calls/click-to-call/ \
  -H "Authorization: Bearer $TOKEN" -H "Content-Type: application/json" \
  -d '{"customer_number":"9876543210","agent_id":"<agent_id>","lead_id":"<lead_id>"}'
```

3. Authentication

Every request needs a JWT access token sent as a Bearer token. A missing or expired token returns `401 Unauthorized`.

Token	Lifetime	Purpose
`access`	**1 hour**	Sent on every API call
`refresh`	**7 days**	Exchanged for a new `access` token

3.1 Login

```
POST /api/auth/login/
Content-Type: application/json

{
  "email": "user@company.com",
  "password": "..."
}
```

Response

```
{
  "access": "eyJ...",
  "refresh": "eyJ...",
  "user_id": "uuid",
  "permissions": { "...": "..." },
  "hierarchy": {
    "accessLevel": "team_data",
    "isManager": true,
    "subordinateCount": 4,
    "canSeeAllData": false
  },
  "user": {
    "id": "uuid",
    "email": "...",
    "name": "...",
    "user_type": "normal",
    "isActive": true
  },
  "tenant": { "id": "uuid", "name": "My Company" }
}
```

Field	Description
`access` / `refresh`	The token pair
`permissions`	What this user is allowed to do (for example listening to or downloading recordings)
`hierarchy`	Where the user sits in the team structure. Drives which calls and analytics they can see
`user`	Basic profile of the logged-in user
`tenant`	The company account the user belongs to

3.2 Refresh an access token

```
POST /api/auth/token/refresh/

{ "refresh": "eyJ..." }
```

Returns a new `access` token. Refresh before the hour is up, or handle a `401` by refreshing and retrying the request once.

© 2026 9ance India Private Limited · www.9ance.com

3.3 Token pair (alternative)

```
POST /api/auth/token/

{ "email": "...", "password": "..." }
```

Returns only `{ "access": "...", "refresh": "..." }`, without the permissions payload.

3.4 Using the token

```
GET /api/telephony/calls/
Authorization: Bearer eyJ...
```

3.5 Signup

```
POST /api/auth/signup/

{
  "email": "admin@company.com",
  "password": "...",
  "name": "Admin Name",
  "company_name": "My Company"
}
```

Creates the tenant and the admin user, and returns tokens in the same shape as login.

3.6 Product-specific signup

```
POST /api/auth/signup/product/

{ "email": "...", "password": "...", "name": "...", "product": "crm" }
```

To see the available `product` values:

```
GET /api/auth/products/
```

3.7 Security behaviour

Rule	Detail
Brute-force protection	5 failed login attempts lock the account for **60 minutes**
Captcha	Cloudflare Turnstile is enforced on **web** login. Mobile is exempt (device-based authentication)
Concurrent sessions	Maximum **4**. The 5th login is blocked unless the request includes `"force_logout": true`
Device tracking	Send the `X-Device-Fingerprint` header for session tracking. Logging in again from the same device does not count against the session limit

4. Setup: Activate Cloud Telephony

Activation is done once per tenant, normally by an admin. It links your 9ance account to your telephony credentials.

4.1 Create the config

```
POST /api/telephony/config/
```

```
{
  "provider_key": "indiavoice",
  "display_name": "My Dialer",
  "credentials": {
    "api_key": "<API key (provided by 9ance)>",
    "api_secret": "<API secret (provided by 9ance)>"
  },
  "settings": {}
}
```

Field	Description
`provider_key`	Provider identifier, supplied by 9ance
`display_name`	A friendly name for this account
`credentials.api_key` / `api_secret`	Credentials supplied by 9ance
`settings`	Optional account settings (empty object by default)

The response includes `webhook_token` and `webhook_url`. **Register the webhook URL on the 9ance dashboard**, otherwise call events will not arrive (Section 17).

4.2 Read, update or delete the config

Method	Path	Notes
`GET`	`/api/telephony/config/`	Credentials are redacted in the response
`PUT`	`/api/telephony/config/`	Partial update. `credentials` is optional
`DELETE`	`/api/telephony/config/`	Removes the configuration

4.3 Test the connection

```
POST /api/telephony/config/test/
```

Checks that the stored credentials are valid. Returns `{"success": true}`, or the error detail if the check fails.

4.4 Multiple telephony accounts

A tenant can hold more than one telephony account and switch which one is active.

Method	Path	Purpose
`GET`	`/api/telephony/provider-configs/`	List all accounts
`POST`	`/api/telephony/provider-configs/`	Add another account
`PATCH`	`/api/telephony/provider-configs/<config_id>/`	Update an account
`DELETE`	`/api/telephony/provider-configs/<config_id>/`	Remove an account
`POST`	`/api/telephony/provider-configs/<config_id>/enable/`	Make this the active account

Note. Creating a config when one already exists returns `409 Conflict`. Use `PUT` to change it.

5. Agents

An **agent** is a person who can make and receive calls on 9ance. An agent becomes useful inside your CRM only after it is **mapped to a CRM user**. Until then the agent exists on 9ance but cannot use the in-CRM dialer or see their own analytics.

5.1 The agent object

```
{
  "id": "uuid",
  "provider_agent_id": "9111",
  "name": "Harsh",
  "email": "harsh@...",
  "phone": "06262664771",
  "extension": "*9111",
  "agent_type": "sip",
  "access": "1",
  "is_active": true,
  "status": "ready",
  "user": "uuid or null",
  "user_name": "Harsh Sharma",
  "user_email": "harsh@company.com",
  "default_did": "uuid or null",
  "default_did_number": "917935486050",
  "effective_did": "917935486050",
  "sip_username": "06262664771",
  "sip_password_set": true,
  "last_synced_at": "2026-09-28T...",
  "created_at": "...",
  "updated_at": "..."
}
```

Field	Description
`id`	9ance agent UUID (use this in API calls)
`provider_agent_id`	The agent's ID on the telephony side
`phone`, `extension`	Agent's number and extension
`agent_type`	Type of agent, for example `sip`
`access`	`1` = admin, `2` = agent
`is_active`	Whether the agent is enabled
`status`	Working status. See 5.6
`user`, `user_name`, `user_email`	The linked CRM user. `user` is `null` when unmapped
`default_did`, `default_did_number`	The number this agent dials out from by default
`effective_did`	The number actually used: the agent's DID, or the tenant default if none is set
`sip_username`	SIP login for the browser dialer
`sip_password_set`	`true` if a SIP password is stored. The password itself is **write-only** and never returned
`last_synced_at`	When the agent was last synced

© 2026 9ance India Private Limited · www.9ance.com

5.2 Endpoints

Method	Path	Purpose
`GET`	`/api/telephony/agents/`	List all agents of the tenant
`POST`	`/api/telephony/agents/sync/`	Sync agents from the telephony account
`POST`	`/api/telephony/agents/`	Create an agent
`DELETE`	`/api/telephony/agents/<id>/`	Delete an agent
`POST`	`/api/telephony/agents/<id>/assign/`	Map or unmap an agent to a CRM user
`POST`	`/api/telephony/agents/bulk-assign/`	Map many agents at once
`POST`	`/api/telephony/agents/<id>/status/`	Set an agent's working status
`GET`	`/api/telephony/agents/me/`	The logged-in user's own agent
`GET` / `POST`	`/api/telephony/agents/me/status/`	Read or change my own status
`GET`	`/api/telephony/agents/me/softphone-config/`	Softphone configuration (Section 10)

5.3 Sync agents

```
POST /api/telephony/agents/sync/
```

New agents are created and existing ones updated.

```
{ "synced": 30, "created": 2 }
```

5.4 Create an agent

```
POST /api/telephony/agents/

{
  "name": "Ramesh",
  "phone": "9876543210",
  "access": "2",
  "sip_password": "optional"
}
```

Creates the agent on 9ance. `access`: `1` = admin, `2` = agent. `sip_password` is optional and write-only.

5.5 Map agents to CRM users

Single agent

```
POST /api/telephony/agents/<id>/assign/

{ "user_id": "uuid" }
```

To unmap, send `{ "user_id": null }`.

Bulk

```
POST /api/telephony/agents/bulk-assign/
```

```
{
  "assignments": [
    { "agent_id": "uuid", "user_id": "uuid" },
    { "agent_id": "uuid", "user_id": null }
  ]
}
```

5.6 Agent status values

```
POST /api/telephony/agents/<id>/status/

{ "status": "ready" }
```

Status	Meaning
`ready`	Available for calls
`break`	On a break (requires `break_type`)
`busy`	On a call, or set manually
`offline`	Logged out, or on a long break

For breaks, add a `break_type` of `short` or `long`:

```
{ "status": "break", "break_type": "short" }
```

5.7 My agent

The logged-in user's own agent record and status:

```
GET  /api/telephony/agents/me/            my agent record
GET  /api/telephony/agents/me/status/     my current status
POST /api/telephony/agents/me/status/     change my status

{ "status": "break", "break_type": "short" }
```

6. DIDs (Phone Numbers)

A **DID** is a phone number that calls go out from and come in to.

Method	Path	Purpose
`GET`	`/api/telephony/dids/`	List all numbers
`POST`	`/api/telephony/dids/sync/`	Sync numbers from 9ance
`POST`	`/api/telephony/dids/<id>/set-default/`	Make this the tenant's default number

Fields: `id`, `provider_did_id`, `number`, `account_id`, `is_default`, `is_active`.

Which number does a call use? The order of preference is: the `did_id` given in the request, then the agent's default DID, then the tenant's default DID.

7. Click-to-Call

Starts a call between an agent and a customer. 9ance rings the agent first and then connects the customer.

```
POST /api/telephony/calls/click-to-call/

{
  "customer_number": "9876543210",
  "agent_id": "uuid",
  "lead_id": "uuid"
}
```

Parameters

Parameter	Description
`customer_number`	The number to call
`agent_id` / `agent_number` / `agent_email`	Identify the agent with **any one** of these. If none is sent, the logged-in user's own agent is used
`lead_id` / `contact_id` / `customer_id`	Optional. Links the call to a CRM record
`did_id`	Optional. Overrides the outgoing number (see Section 6)
`wait_seconds`	Optional. How long to ring before giving up. Default `30`

Response

```
{
  "success": true,
  "call_id": "uuid",
  "provider_call_id": "1790487004.429306",
  "message": "Call initiated"
}
```

Use `call_id` to look up the call later in Call History.

8. Call History

```
GET /api/telephony/calls/?page=1&page_size=50
```

8.1 Filters

Parameter	Example	Description
`agent_id`	uuid	Calls of one agent
`search`	`9876`	Matches from, to, DID and agent name
`phone`	`9876543210`	Matches either party (from, to or DID)
`since`	`2026-09-01T00:00:00Z`	Calls after this time
`until`	`2026-09-28T23:59:59Z`	Calls before this time
`status`	`no_answer`	`answered`, `no_answer`, `busy`, `completed`, and so on
`direction`	`inbound`	`inbound` or `outbound`
`disposition`	`interested`	Exact match

Parameter	Example	Description
`disposition__in`	`interested,callback`	Any of several values
`has_disposition`	`1` or `0`	Calls that have (or have not) been dispositioned
`follow_up`	`overdue`	`due`, `upcoming` or `overdue`
`follow_up_from` / `follow_up_to`	datetime	Follow-up date range
`scope`	`own`	`own`, `team` or `all`
`user_id`	uuid	Drill into one CRM user's calls
`sync`	`1`	Pull the latest calls from 9ance before listing
`recording_scope`	`all`	Which calls should include recording URLs

Filters can be combined. For example, overdue callbacks for one agent:

```
GET /api/telephony/calls/?agent_id=<uuid>&disposition=callback&follow_up=overdue
```

8.2 Who sees which calls

Visibility is **enforced on the server**, not by the client.

Role	Sees
Admin	All calls
Manager	Their team's calls (the full reporting hierarchy)
Rep	Only their own calls

The `scope` and `user_id` filters can only narrow what the user is already allowed to see.

© 2026 9ance India Private Limited · www.9ance.com

8.3 The call record


```
{
  "id": "uuid",
  "provider_call_id": "1790487004.429306",
  "direction": "inbound",
  "status": "no_answer",
  "from_number": "07415912090",
  "to_number": "07935486114",
  "did_number": "917935486114",
  "agent": "uuid",
  "agent_name": "Aaliya bee",
  "duration_secs": 28,
  "ring_secs": 28,
  "talk_duration_secs": 0,
  "started_at": "2026-09-27T19:45:31+00:00",
  "answered_at": null,
  "ended_at": "2026-09-27T19:45:59+00:00",
  "recording_url": "https://...",
  "can_download_recording": true,
  "call_result": "No Answer",
  "lead": "uuid or null",
  "lead_name": "Ramesh Kumar",
  "disposition": "callback",
  "disposition_notes": "Will call back tomorrow",
  "follow_up_at": "2026-09-28T10:00:00Z",
  "disposition_by": "uuid",
  "disposition_by_name": "Aaliya bee",
  "disposition_at": "2026-09-27T19:50:00Z"
}
```


Group	Fields
Identity	`id`, `provider_call_id`
Parties	`direction`, `from_number`, `to_number`, `did_number`, `agent`, `agent_name`
Outcome	`status`, `call_result`
Timing	`started_at`, `answered_at`, `ended_at`, `duration_secs`, `ring_secs`, `talk_duration_secs`
Recording	`recording_url`, `can_download_recording`
CRM link	`lead`, `lead_name`
Disposition	`disposition`, `disposition_notes`, `follow_up_at`, `disposition_by`, `disposition_by_name`, `disposition_at`

8.4 Recordings

```
GET /api/telephony/calls/<id>/recording/
GET /api/telephony/calls/<id>/recording/?download=1
```

Recordings are **proxied** by 9ance, so the upstream URL is never exposed. Permissions are checked on every request.

Request	Permission needed
Stream / listen	Listen permission

© 2026 9ance India Private Limited · www.9ance.com

Request	Permission needed
`?download=1`	Download permission (separate from listen)

8.5 Disposition a call

Record the outcome of a call and, optionally, schedule a follow-up.

```
POST /api/telephony/calls/<id>/disposition/

{
  "disposition": "interested",
  "notes": "Wants a demo next week",
  "follow_up_at": "2026-10-05T10:00:00Z"
}
```

The `disposition` value should be one of your configured dispositions (Section 12).

9. Live Calls

9.1 Calls in progress (REST)

```
GET /api/telephony/calls/live/
```

Returns the calls that are in progress right now, fetched in real time from 9ance.

9.2 Real-time events (WebSocket)

```
wss://crmapi.9ance.com/ws/telephony/calls/?token=<JWT>
```

9ance pushes call events (**new**, **updated**, **ended**) as they arrive through the webhook. Use this to keep a live-calls board up to date, or to trigger a screen pop on an incoming call.

```
const ws = new WebSocket(`wss://crmapi.9ance.com/ws/telephony/calls/?token=${accessToken}`);
ws.onmessage = (event) => {
  const callEvent = JSON.parse(event.data);
  // update your UI with the call event
};
```

Tip. The token is passed as a query parameter. Reconnect with a fresh token when the access token is refreshed.

10. SIP / Browser Dialer

Everything an in-browser phone needs is returned by one endpoint, scoped to the **calling user's own agent**. The SIP password returned belongs to that agent and is never exposed for anyone else.

```
GET /api/telephony/dialer/config/
```

10.1 Response

```
{
  "ready": true,
  "blockers": [],
  "mode": "sip",
  "agent": {
    "id": "uuid",
    "name": "Vivek Ji Vyas",
```

```
    "phone": "07415912090",
    "status": "ready",
    "caller_id": "917935486050"
  },
  "sip": {
    "username": "07415912090",
    "password": "***",
    "display_name": "Vivek Ji Vyas",
    "uri": "sip:<agent_phone>@<sip_server>",
    "server": "<sip_server>"
  },
  "ws": {
    "url": "wss://<sip_server>:5000/ws",
    "transport": "wss"
  },
  "ice": {
    "stun": ["stun:stun.l.google.com:19302"],
    "turn": []
  },
  "features": {
    "click_to_call": true,
    "incoming": true,
    "hold": true,
    "mute": true,
    "dtmf": true,
    "transfer": false,
    "merge": false,
    "live_calls": true
  },
  "install": {
    "package": "sip.js",
    "npm": "npm install sip.js",
    "login": "new UserAgent({uri, transportOptions:{server: ws.url}})"
  }
}
```


Field	Description
`ready`	`true` when the dialer can start
`blockers`	Reasons the dialer cannot start. Empty when `ready` is `true`
`mode`	`sip` (WebSocket SIP using sip.js) or `sdk` (9ance SDK)
`agent`	The logged-in user's agent and caller ID
`sip`	SIP credentials, display name, URI and server
`ws`	The WebSocket URL and transport for SIP signalling
`ice`	STUN / TURN servers for media
`features`	Which call controls to enable in your UI
`install`	Hints for setting up the SIP library

Your app does not need to know or configure the SIP server, WebSocket URL or ICE servers. They all come from this response.

10.2 Blockers

If `blockers` is not empty, the dialer cannot start.

Blocker	Meaning	How to fix
`telephony_not_configured`	Cloud Telephony is not set up for the tenant	Create the config (Section 4)
`agent_not_linked`	This CRM user has no agent	Map an agent to the user (5.5)
`agent_not_active`	The user's agent is disabled	Enable the agent (`is_active` must be `true`)
`sip_password_missing`	No SIP credentials stored for the agent	Store a SIP password (`sip_password_set` must be `true`)

10.3 Example: registering with sip.js

An illustrative sketch that uses the fields returned above:

```
import { UserAgent, Registerer } from "sip.js";

const cfg = await (await fetch(`${BASE}/api/telephony/dialer/config/`, {
  headers: { Authorization: `Bearer ${accessToken}` },
})).json();

if (!cfg.ready) throw new Error(`Dialer blocked: ${cfg.blockers.join(", ")}`);

const userAgent = new UserAgent({
  uri: UserAgent.makeURI(cfg.sip.uri),
  transportOptions: { server: cfg.ws.url },
  authorizationUsername: cfg.sip.username,
  authorizationPassword: cfg.sip.password,
  displayName: cfg.sip.display_name,
  sessionDescriptionHandlerFactoryOptions: {
    peerConnectionConfiguration: {
      iceServers: [{ urls: cfg.ice.stun }],
    },
  },
});

await userAgent.start();
await new Registerer(userAgent).register();
```

10.4 Softphone config (alternative shape)

```
GET /api/telephony/agents/me/softphone-config/
```

Returns the same information in a shape suited to the softphone component.

11. Auto-Dialer Campaigns

A **campaign** dials a list of numbers automatically and routes answered calls through a call flow (IVR).

11.1 Endpoints

Method	Path	Purpose
`GET`	`/api/telephony/campaigns/`	List campaigns
`POST`	`/api/telephony/campaigns/`	Create a campaign
`POST`	`/api/telephony/campaigns/<id>/start/`	Start a campaign
`POST`	`/api/telephony/campaigns/<id>/stop/`	Stop a campaign
`GET`	`/api/telephony/campaigns/<id>/report/`	Campaign report
`POST`	`/api/telephony/campaigns/preview-dial-list/`	Preview the numbers without creating anything

11.2 Create from a CSV file

```
POST /api/telephony/campaigns/
Content-Type: multipart/form-data

name=Diwali Sale
callflow_name=IVR_Diwali
destination=07935486114
first_dial=919876543210
start_at=2026-10-01T09:00:00+05:30
end_at=2026-10-01T18:00:00+05:30
csv_file=@dial_list.csv
```

CSV format: one number per line, with the phone number in the first column.

```
phone
9876543210
9876543211
9876543212
```

11.3 Create from CRM records

Send JSON instead of a file to build the dial list from CRM records:

```
{
  "name": "Follow-up",
  "callflow_name": "IVR_Followup",
  "destination": "07935486114",
  "entity_type": "lead",
  "filters": { "status": "New", "source": "Website" },
  "entity_ids": ["uuid1", "uuid2"]
}
```

11.4 Campaign parameters

Parameter	Description
`name`	Campaign name
`callflow_name`	The call flow (IVR) to run for answered calls
`destination`	The number the call flow routes to
`first_dial`	The first number to dial
`start_at` / `end_at`	Schedule window

© 2026 9ance India Private Limited · www.9ance.com

Parameter	Description
`csv_file`	The dial list (file upload mode)
`entity_type`	CRM record type to dial, for example `lead` (CRM mode)
`filters`	Filter the CRM records, for example status or source (CRM mode)
`entity_ids`	Explicit list of CRM record IDs (CRM mode)
`channel`	Optional. Overrides the number of simultaneous channels

11.5 Preview before you create

```
POST /api/telephony/campaigns/preview-dial-list/

{
  "entity_type": "lead",
  "filters": { "status": "New" }
}
```

Returns the numbers that **would** be dialled. Nothing is created.

12. Dispositions

Dispositions are the custom call outcomes an agent picks after a call (for example *Interested*, *Callback*, *Not Interested*).

Method	Path	Purpose
`GET`	`/api/telephony/dispositions/`	List dispositions
`POST`	`/api/telephony/dispositions/`	Create one
`PUT`	`/api/telephony/dispositions/<id>/`	Update one
`DELETE`	`/api/telephony/dispositions/<id>/`	Delete one

Create example

```
{ "label": "Interested", "value": "interested", "color": "#4CAF50" }
```

Fields: `id`, `label`, `value`, `color`, `is_active`, `sort_order`.

`label` is what agents see; `value` is what you send when dispositioning a call and what you filter by in call history.

13. Call Groups (Ring Groups)

A call group rings a set of numbers together, for example a sales team.

```
GET  /api/telephony/call-groups/
POST /api/telephony/call-groups/
```

```
{
  "group_name": "Sales",
  "members": ["9876543210", "9876543211"],
  "ring_type": "simultaneous"
}
```

Field	Description
`group_name`	Name of the group
`members`	Phone numbers in the group
`ring_type`	How members are rung, for example `simultaneous`

14. Telephony Dashboard

```
GET /api/telephony/provider-dashboard/
```

Account-wide statistics: answered vs no-answer for today, the week and the month, talk duration, and totals for incoming, outbound, SIP and GSM calls.

> **Important.** These are **account-wide** numbers, not per-agent or per-team. For per-agent figures use Agent Analytics. Results are cached briefly.

15. Agent Analytics

```
GET /api/telephony/analytics/agents/?date=YYYY-MM-DD    admin / manager
GET /api/telephony/analytics/me/?date=YYYY-MM-DD        the agent's own
```

Per-agent metrics: calls, answered, answer rate, talk time, agent-missed vs customer-ended calls, idle time and break time. Results are scoped by the user's hierarchy.

Endpoint	Who can use it
`/analytics/agents/`	Admins and managers (managers see their team)
`/analytics/me/`	Any agent, for their own figures

For the full metric definitions, see the separate Telephony Analytics API document.

16. Phone Matching

```
GET /api/telephony/calls/match/?phone=9876543210
```

Finds the CRM record (lead, contact or customer) that matches a phone number. The dialer uses it to show caller details on an incoming call.

17. Webhooks

9ance pushes call events to your registered webhook in real time.

```
POST https://crmapi.9ance.com/api/telephony/webhooks/indiavoice/<webhook_token>/
POST https://crmapi.9ance.com/api/telephony/webhooks/indiavoice/<webhook_token>/live-calls/
```

The second URL is dedicated to live-call updates.

17.1 Registering the webhook

1. Create the config (Section 4). The response contains `webhook_token` and `webhook_url`.
2. Register that URL on the 9ance dashboard.

17.2 Event types

Event	Meaning
`call_initated`	A call has started (spelling as sent by the provider)
`call_report`	The final report of a completed call
`transferring_call_to_agent`	A call is being routed to an agent
`live_call`	An in-progress call update

17.3 What happens when an event arrives

- Call records are **created or updated** automatically.
- **Missed-call follow-ups** are triggered.
- The event is **pushed to the WebSocket** (Section 9).

18. Transcription

Method	Path	Purpose
`GET`	`/api/telephony/calls/transcription/capability/`	What transcription options are available
`GET`	`/api/telephony/calls/transcription/settings/`	Current configuration
`POST`	`/api/telephony/calls/transcription/settings/`	Update the configuration

19. Errors, Status Codes & Rate Limits

19.1 Error format

```
{
  "detail": "Human-readable message",
  "provider_error": "raw error from the provider (when available)"
}
```

`detail` is safe to show to users. `provider_error` is included only when the telephony provider returned something useful for debugging.

19.2 HTTP status codes

Code	Meaning	Typical cause
`200`	Success	

Code	Meaning	Typical cause
`400`	Bad request	Missing parameters or validation errors
`401`	Not authenticated	Token missing or expired. Refresh and retry
`404`	Not found	Config, agent or call does not exist
`409`	Conflict	Config already exists. Use `PUT`
`502`	Telephony service error	Upstream problem. Check `provider_error`
`503`	Rate limited	Retry after 2 to 5 seconds

19.3 Rate limits

The API may return `503` with `"provider_error": "rate_limited"`. Wait **2 to 5 seconds** and retry. For bulk operations, space your requests out or use the bulk endpoints (for example `bulk-assign`).

19.4 Recommended retry logic

Situation	What to do
`401`	Refresh the access token, then retry the request once
`503` rate limited	Back off 2 to 5 seconds, then retry
`502`	Retry with backoff; if it persists, surface `provider_error` to your admin
`400`	Do not retry. Fix the request

20. Common Workflows

A. Onboard a new sales rep

1. `POST /api/telephony/agents/sync/` (or `POST /api/telephony/agents/` to create one).
2. `POST /api/telephony/agents/<id>/assign/` to map the agent to the rep's CRM user.
3. Optionally set the agent's default DID.
4. As the rep, call `GET /api/telephony/dialer/config/` and confirm `ready` is `true`.

B. Call a lead and log the outcome

1. `POST /api/telephony/calls/click-to-call/` with `customer_number` and `lead_id`.
2. When the call ends, `POST /api/telephony/calls/<id>/disposition/` with the outcome, notes and an optional `follow_up_at`.
3. Review it later with `GET /api/telephony/calls/?follow_up=due`.

C. Show caller details on an incoming call

1. Open the WebSocket (Section 9.2).
2. On a new inbound call event, call `GET /api/telephony/calls/match/?phone=<caller_number>`.
3. Show the matched lead, contact or customer in the dialer.

D. Run a campaign from CRM leads

1. `POST /api/telephony/campaigns/preview-dial-list/` to check the list.
2. `POST /api/telephony/campaigns/` with `entity_type` and `filters`.
3. `POST /api/telephony/campaigns/<id>/start/`.
4. Monitor with `GET /api/telephony/campaigns/<id>/report/`.
5. `POST /api/telephony/campaigns/<id>/stop/` to end early if needed.

E. Follow up on missed calls

1. `GET /api/telephony/calls/?direction=inbound&status=no_answer`.
2. Call each customer back with click-to-call.
3. Disposition the call-back so it drops out of the pending list.

21. Endpoint Index

Authentication

Method	Path
`POST`	`/api/auth/login/`
`POST`	`/api/auth/token/`
`POST`	`/api/auth/token/refresh/`
`POST`	`/api/auth/signup/`
`POST`	`/api/auth/signup/product/`
`GET`	`/api/auth/products/`

Configuration

Method	Path
`POST` `GET` `PUT` `DELETE`	`/api/telephony/config/`
`POST`	`/api/telephony/config/test/`
`GET` `POST`	`/api/telephony/provider-configs/`
`PATCH` `DELETE`	`/api/telephony/provider-configs/<config_id>/`
`POST`	`/api/telephony/provider-configs/<config_id>/enable/`

Agents and numbers

Method	Path
`GET` `POST`	`/api/telephony/agents/`
`DELETE`	`/api/telephony/agents/<id>/`

© 2026 9ance India Private Limited · www.9ance.com

Method	Path
POST	/api/telephony/agents/sync/
POST	/api/telephony/agents/<id>/assign/
POST	/api/telephony/agents/bulk-assign/
POST	/api/telephony/agents/<id>/status/
GET	/api/telephony/agents/me/
GET POST	/api/telephony/agents/me/status/
GET	/api/telephony/agents/me/softphone-config/
GET	/api/telephony/dids/
POST	/api/telephony/dids/sync/
POST	/api/telephony/dids/<id>/set-default/

Calls

Method	Path
POST	/api/telephony/calls/click-to-call/
GET	/api/telephony/calls/
GET	/api/telephony/calls/<id>/recording/
POST	/api/telephony/calls/<id>/disposition/
GET	/api/telephony/calls/live/
GET	/api/telephony/calls/match/
GET	/api/telephony/dialer/config/
WS	/ws/telephony/calls/?token=<JWT>

Campaigns, dispositions and groups

Method	Path
GET POST	/api/telephony/campaigns/
POST	/api/telephony/campaigns/<id>/start/
POST	/api/telephony/campaigns/<id>/stop/
GET	/api/telephony/campaigns/<id>/report/
POST	/api/telephony/campaigns/preview-dial-list/
GET POST	/api/telephony/dispositions/
PUT DELETE	/api/telephony/dispositions/<id>/
GET POST	/api/telephony/call-groups/

© 2026 9ance India Private Limited · www.9ance.com

Reporting, transcription and webhooks

Method	Path
`GET`	`/api/telephony/provider-dashboard/`
`GET`	`/api/telephony/analytics/agents/`
`GET`	`/api/telephony/analytics/me/`
`GET` `POST`	`/api/telephony/calls/transcription/settings/`
`GET`	`/api/telephony/calls/transcription/capability/`
`POST`	`/api/telephony/webhooks/indiavoice/<webhook_token>/`
`POST`	`/api/telephony/webhooks/indiavoice/<webhook_token>/live-calls/`

© 9ance India Private Limited · Bhopal, Madhya Pradesh, India · www.9ance.com