

# Manacher's Algorithm – Linear Time Longest Palindromic Substring – Part 1

Last Updated : 11 Feb, 2021



Given a string, find the longest substring which is palindrome.

- if the given string is “forgeeksskeegfor”, the output should be “geeksskeeg”
- if the given string is “abaaba”, the output should be “abaaba”
- if the given string is “abababa”, the output should be “abababa”
- if the given string is “abcbabcbabcba”, the output should be “abcbabcbabcba”

We have already discussed Naïve [ $O(n^3)$ ] and quadratic [ $O(n^2)$ ] approaches at [Set 1](#) and [Set 2](#).

In this article, we will talk about [Manacher's algorithm](#) which finds Longest Palindromic Substring in linear time.

One way ([Set 2](#)) to find a palindrome is to start from the center of the string and compare characters in both directions one by one. If corresponding characters on both sides (left and right of the center) match, then they will make a palindrome. Let's consider string “abababa”.

Here center of the string is 4th character (with index 3) b. If we match characters in left and right of the center, all characters match and so string “abababa” is a palindrome.



Here center position is not only the actual string character position but it could be the position between two characters also.

Consider string “abaaba” of even length. This string is palindrome around the position between 3rd and 4th characters a and a respectively.



To find Longest Palindromic Substring of a string of length  $N$ , one way is take each possible  $2*N + 1$  centers (the  $N$  character positions,  $N-1$  between two character positions and 2 positions at left and right ends), do the character match in both left and right directions at each  $2*N+ 1$  centers and keep track of LPS. This approach takes  $O(N^2)$  time and that's what we are doing in [Set 2](#).

Let's consider two strings "abababa" and "abaaba" as shown below:



In these two strings, left and right side of the center positions (position 7 in 1st string and position 6 in 2nd string) are symmetric. Why? Because the whole string is palindrome around the center position.

If we need to calculate Longest Palindromic Substring at each  $2*N+1$  positions from left to right, then palindrome's symmetric property could help to avoid some of the unnecessary computations (i.e. character comparison). If there is a palindrome of some length  $L$  centered at any position  $P$ , then we may not need to compare all characters in left and right side at position  $P+1$ . We already calculated LPS at positions before  $P$  and they can help to avoid some of the comparisons after position  $P$ .

This use of information from previous positions at a later point of time makes the Manacher's algorithm linear. In [Set 2](#), there is no reuse of previous information and so that is quadratic.

Manacher's algorithm is probably considered complex to understand, so here we will discuss it in as detailed way as we can. Some of it's portions may require multiple reading to understand it properly.

Let's look at string "abababa". In 3rd figure above, 15 center positions are shown. We need to calculate length of longest palindromic string at each of these

positions.

- At position 0, there is no LPS at all (no character on left side to compare), so length of LPS will be 0.
- At position 1, LPS is a, so length of LPS will be 1.
- At position 2, there is no LPS at all (left and right characters a and b don't match), so length of LPS will be 0.
- At position 3, LPS is aba, so length of LPS will be 3.
- At position 4, there is no LPS at all (left and right characters b and a don't match), so length of LPS will be 0.
- At position 5, LPS is ababa, so length of LPS will be 5.

..... and so on

We store all these palindromic lengths in an array, say L. Then string S and LPS Length L look like below:

String S		a		b		a		b		a		b		a	
LPS Length L	0	1	0	3	0	5	0	7	0	5	0	3	0	1	0
Position i	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14

Similarly, LPS Length L of string “abaaba” will look like:

String S		a		b		a		a		b		a	
LPS Length L	0	1	0	3	0	1	6	1	0	3	0	1	0
Position i	0	1	2	3	4	5	6	7	8	9	10	11	12

In LPS Array L:


- LPS length value at odd positions (the actual character positions) will be odd and greater than or equal to 1 (1 will come from the center character itself if nothing else matches in left and right side of it)
- LPS length value at even positions (the positions between two characters, extreme left and right positions) will be even and greater than or equal to 0 (0 will come when there is no match in left and right side)

**Position and index for the string are two different things here. For a given string S of length N, indexes will be from 0 to N-1 (total N indexes) and positions will be from 0 to 2\*N (total 2\*N+1 positions).**

LPS length value can be interpreted in two ways, one in terms of index and second in terms of position. LPS value  $d$  at position  $i$  ( $L[i] = d$ ) tells that:

- Substring from position  $i-d$  to  $i+d$  is a palindrome of length  $d$  (in terms of position)
- Substring from index  $(i-d)/2$  to  $[(i+d)/2 - 1]$  is a palindrome of length  $d$  (in terms of index)

e.g. in string “abaaba”,  $L[3] = 3$  means substring from position 0 ( $3-3$ ) to 6 ( $3+3$ ) is a palindrome which is “aba” of length 3, it also means that substring from index 0  $[(3-3)/2]$  to 2  $[(3+3)/2 - 1]$  is a palindrome which is “aba” of length 3.

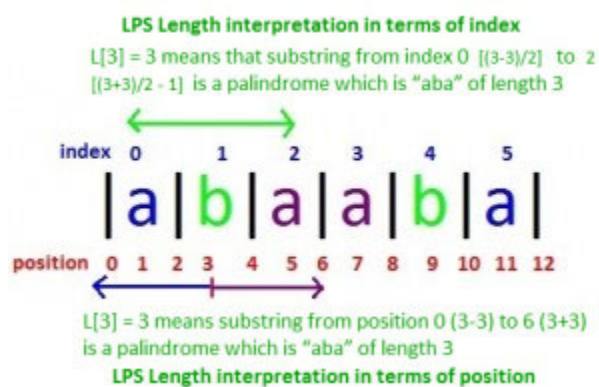

Now the main task is to compute LPS array efficiently. Once this array is computed, LPS of string  $S$  will be centered at position with maximum LPS length value. We will see it in [Part 2](#).

Comment

More info

Advertise with us

Next Article

Manacher's Algorithm - Linear Time  
Longest Palindromic Substring - Part 4

## Similar Reads

### Manacher's Algorithm - Linear Time Longest Palindromic Substring - Part 1

Given a string, find the longest substring which is palindrome. if the given string is “æœforgeeksskeegforæ”, the output should be “œgeeksskeegæ” if the given string is...

5 min read

## Manacher's Algorithm - Linear Time Longest Palindromic Substring - Part 4

In Manacher's Algorithm Part 1 and Part 2, we gone through some of the basics, understood LPS length array and how to calculate it efficiently based on four cases. In Part 3, we implemented the same. Here...

🕒 12 min read

---

## Manacher's Algorithm - Linear Time Longest Palindromic Substring - Part 3

In Manacher's Algorithm Part 1 and Part 2, we gone through some of the basics, understood LPS length array and how to calculate it efficiently based on four cases. Here we will implement the same. We have...

🕒 15+ min read

---

## Suffix Tree Application 6 - Longest Palindromic Substring

Given a string, find the longest substring which is palindrome. We have already discussed Naïve  $[O(n^3)]$ , quadratic  $[O(n^2)]$  and linear  $[O(n)]$  approaches in Set 1, Set 2 and Manacher's Algorithm. In this...

🕒 15+ min read

---

## Print the longest palindromic prefix of a given string

Given a string str, the task is to find the longest palindromic prefix of the given string. Examples: Input: str = "abaac" Output: aba Explanation: The longest prefix of the given string which is palindromic is "aba"....

🕒 12 min read

---

## Largest palindromic number by permuting digits

Given N (very large), the task is to print the largest palindromic number obtained by permuting the digits of N. If it is not possible to make a palindromic number, then print an appropriate message. Examples :...

🕒 12 min read

---

## Longest Palindromic Substring using hashing in $O(n \log n)$

Given a string S, The task is to find the longest substring which is a palindrome using hashing in  $O(N \log N)$  time. Input: S: "forgeeksskeegfor" , Output: "eegkeeksskeeg" Input: S: "Geeks" , ...

🕒 11 min read

---

## Longest palindromic string possible after removal of a substring

Given a string str, the task is to find the longest palindromic string that can be obtained from it after removing a substring. Examples: Input: str = "abcdefghiedcba" Output: "abcdeiedcba" Explanation:...

🕒 11 min read

---

## Rearrange string to obtain Longest Palindromic Substring

Given string str, the task is to rearrange the given string to obtain the longest palindromic substring. Examples: Input: str = "eegkeeksforgkeeks" Output: eegksfskgeeor Explanation: eegksfskgee is the...

## Length of Longest Palindrome Substring

Given a string S of length N, the task is to find the length of the longest palindromic substring from a given string. Examples: Input: S = "abcbab"Output: 5Explanation: string "abcba" is the longest substring...

