



chr4q - C1 D4Z4/DUX4L

Best single real-UCSC view of the D4Z4/DUX4L system: repeated DUX4L/MIR8078 labels sit inside the PHR interval.

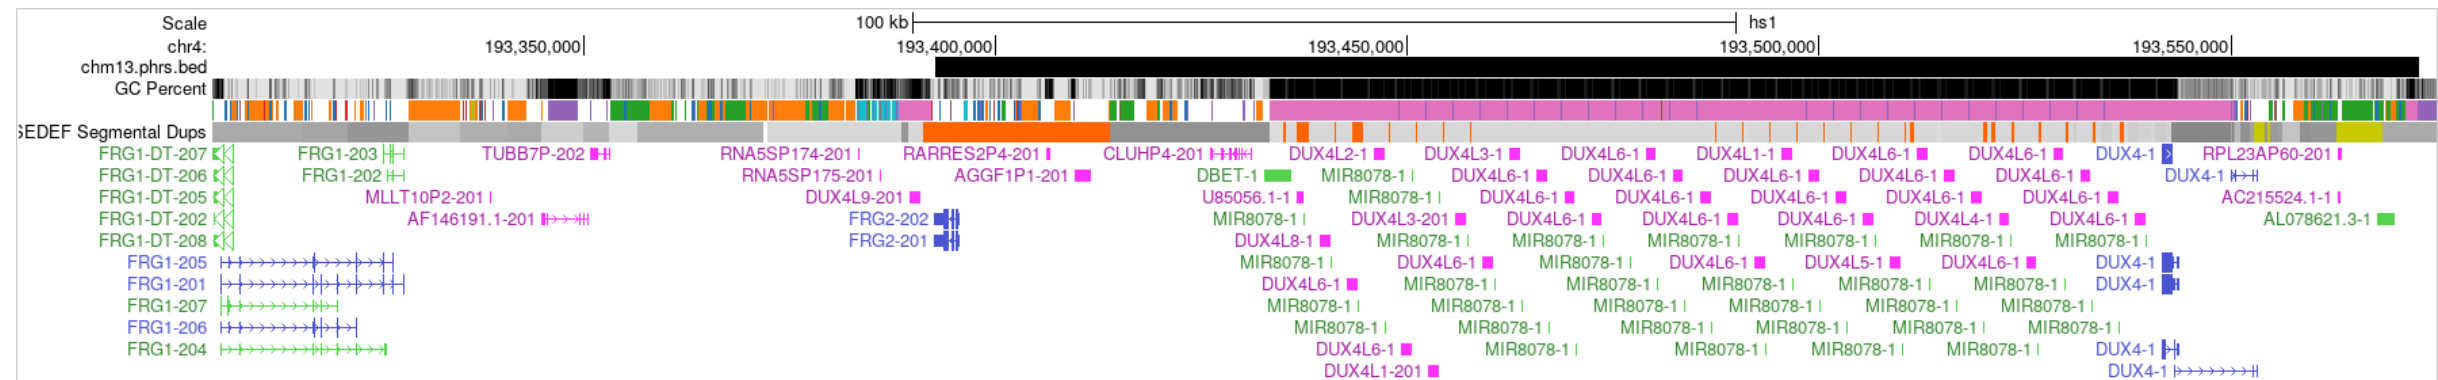


chr3q - C3 OR4F/f7501 cluster

C3 is a large interpretable community; this panel shows OR4F5 plus the broader duplicated gene context in one clear browser window.

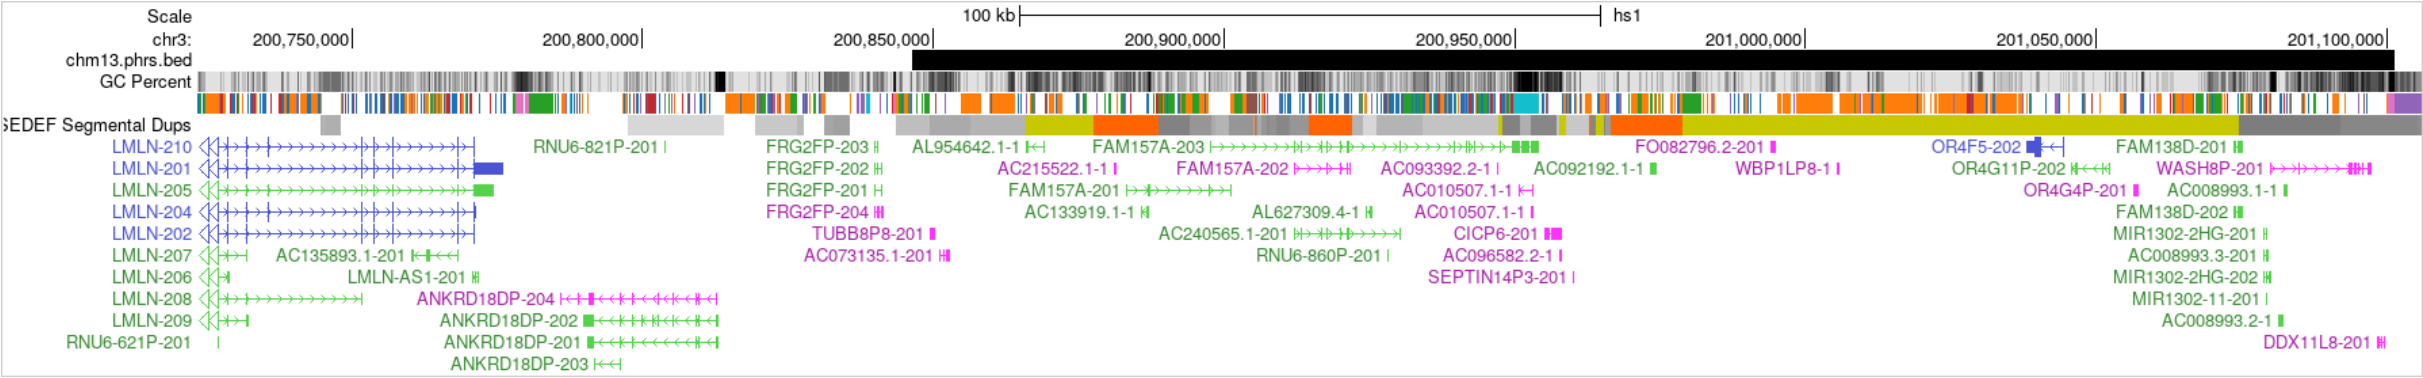


chr15q - C8 OR4F endpoint

Clean OR4F-rich endpoint with multiple OR4F labels and WASH/DDX11L context; useful contrast to the multi-arm C3 example.

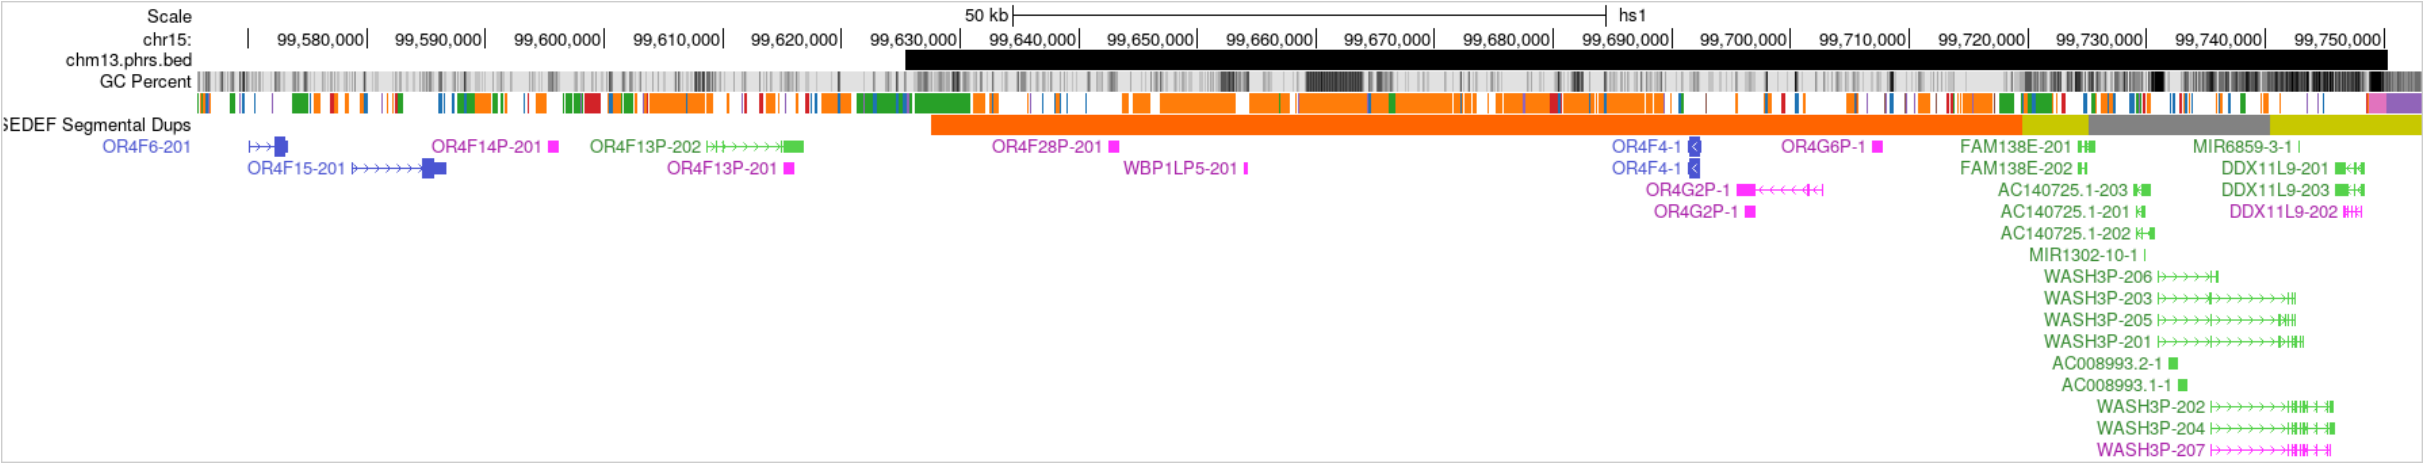


chr18p - C2 repeat/gene context

C2/chr18p is report-backed as TAR1-rich; the real UCSC view visibly shows repeated duplicon blocks, IL9RP4, and terminal PHR structure.

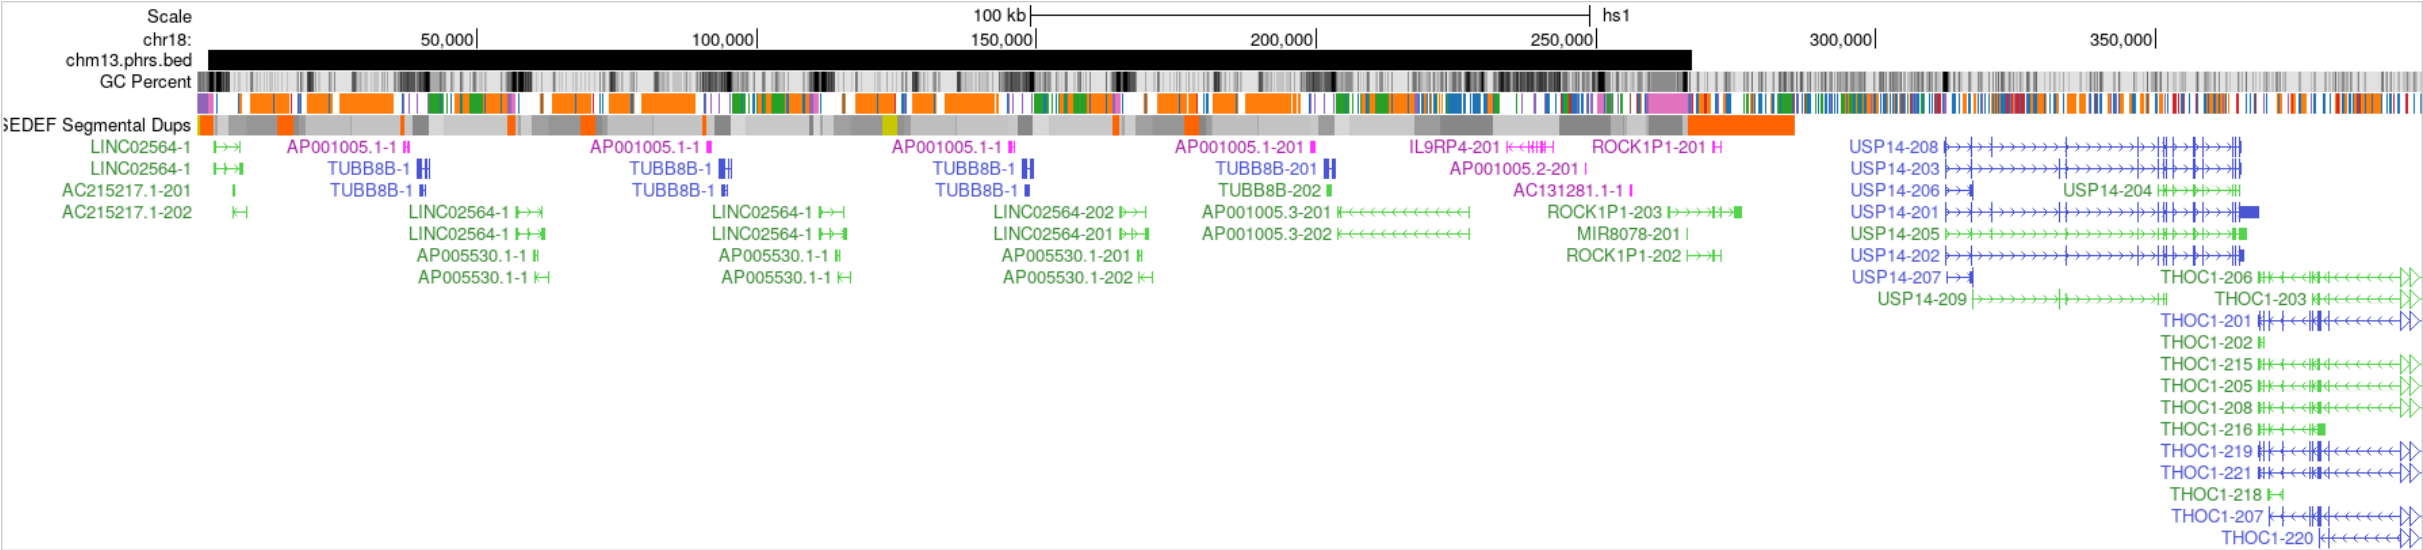

chr21p - C7 acrocentric p-arm

C7 acrocentric p-arm example: long PHR, rDNA-adjacent duplicated structure, and MTCO/SNX18 pseudogene labels at slide scale.

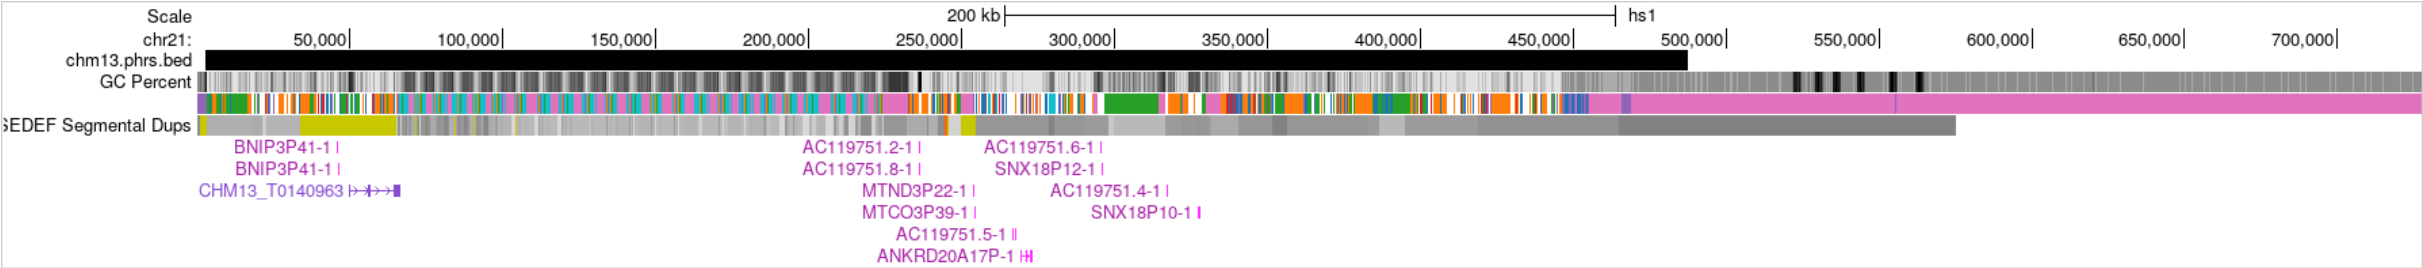

chrXp - C15 PAR1/SHOX

Shows PAR1 coding genes including SHOX while making the key point that the PHR begins internal to the telomeric end, not at the telomere itself.

