
Test Scenarios

• Json files with root key "employee" and object in the array with fields "name", "id", "designation".

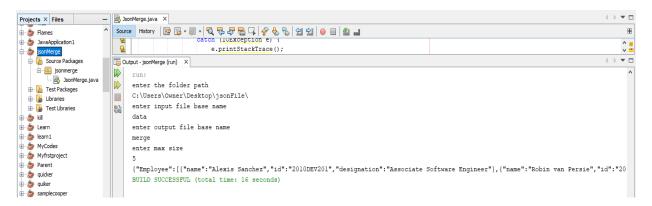

{"Employee":[{"name":"Alexis Sanchez","id":"2010DEV201","designation":"Associate Software Engineer"},{"name":"Robin van Persie","id":"2010DEV202","designation":"Software Engineer"},{"name":"Nicolas Pepe","id":"2011TEST101","designation":"Software Tester"},{"name":"Gonzalo Higuain","id":"2013CON017","designation":"Assosiate Consultant"},{"name":"Sunil Chettri","id":"2012BA102","designation":"Business Analyst"}]}

• Json files with root key "employee" and object in the array with fields "name", "id", "designation".

{"strikers":[{"name":"Alexis Sanchez","club":"Manchester United"},{"name":"Robin van Persie","club":"Feyenoord"},{"name":"Nicolas Pepe","club":"Arsenal"},{"name":"Gonzalo Higuain","club":"Napoli"},{"name":"Sunil Chettri","club":"Bengaluru FC"}]}