


III

โครงสร้างเอกสาร ตามมาเนื่อง แผนกฯ

Document Object Modeling (DOM)

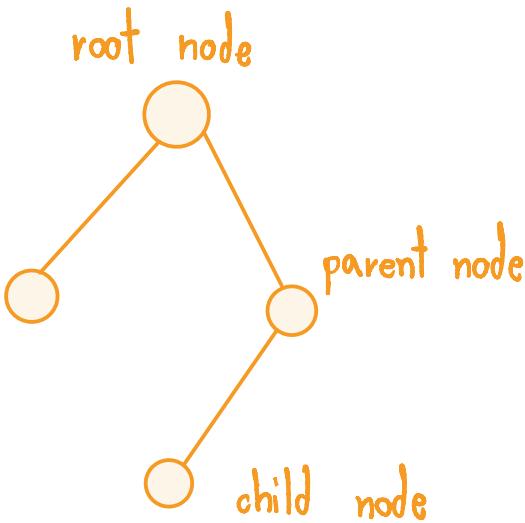

Asst.Prof. Dr. Umaporn Supasitthimethee
ผศ.ดร.อุมาพร สุภาษีธรรมเมธี



Document Object Model (DOM)

- Understanding the Document Object Model in JavaScript
- Node Types
- Traversing Nodes
- Manipulating Nodes

III Introduction to Document Object Modeling (DOM)

- The Document Object Model (DOM) represents the HTML page so that programs can change the document structure, style, and content. *ໄຟ້ນ ເພີ່ມເອກສາ ແລະ ເປັນຍາ ລາຍລະອຽດ* *(html, css, xml)*
- The DOM represents a document as a hierarchical tree of nodes, allowing developers to select, add, remove, and modify individual parts of the page. *ໄຟ້ນແຫຼງກົງການທີ່ໄຟ້ມາຕອງກ່າວໜ້າ ເພີ່ມ concept*
- The DOM is now a truly cross-platform, language-independent way of representing and manipulating pages for markup.
- The DOM is not a programming language, but without it, the JavaScript language wouldn't have any model or notion of web pages, HTML documents, XML documents, and their component parts.

<script> Tag Placement

```
<html>
  <head>
    <title>Example HTML Page</title>
    <script src="script.js"></script>
      សូមនាំ script នៅ simple
  </head>
  <body>
    <!-- content here -->
  </body>
</html>
```

- Including all JavaScript files in the `<head>` of a document means that all of the JavaScript code must be downloaded, parsed, and interpreted before the page begins rendering

<script> Tag Placement

```
<html>
  <head>
    <title>Example HTML Page</title>
  </head>
  <body>
    <!-- content here -->
    <script src="script.js"></script>
  </body>
</html>
```

ឧបនា ១) ពេលវេលាទំនើន ក្នុង body និង node (content node now)
២) តួនាទី javascript ដែលត្រូវបានដោឡូងក្នុង body
ក្នុងក្រុមហ៊ុន content មានលទ្ធផល រាយការ

- For pages that **require a lot of JavaScript code**, this can cause a noticeable delay in page rendering, during which time the browser will be completely blank.
- For this reason, modern web applications typically include all JavaScript references in the `<body>` element, after the page content.




Document Object Modeling (DOM)

- When an HTML document is loaded into a web browser, it becomes a **document object**, everything is a **node**
- The document object is the root node of the HTML document and all other nodes: element nodes, text nodes, attribute nodes, and comment nodes
- Each node type has different characteristics, data, and methods, and each may have relationships with other nodes.
- These relationships create a hierarchy that allows markup to be represented as a tree, rooted at a particular node.

Dom and JavaScript

```
<html>
  <head>
    <title>Sample Page</title>
  </head>
  <body>
    <p>Hello World!</p>
  </body>
</html>
```

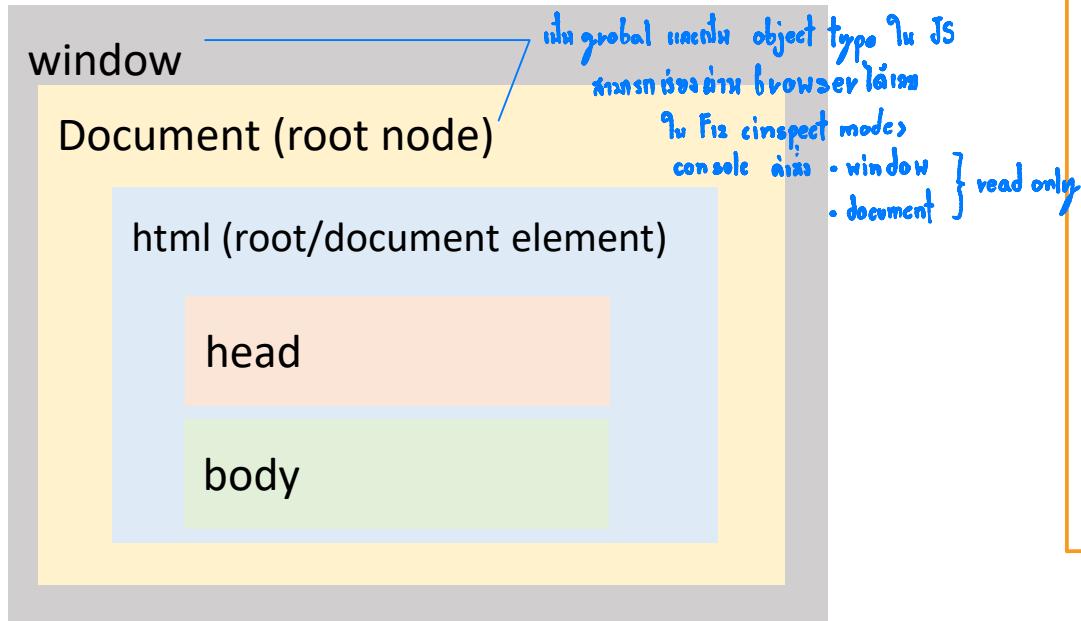

container នៃទម្រង់ការប្រើប្រាស់ HTML នៃ window
(window)

`const rootNode = window.document`

Document

Element html

Element head

Element title

Text Sample Page

Element body

Element p

DOCTYPE html

Text Hello world!

Root Node ជា node ពីរដែលធ្វើត្រឡប់ចុងចម្លោះ tree
អាក្រក់ នៃ Node គ្រប់គ្រាន់ នៅក្នុងការអំពេញនូវសារ document

Root/Document element

នៅក្នុង element node នៅក្នុងគ្រប់គ្រាន់ (documents) html

* នៃ tag គឺជា element node type

Id, class attribute node type
អាណាព, តាមលក្ខណៈ នៅក្នុង

<tag> text node </tag>
នៅក្នុង text node type

In browsers, the `document` object is an instance of `HTMLDocument` (which inherits from `Document`) and represents the entire HTML page. The `document` object is a property of `window` and so is accessible globally. It is `read-only`.



Nodes Types

Node types are represented by one of the following 11 numeric constants on the

node type គឺ

- node name នៃ tag
- node type
- node value

[Node.nodeType](#) (Read only)

Returns an `unsigned short` representing the type of the node. Possible values are:

Name	Value
ELEMENT_NODE	1 ត្រូវបានក្រឡាញ់ជា element នៅក្នុង root element node នៃបញ្ជី HTML
ATTRIBUTE_NODE	2 នៅ node type នេះ ក្នុងក្រឡាញ់ node នៃ tree
TEXT_NODE	3
CDATA_SECTION_NODE	4
PROCESSING_INSTRUCTION_NODE	7
COMMENT_NODE	8
DOCUMENT_NODE	9 ក្នុងក្រឡាញ់ node នេះ ត្រូវបានក្រឡាញ់ជា document
DOCUMENT_TYPE_NODE	10
DOCUMENT_FRAGMENT_NODE	11

html នៃ root element នៅ document element


- The **Node** interface is implemented in JavaScript as the **Node** type, which is accessible in all browsers
- All node types inherit from Node in JavaScript, so **all node types share the same basic properties and methods.**
- Every node has a **node Type property** that indicates the type of node that it is.

```
if (someNode.nodeType === Node.ELEMENT_NODE) {  
    alert("Node is an element.");  
}
```


html - root element / document element

/
function root element

"min" </h2>] assign text node inside space within tag
<h2>] assign element node structure
</h2><h3> assign element node structure

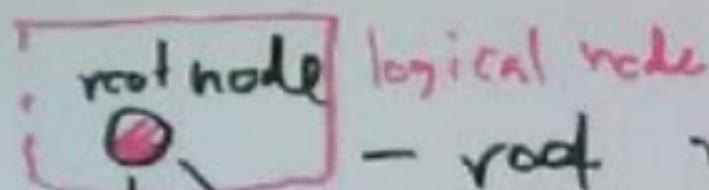

- root node / (document node)

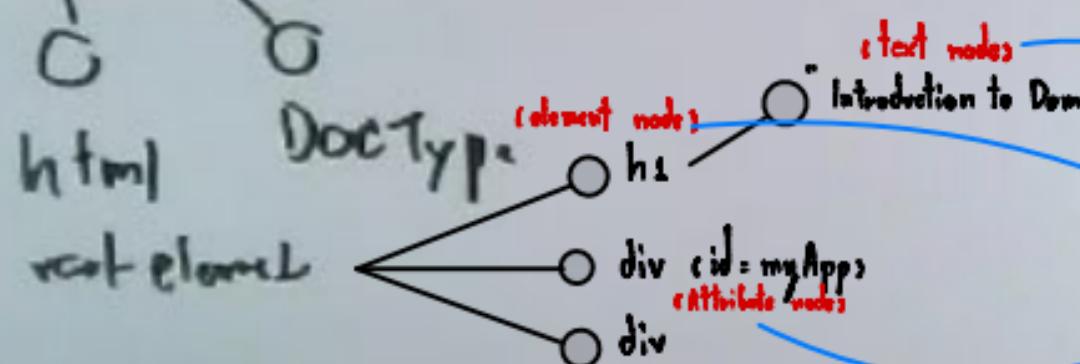

node Name Ex: text, document

node Value Ex: content of text node, null

node type


array-like


array methods
object

length index

NodeList

Array.from (~~sum~~) . filter

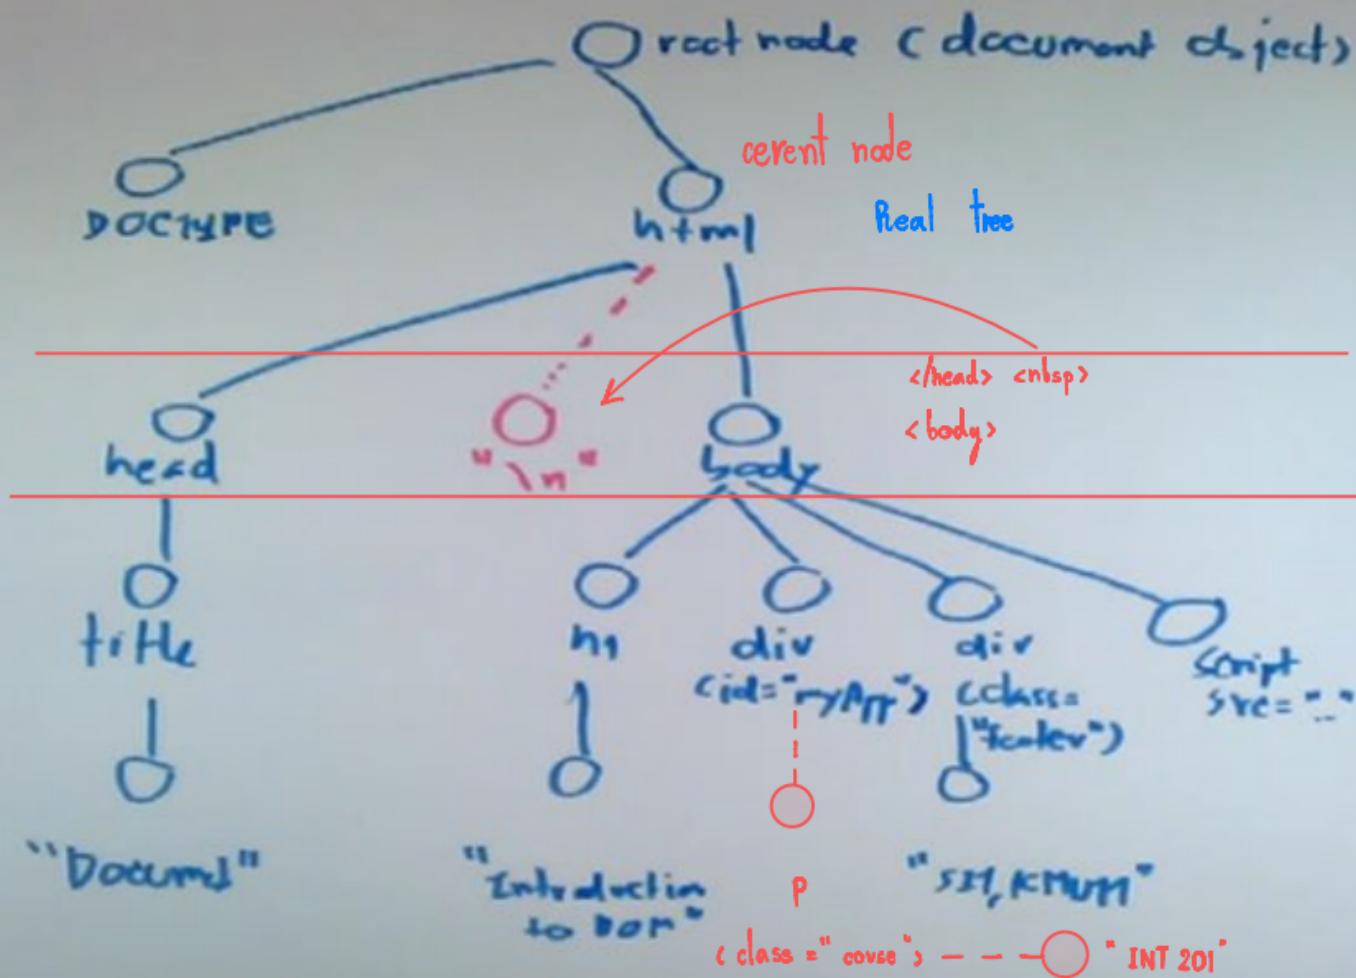

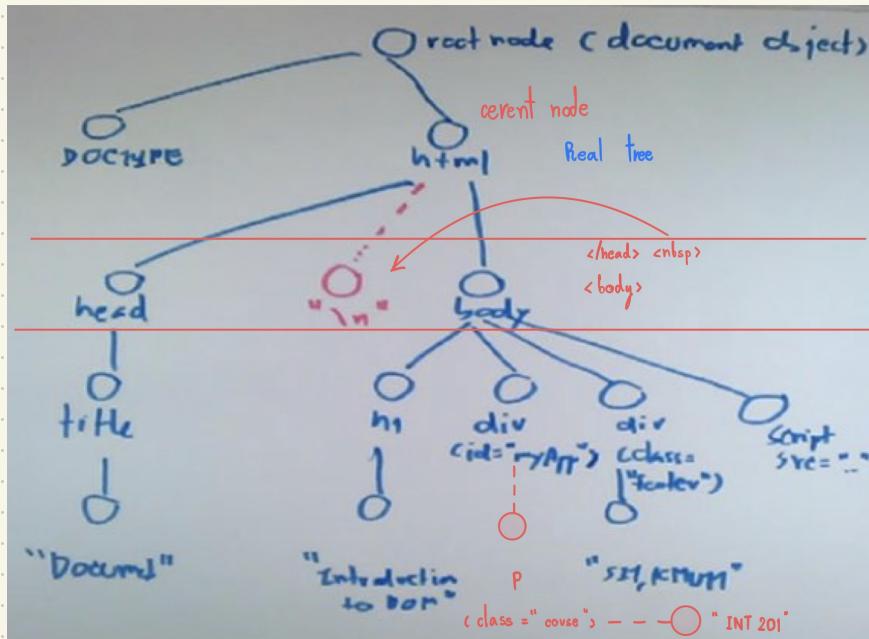

- 1 create element node
- 2 create attribute class="course"
- 3 create text node value="INT 201"
- 4 เพิ่มต特ก์ที่มีค่า att ② ให้กับ node ①
- 5 เพิ่มต特ก์ที่มีค่า text node ให้กับ node ①
- 6 append child ① ให้กับ div id="myApp"

The nodeName and nodeValue Properties

- Two properties, nodeName and nodeValue, give specific information about the node.
- The values of these properties are completely dependent on the node type.
- It's always best to test the node type before using one of these values, as the following code shows:

```
if (someNode.nodeType === 1) {    //someNode.nodeType==Node.ELEMENT_NODE
    value = someNode.nodeName   // nodeName will be the element's tag name
                                // nodeValue is always null
}
```

Node	Value of nodeValue	nodeName value
CDATASection	Content of the CDATA section	"#cdata-section"
Comment	Content of the comment	"#comment"
Document	null	"#document"
DocumentFragment	null	"#document-fragment"
DocumentType	null	The value of DocumentType.name
Element	null	The value of Element.tagName
ProcessingInstruction	Entire content excluding the target	The value of ProcessingInstruction.target
Text	Content of the text node	"#text"

Document Children

- This example shows that the values of `documentElement`, `firstChild`, and `childNodes[0]` are all the same—all three point to the `<html>` element.
- As an instance of `HTMLDocument`, the `document` object also has a `body` property that points to the `<body>` element directly.

```
<html>
  <body>
    ...
  </body>
</html>
```

```
const html = document.documentElement // get reference to <html>
alert(html === document.childNodes[0]) // true
alert(html === document.firstChild) // true
```

```
const body = document.body // get reference to <body>
```

Creating Elements

- New elements can be created by using the `document.createElement()` method.
- This method accepts a single argument, which is the tag name of the element to create.
- In HTML documents, the tag name is case-insensitive.
- To create a `<div>` element, the following code can be used:

```
let div = document.createElement("div");
```

- The element can be added to the document tree using `appendChild()`, `insertBefore()`, `replaceChild()`, `removeChild()`.
- The following code adds the newly created element to the document's `<body>` element:

```
document.body.appendChild(div);
```

- Once the element has been added to the document tree, the browser renders it immediately. Any changes to the element after this point are immediately reflected by the browser.



Attr Node

- The Attr node inherits from Node but is not considered a part of the document tree.
- Common Node attributes like parentNode, previousSibling, and nextSibling are `null` for an Attr node. You can, however, get the element to which the attribute belongs with the `ownerElement` property.

```

const pElement = document.createElement('p')

const idAttr = document.createAttribute('id')
idAttr.value = 1001
pElement.setAttributeNode(idAttr)
// pElement.setAttribute('id', 1001)

const pText = document.createTextNode('<h2>Hello,
<span style="color:red"> JS </span> DOM</h2>')

pElement.appendChild(pText)

const divElement = document.querySelector('div')
divElement.appendChild(pElement)

```

```

▼ <body>
.. ▼ <div> == $0
    <p id="1001"><h2>Hello, <span style="color:red"> JS </span>
    DOM</h2></p>
  </div>

```

```

const rootDocument = divElement.ownerDocument
console.log(rootDocument.nodeName) // #document
console.log(rootDocument.nodeType) // 9
console.log(rootDocument.nodeValue) // null

console.log(pElement.nodeName) // P
console.log(pElement.nodeType) // 1
console.log(pElement.nodeValue) // null

console.log(idAttr.nodeName) // id
console.log(idAttr.nodeType) // 2
console.log(idAttr.nodeValue) // 1001

console.log(pText.nodeName) // #text
console.log(pText.nodeType) // 3
console.log(pText.nodeValue) // '<h2>Hello,
<span style="color:red"> JS </span> DOM</h2>'

```

```

console.log(pElement.parentElement) // div
console.log(idAttr.parentElement) // null
console.log(pText.parentElement)
// <p id="1001" ...>
```

innerHTML, innerText, and textContent

```
const pElement = document.createElement('p')
```

```
pElement.innerHTML =
  '<h2>Hello,      <span style="color:red">JS</span> DOM</h2>'
```


Hello, JS DOM

```
++<div> == $0
  <p id="1001">
    <h2>
      "Hello, "
      <span style="color:red">JS</span>
      " DOM"
    </h2>
  </p>
</div>
```

```
const p = document.getElementsByTagName('p')
console.log(p[0].innerText)
console.log(p[0].textContent)
console.log(p[0].innerHTML)
```

textContent	innerText
Hello, JS DOM	1 space
Hello, JS DOM	3 space
<h2>Hello, JS DOM</h2>	


textContent has better performance because its value is the raw content not parsed as HTML and also prevent Cross-Site Scripting (XSS) attacks. This includes <script> and <style> elements, whitespace, line breaks, and carriage returns.

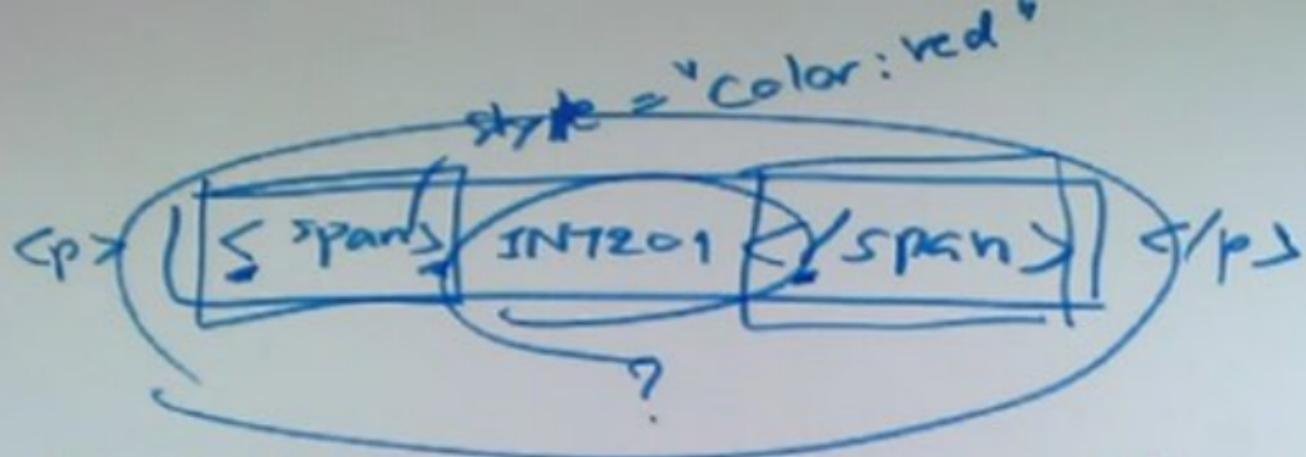

p.innerHTML = ... (สีแดง)

innerText สีขาว 1 space

textContent สีขาว หลาย space ที่อยู่ในเดียว




Traversing Nodes

Node Relationships

ໃນការគែងការណ៍ dom (របៀប) ពីការរំភោះទេសការរំភោះ tree (ការកែងការណ៍ដៃមុន) **Insert** update node ឬលើកស្នើ **Delete**

The value of `someNode.firstChild` is always equal to `someNode.childNodes[0]`,
and the value of `someNode.lastChild` is always equal to `someNode.childNodes[someNode.childNodes.length-1]`.

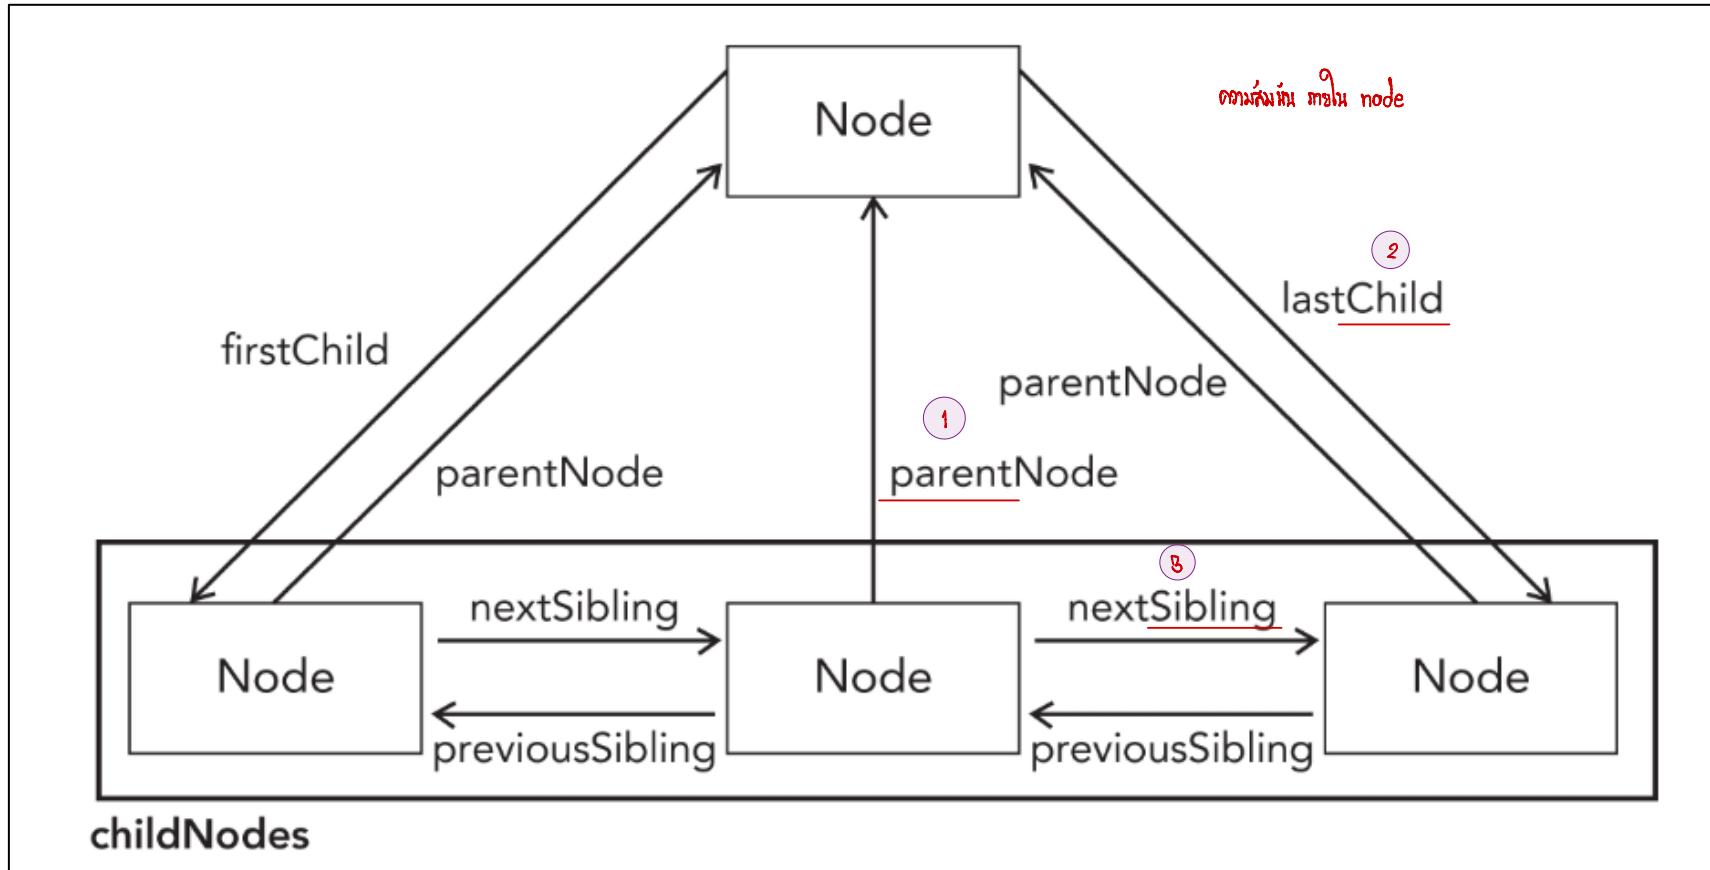

វិធាន query

- #id
- .class name
- tag name
- css selector

ការចិត្តអង្គ

- Parent node
- Sibling node
- Child node

With all of these relationships, the **childNodes** property is really more of a convenience than a necessity because **it's possible to reach any node in a document tree** by simply using the relationship pointers.



Element Traversal

The Element Traversal API adds five new properties to DOM elements:

- `childElementCount`—Returns the number of child elements (excludes text nodes and comments).
- `firstElementChild`—Points to the first child that is an element. **Element-only version of `firstChild`.**
- `lastElementChild`—Points to the last child that is an element. **Element-only version of `lastChild`.**
- `previousElementSibling`—Points to the previous sibling that is an element. **Element-only version of `previousSibling`.**
- `nextElementSibling`—Points to the next sibling that is an element. **Element-only version of `nextSibling`.**

Element Traversal Example

```
<!DOCTYPE html>
<html lang="en">
  <head>
    <title>Manipulating Elements</title>
  </head>
  <body>
    <h3>SIT@KMUTT Restaurant</h3>
    <div class="menu">
      <ul id="appetizer">
        <li class="vegan">Vegetable Rolls</li>
        <li class="meat">Chicken Wings</li>
        <li class="meat">Tuna Sandwich</li>
      </ul>
      <ul id="soup">
        <li class="meat">Spicy Bacon-Corn Soup</li>
        <li class="vegan">Vegetable Soup</li>
        <li class="meat">Beef Soup</li>
        <li class="vegan">Coconut Soup</li>
      </ul>
    </div>
    <p>***Enjoy Your Meal, Thank you***</p>
  </body>
</html>
```

```
const htmlElement = document.querySelector('html')
console.log(htmlElement.parentNode) // #document root node
console.log(htmlElement.parentElement) // null
```

```
const soupMenu = document.querySelector('#soup')

const firstChildNode = soupMenu.firstElementChild
const nextFirstChildNode =
firstChildNode.nextElementSibling
const lastChildNode = soupMenu.lastElementChild
const previousLastChildNode =
lastChildNode.previousElementSibling

console.log(firstChildNode)
// <li class="meat">Spicy Bacon-Corn Soup</li>
console.log(lastChildNode)
// <li class="vegan">Coconut Soup</li>
console.log(nextFirstChildNode)
// <li class="vegan">Vegetable Soup</li>
console.log(previousLastChildNode)
// <li class="meat">Beef Soup</li>

const meatMenus = document.querySelectorAll('.meat')
meatMenus.forEach((meatMenu) => console.log(meatMenu))
/* <li class="meat">Chicken Wings</li>
<li class="meat">Tuna Sandwich</li>
<li class="meat">Spicy Bacon-Corn Soup</li>
<li class="meat">Beef Soup</li> */
```

Element Traversal Example

```
<!DOCTYPE html>
<html lang="en">
  <head>
    <title>Manipulating Elements</title>
  </head>
  <body>
    <h3>SIT@KMUTT Restaurant</h3>
    <div class="menu">
      <ul id="appetizer">
        <li class="vegan">Vegetable Rolls</li>
        <li class="meat">Chicken Wings</li>
        <li class="meat">Tuna Sandwich</li>
      </ul>
      <ul id="soup">
        <li class="meat">Spicy Bacon-Corn Soup</li>
        <li class="vegan">Vegetable Soup</li>
        <li class="meat">Beef Soup</li>
        <li class="vegan">Coconut Soup</li>
      </ul>
    </div>
    <p>***Enjoy Your Meal, Thank you***</p>
  </body>
</html>
```

```
let currentChildNode=soupMenu.firstElementChild
// <li class="meat">Spicy Bacon-Corn Soup</li>

while (currentChildNode !== null) {
  if (currentChildNode.nodeType === 1) {
    console.log(currentChildNode)
  }
  currentChildNode =
  currentChildNode.nextElementSibling
}
```

```
<li class="meat">Spicy Bacon-Corn Soup</li>
<li class="vegan">Vegetable Soup</li>
<li class="meat">Beef Soup</li>
<li class="vegan">Coconut Soup</li>
```

*The `firstChild` and `lastChild` return the first and last child of a node, which can be any node type including text node, comment node, and element node.

**The `firstElementChild` and `lastElementChild` return the first and last child Element node.



Selecting Nodes

III Selecting Elements

The Document type provides methods to specific element or sets of elements to perform certain operations.

```
getElementById() // returns the element if found, or null if an element with that ID doesn't exist.
```

HTMLCollection getElementByTagName() and getElementsByClassName() are live.

When an underlying document is changed, the HTMLCollection will be updated automatically.

- 1• getElementsByTagName()
//returns an HTMLCollection of elements with the given tag name.
- 2• getElementsByClassName()
//returns A live HTMLCollection an array-like object of all child elements which have all the given class name(s).

Ex children

NodeList

- 3• getElementsByName()
// returns a NodeList, which returns all elements that have a given name attribute.
- 4• querySelectorAll() **ବ୍ୟାକ୍ ନୋଡ୍**
//the CSS query and returns all matching nodes instead of just one. This method returns a static instance of NodeList.
- 5• querySelector() **ବ୍ୟାକ୍ ନୋଡ୍ ଏବଂ ୧ ନୋଡ୍**
//a CSS query and returns the first descendant element that matches the pattern or null if there is no matching element.

Ex child



HTMLCollection Vs. NodeList

An **HTMLCollection** is always a **live collection of element nodes**.

- For example: If you add a `` element to a list in the DOM, the list in the HTML Collection will also change.
- A HTMLCollection items can be accessed by their name attribute, id attribute, or index number.

A **NodeList** is a **list of all nodes including elements nodes, attribute nodes, and text nodes** extracted from a document.

- A NodeList is most often a static collection. For example: If you add a `` element to a list in the DOM, the list in the NodeList will not change.
- NodeList items can only be accessed by their index numbers.
- Both an HTMLCollection object and a NodeList object is an array-like collections (lists) of nodes extracted from a document.

HTMLCollection and NodeList Examples

```
<!DOCTYPE html>
<html lang="en">
  <head>
    <title>Document</title>
  </head>
  <body>
    <div id="app">
      This is a Text Node
      <div>This is a div Element Node#1</div>
        <div>This is a div Element Node#2</div>
      </div>
      <script src="./main.js" />
    </body>
  </html>
```

```
HTMLCollection(2) [div, div]
  <div>This is a div Element Node#1</div>
  <div>This is a div Element Node#2</div>
NodeList(5) [text, div, text, div, text]
  " This is a Text Node "
  <div>This is a div Element Node#1</div>
▶ #text
  <div>This is a div Element Node#2</div>
▶ #text
▶
```

```
//main.js
const myApp = document.getElementById('app')
const childrensHTML = myApp.children //return HTMLCollection
const childNodesList = myApp.childNodes //return NodeList
Array.from(childrensHTML).forEach((element) => console.log(element))
//HTMLCollection(2) [div, div], cannot use forEach directly and need to create array
childNodesList.forEach((element) => console.log(element))
//NodeList(5) [text, div, text, div, text] can use forEach
```

HTMLCollection (live) Vs. NodeList (static)

```
<div id="sections">
  <div class="section">Section 1</div>
  <div class="section">Section 2</div>
  <div class="section">Section 3</div>
  <div class="section">Section 4</div>
  <!-- <div class="section">Section 5</div> -->
</div>
```

```
const sectionDiv = document.getElementById('sections')
const sectionsbySelectorAll = document.querySelectorAll('.section')
const sectionsByClassName = document.getElementsByClassName('section')
```

```
//create a new div section
const div = document.createElement('div')
div.classList = 'section'
div.innerHTML = 'Section 5'
sectionDiv.appendChild(div)
console.log(sectionsByClassName.length) //5
console.log(sectionsbySelectorAll.length) //4
```

Selecting Elements

```
<html lang="en">
  <head>
    <title>Document Object Model Sample Page</title>
  </head>
  <body>
    <h1 id="myHeading">Selecting Elements</h1>
    <h2 class="heading">Document Object Model</h2>
    <h2 class="heading">DOM</h2>
    <ul class="all-list-items">
      <li class=list-item>out of class</li>
      <li class="list-item">[1] Single Element by ID:</li>
      <li class="list-item">[2] Single Element by CSS selector:</li>
      <li class="list-item">[3] Multiple Element by CSS selector:</li>
      <li class="list-item">[4] Multiple Element by class (live):</li>
      <li class="list-item">[5] Multiple Element by tag (live):</li>
    </ul>
    <ul>
      <li>
        <input type="radio" value="red" name="color" id="colorRed">
        <label for="colorRed">Red</label>
      </li>
      <li>
        <input type="radio" value="green" name="color" id="colorGreen">
        <label for="colorGreen">Green</label>
      </li>
      <li>
        <input type="radio" value="blue" name="color" id="colorBlue">
        <label for="colorBlue">Blue</label>
      </li>
    </ul>
    <script src="main.js"></script>
  </body>
</html>
```

```
const domElementId = document.getElementById("myHeading")
const domByTagName = document.getElementsByTagName("ul")
const domByName = document.getElementsByName("color")
const domClassName = document.getElementsByClassName("list-item")
const domQuerySelector = document.querySelector(".heading")
const domQuerySelectorAll = document.querySelectorAll(".heading")
console.log(domElementId) //<h1 id="myHeading">Selecting Elements</h1>
console.log(domByTagName) //HTMLCollection(2) [ul.all-list-items, ul]
console.log(domByTagName.length) //2
console.log(domByTagName.item(0)) //ul class="all-list-items">...</ul>
console.log(domByName) //NodeList(3) [input#colorRed, input#colorGreen, input#colorBlue]
console.log(domClassName) //HTMLCollection(6) [li.list-item, li.list-item, li.list-item, li.list-item, li.list-item, li.list-item]
console.log(domQuerySelector) //<h2 class="heading">Document Object Model</h2>
console.log(domQuerySelectorAll) //NodeList(2) [h2.heading, h2.heading]
```

```
▶ h1#myHeading
▶ HTMLCollection(2) [ul.all-list-items, ul]
2
▶ ul.all-list-items
▶ NodeList(3) [input#colorRed, input#colorGreen, input#colorBlue]
▶ HTMLCollection(6) [li.list-item, li.list-item, li.list-item, li.list-item, li.list-item]
▶ h2.heading
▶ NodeList(2) [h2.heading, h2.heading]
```




Manipulating Nodes



Manipulating Nodes

- `appendChild()` // adds a newly node to the end of the `childNodes` list
- `createElement()` //create a new HTML element
- `insertBefore(newNode, referenceNode)` //The node to insert becomes the previous sibling of the reference node
- `replaceChild(newChild, oldChild)` //replaces a child node within the given (parent) node
- `removeChild(child)` //removes a child node from the DOM and returns the removed node.

```
<html lang="en">
  <head>
    <title>Manipulating Elements</title>
  </head>
  <body>
    <ul id="programlang"></ul>
  </body>
</html>
```

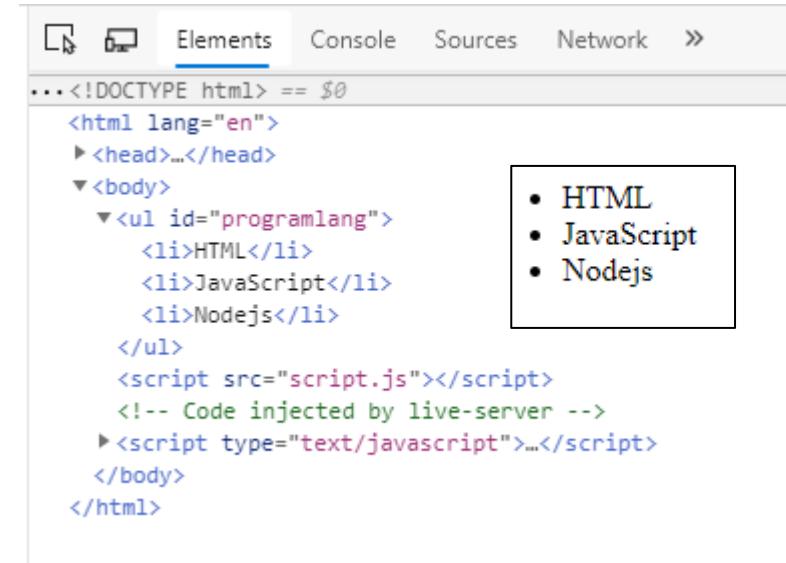

```
const langs = ["HTML", "JavaScript", "Nodejs"]
const langElement = document.querySelector("#programlang")
for (const lang of langs) {
  const li=document.createElement("li")
  li.innerHTML=lang
  langElement.appendChild(li)
}
```

- Java
- HTML
- JavaScript
- Nodejs

```
const firstLangElement=langElement.firstElementChild
const newLangNode=document.createElement("li")
newLangNode.innerHTML="Java"
langElement.insertBefore(newLangNode, firstLangElement)
```

...<!DOCTYPE html> == \$0

```
<html lang="en">
  <head>
    <title>Manipulating Elements</title>
  </head>
  <body>
    <ul id="programlang">
      <li>Java</li> (highlighted)
      <li>HTML</li>
      <li>JavaScript</li>
      <li>Nodejs</li>
    </ul>
    <script src="script.js"></script>
    <!-- Code injected by live-server -->
    ><script type="text/javascript">...</script>
  </body>
</html>
```

```
const newLastLangNode=document.createElement("li")
newLastLangNode.innerHTML="C++"
langElement.insertBefore(newLastLangNode, null)
```

...<!DOCTYPE html> == \$0

```
<html lang="en">
  <head>
    <title>Manipulating Elements</title>
  </head>
  <body>
    <ul id="programlang">
      <li>Java</li>
      <li>HTML</li>
      <li>JavaScript</li>
      <li>Nodejs</li>
      <li>C++</li> (highlighted)
    </ul>
    <script src="script.js"></script>
    <!-- Code injected by live-server -->
    ><script type="text/javascript">...</script>
  </body>
</html>
```

- Java
- HTML
- JavaScript
- Nodejs
- C++

```
langElement.replaceChild(newLastLangNode, newLangNode)
```

The screenshot shows the browser's developer tools with the 'Elements' tab selected. The DOM tree is displayed, starting with the root `<!DOCTYPE html>`. It includes an `html` element with `lang="en"`, a `head` section containing a `title` with the text 'Manipulating Elements', and a `body` section. Inside the `body` is a `ul` element with the id 'programlang', which contains four `li` items: 'C++', 'HTML', 'JavaScript', and 'Nodejs'. Below the `ul` is a `script` tag with `src="script.js"`. A comment block follows, and then another `script` tag with `type="text/javascript"`. The entire code block is preceded by a multi-line comment: `...<!DOCTYPE html> == $0`.

```
...<!DOCTYPE html> == $0
<html lang="en">
  <head>
    <title>Manipulating Elements</title>
  </head>
  <body>
    <ul id="programlang">
      <li>C++</li>
      <li>HTML</li>
      <li>JavaScript</li>
      <li>Nodejs</li>
    </ul>
    <script src="script.js"></script>
    <!-- Code injected by live-server -->
    <script type="text/javascript">...</script>
  </body>
</html>
```

- C++
- HTML
- JavaScript
- Nodejs

```
langElement.removeChild(langElement.firstChild)
```

The screenshot shows the browser's developer tools with the 'Elements' tab selected. The DOM tree has been modified. The `ul` element with the id 'programlang' now only contains three `li` items: 'HTML', 'JavaScript', and 'Nodejs'. The first `li` item 'C++' has been removed. The rest of the code structure remains the same.

```
...<!DOCTYPE html> == $0
<html lang="en">
  <head>...</head>
  <body>
    <ul id="programlang">
      <li>HTML</li>
      <li>JavaScript</li>
      <li>Nodejs</li>
    </ul>
    <script src="script.js"></script>
    <!-- Code injected by live-server -->
    <script type="text/javascript">...</script>
  </body>
</html>
```

- C++ ~~(crossed out)~~
- HTML
- JavaScript
- Nodejs



System Dialogs




System Dialogs

- The browser is capable of invoking system dialogs to display to the user through the **alert()**, **confirm()**, and **prompt()** methods.
- These dialogs are not related to the web page being displayed in the browser and do not contain HTML.
- Their appearance is determined by operating system and/or browser settings rather than CSS.
- Additionally, each of these dialogs is synchronous and modal, meaning code execution stops when a dialog is displayed, and resumes after it has been dismissed.


System Dialogs: alert()

- The `alert()` method simply accepts a string to display to the user.
- When `alert()` is called, a system message box displays the specified text to the user, followed by a single OK button.
- Alert dialogs are typically used when users must be made aware of something that they have no control over, such as an error.

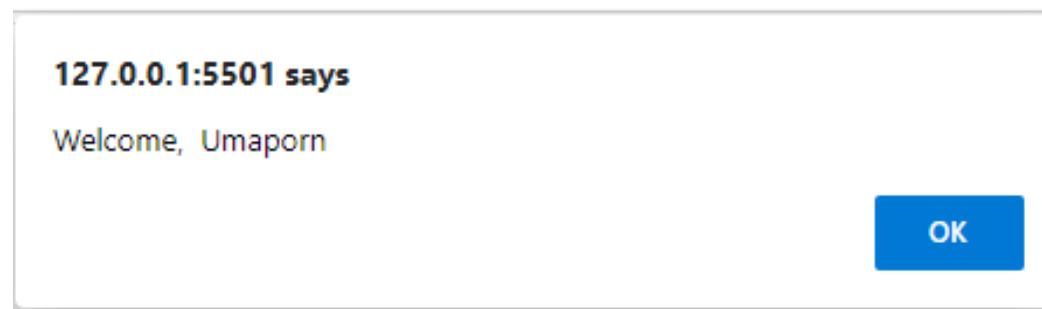

System Dialogs: confirm()

- A `confirm()` method looks similar to an alert dialog in that it displays a message to the user.
- The main difference between the two is the **presence of a Cancel button along with the OK button**, which allows the user to indicate if a given action should be taken.
- The `confirm()` method returns true if the user clicked "OK", and false otherwise.

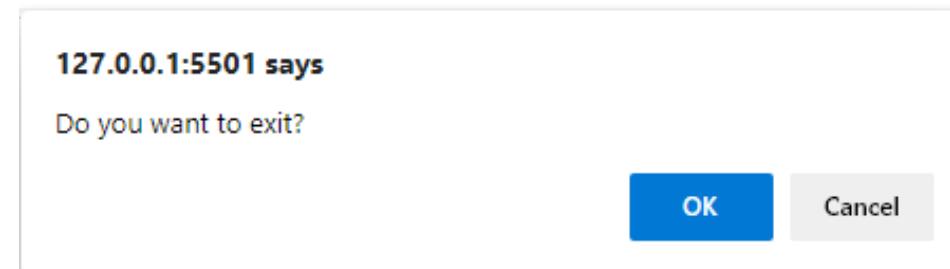

System Dialogs: prompt()

- The final type of dialog is displayed by calling `prompt()`, which along **with OK and Cancel buttons**, this dialog has a text box where the user may enter some data.
- The `prompt()` method accepts two arguments: the *text to display* to the user, and the *default value* for the text box (which can be an empty string).
- If the OK button is clicked, `prompt()` returns the value in the text box; if Cancel is clicked or the dialog is otherwise closed without clicking OK, the function returns null.

