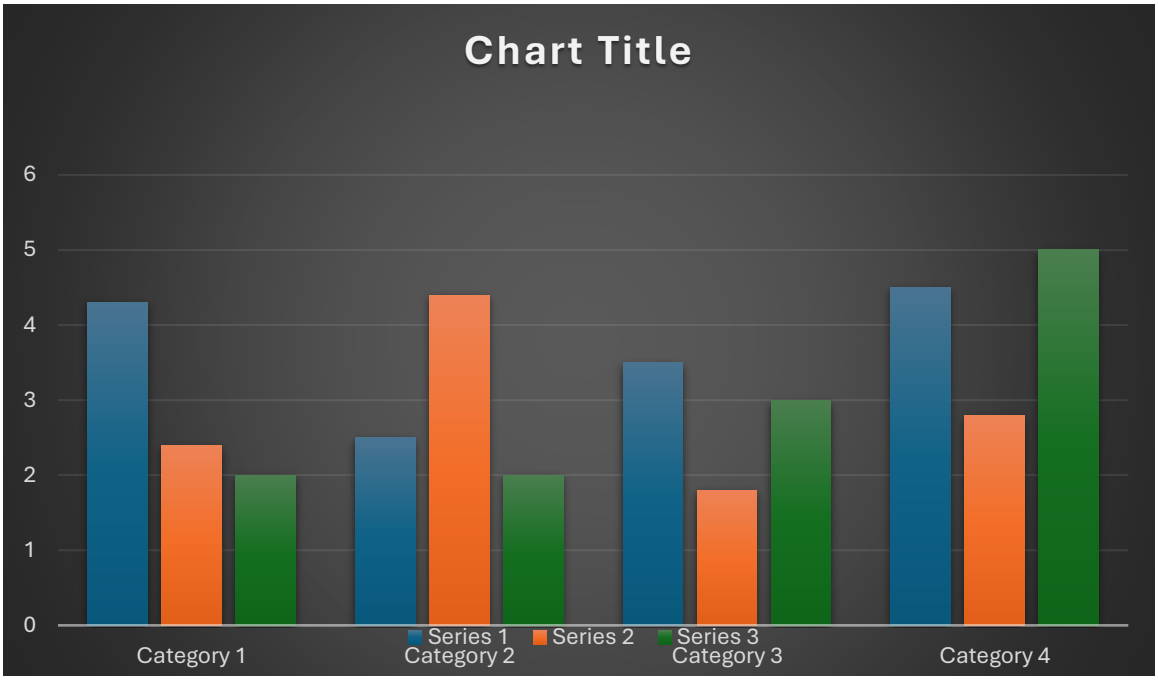

When complete, Codespaces loads with a terminal section at the bottom. Codespaces installs all the required extensions in your container. Once the package installs are complete, Codespaces executes the uvicorn command to start your web application running within your Codespace.

When the web application starts successfully, a message in the terminal **Ports** tab shows that the server is running on port 8000 within your Codespace.

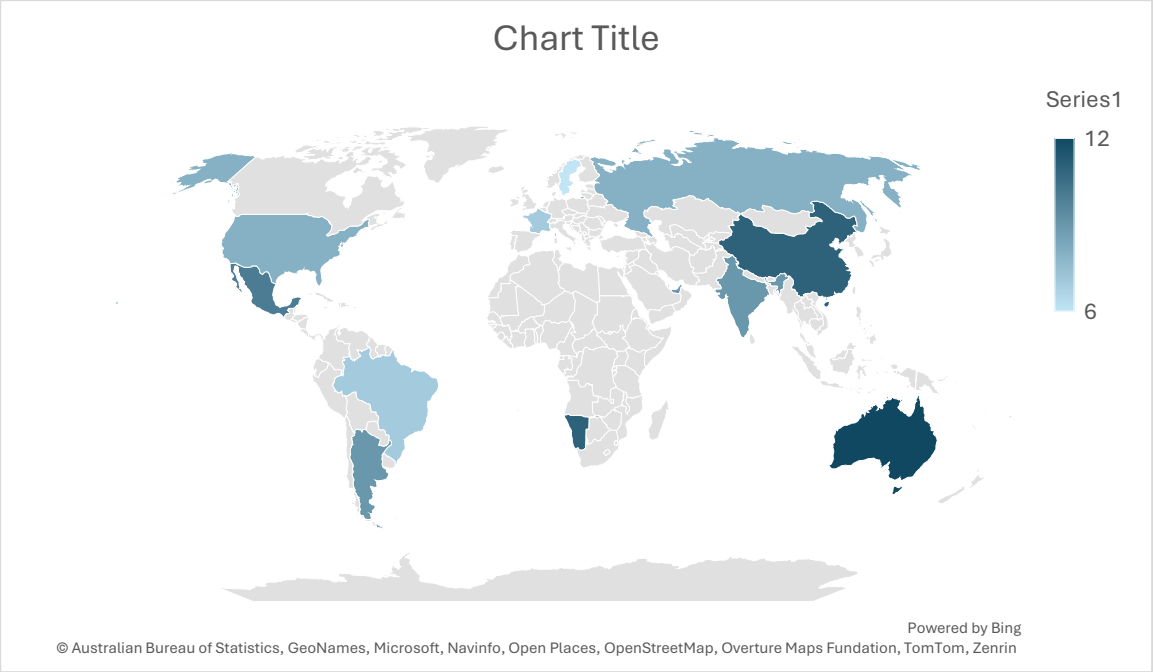
Chart Title
Series1
12
6
Powered by Bing
© Australian Bureau of Statistics, GeoNames, Microsoft, Navinfo, Open Places, OpenStreetMap, Overture Maps Fundation, TomTom, Zenrin

Hello Kitty

Molly

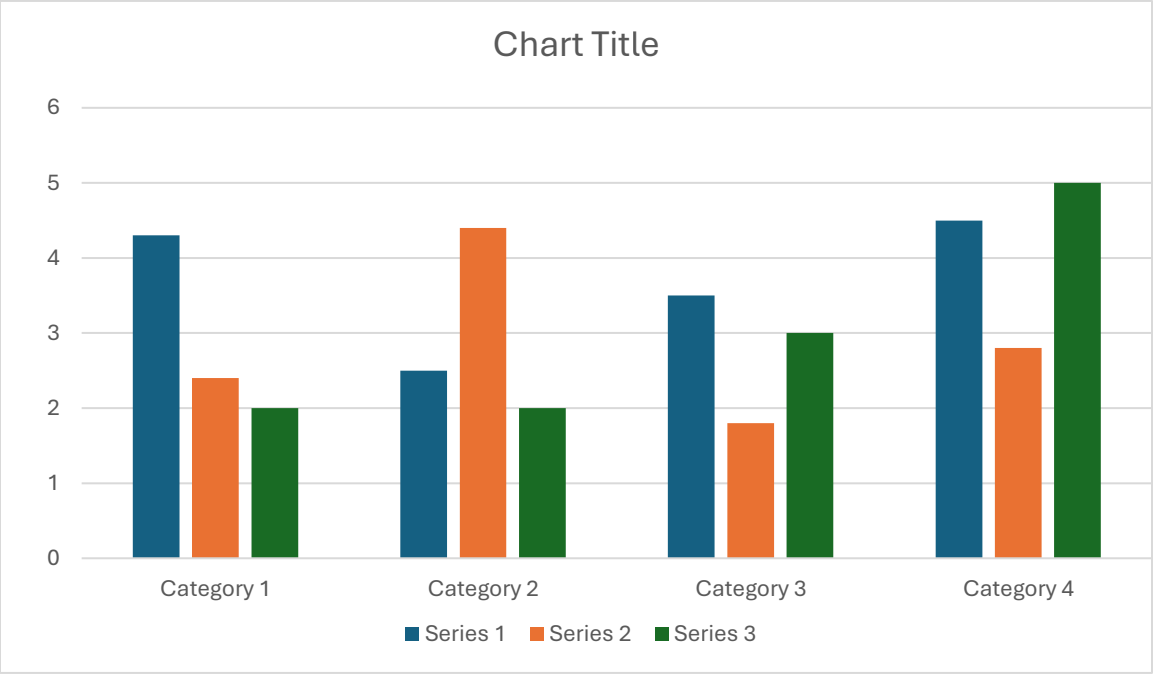

When complete, Codespaces loads with a terminal section at the bottom. Codespaces installs all the required extensions in your container. Once the package installs are complete, Codespaces executes the uvicorn command to start your web application running within your Codespace.

When the web application starts successfully, a message in the terminal **Ports** tab shows that the server is running on port 8000 within your Codespace.