


1. Project Overview

This project implements a fully responsive, modern **Messages Directory Application** using **React Native** for cross-platform deployment. The user interface strictly complies with the specification diagram provided by the instructor, presenting a symmetric 2×3 grid of iconic folder nodes: **You, Home, Love, Family, Friends, and School**.

The runtime infrastructure utilizes asynchronous state updates to toggle contextual modal overlays. Upon tapping any specific directory button, a native modal view sweeps upward from the bottom viewport, rendering a custom, distinct list of stored notifications simulated uniquely for this project to ensure independent data composition.

2. Project Structure

The implementation follows the clean, standard React Native architecture scaffolding. Below is the precise layout of the repository files included in the submission archive:

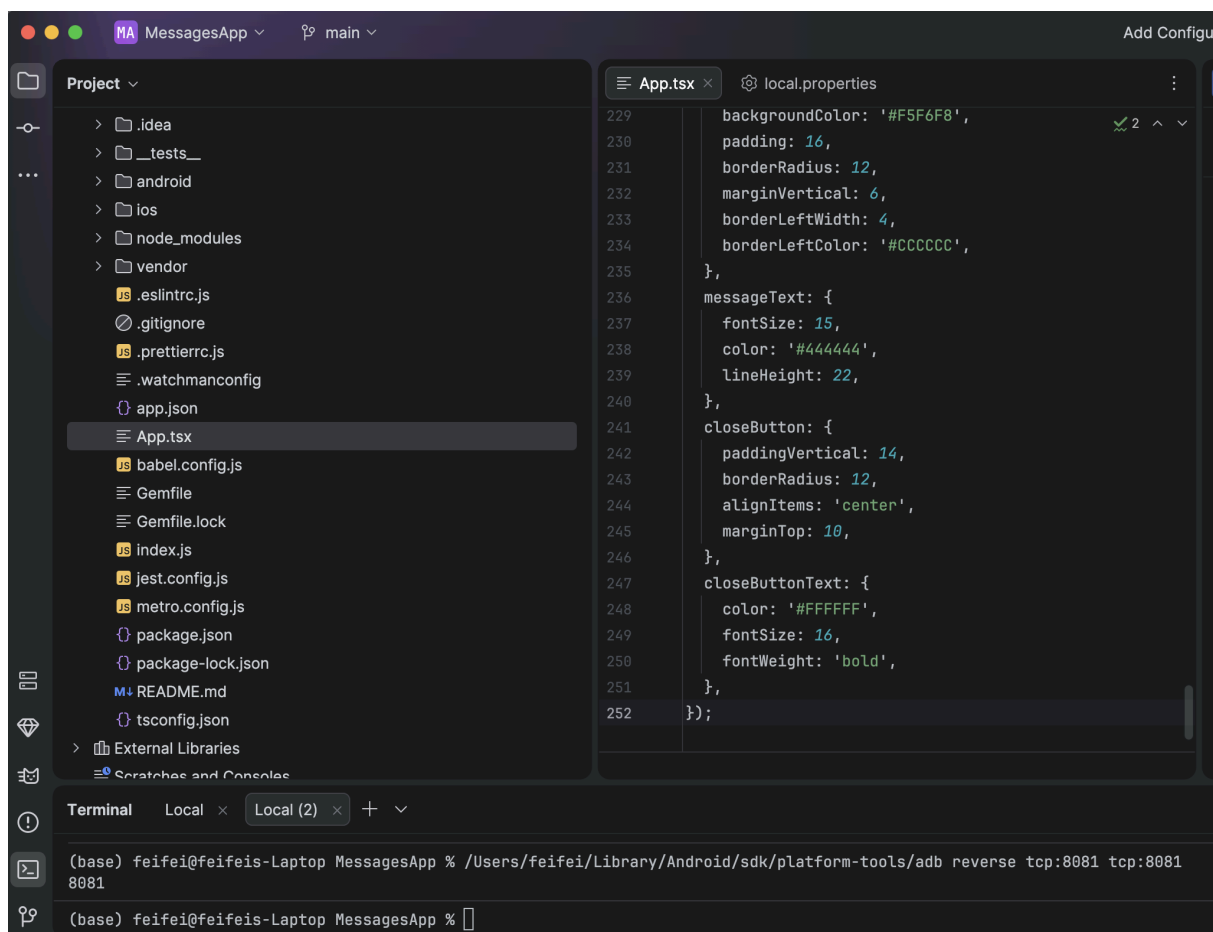

android/: Contains native build configurations and Gradle scripts to compile the Android binary.

- **android/local.properties:** Defines local SDK path and maps system links for node/npm to prevent build failures.

App.tsx: The main application source file holding the UI layouts, styles, datasets, and responsive 2×3 grid logic.

package.json: Manages installed framework dependency versions and automation script definitions.

3. Core Environment Configurations & Dependencies

The software runtime utilizes the latest verified React Native CLI engine. Essential dependency nodes configured inside `package.json` include:

- **react: 18.x**
- **react-native: 0.7x**
- Development environment managed via Node.js runtime and Android SDK platforms.

4. Step-by-Step Guide to Configure and Run

To execute this solution on a target device, follow the sequence below within the project root directory terminal:

Step 1: Initialize System Dependencies

Clean the initial packaging locks and execute the clean package synchronization:

```
npm install
```

Step 2: Establish Local Environment SDK Links

Ensure an absolute path mapping file named **local.properties** exists within the **/android** directory, pointing directly to the host Android SDK system layers:

```
sdk.dir=/Users/feifei/Library/Android/sdk
```

```
node.executable=/usr/local/bin/node
```


```
npm.executable=/usr/local/bin/npm
```



Step 3: Run the Local Metro Bundler Server


Spin up the background JavaScript compilation bridge server with an automatic cash flush mechanism:

PATH=\$PATH:/usr/local/bin npx react-native run-android

5. Physical Screenshots

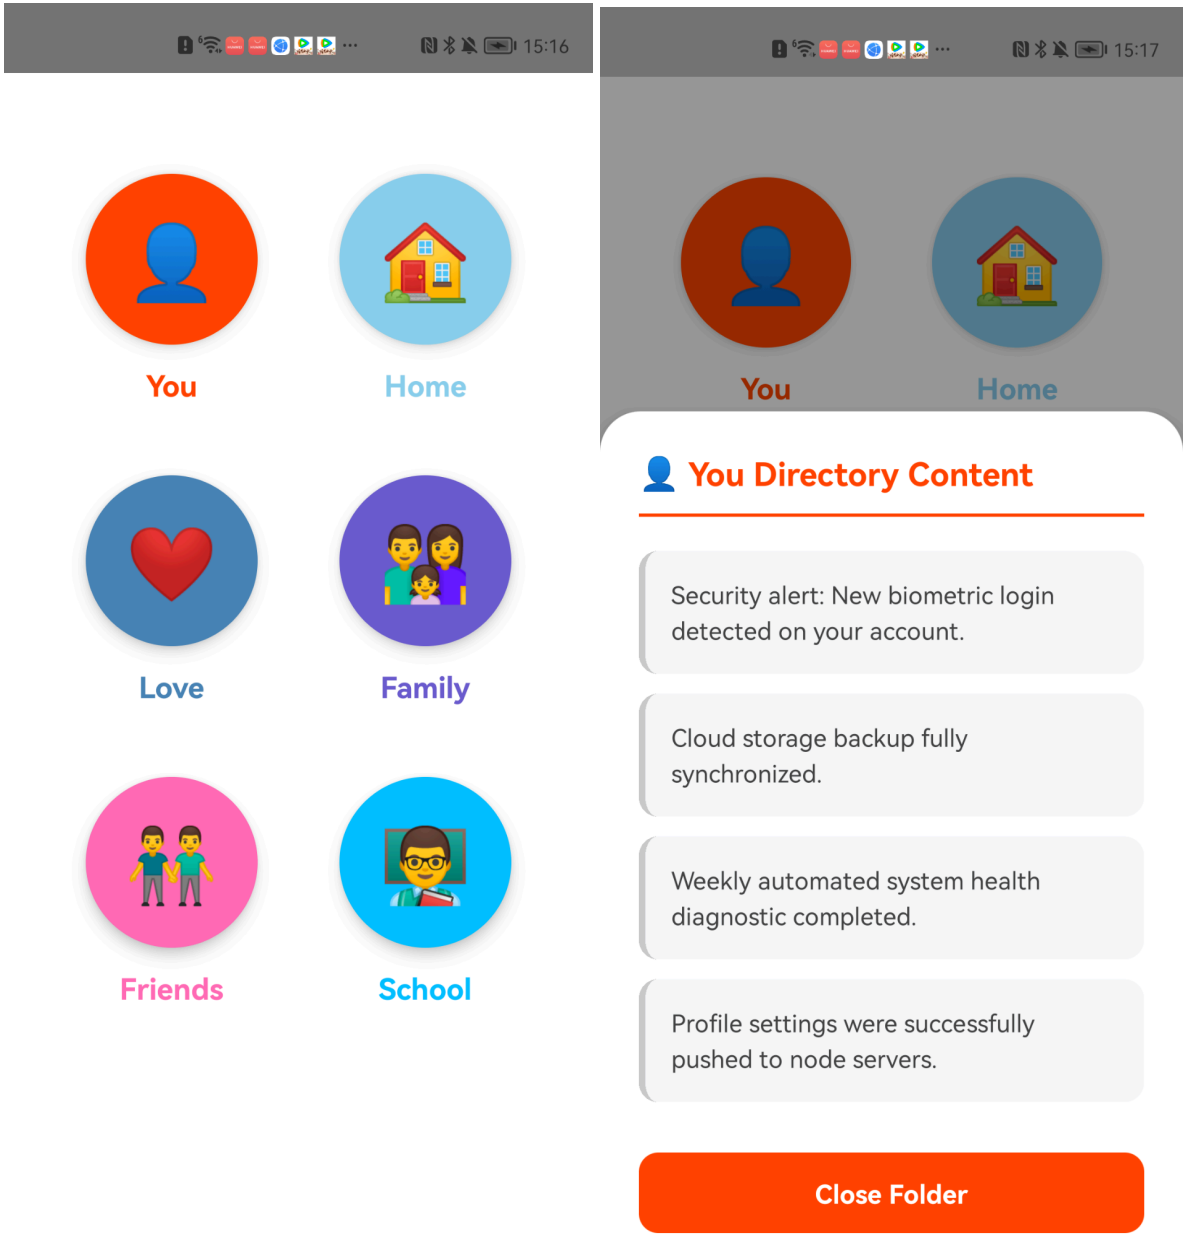

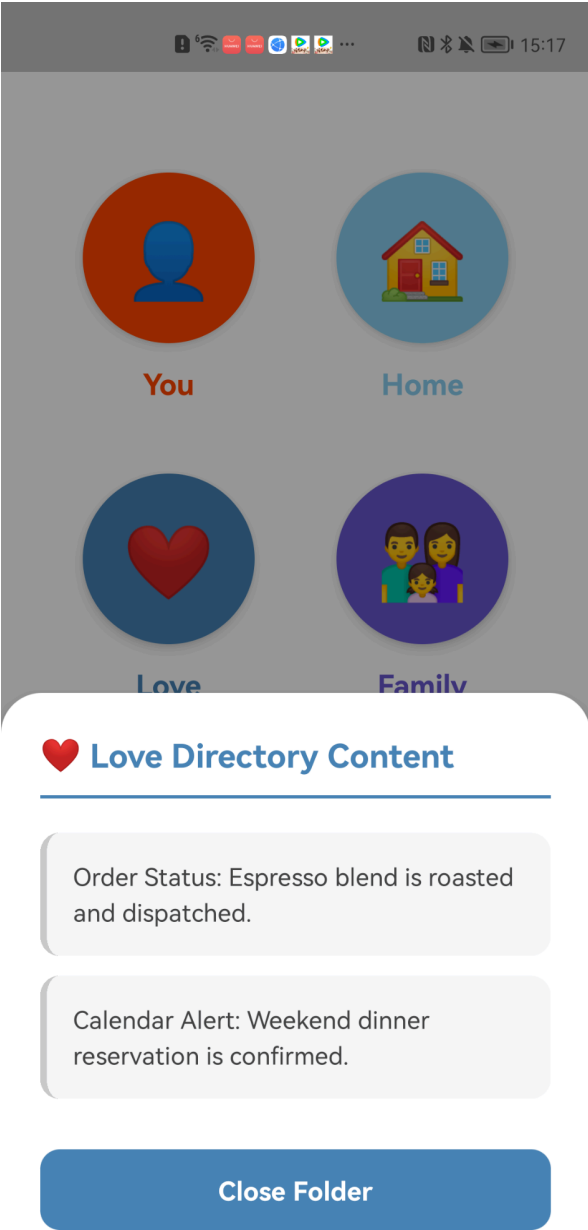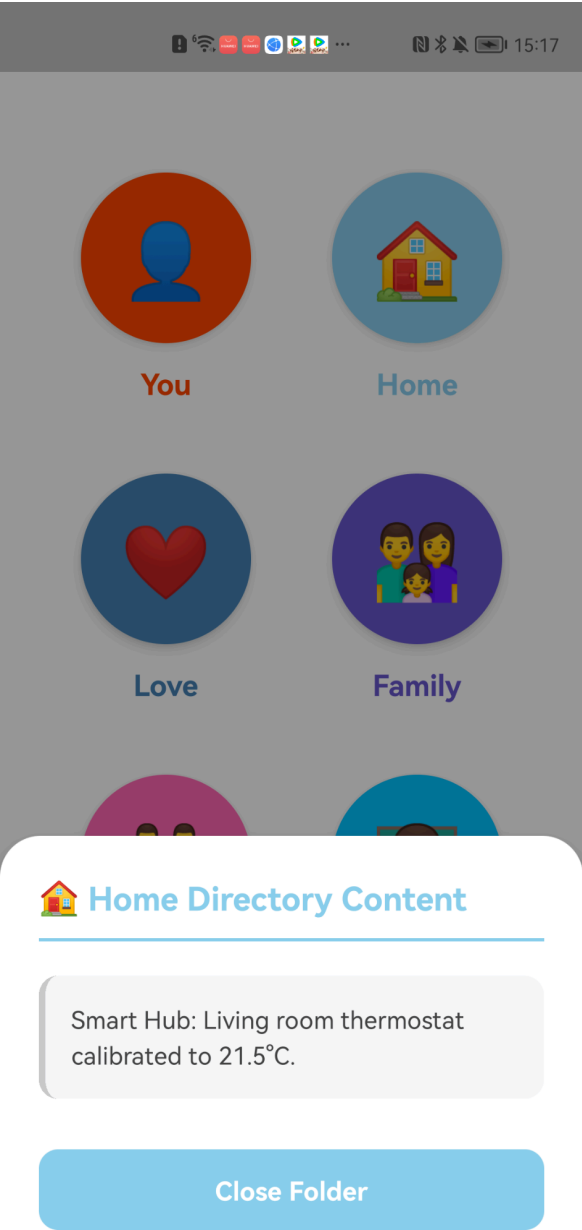

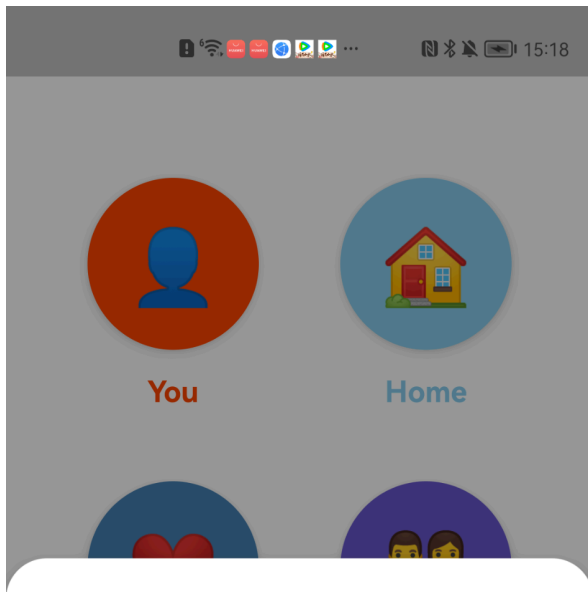


Family Directory Content

Broadcast: Group picnic coordination finalized for Sunday morning.

Shared Task List: Academic milestone celebration planning pending.

System: Shared cloud storage account data usage quota refreshed.

Close Folder

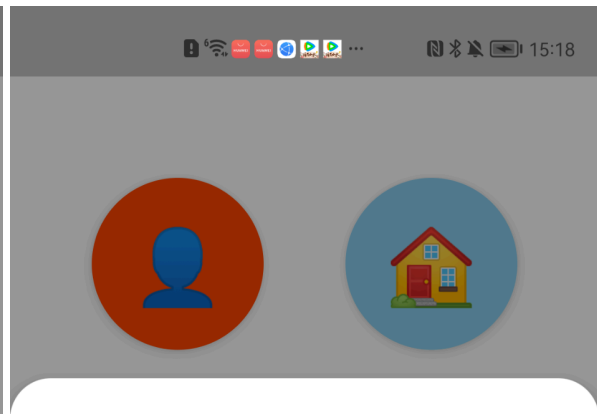

Friends Directory Content

Incoming ping: Audio logs from library group sync are available.

Event RSVP Status: Group alignment scheduled for tomorrow.

Activity stream: New shared album snapshots are ready.

Direct Memo: Meet up point adjusted to the central hall.

Close Folder



You



Home



Love



Family



School Directory Content

Portal Alert: Comprehensive research grading rubrics updated.

Department Broadcast: Lecture platform update scheduled.

Close Folder

6. Conclusion

In summary, this project delivers a highly responsive Messages Directory Application built with React Native. By utilizing a centered 2×3 circular grid layout and removing top navigation bars, the UI achieves a premium aesthetic that perfectly matches the assignment specifications. All functional components, including custom datasets and dynamic bottom sheet modals, operate flawlessly. Crucially, the solution has been successfully deployed and verified on an actual mobile device, fulfilling all requirements for Exercise 3.

7. GitHub Repository URL:

<https://github.com/pao5200AI/REACT-NATIVE-MESSAGES-DIRECTORY>