

EPIDEMIC CONTROL WITH LEARNING & OPTIMIZATION


Paul Beaujean^{†*}

Advisors: Prof. Cristina Bazgan[†], Éric Gourdin^{*}

[†]LAMSADE, Université Paris-Dauphine, ^{*}Orange Labs

Network security

- Networked systems face propagation of malware, cascading hardware failures, DDoS.
- Software-defined networking enables full automated control over network topology.

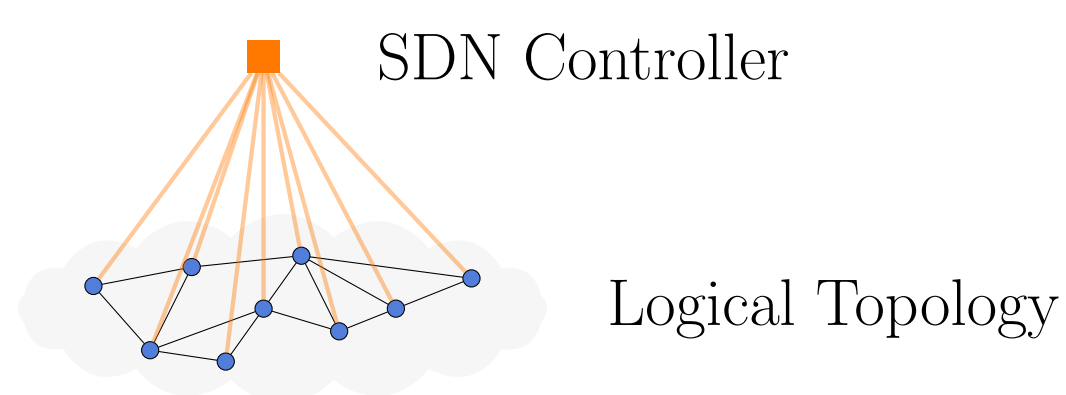


Model


Base: Epidemic models can be used to represent propagating threats: each health status corresponds to a compartment (e.g.: S for susceptible, I for infected).

Refinement: Standard compartmental models may be refined with network structure: underlying topology is given by an undirected graph $G = (V, E)$.

Result: The Markov process has $|\{S, I\}|^{|V|}$ states and the transition rates for a node depend on the state of its neighbours. The model is parametrized by constants: β and δ .

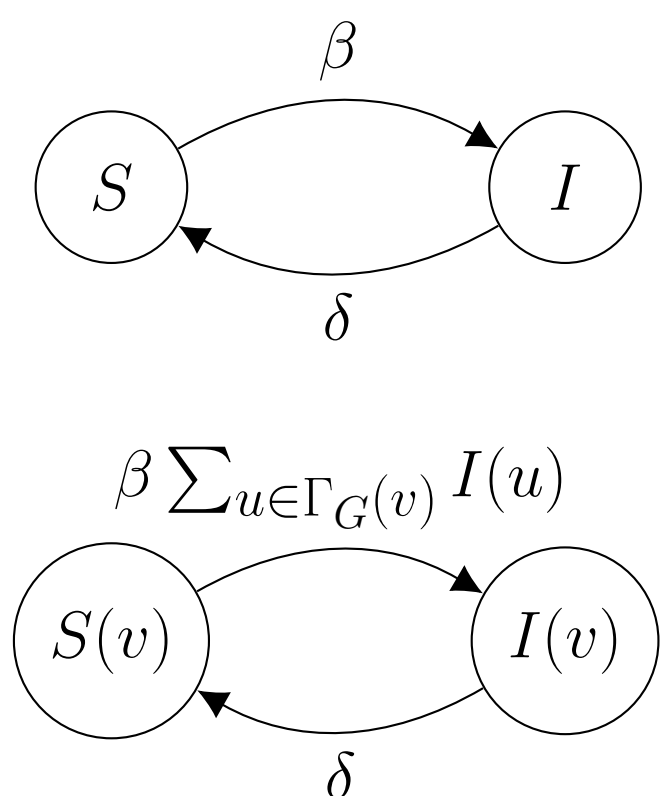

Turning a theorem into a control system

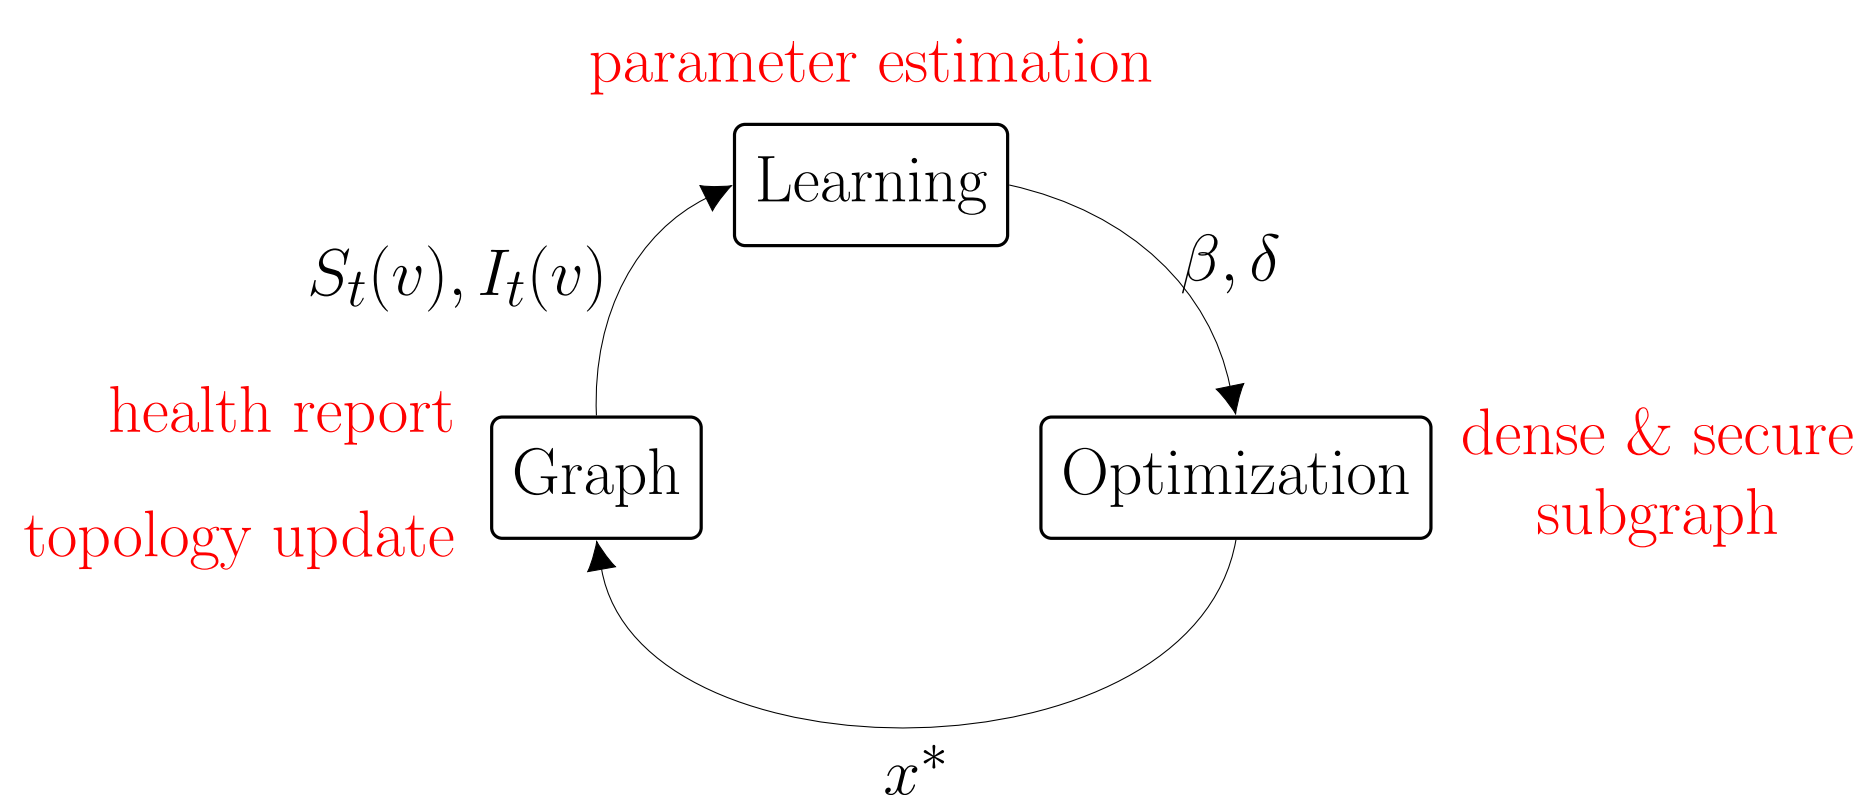

Definition (Spectral radius)

The spectral radius of a graph is the largest eigenvalue of its adjacency matrix.

Remark (Ganesh et al., 2005)

Given a SIS epidemic with parameters β and δ on a graph G :

$$\lambda_{\max}(G) < \frac{\delta}{\beta}$$


implies that the epidemic dies out in time $O(\log n)$.

Know your enemy: learning epidemic parameters

Anomaly detection

- Each node determines its health status by learning.
- One Class SVMs are a family of classifiers used for anomaly detection.
- A OC-SVM is trained on "healthy" data only: the system does not require prior experience of the epidemic to come.

Maximizing the margin w.r.t. the origin

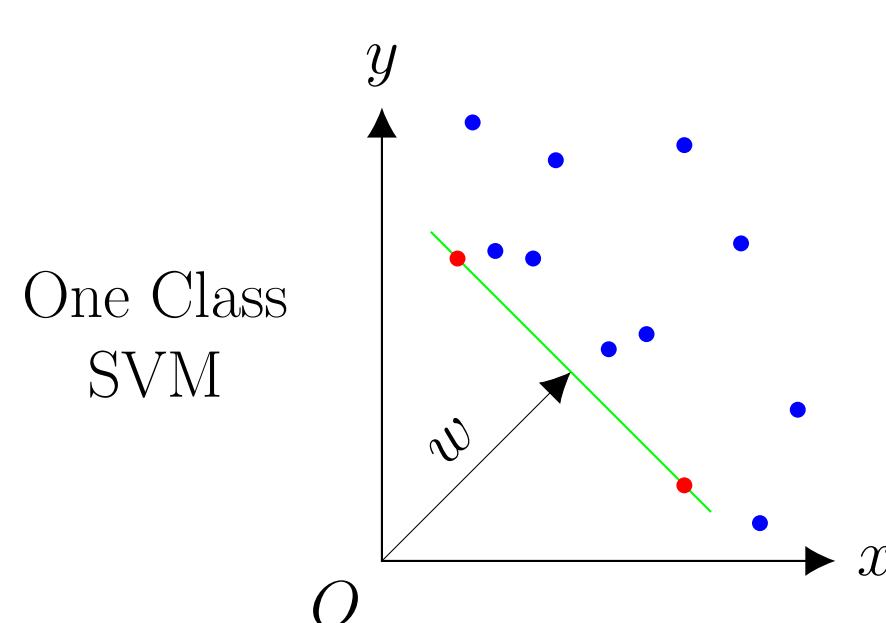

Parameter estimation

Input: Observations of the health status of a node at a given time.

Model: SIS model with unknown parameters β and δ .

Estimate: β and δ .

Finding a secure subgraph: a NP-hard endeavour

Mathematical program

$$\begin{aligned} \max \sum_{e \in E} x_e \\ A(x) \preceq \delta/\beta I \\ x \in \{0, 1\}^m \end{aligned}$$

0-1 SDP can be solved by branch & bound. We look instead for approximation algorithms.

Closed walks

- Norm inequalities give:
 $\lambda_{\max}(A) = O(\|A\|_{\log n})$.
- The number of closed walks of length k is $\|A\|_k^k$.
- Find subgraph with few closed walks of length $\log n$.

SDP and random matrices

- Relaxation of the mathematical program is a SDP.
- Optimal solution x^* used as a distribution.
- Leverage concentration of measure for symmetric random matrices.

Interlacing polynomials

- Study characteristic polynomial $\det(tI - A)$ of the graph.
- Undirected graphs have real roots: a rare property?
- Combinatorial polynomials are often real-stable.